

Volume

#

R0595

Remonumentations for Cor. of Secs. 1, 2, 11 and 12, T. 19 S., R. 6 E.,

CHAINS

from the cor. of secs. 1, 2, 11 and 12.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for reference monument, bears S. $34^{\circ}50'$ W., $681\frac{1}{2}$ lks. dist., with brass cap mkd. T19S R6E S11 RM 1976 and an arrow pointing to the cor.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for reference monument, bears S. $75^{\circ}20'$ W., $762\frac{1}{2}$ lks. dist., with brass cap mkd. T19S R6E S11 RM 1976 and an arrow pointing to the cor.

These reference monuments were established by Jerry Thomas Supervisory Cadastral Surveyor, November 29, 1976.

Glen B. Husted 12/6/76
Acting
Chief, Branch of Cadastral Surveyors

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT MANTI-LASAL NATIONAL FOREST

ORIGINAL
FIELD NOTES

OF THE
REMONUMENTATION OF CORNERS IN

TOWNSHIP 13 SOUTH, RANGE 5 EAST

TOWNSHIP 13 SOUTH, RANGE 6 EAST

TOWNSHIP 15 SOUTH, RANGE 6 EAST

TOWNSHIP 16 SOUTH, RANGE 6 EAST

TOWNSHIP 17 SOUTH, RANGE 6 EAST

TOWNSHIP 25 SOUTH, RANGE 24 EAST

TOWNSHIP 25 SOUTH, RANGE 25 EAST

TOWNSHIP 26 SOUTH, RANGE 23 EAST

TOWNSHIP 26 SOUTH, RANGE 25 EAST

TOWNSHIP 26 SOUTH, RANGE 26 EAST

TOWNSHIP 27 SOUTH, RANGE 23 EAST

TOWNSHIP 27 SOUTH, RANGE 24 EAST

TOWNSHIP 28 SOUTH, RANGE 23 EAST

TOWNSHIP 28 SOUTH, RANGE 24 EAST

TOWNSHIP 28 SOUTH, RANGE 25 EAST

TOWNSHIP 33 SOUTH, RANGE 23 EAST

TOWNSHIP 34 SOUTH, RANGE 23 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 19 61, approved February 16, 1961

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated June 1, 1970

Survey commenced August 4, 1970

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 13 S. R. 5 E. Mer. Salt Lake

6	5	4	3	2	3 1
7	8	9	10	4 3 3	3
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 13 S. R. 6 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 15 S. R. 6 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 16 S. R. 6 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10 10 9	11	12
18	17	16	8 15	14	13
19	20	21	8 22 8 7	23	24
30	29	28	27	26	25
31	32 71	33	34	35	36

Tp. 17 S. R. 6 E. Mer Salt Lake

6	11 5 11	4	3	2	1
7	8 11	9 10	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36 11)

Tp. 25 S. R. 24 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	17 21	22	23	16 ²⁴ 16
30 15 18	29	28	27	26 17	25
15 31 15	18 31	33	34	35	

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 25 S. R. 25 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19 20	20	21	22	23	24
30	29	28	27	26	25
19 31	32	33	19 34	35	36

Tp. 26 S. R. 23 E. Mer. Salt Lake

6	5	4	3	2	22 1
7	8	9	10	11	21 12 24 21
18	17	16	15	14	13
19	20	21	22	23 23 22	24
30	29	28	27	26	25
31	32	33	34	35	20 20 36

Tp. 26 S. R. 25 E. Mer. Salt Lake

24 6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 26 S. R. 26 E. Mer. Salt Lake

6	5	4	3	2	1
7	8 25	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 27 S. R. 23 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13 26
19	20	21	22	23	24 25
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 27 S. R. 24 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
26 30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION
 CORNER MONUMENTS

Tp. 28 S. R. 23 E. Mer. Salt Lake

6	5	4	3	27 2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 28 S R. 24 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27 29	26 28	25
31	32	33	34	35	36

Tp. 28 S. R. 25 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19 32	20	21	22	23 31	24
30	29	28 32 32	27	26	25
31	32	33	34	35	

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 33 S. R. 23 E. Mer. Salt Lake

33 6	5	4	3	2	1
7 38	8 37	9	10	11	12
18 37	17 36	16	15	14	13
19	20	21 35	22 34	23	24
30	29 36	28 35	27 34	26	25
31	32 35	33	34	35	36

Tp. 34 S R. 23 E. Mer. Salt Lake

6 44	5 45	4 41	3	2 41	1
7	8	9 43	10	11	12
18	17	16	15	14	13
19	20	21 42	22	23	24
30 40	29 40	28 41	27	26	25
31 39	32	33 38	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service land, situated in the Manti-Lasal National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 13 S., R. 5 E., Salt Lake Meridian, 15° 35' E.
 T. 13 S., R. 6 E., Salt Lake Meridian, 15° 35' E.
 T. 15 S., R. 6 E., Salt Lake Meridian, 15° 25' E.
 T. 16 S., R. 6 E., Salt Lake Meridian, 15° 25' E.
 T. 17 S., R. 6 E., Salt Lake Meridian, 15° 25' E.
 T. 25 S., R. 24 E., Salt Lake Meridian, 14° 45' E.
 T. 25 S., R. 25 E., Salt Lake Meridian, 14° 45' E.
 T. 26 S., R. 23 E., Salt Lake Meridian, 14° 50' E.
 T. 26 S., R. 25 E., Salt Lake Meridian, 14° 45' E.
 T. 26 S., R. 26 E., Salt Lake Meridian, 14° 45' E.
 T. 27 S., R. 23 E., Salt Lake Meridian, 14° 45' E.
 T. 27 S., R. 24 E., Salt Lake Meridian, 14° 45' E.
 T. 28 S., R. 23 E., Salt Lake Meridian, 14° 45' E.
 T. 28 S., R. 24 E., Salt Lake Meridian, 14° 50' E.
 T. 28 S., R. 25 E., Salt Lake Meridian, 14° 50' E.
 T. 33 S., R. 23 E., Salt Lake Meridian, 14° 40' E.
 T. 34 S., R. 23 E., Salt Lake Meridian, 14° 40' E.

T. 13 S., R. 5 E., Salt Lake Meridian, Utah

Township 13 South, Range 5 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Augustus D. Ferron and Adolphe Jesson in 1891 and 1892.

At the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 16 x 10 x 9 ins., firmly set and plainly mkd. with 5 notches on the N and 1 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S
 R 5 E R 6 E
 S 25 | S 26
 S 36 | S 31
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located in nearly level clearing, about 7 chs. dist. W of timber line that bears North and South.

At the ¼ sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., marked with a sandstone, 16 x 9 x 3 ins., firmly set and plainly mkd. ¼ on W face.

t the cor. point

t an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of Corners in
T. 13 S., R. 5 E., Salt Lake Meridian. Utah

CHAINS

T 13 S
R 5 E R 6 E
 $\frac{1}{4}$
S 25 | S 30
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located in nearly level clearing, 35 lks. dist. W. of trail road that bears North and South. No timber.

At the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., marked with a sandstone, 10 x 10 x 7 ins., firmly set and plainly mkd. with 4 notches on the N and 2 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S
R 5 E R 6 E
S 24 | S 19
S 25 | S 30
1970

Deposit the original cor. stone and an aluminum post alongside the iron post.

The cor. is located in nearly level sagebrush flat, about 6 chs. dist. North of improved dirt road that bears N. 45° W. and S. 45° E. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., marked with a sandstone, 25 x 11 x 2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S
R 5 E R 6 E
 $\frac{1}{4}$
S 12 | S 7
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located in grassy meadow land, at the cor. of fence that bears N. 75° E. and W. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, marked with a sandstone, 12 x 10 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

Remonumentation of Corners in
T. 13 S. R. 5 E. Salt Lake Meridian Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 5 E
 $\frac{1}{4}$ $\frac{S 1}{S 12}$
1970

from which

An aspen, 12 ins. diam., bears N. 35° E., 38 lks. dist., mkd. T13S R5E S1 $\frac{1}{4}$ BT.

An aspen, 7 ins. diam., bears S. 49° W., 35 lks. dist., mkd. T13S R5E $\frac{1}{4}$ S12 BT.

Deposit the original cor. stone and a steel fence post alongside the iron post.

The cor. is located on NW slope of hill, in thick aspen growth.

At the cor. of secs. 1, 2, 11 and 12, marked with a limestone, 14 x 10 x 4 ins., firmly set and plainly mkd. with 5 notches on the S and 1 on the E edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 5 E
 $\frac{S 2}{S 11}$ | $\frac{S 1}{S 12}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on rolling plateau, 80 lks. dist. E of dirt road that bears North and South. In sagebrush growth, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, marked with a limestone, 15 x 12 x 3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 13 S R 5 E
 $\frac{1}{4}$
S 2 | S 1
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

Remonumentation of Corners in
T. 13 S., R. 5 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on gentle NE slope of hill, 2 lks. dist. W. of 5 strand fence line that bears North and South In sagebrush growth, no timber.

At the cor. of secs. 2, 3, 10 and 11, marked with a limestone, 24 x 20 x 3 ins., firmly set and plainly mkd. with 5 notches on the S and 2 on the E edges.

from which an original bearing tree:

An aspen, 12 ins. diam., bears N. 67° E., 65 lks. dist., mkd. S2 T13S R5E BT. (Record, N. 67° W., 4 lks. dist.)

There is no remaining evidence of the other original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, with brass cap mkd.

T 13 S R 5 E
S 3 S 2
S 10 S 11
1970

from which

A pine, 12 ins. diam., bears S. 59° E., 26 lks. dist., mkd. T13S R5E S11 BT.

An aspen, 5 ins. diam., bears N. 59° W., 13 lks. dist., mkd. T13S R5E S3 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep N slope of hill, in thick pine and aspen growth.

T. 13 S., R. 6 E., Salt Lake Meridian, Utah

Township 13 South, Range 6 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corner was established by Augustus D. Ferron in 1891.

At the ¼ sec. cor. of secs. 18 and 19, marked with a sandstone, 20 x 12 x 8 ins., firmly set and plainly mkd. ¼ on N face and an X on top.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 6 E
S 18
¼ S 19
1970

Remonumentation of Corners in

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

The cor. is located on steep E slope of hill, 120 lks. dist. W of Gooseberry Creek that flows N. In sagebrush growth, no timber.

T. 15 S., R. 6 E., Salt Lake Meridian, Utah

Township 15 South, Range 6 East, Salt Lake Meridian, is located within the Manti-Lasal National Forest. The following corners were established by James C. Dick in 1900.

At the closing cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a sandstone, 18 x 14 x 3 ins., firmly set and plainly mkd. with 5 notches on the E and 1 on the W edges, CC on N force.

There is no remaining evidence of the 2 original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 15 S R 6 E

C C

S 31 | S 32

S 6

T 16 S

1970

from which

A pine, 16 ins. diam., bears N. 56° E., 105 lks. dist., mkd. T15S R6E S32 BT.

A pine, 10 ins. diam., bears N. 52° W., 89 lks. dist., mkd. T15S R6E S31 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

The cor. is located on gentle NE slope of hill, 2 chs. dist. S of creek, 25 lks. wide, 1 ft. deep, that flows E. In scattered pine growth.

At the ¼ sec. cor. of secs. 28 and 33, marked with a sandstone, 18 x 8 x 6 ins., firmly set and plainly mkd. ¼ on N face.

There is no remaining evidence of the 2 original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone to brass cap mkd.

Remonumentation of Corners in
T. 15 S., R. 6 E., Salt Lake

CHAINS

T 15 S R 6 E
 $\frac{1}{4}$ $\frac{S 28}{S 33}$
1970

from which

A pine, 10 ins. diam., bears N. 87° E., 170 lks.
dist., mkd. T15S R6E $\frac{1}{4}$ S28 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NW slope, 85 lks. dist.
E of wash, 15 lks. wide, 3 ft. deep, that drains N and
95 lks. dist W of gas line that bears North and South.
In sagebrush growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a
sandstone, 16 x 12 x 5 ins., firmly set and plainly mkd.
with 4 notches on the E and 1 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 15 S R 6 E
 $\frac{S 29}{S 32}$ | $\frac{S 28}{S 33}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2½ ft. base, 1 ft. high, W of
cor.

The cor. is located on gentle W slope. Approx. 6 chs.
dist. E of small draw that drains N.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a
sandstone, 12 x 12 x 6 ins., firmly set and plainly mkd.
 $\frac{1}{4}$ on N face.

There is no remaining evidence of the 2 original aspen
bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to solid rock and in a mound of stone, 3
ft. base, to top, with brass cap mkd.

T 15 S R 6 E
 $\frac{1}{4}$ $\frac{S 29}{S 32}$
1970

Deposit the original cor. stone alongside the iron post.

from which

An aspen, 8 ins. diam., bears S. 26° E., 107 lks.
dist., mkd. T15S R6E $\frac{1}{4}$ S32 BT.

Remonumentation of Corners in

T. 16 S. R. 6 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on steep E slope of hill. About 4 chs. dist. W of base of hill that bears North and South. In scattered aspen growth.

T. 16 S., R. 6 E., Salt Lake Meridian, Utah

Township 16 South, Range 6 East, Salt Lake Meridian, is located within the Manti-Lasal National Forest. The following corners were established by James C. Dick in 1900.

At the $\frac{1}{4}$ sec. cor. of secs. 32, on the S. bdy. of the Tp., marked with a sandstone, 16 x 12 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

$$\begin{array}{r} T\ 16\ S\ R\ 6\ E \\ \frac{1}{4}\ S\ 32 \\ \hline T\ 17\ S\ R\ 6\ E \\ 1970 \end{array}$$

from which

An aspen, 5 ins. diam., bears N. 26° W., 68 lks. dist., mkd. T16S R6E $\frac{1}{4}$ S32 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level bench land, 70 lks. dist. W of trail road that bears North and South. In scattered aspen, pine, cedar and mahogany growth.

At the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, marked with a sandstone, 11 x 11 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock, with brass cap mkd.

$$\begin{array}{r} T\ 16\ S\ R\ 6\ E \\ \frac{1}{4}\ S\ 22 \\ \hline \frac{1}{4}\ S\ 27 \\ 1970 \end{array}$$

from which

A pine, 6 ins. diam., bears S. 20° W., 27 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

A pine, 12 ins. diam., bears N. 64° W., 15 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep W slope of hill, in thick pine and aspen growth.

**Remonumentation of Corners in
T. 16 S., R. 6 E., Salt Lake Meridian, Utah**

CHAINS

At the cor. of secs. 21, 22, 27 and 28, marked with a sandstone, 14 x 8 x 4 ins., firmly set and plainly mkd. with 3 notches on the E and 2 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T 16 S R 6 E
S 21 | S 22
S 28 | S 27
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located at W edge of large grassy meadow, 40 lks. dist. E of Indian Creek, 10 lks. wide, 6 ins. deep, that flows S and 3 lks. dist. S of 5 strand fence line that bears East and West. No timber.

At the ¼ sec. cor. of secs. 21 and 22, marked with a sandstone, 16 x 11 x 3 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T 16 S R 6 E
¼
S 21 | S 22
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on W side of grassy meadow, 28 lks. dist. N of cor. of 5 strand fence that bears East, North and South. No timber.

At the ¼ sec. cor. of secs. 15 and 16, marked with a sandstone, 15 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 16 S R 6 E
¼
S 16 | S 15
1970

from which

An aspen, 4 ins. diam., bears S. 29° E., 26 lks. dist., mkd. ¼ S15 BT.

An aspen, 6 ins. diam., bears S. 77° W., 27 lks. dist., mkd. T16S R6E ¼ S16 BT.

Deposit the original cor. stone alongside the iron post.

Remonumentation of Corners in
T. 16 S., R. 6 E., Salt Lake Meridian, Utah

CHAINS

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle E slope, 2 chs. dist. W of small stream that flows S and at the N edge of small grove of aspens.

At the cor. of secs. 9, 10, 15 and 16, marked with a sandstone, 15 x 10 x 6 ins., firmly set and plainly mkd. with 4 notches on the S and 3 on the E edges.

There is no remaining evidence of the 2 original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 16 S R 6 E
 $\frac{S 9}{S 16} \mid \frac{S 10}{S 15}$
 1970

from which

An aspen, 6 ins. diam., bears N. 46° E., 39 lks. dist., mkd. T16S R6E S10 BT.

An aspen, 6 ins. diam., bears S. 32° E., 30 lks. dist., mkd. T16S R6E S15 BT.

An aspen, 6 ins. diam., bears S. 13° W., 12 lks. dist., mkd. T16S R6E S16 BT.

An aspen, 6 ins. diam., bears N. 61° W., 11 lks. dist., mkd. T16S R6E S9 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on SW slope of hill, 2 chs. dist. W of top of ridge that bears North and South. In thick aspen growth.

At the ¼ sec. cor. of secs. 10 and 15, marked with a sandstone, 20 x 10 x 3 ins., firmly set and plainly mkd. ¼ on N face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 16 S R 6 E
 $\frac{1}{4} \frac{S 10}{S 15}$
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

Remonumentation of Corners in
T. 16 S., R. 6 E., Salt Lake Meridian, Utah

The cor. is located in grassy clearing, 2 chs. dist. E of dirt road that bears North and South.

T. 17 S., R. 6 E., Salt Lake Meridian, Utah

Township 17 South, Range 6 East, Salt Lake Meridian, is located within the Manti-Lasal National Forest. The following corners were established by James C. Dick in 1900.

At the SE cor. of T. 17 S., R. 6 E., marked by a large X on the NE face of a sandstone boulder, 10 x 5 x 5 ft. above ground

from which the original bearing trees

A pinon pine, 8 ins. diam., bears N. 17° 15' W., 39 lks. dist., mkd. T17S R6E S36 BT.

A pinon pine, 10 ins. diam., bears N. 46° 30' W., 98 lks. dist., mkd. T17S R6E S36 BT.

At a point directly below the X.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 17 S
R 6 E R 7 E
S 36 |
T 18 S
1970

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on steep broken E slope of hill, approximately 7 chs. dist. W of Cottonwood Creek that flows S. In scattered cedar and pinon growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a sandstone, 18 x 12 x 3 ins., firmly set and plainly mkd. with 4 notches on the S and E edges

from which the original bearing trees

A pine, (dead) 14 ins. diam., bears N. 67° E., 82 lks. dist., mkd. T17S R6E S9 BT.

A pine, 15 ins. diam., bears N. 23° W., 66 lks. dist., mkd. T17S R6E S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 17 S R 6 E
S 8 | S 9
S 17 | S 16
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

Remonumentation of Corners in
T. 17 S., R. 6 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on steep NW slope of hill, 1 ch. dist. S of deep draw that drains W. In scattered pine and mahogany growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a cobblestone, 12 x 8 x 8 ins., firmly set and plainly mkd. with 5 notches on the E and 4 on the S edges

from which the original bearing trees

A cottonwood, 14 ins. diam., bears N. 63° E., 28 lks. dist., mkd. T17S R6E S8 BT. (Record, N. 63° E. 22 lks.)

A pine, 16 ins. diam., bears N. 15° W., 22 lks. dist., mkd. T17S R6E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 17 S R 6 E
S 7 S 8
S 18 S 17
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on nearly level land, 50 lks. dist. W of Lowry Creek that flows S. In thick cottonwood and pine growth.

At the cor. of secs. 5, 6, 7 and 8, marked with a sandstone, 16 x 12 x 4 ins., firmly set and plainly mkd. with 5 notches on the S and E edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 17 S R 6 E
S 6 S 5
S 7 S 8
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level bench land, 2 lks. dist. W of 6 strand fence line that bears North and South with pasture land to the W and oak brush to the E, in scattered cottonwoods.

At the closing cor. of secs. 5 and 6, on the N. bdy. of the Tp., marked with a sandstone, 16 x 10 x 4 ins., firmly set and plainly mkd. with 5 notches on the E and 1 on the W edges, CC on S face.

At the cor. point

Remonumentation of Corners in
T. 17 S., R. 6 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 16 S R 6 E
S 32

S 6 | S 5
C C
T 17 S R 6 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on gentle E. slope, approximately 12 chs. dist. W of trail road that bears North and South. In scattered oak and mahogany growth.

T. 25 S., R. 24 E. , Salt Lake Meridian, Utah

Township 25 South, Range 24 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by James M. Lentz and Hubert D. Page in 1901.

At the standard closing cor. of Tps. 25 and 26 S., R. 24 E., marked with the remains of a decayed aspen post

from which bearing trees were found as follows

An aspen, 14 ins. diam., bears S. 69° W., 13 lks. dist., mkd. T26S R24E S1 BT. (No record of this bearing tree.)

An aspen, 15 ins. diam., bears N. 53° W., 27 lks. dist., mkd. T25S R24E S36 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T 25 S
R 24 E R 25 E
SCC S 36 | S 31
S 1 |
T 26 S
1970

Deposit the remains of the original cor. aspen post alongside the iron post.

The cor. is located on gentle NE. slope of hill, 44 lks. dist. N of 4 strand fence that bears East and West and 20 lks. dist. W of old pole fence that bears North and South, in thick aspen growth.

At the standard ¼ cor. of sec. 36, on the S. bdy. of the Tp., marked with a sandstone, 18 x 14 x 4 ins., firmly set and plainly mkd. SC ¼ S36 on N face.

At the cor. point

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

SC
T 25 S R 24 E
 $\frac{1}{4}$ S36
T 26 S R 24 E
1970

from which

An aspen, 6 ins. diam., bears N. 16° W., 10 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

Deposit the original cor. stone and set a steel fence post alongside the iron post.

The cor. is located on gentle N slope, 23 lks. dist. N of 4 strand fence line that bears East and West. In thick aspen growth.

At the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., marked with a sandstone, 28 x 12 x 6 ins., firmly set and plainly mkd. with 5 notches on the W and 1 on the E edges, SC on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock, with brass cap mkd.

SC
T 25 S R 24 E
S 35 | S 36
T 26 S R 24 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on W slope of hill, 3 lks. dist. S of 4 strand fence line that bears East and West. In scattered oak brush.

At the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., marked with a porphyry stone, 24 x 30 x 6 ins., firmly set and plainly mkd. with 4 notches on the E and 2 on the W edges, SC on N face.

from which the original bearing trees

A pinon pine, 12 ins. diam., bears W. $62^\circ 30'$ E., 36 lks. dist., mkd. T25S R24E S33 BT.

A pinon pine, 8 ins. diam., bears N. $58^\circ 45'$ W., 62 lks. dist., mkd. T25S R24E S32 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian Utah

CHAINS

SC
T 25 S R 24 E
S 32 | S 33
T 26 S R 24 E
1970

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on steep W. slope of hill, in scattered cedar and pinon growth.

At the standard ¼ sec. cor. of sec. 32, on the S. bdy. of the Tp., marked with a sandstone, 18 x 12 x 6 ins., firmly set and plainly mkd. S ¼ C on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

SC
T 25 S R 24 E
¼ S 32
T 26 S R 24 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on W slope of hill, 130 lks. dist. E of oiled road that bears North and South and 2½ chs. dist. E of small draw that drains N. 30° W. In lightly scattered cedar and pinon growth.

At the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a red sandstone, 18 x 16 x 5 ins., firmly set and plainly mkd. with 5 notches on the E and 1 on the W edges. SC on N face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T 25 S R 24 E
S 31 | S 32
T 26 S R 24 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

The cor. is located on nearly level land, in lightly scattered cedar and pinon pine growth.

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian, Utah

CHAINS

the standard cor. on the S. bdy. of T. 25 S., Rs. 23
24 E., marked with a granite stone, 20 x 20 x 12 ins.,
firmly set and plainly mkd. with 6 notches on the E and
W edges, SC on N face.

There is no remaining evidence of the 2 original bearing
trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

S C
T 25 S
R 23 E R 24 E
S 36 | S 31
T 26 S R 24 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, N of
cor.

The cor. is located 60 lks. dist. S of top of ridge that
bears East and West, in scattered cedar and pinon growth.

At the ¼ sec. cor. of secs. 31 and 36, on the W. bdy. of
the Tp., marked with a porphyry stone, 24 x 14 x 3 ins.,
firmly set and plainly mkd. ¼ on W face

from which

A pinon pine, 12 ins. diam., bears S. 58° E., 36
lks. dist., mkd. ¼ S31.

A cedar, 14 ins. diam., bears S. 70° W., 19 lks.
dist., mkd. ¼ S36.

There is no record of either bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to solid rock, with brass cap mkd.

T 25 S
R 23 E R 24 E
¼
S 36 | S 31
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep SE slope of hill, 1 ch.
dist. W of draw that drains N. 25° E. Approximately
15 chs. dist. S of trail road in canyon that bears
N. 45° W. and S. 45° E. In cedar and pinon growth.

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of
the Tp., marked with a porphyry stone, 24 x 18 x 18 ins.,

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian, Utah

CHAINS

firmly set and plainly mkd. with 5 notches on the N and
1 on the S edges

from which the original bearing trees

A pinon pine, 8 ins. diam., (dead) bears N. 42° E.,
12 lks. dist., mkd. T25S R24E S30 BT. (Record,
N. 40° 20' E.)

A pinon pine, 14 ins. diam., bears S. 60° E., 18
lks. dist., mkd. T25S R24E S31 BT. (Record,
S. 53° 15' E., 18 lks.)

A cedar, 10 ins. diam., bears N. 82° W., 22 lks.
dist., mkd. T25S R24E S25 BT. (Record,
N. 86° 10' W.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to solid rock, with brass cap mkd.

T 25 S	
R 23 E	R 24 E
S 25	S 30
S 36	S 31
1970	

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep N slope of hill, 1 ch. S
of small draw that drains N. 45° E. and about 3 chs.
dist. N of trail road that bears East and West. In thick
cedar and pinon growth.

At the closing cor. of secs. 24 and 25, on the E. bdy.
of the Tp., marked with a sandstone, 24 x 12 x 8 ins.,
firmly set and plainly mkd. with 4 notches on the N and 2
on the S edges, with CC on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 25 S	
R 24 E	R 25 E
CC S 24	S 19
S 25	
1970	

Deposit the original cor. stone and set a steel fence
post alongside the iron post.

The cor. is located on steep N slope of hill, 190 lks.
dist. S of improved dirt road that bears East and West
in thick oak brush.

At the cor. of secs. 23, 24, 25 and 26, marked with a
sandstone, 20 x 9 x 6 ins., firmly set and plainly mkd.
with 2 notches on the S and 1 on the E edges.

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 25 S R 24 E
S 23 | S 24
S 26 | S 25
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on NW slope of hill, 2½ chs. dist. S of trail road that bears N. 60° E. and S. 60° W. In sagebrush clearing, surrounded by oak brush.

At the cor. of secs. 26, 27, 34 and 35, marked by an old mound of stone (no evidence of the original corner stone)

from which the original bearing trees

A pine, 30 ins. diam., bears S. 70° 30' E., 97 lks. dist., with faint scribe marks.

A pine, 24 ins. diam., bears S. 71° 30' W., 188 lks. dist., mkd. T25S R24E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 25 S R 24 E
S 27 | S 26
S 34 | S 35
1970

Raise a mound of stone, 4 ft. base, 1½ ft. high, W of cor.

The cor. is located on S slope of hill, 40 lks. dist. N of old trail road that bears N. 30° E. and S. 30° W. and 35 lks. dist. S of new dirt road that bears East and West. In scattered pine and thick oak brush.

At the ¼ sec. cor. of secs. 20 and 21, marked with a sandstone, 18 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T 25 S R 24 E
¼
S 20 | S 21
1970

from which

A cedar, 12 ins. diam., bears S. 71° W., 56 lks. dist., mkd. ¼ S20

Remonumentation of Corners in
T. 25 S., R. 24 E., Salt Lake Meridian Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

The cor. is located on S slope of hill, 40 lks. dist. N of small draw that drains W, 150 lks. dist. N of main draw that drains N. 40° W. and 2 chs. dist. N of trail road that bears N. 40° W. and S. 40° E. In thick cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked with a trachyte stone, 16 x 8 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face

from which an original bearing tree

A cedar, 12 ins. diam., bears N. 80° E., 20 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock, with brass cap mkd.

T 25 S R 24 E
 $\frac{1}{4}$
S 31 | S 32
1970

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on SW slope of hill, 1 $\frac{1}{2}$ chs. dist. N of small draw that drains W. In cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked with a trachyte stone, 15 x 15 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ S30 on N face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock, with brass cap mkd.

T 25 S R 24 E
 $\frac{1}{4}$ $\frac{S 30}{S 31}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on gentle NE slope, approximately 4 chs. dist. W of small stream in draw that drains N and about 8 chs. dist. S of oiled road that bears East and West. In scattered cedar and pinon growth.

Remonumentation of Corners in
T. 25 S., R. 25 E., Salt Lake Meridian, Utah

CHAINS

T. 25 S., R. 25 E., Salt Lake Meridian, Utah

Township 25 South, Range 25 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Ernst Buettner in 1880.

At the standard cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., (Fifth Standard Parallel South) marked with a sandstone, 12 x 10 x 8 ins., firmly set and plainly mkd. with 3 notches on the E and W edges, SC on N face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock, and in a collar of stone to brass cap mkd.

S C	
T 25 S R 25 E	
S 33 S 34	
S 4 S 3	
T 26 S R 25 E	
1970	

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NW slope of hill, at intersection of 4 strand fence that bears North, West and East, and 50 lks. dist. N of improved dirt road that bears S. 45° E. and W. In sagebrush and scattered oak brush.

At the SW cor. of T. 25 S., R. 25 E., (On the Fifth Standard Parallel South) marked with a sandstone, 14 x 10 x 10 ins., firmly set and plainly mkd. with 6 notches on the N and E edges, SC on N face.

There is no remaining evidence of the original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 25 S	
R 24 E R 25 E	
S 31	
T 26 S R 24 E	
1970	

from which

An aspen, 12 ins. diam., bears N. 54° E., 36 lks. dist., mkd. T25S R25E S31 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, NE of cor.

The cor. is located on N slope of hill, 175 lks. dist. W of 4 strand fence that bears North and South. In thick aspen growth.

Remonumentation of Corners in
T. 25 S., R. 25 E., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 19 and 30, on the W. bdy. of the Tp., marked with a sandstone, 20 x 10 x 7 ins., firmly set and plainly mkd. with 4 notches on the N and 2 on the S edges.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 25\ S \\ R\ 24\ E\ R\ 25\ E \\ S\ 25\ | \ S\ 19 \\ \quad | \ S\ 30 \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, E of cor.

The cor. is located on steep N slope of hill, 370 lks. dist. S of improved dirt road that bears East and West, and 1 ch. dist. N of top of hill that bears East and West. In thick oak brush.

T. 26 S., R. 23 E., Salt Lake Meridian, Utah

Township 26 South, Range 23 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Frank E. Baxter in 1894. The witness closing cor. of secs. 1 and 2, were established by R. Gentry in 1915.

At the cor. of secs. 25, 26, 35 and 36, marked with a sandstone, 23 x 6 x 4 ins., firmly set and plainly mkd. with 1 notch on the S and E edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, with brass cap mkd.

$$\begin{array}{r} T\ 26\ S\ R\ 23\ E \\ S\ 26\ | \ S\ 25 \\ S\ 35\ | \ S\ 36 \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on W slope of hill, 1 ch. dist. W of rim of mesa that bears North and South. In scattered pinon and oak brush.

At the ¼ sec. cor. of secs. 25 and 36, marked with a sandstone, 14 x 10 x 6 ins., firmly set and plainly mkd. ¼ on N face.

At the cor. point

Remonumentation of Corners in
T. 26 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 26 S R 23 E
 $\frac{1}{4}$ $\frac{S 25}{S 36}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N of cor.

The cor. is located on gentle SE slope of hill, about $3\frac{1}{2}$ chs. dist. W of small draw that drains S. In lightly scattered oak brush.

At the cor. of secs. 11, 12, 13 and 14, marked with a granite stone, 20 x 13 x 10 ins., firmly set and plainly mkd. with 4 notches on the S and 1 on the E edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 26 S R 23 E
S 11 | S 12
S 14 | S 13
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on N slope of hill, 27 lks. dist. S of 4 strand fence that bears East and West, and about 3 chs. dist. N of top of rise. In scattered cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, marked with a sandstone, 18 x 10 x 3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, to brass cap mkd.

T 26 S R 23 E
 $\frac{1}{4}$
S 11 | S 12
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SW slope of hill, 1 lk. S of 4 strand fence line that bears East and West, about $4\frac{1}{2}$ chs. dist. N of wash in draw that drains S. 60° W. and 35 lks. dist. N of trail road that bears East and West. In thick pinon and cedar growth.

Remonumentation of Corners in
T. 26 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the witness closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked by an old mound of stone, (the original cor. was an iron post, 36 ins. long, 2 ins. in diam.)

from which the original bearing trees

A pinon pine, 14 ins. diam., bears S. 2° 45' E.,
47 lks. dist., mkd. W C T26S R23E S1 BT.

A pinon pine, 10 ins. diam., bears S. 47° 45' W.,
74 lks. dist., mkd. W C T26S R23E S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock, with brass cap mkd.

WC
T 25 S R 23 E

S 35

S 2 S 1
CC
T 26 S R 23 E
1970

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on nearly level mesa, and 12 lks. dist. S of rim of mesa that bears N. 60° W. and S. 60° E. In cedar and pinon growth.

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 17 x 15 x 4 ins., firmly set and plainly mkd. with 2 notches on the S and E edges

from which the original bearing trees

A pinon pine, 8 ins. diam., bears N. 50° E., 16 lks. dist., mkd. T26S R23E S23 BT. (Record, a cedar.)

A pinon pine, 14 ins. diam., bears S. 82° W., 47 lks. dist., mkd. T26S R23E S27 BT.

A cedar, 8 ins. diam., bears N. 28° W., 15 lks. dist., mkd. T26S R23E S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 26 S R 23 E
S 22 | S 23
S 27 | S 26
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on gentle NW slope of hill, and 140 lks. dist. E of trail road that bears N. 20° E. and S. 20° W. In thick cedar and pinon growth.

Remonumentation of Corners in
T. 26 S., R. 23 E., Salt Lake Meridian. Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, marked with a
stone, 22 x 7 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$
on W face

from which an original bearing tree

A pinon pine, 8 ins. diam., bears S. 12° W., 21
lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a collar of stone with brass cap mkd.

T 26 S R 23 E
 $\frac{1}{4}$
S 22 | S 23
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W of
cor.

The cor. is located on steep S slope of hill, 60 lks.
dist. N of rim of ledges, 20 ft. high, that bears East
and West 50 lks. dist. W of small draw that drains S. In
cedar and pinon growth.

At the cor. of secs. 14, 15, 22 and 23, marked with a
sandstone, 26 x 15 x 5 ins., firmly set and plainly mkd.
with 3 notches on the S and 2 on the E edges

from which the original bearing trees

A pinon pine, 16 ins. diam., (dead) bears N. 64° E.,
131 lks. dist., mkd. T26S R23E S14 BT.

A cedar, 12 ins. diam., (dead) bears S. $45^{\circ} 30'$ E.,
141 lks. dist., mkd. T26S R23E S23 BT.

A cedar, 10 ins. diam., bears S. 68° W., 27 lks.
dist., mkd. T26S R23E S22 BT.

A pinon pine, 14 ins. diam., (dead on ground)
bears N. $67^{\circ} 30'$ W., 57 lks. dist., mkd. T26S
R23E S15 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 26 S R 23 E
S 15 | S 14
S 22 | S 23
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

The cor. is located on gentle NW slope approximately
2 chs. dist. W of trail road that bears North and South.
thick cedar and pinon growth.

Remonumentation of Corners in

T. 26 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, marked with a trachyte stone, 20 x 7 x 4 ins., firmly set and plainly mkd. with $\frac{1}{4}$ on N face

from which the original bearing trees

A pinon pine, 7 ins. diam., bears N. 16° E., 57 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 21° E., 52 lks. dist.)

A pinon pine, 12 ins. diam., bears S. 13° E., 36 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 16° E., 44 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock, with brass cap mkd.

T 26 S R 23 E
 $\frac{1}{4}$ $\frac{S 11}{S 14}$
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on S slope of hill, 2 lks. dist. N of 4 strand fence line that bears East and West. In thick cedar and pinon growth.

T. 26 S., R. 25 E., Salt Lake Meridian, Utah

Township 26 South, Range 25 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following cor. was established by Chas. F. Moore in 1934.

At the NW cor. of T. 26 S., Rs. 24 and 25 E., as determined from the original bearing trees

An aspen, 10 ins. diam., bears S. $45^{\circ} 45'$ E., 83 lks. dist., mkd. T26S R25E S6 BT.

An aspen, 8 ins. diam., bears S. $87^{\circ} 15'$ W., 88 lks. dist., mkd. T26S R24E S1 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 25 S R 25 E
 $\frac{S 31}{S 1 | S 6}$
 C C
 T 26 S
 R 24 E R 25 E
 1970

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on N slope of hill, 4 lks. dist. W of 4 strand fence line that bears North and South. In thick aspen growth.

Remonumentation of Corners in

T. 26 S., R. 26 E., Salt Lake Meridian, Utah

CHAINS

T. 26 S., R. 26 E., Salt Lake Meridian, Utah

Township 26 South, Range 26 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following cor. was established by Ernst Buettner in 1880.

At the cor. of secs. 7, 8, 17 and 18, marked with a decaying aspen post

from which the original bearing trees

An aspen, 14 ins. diam., (dead on ground) bears S. 18° 45' E., 22 lks. dist., with faint scribe marks.

An oak, 15 ins. diam., bears S. 37° 10' W., 92 lks. dist., mkd. T26S R26E S18 BT.

An aspen, 10 ins. diam., (dead) bears N. 88° 15' W., 41 lks. dist., mkd. T26S R26E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T	26	S	R	26	E
	S	7		S	8
	S	18		S	17
	1970				

from which

An aspen, 9 ins. diam., bears N. 16° 30' E., 40 lks. dist., mkd. T26S R26E S8 BT.

Deposit the original aspen post alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on nearly level land, 100 lks. dist. E of clearing that bears North and South. In thick aspen growth.

T. 27 S., R. 23 E., Salt Lake Meridian, Utah

Township 27 South, Range 23 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Frank E. Baxter in 1894.

At the cor. of secs. 24 and 25, on the E. bdy. of the Tp., marked by a sandstone boulder, 4 x 3 x 2 ft. above ground, marked with 4 notches on the N and 2 on the S sides, an X on top.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, over X, and in a mound of stone, 4½ ft. base to brass cap mkd.

Remonumentation of Corners in
T. 27 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

T 27 S
R 23 E R 24 E
S 24 | S 19
S 25 |
1970

from which

A sandstone boulder, 10 x 8 x 4 ft. above ground,
S. 83° E. 24 lks. dist., mkd X B0.

The cor. is located on rim of bench that bears N. 70° W.
and S. 70° E., 50 lks. dist. W of trail road that bears
North and South.

At the cor. of secs. 13, 14, 23 and 24, marked with a
trachyte stone, 15 x 10 x 5 ins., firmly set and plainly
mkd. with 3 notches on the S and 1 on the E edges

from which an original bearing tree

A cedar, 12 ins. diam., bears S. 62° E., 16 lks.
dist., mkd. T27S R23E S24 BT.

There is no remaining evidence of the other 2 original
bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 27 S R 23 E
S 14 | S 13
S 23 | S 24
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of
cor.

The cor. is located on top of spur projecting W, 2 chs.
dist. S of wash in draw that drains W and 2½ chs. dist.
N of wash in draw that drains W. In scattered pinon
and cedar growth.

T. 27 S., R. 24 E., Salt Lake Meridian, Utah

Township 27 South, Range 24 East, Salt Lake Meridian, is
located within the Manti-Lasal National Forest. The
following cor. was established by Chas. F. Moore in 1934.

At the closing cor. of secs. 19 and 30, on the W. bdy.
of the Tp., as determined by the original bearing tree

A cedar, 10 ins. diam., bears S. 15° E., 22 lks.
dist., mkd. T27S R24E S30 CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground to solid rock, with brass cap mkd.

Remonumentation of Corners in
T. 27S., R. 24 E., Salt Lake Meridian Utah

CHAINS

T 27 S
R 23 E R 24 E
S25 $\frac{S 19}{S 30}$ CC
1970

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on SW slope of hill, 10 lks. dist. E of netwire fence line that bears North and South and 50 lks. dist. N of trail road that bears East and West. In scattered cedar growth.

T. 28 S., R. 23 E., Salt Lake Meridian, Utah

Township 28 South, Range 23 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following cor. was established by Donald D. Clement and Thomas C. Rathbone in 1916.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a sandstone, 20 x 12 x 6 ins., (record, an iron post, 26 ins. long, 1 in. diam.) firmly set and plainly mkd. $\frac{1}{4}$ on W face

from which the original bearing trees

A cedar, 12 ins. diam., bears S. 80° E., 6 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

A cedar, 8 ins. diam., bears S. 68° W., 22 lks. dist., mkd. $\frac{1}{4}$ S3 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 28 S R 23 E
 $\frac{1}{4}$
S 3 | S 2
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of cor.

The cor. is located on gentle NW slope of hill, 50 lks. dist. N of trail road that bears N. 45° E. and S. 45° W. In scattered cedar and pinon growth.

T. 28 S., R. 24 E., Salt Lake Meridian, Utah

Township 28 South, Range 24 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The E. bdy. was surveyed by Ferdinand Dickert in 1878 and the interior lines by Ernst Buettner in 1880.

At the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., marked with a sandstone, 12 x 9 x 6 ins., firmly set and plainly mkd. with 4 notches on the N and 2 on the S edges.

At the cor. point

Remonumentation of Corners in

T. 28 S., R. 24 E., S. 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 28 S
R 24 E R 25 E
S 24 | S 19
S 25 | S 30
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of cor.

The cor. is located on rolling bench land, at the W edge of trail road that bears East and West. In thick oak brush.

At the ¼ sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 22 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 28 S
R 24 E R 25 E
¼
S 36 | S 31
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle E slope, in old fence line that bears North and South. In scattered cedar, pinon and oak brush.

At the cor. of secs. 26, 27, 34 and 35, marked with a granite stone, 16 x 12 x 8 ins., firmly set and plainly mkd. with 2 notches on the E and 1 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 28 S R 24 E
S 27 | S 26
S 34 | S 35
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle SE slope, 70 lks. dist. E of trail road that bears North and South, and 150 lks. dist. W of wash, 30 lks. wide, 6 ft. deep, that drains S. Cedar and pinon to the E and sagebrush to the W.

Remonumentation of Corners in

T. 28 S., R. 24 E., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 27, 28, 33 and 34, marked with a granite stone, 17 x 9 x 4 ins., firmly set and plainly mkd. with 3 notches on the E and 1 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 28 S R 24 E
S 28 S 27
S 33 S 34
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on nearly level land. In sagebrush growth; no timber.

T. 28 S., R. 25 E., Salt Lake Meridian, Utah

Township 28 South, Range 25 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Ferdinand Dickert in 1878.

At the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., marked with a sandstone, 18 x 16 x 5 ins., firmly set and plainly mkd. with 4 notches on the W and 2 on the E edges

From which the original bearing trees:

A pine, 18 ins. diam., bears N. 17° E., 61 lks. dist., with dim scribe mks. (Record, N. 17° E., 30 ft.)

A pine, 18 ins. diam., bears South 126 lks. dist., mkd. T29S R25E BT. (Record, S. 70 ft.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 28 S R 25 E
S 34 S 35
S 3 S 2
T 29 S
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on N slope of hill, 190 lks. dist. S of 4 strand power line that bears East and West. In scattered pine and thick oak brush.

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a sandstone, 22 x 12 x 6 ins., firmly set and plainly mkd. with 5 notches on the E and 1 on the W edges.

Remonumentation of Corners in
T. 28 S. R. 25 E., Salt Lake Meridian, Utah

CHAINS

from which the original bearing tree

A pinon pine, 14 ins. diam., bears N. 84° W., 54 lks. dist., mkd. T28S R25E S31 BT. (Record, West 50 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 28\ S\ R\ 25\ E \\ \quad S\ 31\ | \ S\ 32 \\ \quad \quad S\ 6\ | \ S\ 5 \\ T\ 29\ S\ R\ 25\ E \\ \quad \quad \quad 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle NW slope of hill, 70 lks. dist. S of wash, 40 lks. wide, 15 ft. deep that drains S. 45° W. and 60 lks. dist. N of trail road that bears N. 45° E. and S. 45° W. In scattered pinon and oak brush.

At the ¼ sec. cor. of secs. 31 and 6, on the S. bdy. of the Tp., marked with a sandstone, 20 x 14 x 3 ins., firmly set and plainly mkd. ¼ on N face.

at the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 28\ S\ R\ 25\ E \\ \quad \quad \quad S\ 31 \\ \quad \quad \quad \quad \frac{1}{4} \quad S\ 6 \\ T\ 29\ S\ R\ 25\ E \\ \quad \quad \quad \quad \quad 1970 \end{array}$$

from which

A pinon pine, 10 ins. diam., bears N. 37° W., 84 lks. dist., mkd. ¼ S31 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

The cor. is located on SW slope, approximately 7 chs. dist. E, of trail road that bears S. 45° E. and N. 45° W. In scattered cedar and pinon growth.

At the cor. of Tps. 28 and 29 S., Rs. 24 and 25 E., marked with a sandstone, 26 x 16 x 6 ins., firmly set and plainly mkd. with 6 notches on 4 sides

from which the original bearing trees

A pinon pine, 10 ins. diam., bears N. 52° E., 9 lks. dist., mkd. T28S R25E S31 BT. (Record, N. 37° E., 12 lks.)

Remonumentation of Corners in
T. 28 S., R. 25 E., Salt Lake Meridian, Utah

CHAINS

A pinon pine, 10 ins. diam., bears S. 4° E., 26 lks. dist., mkd. T29S R25E S6 BT. (Record, S. 14° E., 28 lks.)

A pinon pine, 8 ins. diam., bears S. 51° W., 45 lks. dist., mkd. T29S R24E S1 BT. (Record, S. 12° W., 60 lks.)

A pinon pine, 12 ins. diam., bears N. 70° W., 25 lks. dist., mkd. T28S R24 E S36 BT. (Record, N. 56° W., 30 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 28 S
R 24 E R 25 E
S 36 S 31
S 1 S 6
T 29 S
1970

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap mkd.

The cor. is located on gentle SW slope of hill, approximately 3 chs. dist. E of small draw that drains S. and 325 lks. dist. S of trail road that bears East and West. In thick cedar and pinon growth.

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 20 x 8 x 6 ins., firmly set and plainly mkd. with 2 notches on the S and E edges

from which the original bearing tree

A pine, 18 ins. diam., bears N. 42° E., 90 lks. dist., mkd. T28S R25E S23 BT. (Record, N. 40° E., 48 ft.)

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock with brass cap mkd.

T 28 S R 25 E
S 22 S 23
S 27 S 26
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on E edge of small canyon that drains S. 20° W. In scattered cedar, pine and oak brush.

Remonumentation of Corners in
T. 28 S., R. 25 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, marked with a sandstone, 12 x 12 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone to brass cap mkd.

$$\begin{array}{r} T\ 28\ S\ R\ 25\ E \\ \frac{1}{4} \quad \frac{S\ 28}{S\ 33} \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope, $2\frac{1}{2}$ chs. dist. N of trail road that bears East and West and at the cor. of fences that bears North and West. In sagebrush growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a sandstone, 26 x 20 x 9 ins., firmly set and plainly mkd. with 4 notches on the E and 1 on the S edges

from which the original bearing tree

A pine, 16 ins. diam., bears S. 24° E., 70 lks. dist., mkd. T28S R25E S33 BT.

There is no remaining evidence of the other 2 original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

$$\begin{array}{r} T\ 28\ S\ R\ 25\ E \\ \frac{S\ 29}{S\ 32} \quad \frac{S\ 28}{S\ 33} \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on gentle S slope, 85 lks. dist. N of trail road that bears East and West and at the cor. of fences that bears North and East. In scattered pine and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, marked with a sandstone, 12 x 8 x 3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 28\ S\ R\ 25\ E \\ \frac{1}{4} \quad \frac{S\ 19}{S\ 30} \\ 1970 \end{array}$$

Remonumentation of Corners in
T. 23 S., R. 23 E., Salt Lake Meridian Utah

CHAINS

from which

A cedar, 8 ins. diam., bears S. 15° E., 16 lks.
dist., mkd. $\frac{1}{4}$ S30 BT.

Deposit the original cor. stone and set a steel fence
post alongside the iron post.

The cor. is located on nearly level bench land, 10 lks.
dist. S of trail road that bears East and West. In sage,
oak and cedar growth.

T. 33 S., R. 23 E., Salt Lake Meridin, Utah

Township 33 South, Range 23 East, Salt Lake Meridian, is
located partially within the Manti-Lasal National Forest.
The following corners were established by Hubert D. Page
and James M. Lentz in 1901.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, on the S. bdy. of
the Tp., marked with a sandstone, 20 x 20 x 8 ins.,
firmly set and plainly mkd. $\frac{1}{4}$ S32 on N and 5 on S face

from which

A pine, 36 ins. diam., bears N. 74° W., 88 lks.
dist., mkd. $\frac{1}{4}$ S32BT. (There is no record of a
bearing tree.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to solid rock, with brass cap mkd.

T 33 S R 23 E
 S 32
 $\frac{1}{4}$ S 5
T 34 S R 23 E
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on gentle E slope, 2 lks. dist. S
of netwire fence that bears East and West. In thick pine
and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, on the W. bdy. of
the Tp., marked with a sandstone, 18 x 10 x 6 ins.,
firmly set and plainly mkd. $\frac{1}{4}$ S1 on W and 6 on E eface

from which

A pinon pine, 8 ins. diam., bears N. 10° E., 12 lks.
dist., mkd. with faint scribe mks.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in
T. 33 S. R. 3 ., Salt Lake Meridian, Utah

CHAINS

T 33 S
R 22 E R 23 E
 $\frac{1}{4}$
S 1 | S 6
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land, on 5 strand fence line that bears East and West. In scattered cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, marked with a porphyry stone, 24 x 12 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ S27 on N and 34 on the S face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 27}{S 34}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N of cor.

The cor. is located on nearly level land, at the cor. of old abandoned fence that bears East and South, 14 lks. dist. E of new strand fence that bears North and South and 37 lks. dist. E of trail road that bears North and South. In thick oak brush.

At the cor. of secs. 21, 22, 27 and 28, marked with a porphyry stone, 18 x 12 x 3 ins., firmly set and plainly mkd. with 3 notches on the E and 2 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 33 S R 23 E
 $\frac{S 21 | S 22}{S 28 | S 27}$
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle E slope, 5 lks. dist. N of 5 strand fence line that bears East and West. In scattered pinon and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, marked with a porphyry stone, 15 x 12 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S22 on the N and 27 on the S face.

At the cor. point

Remonumentation of Corners in
T. 33 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 22}{S 27}$
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on S slope, 2 chs. dist. N of draw that drains E, at the cor. of 5 strand fence that bears East, West and South, and 20 lks. dist. E of trail road that bears North and South. In scattered oak brush.

At the cor. of secs. 28, 29, 32 and 33, marked with a porphyry stone, 15 x 12 x 4 ins., firmly set and plainly mkd. with 4 notches on the E and 1 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
S 29 | S 28
S 32 | S 33
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on gentle E slope. In thick oak brush.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 15 x 12 x 8 ins., firmly set and plainly mkd. with 4 notches on the E and 2 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
S 20 | S 21
S 29 | S 28
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on gentle NE slope of hill, 4 lks. dist. E and 13 lks. dist. N of cor. of 4 strand fence line that bears North and East. In scattered oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked with a porphyry stone, 24 x 10 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S on W face.

Remonumentation of Corners in
T. 33 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$
S 31 | S 32
1970

from which

An aspen, 5 ins. diam., bears N. 72° E., 20 lks. dist., mkd. T33S R23E $\frac{1}{4}$ S32 BT.

An aspen, 8 ins. diam., bears S. 64° W., 10 lks. dist., mkd. T33S R23E S31 $\frac{1}{4}$ BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on gentle E slope. In thick aspen and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a porphyry stone, 14 x 10 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ S29 on N and 32 on S face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 29}{S 32}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on gentle E. slope. In thick oak and scattered aspen growth.

At the cor. of secs. 17, 18, 19 and 20, marked with a trachyte stone, 22 x 9 x 5 ins., firmly set and plainly mkd. with 5 notches on the E and 3 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
 $\frac{S 18 | S 17}{S 19 | S 20}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

Remonumentation of Corners in
T. 33 s. R. 23 E. Salt Lake Meridian, Utah

CHAINS

The cor. is located on NE slope of hill, 4 lks. dist. N and 6 lks. dist. E of cor. of 4 strand fence that bears East and North. In thick oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 20, marked with a sandstone, 18 x 10 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ S17 on N and S20 on S face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 17}{S 20}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on SE slope of hill, 3 lks. dist. N of 4 strand fence line that bears East and West, and approximately 10 chs. dist. W of Vaga Wash that drains N. In thick oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, marked with a trachyte stone, 14 x 10 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ S18 on the W and S17 on the E.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$
S 18 | S 17
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on NW slope of hill, at the cor. of old fence line that bears East and South. In thick oak brush and scattered pinon growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a trachyte stone, 18 x 6 x 6 ins., firmly set and plainly mkd. with 5 notches on the E and 4 on the S edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T 33 S R 23 E
S 7 | S 8
S 18 | S 17
1970

**Remonumentation of Corners in
T. 33 S., R. 23 E., Salt Lake Meridian, Utah**

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land, at the cor. of 4 strand fence line that bears West and North. In scattered cedar, pinon and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked with a sandstone, 15 x 9 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S7 on the N and 18 on the S face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 7}{S 18}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on rocky NW slope of hill, 8 lks. dist. N and 3 lks. dist. W of cor. of 4 strand fence that bears North, South, East and West. In scattered cedar, pinon and oak brush.

T. 34 S., R. 23 E., Salt Lake Meridian, Utah

Township 34 South, Range 23 East, Salt Lake Meridian, is located partially within the Manti-Lasal National Forest. The following corners were established by Hubert D. Page and James M. Lentz in 1901.

At the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp., marked with a sandstone, 16 x 10 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ S33 on N and 4 on the S face

from which the original bearing tree

A pine, 36 ins. diam., bears N. 13° W., 120 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 34 S R 23 E
 $\frac{1}{4}$ $\frac{S 33}{S 4}$
T 35 S R 23 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on W slope, 80 lks. dist. E of small draw that drains S. 15° E. and 44 lks. dist. W of 5 strand fence line that bears North and South. In scattered pine and oak brush.

Remonumentation of Corners in
T. 34 S. R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, on the S. bdy. of the Tp., marked with a sandstone, 16 x 16 x 3 ins., firmly set and plainly mkd. $\frac{1}{4}$ S31 on the N and 6 on the S face

from which the original bearing trees

A pine, 15 ins. diam., bears N. 20° E., 37 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

A pine, 32 ins. diam., bears S. 84° W., 17 lks. dist., mkd. $\frac{1}{4}$ S6 BT. (No record of this bearing tree.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock, with brass cap mkd.

T 34 S R 23 E
 $\frac{1}{4}$ $\frac{S\ 31}{S\ 6}$
T 35 S R 23 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on SE slope, 30 lks. dist. N of small draw that drains E and approximately 8 chs. dist. E of logging road that bears North and South. In thick pine growth.

At the cor. of Tps. 34 and 35 S., Rs. 22 and 23 E., marked with a sandstone, 18 x 12 x 4 ins., firmly set and plainly mkd. with 6 notches on 4 sides

from which the original bearing trees

A pine, 28 ins. diam., bears N. 32° E., 47 lks. dist., mkd. T34S R23E S31 BT.

A pine, 28 ins. diam., bears N. 71° W., 119 lks. dist., mkd. T34S R22E S36 BT. (Record, N. 76° W., 88 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 34 S
R 22 E R 23 E
 $\frac{S\ 36\ | \ S\ 31}{S\ 1\ | \ S\ 6}$
T 35 S
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on nearly level land, 1 ch. dist. E of rim of canyon that bears North and South and 80 lks. dist. W of trail road that bears North and South. In thick pine growth.

Remonumentation of Corners in
T. 34 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp., marked with a sandstone, 14 x 13 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ S36 on the W and 31 on the E face.

The original bearing trees appear to have been logged out.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock, with brass cap mkd.

T 34 S
R 22 E R 23 E
 $\frac{1}{4}$
S 36 | S 31
1970

from which

A pine, 14 ins. diam., bears S. 59° E., 23 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

A pine, 12 ins. diam., bears S. 59° W., 43 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on nearly level land, approximately 7 chs. dist. S of dirt road that bears East and West. In thick pine growth.

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., marked with a sandstone, 18 x 12 x 5 ins., firmly set and plainly mkd. with 5 notches on the N and 1 on the S edges

from which

A pine, 30 ins. in diam., bears S. 79° E., 98 lks. dist., mkd. T34S R23E S31 BT. (No record of a bearing tree.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 34 S
R 22 E R 23 E
S 25 | S 30
S 36 | S 31
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 5 ft. base, to brass cap.

The cor. is located on gentle E slope of hill, approximately 10 chs. dist. E of trail road that bears North and South. In scattered pine and oak brush.

Remonumentation of Corners in

T. 34 S. 2 E. S. 10 T. 33 S. 2 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, on the N. bdy. of the Tp., marked with a sandstone, 14 x 10 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

There is no remaining evidence of the original pine bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 33 S R 23 E
 $\frac{1}{4}$ $\frac{S 33}{S 4}$
 T 34 S R 23 E
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

The cor. is located on nearly level land, approximately 7 chs. dist. N of draw that drains E. In scattered pine and oak brush.

At the cor. of secs. 2, 3, 10 and 11, marked with a sandstone, 18 x 8 x 6 ins., firmly set and plainly mkd. with 5 notches on the S and 2 on the E edges

from which the original bearing tree

A cedar, 15 ins. diam., bears S. 85° W., 55 lks. dist., mkd. T34S R23E S10 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 34 S R 23 E
 $\frac{S 3}{S 10} | \frac{S 2}{S 11}$
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on gentle E slope, 6 lks. dist. W of 5 strand fence that bears North and South, and 15 lks. dist. E of trail road that bears North and South. In scattered cedar, pinon and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, marked with a sandstone, 15 x 14 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S29 on the W and 28 on the E face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of Corners in
T. 34 S., R. 23 E., Salt Lake Meridian Utah

CHAINS

T 34 S R 23 E

 $\frac{1}{4}$

S 29 | S 28

1970

from which

A pine, 10 ins. diam., bears N. 66° E., 35 lks.
dist., mkd. $\frac{1}{4}$ S28 BT.

A pine, 15 ins. diam., bears S. 72° W., 6 lks.
dist., mkd. $\frac{1}{4}$ S29 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

The cor. is located on S slope of small draw that drains
E and approximately 5 chs. dist. S of trail road that
bears East and West. In thick pine and oak brush.

At the cor. of secs. 20, 21, 28 and 29, marked with a
sandstone, 14 x 11 x 5 ins., firmly set and plainly mkd.
with 4 notches on the E and 2 on the S edges

from which the original bearing trees

A cedar, 12 ins. diam., bears N. 30° E., 50 lks.
dist., mkd. T34S R23E S21 BT.

A cedar, 15 ins. diam., bears S. 85° E., 19 lks.
dist., mkd. T34S R23E S28 BT.

A cedar, 14 ins. diam., bears S. 45° W., 55 lks.
dist., mkd. T34S R23E S29 BT.

A cedar limb, 10 ins. diam., bears N. 40° W., 52
lks. dist., mkd. T34S R23E S20 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground to solid rock, with brass cap mkd.

T 34 S R 23 E

S 20 | S 21

S 29 | S 28

1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on S slope of hill, in thick cedar,
pinon and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked with a sand-
stone, 15 x 10 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$
S20 on the W and 21 on the E face

from which the original bearing trees

Remonumentation of Corners in
T. 34 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

A pine, 36 ins. diam., bears N. 56° E., 53 lks. dist., mkd. T34S R23E ¼ S21 BT. (Record, N. 60° E., 40 lks. dist.)

A pine, 18 ins. diam., bears S. 45° W., 45 lks. dist., mkd. T34S R23E ¼ S20 BT. (Record, S. 50° W., 50 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 34 S R 23 E
 ½
 S 20 | S 21
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle SE slope, in thick pine growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a sandstone, 20 x 15 x 3 ins., firmly set and plainly mkd. with 4 notches on the S and E edges

from which the original bearing trees

A pine, (dead on ground) 32 ins. diam., bears N. 40° E., 133 lks. dist., mkd. T34S R23E S9 BT. (Record, N. 21° E., 159 lks. dist.)

A pine, (dead on ground) 30 ins. diam., bears S. 75° E., 142 lks. dist., mkd. T34S R23E S16 BT. (Record, S. 42° 165 lks. dist.)

A pine, (dead but standing) 30 ins. diam., bears S. 4° E., 77 lks. dist., mkd. T34S R23E S17 BT. (No record)

A pine, (dead on ground) 18 ins. diam., bears S. 15° W., 38 lks. dist., mkd. T34S R23E S17 BT. (Record, S. 20° W., 15 lks. dist.)

A pine, 30 ins. diam., bears N. 84° W., 60 lks. dist., mkd. T34S R23E S8 BT. (Record, N. 40° W., 4 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock, with brass cap mkd.

T 34 S R 23 E
 S 8 | S 9
 S 17 | S 16
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

Remonumentation of Corners in
T. 34 S., R. 23 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on SE slope of spur that projects N. 70° E., and about 4 chs. dist. N of draw that drains N. 40° E. In scattered pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, marked with a sandstone, 30 x 24 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S8 on the N and 17 on the S face.

There is no remaining evidence of the original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock, with brass cap mkd.

$$\begin{array}{r} T\ 34\ S\ R\ 23\ E \\ \frac{1}{4} \quad \frac{S\ 8}{S\ 17} \\ 1970 \end{array}$$

from which

A pine, 16 ins. diam., bears N. 64° W., 48 lks. dist., mkd. T34S R23E $\frac{1}{4}$ S8 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on N slope of hill, in scattered pine and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked with a sandstone, 15 x 9 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ S6 on W and 5 on E face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 34\ S\ R\ 23\ E \\ \frac{1}{4} \\ S\ 6\ | \ S\ 5 \\ 1970 \end{array}$$

from which

A pine, 20 ins. diam., bears N. 59° E., 66 lks. dist., mkd. T34S R23E $\frac{1}{4}$ S5 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on SW slope of hill, 1.00 ch. dist. E of small draw that drains S. In thick oak brush.

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961 (I) ~~(We)~~ have remonumented the corners in the following listed townships:

- | | |
|--------------------|--------------------|
| T. 13 S., R. 5 E. | T. 26 S., R. 26 E. |
| T. 13 S., R. 6 E. | T. 27 S., R. 23 E. |
| T. 15 S., R. 6 E. | T. 27 S., R. 24 E. |
| T. 16 S., R. 6 E. | T. 28 S., R. 23 E. |
| T. 17 S., R. 6 E. | T. 28 S., R. 24 E. |
| T. 25 S., R. 24 E. | T. 28 S., R. 25 E. |
| T. 25 S., R. 25 E. | T. 33 S., R. 23 E. |
| T. 26 S., R. 23 E. | T. 34 S., R. 23 E. |
| T. 26 S., R. 25 E. | |

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 19, 1971
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date APR 10 1972

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in:

T. 13 S., R. 5 E.	T. 25 S., R. 25 E.	T. 28 S., R. 23 E.
T. 13 S., R. 6 E.	T. 26 S., R. 23 E.	T. 28 S., R. 24 E.
T. 15 S., R. 6 E.	T. 26 S., R. 25 E.	T. 28 S., R. 25 E.
T. 16 S., R. 6 E.	T. 26 S., R. 26 E.	T. 33 S., R. 23 E.
T. 17 S., R. 6 E.	T. 27 S., R. 23 E.	T. 34 S., R. 23 E.
T. 25 S., R. 24 E.	T. 27 S., R. 24 E.	Salt Lake Meridian, Utah

executed by Ferrel D. Reynolds, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

SEP 7 1972
(Date)

Donald W. Fisher
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I Certify That the foregoing transcript of the field notes of the above described surveys in~~
is a true copy of the original field notes.

~~(Chief, Division of Cadastral Survey)~~

Blank

Page

Blank

Page

Form 9180-6
April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R595

FIELD NOTES

OF THE
DEPENDENT RESURVEY OF PORTIONS
OF THE SOUTH AND EAST BOUNDARIES
AND

THE SUBDIVISIONAL LINES

AND
SUBDIVISION OF CERTAIN SECTIONS
IN
TOWNSHIP 2 NORTH, RANGE 1 EAST

Of the _____ SALT LAKE _____ Meridian,

In the State of _____ UTAH _____

EXECUTED BY

LEONARD W. MURPHY _____ SUPERVISORY CADASTRAL SURVEYOR

RAY HARPIN _____ SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated _____ AUGUST 16 _____, 1966, approved _____ AUGUST 16, 1966 _____,

_____, which provided for the surveys included under ~~U.S. Survey~~ ^{U.S. Survey} /Group

Number _____ 500-1 _____, and assignment instructions dated _____ AUGUST 16 _____, 19 66.

AND MAY 22, 1967

Survey commenced _____ AUGUST 17 _____, 1966

INDEX DIAGRAM

Township 2 NORTH, Range 1 EAST

6	5 46	4	3	2	1
7 45	8 41 44	9 41	10 28 35	11 20 27	12 20
18 43	17 40 42	16 35 39	15 36 34	14 19 25	13 12 18
19	20	21 33 38	22 25 32	23 17 24	24 11 16
30	29	28 31 38	27 23 31	26 15 22	25 8 15
31	32 37	33 29 7	34 21 5	35 14 4	36 8 2

- Subdivision of Section 8 pgs. 46-51
- Subdivision of Section 15 pgs. 51-52
- Subdivision of Section 17 pgs. 52-55
- Subdivision of Section 21 pgs. 55-56
- Subdivision of Section 28 pgs. 56-58
- Subdivision of Section 33 pgs. 58-60
- Subdivision of Section 34 pgs. 60-63

Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of portions of the east and south boundaries, and the subdivisional lines, and subdivision of certain sections in Township 2 North, Range 1 East, Salt Lake Meridian, Utah.

History of previous surveys:

Survey of W. Bdy., Por. of the N. and S. Bdrs. and Por. of the Subdivisional Lines	Joseph Troskolawski	1855
Retraced and Surveyed a Por. of the S. Bdy.	Joseph Gorlinski	1872
Retraced and Surveyed a Por. of the N. Bdy.	C. L. Ericzon	1875
Resurveyed and Surveyed Pors. of the N., S., E., and W. Bdrs. and Subdivisional Lines	Otto E. Salomon	1886
Resurveyed a Por. of E. Bdy.	Robert Gorlinski	1894
Resurveyed a Por. of the S. Bdy. and Subdivisional Lines	Elliott Bird and Robert Yundt	1945- 1952

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions for Group No. 500-1, Utah, dated August 16, 1966.

Preliminary to the resurvey the lines of the original surveys and resurveys were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The direction of the lines refer to the true meridian, determined by direct solar observations and carried forward by means of the fore and backsights and sustained angulation.

The geographic position of the southeast corner of the township, as scaled from the U. S. Geological Survey quadrangle map "Fort Douglas, Utah," prepared in 1963, is as follows:

Latitude 40° 51.4' N.
Longitude 111° 46.6' W.

The observed mean magnetic declination is 15½° East.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

Reestablishment of the Survey Executed by
Otto E. Salomon in 1886.

Beginning at the cor. of Tps. 1 and 2 N., R. 1 E., monu-
mented with an embedded mound of stone, 2½ ft. base, 1
ft. high. This position is harmoniously related to
existing original corners and is accepted as the best
available evidence of the original corner position.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

	T2N	
	R1E R2E	
S 36		S 31
S 1		
	T1N	

1967

from which

A pine, 8 ins. diam., bears N. 12½° E., 24 lks.
dist., mkd. T2N R2E S31 BT.

A pine, 12 ins. diam., bears S. 17° E., 27 lks.
dist., mkd. T2N R2E S31 BT.

A pine, 8 ins. diam., bears S. 37° W., 35 lks.
dist., mkd. T1N R1E S1 BT.

A pine, 14 ins. diam., bears N. 31° W., 17 lks.
dist., mkd. T2N R1E S36 BT.

Raise a mound of stone, 2½ ft. base, 2 ft. high, W. of
cor.

From this point, the closing cor. of Tps. 1 and 2 N., R.
2 E., monumented with a quartzite stone, 24 x 12 x 8
ins., firmly set 10 ins. in the ground, plainly mkd. with
6 grooves on the N. and S. faces, and 6 grooves and CC on
the E. face, bears S. 0° 02' E., 22.16 chs. dist.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

	T1N T2N	
	R1E R2E	
S 1		S 31 C
		S 6 C
	T1N	

1967

69

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

from which

A pine, 10 ins. diam., bears N. $23\frac{1}{2}^{\circ}$ E., 27 lks. dist., mkd. T2N R2E S31 CC BT.

A pine, 8 ins. diam., bears S. $62\frac{1}{2}^{\circ}$ E., 31 lks. dist., mkd. T1N R2E S6 CC BT.

Bury the mkd. quartzite stone alongside the iron post.

Cor. is located on a steep NW. slope.

S. $89^{\circ} 58'$ W., between secs. 1 and 36.

Descend along NW. slope, through dense timber.

9.20 Frederick Hollow, drains NW.; descend along N. slope.

25.30 Spur, slopes N.; descend NW. slope.

39.77 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
 $\frac{1}{4}$ $\frac{S\ 36}{S\ 1}$
T1N

1967

from which

A pine, 10 ins. diam., bears S. $31\frac{1}{2}^{\circ}$ W., 65 lks. dist., mkd. T1N R1E $\frac{1}{4}$ S1 BT.

A pine, 6 ins. diam., bears N. $73\ 3/4^{\circ}$ W., 146 lks. dist., mkd. T2N R1E $\frac{1}{4}$ S36 BT.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Descend NW. slope.

46.00 Howard Hollow, drains N.; ascend NE. slope.

50.90 Point of spur, projects N.; descend NW. slope.

73.30 Bottom of hollow, drains N.; ascend NE. slope.

79.54 Point for the cor. of secs. 1, 2, 35, and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, and in a small mound of stone, to top, with brass cap mkd.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N R1E
S 35 | S 36
S 2 | S 1
T1N

1967

from which

A pine, 10 ins. diam., bears N. 59° E., 21 lks.
dist., mkd. T2N R1E S36 BT.

A pine, 8 ins. diam., bears S. 10½° E., 29 lks.
dist., mkd. T1N R1E S1 BT.

A pine, 8 ins. diam., bears S. 24° W., 41 lks.
dist., mkd. T1N R1E S2 BT.

A pine, 12 ins. diam., bears N. 49½° W., 20 lks.
dist., mkd. T2N R1E S35 BT.

Cor. is located on a steep NE. slope.

S. 89° 58' W., between secs. 2 and 35.

Ascend along NE. slope.

- 4.00 Point of spur; descend NW. slope.
- 35.00 Slope changes; ascend NE. slope.
- 39.77 Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4 S 35
S 2
T1N

1967

from which

A pine, 14 ins. diam., bears N. 8½° E., 70 lks.
dist., mkd. T2N R1E 1/4 S35 BT.

Set a steel post, 6 ft. long, alongside the iron post.

- 51.00 Point of spur; descend NW. slope.
- 59.00 Bottom of hollow; ascend NE. slope.
- 68.00 Point of spur; descend NW. slope.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

79.54

The cor. of secs. 2, 3, 34, and 35, monumented with a quartzite stone, 18 x 17 x 9 ins., firmly set 9 ins. in the ground, faintly mkd. with notches on the E. and W. edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T2N R1E
S 34 | S 35
S 3 | S 2
T1N

1966

from which

An oak, 4 ins. diam., bears S. 43° E., 10 lks. dist., mkd. T1N R1E S2 BT.

A huge boulder, bears S. 31½° W., 40 lks. dist., mkd. X B0, 4 ft. above the ground.

An oak, 4 ins. diam., bears S. 67½° W., 18 lks. dist., mkd. T1N R1E S3 BT.

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.

N. 89° 48' W., between secs. 3 and 34.

Descend along steep N. slope.

2.00 Mill Creek, 10 lks. wide, 6 ins. deep, course SW.

7.40 Foot trail, parallels Mill Creek.

20.13 Point for the E 1/16 sec. cor. of secs. 3 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
E 1/16 S 34
S 3
T1N

1966

from which

A cottonwood, 48 ins. diam., bears N. 85° W., 75 lks. dist., mkd. E 1/16 S34 BT.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

A cottonwood, 15 ins. diam., bears N. 49½° W., 27 lks. dist., mkd. E 1/16 S34 BT.

Corner is located 12 lks. N. of foot trail.

21.70 Mill Creek, 10 lks. wide, 6 ins. deep, course NW.

29.80 Foot trail, parallels creek; ascend NE. slope.

30.20 Right Fork Creek, 3 lks. wide, 3 ins. deep, course NW; ascend NE. slope.

34.00 Slope changes to N.

40.26 The 1/4 sec. cor. of secs. 3 and 34, monumented with a mound of stone, 2 ft. base, 1 ft. high. Two rocks of record size in the mound, but no visible mks. found. This point is harmoniously related to existing original corms. and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.

T2N R1E
1/4 S 34
S 3
T1N
1966

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

WEST, beginning new measurement.

4.00 Descend along N. slope.

10.00 Spring, course NE; ascend along NE. slope.

31.20 Crest of spur, slopes N.; descend W. slope.

36.60 Small ravine, drains N.; ascend NE. slope.

38.77 The cor. of secs. 3, 4, 33, and 34, monumented with a stone, 14 x 5 x 4 ins., firmly set 10 ins. in the ground and in a small mound of stone, mkd. with faint notches on the E. and W. edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. the ground to bedrock, and in a mound of stone, 1½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

73

CHAINS

T2N R1E
S 33 | S 34
S 4 | S 3
T1N

1966

from which

A maple, 5 ins. diam., bears N. $82\frac{1}{2}^\circ$ E., 48 lks.
dist., mkd. T2N R1E S34 BT.

A maple, 6 ins. diam., bears S. $83\frac{1}{2}^\circ$ E., 69 lks.
dist., mkd. T1N R1E S3 BT.

A maple, 6 ins. diam., bears S. $88\frac{1}{2}^\circ$ W., 46 lks.
dist., mkd. T1N R1E S4 BT.

Bury the mkd. stone alongside the iron post.

N. $88^\circ 56'$ W., between secs. 4 and 33.

Ascend steep E. slope.

- 9.70 Crest of spur, slopes NW.; descend NW. slope.
- 20.09 Point for the E $1/16$ sec. cor. of secs. 4 and 33; not
monumented.
- 24.50 Cave Hollow, course N.; ascend E. slope.
- 35.00 Along N. slope.
- 40.18 Point for the $1/4$ sec. cor. of secs. 4 and 33, at pro-
portionate dist.; there is no remaining evidence of the
original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in
the ground, with brass cap mkd.

T2N R1E
 $1/4$ S 33
S 4
T1N

1967

Raise a mound of stone, 2 ft. base, 2 ft. high, N. of
cor.

Continue along N. slope, through dense undergrowth.

- 80.36 The cor. of secs. 4, 5, 32, and 33, monumented with a
mound of stone, at the cor. of old wire fences, with
fences extending N. and W. This position is harmoniously
related to existing original cors. and is accepted as the
best available evidence of the original cor. position.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in
the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the South Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N R1E
S 32 | S 33
S 5 | S 4
T1N

1967

Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Otto E. Salomon in 1886, and the Resurvey Executed in 1894
by Robert Gorlinski, in 1894.

From the cor. of Tps. 1 and 2 N., R. 1 E., heretofore described.

N. 0° 02' W., along the E. boundary of sec. 36.

Descend NW. slope, through dense timber.

12.00 Mill Creek, 15 lks. wide, 12 ins. deep, course W.; ascend steep S. slope, through undergrowth.

33.00 Ravine, drains SW.; ascend SE. slope.

41.38 Point for the 1/4 sec. cor. of sec. 36 only, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R1E R2E
1/4 S 36 |

1967

Cor. is located on a steep SE. slope at the E. edge of boulder approximately, 30 x 20 x 15 ft.

59.58 The closing cor. of secs. 30 and 31, T. 2 N., R. 2 E., monumented with a quartzite stone, 14 x 8 x 6 ins., firmly set 6 ins. in the ground, mkd. with 1 groove on the S., 5 grooves on the N., and CC on the E. faces.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N
R1E R2E
S 36 | S 30 C
| S 31 C

1967

from which

A pine, 12 ins. diam., bears S. $79\frac{1}{2}^{\circ}$ E., 24 lks.
dist., mkd. T2N R2E CC S31 BT.

A pine, 6 ins. diam., bears S. 50° W., 109 lks.
dist., mkd. T2N R1E S36 BT.

Bury the mkd. quartzite stone alongside the iron post.

Cor. is located on a steep S. slope.

62.30 Crest of ridge, bears NE. and SW.; descend NW. slope.

72.50 Head of Willey Hollow, drains SW.; ascend along SW. slope.

82.76 Point for the cor. of secs. 25 and 36 only, at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in
the ground to bedrock, over a cross (+), and in a mound
of stone, 4 ft. base to top, with brass cap mkd.

T2N
R1E R2E
S 25 |
S 36 | S 30

1967

from which

A pine, 10 ins. diam., bears S. $36\frac{1}{2}^{\circ}$ E., 74 lks.
dist., mkd. T2N R2E S30 BT.

A pine, 6 ins. diam., bears S. 22° W., 152 lks.
dist., mkd. T2N R1E S36 BT.

A pine, 10 ins. diam., bears N. $47\frac{1}{2}^{\circ}$ W., 162 lks.
dist., mkd. T2N R1E S25 BT.

Set a steel fence post, 5 ft. long, alongside the iron
post.

Cor. is located on a steep W. slope.

E. $0^{\circ} 02'$ W., along the E. boundary of sec. 25.

Ascend steep SW. slope.


7.50 Crest of high ridge, bears irregularly E. and W.; descend
steep N. slope.

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

41.38 Point for the 1/4 sec. cor. of sec. 25 only, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. from the ground to bedrock, over a cross (+) and in a mound of stone, 4 ft. base to top, with brass cap mkd.



1967

from which


A pine, 18 ins. diam., bears WEST, 12 lks. dist., mkd. T2N R1E 1/4 S25 BT.

A pine, 18 ins. diam., bears N. 40¼° W., 66 lks. dist., mkd. T2N R1E 1/4 S25 BT.

58.86 The closing cor. of secs. 19 and 30, T. 2 N., R. 2 E., monumented with a quartzite stone, 14 x 8 x 8 ins., firmly set 6 ins. in the ground, dimly mkd. with grooves on the S., N., and CC on the E. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. from the ground, with brass cap mkd.



1967

from which

A pine, 18 ins. diam., bears N. 84° E., 171 lks. dist., mkd. T2N R2E CC S19 BT.

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, E. of cor.

59.50 Small draw, drains NW.; ascend gentle SW. slope.

67.00 Spur, slopes NW.; descend N. slope.

76.00 Holbrook Creek, 15 lks. wide, 6 ins. deep, course W.; ascend S. slope.

82.76 Point for the cor. of secs. 24 and 25 only, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

77

CHAINS

T2N
R1E R2E
 $\frac{S\ 24}{S\ 25}$ | S 19

1967

from which

A pine, 8 ins. diam., bears N. $47\frac{1}{4}^{\circ}$ E., 37 lks.
dist., mkd. T2N R2E S19 BT.

A pine, 8 ins. diam., bears S. 10° E., 13 lks.
dist., mkd. T2N R2E S19 BT.

A pine, 6 ins. diam., bears S. 59° W., 50 lks.
dist., mkd. T2N R1E S25 BT.

Set a steel fence post, 5 ft. long, alongside the iron
post.

N. $0^{\circ} 02'$ W., along the E. boundary of sec. 24.

Ascend SW. slope through dense undergrowth.

38.00 Enter sage brush.

41.38 The $\frac{1}{4}$ sec. cor. of sec. 24, monumented with a quartzite
stone, 18 x 12 x 6 ins., firmly set 9 ins. in the ground,
and in a small mound of stone, mkd. $\frac{1}{4}$ on the W. face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, with brass cap mkd.

T2N
R1E R2E
 $\frac{1}{4}$ S 24 |

1967

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, W. of
cor.

N. $0^{\circ} 08'$ W., beginning new measurement.

16.65 The closing corner. of secs. 18 and 19, T. 2 N., R. 2 E.,
monumented with a quartzite stone, 18 x 10 x 5 ins.,
firmly set 9 ins. in the ground, mkd. with 3 grooves on
the N. and S. faces, and CC on the E. face.

At the corner point

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T2N R1E R2E S 24 S 18 C S 19 C</p> <p style="text-align: center;">1967</p> <p>Bury the mkd quartzite stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.</p>
18.50	Top of divide between Salt Lake and Weber Valleys, bears W. and SE.; descend NE. slope.
34.00	Enter dense timber.
39.78	<p>The cor. of secs. 13 and 24 only, monumented with a quartzite stone, 12 x 12 x 10 ins., firmly set 5 ins. in the ground, mkd. with 3 notches on the N. and S. edges.</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T2N R1E R2E S 13 S 18 S 24 </p> <p style="text-align: center;">1967</p> <p>from which</p> <p>A quaking aspen, 12 ins. diam., bears N. 16½° E., 17 lks. dist., mkd. T2N R2E S18 BT.</p> <p>A pine, 8 ins. diam., bears S. 44° E., 56 lks. dist., mkd. T2N R2E S18 BT.</p> <p>A pine, 14 ins. diam., bears S. 18° W., 49 lks. dist., mkd. T2N R1E S24 BT.</p> <p>A quaking aspen, 6 ins. diam., bears N. 25° W., 23 lks. dist., mkd. T2N R1E S13 BT.</p> <p>Bury the mkd. quartzite stone alongside the iron post.</p> <p>Raise a mound of stone, 4 ft. base, 2½ ft. high, W. of cor.</p>
	<p>N. 0° 11' W., along the E. boundary of sec. 13.</p> <p>Descend NE. slope.</p>
5.00	Leave timber.
9.30	Trail road, bears NE. and SE.

Dependent Resurvey of a Portion
of the East Boundary
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

79

CHAINS

- 15.00 Same trail road, bears E. and W.
31.00 Descend NE. slope.
40.11 Point for the 1/4 sec. cor. of sec. 13 only, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T2N
R1E R2E
|
1/4 S 13
|
1967

Cor. is located on rocky, broken E. slope.

- 43.00 Bottom of gulch, drains E.; ascend SE. slope.
49.00 Crest of spur, slopes E.; descend NE. slope, through timber.
58.56 The closing cor. of secs. 7 and 18, T. 2 N., R. 2 E., monumented with a porphyry stone, 16 x 10 x 6 ins., firmly set 8 ins. in the ground, mkd. with 2 grooves on the N., 4 grooves on the S., and CC. on the E. faces, from which an original bearing tree

A balsam, 12 ins. diam., bears N. 61½° W., 23 lks. dist., with mks. T2N R2E S13 BT visible on partially overgrown blaze. (Record, N. 67½° W., 29 lks.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R1E R2E
|
S 13 | S 7 C
| S 18 C

1967

Bury the mkd. porphyry stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.

- 80.22 The cor. of secs. 12 and 13 only, monumented with an unmarked quartzite stone, 17 x 11 x 6 ins., firmly set 9 ins. in the ground, in a small mound of stone.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

CHAINS

T2N
R1E R2E
S 12 |
S 13 | S 7

1967

Bury the unmarked quartzite stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Otto E. Salomon in 1886

From the cor. of secs. 1, 2, 35, and 36, on the S. boundary of the township, heretofore described.

N. 0° 14' W., between secs. 35 and 36.

Descend steep N. slope, through dense timber.

7.50 Mill Creek, 15 lks. wide, 12 ins. deep, course W.; ascend S. slope.

40.65 Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R1E
1/4
S 35 | S 36

1967

from which

A quaking aspen, 6 ins. diam., bears N. 3° E., 23 lks. dist., mkd. T2N R1E 1/4 S36 BT.

A quaking aspen, 6 ins. diam., bears N. 17½° W., 15 lks. dist., mkd. T2N R1E 1/4 S35 BT.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

81

CHAINS

- 81.30 Point for the cor. of secs. 25, 26, 35, and 36, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | |
|-------------|
| T2N R1E |
| S 26 S 25 |
| S 35 S 36 |
- 1967
- Set a steel fence post, 5 ft. long, alongside the iron post.
-
- From the cor. of secs. 25 and 36 only on the E. boundary of the township, heretofore described.
- S. 88° 57' W., between secs. 25 and 36.
- Descend steep SW. slope.
- 20.00 Head of Willey Hollow, drains SW.; continue along S. slope.
- 39.91 Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and over a cross (+), in a mound of stone, 4½ ft. base to top, with brass cap mkd.
- | |
|----------|
| T2N R1E |
| 1/4 S 25 |
| S 36 |
- 1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- Cor. is located on a steep S. slope.
- 48.00 Crest of ridge, bears N. and S.; descend W. slope.
- 62.00 Head of draw, drains SW.; ascend SE. slope.
- 79.82 The cor. of secs. 25, 26, 35, and 36.
-
- N. 0° 05' E., between secs. 25 and 26.
- Ascend steep S. slope.
- 18.00 Crest of high ridge, bears E. and W.; descend steep N. slope.
- 22.00 Enter dense timber and undergrowth.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
40.65	Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate dist.; there is no remaining evidence of original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
	T2N R1E 1/4
	S 26 S 25
	1967
	from which
	A pine, 18 ins. diam., bears S. 30° W., 8 lks. dist., mkd. T2N R1E 1/4 S26 BT.
	Cor. is located on steep N. slope.
72.60	Holbrook Creek, 8 lks. wide, 6 ins. deep, course W.; ascend steep S. slope, through dense undergrowth.
81.30	The cor. of secs 23, 24, 25, and 26, monumented with a quartzite stone, 18 x 12 x 9 ins., loosely set 9 ins. the ground, mkd. with 2 notches on the S. and 1 notch on the E. edges.
	At the corner point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
	T2N R1E S 23 S 24 S 26 S 25
	1967
	from which
	A maple, 5 ins. diam., bears N. 79° E., 28 lks. dist., mkd. T2N R1E S24 BT.
	A maple, 4 ins. diam., bears N. 10° W., 16 lks. dist., mkd. S23 BT.
	Bury the mkd. quartzite stone alongside the iron post.
	Cor. is located on a steep S. slope in dense undergrowth.
	From the cor. of secs. 24 and 25 only, on the E. boundary of the township, heretofore described.
	S. 88° 03' W., between secs. 24 and 25.
	Descend steep W. slope through dense undergrowth.
21.80	Holbrook Creek, 5 lks. wide, 6 ins. deep, course SW.; ascend S. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- 39.80 Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate dist.; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4 $\frac{S\ 24}{S\ 25}$

1967

from which

A pine, 24 ins. diam., bears N. 13° E., 46 lks. dist., mkd. T2N R1E 1/4 S24 BT.

- 44.40 Stream, 3 lks. wide, 3 ins. deep, course S.; continue along S. slope.
60.00 Spur, slopes S.; descend SW. slope.
73.00 Ravine, drains S.; ascend SE. slope.
79.60 The cor. of secs. 23, 24, 25, and 26.

N. 0° 05' E., between secs. 23 and 24.

Ascend S. slope.

- 36.00 Top of divide between Holbrook and Ward Canyons, bears E. and W.; descend N. slope.
40.35 Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4

S 23 | S 24

1967

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Cor. is located on a steep N. slope.

- 55.00 Slope changes to NW.
80.70 The cor. of secs. 13, 14, 23, and 24, monumented with a quartzite stone, 20 x 12 x 10 ins., firmly set 10 ins. in the ground, mkd. with 3 notches on the S., and 1 notch on the E. faces.

At the corner point

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 14 | S 13
S 23 | S 24

1967

There are no suitable accessories or locations available for reference monuments.

Bury the mkd. quartzite stone alongside the iron post.

From the cor. of secs. 13 and 24 only, on the E. boundary of the township, heretofore described.

S. 87° 47' W., between secs. 13 and 24.

Descend W. slope, through dense undergrowth.

29.90 Quartzite ledge, approximately 8 ft. high, bears NE. and SW.

33.00 Head of draw, drains NW.

39.66 Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R1E
1/4 S 13
S 24

1967

from which

A pine, 8 ins. diam., bears S. 74½° E., 19 lks. dist., mkd. T2N R1E 1/4 S24 BT.

A pine, 8 ins. diam., bears N. 48½° W., 40 lks. dist., mkd. T2N R1E 1/4 S13 BT.

43.50 Quartz ledge, bears NE. and SW.; descend W. slope.

67.00 Creek, 6 lks. wide, 3 ins. deep, course NW.

75.00 Spur, slopes NW.; descend NW. slope.

79.32 The cor. of secs. 13, 14, 23, and 24.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

85

CHAINS

N. 0° 21' E., between secs. 13 and 14.

Descend NW. slope.

11.20 Wards Creek, 10 lks. wide, 6 ins. deep, course SW.; ascend S. slope.

16.20 Trail road, bears NW. and SE. to old cabin.

20.175 Point for the S 1/16 sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R1E
S 1/16

S 14 | S 13

1967

Set a steel fence post, 5 ft. long, alongside the iron post.

40.35 Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R1E
1/4

S 14 | S 13

1967

Set a steel fence post, 5 ft. long, alongside the iron post.

Ascend S. slope.

78.80 Spur, slopes NW.; descend NE. slope.

80.70 Point for the cor. of secs. 11, 12, 13, and 14, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 11 | S 12
S 14 | S 13

1967

CHAINS

- Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.
- Cor. is located in a clearing on a steep N. slope.
- From this point, U. S. Geological Survey Triangulation Station "JEEP", monumented with a standard brass disk in a concrete form, bears N. 59° 34' E., 12.35 chs. dist., and is located on a high knoll at the west edge a jeep trail.
- From the cor. of secs. 12 and 13 only, on the E. bound. of the township, heretofore described.
- S. 88° 06' W., between secs. 12 and 13.
- Ascend E. slope through dense undergrowth.
- 4.50 Enter timber.
- 18.50 Small spring, drains NE.
- 35.00 Leave timber and enter sage brush.
- 39.38 Point for the 1/4 sec. cor. of secs. 12 and 13, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. from the ground to bedrock, over a cross (+), and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T2N R1E
1/4 $\frac{S\ 12}{S\ 13}$
1967
- from which
- A pine, 10 ins. diam., bears N. 25° E., 85 lks. dist., mkd. T2N R1E 1/4 S12 BT.
- 60.60 Trail road, on ridge, both bear NW. and SE.; ascend SE. slope.
- 67.60 Ridge, bears N. and S.; descend W. slope.
- 78.76 The cor. of secs. 11, 12, 13, and 14.
- N. 0° 09' W., between secs. 11 and 12.
- Descend N. slope.
- 2.80 Enter scattering timber and dense undergrowth.
- 19.00 Spur, slopes W.; descend NW. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

87

CHAINS

31.60 Bottom of draw, drains W.; ascend SW. slope.

36.30 Spur, slopes W.; descend N. slope.

40.35 The 1/4 sec. cor. of secs. 11 and 12, monumented with a quartzite stone, 12 x 10 x 8 ins., firmly set 8 ins. in the ground, mkd. with 1/4 on the W. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E

1/4

S 11|S 12

1967

from which

A pine, 10 ins. diam., bears N. 28¼° E., 86 lks. dist., mkd. T2N R1E 1/4 S12 BT.

A pine, 12 ins. diam., bears N. 3/4° W., 107 lks. dist., mkd. T2N R1E 1/4 S11 BT.

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Cor. is located on a steep NW. slope.

From the cor. of secs. 2, 3, 34, and 35, on the S. boundary of the township, heretofore described.

N. 0° 27' W., between secs. 34 and 35.

Descend steep N. slope.

1.40 Mill Creek, 10 lks. wide, 6 ins. deep, course W.

2.00 Foot trail, parallels Mill Creek; ascend steep S. slope.

34.70 Foot trail, bears NE. and SW.

41.38 The 1/4 sec. cor. of secs. 34 and 35, monumented with quartzite stone, 20 x 12 x 9 ins., firmly set 11 ins. in the ground, and in a small mound of stone, mkd. 1/4 on the W. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N R1E
1/4

S 34|S 35

1967

from which

An oak, 4 ins. diam., bears S. $88\frac{1}{4}^{\circ}$ E., 19 lks.
dist., mkd. 1/4 S35 BT.

A maple, 4 ins. diam., bears N. $52\frac{1}{2}^{\circ}$ W., 39 lks.
dist., mkd. 1/4 S34 BT.

Bury the mkd. quartzite stone alongside the iron post.

N. $0^{\circ} 27'$ W., beginning new measurement.

17.50 Crest of spur, slopes W.; descend N. slope.

20.78 Point for the N 1/16 sec. cor. of secs. 34 and 35; not
monumented.

27.80 Kenney Creek, 5 lks. wide, 2 ins. deep, course SW.;
ascend steep S. slope.

41.56 The cor. of secs. 26, 27, 34, and 35, monumented with
a quartzite stone, 21 x 15 x 10 ins., firmly set 10
in the ground, faintly mkd. with 1 notch on the S.,
2 notches on the E. edges, with a small mound of stone
alongside.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T2N R1E
S 27|S 26
S 34|S 35

1967

Bury the mkd. stone alongside the iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of
cor.

Cor. is located 5 lks. N. of an old wire fence, bearing
generally E. and W.

From the cor. of secs. 25, 26, 35, and 36.

N. $88^{\circ} 53'$ W., between secs. 26 and 35.

Descend along S. slope of high ridge.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

89

CHAINS

- 10.00 Crest of spur, slopes S.; descend SW. slope.
- 39.91 Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R1E
1/4 S 26
S 35

1967

from which

A pine, 8 ins. diam., bears N. 12¼° E., 125 lks. dist., mkd. T2N R1E 1/4 S26 BT.

A pine, 6 ins. diam., bears S. 2¼° E., 30 lks. dist., mkd. T2N R1E 1/4 S35 BT.

- 41.30 Side hill drain, course SW., enter dense undergrowth.
- 79.82 The cor. of secs. 26, 27, 34, and 35.

N. 0° 35' E., between secs. 26 and 27.

Ascend steep S. slope.

- 15.00 End ascent; along W. slope.
- 36.70 Foot trail, bears E. and W.
- 39.86 Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4

S 27 | S 26

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 44.00 Descend steep N. slope, through dense undergrowth.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS							
65.50	Small stream, course NW.; continue descent.						
73.80	Holbrook Creek, 10 lks. wide, 8 ins. deep, course W.; ascend S. slope.						
79.72	The cor. of secs. 22, 23, 26, and 27, monumented with unmkd. granite stone, 18 x 10 x 6 ins., firmly set 10 ins. in the ground and in a small mound of stone.						
	At the corner point						
	Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.						
	<table border="1"> <tr><td colspan="2">T2N R1E</td></tr> <tr><td>S 22</td><td>S 23</td></tr> <tr><td>S 27</td><td>S 26</td></tr> </table>	T2N R1E		S 22	S 23	S 27	S 26
T2N R1E							
S 22	S 23						
S 27	S 26						
	1967						
	Bury the unmkd. stone alongside the iron post.						
	Retain small mound of stone around iron post.						
	Cor. is located on a steep SW. slope.						
	From the cor. of secs. 23, 24, 25, and 26.						
	N. 89° 59' W., between secs. 23 and 26.						
	Ascend S. slope, through dense undergrowth.						
3.70	Spur, slopes S.; descend SW. slope.						
20.30	Creek, 4 lks. wide, 2 ins. deep, course S.						
38.80	Creek, 4 lks. wide, 3 ins. deep, course S.						
39.56	Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate dist.; there is no remaining evidence of original cor.						
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.						
	<table border="1"> <tr><td colspan="2">T2N R1E</td></tr> <tr><td>1/4 S 23</td><td></td></tr> <tr><td>S 26</td><td></td></tr> </table>	T2N R1E		1/4 S 23		S 26	
T2N R1E							
1/4 S 23							
S 26							
	1967						
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.						
42.20	Creek, 4 lks. wide, 2 ins. deep, course S.						
79.12	The cor. of secs. 22, 23, 26, and 27.						

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 51' E., between secs. 22 and 23.

Ascend steep S. slope.

35.00 Top of ridge, bears E. and W.

36.00 Foot trail, follows crest of ridge.

39.70 Descend steep N. slope.

40.31 Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4

S 22 | S 23

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

60.00 Ward Creek, 10 lks. wide, 4 ins. deep, course W.; ascend S. slope.

80.62 Point for the cor. of secs. 14, 15, 22, and 23, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T2N R1E
S 15 | S 14
S 22 | S 23

1967

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

From the cor. of secs. 13, 14, 23, and 24.

S. 89° 58' W., between secs. 14 and 23.

Descend W. slope.

15.70 Ward Creek, 10 lks. wide, 8 ins. deep, course SW.; ascend along S. slope.

38.94 Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
	T2N R1E 1/4 $\frac{S\ 14}{S\ 23}$
	1967
	Cor. is located in gully draining SW.
41.90	Spur, slopes S.; descend SW. slope.
47.00	Ravine, course SW.; descend across SW. slope.
77.88	The cor. of secs. 14, 15, 22, and 23.
	N. 0° 12' W., between secs. 14 and 15.
	Ascend SW. slope.
9.30	Top of spur, slopes W.; descend along NW. slope.
23.50	Branch of Ward Creek, 4 lks. wide, 3 ins. deep, course SW.; ascend S. slope.
40.31	Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.
	T2N R1E 1/4 S 15 S 14
	1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Cor. is located on a gentle SW. slope in dense undergrowth.
	Continue along W. slope.
55.60	Branch of Ward Creek, 3 lks. wide, 4 ins. deep, course SW.; ascend SE. slope.
65.40	Spur, slopes SW.; along W. slope.
80.62	Point for the cor. of secs. 10, 11, 14, and 15, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N R1E
S 10 | S 11
S 15 | S 14

1967

from which

A spruce, 8 ins. diam., bears N. $39\frac{1}{2}^{\circ}$ E., 12 lks.
dist., mkd. S11 BT.

A spruce, 14 ins. diam., bears S. 29° E., 26 lks.
dist., mkd. T2N R1E S14 BT.

Cor. is located on gentle SW. slope.

From the cor. of secs. 11, 12, 13, and 14.

S. $89^{\circ} 59'$ W., between secs. 11 and 14.

Ascend NE. slope.

- 4.30 Top of spur, slopes NW.; descend W. slope.
12.40 Enter timber.
31.60 Trail road, bears N. and S.
39.42 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, at pro-
portionate dist.; there is no remaining evidence of the
original cor.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, with brass cap mkd.

T2N R1E
 $\frac{1}{4}$ S 11
S 14

1967

from which

A quaking aspen, 10 ins. diam., bears S. 3° E., 53
lks. dist., mkd. T2N R1E $\frac{1}{4}$ S14 BT.

A quaking aspen, 10 ins. diam., bears N. $32\frac{1}{2}^{\circ}$ W., 14
lks. dist., mkd. T2N R1E $\frac{1}{4}$ S11 BT.

Set a steel fence post, 5 ft. long, alongside the iron post.

- 54.40 Branch of Ward Creek, 4 lks. wide, 4 ins. deep, course
SW.; ascend along SE. slope.
73.00 Spur, slopes SW; descend W. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
78.84	The cor. of secs. 10, 11, 14, and 15.
	N. 0° 32' E., between secs. 10 and 11.
4.20	Bottom of hollow, drains SW.; ascend S. slope.
6.20	Skyline Drive, bears NE. and SW.
11.00	Top of ridge, bears E. and W.; descend steep N. slope.
19.50	Head of draw; ascend S. slope.
20.155	Point for the S 1/16 sec. cor. of secs. 10 and 11.
	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T2N R1E S 1/16
	S 10 S 11
	1967
	from which
	A pine, 12 ins. diam., bears S. 17 3/4° E., 34' dist., mkd. T2N R1E S 1/16 S11 BT.
	A pine, 10 ins. diam., bears S. 86° W., 28 lks. dist., mkd. T2N R1E S 1/16 S10 BT.
	Cor. is located on S. slope near the bottom of a draw.
29.00	Spur, slopes W.; descend steep N. slope.
40.31	Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T2N R1E 1/4
	S 10 S 11
	1967
	from which
	A pine, 16 ins. diam., bears N. 2½° E., 14 lks. dist., mkd. T2N R1E 1/4 S11 BT.
	A pine, 12 ins. diam., bears N. 70° W., 2 lks. dist., mkd. T2N R1E 1/4 S10 BT.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

95

CHAINS

Cor. is located on steep N. slope.

49.50 Creek in bottom of Centerville Canyon, 10 lks. wide, 6 ins. deep, course SW., ascend steep S. slope.

60.465 Point for the N 1/16 sec. cor. of secs. 10 and 11.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
N 1/16

S 10 | S 11

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located on steep S. slope.

80.62 The cor. of secs. 2, 3, 10, and 11, monumented with a quartzite stone, 16 x 10 x 6 ins., firmly set 9 ins. in the ground, mkd. with 5 notches on the S., and 2 notches on the E. edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 3 | S 2
S 10 | S 11

1967

from which

An oak, 6 ins. diam., bears S. 88½° E., 17 lks. dist., mkd. T2N R1E S11 BT.

A maple, 6 ins. diam., bears N. 14½° W., 35 lks. dist., mkd. T2N R1E S3 BT.

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 5 ft. base, 3 ft. high, W. of cor.

Cor. is located on a steep S. slope approximately 12 chs. S. of the crest of the spur between Centerville and Parrish Canyons.

From the cor. of secs. 3, 4, 33, and 34, on the S. boundary of the township, heretofore described.

N. 1° 04' W., between secs. 33 and 34.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	Descend steep N. slope.
18.00	Spur, slopes NE.; descend NE. slope.
21.45	Point for the S 1/16 sec. cor. of secs. 33 and 34; n monumented.
36.80	Mill Creek, 10 lks. wide, 6 ins. deep, course NW.; e Mueller Park Picnic grounds.
39.20	Mueller Park Road, bears E. and W.; ascend steep S.
42.90	The 1/4 sec. cor. of secs. 33 and 34 perpetuated by persons unknown with an unmkd. galvanized iron pipe, ins. diam., firmly set, projecting 30 ins. above the ground, with a granite stone, 15 x 12 x 8 ins., mkd. on one face, laying atop an embedded mound of stone, alongside.
	from which
	An iron post, 30 ins. long, 2½ ins. diam., set 2 ins. in the ground, for a reference monument, be EAST, 7.5 lks. dist., with brass cap mkd. RM S34 FT 1966, and an arrow pointing to the corner.
	An iron post, 30 ins. long, 2½ ins. diam., set 2 ins. in the ground, for a reference monument, be WEST, 7.5 lks. dist., with brass cap mkd. RM S33 FT. 1966, and an arrow pointing to the corner.

	N. 1° 04' W., beginning new measurement.
	Ascend S. slope through dense undergrowth.
3.80	Enter clearing.
5.60	Leave clearing.
13.90	Foot trail, bears NW. and SE.; ascend along SW. slope.
20.05	Point for the N 1/16 sec. cor. of secs. 33 and 34.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
	T2N R1E N 1/16 S 33 S 34 1966
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

40.10 The cor. of secs. 27, 28, 33, and 34, monumented with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, and in a mound of stone, with brass cap mkd.

T2N R1E
S 28 | S 27
S 33 | S 34

1952

From the cor. of secs. 26, 27, 34 and 35.

N. 89° 52' W., between secs. 27 and 34.

Descend SW. slope, through dense undergrowth.

20.00 Point for the E 1/16 sec. cor. of secs. 27 and 34; not monumented.

29.00 Spur, slopes S.; descend along SW. slope.

40.00 The 1/4 sec. cor. of secs. 27 and 34, monumented with a quartzite stone, 16 x 10 x 6 ins., firmly set 10 ins. in the ground, mkd. 1/4 on the N. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, over a cross (+), and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T2N R1E
1/4 S 27
S 34

1967

Bury the mkd. quartzite stone alongside the iron post.

Raise a small mound of stone N. of cor.

N. 89° 52' W., beginning new measurement.

19.97 Point for the W 1/16 sec. cor. of secs. 27 and 34; not monumented.

Descend SW. slope, along old wire fence.

39.94 The cor. of secs. 27, 28, 33, and 34.

N. 1° 19' E., between secs. 27 and 28.

Ascend S. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

10.00	Top of spur, slopes W.
10.50	Side hill drain, course W.
12.60	Jeep road, bears E. and W.
16.00	Top of spur, slopes W.; descend N. slope.
19.70	The 1/4 sec. cor. of secs. 27 and 28, monumented with an embedded mound of stone 3 ft. base, 1 1/2 ft. high, in the remains of an old wire fence, bears N. and S. This position is harmoniously related to existing original cors. and is accepted as the best available evidence of the original cor. position.
	At the corner point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	T2N R1E 1/4 S 28 S 27 1967
	Set a steel fence post, 5 ft. long, alongside the iron post.

	N. 1° 19' E., beginning new measurement.
	Continue descending steep N. slope.
18.60	Holbrook Creek, 10 lks. wide, 8 ins. deep, course W.; ascend steep S. slope.
19.88	Point for the N 1/16 sec. cor. of secs. 27 and 28; not monumented.
17.30	Top of spur, slopes SW.; along W. slope.
19.76	The cor. of secs. 21, 22, 27, and 28, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, in a mound of stone, with brass cap mkd.
	T2N R1E S 21 S 22 S 28 S 27 1952
	From the cor. of secs. 22, 23, 26, and 27.
	S. 89° 56' W., between secs. 22 and 27.
	Descend along W. slope.
1.00	Ravine, course S.; ascend SE. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- 24.00 Side hill drain, drains SW.; along a SW. slope.
- 39.44 Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R1E
1/4 $\frac{S\ 22}{S\ 27}$
- 1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- Continue descending along a SW. slope through dense undergrowth.
- 70.00 Over nearly level land on top of spur.
- 78.88 The cor. of secs. 21, 22, 27, and 28.
-
- N. 0° 12' E., between secs. 21 and 22.
- 5.00 Small ravine, drains W.
- 15.00 Along the W. slope of mountain.
- 40.25 Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R1E
1/4
S 21 | S 22
- 1967
- Cor. is located in an old wire fence, bears generally N. and S.
- 41.50 Descend steep N. slope into Ward Canyon.
- 60.30 Ward Creek, 20 lks. wide, 6 ins. deep, course W.; ascend S. slope.
- 80.50 The cor. of secs. 15, 16, 21, and 22, monumented with an unmkd. stone, 12 x 10 x 8 ins., firmly set 6 ins. in the ground, and in a large mound of stone. This position is harmoniously related to existing original cors. and is accepted as the best available evidence of the original cor. position.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 25
the ground, with brass cap mkd.

T2N R1E
S 16 | S 15
S 21 | S 22

1967

Bury the unmkd. stone alongside the iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, W. o

Cor. is located in an open meadow.

From the cor. of secs. 14, 15, 22, and 23.

S. 89° 50' W., between secs. 15 and 22.

Descend SW. slope through undergrowth.

38.40 Branch of Ward Creek, 5 lks. wide, 4 ins. deep, course
SW.; ascend along S. slope.

39.84 Point for the 1/4 sec. cor. of secs. 15 and 22, at pro-
portionate dist.; there is no remaining evidence of
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 in.
the ground to bedrock, and in amount of stone, 3 ft.
to top, with brass cap mkd.

T2N R1E
1/4 S 15
S 22

1967

from which

A blue spruce, 16 ins. diam., bears N. 4° E., 15
lks. dist., mkd. T2N R1E 1/4 S15 BT.

A blue spruce, 21 ins. diam., bears N. 85° E., 15
lks. dist., mkd. T2N R1E 1/4 S15 BT.

Cor. is located on rocky S. slope near foot of hill
approximately 150 lks. W. of creek.

70.00 Leave dense undergrowth, enter meadow.

72.30 Old Forest Service road, bears NW. and SE.

79.68 The cor. of secs. 15, 16, 21, and 22.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

101

CHAINS

N. 0° 25' E., between secs. 15 and 16.

Ascend S. slope.

5.70 Old Forest Service road, bears NW. and SE.

13.30 Same road, bears NE. and SW.; ascend S. slope.

40.18 Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4

S 16|S 15

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located in a gulch, drains SW.

48.50 U. S. Forest Service road, bears E. and W.

66.00 End ascent, along W. slope of ridge.

69.00 Descend N. slope.

80.36 The cor. of secs. 9, 10, 15, and 16, monumented with a quartzite stone, 16 x 13 x 7 ins., firmly set 9 ins. in the ground, in a small mound of stone, mkd. with 3 grooves on the E., and 4 grooves on the S. faces.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T2N R1E
S 9|S 10
S 16|S 15

1967

Bury the mkd. quartzite stone alongside the iron post.

Rebuild a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located on a gentle N. slope.

From the cor. of secs. 10, 11, 14, and 15.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	S. 89° 37' W., between secs. 10 and 15.
	Descend SW. slope.
1.80	Gulch, drains SW.
19.70	Point for the E 1/16 sec. cor. of secs. 10 and 15.
	Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.
	T2N R1E E 1/16 $\frac{S\ 10}{S\ 15}$
	1967
	Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
34.00	Gulch, drains SW.
38.00	Skyline Drive, bears NE. and SW.
39.40	Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
	T2N R1E 1/4 $\frac{S\ 10}{S\ 15}$
	1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Cor. is located approximately 160 lks. N. of the Skyline Drive.
43.00	Descend along N. slope.
59.10	Point for the W 1/16 sec. cor. of secs. 10 and 15.
	Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.
	T2N R1E W 1/16 $\frac{S\ 10}{S\ 15}$
	1967
	Corner is located on steep N. slope overlooking Center ville Canyon.
78.80	The cor. of secs. 9, 10, 15, and 16.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 4, 5, 32, and 33 on the S. boundary of the township, heretofore described.

N. 0° 23' E., between secs. 32 and 33.

Along the remains of an old wire fence.

- 7.40 Side hill drain, course W.; ascend SW. slope.
- 13.00 Spur, slopes W.; descend N. slope.
- 32.00 Base of hill, over nearly level land.
- 41.42 The 1/4 sec. cor. of secs. 32 and 33, monumented with a brass disc set in concrete, flush with the surface of the ground, established by the Davis County Survey Department. This position is harmoniously related to existing original cors. is a matter of county records and is accepted as the best available evidence of the original corner position. The brass disc is mkd.

DCS

1/4

S 32 | S 33

1963

Cor. is located 23 lks. E. of the center of a graded road bearing generally NE. and S.

N. 0° 01' E., beginning new measurement.

Along the E. edge of a graded road, bears generally NE. and S.

- 26.50 Leave graded road, bears NE.
- 40.28 The cor. of secs. 28, 29, 32, and 33, monumented with a brass disc set in concrete, 1 in. below the surface of the asphalt road. This position was remonumented by Davis County Survey Department, is a matter of county records, and is accepted as a true and faithful determination of the cor. position established by the 1952 resurvey. The brass disc mkd.

DCS

S 29 | S 28
S 32 | S 33

1963

from which

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears NORTH, 50 lks. (33 ft.) dist., with brass cap mkd. RM S28 S29 33 FT 1966, and an arrow pointing to the corner.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, 50 lks. SOUTH, 50 lks. (33 ft.) dist., with brass cap mkd. RM S32 S33 33 FT. 1966, and an arrow pointing to corner.

Cor. is located at the N. edge of Mueller Park Road and bears E. and W.

From the cor. of secs. 27, 28, 33, and 34.

N. 89° 50' W., between secs. 28 and 33.

Descend along SW.slope.

34.50 Jeep road, bears N. and S.

39.00 Track road, bears N. and S.

39.20 The 1/4 sec. cor. of secs. 28 and 33, monumented with sandstone, 14 x 9 x 4 ins., firmly set 8 ins. in the ground, dimly mkd. 1/4 on the N. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4 S 28
 S 33

1967

Bury the mkd. sandstone alongside the iron post.

Cor. is located 20 lks. W. of old track road, and 48 lks. S. of old wire fence, bearing generally E. and W.

N. 89° 50' W., beginning new measurement.

17.40 Mill Creek, 15 lks. wide, 4 ins. deep, course NW.

28.00 Along N. edge of Mueller Park Road.

39.30 The cor. of secs. 28, 29, 32, and 33.

From the cor. of secs. 21, 22, 27, and 28.

N. 89° 28' W., between secs. 21 and 28.

Descend W. slope.

20.14 Point for the E 1/16 sec. cor. of secs. 21 and 28; not monumented.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

105

CHAINS

- 30.80 Foot trail, bears NE. and SW.; along crest of ridge.
- 40.28 Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, over a cross (+) and in mound of stone, 3 ft. base to top, with brass cap mkd.
- T2N R1E
1/4 $\frac{S\ 21}{S\ 28}$
1967
- Cor. is located on ledge of rock outcropping.
- 45.00 Over nearly level bench land.
- 80.56 The cor. of secs. 20, 21, 28, and 29, monumented with a cross (+) mkd. on manhole cover, set over an iron pin, 1/2 in. diam. There is no remaining evidence of the reference monument established in the 1952 resurvey.
-
- From the cor. of secs. 15, 16, 21, and 22.
S. 89° 21' W., between secs. 16 and 21.
- 6.00 Descend steep W. slope.
- 12.30 U. S. Forest Service Road, curves NW. from SE.
- 15.20 Same road, curves NW. from SE.
- 39.75 Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.
- T2N R1E
1/4 $\frac{S\ 16}{S\ 21}$
1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- Cor. is located on the N. slope of hill approximately 2.50 chs. above Stone Creek.
- 42.50 U. S. Forest Service Road, bears NE. and SW., about one chain S. of curve.
- 43.80 Stone Creek, 4 lks. wide, 3 ins. deep, course SW.
- 76.60 Jeep road, bears NW. and SE.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

106

CHAINS	
79.50	The cor. of secs. 16, 17, 20, and 21, monumented with iron post, 2 ins. diam., firmly set, projecting 10 ins. above the ground, and in a mound of stone, with brass mkd.
	T2N R1E <u>S 17 S 16</u> <u>S 20 S 21</u>
	1949
	N. 2° 45' W., between secs. 16 and 17.
	Ascend along SW. slope.
2.20	Jeep road, bears NW. and SE.
20.80	Point for the S 1/16 sec. cor. of secs. 16 and 17; not monumented.
22.00	Side hill drain, drains SW.
41.60	The 1/4 sec. cor. of secs. 16 and 17, monumented with brass disc, set in a concrete cylinder, 4 ins. diam., firmly set, projecting 6 ins. above the ground, established by the Davis County Survey Department. This position is harmoniously related to existing original cors., is a matter of county recods. and is accepted as the best available evidence of the original corner position. The brass disc is mkd.
	DCS 1/4
	S 17 S 16
	1965
	N. 0° 45' E., beginning new measurement.
7.10	Side hill drain, drains W.
31.00	Descend along steep NW. slope.
40.32	The cor. of secs. 8, 9, 16 and 17, monumented with a quartzite stone, 20 x 14 x 7 ins., firmly set 11 ins. above the ground, mkd. with 4 notches on the E. and S. edges.
	At the corner point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. above the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

107

CHAINS

T2N R1E
S 8 | S 9
S 17 | S 16

1967

Bury the mkd. quartzite stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Cor. is located on a steep N. slope.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 35' W., between secs. 9 and 16.

Descend along NW. slope.

40.74

Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
1/4 S 9
S 16

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

41.20 Spur, slopes N.; descend along N. slope.

81.48 The cor. of secs. 8, 9, 16 and 17.

N. 0° 33' W., between secs. 8 and 9.

Descend steep N. slope.

5.40 Creek in bottom of Centerville Canyon, 5 lks. wide, 3 ins. deep, course W.; ascend steep S. slope.

20.21 Point for the S 1/16 sec. cor. of secs. 8 and 9; not monumented.

34.00 End ascent, along W. slope of high ridge.

35.00 Foot trail, bears NW. and SE.; along crest of ridge.

37.00 Spur, slopes W.; descend NW. slope.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- 40.42 Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.
- T2N R1E
1/4
S 8 | S 9
1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 45.00 Same trail, bears E. and W.
- 57.85 Parrish Creek, 5 lks. wide, 4 ins. deep, course W.; ascend SW. slope.
- 75.00 Crest of hill; descend steep NW. slope.
- 80.30 Ravine, course SW.; ascend S. slope.
- 80.84 The cor. of secs. 4, 5, 8, and 9, monumented with an embedded mound of stone. 3 ft. base, 1 ft. high. This position is harmoniously related to existing original cors., and is accepted as the best available evidence the original cor. position.
- At the corner point
Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.
- T2N R1E
S 5 | S 4
S 8 | S 9
1967
- Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Reestablishment of the Survey Executed in Part
by Joseph Troskolawski, in 1855, Surveyed
and Resurveyed in Part by Otto E. Salomon in 1886,
and Resurveyed in Part by Eliot Bird and
Robert C. Yundt in 1945-52.
-
- From the cor. of secs. 16, 17, 20, and 21.
N. 89° 00' W., between secs. 17 and 20.
Descend W. slope.
- 21.08 Point for the E 1/16 sec. cor. of secs. 17 and 20.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

139

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
E 1/16 $\frac{S\ 17}{S\ 20}$

1967

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

29.30 Graded road, bears N. and S.

31.62 Point for the W-E 1/64 sec. cor. of secs. 17 and 20, falls in back yard of residence; not monumented.

42.16 The 1/4 sec. cor. of secs. 17 and 20, monumented with a brass disc, set in concrete, 3 ins. below the surface of an asphalt road, bearing N. and S., monumented by the Davis County Survey Department. The brass disc is mkd.

DCS
T2N R1E
1/4 $\frac{S\ 17}{S\ 20}$

1964

from which a 1952 reference monument

An iron post, set 6 ins. below the surface of the ground, set in concrete, bears S. 89° 46' E., 50 lks. dist., with brass cap mkd. RM S17 S20 33.0 FT. 1952.

and new accessories

The SW. cor. of foundation of white frame house, bears S. 56° 43' E., 148 lks. dist.

The SE. cor. of foundation of red brick house, bears S. 49° 06' W., 83 lks. dist.

The SE. cor. of foundation of brick house, bears N. 48° 57' W., 100 lks. dist.

From the cor. of secs. 17, 18, 19, and 20, monumented with an iron post, 2½ ins. diam., set flush with the surface of the ground, in concrete, with brass cap mkd.

T2N R1E
 $\frac{S\ 18\ | S\ 17}{S\ 19\ | S\ 20}$

1952

N. 0° 09' W., between secs. 17 and 18.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- 40.15 The 1/4 sec. cor. of secs. 17 and 18, monumented with brass disc, set in a concrete cylinder, 4 ins. diam., set 12 ins. below the surface of the ground, established by the Davis County Survey Department. This position harmoniously related to existing original cors., is a matter of county records, and is accepted as the best available evidence of the original cor. position. The brass disc is mkd.
- DCS
1/4

S 18 | S 17
- Cor. is located in field between houses.
-
- N. 0° 09' W., beginning new measurement.
- 40.42 The cor. of secs. 7, 8, 17, and 18, monumented with an iron post, 2½ ins. diam., set flush with the surface of the ground, in concrete, with brass cap mkd.
- T2N R1E
S 7 | S 8
S 18 | S 17
- 1952
- Cor. is located 40 ft. W. of an asphalt road, and N. of a gray stucco house.
- From the cor. of secs. 8, 9, 16, and 17.
- S. 89° 28' W., between secs. 8 and 17.
- Along the N. slope through dense undergrowth.
- 5.60 Crest of rocky spur, slopes NW.; descend W. slope.
- 20.36 Point for the E 1/16 sec. cor. of secs. 8 and 17.
- T2N R1E
E 1/16 S 8
S 17
- 1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 31.10 Jeep road, bears NW. and SE.
- 40.72 The 1/4 sec. cor. of secs. 8 and 17, monumented with an iron post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, with a mound of stone, 2½ ft. base, 1½ ft. high, N., and brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

$$1/4 \frac{S 8}{S 17}$$

1952

N. 89° 57' W., beginning new measurement.

Descend W. slope.

- 20.05 Point for the W 1/16 sec. cor. of secs. 8 and 17; not
monumented.
- 40.10 The cor. of secs. 7, 8, 17, and 18.

N. 0° 11' W., between secs. 7 and 8.

- 20.03 Point for the S 1/16 sec. cor. of secs. 7 and 8; not
monumented.
- 40.06 The 1/4 sec. cor. of secs. 7 and 8, monumented with a
brass tablet, 3½ ins. diam., seated in a concrete monu-
ment, 6 ins. diam., flush with the surface of the ground,
mkd.

$$1/4$$

$$S 7 | S 8$$

1952

from which

The SE. corner of cinder block shed, bears North,
121 lks. dist.

N. 0° 11' W., beginning new measurement.

- 20.03 Point for the N 1/16 sec. cor. of secs. 7 and 8; not
monumented.
- 40.06 The cor. of secs. 5, 6, 7, and 8, monumented with an iron
post, 2½ ins. diam., firmly set, projecting 1 in. above
the ground, with brass cap mkd.

$$T2N R1E$$

$$\frac{S 6 | S 5}{S 7 | S 8}$$

1952

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 4, 5, 8, and 9.
 S. 89° 42' W., between secs. 5 and 8.
 Descend along SW. slope.

20.09 Point for the E 1/16 sec. cor. of secs. 5 and 8.
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
 the ground, with brass cap mkd.

T2N R1E
 E 1/16 $\frac{S 5}{S 8}$

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of
 cor.

40.18 The 1/4 sec. cor. of secs. 5 and 8, monumented with
 iron post, 2½ ins. diam., firmly set, projecting 4
 above the ground, with brass cap mkd.

1/4 $\frac{S 5}{S 8}$

1952

S. 88° 44' W., beginning new measurement.

20.09 Point for the W 1/16 sec. cor. of secs. 5 and 8; not
 monumented.

40.18 The cor. of secs. 5, 6, 7, and 8.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

In Section 8

From the 1/4 sec. cor. of secs. 8 and 17.
 N. 0° 10' W., along the N. and S. center line of sec.

9.00 Creek in bottom of Centerville Canyon, 5 lks. wide, 3
 ins. deep, course W.; ascend along SW. slope.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

113

CHAINS

20.22 Point for the C-S 1/16 sec. cor. of sec. 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
C
S 8 | S 1/16
C

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Continue along gentle SW. slope.

40.44 Point for the C 1/4 sec. cor. of sec. 8, at the intersection with the E. and W. center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T2N R1E
S 8
C 1/4

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

50.00 Parrish Creek, 5 lks. wide, 3 ins. deep, course W.

60.74 Point for the C-N 1/16 sec. cor. of sec. 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
C
S 8 | N 1/16
C

1967

Cor. is located on W. slope at NW. edge of large rock outcropping.

81.04 Point for the 1/4 sec. cor. of secs. 5 and 8.

From the 1/4 sec. cor. of secs. 8 and 9.

Run 89° 29' W., along the E. and W. center line of sec. 8.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	Descend along N. slope.
15.00	Slope changes to W.
20.23	Point for the C-E 1/16 sec. cor. of sec. 8. Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.
	T2N R1E S 8 C ————— C E 1/16
	1967
	Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
40.46	The C 1/4 sec. cor. of sec. 8.
48.60	U. S. Forest Service road, bears N. and S.
50.495	Point for the C-E-W 1/64 sec. cor. of sec. 8. Set a copper-coated steel stake, 30 ins. long, 1/2 in. diam., 26 ins. in the ground, with brass cap mkd.
	T2N R1E S 8 C E W 1/64 BLM
	1967
60.53	Point for the C-W 1/16 sec. cor. of sec. 8. Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.
	T2N R1E S 8 C ————— C W 1/16
	1967
78.60	Approximate center line of Orchard Drive, an asphalt road, bears N. and S.
80.60	The 1/4 sec. cor. of secs. 7 and 8.
	From the C-E 1/16 sec. cor. of sec. 8. N. 0° 22' W., along the N. and S. center line of the cor. of sec. 8.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

40.53 The E 1/16 sec. cor. of sec. 5 and 8.

From the E 1/16 sec. cor. of secs. 8 and 17.

N. 0° 21' W., along the N. and S. center line of the SE $\frac{1}{4}$ of sec. 8.

4.00 Descend steep N. slope into Centerville Canyon.

8.00 Creek in bottom of Centerville Canyon, 5 lks. wide, 3 ins. deep, course W.; ascend steep S. slope.

20.22 Point for the SE 1/16 sec. cor. of sec. 8, at the intersection with the E. and W. center line of the SE $\frac{1}{4}$.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 8
SE 1/16

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located on a gentle W. slope.

40.43 The C-E 1/16 sec. cor. of sec. 8.

From the point for the S 1/16 sec. cor. of secs. 8 and 9.

S. 89° 29' W., along the E. and W. center line of the SE $\frac{1}{4}$ of sec. 8.

Descend along the SW. slope.

20.28 The SE 1/16 sec. cor. of sec. 8.

40.57 The C-S 1/16 sec. cor. of sec. 8.

From the point for the W 1/16 sec. cor. of secs. 8 and 17.

N. 0° 11' W., along the N. and S. center line of the SW $\frac{1}{4}$ of sec. 8.

20.12 Point for the SW 1/16 sec. cor. of sec. 8, at the intersection of the E. and W. center line of SW $\frac{1}{4}$; not monumented.

40.25 The C-W 1/16 sec. cor. of sec. 8.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	From the C-S 1/16 sec. cor. of sec. 8.
	S. 89° 46' W., along the E. and W. center line of 1/16 sec. of sec. 8.
3.30	U. S. Forest Service road, bears N. and S.
10.03	Point for the C-E-SW 1/64 sec. cor. of sec. 8.
	Set a copper-coated steel stake, 30 ins. long, 1/2 in. diam., 20 ins. in the ground, with brass cap mkd.
	T2N R1E S 8 C E SW 1/64 1967
20.06	The point for the SW 1/16 sec. cor. of sec. 8.
40.12	The point for the S 1/16 sec. cor. of sec. 7 and 8.
	From the C-E-SW 1/64 sec. cor. of sec. 8.
	N. 0° 10' W., along the N. and S. center line of the NE 1/4 of the SW 1/4 of sec. 8.
20.18	The C-E-W 1/64 sec. cor. of sec. 8.
	From the C-W 1/16 sec. cor. of sec. 8.
	N. 0° 10' W., along the N. and S. center line of the 1/16 sec. of sec. 8.
20.17	Point for the NW 1/16 sec. cor. of sec. 8, at the intersection of the E. and W. center line of the NW 1/4.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	T2N R1E S 8 NW 1/16 1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Cor. is located 10 lks. E. of old wire fence, and 95 ft. E. of telephone line, both bear N. and S.
40.33	The point for the W 1/16 sec. cor. of secs. 5 and 8.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

117

CRAINS

From the C-N 1/16 sec. cor. of sec. 8.

S. 89° 07' W., along the E. and W. center line of NW¼ of sec. 8.

Descend W. slope.

20.08 The NW 1/16 sec. cor. of sec. 8.

40.15 The point for the N. 1/16 sec. cor. of secs. 7 and 8.

In Section 15

From the 1/4 sec. cor. of secs. 15 and 22.

N. 0° 07' E., along the N. and S. center line of sec. 15.

29.00 Spur, slopes SW.

40.24 Point for the C 1/4 sec. cor. of sec. 15, at the intersection with the E. and W. center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 15
C 1/4

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

41.40 U. S. Forest Service road, bears NE. and SW.

46.50 Small creek, course SW.; ascend S. slope.

58.00 Skyline Drive, bears E. and W.

78.89 Skyline Drive, bears NE. and SW.

80.49 The 1/4 sec. cor. of secs. 10 and 15.

From the 1/4 sec. cor. of secs. 14 and 15.

S. 89° 44' W., along the E. and W. center line of sec. 15.

Descend SW. slope, through dense undergrowth.

19.20 ranch of Ward Creek, 4 lks. wide, 4 ins. deep, course
.; ascend along SW. slope.

25.00 crest of ridge, bears NE. and SW.

39.62 C 1/4 sec. cor. of sec. 15.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- 41.10 U. S. Forest Service Road, bears NE. and SW.; desc. steep W. slope.
- 51.20 Small creek, course SW.; along SW. slope.
- 66.00 Top of rounded hill; descend W. slope.
- 79.24 The 1/4 sec. cor. of secs. 15 and 16.

In Section 17

From the 1/4 sec. cor. of secs. 17 and 20.

N. 0° 03' W., along the N. and S. center line of sec.

Along an asphalt street, bears N. and S.

- 10.13 Point for the C-S-S 1/64 sec. cor. of sec. 17, falls center of street.

Set a 6 in. spike, flush with the pavement surface.

from which

A copper-coated steel stake, 30 ins. long, set with the surface of the road, for a reference monument, bears N. 0° 03' W., 90 lks. (59.4 ft.) dist., with brass cap mkd. C-S-S 1/64 S17 RM 59. FT. 1967 and an arrow pointing to the cor.

Only suitable location available for a reference monument.

- 10.70 Leave paved street, enter improved dirt road.

- 20.26 Point for the C-S 1/16 sec. cor. of sec. 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. the ground, with brass cap mkd.

T2N R1E

C
|
S 1/16 | S 17
|
C

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located near gravel pit.

- 22.53 Corner of fences, extending N. and W.; at roads end.

- 40.52 Point for the C 1/4 sec. cor. of sec. 17, at the intersection with the E. and W. center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

T2N R1E
S 17
C 1/4

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.72 The 1/4 sec. cor. of secs. 8 and 17.

From the 1/4 sec. cor. of secs. 16 and 17.

S. 89° 40' W., along the E. and W. center line of sec. 17.

Descend steep W. slope.

20.09 Point for the C-E 1/16 sec. cor. of sec. 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T2N R1E
E 1/16
C ——— S 17 ——— C

1967

Raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.

25.00 U. S. Forest Service road, bears N. and S.

40.18 The C 1/4 sec. cor. of sec. 17.

79.10 Approximate center line of an asphalt road, bears N. and S.

80.21 The 1/4 sec. cor. of secs. 17 and 18.

From the E 1/16 sec. cor. of secs. 17 and 20.

N. 1° 24' W., along the N. and S. center line of the SE¼ of sec. 17.

Ascend S. slope.

10.26 Point for the C-S-SE 1/64 sec. cor. of sec. 17; not monumented.

12.60 U. S. Forest Service road, bears N. and S.

20.52 Point for the SE 1/16 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the SE¼.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	T2N R1E SE 1/16 S 17
	1967
	Raise a small mound of stone W. of cor.
41.04	The C-E 1/16 sec. cor. of sec. 17.
	From the point for the S 1/16 sec. cor. of secs. 16 17.
	N. 89° 40' W., along the E. and W. center line of the of sec. 17.
	Descend W. slope.
20.59	The SE 1/16 sec. cor. of sec. 17.
25.70	U. S. Forest Service road, bears NW. and SE.
30.88	Point for the C-W-SE 1/64 sec. cor. of sec. 17; not mented.
41.17	The C-S 1/16 sec. cor. of sec. 17.
	From the point for the W-E 1/64 sec. cor. of secs. 1 20.
	N. 0° 43' W., along the N. and S. center line of the of the SE $\frac{1}{4}$ of sec. 17.
10.20	Point for the SW-SE 1/64 sec. cor. of sec. 17, at the tersection with the E. and W. center line of the SW $\frac{1}{4}$ of the SE $\frac{1}{4}$.
	Set a copper-coated steel stake, 30 ins. long, 1/2 in. diam., 24 ins. in the ground, with brass cap mkd.
	T2N R1E S 17 SW SE 1/64
	1967
	from which
	Utility pole, bears N. 2 37' E., 76 lks. dist.
	Utility pole, bears S. 33° 12' E., 114 lks. dist.
	NE. corner of brick house, bears N. 70° 34' W., lks. dist.

121

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

20.40 The point for the C-W-SE 1/64 sec. cor. of sec. 17.

From the point for the C-S-SE 1/64 sec. cor. of sec. 17.

N. 89° 20' W., along the E. and W. center line of the SW $\frac{1}{4}$ of the SE $\frac{1}{4}$ of sec. 17.

10.41 The SW-SE 1/64 sec. cor. of sec. 17.

20.82 The C-S-S 1/64 sec. cor. of sec. 17.

In Section 21

From the 1/4 sec. cor. of secs. 21 and 28.

N. 0° 35' E., along the N. and S. center line of sec. 21.

39.86 Point for the C 1/4 sec. cor. of sec. 21, at the intersection with the E. and W. center line.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 21 C 1/4

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

47.80 Ward Creek, 15 lks. wide, 6 ins. deep, course SW.

68.60 Old jeep road, bears generally E. and W.

72.70 Top of hill, bears generally E. and W.

79.72 The 1/4 sec. cor. of secs. 16 and 21.

From the 1/4 sec. cor. of secs. 21 and 22.

S. 89° 57' W., along the E. and W. center line of sec. 21.

3.50 Descend steep W. slope.

40.02 The C 1/4 sec. cor. of sec. 21.

54.50 Old U. S. Forest Service road, bears NE. and SW.

80.04 The 1/4 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.

CHAINS

1/4

S 20 | S 21

1949

In Section 28

From the 1/4 sec. cor. of secs. 28 and 33.

N. 0° 31' E., along the N. and S. center line of sec.

8.60 Jeep road, bears NW. and SE.

38.56 Jeep road, bears E. and W.

39.88 Point for the C 1/4 sec. cor. of sec. 28, at the int
section of the E. and W. center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 in
the ground, with brass cap mkd.

T2N R1E
S 28 C 1/4

1967

Raise a small mound of stone W. of cor.

46.40 Spur, slopes W.; descend N. slope.

54.00 Holbrook Creek, 10 lks. wide, 8 ins. deep, course W.
ascend S. slope.

59.81 Point for the C-N 1/16 sec. cor. of sec. 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 in
the ground, with brass cap mkd.

T2N R1E
C
N 1/16 | S 28
C

1967

Cor. is located 40 lks. N. of a sidehill drain, cour
SW.

70.50 Spur, slopes SW.; descend along W. slope.

79.74 The 1/4 sec. cor. of secs. 21 and 28.

123

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

From the 1/4 sec. cor. of secs. 27 and 28.

N. 89° 35' W., along the E. and W. center line of sec. 28

Descend along NW. slope.

17.40 Slope changes to W.

19.87 Point for the C-E 1/16 sec. cor. of sec. 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{c} \text{T2N R1E} \\ \text{S 28} \\ \text{C} \text{-----} \text{C} \\ \text{E 1/16} \end{array}$$

1967

Cor. is located on gentle W. slope near crest of hill.

39.74 The C 1/4 sec. cor. of sec. 28.

Descend gentle W. slope.

79.64 The 1/4 sec. cor. of secs. 28 and 29, monumented with an iron post, 2½ ins. diam., 1½ ft. below the surface of a road, bears N. S., and generally E., and surrounded by concrete, with brass cap mkd.

1/4

S 29 | S 28

1952

from which

Manhole cover with a cross (+) on rim, bears EAST,
4½ lks. dist.

From the C-E 1/16 sec. cor. of sec. 28.

N. 0° 55' E., along the N. and S. center line of the NE¼ of sec. 28.

4.00 Descend steep NW. slope.

12.60 Holbrook Creek, 10 lks. wide, 8 ins. deep, course W.; ascend steep S. slope.

19.90 Point for the NE 1/16 sec. cor. of sec. 28, at the intersection with the E. and W. center line of the NE¼.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

$$\begin{array}{c} \text{T2N R1E} \\ \text{S 28} \\ \text{NE 1/16} \end{array}$$

1967

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

- Cor. is located on steep SW. slope approximately one chain E. of sidehill drain.
- 33.00 Top of hill, slopes W.; over nearly level land.
- 39.80 The point for the E 1/16 sec. cor. of secs. 21 and 28.
- From the point for the N 1/16 sec. cor. of secs. 27 and 28.
- N. 89° 31' W., along the E. and W. center line of sec. 28.
- Along the S. slope of hill.
- 20.01 The NE 1/16 sec. cor. of sec. 28.
- 40.02 The C-N 1/16 sec. cor. of sec. 28.
- In Section 33
- From the 1/4 sec. cor. of secs. 4 and 33, on the S. boundary of the township, heretofore described.
- N. 0° 25' W., along the N. and S. center line of sec. 33.
- Descend N. slope.
- 21.08 Point for the C-S 1/16 sec. cor. of sec. 33; not monumented.
- 42.16 Point for the C 1/4 sec. cor. of sec. 33, at the intersection with the E. and W. center line.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. above the ground to bedrock, and in a mound of stone, 2 ft. base to top, with brass cap mkd.
- T2N R1E
C 1/4 S33
1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Cor. is located on a steep NE. slope, 18 lks. W. of C Hollow.
- 58.00 Mueller Park Road, bears NW. and SE.
- 60.80 Mill Creek, 6 lks. wide, 6 ins. deep, course NW.; ascending SW. slope.
- 82.34 The 1/4 sec. cor. of secs. 28 and 33.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

From the 1/4 sec. cor. of secs. 33 and 34.

N. 89° 58' W., along the E. and W. center line of sec. 33.

Descend W. slope.

7.70 Mueller Park Road, bears NW. and SE.

9.80 Mill Creek, 6 lks. wide, 4 ins. deep, course NW.; ascend along N. slope.

19.84 Point for the C-E 1/16 sec. cor. of sec. 33.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R1E
S 33
C ————— C
E 1/16

1967

from which

A telephone pole, bears EAST, 4 lks. dist.

Cor. is located on N. slope under telephone lines bearing E. and W.

39.50 Cave Hollow, drains N.

39.68 The C 1/4 sec. cor. of sec. 33.

79.26 The 1/4 sec. cor. of secs. 32 and 33.

From the point for the E 1/16 sec. cor. of secs. 4 and 33, on the S. boundary of the township, heretofore described.

N. 0° 45' W., along the N. and S. center line of the SE¼ of sec. 33.

Descend NW. slope.

21.26 Point for the SE 1/16 sec. cor. of sec. 33, at the intersection with the E. and W. center line of the SE¼.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

T2N R1E
S 33
SE 1/16

1967

30.50 Spur, slopes NW.; descend N. slope.

42.53 The C-E 1/16 sec. cor. of sec. 33.

CHAINS

- From the point for the S 1/16 sec. cor. of secs. 33 and 34.
- N. 89° 27' W., along the E. and W. center line of sec. 33.
- Ascend across N. slope.
- 17.00 Spur, slopes NW.
- 19.97 The SE 1/16 sec. cor. of sec. 33.
- 22.00 Descend into Cave Hollow.
- 29.50 Cave Hollow, drains NW.; ascend E. slope.
- 39.93 The point for the C-S 1/16 sec. cor. of sec. 33.

In Section 34

- From the 1/4 sec. cor. of secs. 3 and 34, on the S. boundary of the township, heretofore described.
- N. 0° 16' W., along the N. and S. center line of sec.
- Descend N. slope into Mill Creek.
- 9.50 Mill Creek, 12 lks. wide, 8 ins. deep, course NW.; ascend SW. slope through Mueller Park.
- 32.00 Foot trail, bears E. and W.
- 42.06 Point for the C 1/4 sec. cor. of sec. 34, at the intersection with the E. and W. center line.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. above the ground, with brass cap mkd.

T2N R1E
S 34
C 1/4

1967

- 52.00 Descend steep N. slope.
- 55.20 Kenney Creek, 5 lks. wide, 4 ins. deep, course SW.; ascend SW. slope.
- 62.48 Point for the C-N 1/16 sec. cor. of sec. 34.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. above the ground, with brass cap mkd.

T2N R1E
C
S 34 | N 1/16
C

1967

127

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS

from which

A cottonwood, 22 ins. diam., bears N. 37° E., 57 lks. dist., mkd. CN 1/16 S34 BT.

A cottonwood, 6 ins. diam., bears S. 35° E., 45 lks. dist., mkd. CN 1/16 S34 BT.

Cor. is located 40 lks. W. of spring, course S.

78.60 Sidehill drain, course SW.

82.90 The 1/4 sec. cor. of secs. 27 and 34.

From the 1/4 sec. cor. of secs. 34 and 35.

N. 88° 47' W., along the E. and W. center line of sec. 34.

Descend steep W. slope.

18.00 Over nearly level bench land.

20.07 Point for the C-E 1/16 sec. cor. of sec. 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{c} \text{T2N R1E} \\ \text{C} \frac{\text{S } 34}{\text{E } 1/16} \text{C} \end{array}$$

1967

31.00 Descend W. slope.

40.14 The C 1/4 sec. cor. of sec. 34.

59.85 Point for the C-W 1/16 sec. cor. of sec. 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.

$$\begin{array}{c} \text{T2N R1E} \\ \text{C} \frac{\text{S } 34}{\text{W } 1/16} \text{C} \end{array}$$

1967

69.40 Foot trail, bears NE. and SW.

73.80 Kenney Creek, 5 lks. wide, 4 ins. deep, course SW.

75.20 Jeep road, bears NE. and SW.; ascend steep E. slope.

78.00 Along gentle S. slope.

79.56 The 1/4 sec. cor. of secs. 33 and 34.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

CHAINS	
	From the C-E 1/16 sec. cor. of sec. 34. N. 0° 21' W., along the N. and S. center line of t of sec. 34.
18.50	Kenney Creek, 5 lks. wide, 4 ins. deep, course SW.; ascend S. slope.
20.60	Point for the NE 1/16 sec. cor. of sec. 34, at the section with the E. and W. center line of the NE¼. Set an iron post, 30 ins. long, 2½ ins. diam., 24 the ground, with brass cap mkd. T2N R1E S 34 NE 1/16 1967
41.20	The point for the E 1/16 sec. cor. of secs. 27 and From the point for the N 1/16 sec. cor. of secs. 34 35. N. 89° 18' W., along the E. and W. center line of sec. 34. Descend W. slope.
13.50	Kenney Creek, 6 ins. wide, 4 ins. deep, course SW.; ascend along SW. slope.
20.03	The NE 1/16 sec. cor. of sec. 34.
40.06	The C-N 1/16 sec. cor. of sec. 34. From the E 1/16 sec. cor. of secs. 3 and 34, on the boundary of the township, heretofore described. N. 0° 21' W., along the N. and S. center line of the of sec. 34. Ascend steep SW. slope.
33.50	Foot trail, bears E. and W.
41.72	The C-E 1/16 sec. cor. of sec. 34. From the C-W 1/16 sec. cor. of sec. 34. N. 0° 40' W., along the N. and S. center line of the of sec. 34.

Subdivision of Certain Sections Within
Township 2 North, Range 1 East
Salt Lake Meridian, Utah

129

CHAINS

- 5.20 Kenney Creek, 5 lks. wide, 6 ins. deep, course SW.; ascend steep S. slope.
- 20.23 Point for the NW 1/16 sec. cor. of sec. 34, at the intersection with the E. and W. center line of the NW $\frac{1}{4}$.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R1E
S 34
NW 1/16
- 1967
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 40.46 The point for the W 1/16 sec. cor. of secs. 27 and 34.
-
- From the C-N 1/16 sec. cor. of sec. 34.
- N. 89° 18' W., along the E. and W. center line of the NW $\frac{1}{4}$ of sec. 34.
- Descend along S. slope through dense undergrowth.
- 19.84 The NW 1/16 sec. cor. of sec. 34.
- 39.68 The N 1/16 sec. cor. of secs. 33 and 34.

General Description

The land encompassed in this survey is very mountainous, being a part of the west slope of the Wasatch Mountain Range. The soil is rocky, comprised of a quartzite formation and is covered with a dense growth of oak and maple brush. There are patches of pine and spruce trees on the north slope of some of the higher ridges.

The area surveyed is located 6 miles north of Salt Lake City, and east of Bountiful, Utah.

Numerous small streams which include Mill Creek, Holbrook Creek, Ward and Parrish Creeks, flow westerly towards the Great Salt Lake.

Skyline Drive, an improved U. S. Forest Service Road, traverses from Bountiful to the crest of the Wasatch Range, through the middle of the township.

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
CHARLES R. BETTS	SURVEYING AID
BILLY J. BOGART	SURVEYING AID
DON L. NEW	SURVEYING AID
EDDIE M. PITCHER	SURVEYING AID
LEWIS R. WILCOX	SURVEYING AID
ERIC R. BUNDERSON	SURVEYING AID
GREG C. JENSEN	SURVEYING AID
MORRIS E. BLACKBURN	SURVEYING AID
JAMES C. HENDRICKSON	SURVEYING AID
ROBERT N. SORENSON	SURVEYING AID
BRADFORD D. PETERSON	SURVEYING AID
WALTER G. BOHNET, JR.	SURVEYING AID
DONALD J. STATHIS, JR.	SURVEYING AID
GAYLE O. MEACHUM	SURVEYING AID
RAY J. OWENS	SURVEYING AID
WILLIAM S. ROSS	SURVEYING AID
DAVID L. SCHOEDER	SURVEYING AID
BILLY L. SHAW	SURVEYING AID
TERRY S. DABEL	SURVEYING AID
RODNEY J. BUSK	SURVEYING AID
DOUGLAS C. TAPIA	SURVEYING AID
DELBERT B. PIERCE	SURVEYING AID

Blank

Page

Blank

Page

R595

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

135

Ashley National Forest

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 2 NORTH, RANGE 20 EAST, SALT LAKE MERIDIAN

TOWNSHIP 2 NORTH, RANGE 21 EAST, SALT LAKE MERIDIAN

TOWNSHIP 2 NORTH, RANGE 23 EAST, SALT LAKE MERIDIAN

TOWNSHIP 3 NORTH, RANGE 20 EAST, SALT LAKE MERIDIAN

TOWNSHIP 3 NORTH, RANGE 21 EAST, SALT LAKE MERIDIAN

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 1961, approved February 16, 1961,

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated June 23, 1971.

Survey commenced July 26, 1971

INDEX DIAGRAM

Location

Range

1	2	3	4	5	6
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 2 N. R. 20 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 2 N. R. 21 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 2 N. R. 23 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 3 N. R. 20 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24 18
30	29	28	18 27	26	25
31	32	33	34	35	36 17

Tp. 3 N. R. 21 E. Mer. Salt Lake

18				26	24
				26	23 ¹⁷ 23
				25	
				25	25 23 23
				24	22
		23 26	28	24	22
31	21	27	27	20 20 20	21 36 19 18

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forsst Service lands, situated in the Ashley National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

- T. 2 N., R. 20 E., Salt Lake Meridian, 15° 45' E.
- T. 2 N., R. 21 E., Salt Lake Meridian, 15° 45' E.
- T. 2 N., R. 23 E., Salt Lake Meridian, 15° 40' E.
- T. 3 N., R. 20 E., Salt Lake Meridian, 15° 55' E.
- T. 3 N., R. 21 E., Salt Lake Meridian, 15° 50' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 20 E., Salt Lake Meridian, Utah

Township 2 North, Range 20 East, Salt Lake Meridian, is located within the Ashley National Forest. The following corner was established by John R. Stewart in 1906.

At the ¼ sec. cor. of secs. 1 and 2, marked with a limestone, 20x8x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R20E
 ¼
 S2|S1
 1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on rocky NW. slope of hill, in scattered cedar growth.

T. 2 N., R. 21 E., Salt Lake Meridian, Utah

Township 2 North, Range 21 East, Salt Lake Meridian, is located within the Ashley National Forest. The following corners were established by Scott P. Stewart in 1906.

At the ¼ sec. cor. of secs. 1 and 2, marked with a sandstone, 24x10x4 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees

A pine, 9 ins. diam., bears N. 62° E., 17 lks. dist., mkd. ¼ S 1 BT.

A pine, 7 ins. diam., bears N. 53° W., 40 lks. dist., mkd. ¼ S 2 BT.

At the cor. point

Remonumentation of Corners in
T. 2 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T2N R21E
 $\frac{1}{4}$
S2|S1
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on S. slope, 50 lks. dist., N. of draw that drains W. In dense cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, marked with a sandstone, 20x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing trees

A yellow pine, 18 ins. diam., bears S. 72° E., 57 lks. dist., mkd. $\frac{1}{4}$ S 11 BT.

A yellow pine, 17 ins. diam., bears N. 46° W., 85 lks. dist., mkd. $\frac{1}{4}$ S 10 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E
 $\frac{1}{4}$
S10|S11
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on N. slope, 60 lks. dist. N. of top of ridge that bears E. and W. In scattered pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, marked with a sandstone, 17x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face, from which the remains of the original bearing tree

A pinon pine, 12 ins. diam., bears N. 52° W., 54 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E
 $\frac{1}{4}$
S2
S11
1971

Deposit the original cor. stone alongside the iron post.

Remonumentation of Corners in
T. 2 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on gentle E. slope, 150 lks. dist. W. of small stream, 5 lks. wide, 2 ins. deep, that flows S. In cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a sandstone, 18x12x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing tree:

A pinon pine, 8 ins. diam., bears S. 42° E., 97 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E

$\frac{1}{4}$

S3|S2

1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on gentle S. slope, in thick cedar and pinon growth.

At the cor. of secs. 15, 16, 21 and 22, marked with a sandstone, 24x13x6 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges, 2N on N. face and R21E on SE. face, from which the remains of the original bearing trees

A yellow pine, 25 ins. diam., bears N. 70° E., 27 lks. dist., mkd. T2N R21E S15 BT.

A yellow pine, 14 ins. diam., bears S. 32° E., 91 lks. dist., mkd. T2N R21E S22 BT.

A yellow pine, 16 ins. diam., bears S. 49° W., 188 lks. dist., mkd. T2N R21E S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E

S16|S15

S21|S22

1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on gentle E. slope. In thick pine growth.

Remonumentation of Corners in
T. 2 N., R. 21 E., Salt Lake Meridian Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, marked with a sandstone, 24x10x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing trees

A yellow pine, 18 ins. diam., bears N. 64° E.,
168 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A yellow pine, 20 ins. diam., bears S. 64° W.,
125 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone to brass cap mkd.

T2N R21E

$\frac{1}{4}$ $\frac{S15}{S22}$

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle W. slope, 50 lks. dist. E. of bottom of draw that drains N. In scattered pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, marked with a sandstone, 20x9x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing trees

A yellow pine, 20 ins. diam., bears N. 66° E.,
212 lks. dist., mkd. $\frac{1}{4}$ S16 BT. (Record, N. 60° E.,
209 lks. dist.)

A yellow pine, 28 ins. diam., bears N. 59° W.,
112 lks. dist., mkd. $\frac{1}{4}$ S15 BT. (Record, N. 63° W.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with a steel fence post alongside. Brass cap mkd.

T2N R21E

$\frac{1}{4}$ S16|S15

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NE. slope in scattered pine growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a sandstone, 22x9x5 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edge, from which the remains of the original bearing tree

A yellow pine, 20 ins. diam., bears N. 4 $\frac{1}{2}$ ° E.,
174 lks. dist., mkd. T2N R21E S10 BT.

At the cor. point

Remonumentation of Corners in
T. 2 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone to brass cap mkd.

T2N R21E
S9 | S10
S16 | S15
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling grassy S. slope in scattered pine growth.

At the ¼ sec. cor. of secs. 9 and 10, marked with a sandstone, 24x12x9 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T2N R21E
¼
S9 | S10
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land in sage, no timber.

At the cor. of secs. 3, 4, 9 and 10, marked with a sandstone, 19x8x8 ins., firmly set and plainly mkd. with 5 notches on the S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T2N R21E
S4 | S3
S9 | S10
1971

from which

A fir, 11 ins. diam., bears S. 46° W., 94 lks.
dist., mkd. T2N R21E S9 BT.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep rocky N. slope in dense underbrush.

At the ¼ sec. cor. of secs. 3 and 10, marked with a sandstone, 16x11x6 ins., firmly set and plainly mkd. ¼ on N. face.

Remonumentation of Corners in
T. 2 N. R. 21 E. Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E
 $\frac{S3}{\frac{1}{4} S10}$
 1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on N. slope, 250 lks. dist. S. of draw that drains E. In sage, no timber.

At the ¼ sec. cor. of secs. 16 and 17, marked with a sandstone, 20x9x7 ins. firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees

A yellow pine, 34 ins. diam., bears S. 80° E., 93 lks. dist., mkd. ¼ S16 BT.

A yellow pine, 29 ins. diam., bears S. 33° 45' W., 143 lks. dist., mkd. ¼ S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E
 $\frac{1}{4}$
 S17 | S16
 1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on rolling land in moderately thick pine growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a sandstone, 20x10x8 ins., firmly set and plainly mkd. with 4 notches on the S and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Brass cap mkd.

T2N R21E
 $\frac{S8 | S9}{S17 | S16}$
 1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land, 70 lks. dist. S. of small draw that drains E. In sage, no timber.

Remonumentation of Corners in
T. 2 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, marked with a
sandstone, 18x9x9 ins., firmly set and plainly mkd. $\frac{1}{4}$
to N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground to solid rock and in a mound of stone, 4 ft.
base to brass cap mkd.

T2N R21E
 $\frac{1}{4}$ $\frac{S9}{S16}$
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on S. slope of hill, in lightly
scattered pine and cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked with a
sandstone, 15x9x5 ins., firmly set and plainly mkd. $\frac{1}{4}$
to W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N R21E
 $\frac{1}{4}$
S8|S9
1971

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, to W.

The cor. is located on nearly level land about $6\frac{1}{2}$ chs.
dist. E. of trail road that bears N. and S. In sage,
no timber.

At the cor. of secs. 4, 5, 8 and 9, marked with a
sandstone, 14x5x5 ins., firmly set and plainly mkd. with
5 notches on the S. and 4 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to solid rock and in a mound of stone, 4 ft.
base to brass cap mkd.

T2N R21E
S5|S4
S8|S9
1971

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located on steep rocky N. slope. No timber.

Remonumentation of Corners in
T. 2 N. R. 21 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on rolling land, in scattered pine growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a sandstone, 18x9x9 ins., firmly set and plainly mkd. with 5 notches on the E. and 4 on the S. edge

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R21E
S7 | S8
S18 | S17
1971

Deposit the original cor. stone in mound alongside the iron post.

From which

A yellow pine, 16 ins. diam., bears S. 46° W.,
106 lks. dist., mkd. T2N R21E S18 BT.

The cor. is located on nearly level land in slightly scattered pine growth.

At the ¼ sec. cor. of secs. 8 and 17, marked with a sandstone, 18x11x9 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T2N R21E
¼ S8
¼ S17
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling E. slope. In sage, no timber.

At the ¼ sec. cor. of secs. 7 and 8, marked with a sandstone, 22x9x8 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing tree

A cedar, 9 ins. diam., bears N. 56° E., 80 lks.
dist., mkd. ¼ S 8 BT.

A cedar, 17 ins. diam., bears N. 53° W., 37 lks.
dist., mkd. ¼ S 7 BT.

At the cor. point

Remonumentation of Corners in
T. 2 N., R. 21 E., S. 5, 6, 7, 8, 1971

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and raise a mound of stone, 3½ ft. base, 1½ ft. high, to W. Brass cap mkd.

T2N R21E

½
S7|S8
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SE. slope in scattered cedar and pinon growth.

At the cor. of secs. 5, 6, 7 and 8, as determined from the remains of the original bearing trees

A cedar, 12 ins. diam., bears S. 59° E., 71 lks. dist., mkd. T2N R21E S8 BT.

A pinon pine, 10 ins. diam., bears S. 53° W., 78 lks. dist., mkd. T2N R21E S7 BT.

A pinon pine, 12 ins. diam., bears N. 23° W., 75 lks. dist., mkd. T2N R21E S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to W. Brass cap mkd.

T2N R21E

S6|S5
S7|S8
1971

The cor. is located on steep SW. slope of hill in scattered cedar and pinon growth.

At the ¼ sec. cor. of secs. 5 and 8, marked with a sandstone, 18x8x5 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T2N R21E

¼ — S5
S8
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on NW. slope of hill, 150 lks. dist. E. of draw that drains N. 65° E. In scattered cedar growth.

Remonumentation of Corners in

T. 2 N., R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, marked with a sandstone, 22x12x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face, from which the remains of the original bearing trees

A pinon pine, 21 ins. diam., bears S. 2° E., 59 lks. dist., mkd. $\frac{1}{4}$ S19 BT.

A cedar, 9 ins. diam., bears N. 40° W., 46 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R21E
 $\frac{1}{4}$ $\frac{S18}{S19}$
 1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located 70 lks. dist. N. of rim of bench that bears E. and W. In thick cedar, pinon and mahogany growth.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked with a sandstone, 18x7x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T2N R21E
 $\frac{1}{4}$ $\frac{S7}{S18}$
 1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep N. slope. No timber.

T. 2 N., R. 23 E., Salt Lake Meridian, Utah

Township 2 North, Range 21 East, Salt Lake Meridian, is located within the Ashley National Forest. The following corners were established by Scott P. Stewart in 1906.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, marked with a sandstone, 20x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Remonumentation of Corners in
T. 2 N., R. 23 E., Salt lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T2N R23E
¼
S2|S1
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SW. slope of hill, 2 chs. dist. N. of draw that drains N. 70° W. In sage, no timber.

At the ¼ sec. cor. of secs. 11 and 14, marked with a sandstone, 18x10x7 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T2N R23E
¼ $\frac{S11}{S14}$
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep rocky S. slope, in moderate cedar and pinon growth.

At the ¼ sec. cor. of secs. 2 and 3, marked with a quartzite stone, 18x8x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T2N R23E
¼
S3|S2
1971

Deposit the original cor. stone alongside the iron post.

From which

A yellow pine, 11 ins. diam., bears N. 5° E., 74 lks. dist., mkd. ¼ S2 BT.

The cor. is located on rolling S. slope in scattered cedar and pinon growth.

Remonumentation of Corners in
T. 2 N. R. 23 E., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 3, 4, 9 and 10, marked with a sandstone, 18x11x4 ins., firmly set and plainly mkd. with 5 notches on S. and 3 on E. edge, from which the remains of the original bearing trees

A cedar, 11 ins., diam., bears N. 38° E., 32 lks. dist., mkd. T2N R23E S3 BT.

A pinon pine, 10 ins. diam., bears S. 78° E., 34 lks. dist., mkd. T2N R23E S10 BT. (Record, N. 14° E., 34 lks. dist.)

A pinon pine, 9 ins. diam., bears S. 6° W., 27 lks. dist., mkd. T2N R23E S9 BT. (Record, S. 11° W.)

A pinon pine, 9 ins. diam., bears N. 42° W., 50 lks. dist., mkd. T2N R23E S4 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T2N R23E
S4|S3
S9|S10
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on E. slope of hill in dense cedar and pinon growth.

At the ¼ sec. cor. of secs. 3 and 4, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. ½ on W. face, (record, 14x10x4 ins.) from which the remains of the original bearing tree

A yellow pine, 8 ins. diam., bears N. 18° E., 39 lks. dist., mkd. ¼ S3 BT. (Record, N. 24° 30' E.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T2N R23E
¼
S4|S3
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope. In thick cedar, pinon and yellow pine growth.

At the ¼ sec. cor. of secs. 4 and 9, marked with a quartzite stone, 18x8x8 ins., firmly set and plainly mkd. ½ on N. face, from which the remains of the original bearing trees

Remonumentation of Corners in
T. 2 N., R. 23 E., Salt Lake Meridian, Utah

CHAINS

A pinon pine, 5 ins. diam., bears North 26 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

A pinon pine, 5 ins. diam., bears S. 25° W., 36 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T2N R23E
 $\frac{1}{4}$ $\frac{S4}{S9}$
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on SW. slope of hill in dense cedar and pinon growth.

At the cor. of secs. 29, 30, 31 and 32, marked with a sandstone, 23x13x5 ins., (record, 16x10x5 ins.) firmly set and plainly mkd. with 5 notches on the E. and 1 on the S. edge, from which the remains of the original bearing trees

A yellow pine, 26 ins. diam., bears S. 48° 15' W., 156 lks. dist., mkd. T2N R23E S31 BT.

A yellow pine, 20 ins. diam., bears N. 7° 08' W., 207 lks. dist., mkd. T2N R23E S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T2N R23E
 $\frac{S30}{S31} | \frac{S29}{S32}$
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep NW. slope of hill in thick pine and underbrush.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a sandstone, 20x17x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face, from which the remains of the original bearing trees

A yellow pine, 18 ins. diam., bears S. 60° 10' E., 94 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

A yellow pine, 29 ins. diam., bears N. 30° 16' W., 96 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

Remonumentation of Corners in

T2N R23E S29 & S32 Sec. 29 & 30, T2N R23E S29 & S32 Sec. 29 & 30, T2N R23E S29 & S32 Sec. 29 & 30, Utah

CHAINS

T2N R23E

 $\frac{1}{4}$ $\frac{S29}{S32}$

1971

Deposit the original cor. stone alongside the iron post.

From which

A yellow pine, 16 ins. diam., bears N. 16° W.,
114 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

The cor. is located on gentle W. slope of hill in pine
and cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, marked with a
sandstone, 22x12x14 ins. firmly set and plainly mkd. $\frac{1}{4}$
on W. face, from which the remains of the original
bearing trees

A yellow pine, 13 ins. diam., bears N. 62° 20' E.,
86 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins.
in the ground to solid rock and in a mound of stone, 3 $\frac{1}{2}$
ft. base to brass cap mkd.

T2N R23E

 $\frac{1}{4}$ S30|S29

1971

Deposit the original cor. stone in mound alongside the
iron post.

From which

A yellow pine, 13 ins. diam., bears N. 46° W.,
42 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S30 BT.

The cor. is located on gentle N. slope in lightly
scattered pine and cedar growth.

At the cor. of secs. 19, 20, 29 and 30, marked with a
sandstone, 24x12x6 ins., firmly set and plainly mkd. with
5 notches on the E. and 2 on the S. edges, from which
the remains of the original bearing trees

A yellow pine, 20 ins. diam., bears N. 16° E.,
93 lks. dist., mkd. T2N R23E S20 BT.

A yellow pine, 20 ins. diam., bears S. 56° 20' E.,
24 lks. dist., mkd. T2N R23E S29 BT.

A yellow pine, 24 ins. diam., bears S. 72° W.,
149 lks. dist., mkd. T2N R23E S30 BT.

A yellow pine, 30 ins. diam., bears N. 26° W.,
119 lks. dist., mkd. T2N R23E S19 BT. (Record,
N. 32° 20' W.)

At the cor. point

Remonumentation of Corners in
T. 2 N. R. 23 E. Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T2N R23E
S19|S20
S30|S29
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SE. slope of hill in thick pine growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a sandstone, 18x9x7 ins., firmly set and plainly mkd. with 5 notches on the E. and 4 on the S. edge, from which the remains of the original bearing trees

A pinon pine, 8 ins. diam., bears N. 67° 30' E., 31 lks. dist., mkd. T2N R23E S8 BT. (Record, N. 60° 30' E.).

A pinon pine, 8 ins. diam., bears S. 11° E., 78 lks. dist., mkd. T2N R23E S17 BT.

A pinon pine, 15 ins. diam., bears S. 57° W., 67 lks. dist., mkd. T2N R23E S18 BT.

A pinon pine, 7 ins. diam., bears N. 44° 30' W., 39 lks. dist., mkd. T2N R23E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T2N R23E
S7 |S8
S18|S17
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on NW. slope of spur in thick cedar and pinon growth.

At the ¼ sec. cor. of secs. 5 and 6, marked with a sandstone, 24x10x8 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees

A pinon pine, 20 ins. diam., bears N. 65° E., 17 lks. dist., mkd. ¼ S5 BT. (Record, N. 60° E.)

A pinon pine, 18 ins. diam., bears S. 76° W., 18 lks. dist., mkd. ¼ S6 BT. (Record, S. 57° W.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

Remonumentation of Corners in
T. 3 N., R. 20 E., Salt Lake Meridian, Utah

CHAINS

T2N R23E
¼
S6|S5
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep broken S. slope of hill, 2 chs. dist. N. of small draw that drains S. 80° W. In thick cedar and pinon growth.

T. 3 N., R. 20 E., Salt Lake Meridian, Utah

Township 3 North, Range 20 East, Salt Lake Meridian, is located partially within the Ashley National Forest. The following corners were established by John R. Stewart in 1906.

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., marked with a sandstone, 18x10x4 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edge, from which the remains of the original bearing trees

A cedar, 10 ins. diam., bears N. 11° 45' E., 67 lks. dist., mkd. T3N R20E S36 BT.

A cedar, 8 ins. diam., bears S. 80° E., 58 lks. dist., mkd. T2N R20E S1 BT.

A cedar, 6 ins. diam., bears S. 8° W., 66 lks. dist., mkd. T2N R20E S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T3N R20E
S35|S36
S2 |S1
T2N R20E
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on N. slope of hill in scattered cedar growth.

At the ¼ sec. cor. of secs. 24 and 25, marked with a sandstone, 11x11x7 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Remonumentation of Corners in

T. 3 N., R. 21 E., Salt Lake Meridian, Utah

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R20E
S24
S25
1971

Deposit the original cor. stone alongside the iron post.
The cor. is located on gentle N. slope in sage, no timber.

At the ¼ sec. cor. of secs. 27 and 28, marked with a limestone, 18x12x4 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T3N R20E
S28|S27
1971

Deposit the original cor. stone alongside the iron post.
The cor. is located on nearly level land in sage, no timber.

T. 3 N., R. 21 E., Salt Lake Meridian, Utah

Township 3 North, Range 21 East, Salt Lake Meridian, is located within the Ashley National Forest. The following corners were established by Scott P. and John R. Stewart in 1906.

At the ¼ sec. cor. of secs. 1 and 36, on the S. bdy. of the Twp., marked with a quartzite stone, 18x12x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R21E
S36
S1
T2N R21E
1971

Deposit the original cor. stone alongside the iron post.
The cor. is located on steep NE. slope of hill, about 2 chas. dist. W. of small draw that drains N. 45° W. In lightly scattered pinon and cedar growth.

Remonumentation of Corners in
T. 3 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., marked with a red conglomerate stone, 16x12x8 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to brass cap mkd.

T3N R21E
S35|S36
S2 |S1
T2N R21E
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep rocky NW. slope of hill in scattered pinon and cedar growth.

At the ¼ sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., marked with a sandstone, 16x14x4 ins., firmly set and plainly mkd. ¼ on N. face, from which the remains of the original bearing trees

A cedar, 14 ins. diam., bears N. 16° 25' E.,
119 lks. dist., mkd. ¼ S35 BT.

A cedar, 8 ins. diam., bears S. 59° 10' W.,
187 lks. dist., mkd. ¼ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base 1½ ft. high, to N. Brass cap mkd.

T3N R21E
¼ S35
S2
T2N R21E
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle W. slope. In thick cedar and pinon growth.

At the ¼ sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. ¼ on N. face, from which the remains of the original bearing trees

A cedar, 14 ins. diam., bears S. 54° 42' E., 25
lks. dist., mkd. ¼ S3 BT.

A cedar limb, 8 ins. diam., bears N. 65° 10' W.,
9 lks. dist., mkd. ¼ S34 BT.

At the cor. point

Remonumentation of Corners in
T. 3 N., R. 21 E., S. 33, 34, 33 and 34, Tp. 1

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and raise a mound of stone, 3½ ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R21E

$$\begin{array}{r} \text{S34} \\ \frac{1}{4} \text{S3} \end{array}$$

T3N R21E

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on SE. slope of hill, in thick cedar and pinon growth.

At the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T3N R21E

$$\begin{array}{r} \text{S33} | \text{S34} \\ \text{S4} | \text{S3} \end{array}$$

T2N R21E

1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on steep NE. slope of hill in sage, no timber.

At the ¼ sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp., marked with a limestone, 18x12x4 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R21E

$$\begin{array}{r} \text{S33} \\ \frac{1}{4} \text{S4} \end{array}$$

T2N R21E

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep grassy N. slope, no timber.

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge, from which the remains of the original bearing trees

A cedar, 12 ins. diam., bears N. 26° 40' E., 18 lks. dist., mkd. T3N R21E S32 BT.

A cedar, 10 ins. diam., bears S. 60° E., 67 lks. dist., mkd. T2N R21E S5 BT.

A cedar, 6 ins. diam., bears S. 15° W., 15 lks. dist., mkd. T2N R21E S6 BT. (Record, S. 19° W., 18 lks. dist.)

A cedar, 10 ins. diam., bears N. 76° 30' W., 52 lks. dist., mkd. T3N R21E S31 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R21E
S31|S32
S6 |S5
T2N R21E
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on S. slope of hill in thick cedar and pinon growth.

At the ¼ sec. cor. of secs. 35 and 36, marked with a sandstone, 15x10x4 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees

A cedar limb, 6 ins. diam., bears N. 69° E., 33 lks. dist., mkd. ¼ S36 BT.

A cedar, 20 ins. diam., bears N. 59° W., 39 lks. dist., mkd. ¼ S35 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross on sandstone boulder and in a mound of stone, 4 ft. base to brass cap mkd.

T3N R21E
¼
S35|S36
1971

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on rocky NW. slope of hill in moderate cedar growth.

Remonumentation of Corners in

T. 3 N. R. 21 E. S. 25 and 26, 23 and 24, 24 and 25.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked with a sandstone, 19x8x3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T3N R21E

$\frac{1}{4}$ S25
S36

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on N. slope of hill in sage and very lightly scattered cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, marked with a sandstone, 16x12x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E

$\frac{1}{4}$
S26|S25

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land in sage, no timber.

At the cor. of secs. 23, 24, 25 and 26, marked with a limestone, 15x8x7 ins., firmly set and plainly mkd. with 2 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with steel fence post alongside. Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3N R21E

S23|S24
S26|S25

1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling bench land in sage, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, marked with a sandstone, 16x9x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap

T3N R21E
¼ $\frac{S24}{S25}$
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope in grass and scattered mesquite growth.

At the cor. of secs. 13, 14, 23 and 24, marked with a cobblestone, 16x10x7 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E
S14|S13
S23|S24
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on N. slope in grass and sage, no timber.

At the ¼ sec. cor. of secs. 13 and 24, marked with a quartzite stone, 18x14x5 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T3N R21E
¼ $\frac{S13}{S24}$
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on N. edge of bench in sage, no timber.

At the ¼ sec. cor. of secs. 13 and 24, marked with a shalestone, 24x12x4 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian Utah

CHAINS

A cedar, 5 ins. diam., bears S. 79° 30' E., 57 lks. dist., mkd. $\frac{1}{4}$ S13 BT. (Record, S. 79° 30' E., 60 lks. dist.)

A cedar, 8 ins. diam., bears S. 88° W., 40 lks. dist., mkd. $\frac{1}{4}$ S14 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock and in a collar of stone to brass cap mkd.

T3N R21E

$\frac{1}{4}$
S14|S13
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep N. slope in scattered cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked with a sandstone, 14x9x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E

$\frac{1}{4}$ $\frac{S26}{S35}$
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on barren W. slope, 150 lks. dist. E. of dry wash that drains N.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, marked with a sandstone, 16x11x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E

$\frac{1}{4}$
S27|S26
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on grassy N. slope in sage, no timber.

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E
S22|S23
S27|S26
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope, 130 lks. dist. N. of shoreline on Flaming Gorge Reservoir that bears E. and W. and 100 lks. dist. S. of top of small ridge that bears E. and W. In sage, no timber.

At the ¼ sec. cor. of secs. 23 and 26, marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R21E
¼ S23
S26
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on grassy S. slope, no timber.

At the ¼ sec. cor. of secs. 22 and 23, marked with a sandstone, 18x10x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with steel fence post alongside. Brass cap mkd.

T3N R21E
¼
S22|S23
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope in sage, no timber.

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian

CHAINS

At the cor. of secs. 14, 15, 22 and 23, marked with a sandstone, 15x10x4 ins., firmly set and plainly mkd. with 3 notches on the S. and 2 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with a steel fence post alongside. Brass cap mkd.

T3N R21E
S15|S14
S22|S23
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on E. slope, 15 lks. dist. W. of waters edge, Flaming Gorge Reservoir that bears N. and S. In sage, no timber.

Athe ¼ sec. cor. of secs. 14 and 15, marked with a sandstone, 15x12x10 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to W. Brass cap mkd.

T3N R21E
¼
S15|S14
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope, 125 lks. dist. S. of dirt road that bears E. and W. In sage, no timber.

At the closing cor. of secs. 14 and 15, on the N. bdy. of T. 3 N., R. 21 E., marked with a sandstone, 16x12x9 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the E. edge, CC on S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to S. Brass cap mkd.

S15|S14
C|C
T3N R21E
UTAH
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on rocky S. slope in scattered cedar and pinon growth.

Remonumentation of Corners in
T. 3 N. R. 21 E. Salt Lake Meridian. Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 33 and 34, marked with a sandstone, 15x9x5, firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3N R21E
 $\frac{1}{4}$
S33|S34
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep E. slope, 60 lks. dist. W. of draw that drains N., in lightly scattered cedar growth.

At the SE. cor. of sec. 28, marked with a sandstone, 15x10x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T3N R21E
S28|
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on SE. slope of small spur projecting S. 20° W., in lightly scattered cedar growth.

At the closing cor. of secs. 33 and 34, on the S. bdy. of sec. 27, marked with a sandstone, 20x8x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edge, CC on S. face, from which the remains of the original bearing tree

A cedar, 20 ins. diam., bears S. 43° E., 147 lks. dist., mkd. T3N R21E S34 BT. (Record, S. 43° E., 158 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to S. Brass cap mkd.

T3N R21E
S27
S33|S34
C|C
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope in scattered cedar and pinon growth.

Remonumentation of Corners in
T. 3 N., R. 21 E., Salt Lake Meridian, Utah

CHAINS

At the closing cor. of secs. 27 and 33, on the E. bdy. of sec. 28, marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edge, CC on E. face, from which the remains of the original bearing tree

A cedar, (dead) 20 ins. diam., bears N. 73° 30' E.,
55 lks. dist., mkd. T3N R21E S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and raise a mound of stone, 4 ft. base, 2 ft. high, to E. Brass cap mkd.

T3N R21E
S28 | S27
 | S33 CC
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling S. slope in scattered cedar and pinon growth.

At the S. ¼ sec. cor. of sec. 28, marked with a sandstone, 11x8x7 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3N R21E
¼ S28
1971

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NW. slope in sage, no timber.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 19 61, (I) ~~(We)~~ have remonumented corners in the following listed townships:

- Township 2 North, Range 20 East, Salt Lake Meridian
- Township 2 North, Range 21 East, " " "
- Township 2 North, Range 23 East, " " "
- Township 3 North, Range 20 East, " " "
- Township 3 North, Range 21 East, " " "

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 15, 1972
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date APR 10 1972

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in the following listed townships:

- T. 2 N., R. 20 E., Salt Lake Meridian
- T. 2 N., R. 21 E., " " "
- T. 2 N., R. 23 E., " " "
- T. 3 N., R. 20 E., " " "
- T. 3 N., R. 21 E., " " "

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

SEP 7 1976
(Date)

[Signature]
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

This is a true copy of the original field notes, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT Dixie National Forest

ORIGINAL
FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS IN

- TOWNSHIP 36 SOUTH, RANGE 1 EAST
- TOWNSHIP 32 SOUTH, RANGE 4 EAST
- TOWNSHIP 33 SOUTH, RANGE 4 EAST
- TOWNSHIP 32 SOUTH, RANGE 6 EAST
- TOWNSHIP 39 SOUTH, RANGE 6 WEST
- TOWNSHIP 32 SOUTH, RANGE 7 WEST
- TOWNSHIP 35 SOUTH, RANGE 8 WEST
- TOWNSHIP 36 SOUTH, RANGE 9 WEST
- TOWNSHIP 37 SOUTH, RANGE 9 WEST
- TOWNSHIP 37 SOUTH, RANGE 14 WEST
- TOWNSHIP 40 SOUTH, RANGE 15 WEST
- TOWNSHIP 37 SOUTH, RANGE 18 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 19 61, approved February 16, 1961

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated June 1, 1970.

Survey commenced June 2, 19 70

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S. R. 1 E. Mer. Salt Lake

6	5 ● 1	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 32 S. R. 4 E. Mer. Salt Lake

6	5 ● 11	4	3 ● 10	2 ● 8	1
7	8	9 ● 9	10 ● 10	11 ● 7	12
18	17	16	15	14	13
19	20	21	22	23 ● 6	24 ● 7
30	29	28	27	26 ● 4	25 ● 4
31	32	33	34	35 ● 5	36 ● 3
				3 ● 3	2 ● 2

Tp. 33 S. R. 4 E. Mer. Salt Lake

6	5	4	3	2 ● 12	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

175
175

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

176
178

INDEX TO SECTION CORNER MONUMENTS

Tp. 32 S. R. 6 E. Mer. Salt Lake

6	5	4	3	2	1	13
7	8	9	10	11	12	12
18	17	16	15	14	13	12
					14	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Tp. 39 S. R. 6 W. Mer. Salt Lake

6	5	4	3	2	1
		15			
7	8	9	10	11	12
18	17	16	15	14	13
		14			
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 32 S. R. 7 W. Mer. Salt Lake

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
16	30	29	28	27	25	
16	16					
15						
15	31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 35 S. R. 8 W. Mer Salt Lake

6	5 18	4	17 3 17	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S. R. 9 W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12 18 19
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 37 S. R. 9 W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10 20	11	12
18	17	16	15 19	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 37 S. R. 14 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21 ● 21	22	23	24
30	29	28 ● 20 ● 21	27	26	25
31	32	33	34	35	36

Tp. 40 S. R. 15 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	22 ● 10	11	12
18	17	23 ● 23	15	14	13
19	20	22 ● 16	21 ●	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 37 S. R. 18 W. Mer. Salt Lake

6	5	4	3 ● 23	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Dixie National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 36 S., R. 1 E., Salt Lake Meridian, 15° 00' E.
 T. 32 S., R. 4 E., Salt Lake Meridian, 15° 00' E.
 T. 33 S., R. 4 E., Salt Lake Meridian, 15° 00' E.
 T. 32 S., R. 6 E., Salt Lake Meridian, 14° 55' E.
 T. 39 S., R. 6 W., Salt Lake Meridian, 15° 00' E.
 T. 32 S., R. 7 W., Salt Lake Meridian, 15° 20' E.
 T. 35 S., R. 8 W., Salt Lake Meridian, 15° 20' E.
 T. 36 S., R. 9 W., Salt Lake Meridian, 15° 20' E.
 T. 37 S., R. 9 W., Salt Lake Meridian, 15° 00' E.
 T. 37 S., R. 14 W., Salt Lake Meridian, 15° 20' E.
 T. 40 S., R. 15 W., Salt Lake Meridian, 15° 15' E.
 T. 37 S., R. 18 W., Salt Lake Meridian, 15° 30' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 36 S., R. 1 E., Salt Lake Meridian, Utah

Township 36 South, Range 1 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by William Lewman in 1894.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked with a sandstone, 18 x 8 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees

A pine, 20 ins. diam., bears S. 25° E., 132 lks.
 dist., mkd. T36S R1E $\frac{1}{4}$ S8 BT.

A pine, 22 ins. diam., bears N. 49° W., 50 lks.
 dist., mkd. T36S R1E $\frac{1}{4}$ S5 BT. (Dead on ground.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 36 S R 1 E
 $\frac{1}{4}$ $\frac{S 5}{S 8}$
 1970

from which

A pine, 10 ins. diam., bears N. 28° E., 52 lks.
 dist., mkd. $\frac{1}{4}$ S5 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of cor.

The cor. is located on top of spur projecting S. 45° E.
 scattered cedar and pine growth.

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

T. 32 S., R. 4 E., Salt Lake Meridian, Utah

Township 32 South, Range 4 East, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Frank T. Roberts in 1908.

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., marked with a conglomerate stone, 18 x 14 x 8 ins., firmly set and plainly mkd. with 5 notches on the W and 1 on E edge, from which the original bearing trees

A pine, 12 ins. diam., bears N. 44°45' E., 10 lks. dist., mkd. T32S R4E S36 BT.

A pine, 14 ins. diam., bears S. 47°30' E., 51 lks. dist., mkd. T33S R4E S1 BT.

A cedar, 10 ins. diam., bears S. 61°25' W., 23 lks. dist., mkd. T33S R4E S2 BT.

A pine, 12 ins. diam., bears N. 21°19' W., 58 lks. dist., mkd. T32S R4E S35 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T 32 S R 4 E
S 35 S 36
S 2 S 1
T 33 S R 4 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on W slope of hill. Approximately 6 chs. dist. E of cultivated land. In cedar and pinon growth.

At the ¼ sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., marked with a lava stone, 16 x 10 x 4 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing tree

A cedar, 35 ins. diam., bears S. 6°54' W., 60 lks. dist., mkd. T33S R4E ¼S2 BT. (Record, S. 6°54' W., 64 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 32 S R 4 E
¼ S 35
S 2
T 33 S R 4 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on gentle SW slope of hill. About 10 chs. dist. W of improved dirt road that bears North and South. In scattered cedar and pine growth.

At the cor. of secs. 2, 3, 34 and 35, on the S bdy. of the Tp., marked with a lava stone, 13 x 11 x 6 ins., firmly set and plainly mkd. with 4 notches on the W and 2 on the E edge, from which the original bearing tree

A pine, 20 ins. diam., bears N. 66°11' E., 265 lks. dist., mkd. T32S R4E S35 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 32 S R 4 E
S 34 | S 35
S 3 | S 2
T 33 S R 4 E
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located in nearly level clearing, with lightly scattered pine growth.

At the ¼ sec. cor. of secs. 35 and 36, marked with a trachyte stone, 16 x 15 x 4 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing trees

A cedar, 17 ins. diam., bears N. 23°30' E., 17 lks. dist., mkd. T32S R4E ¼S36 BT.

A pinon pine, 16 ins. diam., bears S. 38° 04' W., 45 lks. dist., mkd. T32S R4E ¼S35 BT. (Record, 4 lks.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 32 S R 4 E
¼
S 35 | S 36
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of cor.

The cor. is located on steep W slope of hill; 30 lks. dist. E of 4 strand fence line that bears N. 10° W and S. 10° E. About 5 chs. dist. E of cultivated field in thick cedar and pinon growth.

At the cor. of secs. 25, 26, 35 and 36, marked with a

Remonumentation of Corners in

T 32 S R 4 E 1/4 Sec. 25, T32S R4E S25 BT.

CHAINS

granite stone, 22 x 10 x 8 ins., firmly set and plainly mkd. with 1 notch on the S and E edges, from which the original bearing trees

A pine, 20 ins. diam., bears N. 86°25' E., 172 lks. dist., mkd. T32S R4E S25 BT.

A pine, 24 ins. diam., bears S. 1°15' E., 165 lks. dist., mkd. T32S R4E S36 BT.

A pine, 24 ins. diam., bears S. 82°12' W., 71 lks. dist., mkd. T32S R4E S35 BT. (Record, 11 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 32 S R 4 E
S 26 S 25
S 35 S 36
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on gentle S slope of hill. In thick oak and scattered pine growth.

At the ¼ sec. cor. of secs. 25 and 26, marked with a volcanic stone, 15 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing trees

A pine, 26 ins. diam., bears N. 75° E., 78 lks. dist., mkd. T32S R4E ¼S25 BT.

A pine, 28 ins. diam., bears S. 24° W., 37 lks. dist., mkd. T32S R4E ¼S26 BT. (Record, S. 19° E., 229 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E
¼
S 26 S 25
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located on top of small spur projecting S. 25° W. In thick pine growth.

At the cor. of secs. 23, 24, 25 and 26, marked with a sandstone, 20 x 14 x 12 ins., firmly set and plainly mkd. with 2 notches on the S and 1 on the E edge, from which the original bearing trees

Remonumentation of Corners in
T. 32 S., R. 4 E. Salt Lake Meridian, Utah

CHAINS

A pine, 20 ins. diam., bears N. 37° E., 12½ lks. dist., mkd. T32S R4E S24 BT.

A pine, 20 ins. diam., bears S. 68° E., 13 lks. dist., mkd. T32S R4E S25 BT.

A pine, 20 ins. diam., bears S. 55° W., 30 lks. dist., mkd. T32S R4E S26 BT.

A pine, 26 ins. diam., bears N. 8° W., 31 lks. dist., mkd. T32S R4E S23 BT.

There is no evidence of the original pine bearing trees called for at this cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E	
S 23	S 24
S 26	S 25
1970	

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base to brass cap.

The cor. is located on top of spur projecting S. In thick pine growth.

At the ¼ sec. cor. of secs. 34 and 35, marked with a granite stone, 15 x 6 x 5 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 32 S R 4 E	
¼	
S 34	S 35
1970	

Raise a mound of stone, 3 ft. base, 1½ ft. high W of cor.

From which

A large volcanic boulder, 12 x 8 x 4 ft. above ground bears N. 75°30' E., 185½ lks. dist., mkd. X B0.

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level clearing, and surrounded by scattered pine growth.

At the cor. of secs. 26, 27, 34 and 35, marked with a sandstone, 16 x 10 x 4 ins., firmly set and plainly mkd. with 2 notches on the E and 1 on the S edge, from which an original bearing tree

Remonumentation of Corners in

T. 32 S. R. 4 E. S. 26 & 35

R.A.N.S.

A pine, 32 ins. diam., bears N. $8^{\circ}30'$ E., 402 lks. dist., mkd. T32S R4E S26 BT. (Record, S. $87^{\circ}42'$ E., 482 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E
S 27 S 26
S 34 S 35
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base to brass cap.

The cor. is located on rolling benchland. In scattered pine and thick oak brush.

At the $\frac{1}{2}$ sec. cor. of secs. 26 and 35, marked with a volcanic stone, 17 x 12 x 7 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N face, from which the original bearing trees

A pine, 46 ins. diam., bears N. $80^{\circ}36'$ E., 290 lks. dist., mkd. T32S R4E $\frac{1}{2}$ S26 BT.

A pine, 42 ins. diam., bears S. $81^{\circ}07'$ E., 429 lks. dist., mkd. T32S R4E $\frac{1}{2}$ S35 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E
$\frac{1}{2}$ S 26
S 35
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located on nearly level benchland. About 5 chs. dist. W of small creek that drains S. 20° W. In scattered pine and oak brush.

At the cor. of secs. 22, 23, 26 and 27, marked with a conglomerate stone, 20 x 10 x 8 ins., firmly set and plainly mkd. with 2 notches on the E and S edges, from which the original bearing trees

A pine, 28 ins. diam., bears N. $2^{\circ}14'$ E., 38 lks. dist., mkd. T32S R4E S23 BT.

A pine, 34 ins. diam., bears S. $58^{\circ}10'$ E., 3 lks. dist., mkd. T32S R4E S26 BT.

A pine, 31 ins. diam., bears S. $32^{\circ}11'$ W., 62 lks. dist., mkd. T32S R4E S27 BT.

A pine, 32 ins. diam., bears N. $76^{\circ}31'$ W., 16 lks. dist., mkd. T32S R4E S22 BT.

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E
S 22 | S 23
S 27 | S 26
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap mkd.

The cor. is located on gentle SE slope of hill. Approximately 5 chs. dist. N of large steel pipe line that bears S. 35° E. and N. 35° W. In scattered pine growth.

At the ¼ sec. cor. of secs. 23 and 26, marked with a conglomerate stone, 15 x 7 x 4 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees

A pine, 22 ins. diam., bears N. 55°37' E., 49 lks. dist., mkd. T32S R4E ¼ S23 BT.

A pine, 26 ins. diam., bears S. 11° E., 110 lks. dist., mkd. T32S R4E ¼ S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 32 S R 4 E
¼ S 23
S 26
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located in small hollow, 3 chs. wide, that drains South. In scattered pine growth.

At the ¼ sec. cor. of secs. 10 and 11, marked with a granite stone, 18 x 6 x 5 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing trees

An aspen, 14 ins. diam., bears N. 17°09' W., 122 lks. dist., mkd. T32S R4E ¼ S10 BT. (Record, N. 31°48' W., 78 lks.)

An aspen, (dead) 10 ins. diam., bears N. 31°48' E., 78 lks. dist., mkd. T32S R4E ¼ S11 BT. (Record, N. 17°09' E., 122 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of Corners in
T. 32 S. R. 4 E. Salt Lake Meridian

CHAINS

T 32 S R 4 E
 $\frac{1}{4}$
 S 10 | S 11
 1970

Deposit the original cor. stone alongside the iron post.

From which

An aspen, 10 ins. diam., bears N. 58° E., 30 lks.
 dist., mkd. T32S R4E $\frac{1}{4}$ S11 BT.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on top of small rise. In thick aspen growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a lava stone, 16 x 14 x 6 ins., firmly set and plainly mkd. with 5 notches on the S and 2 on the E edge, from which the original bearing trees

An aspen, 14 ins. diam., bears N. 69° E., 46 lks.
 dist., mkd. T32S R4E S2 BT. (Record, N. 62°05' E., 43 lks.)

An aspen, 14 ins. diam., bears N. 46°46' W.,
 70 lks. dist., mkd. T32S R4E S3 BT. (Record,
 N. 46°46' W., 74 lks.)

There is no remaining evidence of the other 2 original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 32 S R 4 E
 $\frac{1}{4}$
 S 3 | S 2
 S 10 | S 11
 1970

from which

An aspen, 5 ins. diam., bears S. 65° E., 7 lks.
 dist., mkd. T32S R4E S11 BT.

An aspen, 11 ins. diam., bears S. 20° W., 23 lks.
 dist., mkd. T32S R4E S10 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W of cor.

The cor. is located on top of spur projecting S. 45° E. In thick aspen growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a granite stone, 20 x 7 x 7 ins., firmly set and plainly mkd. with 4 notches on the S and 3 on the E edge, from which the original bearing trees

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

An aspen, 10 ins. diam., bears N. $14^{\circ}47'$ E., 48 lks.
dist., mkd. T32S R4E S10 BT.

An aspen, 10 ins. diam., bears N. $48^{\circ}52'$ W., 48 lks.
dist., mkd. T32S R4E S9 BT.

There is no remaining evidence of the other original
bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 32 S R 4 E
S 9 S 10
S 16 S 15
1970

from which

An aspen, 8 ins. diam., bears S. 34° E., 30 lks.
dist., mkd. T32S R4E S15 BT.

An aspen, 8 ins. diam., bears S. 51° W., 10 lks.
dist., mkd. T32S R4E S16 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

The cor. is located on S slope of hill. 3 chs. dist. S
of trail road that bears West and East. In thick aspen
growth.

At the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, marked with a
sandstone, 17 x 11 x 4 ins., firmly set and plainly mkd.
 $\frac{1}{4}$ on W face, from which the original bearing tree

An aspen, 12 ins. diam., bears N. $8^{\circ}18'$ E., 37 lks.
dist., mkd. T32S R4E $\frac{1}{4}$ S10 BT.

There is no remaining evidence of the other original
aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 32 S R 4 E
$\frac{1}{4}$
S 9 S 10
1970

from which

An aspen, 10 ins. diam., bears S. 38° W., 16 lks.
dist., mkd. T32S R4E $\frac{1}{4}$ S9 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

The cor. is located on SE slope of hill. In thick
aspen growth.

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, marked with a granite stone, 15 x 12 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 32\ S\ R\ 4\ E \\ \frac{1}{4} \quad \frac{S\ 3}{S\ 10} \\ 1970 \end{array}$$

from which

A spruce, 10 ins. diam., bears S. 28° E., 82 lks. dist., mkd. T32S R4E $\frac{1}{4}$ S10 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base to brass cap.

The cor. is located in grassy meadow, 38 lks. dist. S of 5 strand fence line that bears East and West. In thick willow growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a volcanic stone, 18 x 10 x 6 ins., firmly set and plainly mkd. with 4 notches on the S and E edge, from which the original bearing trees

A pine, 24 ins. diam., bears N. 63° E., 179 lks. dist., mkd. T32S R4E S9 BT.

A pine, 28 ins. diam., bears S. $12^{\circ}13'$ E., 303 lks. dist., mkd. T32S R4E S16 BT.

A pine, 30 ins. diam., bears N. $15^{\circ}54'$ W., 65 lks. dist., mkd. T32S R4E S8 BT.

There is no remaining evidence of the aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 32\ S\ R\ 4\ E \\ \frac{S\ 8}{S\ 17} \quad \frac{S\ 9}{S\ 16} \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of cor.

The cor. is located on S slope of hill. Approximately 15 chs. dist. S of dirt road that bears East and West. In pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, marked with a volcanic stone, 15 x 7 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which an original bearing tree

Remonumentation of Corners in
T. 32 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

An aspen, 12 ins. diam., bears S. 12°30' W.,
24 lks. dist., mkd. T32S R4E ¼ S17 BT.

There is no remaining evidence of the other original
bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, to brass cap mkd.

T 32 S R 4 E
¼ $\frac{S 8}{S 17}$
1970

from which

A fir, 8 ins. diam., bears N. 2° W., 17 lks.
dist., mkd. T32S R4E ¼ S8 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, N of
cor.

The cor. is located on E slope of hill; 87 lks. dist.
W of 4 strand fence line that bears North and South.
2 chs. dist. W of small clearing. In thick aspen and
pine growth.

At the ¼ sec. cor. of secs. 5 and 8, marked with a
granite stone, 16 x 6 x 6 ins., firmly set and plainly
mkd. ¼ on N face, from which the original bearing trees

An aspen, 14 ins. diam., bears N. 15°56' E.,
22 lks. dist., mkd. T32S R4E ¼ S5 BT.

An aspen, 15 ins. diam., bears S. 24°23' E.,
66 lks. dist., mkd. T32S R4E ¼ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 32 S R 4 E
¼ $\frac{S 5}{S 8}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, N of
cor.

The cor. is located on S slope of hill, 4½ chs. dist. S
of Baker Lake. 13½ lks. S and 4 lks. E, of cor. of 4
strand fence line that bears South and West. In thick
aspen growth.

T. 33 S., R. 4 E., Salt Lake Meridian, Utah

Township 33 South, Range 4 East, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following corner was established by Frank T. Roberts in

Remonumentation of Corners in

T. 33 S., R. 4 E., Salt Lake Meridian, Utah

CHAINS

1908.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, marked with a volcanic stone, 15 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 33 S R 4 E
 $\frac{1}{4}$ $\frac{S 2}{S 11}$
 1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

The cor. is located in grassy bottomland, 150 lks. dist. E of creek, 20 lks. wide, 1 ft. deep, that flows S. About $5\frac{1}{2}$ chs. dist. E of Boulder to Teasdale road, that bears North and South.

T. 32 S., R. 6 E., Salt Lake Meridian, Utah

Township 32 South, Range 6 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corners were established by J.P. Walker in 1904.

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., marked with a sandstone, 18 x 8 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees

A cedar, 19 ins. diam., bears S. $37^{\circ}13'$ E., 93 lks. dist., mkd. R E S $\frac{1}{4}$ S18 BT.

A pinon pine, 24 ins. diam., bears N. 58° W., 45 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 32 S
 R 6 E R 7 E
 $\frac{1}{4}$
 S 13 | S 18
 1970

Deposit the original cor. stone alongside the iron post.

Set steel fence post alongside the iron post.

The cor. is located on rolling benchland. In scattered cedar and pinon growth.

At the witness $\frac{1}{4}$ sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., marked with a sandstone, 20 x 12 x 4 ins., firmly set and plainly mkd. W C $\frac{1}{4}$ on W face, from which the original bearing trees

Remonumentation of Corners in
T. 32 S., R. 6 E., Salt Lake Meridian, Utah

CHAINS

ins., firmly set and plainly mkd. W C $\frac{1}{4}$ on W face, from
with the original bearing trees

A pinon pine, 10 ins. diam., bears S. 28°30' E.,
14 lks. dist., mkd WC $\frac{1}{4}$ S7 BT.

A cedar, 12 ins. diam., bears S. 38°30' W., 33 lks.
dist., mkd. R E S WC $\frac{1}{4}$ S12 BT. (Record, S. 36° W.,
35 lks.)

At the witness cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock, with brass cap mkd.

T 32 S
R 6 E R 7 E
 $\frac{1}{4}$
S 12 \uparrow S 7
WC
1970

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located at rim of deep canyon that bears
S. 52° W. and N. 52° E. In scattered cedar and pinon
growth.

At the witness $\frac{1}{4}$ sec. cor. of secs. 1 and 6, on the E.
bdy. of the Tp., marked with a sandstone, 28 x 16 x 6 ins.,
firmly set and plainly mkd. W C $\frac{1}{4}$ on W face, from which
the original bearing trees

A pinon pine, dead on ground, bears S. 55° E., 24 lks.
dist., mkd. with faint scribe marks.

A pinon pine, dead on ground, bears N. 81°45' W.,
45 lks. dist., with faint scribe marks.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins.
in the ground to solid rock, with brass cap mkd.

T 32 S
R 6 E R 7 E
 $\frac{1}{4}$
WC
S 1 \downarrow S 6
1970

from which

A pinon pine, 10 ins. diam., bears N. 62° E.,
32 lks. dist., mkd. T32S R6E $\frac{1}{4}$ S6 BT.

A pinon pine, 20 ins. diam., bears N. 86° W.,
83 lks. dist., mkd. T32S R6E $\frac{1}{4}$ S1 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located 150 lks. dist. N of trail road that
bears East and West. In scattered pinon pine and cedar
growth.

195

Remonumentation of Corners in

T. 32 S., R. 6 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, marked with a sandstone, 28 x 14 x 5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N face, from which the original bearing trees

A pinon pine, 15 ins. diam., bears N. 69° E.,
16 lks. dist., mkd. R E S $\frac{1}{4}$ S13 BT.

A pinon pine, 14 ins. diam., bears S. 13°30' E.,
74 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

$$\begin{array}{r} T\ 32\ S\ R\ 6\ E \\ \frac{1}{4} \quad \frac{S\ 13}{S\ 24} \\ 1970 \end{array}$$

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of cor.

The cor. is located on nearly level benchland. In scattered cedar and pinon growth.

T. 39 S., R. 6 W., Salt Lake Meridian, Utah

Township 39 South, Range 6 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corners were established by Shadrach M. Richardson in 1884.

At the cor. of secs. 16, 17, 20 and 21, marked with a limestone, 15 x 10 x 9 ins., firmly set and plainly mkd. with 4 notches on the E and 3 on the S edge, from which the original bearing trees

A pine, 20 ins. diam., bears S. 24° W., 55 lks. dist., mkd. T39S R6W S20 BT. (Record, S. 74° W., 55 lks.)

A pine, 22 ins. diam., bears N. 30° W., 70 lks. dist., mkd. T39S R6W S17 BT.

There is no remaining evidence of the other original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

$$\begin{array}{r} T\ 39\ S\ R\ 6\ W \\ \frac{S\ 17}{S\ 20} \quad \frac{S\ 16}{S\ 21} \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

The cor. is located on top of spur projecting S. 40° W. In thick pine growth.

Remonumentation of Corners in
T. 39 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 4, 5, 8 and 9, marked with a lime-stone, 18 x 12 x 6 ins., firmly set and plainly mkd. with 5 notches on the S and 4 on the E edge, from which the original bearing trees

A pine, 26 ins. diam., bears N. 60° E., 72 lks.
dist., mkd. T39S R6W S4 BT. (Record, 56 lks.)

A pine, (dead on ground) bears S. 56°30' W., 72 lks.
dist., mkd. T39S R6W BT. (Record, S. 56°30' W.,
62 lks.)

A pine, 24 ins. diam., bears N. 59° W., 88 lks.
dist., mkd. T39S R6W S5 BT. (Record, N. 59° W., 68
lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T	39	S	R	6	W
	S	5		S	4
	S	8		S	9
	1970				

from which

A pine, 10 ins. diam., bears S. 59° E., 119 lks.
dist., mkd. T39S R6W S9 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of
cor.

The cor. is located on S slope of spur projecting E. 1
ch. dist. N of draw that drains East. In cedar and pine
growth.

T. 32 S., R. 7 W., Salt Lake Meridian, Utah

Township 32 South, Range 7 West, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following corners were established by John R. Stewart
and Quinby Stewart in 1910.

At the ¼ sec. cor. of secs. 31 and 36, on the W. bdy. of
the Tp., marked with a conglomerate stone, 10 x 10 x 6
ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a collar of stone to brass cap mkd.

T	32	S
R	8	W
		R
		7
		W
	¼	
	S	36
		S
		31
	1970	

Deposit the original cor. stone alongside the iron post.

The cor. is located on N slope of hill. 5 lks. dist.
W of 4 strand fence that bears North and South; about
5 chs. dist. S of trail road that bears East and West.

Remonumentation of Corners in
T. 32 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., marked with a limestone, 12 x 8 x 6 ins., firmly set and plainly mkd. with 5 notches on the N and 1 on the S edge, from which the original bearing trees

A cedar, (dead) 14 ins. diam., bears S. 87° E.,
160 lks. dist., mkd. T32S R7W S31 BT.

A cedar, 12 ins. diam., bears S. 6°15' W., 281 lks.
dist., mkd. T32S R7W S31 BT.

There is no remaining evidence of the other original cedar bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 32 S
R 8 W R 7 W
S 25 | S 30
S 36 | S 31
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on nearly level benchland. 4 lks. dist. N of cor. of fence that bears East, West and South. In sagebrush growth.

At the ¼ sec. cor. of secs. 25 and 30, on the W. bdy. of the Tp., marked with a conglomerate stone, 15 x 10 x 8 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to brass cap mkd.

T 32 S
R 8 W R 7 W
¼
S 25 | S 30
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located in nearly level sagebrush flat. Approximately 5 chs. dist. N of small creek that flows W. No timber.

T. 35 S., R. 8 W., Salt Lake Meridian, Utah

Township 35 South, Range 8 West, Salt Lake Meridian, is located within the Dixie National forest. The ¼ sec. cor. of secs. 5 and 8, was established by Mayhew H. Dalley in 1908, the closing cor. of secs. 3 and 4, and the cor. of 3, 4, 9 and 10, were established by Robert E. Lee Collier in 1895.

Remonumentation of Corners in
T. 35 S. R. 8 W. Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 3, 4, 9 and 10, marked with a volcanic stone, 24 x 16 x 5 ins., firmly set and plainly mkd. with 5 notches on the S and 3 on the E edge, from which the original bearing trees

A red pine, 14 ins. diam., bears N. 16° E., 35 lks. dist., mkd. T35S R8W S3 BT. (Record, N. 20° E., 32 lks.)

A yellow pine, 12 ins. diam., bears S. 66° E., 8 lks. dist., mkd. T35S R8W S10 BT. (Record, S. 35° E., 11 lks.)

There is no remaining evidence of the other original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 35\ S\ R\ 8\ W \\ \hline S\ 4\ | \ S\ 3 \\ \hline S\ 9\ | \ S\ 10 \\ 1970 \end{array}$$

from which

A red pine, 10 ins. diam., bears S. 30° W., 31 lks. dist., mkd. T35S R8W S9 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on steep W slope of hill. Approximately 8 chs. dist. E of trail road that bears North and South. In draw. In thick pine growth.

At the closing cor. of secs. 3 and 4, on the N. bdy. of the Tp., marked with a volcanic stone, 18 x 10 x 8 ins., firmly set and plainly mkd. with 3 notches on the E and W edges, CC on S face.

There is no remaining evidence of the 2 original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 34\ S\ R\ 8\ W \\ \hline S\ 34 \\ \hline S\ 4\ | \ S\ 3 \\ \hline CC \\ T\ 35\ S\ R\ 8\ W \\ 1970 \end{array}$$

from which

An aspen, 10 ins. diam., bears S. 24° E., 48 lks. dist., mkd. T35S R8W S3 BT.

An aspen, 10 ins. diam., bears S. 56° W., 36 lks. dist., mkd. T35S R8W S4 BT.

Remonumentation of Corners in
T. 35 S., R. 8 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, S of cor.

The cor. is located on gentle W slope of hill. 60 lks. dist. E of old trail road in hollow that bears North and South. In thick aspen and scattered pine growth.

The ¼ sec. cor. of secs. 5 and 8, as determined from the 2 original bearing trees

A mahogany, 8 ins. diam., bears N. 41°30' E., 15 lks. dist., mkd. T35S R8W ¼ S5 BT.

A pinon pine, 10 ins. diam., bears S. 27°30' W., 5 lks. dist., mkd. T35S R8W ¼ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock, with brass cap mkd.

T 35 S R 8 W
¼ $\frac{S 5}{S 8}$
1970

Raise a mound of stone, 3½ ft. base to brass cap.

The cor. is located on steep W slope of spur projecting S 175 lks. dist. E of wash in draw that drains S. 10° W. Approximately 7 chs. dist. N of improved dirt road in Bowery Creek Canyon that bears East and West. In scattered cedar, pinon and mahogany growth.

T. 36 S., R. 9 W., Salt Lake Meridian, Utah

Township 36 South, Range 9 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Washington Jenkins and Joseph A. West, in 1897.

At the cor. of secs. 11, 12, 13 and 14, marked with a volcanic stone, 20 x 12 x 8 ins., firmly set and plainly mkd. with 4 notches on the S and 1 on the E edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 36 S R 8 W
 $\frac{S 11 | S 12}{S 14 | S 13}$
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.

The cor. is located on S slope of hill. 3 chs. dist. N of small draw drains S. 70° W. About 20 chs. dist. N of dirt road that bears East and West. In sagebrush growth: no t...

Remonumentation of Corners in

T. 36 S., R. 9 W., Salt Lake Meridian, Utah

CHAINS

At the 1/4 sec. cor. of secs. 12 and 13, marked with a volcanic stone, 18 x 10 x 8 ins., firmly set and plainly mkd. 1/4 on N face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 36 S R 9 W
S 12
1/4 S 13
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N of cor.

The cor. is located in grassy flat. About 450 lks. dist. E of dirt road that bears N. 20° E and S. 20° W. No timber.

T. 37 S., R. 9 W., Salt Lake Meridian, Utah

Township 37 South, Range 9 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Mayhew M. Dalley in 1910.

At the cor. of secs. 15, 16, 21 and 22, marked with a volcanic stone, 18 x 12 x 7 ins., firmly set and plainly mkd. with 3 notches on the E and S edge, from which the original bearing trees

A pine, 12 ins. diam., bears N. 28° E., 119 lks. dist., mkd. T37S R9W S15 BT. (Record, N. 32°30' E., 126 lks.)

A pine, 14 ins. diam., bears S. 21°45' E., 134 lks. dist., mkd. T37S R9W S22 BT.

A pine, 40 ins. diam., bears S. 45° W., 71 lks. dist., mkd. T37S R9W S21 BT.

A pine, 15 ins. diam., bears N. 86°15' W., 105 lks. dist., mkd. T37S R9W S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to solid rock, and in a collar of stone, with brass cap mkd.

T 37 S R 9 W
S 16 | S 15
S 21 | S 22
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W of cor.

The cor. is located on steep SW slope of hill. In scattered pine and aspen growth.

Remonumentation of Corners in

T 37 S R 9 W, Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, marked with a volcanic stone, 16 x 12 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees

A balsam, 36 ins. diam., bears S. 15°15' W., 32 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A yellow pine, 24 ins. diam., bears N. 26°15' W., 85 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

$$\begin{array}{r} T\ 37\ S\ R\ 9\ W \\ \frac{1}{4} \quad \frac{S\ 10}{S\ 15} \\ 1970 \end{array}$$

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep W slope of hill. In thick pine growth.

T. 37 S., R. 14 W., Salt Lake Meridian, Utah

Township 37 South, Range 14 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corners were established by A. J. Stewart in 1873.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 12 x 8 x 6 ins., (record, a granite 16 x 10 x 7 ins.) firmly set and plainly mkd. with 4 notches on the E and 2 on the S edge, from which the original bearing tree

A cedar, (dead on ground) bears S. 30° W., 137 lks. dist., mkd. with faint scribe mks.

There is no remaining evidence of the other 3 original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} T\ 37\ S\ R\ 14\ W \\ \frac{S\ 20}{S\ 29} \quad \frac{S\ 21}{S\ 28} \\ 1970 \end{array}$$

from which

A cedar, 6 ins. diam., bears S. 12°30' W., 37 lks. dist., mkd. S29 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land. At the cor. of fence that bears East, West and North. Cleared area to N of fence and cedar growth to S.

Remonumentation of Corners in
T. 37 S. R. 14 W., Salt Lake Meridian Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, marked with a sandstone, 16 x 12 x 3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

There is no remaining evidence of the original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 14 W
 $\frac{1}{4}$ $\frac{S 21}{S 28}$
1970

Bury the original cor. stone alongside the iron post.

The cor. is located on nearly level land. At the cor. of fence that bears North and N. 75° W.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked with a granite stone, 20 x 16 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T 37 S R 14 W
 $\frac{1}{4}$
S 20 | S 21
1970

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land. 3 lks. dist. W of 5 strand fence that bears North and South. Approximately 9 chs. dist. N of dirt road that bears East and West. No timber.

T. 40 S., R. 15 W., Salt Lake Meridian, Utah

Township 40 South, Range 15 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Harvey D. Heist in 1903.

At the cor. of secs. 15, 16, 21 and 22, marked with a trachyte stone, 18 x 12 x 6 ins., firmly set and plainly mkd. with 3 notches on the S and E edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 15 W
 $\frac{S 16 | S 15}{S 21 | S 22}$
1970

from which

Remonumentation of Corners in

T 40 S R 15 W, S 10 E, 100 lks. dist. N
bears S. 75° W., 42 lks. dist., mkd. X B0.

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on steep E slope of mountain. In thick oak, pine, cedar and mahogany growth.

At the ¼ sec. cor. of secs. 9 and 10, marked with a trachyte stone, 18 x 6 x 6 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 15 W
¼
S 9 | S 10
1970

from which

A cedar, 8 ins. diam., bears N. 75° E., 45 lks. dist., mkd. ¼ S10 BT.

A fir, 6 ins. diam., bears N. 86° W., 33 lks. dist., mkd. ¼ S9 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located on SE slope. 100 lks. dist. N of small spring branch that drains S. 50° W. In thick pine, cedar and oak brush.

At the ¼ sec. cor. of secs. 16 and 17, marked with a trachyte stone, 28 x 12 x 12 ins., firmly set and plainly mkd. ¼ on W face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, with brass cap mkd.

T 40 S R 15 W
¼
S 17 | S 16
1970

from which

A cedar, 6 ins. diam., bears N. 67° E., 78 lks. dist., mkd. T40S R15W ¼ S16 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base to brass cap.

The cor. is located on gentle SW slope. In scattered cedar, mahogany and oak brush.

Remonumentation of Corners in
T. 40 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 8, 9, 16 and 17, marked with a trachyte stone, 28 x 15 x 5 ins., firmly set and plainly mkd. with 4 notches on the S and E edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, with brass cap mkd.

T 40 S R 15 W	
S 8	S 9
S 17	S 16
1970	

from which

An oak, 8 ins. diam., bears N. 23° E., 6 lks. dist., mkd. T40S R15W S9 BT.

An oak, 8 ins. diam., bears N. 89° W., 5 lks. dist., mkd. T40S R15W S17 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located in nearly level flat. 120 lks. dist. S of trail road that bears East and West. In sagebrush and oak growth.

At the ¼ sec. cor. of secs. 9 and 16, marked with a trachyte stone, 24 x 12 x 8 ins., firmly set and plainly mkd. ¼ on N face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, and in a mound of stone, 3½ ft. base to brass cap mkd.

T 40 S R 15 W	
¼	S 9
	S 16
1970	

from which

A mahogany, 7 ins. diam., bears N. 66° W., 8 lks. dist., mkd. ¼ S9 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on SW slope of hill. About 7 chs. dist. W of trail road that bears North and South. In black oak and mahogany growth.

T. 37 S., R. 18 W., Salt Lake Meridian, Utah

Township 37 South, Range 18 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by T.C. Bailey in 1881.

Remonumentation of Corners in
T. 37 S., R. 18 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 3, 4, 9 and 10, marked with a trachyte stone, 20 x 15 x 12 ins., firmly set and plainly mkd. with 5 notches on the S and 3 on the E edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 18 W			
S 4		S 3	
S 9		S 10	
1970			

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

The cor. is located in nearly level railed area. In scattered young cedar growth.

CERTIFICATE OF SURVEY

(I ~~We~~), Ferrel D. Reynolds

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th

of February, 19 61, (I ~~We~~) have remonumented corners in the following listed townships.

- T. 36 S., R. 1 E., Salt Lake Meridian
- T. 32 S., R. 4 E., Salt Lake Meridian
- T. 33 S., R. 4 E., Salt Lake Meridian
- T. 32 S., R. 6 E., Salt Lake Meridian
- T. 39 S., R. 6 W., Salt Lake Meridian
- T. 32 S., R. 7 W., Salt Lake Meridian
- T. 35 S., R. 8 W., Salt Lake Meridian
- T. 36 S., R. 9 W., Salt Lake Meridian
- T. 37 S., R. 9 W., Salt Lake Meridian
- T. 37 S., R. 14 W., Salt Lake Meridian
- T. 40 S., R. 15 W., Salt Lake Meridian
- T. 37 S., R. 18 W., Salt Lake Meridian

of the Salt Lake Meridian, in the State of Utah

are represented in the foregoing field notes as having been executed by (me), (~~us~~) and under (~~our~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

May 17, 1971 (Date)

[Signature]
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date APR 10 1972

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in

T. 36 S., R. 1 E.	T. 35 S., R. 8 W.
T. 32 S., R. 4 E.	T. 36 S., R. 9 W.
T. 33 S., R. 4 E.	T. 37 S., R. 9 W.
T. 32 S., R. 6 E.	T. 37 S., R. 14 W.
T. 39 S., R. 6 W.	T. 40 S., R. 15 W.
T. 32 S., R. 7 W.	T. 37 S., R. 18 W.

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

SEP 7 1976 (Date)

[Signature]
(Chief, Bureau of Land Management)

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH AND EAST BOUNDARIES

AND

A PORTION OF THE SUBDIVISIONAL LINES

THE SURVEY OF A PORTION OF THE SUBDIVISION LINES

WITHIN SECTIONS 16, 17, 25, AND 36

TOWNSHIP 29 SOUTH, RANGE 6 WEST

1921

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RICHARD D. SNIDER CADASTRAL SURVEYOR

RAY HARPIN CADASTRAL SURVEYOR

HENRY U. LANG CADASTRAL SURVEYOR

Under special instructions dated AUGUST 24, 1965, approved SEPTEMBER 7, 1965

_____, which provided for the surveys included under ~~XXXX SURVEY~~ Group
Number 483, and assignment instructions dated OCTOBER 8, 1965.

JUNE 17, 1966, AND JUNE 13, 1969

Survey commenced OCTOBER 12, 1965

Survey completed OCTOBER 15, 1965

INDEX DIAGRAM

Township 29 SOUTH, Range 6 WEST

6	5 26	4	3	2	1
7	8 27	9	10	11	12
15 18 25 24	16 17 21 22	17 16 18 19	15	14	13
19	20	21	22	23	24 13
30	29	28	27	26 11	25 7 10
31	32	33	34	35 9	36 4 1

- Subdivision of section 16 pg. 29
- Subdivision of section 17 pg. 31
- Subdivision of section 25 pg. 35
- Subdivision of section 36 pg. 40

Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the south and east boundaries of a portion of the subdivisional lines, and the survey of a portion of the subdivision lines within sections 16, 17, 25, and 36, Township 29 South, Range 6 West, of the Salt Lake Meridian, Utah.

History of Previous Surveys. The south boundary and a portion of the east and west boundaries, and a portion of the subdivisional lines were surveyed by Edward W. Koeber, U. S. Deputy Surveyor, in September 1890, as shown upon the official plat approved November 27, 1893. A portion of the west boundary of the township and a portion of the subdivisional lines, which was the Fort Cameron Military (Wood and Timber) Reservation, were also surveyed by Edward W. Koeber, U. S. Deputy Surveyor, in September 1890, as shown upon the official plat also approved November 27, 1893. The north boundary, a portion of the east and west boundaries, and a portion of the subdivisional lines were surveyed by Page and Swan, U. S. Deputy Surveyors, in September 1897, as shown upon the official plat approved May 26, 1899.

The dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions, dated August 24, 1965.

The directions of all lines of these surveys were determined by direct altitude observations on the sun for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

Prior to the restoration of any corner, all necessary lines of the original surveys were retraced and a diligent search was made for any evidence of the original corner monuments and calls of the official record. Identified corners were remonumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence of the control of each corner.

The data furnished with the special instructions give the geographic position of the southeast corner of the township, as: Latitude $38^{\circ} 14.1' N.$, and Longitude $112^{\circ} 28.2' W.$ The mean magnetic declination is 16° East.

Dependent Resurvey of a Portion of the South Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

Restoring the Survey Executed by Edward W. Koeber,
U. S. Deputy Surveyor, in 1890

Dependent Resurvey of a Portion of the South Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

Beginning at the cor. of Townships 29 and 30 South, Ranges 5 and 6 West, which is monumented with a granite stone, 20 x 12 x 6 ins., mkd. OMR on the east, firmly set in a mound of stone, 4 ft. base, 3 ft. high.

substantiated by:

An aspen tree, 8 ins. in diam., bears N. 23° 30' E. (record, N. 24° 30' E.), 115 lks. distant, scribed T29S R5W S31 BT.

The remains of a tree stump, (record, balsam fir), approximately 18 ins. in diam., bears S. 85° 15' E. 30 lks. distant.

The remains of a tree stump, (record, balsam fir), approximately 14 ins. in diam., bears S. 75° 20' W. 190 lks. distant, scribed T30S R6W S1 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 4 ins. in the ground, over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S
R6W R5W
S 36 | S 31
S 1 | S 6
T30S

1969

Deposit the granite stone monument alongside the iron post, at the base of the above mound of stone.

from which

A spruce tree, 12 ins. in diam., bears N. 31° 00' E., 77 lks. distant, scribed T29S R5W S31 BT.

A spruce tree, 14 ins. in diam., bears S. 26° 00' E., 54 lks. distant, scribed T30S R5W S6 BT.

A spruce tree, 6 ins. in diam., bears S. 59° 00' W., 4 lks. distant, scribed T30S R6W S1 BT.

An aspen tree, 10 ins. in diam., bears N. 41° 00' W., 105 lks. distant, scribed T29S R6W S36 BT.

N. 88° 11' W., between Tps. 29 and 30 S., through R. 6 W., and between secs. 1 and 36.

19.69 The point for the east 1/16 sec. cor. of secs. 1 and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

Dependent Resurvey of a Portion of the South Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
E 1/16 $\frac{S\ 36}{S\ 1}$
T30S R6W

1969

from which

A spruce tree, 12 ins. in diam., bears SOUTH, 12 lks. distant, scribed T30S R6W E 1/16 S1 BT.

A fir tree, 6 ins. in diam., bears N. 46° 00' W., 25 lks. distant, scribed T29S R6W E 1/16 S36 BT.

- 39.38 The 1/4 sec. cor. of secs. 1 and 36 is monumented with an unmarked stone, 10 x 10 x 14 ins., set in a mound of stone, 3 ft. base, 2 ft. high.

substantiated by:

A pine tree, 18 ins. in diam., bears N. 18° 00' E., 15 lks. distant, blazed face overgrown.

A fir tree, 8 ins. in diam., bears S. 80° 45' W., 23 lks. distant, scribed 1/4 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

T29S R6W
1/4 $\frac{S\ 36}{S\ 1}$
T30S R6W

1969

Deposit the stone monument alongside the iron post, at the base of the above mound of stone.

from which

A fir tree, 6 ins. in diam., bears S. 58° 00' E., 23 lks. distant, scribed T30S R6W 1/4 S1 BT.

A fir tree, 8 ins. in diam., bears N. 82° 00' W., 31 lks. distant, scribed T29S R6W 1/4 S36 BT.

N. 87° 53' W., beginnning new measurement.

- 19.43 The point for the west 1/16 sec. cor. of secs. 1 and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

Dependent Resurvey of a Portion of the South Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
W 1/16 $\frac{S\ 36}{S\ 1}$
T30S R6W

1969

from which

A spruce tree, 6 ins. in diam., bears S. 22° 00' E.
38 lks. distant, scribed T30S R6W W 1/16 S1 BT.

A pine tree, 18 ins. in diam., bears N. 11° 00' W.,
46 lks. distant, scribed T29S R6W W 1/16 S36 BT.

38.86

The cor. of secs. 1, 2, 35, and 36 is monumented with a
granite stone, 20 x 15 x 10 ins., set in a mound of
stone, 3½ ft. base, 1½ ft. high, mkd. with 1 groove on
the east and 5 grooves on the west.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins.
in the ground, and in a mound of stone, 3½ ft. base, to
the top, with brass cap mkd.

T29S R6W
 $\frac{S\ 35\ |S\ 36}{S\ 2\ |S\ 1}$
T30S R6W

1969

Deposit the granite stone monument alongside the iron
post, at the base of the above mound of stone.

from which

A spruce tree, 6 ins. in diam., bears N. 48° 30' E.
51 lks. distant, scribed T29S R6W S36 BT.

A spruce tree, 10 ins. in diam., bears N. 14° 45'
W., 34 lks. distant, scribed T29S R6W S35 BT.

Discontinue the dependent resurvey of the township line
at this corner.

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

From the corner of Townships 29 and 30 South, Ranges 5
and 6 West, heretofore described.

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

N. 2° 45' E., through Tps. 29 S., between Rs. 5 and 6 W.,
and between secs. 31 and 36.

19.80 The point for the south 1/16 sec. cor. of secs. 31 and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins.
in the ground, over a cross (+) chiseled on bedrock, and
in a mound of stone, 4 ft. base, to the top, with brass
cap mkd.

T29S
R6W R5W
S 1/16
S 36 | S 31

1969

from which

A fir tree, 5 ins. in diam., bears S. 5° 00' E., 17
lks. distant, scribed T29S R5W S 1/16 S31 BT.

A fir tree, 6 ins. in diam., bears N. 10° 00' W., 22
lks. distant, scribed T29S R6W S 1/16 S36 BT.

39.60 The 1/4 sec. cor. of secs. 31 and 36 is monumented with
a sandstone, 14 x 12 x 3 ins., firmly set in a mound of
stone, 4 ft. base, 3 ft. high, marked 1/4 on the west.

substantiated by:

The remains of an aspen tree stump, 6 ins. in diam.,
(not of record) bears N. 61° 00' E., 17 lks. dis-
tant, scribed 1/4 S BT.

The remains of a fir tree stump, 30 ins. in diam.,
bears N. 71° 30' W., 24 lks. distant, scribed 1/4 S
BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins.
in the ground, over a cross (+) chiseled on bedrock, and
in a mound of stone, 3 ft. base, to the top, with brass
cap mkd.

T29S
R6W R5W
1/4
S 36 | S 31

1969

Deposit the sandstone monument alongside the iron post,
at the base of the above mound of stone.

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

from which

A fir tree, 6 ins. in diam., bears N. 23° 00' E., 13 lks. distant, scribed T29S R5W 1/4 S31 BT.


A fir tree, 12 ins. in diam., bears N. 48° 00' W., 24 lks. distant, scribed T29S R6W 1/4 S36 BT.

N. 1° 35' W., beginning new measurement.

19.96

The point for the north 1/16 sec. cor. of secs. 31 and 36

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



1969

Raise a mound of stone, 4 ft. base, 3 ft. high, west of the corner.

39.92

The cor. of secs. 25, 30, 31, and 36 is monumented with a granite stone, 16 x 10 x 8 ins., firmly set in a low mound of stone, mkd. OMR on the east face and 9M on the west face.


substantiated by:

The remains of a tree stump, approximately 3½ ft. diam., bears N. 26° 45' E., 157 lks. distant, with the remains of a blazed face.

An aspen tree snag, 10 ins. in diam., 10 ft. high, bears N. 63° 00' W. (record, N. 64° 30' W.), 34 lks. distant, scribed T R S25.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.



1965

Deposit the granite stone monument alongside the iron post, and raise a mound of stone, 3 ft. base, 3 ft. high, east of the corner.

from which

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

A stone-in-place, 6 x 4 ft. base, 2 ft. high, bears S. 41° 37' E., 7.37 chs. distant. At this point, I chiseled a cross (+) for a bearing object.

A pine tree, 8 ins. in diam., bears S. 46° 30' W., 125 lks. distant, scribed T29S R6W S36 BT.

A pine tree, 6 ins. in diam., bears N. 17° 00' W., 45 lks. distant, scribed T29S R6W S25 BT.

N. 0° 06' W., between secs. 25 and 30.

19.90 The point for the south 1/16 sec. cor. of secs. 25 and 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S
R6W R5W
S 1/16
S 25 | S 30

1965

from which

A fir tree, 5 ins. in diam., bears S. 88° 45' W., 28 lks. distant, scribed S 1/16 S25 BT.

29.50 Ridge, bears NE and SW, descend over north slope.

39.80 The 1/4 sec. cor. of secs. 25 and 30 is monumented with a granite stone, 20 x 12 x 10 ins., firmly set in a low mound of stone, mkd. 1/4 on the west face.

substantiated by:

An aspen tree, 9 ins. in diam., bears N. 57° 00' E., 8 lks. distant, (record, N. 46° E., 10 lks. distant), scribed 1/4 BT 9 1/2 M OMR.

An aspen tree, 10 ins. in diam., bears S. 63° 45' W., 12 lks. distant, (record, S. 69° 30' W., 10 lks. distant), scribed 1/4 BT 9 1/2 M.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S
R6W R5W
1/4
S 25 | S 30

1965

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

Deposit the granite stone monument alongside the iron post.

from which

A fir tree, 4 ins. in diam., bears S. 69° 30' E., 1ks. distant, scribed X at breast height, and BT near the base.

This corner is located on a steep northwest slope.

N. 0° 09' E., beginning new measurement.

Descend over steep northwest slope.

- 5.20 Draw, drains northwest.
- 14.20 The South Fork of the Beaver River, 20 lks. wide, course northwest; ascend over south slope.
- 19.27 The point for the north 1/16 sec. cor. of secs. 25 and 30
- Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S
R6W R5W
N 1/16
S 25 | S 30

1965

Raise a mound of stone, 4 ft. base, 3 ft. high, west of the corner.

- 21.40 Ridge, bears east and west, descend over north slope.
- 29.45 Draw, drains northwest, ascend over southwest slope.
- 35.15 Draw, drains west, continue ascent over southwest slope.
- 38.54 The cor. of secs. 19, 24, 25, and 30 is monumented with a volcanic rock, 18 x 12 x 5 ins., firmly set in a low mound of stone, mkd. with 2 grooves on the south and 4 grooves on the north.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S
R6W R5W
S 24 | S 19
S 25 | S 30

1965

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

Deposit the volcanic rock monument alongside the iron post, at the base of the above mound of stone.

From this corner, a granite stone monument, 14 x 12 x 7 ins., above the surface of the ground, mkd. 1/2 M OMR on the west and substantiated by a small mound of stone to the east, bears S. 88° 50' E., 8.45 chs. distant.

Discontinue the dependent resurvey of the range line at this corner.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

From the cor. of secs. 1, 2, 35, and 36 on the south boundary of the township, heretofore described.

N. 1° 20' E., between secs. 35 and 36.

20.37 The point for the south 1/16 sec. cor. of secs. 35 and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S R6W
S 1/16
S 35 | S 36

1969

Raise a mound of stone, 3 ft. base, 2 ft. high, west of the corner.

40.74 The point for the 1/4 sec. cor. of secs. 35 and 36 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4
S 35 | S 36

1969

81.48 The cor. of secs. 25, 26, 35, and 36 is monumented with a sandstone, 20 x 10 x 10 ins., firmly set 13 ins. in the ground, mkd. with 1 groove on the south and 1 groove on the east.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 13 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

T29S R6W
S 26 | S 25
S 35 | S 36

1965

Deposit the sandstone monument alongside the iron post, at the base of the above mound of stone.

from which

A fir tree, 8 ins. in diam., bears N. 72° 45' E., 4 lks. distant, scribed T29S R6W S25 BT.

A fir tree, 11 ins. in diam., bears S. 34° 30' E., 49 lks. distant, scribed T29S R6W S36 BT.

A pine tree, 8 ins. in diam., bears N. 11° 45' W., 21 lks. distant, scribed T29S R6W S26 BT.

From the cor. of secs. 25, 30, 31, and 36 on the east boundary of the township, heretofore described.

N. 86° 29' W., between secs. 25 and 36.

19.00 Road, bears northwest and southeast.

19.31 The point for the east 1/16 sec. cor. of secs. 25 and 36 this corner point is located on a steep southwest slope (fill for the above road); an unsafe location for a monument.

19.41 Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, for the witness east 1/16 sec. cor. of secs. 25 and 36, with brass cap mkd.

W C
T29S R6W
E 1/16 $\frac{S 25}{S 36}$ \rightarrow

1965

38.62 The point for the 1/4 sec. cor. of secs. 25 and 36 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
1/4 $\frac{S\ 25}{S\ 36}$

1965

Raise a mound of stone, 3 ft. base, 1½ ft. high, north of the corner.

from which

A pine tree, 20 ins. in diam., bears N. 74° 15' E.,
148 lks. distant, scribed 1/4 S25 BT.

A fir tree, 10 ins. in diam., bears S. 44° 45' E.,
88 lks. distant, scribed 1/4 S36 BT.

43.55 Draw, drains north.

57.93 The point for the west 1/16 sec. cor. of secs. 25 and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins.
in the ground, with brass cap mkd.

T29S R6W
W 1/16 $\frac{S\ 25}{S\ 36}$

1965

Raise a mound of stone, 3 ft. base, 1½ ft. high, north of the corner.

from which

A pine tree, 12 ins. in diam., bears N. 72° 45' W.,
83 lks. distant, scribed W 1/16 S25 BT.

77.24 The cor. of secs. 25, 26, 35, and 36, heretofore described.

N. 1° 07' E., between secs. 25 and 26.

Descend over north slope.

19.83 The point for the south 1/16 sec. cor. of secs. 25 and 26

Set an iron post, 28 ins. long, 2½ ins. in diam., 17 ins.
in the ground, and in a mound of stone, 2½ ft. base, to
the top, with brass cap mkd.

T29S R6W
S 1/16
S 26 | S 25

1965

from which

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

A fir tree, 5 ins. in diam., bears N. 84° 15' W., 50 lks. distant, scribed S 1/16 S26 BT.

39.66 The 1/4 sec. cor. of secs. 25 and 26 is monumented with a granite stone, 18 x 12 x 7 ins., (record, 20 x 14 x 5 ins., 15 ins. in the ground), firmly set 11 ins. in the ground and in a low mound of stone, mkd. 1/4 on the west face.

substantiated by:

A pine tree, 27 ins. in diam., bears N. 75° 35' E., 43 lks. distant, blazed face overgrown, (record, a black pine, 8 ins. in diam., bears N. 13° 30' E., 47 lks. distant).

An aspen tree, 16 ins. in diam., bears N. 8° 25' W., 37 lks. distant, scribed 1/4 BT. (record, an aspen 5 ins. in diam., bears N. 80° 15' W., 38 lks. distant).

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S R6W
1/4

S 26 | S 25

1965

Deposit the granite stone monument alongside the iron post, and raise a mound of stone, 4 ft. base, 3½ ft. high, west of the corner.

from which

A juniper tree, 7 ins. in diam., bears S. 60° 15' E., 56 lks. distant, scribed 1/4 S25 BT.

A pine tree, 12 ins. in diam., bears N. 64° 45' W., 52 lks. distant, scribed 1/4 S26 BT.

N. 0° 34' E., beginning new measurement.

1.55 Draw, drains northeast.
2.75 Draw, drains northeast.
10.70 Draw, drains northeast.
18.67 The point for the north 1/16 sec. cor. of secs. 25 and 26.
Set an iron post, 28 ins. long, 2½ ins. in diam., 13 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
N 1/16

S 26 | S 25

1965

from which

A pine tree, 5 ins. in diam., bears S. 72° 15' E.,
16 lks. distant, scribed N 1/16 S25 BT.

A juniper tree, 10 ins. in diam., bears S. 51° 45'
W., 17 lks. distant, scribed N 1/16 S26 BT.

- 22.60 Draw, drains northeast.
28.10 Draw, drains northeast.
33.20 Spur, slopes northwest.
36.65 Beaver River, 25 lks. wide, course southwest.
37.34 The cor. of secs. 23, 24, 25, and 26 is marked with
an unmarked granite stone, 15 x 10 x 6 ins., firmly set
in a low mound of stone.

substantiated by:

A cottonwood tree, (record, an aspen, 4 ins. in
diam.), 24 ins. in diam., blazed face overgrown,
bears N. 12° 30' W., 22 lks. distant.

The above corner is accepted as the best available evi-
dence of the position of the original corner.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 17 ins.
in the ground, and in a mound of stone, 2½ ft. base, to
the top, with brass cap mkd.

T29S R6W
S 23 | S 24
S 26 | S 25

1965

Deposit the granite stone corner marker alongside the
iron post, and raise a mound of stone, 4 ft. base, 3 ft.
high, west of the corner.

from which

A spruce tree, 24 ins. in diam., bears S. 89° 31'
E., 145 lks. distant, scribed S25 BT.

From the cor. of secs. 19, 24, 25, and 30 on the east
boundary of the township, heretofore described.

N. 87° 42' W., between secs. 24 and 25.

- 19.98 The point for the east 1/16 sec. cor. of secs. 24 and 25.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

T29S R6W
E 1/16 $\frac{S\ 24}{S\ 25}$

1965

from which

A pine tree, 7 ins. in diam., bears S. 20° 45' E., 90 lks. distant, scribed E 1/16 S25 BT.

30.15 Ridge, bears north and south.

39.96 The 1/4 sec. cor. of secs. 24 and 25 is monumented with a lava stone, 12 x 10 x 6 ins., firmly set in a low mound of stone, mkd. 1/4 on the north.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S R6W
1/4 $\frac{S\ 24}{S\ 25}$

1965

Deposit the lava stone monument alongside the iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, west of the corner.

from which

A mountain-mahogany tree, 10 ins. in diam., bears N. 84° 20' E., 246 lks. distant, scribed 1/4 S24 BT.

A mountain-mahogany tree, 8 ins. in diam., bears S. 48° 20' W., 89 lks. distant, scribed 1/4 S25 BT.

N. 87° 13' W., beginning new measurement.

8.50 Ridge, bears southeast and northwest.

17.80 The South Fork of the Beaver River, 20 lks. wide, course northeast.

18.04 The point for the west 1/16 sec. cor. of secs. 24 and 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 17 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

226

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
S 24
W 1/16 S 25

1965

from which

A pine tree, 8 ins. in diam., bears S. 2° 45' E., 58
lks. distant, scribed W 1/16 S25 BT.

- 30.90 Draw, drains north.
- 35.00 Beaver River, 30 lks. wide, course southwest.
- 36.08 cor. of secs. 23, 24, 25, and 26, heretofore described.

Discontinue the regular order of this survey at this corner.

The north 1/4 sec. cor. of sec. 18 is monumented with a lava stone, 15 x 12 x 8 ins., firmly set 9 ins. in the ground, mkd. 1/4 on the north.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a collar of stone, with brass cap mkd.

1/4 S 18
T29S R6W

1966

Deposit the lava stone monument alongside the iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, south of the corner.

from which

A juniper tree, 5 ins. in diam., bears N. 42° 00'
E., 44 lks. distant, scribed X at breast height and
BT near the base.

A pine tree, 6 ins. in diam., bears S. 45° 30' E.,
42 lks. distant, scribed 1/4 S18 BT.

N. 88° 30' E., along the north boundary of sec. 18.

- 6.45 Electric transmission line, bears N. 20° 45' E. and
S. 20° 45' W.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

- 40.38 The point for the cor. of secs. 17 and 18 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.
- T29S R6W
S 7
S 18 | S 17

1966
- from which
- A juniper tree, 10 ins. in diam., bears S. 11° 30' E., 60 lks. distant, scribed T29S R6W S17 BT.
- A juniper tree, 4 ins. in diam., bears S. 12° 00' W., 12 lks. distant, scribed X BT.
- N. 88° 30' E., along the north boundary of sec. 17.
- 4.69 The point for the closing cor. of secs. 7 and 8 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.
- T29S R6W
C | C
S 7 | S 8
S 17

1966
- from which
- A juniper tree, 10 ins. in diam., bears N. 32° 00' E., 17 lks. distant, scribed T29S R6W S8 CC BT.
- A juniper tree, 6 ins. in diam., bears N. 62° 00' W., 24 lks. distant, scribed T29S R6W S7 CC BT.
- 8.20 Western rim of Black Ridge, bears north and south.
- 34.40 Eastern rim of Black Ridge, bears northeast and southwest.
- 40.38 The point for the north 1/4 sec. cor. of sec. 17 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

228

CHAINS

T29S R6W

1/4 S 17

1966

from which

A juniper tree, 8 ins. in diam., bears S. 61° 45'
E., 52 lks. distant, scribed T29S R6W 1/4 S17 BT.

A juniper tree, 12 ins. in diam., bears S. 62° 45'
W., 46 lks. distant, scribed T29S R6W 1/4 S17 BT.

60.57 The point for the east 1/16 sec. cor. of sec. 17 (only).

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

E 1/16 S 17

1966

from which

A juniper tree, 6 ins. in diam., bears S. 51° 00'
W., 36 lks. distant, scribed E 1/16 S17 BT.

A juniper tree, 4 ins. in diam., bears N. 23° 00'
W., 4 lks. distant, scribed X BT.

80.76 The point for the cor. of secs. 16 and 17 is determined
at the east edge of the remains of a mound of stone, 4
ft. base, 1 ft. high; there is no evidence of the origi-
nal corner monument.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins.
in the ground, and in a mound of stone, 3 ft. base, to the
top, with brass cap mkd.

T29S R6W
S 8
S 17 | S 16

1966

EAST, along the north boundary of sec. 16.

4.39 The point for the closing corner of secs. 8 and 9, here-
inafter described.

20.20 Wash, drains southwest.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

- 40.03 The point for the north 1/4 sec. cor. of sec. 16 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T29S R6W
1/4 S 16
1966
- Raise a mound of stone, 3 ft. base, 1½ ft. high, south of the corner.
- 80.06 The point for the cor. of secs. 15 and 16 is determined at the east edge of the remains of a mound of stone, 4 ft. base, 1 ft. high; there is no evidence of the original corner monument.
- At the corner point
- Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.
- T29S R6W
S 9
S 16 | S 15
1966
- from which
- A juniper tree, 8 ins. in diam., bears S. 65° 30' E., 15 lks. distant, scribed T29S R6W S15 BT.
- A juniper tree, 6 ins. in diam., bears S. 66° 30' W., 91 lks. distant, scribed T29S R6W S16 BT.
- From this corner, the closing corner of secs. 9 and 10 bears EAST, 4.27 chs. distant, and is monumented with a stone, 7 x 9 inch base, firmly set, projecting 9 ins. above the surface of the ground, mkd. CC on the north, substantiated by a small mound of stone, north of the corner.
- The cor. of secs. 15, 16, 21, and 22 is monumented with a stone, marking illegible, 20 x 10 x 7 ins., firmly set, 9 ins. in the ground.
- At the corner point
- Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

230

CHAINS

T29S R6W
S 16 | S 15
S 21 | S 22

1966

Deposit the stone monument alongside the iron post, at the base of the above mound of stone.

from which

A juniper tree, 4 ins. in diam., bears S. 35° 00' W., 37 lks. distant, scribed X BT.

A juniper tree, 10 ins. in diam., bears S. 39° 00' W., 92 lks. distant, scribed T29S R6W S21 BT.

A mountain-mahogany tree, 8 ins. in diam., bears N. 62° 30' W., 67 lks. distant, scribed X BT.

N. 2° 04' E., between secs. 15 and 16.

12.80 Wash, drains west.

30.40 East Fork of Baker Creek, 10 lks. wide, 10 ins. deep, course west.

42.14 The point for the 1/4 sec. cor. of secs. 15 and 16 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4
S 16 | S 15

1966

Raise a mound of stone, 3 ft. base, 2 ft. high, south of the corner.

74.00 Wash, drains southwest.

84.28 The corner of secs. 15 and 16 on the south boundary of section 9, heretofore described.

From the cor. of secs. 15, 16, 21, and 22, heretofore described.

S. 89° 28' W., between secs. 16 and 21.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

- 0.55 Wash, drains north.
- 39.35 Wash, drains north.
- 39.74 The point for the 1/4 sec. cor. of secs. 16 and 21 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.
- T29S R6W
1/4 $\frac{S\ 16}{S\ 21}$
- 1966
- from which
- A juniper tree, 8 ins. in diam., bears N. 24° 15' E., 29 lks. distant, scribed 1/4 S16 BT.
- A pine tree, 10 ins. in diam., bears S. 84° 15' W., 19 lks. distant, scribed 1/4 S21 BT.
- 59.61 The point for the west 1/16 sec. cor. of secs. 16 and 21.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, brass cap mkd.
- W 1/16 $\frac{S\ 16}{S\ 21}$
- 1966
- from which
- A pine tree, 3 ins. in diam., bears N. 59° 30' E., 72 lks. distant, scribed X BT.
- A pine tree, 10 ins. in diam., bears S. 73° 15' W., 53 lks. distant, scribed W 1/16 S21 BT.
- 79.48 The point for the cor. of secs. 16, 17, 20, and 21 is determined at proportionate distance; there is no evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.
- T29S R6W
 $\frac{S\ 17}{S\ 20} | \frac{S\ 16}{S\ 21}$
- 1966

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

from which

A pine tree, 20 ins. in diam., bears N. 58° 45' E.,
81 lks. distant, scribed T29S R6W S16 BT.

A pine tree, 10 ins. in diam., bears N. 39° 39' W.,
72 lks. distant, scribed T29S R6W S17 BT.

From this corner, the corner of secs. 20, 21, 28, and 29
bears S. 1° 29' W., 84.96 chs. distant, and is monumented
with a lava stone, 20 x 11 x 5 ins., firmly set 11 ins.
in the ground, mkd. with 4 notches on the east, the
markings on the south are illegible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins.
in the ground, with brass cap mkd.

T29S R6W	
S 20 S 21	
S 29 S 28	

1966

Deposit the lava stone monument alongside the iron post,
and raise a mound of stone, 2 ft. base, 1½ ft. high,
south of the corner.

from which

The southeast corner of the Beaver Hydroelectric
Plant No. 1, bears N. 44° 22' E., 253 lks. distant.

A pine tree, 20 ins. in diam., bears N. 56° 30' E.,
86 lks. distant, scribed T29S R6W S21 BT.

A pine tree, 20 ins. in diam., bears S. 36° 00' E.,
177 lks. distant, scribed T29S R6W S28 BT.

N. 1° 43' E., between secs. 16 and 17.

8.60 East Fork of Baker Creek, 15 lks. wide, 10 ins. deep,
course southwest.

21.24 The point for the south 1/16 sec. cor. of secs. 16 and 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins.
in the ground, and in a mound of stone, 3½ ft. base, to
the top, with brass cap mkd.

S 1/16	
S 17 S 16	

1966

from which

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

A pine tree, 6 ins. in diam., bears N. 84° 45' E.,
73 lks. distant, scribed S 1/16 S16 BT.

A juniper tree, 12 ins. in diam., bears S. 46° 30'
W., 36 lks. distant, scribed S 1/16 S17 BT.

23.65 Draw, drains west.

33.80 Draw, drains southwest.

42.48 The point for the 1/4 sec. cor. of secs. 16 and 17 is
determined at proportionate distance; there is no evi-
dence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

T29S R6W
1/4

S 17 | S 16

1966

63.72 The point for the north 1/16 sec. cor. of secs. 16 and 17

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

N 1/16

S 17 | S 16

1966

from which

A juniper tree, 8 ins. in diam., bears S. 59° 45'
E., 38 lks. distant, scribed N 1/16 S16 BT.

A juniper tree, 6 ins. in diam., bears S. 78° 00'
W., 15 lks. distant, scribed N 1/16 S17 BT.

67.35 Draw, drains southwest.

84.96 The corner of secs. 16 and 17 on the south boundary of
section 8, heretofore described.

From the cor. of secs. 16, 17, 20, and 21, heretofore
described.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

N. 85° 53' W., between secs. 17 and 20.

- 16.00 East Fork of Baker Creek, 10 lks. wide, 10 ins. deep, course southwest.
- 19.79 The point for the east 1/16 sec. cor. of secs. 17 and 20.
Set an iron post, 28 ins. long, 2½ ins. in diam., on bedrock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

E 1/16 $\frac{S\ 17}{S\ 20}$

1966

from which

A juniper tree, 5 ins. in diam., bears N. 53° 45' E., 62 lks. distant, scribed E 1/16 S17 BT.

A pine tree, 10 ins. in diam., bears S. 68° 00' E., 22 lks. distant, scribed E 1/16 S20 BT.

- 20.40 Ridge, bears northeast and southwest.
- 25.50 North Fork of Baker Creek, 10 lks. wide, 10 ins. deep, course south.
- 39.58 The 1/4 sec. cor. of secs. 17 and 20 is monumented with an unmarked stone, 20 x 17 x 7 ins., firmly set 10 ins. in the ground.

substantiated by:

A mound of stone, 3 ft. base, 2 ft. high, south of the corner. I rebuilt this mound of stone.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4 $\frac{S\ 17}{S\ 20}$

1966

Deposit the stone monument alongside the iron post, at the base of the above mound of stone.

-
- N. 85° 26' W., beginning new measurement.
- 27.10 Beaver River, 80 lks. wide, 1 ft. deep, course northwest.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

37.05 Draw, drains north.

39.62 The point for the cor. of secs. 17, 18, 19, and 20 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
S 18 | S 17
S 19 | S 20

1966

from which

A juniper tree, 4 ins. in diam., bears S. 16° 15' W., 19 lks. distant, scribed X BT.

A (gnarled) juniper tree, 6 ins. in diam., bears S. 89° 30' W., 67 lks. distant, scribed X BT.

From this corner, the 1/4 sec. cor. of secs. 29 and 30 bears S. 0° 10' W., 123.83 chs. distant, and is monumented with a lava stone, 18 x 15 x 5 ins., firmly set ins. in the ground, mkd. with 1/4 on the west.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4
S 30 | S 29

1966

Deposit the lava stone monument alongside the iron post, at the base of the above mound of stone.

from which

A pine tree, 15 ins. in diam., bears N. 85° 30' E., 29 lks. distant, scribed 1/4 S29 BT.

A pine tree, 12 ins. in diam., bears S. 32° 00' W., 37 lks. distant, scribed 1/4 S30 BT.

N. 89° 16' W., between secs. 18 and 19.

18.80 Draw, drains northeast.

32.00 Ridge, bears north and south.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

236

CHAINS

- 39.00 Draw, drains northwest.
- 39.74 The 1/4 sec. cor. of secs. 18 and 19 is monumented with a lava stone, 25 x 10 x 5 ins., firmly set 7 ins. in the ground and in a mound of stone, 3 ft. base, mkd. with 1/4 on the north.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4 $\frac{S\ 18}{S\ 19}$

1966

Deposit the lava stone monument alongside the iron post, at the base of the above mound of stone.

from which

A pine tree, 6 ins. in diam., bears N. 72° 30' E., 58 lks. distant, scribed 1/4 S18 BT.

A pine tree, 10 ins. in diam., bears S. 3° 15' E., 32 lks. distant, scribed 1/4 S19 BT.

Discontinue the regular order of survey at this corner.

From the cor. of secs. 17, 18, 19, and 20, heretofore described.

N. 0° 26' E., between secs. 17 and 18.

- 5.70 Beaver River, 50 lks. wide, 1 ft. deep, course west.
- 16.00 Draw, drains southwest.
- 41.28 The point for the 1/4 sec. cor. of secs. 17 and 18 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R6W
1/4
S 18 | S 17

1966

from which

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

A pine tree, 10 ins. in diam., bears S. 58° 15' W.,
84 lks. distant, scribed 1/4 S18 BT.

A pine tree, 4 ins. in diam., bears N. 63° 30' W.,
52 lks. distant, scribed X BT.

This corner is located 59 lks. distant, west of a north
and south fence line.

82.56 The cor. of secs. 17 and 18 on the south boundary of
section 7, heretofore described.

Restoring the Survey Executed by Page and Swan,
U. S. Deputy Surveyors, in 1897

The cor. of secs. 4, 5, 32, and 33 on the north boundary
of the township, which is monumented with a stone, 24 x
11 x 5 ins., loosely set 11 ins. in the ground, mkd. with
4 notches on the east and 2 notches on the west.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

T28S R6W
S 32 S 33
S 5 S 4
T29S

1966

Deposit the stone monument alongside the iron post, at
the base of the above mound of stone.

S. 0° 03' W., between secs. 4 and 5.

9.30 Draw, drains southwest.

23.50 Draw, drains west.

39.75 The 1/4 sec. cor. of secs. 4 and 5 is marked with a wood
post, 23 ins. long, 3 ins. in diam., firmly set in a
mound of stone, 3 ft. base, 1 ft. high, and is accepted
as the best available evidence of the position of the
original corner.

At the corner point

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

238

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W

1/4

S 5 | S 4

1966

Deposit the wood post corner marker alongside the iron post at the base of the above mound of stone.

S. 0° 03' E., beginning new measurement.

1.10 Draw, drains west.

40.17 The cor. of secs. 4, 5, 8, and 9 is monumented with a stone, 20 x 9 x 9 ins., firmly set 11 ins. in the ground, mkd. with 5 notches on the south and 4 notches on the east.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W

S 5 | S 4

S 8 | S 9

1966

Deposit the stone monument alongside the iron post, at the base of the above mound of stone.

from which

A juniper tree, 6 ins. in diam., bears N. 72° 45' E., 27 lks. distant, scribed T29S R6W S4 BT.

A mountain-mahogany tree, 14 ins. in diam., bears S. 7° 00' E., 88 lks. distant, scribed T29S R6W S9 BT.

S. 0° 11' E., between secs. 8 and 9.

7.50 Black Ridge, slopes to the southwest.

39.82 The 1/4 sec. cor. of secs. 8 and 9 is monumented with a stone, 16 x 8 x 7 ins., firmly set 9 ins. in the ground, mkd. 1/4 on the west.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W

1/4

S 8 | S 9

1966

Deposit the stone monument alongside the iron post, at the base of the above mound of stone.

from which

A juniper tree, 8 ins. in diam., bears S. $21^{\circ} 30'$ E., 60 lks. distant, scribed $1/4$ S9 BT.

A juniper tree, 6 ins. in diam., bears N. $33^{\circ} 45'$ W., 9 lks. distant, scribed $1/4$ S8 BT.

S. $0^{\circ} 43'$ W., beginning new measurement.

40.62 The original closing corner of secs 8 and 9, which is monumented with a stone, 24 x 10 x 10 ins., firmly set 7 ins. in the ground, mkd. CC on the north, 4 grooves on the south, and 4 grooves on the east. This original closing corner monument is designated as an Amended Monument. I added AM on the north side and reset, with the top 3 ins. below the surface of the ground.

Continue on a projection of the above (back) line through this original closing corner, and continue with the measurement.

40.66 Intersect the north boundary of sec. 16, the point for the closing corner of secs. 8 and 9.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W

C | C

S 8 | S 9

S 16

1966

From this closing corner, the cor. of secs. 16 and 17 bears WEST, 4.39 chs. distant, heretofore described.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

240

CHAINS

Thence, in section 16

From the 1/4 sec. cor. of secs. 16 and 21.

N. 1° 53' E., on the north and south center line of sec. 16.

10.00 The confluence of two draws, drains northwest.

21.19 The point for the center-south 1/16 sec. cor. of sec. 16.

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

C S 1/16
S 16

1966

from which

A mountain-mahogany tree, 4 ins. in diam., bears N. 74° 00' W., 47 lks. distant, scribed C S 1/16 S16 BT.

A mountain-mahogany tree, 4 ins. in diam., bears N. 2° 45' W., 39 lks. distant, scribed X BT.

23.30 East Fork of Baker Creek, 10 lks. wide, 8 ins. deep, course southwest.

42.38 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 16.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
C 1/4
S 16

1966

from which

A juniper tree, 10 ins. in diam., bears S. 5° 30' E., 60 lks. distant, scribed C 1/4 S16 BT.

A juniper tree, 10 ins. in diam., bears N. 68° 30' W., 140 lks. distant, scribed C 1/4 S16 BT.

51.55 Draw, drains west.

60.25 Draw, drains west.

63.50 The point for the center-north 1/16 sec. cor. of sec. 16.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivision Lines
 within Sections 16, 17, 25, and 36
 Township 29 South, Range 6 West
 Salt Lake Meridian, Utah

CHAINS	
	C N 1/16 S 16 1966
	from which
	A juniper tree, 8 ins. in diam., bears S. 54° 30' E. 17 lks. distant, scribed C N 1/16 S16 BT.
	A juniper tree, 8 ins. in diam., bears S. 9° 30' W., 91 lks. distant, scribed C N 1/16 S16 BT.
70.30	Draw, drains southwest.
84.62	The north 1/4 sec. cor. of sec. 16 on the south boundary of sec. 9, heretofore described.
<hr/>	
	From the 1/4 sec. cor. of secs. 15 and 16, heretofore described.
	S. 89° 38' W., on the east and west center line of sec. 16.
39.85	Intersect the north and south center line, the center 1/4 sec. cor. of sec. 16.
59.82	The point for the center-west 1/16 sec. cor. of sec. 16.
	Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.
	C W 1/16 S 16 1966
79.79	The 1/4 sec. cor. of secs. 16 and 17, heretofore described.
<hr/>	
	From the center-north 1/16 sec. cor. of sec. 16.
	S. 89° 49' W., on the east and west center line of the northwest 1/4 of sec. 16.
40.00	The north 1/16 sec. cor. of secs. 16 and 17.
<hr/>	

242

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

From the west 1/16 sec. cor. of secs. 16 and 21.

N. 1° 48' E., on the north and south center line of the southwest 1/4 of sec. 16.

21.21 Intersect the east and west center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 16.

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a collar of stone, with brass cap mkd.

SW 1/16
S 16

1966

from which

A juniper tree, 4 ins. in diam., bears N. 88° 00' E., 52 lks. distant, scribed X BT.

A pine tree, 4 ins. in diam., bears S. 59° 00' E., 30 lks. distant, scribed SW 1/16 S16 BT.

42.41 Intersect the east and west center line, the center-west 1/16 sec. cor. of sec. 16.

From the center-south 1/16 sec. cor. of sec. 16.

S. 89° 29' W., on the east and west center line of the southwest 1/4 of sec. 16.

19.92 Intersect the north and south center line of the southwest 1/4, the southwest 1/16 sec. cor. of sec. 16.

39.84 The south 1/16 sec. cor. of secs. 16 and 17, heretofore described.

Thence, in section 17

From the 1/4 sec. cor. of secs. 17 and 20, heretofore described.

N. 1° 08' E., on the north and south center line of sec. 17.

22.47 The point for the center-south 1/16 sec. cor. of sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

C S
1/16
S 17

1966

from which

A pine tree, 4 ins. in diam., bears S. 70° 00' E.,
49 lks. distant, scribed C S 1/16 S17 BT.

A juniper tree, 12 ins. in diam., bears S. 8° 45'
W., 43 lks. distant, scribed X BT.

44.94

Intersect the east and west center line, the point for
center 1/4 sec. cor. of sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., on bed
rock, and in a mound of stone, 3 ft. base, to the top,
with brass cap mkd.

T29S R6W
C 1/4
S 17

1966

from which

A juniper tree, 8 ins. in diam., bears N. 46° 45'
E., 25 lks. distant, scribed C 1/4 S17 BT.

A juniper tree, 10 ins. in diam., bears S. 80° 30'
W., 21 lks. distant, scribed C 1/4 S17 BT.

65.86

The point for the center-north 1/16 sec. cor. of sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins.
in the ground, and in a mound of stone, 2½ ft. base, to
the top, with brass cap mkd.

C N
1/16
S 17

1966

from which

A juniper tree, 8 ins. in diam., bears S. 55° 15'
W., 56 lks. distant, scribed C N 1/16 S17 BT.

A juniper tree, 4 ins. in diam., bears N. 14° 15'
W., 37 lks. distant, scribed X BT.

86.78

The north 1/4 sec. cor. of sec. 17 on the south boundary
of sec. 8, heretofore described.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

244

CHAINS

From the 1/4 sec. cor. of secs. 16 and 17.

S. 89° 27' W., on the east and west center line of sec. 17.

19.97 The point for the center-east 1/16 sec. cor. of sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

C E
1/16
S 17

1966

from which

A juniper tree, 4 ins. in diam., bears S. 69° 00' W., 24 lks. distant, scribed C E 1/16 S17 BT.

A juniper tree, 6 ins. in diam., bears N. 45° 00' W., 31 lks. distant, scribed C E 1/16 S17 BT.

39.94 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 17.

79.35 Fence line, traverses north and south.

79.94 The 1/4 sec. cor. of secs. 17 and 18, heretofore described.

From the center-east 1/16 sec. cor. of sec. 17.

N. 1° 26' E., on the north and south center line of the northeast 1/4 of sec. 17.

21.11 Intersect the east and west center line of the northeast 1/4, the point for the northeast 1/16 sec. cor. of sec. 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

NE 1/16
S 17

1966

from which

A juniper tree, 4 ins. in diam., bears N. 88° 30' E., 67 lks. distant, scribed NE 1/16 S17 BT.

A juniper tree, 8 ins. in diam., bears N. 6° 00' W. 26 lks. distant, scribed NE 1/16 S17 BT.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

- 42.20 The east 1/16 sec. cor. of sec. 17 (only) on the south boundary of sec. 8, heretofore described.
- From the north 1/16 sec. cor. of secs. 16 and 17.
- S. 89° 00' W., on the east and west center line of the northeast 1/4 of sec. 17.
- 20.09 Intersect the north and south center line of the northeast 1/4, the northeast 1/16 sec. cor. of sec. 17.
- 40.18 Intersect the north and south center line, the center-north 1/16 sec. cor. of sec. 17.
- From the east 1/16 sec. cor. of secs. 17 and 20.
- N. 1° 26' E., on the north and south center line of the southeast 1/4 of sec. 17.
- 21.84 Intersect the east and west center line of the southeast 1/4, the point for the southeast 1/16 sec. cor. of sec. 17.
- Set an iron post, 28 ins. long, 2½ ins. in diam., on top of rock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.
- SE 1/16
S 17

1966
- from which
- A juniper tree, 4 ins. in diam., bears S. 79° 45' E., 27 lks. distant, scribed X BT.
- A pine tree, 10 ins. in diam., bears N. 16° 15' W., 38 lks. distant, scribed SE 1/16 S17 BT.
- 43.70 Intersect the east and west center line, the center-east 1/16 sec. cor. of sec. 17.
- From the south 1/16 sec. cor. of secs. 16 and 17
- S. 87° 37' W., on the east and west center line of the southeast 1/4 of sec. 17.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

19.90 Intersect the north and south center line of the southeast 1/4, the southeast 1/16 sec. cor. of sec. 17.

39.80 Intersect the north and south center line, the center-south 1/16 sec. cor. of sec. 17.

Thence, in section 25

From the 1/4 sec. cor. of secs. 25 and 36.

N. 1° 00' W., on the north and south center line of sec. 25.

19.90 The point for the center-south 1/16 sec. cor. of sec. 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T29S R6W
C S 1/16
S 25

1969

from which

A fir tree, 10 ins. in diam., bears N. 63° 00' E., 35 lks. distant, scribed T29S R6W C S 1/16 S25 BT.

An aspen tree, 8 ins. in diam., bears N. 52° 00' W., 28 lks. distant, scribed T29S R6W C S 1/16 S25 BT.

39.80 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 25.

An iron pipe, 60 ins. long, 1-inch in diam., placed at the corner point and driven 40 ins. in the ground.

from which

An iron post, 28 ins. long, 2½ ins. in diam., set 20 ins. in the ground, for a reference monument, bears WEST, 96 ft. distant, with brass cap mkd. RM T29S R6W S25 96 FT 1969, and an arrow pointing to the corner.

An iron post, 28 ins. long, 2½ ins. in diam., set 23 ins. in the ground, for a reference monument, bears N. 7° 30' W., 120 ft. distant, with brass cap mkd. RM T29S R6W S25 120 FT 1969, and an arrow pointing to the corner.

This corner is located near the western edge of a small reservoir.

58.70 The point for the center-north 1/16 sec. cor. of sec. 25.

247
Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, with brass cap mkd.

T29S R6W
C N 1/16
S 25

1969

from which

An aspen tree, 6 ins. in diam., bears N. 35° 00' E
31 lks. distant, scribed T29S R6W C N 1/16 S25 BT.

An aspen tree, 8 ins. in diam., bears S. 42° 00' E
31 lks. distant, scribed T29S R6W C N 1/16 S25 BT.

77.60 The 1/4 sec. cor. of secs. 24 and 25.

From the 1/4 sec. cor. of secs. 25 and 30 on the east boundary of the township.

N. 86° 34' W., on the east and west center line of sec. 25.

19.62 The point for the center-east 1/16 sec. cor. of sec. 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, with brass cap mkd.

T29S R6W
C E 1/16
S 25

1969

from which

A pine tree, 6 ins. in diam., bears S. 6° 00' W.,
66 lks. distant, scribed T29S R6W C E 1/16 S25 BT.

A pine tree, 8 ins. in diam., bears N. 63° 00' W.,
49 lks. distant, scribed T29S R6W C E 1/16 S25 BT.

39.24 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 25.

57.80 The point for the center-west 1/16 sec. cor. of sec. 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

248

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

T29S R6W
C W 1/16
S 25

1969

from which

A pine tree, 8 ins. in diam., bears N. 60° 00' E.,
47 lks. distant, scribed T29S R6W C W 1/16 S25 BT.

A pine tree, 18 ins. in diam., bears N. 63° 00' W.,
38 lks. distant, scribed T29S R6W C W 1/16 S25 BT.

76.36 The 1/4 sec. cor. of secs. 25 and 26.

From the center-east 1/16 sec. cor. of sec. 25.

N. 0° 26' W., on the north and south center line of the
northeast 1/4 of sec. 25.

19.08 Intersect the east and west center line of the northeast
1/4, the point for the northeast 1/16 sec. cor. of sec.
25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins.
in the ground, with brass cap mkd.

T29S R6W
NE 1/16
S 25

1969

from which

A pine tree, 12 ins. in diam., bears S. 55° 00' E.,
38 lks. distant, scribed T29S R6W NE 1/16 S25 BT.

A pine tree, 12 ins. in diam., bears S. 63° 00' W.,
41 lks. distant, scribed T29S R6W NE 1/16 S25 BT.

38.17 The east 1/16 sec. cor. of secs. 24 and 25.

From the north 1/16 sec. cor. of secs. 25 and 30 on the
east boundary of the township.

N. 87° 08' W., on the east and west center line of the
northeast 1/4 of sec. 25.

19.80 Intersect the north and south center line of the north-
east 1/4, the northeast 1/16 sec. cor. of sec. 25.

39.60 Intersect the north and south center line, the center-
north 1/16 sec. cor. of sec. 25.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

- From the center-west 1/16 sec. cor. of sec. 25.
N. 0° 14' W., on the north and south center line of the northwest 1/4 of sec. 25.
- 18.78 Intersect the east and west center line of the northwest 1/4, the point for the northwest 1/16 sec. cor. of sec. 25.
Set an iron post, 28 ins. long, 2½ ins. in diam., on bed-rock, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.
- T29S R6W
NW 1/16
S 25
1969
- from which
A pine tree, 12 ins. in diam., bears N. 87° 00' W., 79 lks. distant, scribed T29S R6W NW 1/16 S25 BT.
- 37.57 The west 1/16 sec. cor. of secs. 24 and 25.
-
- From the center-north 1/16 sec. cor. of sec. 25.
N. 86° 53' W., on the east and west center line of the northwest 1/4 of sec. 25.
- 18.30 Intersect the north and south center line of the northwest 1/4, the northwest 1/16 sec. cor. of sec. 25.
- 36.60 The north 1/16 sec. cor. of secs. 25 and 26.
-
- From the west 1/16 sec. cor. of secs. 25 and 36.
N. 0° 03' E., on the north and south center line of the southwest 1/4 of sec. 25.
- 19.86 Intersect the east and west center line of the southwest 1/4, the point for the southwest 1/16 sec. cor. of sec. 25.
Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.
- T29S R6W
SW 1/16
S 25
1969

Survey of a Portion of the Subdivision Lines
 within Sections 16, 17, 25, and 36
 Township 29 South, Range 6 West
 Salt Lake Meridian, Utah

250.

CHAINS

from which

A pine tree, 8 ins. in diam., bears N. 50° 00' E.,
 78 lks. distant, scribed T29S R6W SW 1/16 S25 BT.

A pine tree, 24 ins. in diam., bears N. 37° 00' W.,
 51 lks. distant, scribed T29S R6W SW 1/16 S25 BT.

39.72 Intersect the east and west center line, the center-west
 1/16 sec. cor. of sec. 25.

From the center-south 1/16 sec. cor. of sec. 25.

N. 86° 31' W., on the east and west center line of the
 southwest 1/4 of sec. 25.

18.93 Intersect the north and south center line of the south-
 west 1/4, the southwest 1/16 sec. cor. of sec. 25.

37.87 The south 1/16 sec. cor. of secs. 25 and 26.

From the true point for the east 1/16 sec. cor. of secs.
 25 and 36, heretofore described.

N. 0° 33' W., on the north and south center line of the
 southeast 1/4 of sec. 25.

19.89 Intersect the east and west center line of the southeast
 1/4, the point for the southeast 1/16 sec. cor. of sec.
 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins.
 in the ground, with brass cap mkd.

T29S R6W
 SE 1/16
 S 25

1969

from which

A pine tree, 12 ins. in diam., bears N. 77° 00' E.,
 64 lks. distant, scribed T29S R6W SE 1/16 S25 BT.

A pine tree, 10 ins. in diam., bears N. 62° 00' W.,
 20 lks. distant, scribed T29S R6W SE 1/16 S25 BT.

39.80 Intersect the east and west center line, the center-east
 1/16 sec. cor. of sec. 25.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

From the south 1/16 sec. cor. of secs. 25 and 30 on the east boundary of the township.

N. 86° 31' W., on the east and west center line of the southeast 1/4 of sec. 25.

19.46 Intersect the north and south center line of the southeast 1/4, the southeast 1/16 sec. cor. of sec. 25.

38.92 Intersect the north and south center line, the center-south 1/16 sec. cor. of sec. 25.

Thence, in section 36

From the 1/4 sec. cor. of secs. 1 and 36 on the south boundary of the township.

N. 1° 10' E., on the north and south center line of sec. 36.

20.14 The point for the center-south 1/16 sec. cor. of sec. 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
C S 1/16
S 36

1969

from which

A fir tree, 6 ins. in diam., bears N. 45° 00' E., 6 lks. distant, scribed T29S R6W C S 1/16 S36. BT.

A fir tree, 10 ins. in diam., bears S. 45° 00' W., 11 lks. distant, scribed T29S R6W C S 1/16 S36 BT.

40.28 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
C 1/4
S 36

1969

from which

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

A fir tree, 8 ins. in diam., bears S. 28° 00' W.,
33 lks. distant, scribed T29S R6W C 1/4 S36 BT.

A fir tree, 8 ins. in diam., bears WEST, 49 lks.
distant, scribed T29S R6W C 1/4 S36 BT.

80.56 The 1/4 sec. cor. of secs. 25 and 36.

From the 1/4 sec. cor. of secs. 31 and 36 on the east
boundary of the township.

N. 87° 13' W., on the east and west center line of sec.
36.

20.25 The point for the center-east 1/16 sec. cor. of sec. 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

T29S R6W
C E 1/16
S 36

1969

from which

A pine tree, 24 ins. in diam., bears S. 32° 30' E.,
74 lks. distant, scribed T29S R6W C E 1/16 S36 BT.

A pine tree, 30 ins. in diam., bears N. 61° 00' W.,
141 lks. distant, scribed T29S R6W C E 1/16 S36 BT.

40.50 Intersect the north and south center line, the center
1/4 sec. cor. of sec. 36.

79.23 The 1/4 sec. cor. of secs. 35 and 36.

From the center-east 1/16 sec. cor. of sec. 36.

N. 0° 12' W. on the north and south center line of the
northeast 1/4 of sec. 36.

40.09 The true point for the east 1/16 sec. cor. of secs. 25
and 36, heretofore described.

From the center-south 1/16 sec. cor. of sec. 36.

N. 87° 33' W., on the east and west center line of the
southwest 1/4 of sec. 36.

Survey of a Portion of the Subdivision Lines
within Sections 16, 17, 25, and 36
Township 29 South, Range 6 West
Salt Lake Meridian, Utah

CHAINS

38.80 The south 1/16 sec. cor. of secs. 35 and 36.

From the east 1/16 sec. cor. of secs. 1 and 36 on the south boundary of the township.

N. 1° 56' E., on the north and south center line of the southeast 1/4 of sec. 36.

19.97 Intersect the east and west center line of the southeast 1/4, the point for the southeast 1/16 sec. cor. of sec. 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R6W
SE 1/16
S 36

1969

from which

A fir tree, 20 ins. in diam., bears S. 72° 00' E., 18 lks. distant, scribed T29S R6W SE 1/16 S36 BT.

An aspen tree, 6 ins. in diam., bears S. 32° 00' W., 8 lks. distant, scribed T29S R6W SE 1/16 S36 BT.

39.94 Intersect the east and west center line, the center-east 1/16 sec. cor. of sec. 36.

From the south 1/16 sec. cor. of secs. 31 and 36 on the east boundary of the township.

N. 87° 42' W. on the east and west center line of the southeast 1/4 of sec. 36.

19.97 Intersect the north and south center line of the southeast 1/4, the southeast 1/16 sec. cor. of sec. 36.

39.94 Intersect the north and south center line, the center-south 1/16 sec. cor. of sec. 36.

GENERAL DESCRIPTION

The area of these surveys is mountainous. Timber consists of juniper, pine, fir, spruce, oak, aspen, and mountain-mahogany; undergrowth young trees, brush and grass.

The major water courses are Beaver River and Baker Creek with their tributaries.

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Klaus P. Hendrix	Cadastral Surveyor
James S. Pritchard	Surveying Aid
Robert W. Fisher	Surveying Aid
Howard H. Hampton	Surveying Aid
Douglas C. Tapia	Surveying Aid
Delbert B. Pierce	Surveying Aid
Terry S. Dabel	Surveying Aid
Rodney J. Busk	Surveying Aid
Robert T. Brown	Surveying Aid
Dennis D. Cox	Surveying Aid
Lanny D. Sampson	Surveying Aid
David B. Coddling	Surveying Aid

CERTIFICATE OF SURVEY

(I)(We), Richard D. Snider, Ray Harpin, and Henry U. Lang, HER... CERTIFY upon honor that, in pursuance of special instructions bearing date of the 24th of August, 1965, (I)(We) have dependently resurveyed a portion the south and east boundaries and a portion of the subdivisional lines and surveyed a portion of the subdivision lines within sections 16, 17, 25, and 36, Township 29 South, Range 6 West,

of the Salt Lake Meridian, in the State of Utah, which boundaries are represented in the foregoing field notes as having been executed by (I)(We), (us) and under (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

February 17, 1977

Ray Harpin
Ray Harpin (Cadastral Surveyor)

March 21, 1977
(Date)

Allan E. Arnold
Allan E. Arnold (Cadastral Surveyor) Chief, Branch of

Cadastral Survey, certifying for Richard D. Snider and Henry U. Lang, Cadastral Surveyors who are no longer employed by this Bureau and are not available for signature.

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, and the survey of a portion of the subdivision lines with sections 16, 17, 25, and 36, Township 29 South, Range 6 West, of the Salt Lake Meridian, Utah,

executed by Richard D. Snider, Ray Harpin, and Henry U. Lang, Cadastral Surveyors having been critically examined and found correct, are hereby approved.

MAR 29 1977
(Date)

Robert T. ...
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-1

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF A

PORTION OF THE SOUTH AND EAST

BOUNDARIES, AND A PORTION OF

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 42 SOUTH, RANGE 15 WEST

1256

1729

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated January 3, 19 73, approved January 3, 1973

_____, which provided for the surveys included under U.S. Survey Group

Number 543, and assignment instructions dated March 13, 19 73

Survey commenced April 25, 19 73

Survey completed April 27, 19 73

INDEX DIAGRAM

Township 42 South, Range 15 West,

6	5	4	3	2	1	
7	8	9	10	11	12	
					14	
18	17	16	15	14	13	7
					13	
					12	
19	20	21	22	23	11	5
					15	
					24	
					10	
30	29	28	27	26	9	4
					25	
					8	
31	32	33	34	35	36	3
					2	

Township 42 South, Range 15 West, Salt Lake Meridian, Utah

CHAINS

T. 42 S., R. 15 W.

History of Surveys

Surveyed by Retr. or Resurveyed by

BOUNDARY

All	Julian Bausman	1870		
			M.H. Dalley	1900
			A.J. Stewart & L.A.	
			Snow	1909

SOUTH BOUNDARY

All	Joseph Gorlinski			
		1870		
			W. Jenkins & J.A.	
			West	1897
			M.H. Dalley	1900

EAST BOUNDARY

All	Joseph Gorlinski			
		1870		
			M.H. Dalley	1899

WEST BOUNDARY

N. 2½ miles	T.C. Bailey	1877		
			All M.H. Dalley	1900
			N. 3 miles G.B. Hatch	1968
S. 3½ miles	Joseph Gorlinski			
		1870		

SUBDIVISIONS

Major portion	Joseph Gorlinski			
		1870		
			Portion, M.H. Dalley	
				1900
Minor portion	M.H. Dalley	1900		

The following field notes are those of the dependent re-survey of a portion of the south and east boundaries and a portion of the subdivisional lines of Township 42 South, Range 15 West, Salt Lake Meridian, Utah

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated January 3, 1973.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on polaris taken throughout the progress of the survey.

The geographic position for the southeast corner of the township, as determined from a tie made to U.S.G.S.

Township 42 South, Range 15 West, Salt Lake Meridian,

CHAINS

triangulation station "George", located in the NE. corner of sec. 7, T. 43 S., R. 15 W., is;

Latitude: 37° 04' 54" N. Longitude: 113° 28' 34" W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be 16° East.

Dependent Resurvey of a Portion of the South Boundary, of T. 42 S., R. 15 W., Salt Lake Meridian, Utah (Restoring the 1900 Resurvey by M.H. Dalley)

Beginning at the cor. of Tps. 42 and 43 S., R. 15 W., set, mkd. and witnessed as described in the field notes of the concurrent resurvey of the E. bdy. of T. 43 S., R. 15 W.

S. 89° 27' W., bet. secs. 1 and 36.

Over nearly level land, with scattered shadscale, chaparral, weeds and grass.

40.14 The 1/4 sec. cor. of secs. 1 and 36, monumented with a sandstone, 18x10x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W

1/4 S36
S1

T43S R15W
1973

Deposit the original cor. stone alongside iron post.

Set a pine post, 4x4 ins., 6 ft. long, alongside.

S. 89° 27' W., beginning new measurement.

20.07 Point for the W. 1/16 sec. cor. of secs. 1 and 36, falls on earth filled dam for stock reservoir, under construction, and cannot be monumented. From this point a fence cor. bears N. 20° 13' W., 20 lks. dist., fences bear N. and S. 89° 27' W.

23.07 Point selected for the witness W 1/16 sec. cor. of secs. 1 and 36.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

WC

T42S R15W

W 1/16 S36
S1

T43S R15W
1973

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

Set a cedar post, 6 ft. long, alongside.

Dependent Resurvey of a Portion of the S. bdy. of
T. 42 S., R. 15 W. Salt Lake Meridian Utah

CHAINS

40.14

Point for the cor. of secs. 1, 2, 35 and 36, determined by center of road right-of-way from W. (2 rods wide), and in 1973 set with fence line from the S. There is no remaining evidence of the original cor.

At the cor. point

Deposit broken glass, 1 ft. below surface of road.

From which

An iron post, 30 ins. long, 2½ ins. in diam., set 24 ins. in the ground, for a reference monument, bears N. 45° E., 23 ft. dist., with brass cap mkd. T42S R15W RM S36 23 FT 1973 and an arrow pointing to the true cor.

An iron post, 30 ins. long, 2½ ins. in diam., set 24 ins. in the ground, for a reference monument, bears N. 45° W., 23 ft. dist., with brass cap mkd. T42S R15W RM S35 23 FT 1973 and an arrow pointing to the true cor.

Cor. of fence bears S. 0° 10' E., 25 lks. dist., fences bear W. and S. 0° 10' E.

E-W fence line, bears N., 25 lks. dist.

Dependent Resurvey of a Portion of the East Boundary
of T. 42 S., R. 15 W., Salt Lake Meridian, Utah
(Restoring the 1899 resurvey by M.H. Dalley)

From the cor. of Tps. 42 and 43 S., R. 15 W.

N. 0° 36' W., along E. bdy. of sec. 36.

Over rolling land, with scattered shadscale and chapparral.

8.75 Fence line, bears N. 45° W. and S. 45° E.

34.50 Wash, 15 lks. wide, 1½ ft. deep, drains SW.; ascend over gentle SE. slope.

36.40 Trail road, bears NE. and SW.

40.26 The ¼ sec. cor. of sec. 36, monumented with a sandstone, 24x8x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S
R15W R14W
¼ |
S36 |
|
1973

Deposit the original cor. stone alongside iron post.

Set a pine post, 4x4 ins., 5 ft. long, alongside.

Dependent Resurvey of a Portion of the E. Boundary
T. 42 S. R. 15 W. Salt Lake Meridian

HAINS

N. 0° 25' W., beginning new measurement.

Asc. over SE. slope.

39.75 Small draw, drains SE.

40.15 The cor. of secs. 25 and 36, monumented with a limestone, 15x10x3 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S
R15W R14W

S25 |
S36 | S31

1973

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Deposit the original cor. stone alongside the iron post.

N. 0° 31' W., along E. bdy. of sec. 25.

Over rolling land, with scattered shadscale, weeds and grass; along W. slope.

1.50 Slope changes; ascend over SE. slope.

6.50 Top of spur, slopes E.; descend over NE. slope.

8.60 Bottom of draw, drains SE.; ascend over SW. slope.

16.00 Top of spur, slopes SE.; ascend over gentle S. slope.

28.90 Top of ridge, bears NE. and SW.; descend over NW. slope.

39.70 Wash, 5 lks. wide, 1 ft. deep, drains NW.; also base of ridge, bears NE. and SW., over rolling land.

39.99 The ¼ sec. cor. of sec. 25, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S
R15W R14W

¼ |
S25 |

1973

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Deposit the original cor. stone alongside iron post.

Dependent Resurvey of a Portion of the E. Boundary
of T. 42 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

N. 0° 17' W., beginning new measurement.

Over rolling land; descend over NW. slope.

20.35 Point for the N. 1/16 sec. cor. of sec. 25.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

T42S
R15W R14W
N $\frac{1}{16}$ |
S25 |
1973

Cor. of fences, which bear S. and W., bears N. 12° 48' E.,
23 lks. dist.

40.70 The cor. of secs. 24 and 25, monumented with a limestone,
16x10x6 ins., firmly set and plainly mkd. with 4 notches
on the N. and 2 on the S. edges. At the cor. of fences,
which bear N., S. and N. 88° E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

T42S
R15W R14W
S24 | S30
S25 |
1973

Deposit the original cor. stone alongside iron post.

N. 0° 44' W., along E. bdy. of sec. 24.

Over gentle rolling land, with scattered shadscale, sage-
brush, weeds and grass; descend over sandy N. slope.

13.48 Power line, bears E. and W.

20.00 Dirt road, bears E. and W.

20.16 Leave fence, that bears E.

40.27 The ¼ sec. cor. of sec. 24, monumented with a sandstone,
24x14x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

T42S
R15W R14W
¼ |
S24 |
1973

Deposit the original cor. stone alongside iron post.

Dependent Resurvey of a Portion of the E. Boundary
of T. 42 S., R. 15 W., Salt Lake County, Utah

CHAINS	
	N. 0° 42' W., beginning new measurement.
	Over rolling land.
0.65	Irrigation canal, flows SW.
7.39	Point for the original witness meander cor. of secs. 19 and 24. There is no remaining evidence of the original cor. Not monumented.
13.55	Point selected for the witness meander cor. of sec. 24 only.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	Set a cottonwood post, 5 ft. long, alongside.
18.80	Proportionate point for the original meander cor. of secs. 19 and 24 on the left bank of the Virgin River. Not monumented.
18.97	Present mean high water mark, on the left bank of the Virgin River, bears S. 76° 41' W. and N. 76° 41' E. True point for the meander cor. of sec. 24, T. 42 S., R. 15 W., falls on loose sandy bank and cannot be monumented; thence across river.
24.04	Point for the original meander cor. of secs. 19 and 24, on Right Bank of Virgin River, at proportionate dist., now falls in river.
24.14	Present mean high water mark on the right bank of the Virgin River, bears S. 67° 56' W. and N. 67° 56' E., falls on loose sandy bank and cannot be monumented.
24.41	Point selected for the witness meander cor. of secs. 19 and 24, on the right bank of the river.
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	At base of high ridge, bears NE. and S. 70° W.; ascend over steep rocky SE. slope.
27.80	Top of ridge, bears NE. and SW.; descend over NW. slope to cor.
40.74	The cor. of secs. 13 and 24, monumented with a sandstone, 18x13x5 ins., firmly set and plainly mkd. with 3 notches

Dependent Resurvey of a Portion of the E. Boundary
of T. 42 S. R. 15 W. Salt Lake Meridian, Utah

CHAINS

on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in
the ground and in a mound of stone, 4½ ft. base to top,
with brass cap mkd.

T42S
R15W R14W

S13|
S24| S19
1973

Deposit the original cor. stone in mound alongside
iron post.

N. 0° 18' W., along E. bdy. of sec. 13.

Over rolling and broken land, with scattered shadscale,
weeds and grass; descend over N. slope.

12.10 Bottom of deep ravine, drains W.; ascend steep rocky S.
slope.

19.20 Top of ridge, bears E. and W.; descend over gentle N.
slope.

33.50 Slope change; descend over rocky NW. slope.

38.10 Telephone line, bears N. 55° E. and S. 55° W.

40.00 The ¼ sec. cor. of sec. 13, monumented with a basalt
stone, 20x10x7 ins., firmly set and plainly mkd. ¼ on W.
face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
the ground and in a mound of stone, 4½ ft. base to top,
with brass cap mkd.

T42S
R15W R14W

¼|
S13|
1973

Deposit the original cor. stone alongside iron post.

N. 0° 20' W., beginning new measurement.

14.40 Old U.S. Highway No. 91, curves NE. and SW.

22.75 Power line, to ranches, bears NE. and SW.

23.40 Wash, 20 lks. wide, 1 ft. deep, drains SW.; ascend over
SE. slope.

40.00 The cor. of secs. 12 and 13, monumented with a basalt
stone, 16x10x6 ins., firmly set and plainly mkd. with 4
notches on the S. and 2 on the N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the E. Boundary
of T. 42 S., R. 15 W., Salt Lake Meridian Utah

CHAINS

T42S
R15W R14W

$\frac{S12}{S13}$ | S18
1973

Deposit the original cor. stone alongside iron post.

Set a post, 4x6 ins., 4 ft. long, alongside.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 15 W., Salt Lake Meridian, Utah

(Restoring the 1900 Survey by M.H. Dalley)

From the cor. of secs. 25 and 36, on the E. bdy. of the
Tp.

S. 89° 56' W., bet. secs. 25 and 36.

Over rolling land, with scattered shadscale, chapperal,
weeds and grass; descend SW. slope.

- 0.40 Small draw, drains SE.; ascend over E. slope.
- 9.60 Top of spur, slopes SE.; descend over steep SW. slope.
- 12.60 Bottom of deep ravine, drains SE.; ascend over NE. slope.
- 25.00 Top of main ridge, bears NE. and SW.; descend over NW.
slope.
- 40.08 The $\frac{1}{4}$ sec. cor. of secs. 25 and 36, monumented with a
limestone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on
N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in
the ground and in a collar of stone to top, with brass
cap mkd.

T42S R15W
 $\frac{1}{4}$ $\frac{S25}{S36}$
1973

Deposit the original cor. stone alongside iron post.

(Restoring the 1870 survey by Joseph Gorlinski)

S. 88° 25' W., beginning new measurement.

- 5.00 Base of ridge, bears NE. and SW.; descend over NW. slope.
- 5.90 Fence line, bears N., and S. 45 lks. dist. to fence cor.;
thence S. 89° W.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

40.52

Point for the cor. of secs. 25, 26, 35 and 36, determined longitudinally by proportionate measurement and latitudinally by fence line which bears S. 89° W. and N. 89° E. The latitudinal position for this cor. was verified by Clifford Prisbrey, local land owner who remembered seeing the original cor. along this fence line before. There was also a local survey stake at this point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W
S26|S25
S35|S36
1973

From this cor., the ¼ sec. cor. of secs. 26 and 35, bears S. 89° 37' W., 40.24 chs. dist., determined by a paved road extending W., a dirt road extending S., and an old fence line extending N. Verified by Clifford Prisbrey, adjacent land owner, as being the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W
¼ S26
S35
1973

From which

A sandstone boulder, 6x4x2 ins., above ground, bears N. 20° 04'E., 44 lks. dist., mkd. X BO.

d. 0° 59' W., bet. secs. 25 and 26.

Over nearly level land, with scattered shadscale, chaparral, weeds and grass.

37.50

Concrete lined canal, bears N. 7° E. and S. 7° W.

40.00

Point for the ¼ sec. cor. of secs. 25 and 26, determined longitudinally by proportionate measurement and latitudinally by a fence extending W., falls in E. edge of dirt road which bears N. 7° E. and S. 7° W. along canal.

At the cor. point

Bury ¾ inch conduit, 12 ins. long, surrounded by glass and a piece of concrete block, 6 ins. below surface of ground.

From which

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° E., 7 ft. dist., with brass cap mkd. T42S R15W ¼ S25 RM 7 FT 1973 and an arrow point to the cor.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S. R. 15 W., Salt Lake Meridian, U.S.

CHAINS

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 45° E., 7 ft. dist., with brass cap mkd. T42S R15W ¼ S25 RM 7 FT 1973 and an arrow pointing to the cor.

N. 0° 59' W., beginning new measurement.

Over cultivated land.

28.65 Gravel road, bears NE. and NW. on curve, leave cultivated land; over series of small gypsum spurs and washes.

40.14 The cor. of secs. 23, 24, 25 and 26, marked with a Washington County brass cap inbedded in a concrete stand, also a limestone, 20x10x8 ins., dimly mkd. and believed to be the original cor., located alongside. This monumentation cannot be improved upon. Brass cap mkd.

1970
T42S R15W
S23|S24
S26|S25

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp.

S. 88° 51' W., bet. secs. 24 and 25.

Over sandy rolling land, with scattered shadscale, weeds, chapperal and grass; along N. slope.

1.60 Descend over W. slope.

3.40 Bottom of draw, drains N.; ascend E. slope.

7.60 Top of ascent, slopes N.; thence along NW. slope.

35.20 Power line, bears N. 70° E. and S. 70° W.

40.73 Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W
¼ S24
S25
1973

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Set a cottonwood post, 5 ft. long, alongside.

45.00 Dirt road, bears N. 70° E. and S. 70° W.

47.65 Base of low spur, bears N. 70° E. and S. 70° W.

51.40 Top of spur, slopes SW.; descend along N. slope.

59.35 Dirt road along base of spur, bears N. 57° E. and S. 57° W.

Dependent Resurvey of a Portion of the Subdivisional
T42S R15W

CHAINS

61.095 Point for the W. 1/16 sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W
W $\frac{1}{16}$ S24
S25
1973

Deposit broken glass alongside the iron post.

66.60 Base of spur, bears NE. and SW.; ascend over SE. slope.

69.10 Top of narrow spur, slopes S. 70° W.; thence over series of small spurs and washes.

78.54 Concrete lined canal, bears N. and S.

81.46 The cor. of secs. 23, 24, 25 and 26.

N. 0° 05' W., bet. secs. 23 and 24.

Over gentle rolling land, with scattered shadscale, weeds, chapparral and grass; ascend S. slope.

1.00 Top of ascent, bears E. and W.; descend N. slope.

5.00 Base of gypsum hills, bears NE. and SW.; over cultivated land.

35.50 Concrete lined canal, bears S. 13° E. and N. 61° W. on curve, also leave cultivated land; ascend gentle SW. slope.

40.62 The ¼ sec. cor. of secs. 23 and 24, monumented with a sandstone, 24x12x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T42S R15W
¼
S23|S24
1973

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0° 05' W., beginning new measurement.

Over rolling land.

16.50 Canal, 20 lks. wide, 3 ft. deep, flows S. 30° W., from N. 50° E.; descend NW. slope into bottom land.

18.77 Point for the original meander cor. of secs. 23 and 24, on the Left bank of the Virgin River at proportionate dist. There is no remaining evidence of the original cor. Not monumented.

Dependent Resurvey of a Portion of the Subdivisional
Lines T. 42 S., R. 15 W., Salt Lake County, Utah

- CHAINS
- 27.27 Present mean high water mark on the left bank of the Virgin River, bears S. 33° 32' W. and N. 33° 32' E. Not monumented; thence across river.
- 30.04 Point for the meander cor. at present mean high water mark on the right bank of the Virgin River, which bears N. 38° 34' E. and S. 38° 34' W., falls on loose sandy bank and cannot be monumented.
- 30.62 Point selected for the witness meander cor. of sec. 23, only.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. the ground, with brass cap mkd.
- WC
T42S R15W

S23↓

MC
1973
- Ascend steep rocky S. slope.
- 40.58 The cor. of secs. 13, 14, 23 and 24, monumented with a basalt stone, 24x14x8 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T42S R15W
S14|S13
S23|S24
1973
- Deposit the original cor. stone in mound alongside the iron post.
- From the cor. of secs. 13 and 24, on the E. bdy of the Tp.
- S. 88° 51' W., bet. secs. 13 and 24.
- Over broken land, with scattered shadscale, chapperal, weeds and grass; along N. slope.
- 13.50 Spur, slopes N.; descend along NW. slope.
- 25.00 Slope changes; descend steep W. slope.
- 29.00 Bottom of canyon, drains S. 20° W.; ascend SE. slope.
- 40.14 Rim of mesa, bears S. 80° W. and N. 70° E.; thence over nearly level land.
- 40.16 The ¼ sec. cor. of secs. 13 and 24, marked by a ¼ chiseled in basalt ledge. Near edge and cannot be monumented.
- _____
- S. 89° 07' W., beginning new measurement.
- Along S. rim of mesa.

Dependent Resurvey of a Portion of the Subdivisional
T. 42 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

- 0.46 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 13 and 24.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone, 5 ft. base to top, with brass cap mkd.
- WC
T42S R15W
- $\frac{1}{4}$ $\frac{S13}{S24}$
1973
- 10.35 Rim of mesa, bears S. 80° E. and N. 70° W.; descend over broken SW. slope.
- 20.18 Point for the W. $1/16$ sec. cor. of secs. 13 and 24.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to brass cap mkd.
- T42S R15W
- W $\frac{1}{16}$ $\frac{S13}{S24}$
1973
- Along S. slope.
- 40.36 The cor. of secs. 13, 14, 23 and 24.
-
- N. $0^\circ 08'$ W., bet. secs. 13 and 14.
- Over broken land, with scattered shadscale, chapperal, weeds and grass; ascend steep S. slope.
- 1.80 Top of ridge, bears E. and W.; descend over N. slope.
- 12.64 Lower line, bears E. and W.; over nearly level land.
- 12.70 Fence line, bears E. and W.; over cultivated land.
- 21.24 Cor. of fences, bears E., W. and N.; leave cultivated land.
- 27.22 Cor. of fences, bears N. 84° E., S. 84° W. and S.; across paved road.
- 28.02 Center of old U.S. Highway No. 91, bears N. 84° E. and S. 84° W.
- 28.82 Cor. of fences, bears N. 84° E., S. 84° W. and N. $0^\circ 08'$ E.; along fence.
- 30.16 Upper line, bears E. and W.
- 41.42 $\frac{1}{4}$ sec. cor. of secs. 13 and 14, marked by an old mound of stone in fence line and a local survey stake. This is the best available evidence of the position of the original cor.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

T42S R15W

 $\frac{1}{4}$
S14 | S13
1973

Raise a mound of stone, $2\frac{1}{2}$ ft. base, 1 ft. high, W. of
cor.

N. $0^{\circ} 06'$ W., beginning new measurement.

Over nearly level land; along fence line.

40.68 The cor. of secs. 11, 12, 13 and 14, monumented with a
sandstone, $18 \times 10 \times 8$ ins., mkd. with 4 notches on the S. and
1 on the E. edge, found lying alongside of Washington
County survey marker, a brass cap imbedded in concrete,
extending 6 ins. above ground and mkd.

 $\frac{11}{14} \mid \frac{12}{13}$

T42S R15W
1971

No further improvements can be made upon this cor.

Cor. of fences, extending N., S. and E., bears S. $7^{\circ} 50'$
W., 52 lks. dist.

(Restoring the 1900 Survey by M.H. Dalley)

From the cor. of secs. 12 and 13, on the E. bdy. of the
Tp.

S. $89^{\circ} 34'$ W., bet. secs. 12 and 13.

Over rolling sandy bench, with scattered shadscale, weeds
and sagebrush.

6.85 Descend over W. slope.

11.50 Bottom of draw, drains S.; ascend over E. slope.

14.55 Top of spur, projects S.; descend over W. slope.

18.05 Bottom of draw, drains S.; ascend over E. slope.

22.50 Top of ascent, bears N. and S.; over gentle rolling land.

40.18 The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, monumented with a
red sandstone, $20 \times 10 \times 6$ ins., firmly set, in N-S fence
line and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in
the ground and in a collar of stone, to brass cap mkd.

T42S R15W

 $\frac{1}{4}$ $\frac{S12}{S13}$
1973

Deposit the original cor. stone alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

N. 88° 39' W., beginning new measurement.

Ascend over gentle NE. slope.

- 3.90 Top of small spur, slopes N.; over nearly level land.
- 19.58 Dirt road, bears N. and S.
- 23.28 Cor. of fences, bears W. and SE.
- 40.10 The cor. of secs. 11, 12, 13 and 14.

GENERAL DESCRIPTION

The area resurveyed within T. 42 S., R. 15 W., Salt Lake Meridian, Utah, varies from mountainous along the east boundary to gentle rolling and nearly level throughout the remaining portion. The elevation ranges from about 2,500 to 3,200 ft. above sea level. The soil is mostly sandy clay, with scattered outcroppings of gypsum. The vegetation consists of shadscale, chapperal, weeds and sparse native grasses, also willows and tamrac along the Virgin River which flows through sec. 24. The general drainage is to the SW.

Access to the township is provided by numerous secondary and trail roads. There is some cultivated land along the E. bdy. of secs. 13, 24 and 25.

The average of a number of readings along the lines surveyed gives a mean magnetic declination of 16° 00' E. with no noticeable difference due to local attraction.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

(I ~~was~~), Craig P. Sylvester, HERE

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd of January, 1973, (I ~~was~~) have dependently resurveyed a portion of the south and east boundaries and a portion of the subdivisional lines of Township 42 South, Range 15 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~us~~) and under (~~our~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

March 22, 1974
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of subdivisional lines of T. 42 S., R. Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUL 8 1977
(Date)

R. T. Carr
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

The foregoing transcript of the field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of subdivisional lines of T. 42 S., R. Salt Lake Meridian, Utah, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
RETRACEMENT OF THE

UTAH-ARIZONA STATE LINE

BETWEEN MILE POSTS 28 AND 31

DEPENDENT RESURVEY OF A PORTION

OF THE EAST BOUNDARY

AND PORTIONS OF THE

SUBDIVISIONAL LINES

OF

TOWNSHIP 43 SOUTH, RANGE 15 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor


Under special instructions dated January 3, 19 73, which provided for the surveys
included under Group Number 543, approved January 3, 1973,
and assignment instructions dated March 13, 19 73.

Survey commenced March 27, 1973

Survey completed April 24, 1973

INDEX DIAGRAM

Township 43 South, Range 15 West,

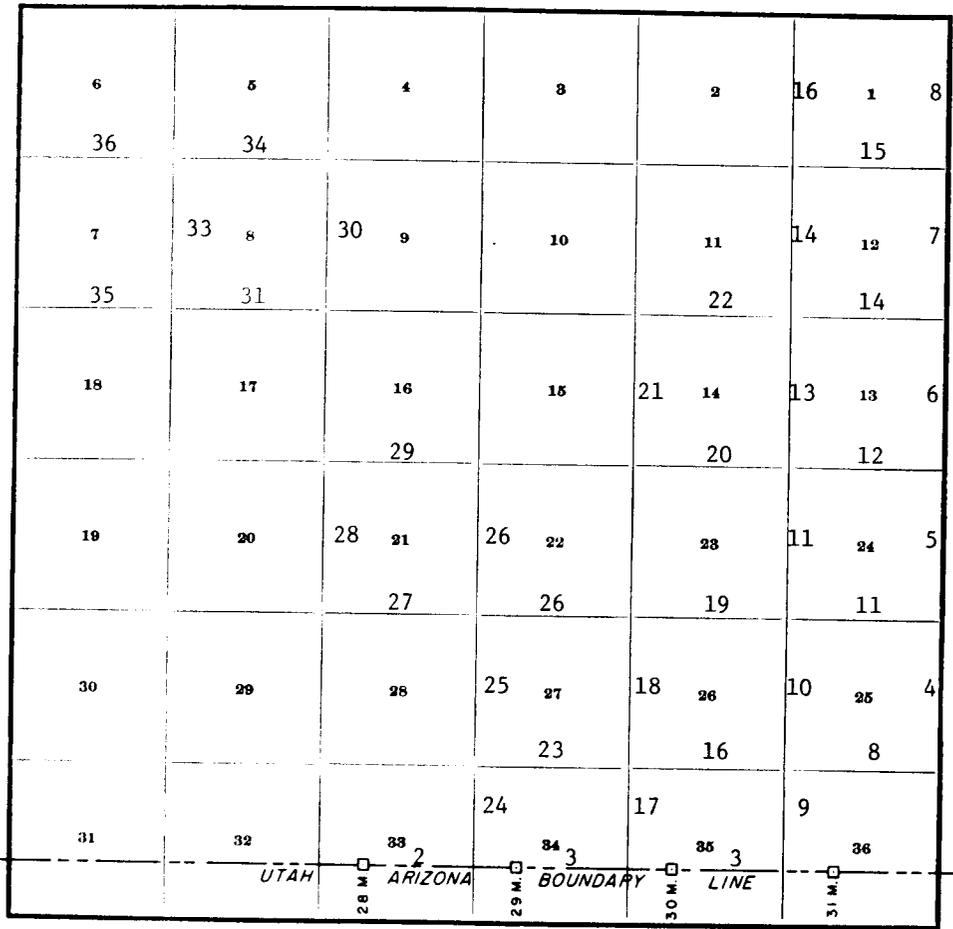

CHAINS

Township 43 South Range 15 West. Salt Lake Meridian, Utah

T. 43 S., R. 15 W.History of Surveys

<u>NORTH BOUNDARY</u>	<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
-----------------------	--------------------	-------------------------------

All	Joseph Gorlinski 1870	W. Jenkins & J.A. West 1897 M. H. Dalley 1900
-----	-----------------------	-----------------------------------------------------

SOUTH BOUNDARY (UTAH-ARIZONA STATE BOUNDARY)

All	Howard B. Carpenter 1901
-----	--------------------------

EAST BOUNDARY

All	W. Jenkins & J.A. West 1897	A.J. Stewart & L.A. Snow 1909
-----	-----------------------------	----------------------------------

WEST BOUNDARY

N. 1 mile	Joseph Gorlinski 1870	
S. 5 miles	W. Jenkins & J.A. West 1897	
S. 1 mile		A.J. Stewart & L.A. Snow 1909
W. bdy. Sec. 7		Andrew Nelson 1965

SUBDIVISIONS

Small portion	Joseph Gorlinski 1870
Large portion	W. Jenkins & J.A. West 1897
S. tier of sections	L.A. Snow & A.J. Stewart 1909

The following field notes are those of the retracement of a portion of the Utah-Arizona State boundary between mile posts 28 and 31, the dependent resurvey of a portion of the east boundary and a portion of the subdivisional lines of Township 43 South, Range 15 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated January 3, 1973.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on polaris taken throughout the progress of the survey.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The geographic position for the 31 mile cor. on Utah-Arizona bdy. as determined from a tie made to U.S.G.S. triangulation station "George" located in the NE. cor. of sec. 7, is:

Latitude: 37° 00' 00" N.

Longitude: 113° 29' 13" W.

Township 43 South Range 15 West, Salt Lake Meridian, Utah

CHAINS

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be 16° 00' East.

Retracement of a portion of Utah-Arizona State Bdy.,
(S. bdy. T. 43 S., R. 15 W., Salt Lake Meridian, Utah).

Retracement of the Survey Executed by Howard B.
Carpenter U.S. Surveyor, in 1901

Beginning at the 28 mile cor., monumented with an iron post, 3 ins. in diam., extending 24 ins. above ground and set in fence line that bears E. and W., with brass cap mkd.

UTAH

28-M

ARIZ

N. 89° 58' E., along 29th mile.

Over rolling land, with scattered shadscale, chapparral, weeds and grass.

- 16.73 Top of gentle ascent, bears N. and S.; descend E. slope.
- 34.60 Bottom of draw, drains NE.; ascend NW. slope.
- 39.70 Top of spur, slopes N. 20° E.; descend E. slope.
- 44.60 Base of spur, bears N. and S.; over rolling land.
- 50.10 The closing cor. of secs. 33 and 34, T. 43 S., R. 15 S., Salt Lake Meridian, Utah, hereinafter described.
- 51.32 Wash, 30 lks. wide, 2 ft. deep, drains NW.; ascend SW. slope.
- 57.90 Top of low ridge, bears S. and NW.; descend E. slope.
- 64.60 Wash, 10 lks. wide, 1 ft. deep, drains irregularly N.; over rolling land.
- 74.00 Wash, 10 lks. wide, 1 ft. deep, drains NW.; ascend over SW. slope.
- 75.00 Trail road, bears NW. and SE.
- 80.20 The 29 mile cor. of Utah-Arizona bdy., monumented with a sandstone, 36x18x12 ins., firmly set and plainly mkd. 29M on W., ARIZ on S. and UTAH on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

UTAH

-29M-

ARIZ

1973

Retracement of a portion of Utah-Arizona State Line,
S. 43 T. 15 R. 15 W., T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

East, along 30th mile.

Over rolling land, through scattered shadscale, brigham tea, chapperal and grass; ascend SW. slope along E-W. fence line.

- 8.10 Top of ridge, bears N. and S.; descend E. slope.
20.00 Bottom of descent, drains NW.; ascend gradual W. slope.
49.90 The closing cor. of secs. 34 and 35, T. 43 S., R. 15 W., Salt Lake Meridian, Utah, hereinafter described.
79.90 The 30 mile cor. of Utah-Arizona bdy., monumented with a granite stone, 24x16x16 ins., firmly set and plainly mkd. 40M on W., UTAH on N. and ARIZ on S., in E.-W. fence line.

UTAH

-30M-

ARIZ

1973

Deposit the original stone cor. alongside the iron post.

8. 89° 57' E., along 31st mile.

Over rolling and broken land, through scattered shadscale, chapperal, weeds and grass; ascend gentle NW. slope.

- 3.10 Top of ascent, bears NW. and SE.; descend along N. slope.
14.00 Bottom of draw, drains N. 40° W.; ascend steep rocky W. slope.
21.00 Top of high spur, slopes N. 20° W.; descend along NE. slope.
40.00 Bottom of draw, drains NW.; ascend over W. slope.
44.00 Top of spur, projects NW.; descend over NE. slope.
49.91 The closing cor. of secs. 35 and 36, T. 43 S., R. 15 W., Salt Lake Meridian, Utah, hereinafter described.
60.90 Slope change; descend along SE. slope.
76.00 Bottom of draw, drains N. 60° E.; ascend over W. slope.
80.80 E. slope of knoll; descend E. slope to cor.
81.59 The 31 mile cor. of Utah-Arizona bdy., monumented with a granite stone, 26x12x8 ins., firmly set and plainly mkd. 31M on W., ARIZ on S. and UTAH on N.; 1 lk. dist. S. of E.-W. fence line.

the cor. point

Retracement of a portion of Utah-Arizona State Line,
(S. bdy. T. 43 S. R. 15 W. Salt Lake Meridian U.S.)

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

UTAH

-31M-

ARIZ

1973

Deposit the original stone cor. alongside the iron post.

Dependent Resurvey of a portion of the East Boundary of T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897 and the Retracement Executed by Leo A. Snow and A. J. Stewart, Deputy Surveyors, in 1909

Beginning at the cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an unmarked stone, firmly set and verified by George H. Seegmiller (82 years old), adjacent land owner and long time resident, as being the correct position for the cor. The original cor., a line-stone, 18x12x6 ins., plainly mkd., was found loose on ground near cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T43S
R15W R14W

S25|S31
S36|

1973

Deposit the original stone cor. alongside the iron post.

N. 0° 02' W., along E. bdy. of sec. 25.

Over nearly level land, through scattered shadscale, chap-peral and grass.

- .14 Fence line, bears E. and W.
- .30 S. edge of irrigation pond, bears E. and W.
- 4.50 N. edge of irrigation pond, bears E. and W.
- 10.75 Intersection of dirt roads, bears E., N. and S. 35° W.
- 40.01 The point for the ¼ sec. cor. of sec. 25, at midpoint, falls on W. side of dirt road which bears N. and S. and cannot be monumented.

At the cor. point

Bury glass and small rock, 5x3x2 ins., marked with an X, 12 ins. below surface of road.

Dependent Resurvey of a portion of the E. bdy.,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

from which

An iron post, 30 ins. long, 2½ ins. in diam., set 24 ins. in the ground, for a reference monument, bears S. 36° 45' W., 60 ft. dist., with brass cap mkd. T43S R15W ¼ S25 RM 60 FT 1973 and an arrow pointing to the true cor.

An iron post, 30 ins. long, 2½ ins. in diam., set 24 ins. in the ground, for reference monument, bears N. 48° W., 44 ft. dist., with brass cap mkd. T43S R15W ¼ S25 RM 44 FT. 1973 and an arrow pointing to the true cor.

80.02 The cor. of secs. 24 and 25, monumented with a sandstone, 18x12x10 ins., firmly set and plainly mkd. with 4 notches on the N. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S
R15W R14W

S24|S30
S25|

1973

Deposit the original stone cor. alongside the iron post.

Point is located.

N. 0° 02' W., along E. bdy. of sec. 24.

Over gentle rolling land, through scattered shadscale, chapperal, weeds and grass; ascend gentle S. slope along fence line.

40.05 The ¼ sec. cor. of secs. 24, monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S
R15W

¼
S24|

1973

Deposit the original stone cor. alongside the iron post.

Point is located at the cor. of fence, bearing W., W. and S.

N. 0° 03' W., beginning new measurement.

7.35 Dirt road, bears N. 40° W. and S. 40° E.

Dependent Resurvey of a portion of the E. bdy.
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
19.40	Dirt road, bears NW. and SE.
40.03	The cor. of secs. 13 and 24, monumented with a sandstone, 12x8x8 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd. T43S R15W R14W S13 S19 S24 1973 Deposit the original stone cor. alongside the iron post. N. 0° 02' W., along E. bdy. of sec. 13. Over rolling land, with scattered shadscale.
.30	Wash, 30 lks. wide, 1 ft. deep, drains N. 80° W.
36.00	Base of ridge, bears NW. and SE.; ascend over SW. slope.
40.03	The ¼ sec. cor. of sec. 13, monumented with a sandstone, 20x12x7 ins., firmly set and plainly mkd. ¼ on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground and in a mound of stone 4½ ft. base to brass cap mkd. T43S R15W ¼ S13 1973 Deposit the original stone cor. alongside the iron post. N. 0° 01' E., beginning new measurement. Ascend over broken SW. slope of ridge.
16.75	Rim of ridge, bears W. and SE.; along W. slope of ridge top.
37.15	N. rim of ridge, bears NW. and SE.; descend over rocky NE. slope.
40.07	The cor. of secs. 12 and 13, monumented with a sandstone, 24x8x5 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone, 4½ ft. base to brass cap mkd.

Dependent Resurvey of a portion of the E. bdy.,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CRAGGS

T43S
R15W R14W

S12|S18
S13|

1973

Deposit the original stone cor. alongside the iron post.

N. 0° 01' W., along E. bdy. of sec. 12.

Over rolling and broken land, through scattered shadscale, chapparral, brigham tea and sage; descend over rocky NE. slope.

- 6.40 Base of ridge, bears NW. and SE.; over slightly broken N. slope.
- 29.85 Dirt road, bears NW. and SE.
- 36.25 Wash, 40 lks. wide, 20 ft. deep, drains N. 75° W.; over series of washes and spurs.
- 39.90 The $\frac{1}{4}$ sec. cor. of sec. 12, monumented with a sandstone, 12x8x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 19 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T43S
R15W R14W

$\frac{1}{4}$
S12|

1973

Deposit the original stone cor. alongside the iron post.

N. 0° 05' E., beginning new measurement.

Over series of small washes and spurs.

- 40.05 The cor. of secs. 1 and 12, monumented with a sandstone, 16x8x4 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T43S
R15W R14W

S1|S7
S12|

1973

Deposit the original stone cor. alongside the iron post.

Dependent Resurvey of a portion of the E. bdy.,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

N. 0° 07' W., along E. bdy. of sec. 1.

Over series of small washes and spurs, through shadscale and weeds.

39.89 The ¼ sec. cor. of sec. 1, monumented with a sandstone, 16x8x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S
R15W

¼
S1|

1973

Deposit the original stone cor. alongside the iron post.

North, beginning new measurement.

Over series of small washes and spurs.

42.85 Wash, 5 lks. wide, 6 ins. deep, drains W.

43.05 The cor. of Tps. 42 and 43 S., R. 15 W., monumented with a sandstone, 24x8x6 ins., firmly set and plainly mkd with 6 notches on the N., S. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground and in a mound of stone, 4½ ft. base to brass cap mkd.

T42S
R15W R14W

S36|S6
S1|

T43S
1973

Deposit the original stone cor. alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishmmt of the Survey Executed by W. Jenkins
and J.A. West, Deputy Surveyors, in 1897

From the cor. of secs. 25 and 36, on the E. bdy. of the
Tp.

S. 89° 55' W., bet. secs. 25 and 36.

Over nearly level land, along E.-W. fence line with cul-
tivated land to the S.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 ., R. 15 W., Salt Lake Meridian, Utah

CHAINS
39.92

The $\frac{1}{4}$ sec. cor. of secs. 25 and 36, monumented with a basalt stone, 20x14x6 ins. firmly set and plainly mkd. $\frac{1}{4}$ on N. face. 2 lks. dist. W. of cor. of fence which bears E. and N. 45° W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$ $\frac{S25}{S36}$

1973

Deposit the original stone cor. alongside the iron post.

S. $89^\circ 56'$ W., beginning new measurement.

Over nearly level land, through scattered shadscale, chaparral, weeds and grass.

16.23 Fort Pierce Wash, 2.50 chs. wide, 5 ft. deep, drains N. 75° W.

40.03 The cor. of secs. 25, 26, 35 and 36, monumented with a limestone, 14x10x8 ins., firmly set and plainly mkd. with 1 notch on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{S26|S25}{S35|S36}$

1973

from which

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Deposit the original stone cor. alongside the iron post.

Reestablishment of a Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897, and the Retracement Executed by A.J. Stewart and L.A. Snow, Deputy Surveyors, in 1909.

S. $0^\circ 01'$ E., bet. secs. 35 and 36.

Over nearly level land, through scattered shadscale, chaparral, weeds and grass.

13.35 Top of ascent, bears NE. and SW.; ascend N. slope.

19.45 Top of main ascent, bears E. and W.; ascend gentle N. slope.

39.96 $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a limestone stone, 16x14x6 ins., firmly set and plainly mkd.

Dependent Resurvey of a Portion of the Subdivisional T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T43S R15W

$\frac{1}{4}$
S35|S36

1973

Deposit the original stone cor. alongside the iron post.

S. $0^{\circ} 25'$ W., beginning new measurement.

Over rolling land, through scattered shadscale, chapperal, weeds and grass.

7.93

The closing cor. of secs. 35 and 36, on the Utah-Arizona boundary monumented with an iron post, 2 ins. in diam., extending 16 ins. above ground with brass cap mkd.

T43S R15W

S35|S36
C C
A

1909

From point of intersection on the Utah-Arizona State bdy., the 30 Mile Post bears N. $89^{\circ} 57'$ W., 49.91 chs. dist. and the 31 Mile Post, bears S. $89^{\circ} 57'$ E., 31.68 chs. dist.

Reestablishment of the Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897

From the cor. of secs. 25, 26, 35 and 36.

North, bet. secs. 25 and 26.

Over nearly level land, with chapperal, weeds and grass.

9.50

Fort Pierce Wash, 3.00 chs. wide, 2 ft. deep, drains S. 75° W.; ascend over SE. slope.

15.30

Top of ascent, bears NE. and SW.; over nearly level land.

40.01

The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 14x6x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$
S26|S25

1973

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

from which

Raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Deposit the original stone cor. alongside the iron post.

N. $0^{\circ} 04'$ W., beginning new measurement.

Over nearly level land.

40.00 The cor. of secs. 23, 24, 25 and 26, monumented with a
basalt stone, $18 \times 12 \times 10$ ins., firmly set and plainly mkd.
with 2 notches on the S. and 1 on the E. edges. In E.-
W. fence line.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

$\frac{S23|S24}{S26|S25}$

1973

Deposit the original stone cor. alongside the iron post.

From the cor. of secs. 24 and 25, on the E. bdy. of the
Tp.

S. $89^{\circ} 57'$ W., bet. secs. 24 and 25.

Over nearly level land, along fence line, with scattered
shadscale, chapperal, weeds and grass.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, at midpoint.
The original cor., a basalt stone, $12 \times 6 \times 6$ ins., mkd. $\frac{1}{4}$,
was found lying loose on ground near cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

$\frac{\frac{1}{4} S24}{S25}$

1973

Deposit the original stone cor. alongside the iron post.

In fence line, which bears E. and W.

79.94 The cor. of secs. 23, 24, 25 and 26.

N. $0^{\circ} 03'$ W., bet. secs. 23 and 24.

Over nearly level land, with scattered shadscale, chap-
peral, weeds and grass.

39.98 The $\frac{1}{4}$ sec. cor. of secs. 23 and 24, monumented with a
basalt stone, $12 \times 8 \times 6$ ins., firmly set and plainly mkd. $\frac{1}{4}$
on W. face.

Dependent Resurvey of a Portion of the Subdivisional Line
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{2}$
S23|S24

1973

Deposit the original stone cor. alongside the iron post.

N. $0^{\circ} 02'$ W., beginning new measurement.

Ascend over gentle S. slope of spur.

- 6.30 Top of spur, slopes W.; descend N. slope.
- 7.30 Dirt road, bears irregularly NW. and SE.
- 23.36 Fence cor., with fences bearing NW. and NE.
- 35.16 Fence line, bears NW. and SE.
- 40.11 The cor. of secs. 13, 14, 23 and 24, monumented with a granite stone, 20x12x6 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

S14|S13
S23|S24

1973

Deposit the original stone cor. alongside the iron post.

From the cor. of secs. 13 and 24, on the E. bdy. of the Tp.

West, bet. secs. 13 and 24.

Over nearly level land, through scattered shadscale, chaparral, weeds and grass; along gentle N. slope.

- 2.00 Wash, 10 lks. wide, 1 ft. deep, drains N. 80° W.
- 12.60 Main dirt road, nears N. 45° W. and S. 45° E.
- 22.85 Dirt road, bears N. 30° W. and S. 30° E.
- 38.20 Wash, 10 lks. wide, 2 ft. deep, drains N. 30° W.
- 39.96 The $\frac{1}{2}$ sec. cor. of secs. 13 and 24, monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face. At the cor. of fence, which bears W. and S.

At the cor. point

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\frac{1}{4} \frac{S13}{S24}$$

1973

Deposit the original stone cor. alongside the iron post.

S. 89° 58' W., beginning new measurement.

Over nearly level land, along fence line.

1.30 Wash, 5 lks. wide, 2 ft. deep, drains N.

19.975 Point for the W. 1/16 sec. cor. of secs. 13 and 24.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\frac{1}{16} \frac{S13}{S24}$$

1973

20.10 Cor. of fence, bears N., E. and a line of fence post to the S.

39.95 The cor. of secs. 13, 14, 23 and 24.

N. 0° 03' W., bet. secs. 13 and 14.

Over nearly level land, with scattered shadscale, chap-peral, weeds and grass.

40.00 The ¼ sec. cor. of secs. 13 and 14, monumented with a basalt stone, 16x8x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\frac{1}{4} S14|S13$$

1973

from which

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Deposit the original stone cor. alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
	N. 0° 01' W., beginning new measurement.
	Over nearly level land.
30.90	Begin descent over N. slope.
39.99	Point for the cor. of secs. 11, 12, 13 and 14, determined longitudinally by proportionate measurement, and latitudinally by an old fence bearing E. and W.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.
	T43S R15W
	$\frac{S11 S12}{S14 S13}$
	1973
	From the cor. of secs. 12 and 13, on the E. bdy. of the Tp.
	S. 89° 57' W., bet. secs. 12 and 13.
	Over broken mountainous land; ascend steep NE. slope with shadscale, chapperal and weeds.
7.00	Rim of ridge, bears NW. and S. 85° E.; over rolling ridge top.
14.10	Rim of ridge, bears N. and S.; descend steep W. slope.
25.60	Base of ridge, bears NW. and SE.; descend over gradual W. slope.
39.50	Dirt road, bears N. and S.
39.97	Point for the ¼ sec. cor. of secs. 12 and 13, determined by the intersection of fence lines from the N. and W., and is accepted as the best existing evidence of the position of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.
	T43S R15W
	$\frac{1}{4} \frac{S12}{S13}$
	1973
	S. 89° 53' W., beginning new measurement.
	Over nearly level land; along fence line.
23.66	Cor. of fences, bears E., W. and S.
39.99	The cor. of secs. 11, 12, 13 and 14.
	N. 0° 04' W., bet. secs. 11 and 12.
	Over nearly level land.
5.00	Enter cultivated land.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S. R. 15 W. Salt Lake Mer.

CHAINS

40.01

Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, at proportionate distance, no evidence of the original cor. could be found. The cor. point falls in privately owned, cultivated field. Not monumented.

80.02

Point for the cor. of secs. 1 and 12, determined latitudinally by proportionate measurement and longitudinally by the projection of fence line from the N.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\begin{array}{c} S11 | S1 \\ | \\ S12 \end{array}$$

1973

Set a cedar post, 6 ft. long, alongside the iron post.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp.

S. $89^{\circ} 58'$ W., bet. secs. 1 and 12.

Over series of spurs and washes, through shadscale.

3.60

Top of ascent, slopes N.; descend over W. slope.

35.00

Enter nearly level land.

40.09

The $\frac{1}{4}$ sec. cor. of secs. 1 and 12, monumented with a sandstone, $18 \times 8 \times 8$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. Face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\frac{\frac{1}{4} S1}{S12}$$

1973

from which

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Deposit the original stone cor. alongside the iron post.

S. $89^{\circ} 57'$ W., beginning new measurement.

Over nearly level land.

3.52

Curve in road, bearing S. 10° E. and N. 50° W.

3.92

Fence, bears S. 10° E. and N. 10° W., 16 lks. dist., thence N. 88° W.

26.00

h, 25 lks. wide, 2 ft. deep, drains N. 30° W.

39.99

cor. of secs. 1 and 12.

Dependent Resurvey of a Portion of the Subdivisional T. 43 S. R. 15 W. Salt Lake Meridian, Utah

CHAINS	<p>N. 0° 07' W., bet. secs. 1 and 2.</p> <p>Over nearly level land, through sandscale, chapperal and weeds.</p> <p>1.32 Cor. of fences, bearing N., W. and S. 88° E.; along fence line.</p> <p>35.70 Top of spur, slopes NE.; descend over NW. slope.</p> <p>38.30 Bottom of wash, 20 lks. wide, 2 ft. deep, drains SW. irregularly.</p> <p>41.95 The ¼ sec. cor. of secs. 1 and 2, marked by a scattered mound of stone and the remains of an old cedar post, verified by fence lines bearing N., S. and W. and is accepted as the best existing evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T43S R15W</p> <p style="text-align: center;">¼ S2 S1</p> <p style="text-align: center;">1973</p> <p>from which</p> <p style="padding-left: 40px;">A power pole, 10 ins. in diam., bears W., 11 lks. dist.</p> <p>Set a cedar post, 5 ft. long, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">Reestablishment of a Survey Executed by Joseph Gorlinski, Deputy Surveyor, in 1870 and the Retracement by W. Jenkins and J.A. West, Deputy Surveyors, in 1897</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 10' W., beginning new measurement.</p> <p>Over nearly level land, along fence line and W. side of dirt road.</p> <p>4.00 Wash, 30 lks. wide, 10 ft. deep, drains N. 80° W.</p> <p>40.00 Cor. of fence, which bears S. and W., also S. edge of road right-of-way. Gravel road from W. curves S.</p> <p>40.25 Point for the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., set, mkd. and referenced as described in the field notes of T. 42 S., R. 15 W., surveyed concurrently under this same group.</p> <hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897</p> <hr/> <p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>West, bet. secs. 26 and 35.</p> <p>Over rolling land, with scattered shadscale, chapperal, weeds and grass.</p>
--------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S. R. 15 W. Salt Lake Meridian, Utah

- CHAINS
13.00 Fort Pierce Wash, 3.00 chs. wide, 4 ft. deep, drains S.
45° W.
27.44 Fence line, bears NE. and SW.
34.00 Fort Pierce Wash, 3.00 chs. wide, 4 ft. deep, drains NW.
39.00 Wash, 10 lks. wide, 3 ft. deep, drains NE.
40.04 The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with a
basalt stone, 18x6x6 ins., firmly set and plainly mkd.
 $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$ $\frac{S26}{S35}$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, N.
of cor.

Deposit the original stone cor. alongside the iron post.

N. 89° 59' W., beginning new measurement.

- 6.50 Base of spur, bears S. and NW., ascend E. slope.
9.00 Top of spur, slopes N.; along N. slope.
15.00 Top of spur, slopes NW.; descend over SW. slope.
24.15 Bottom of draw, drains NW.; along gentle N. slope.
39.93 The cor. of secs. 26, 27, 34 and 35, monumented with an
ironstone, 24x8x6 ins., firmly set and plainly mkd. with
2 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

$\frac{S27|S26}{S34|S35}$

1973

Deposit the original stone cor. alongside the iron post.

Reestablishment of a Survey Executed by W. Jenkins
and J.A. West, Deputy Surveyors, in 1897 and the
Retracement by A.J. Stewart and L.A. Snow,
Deputy Surveyors, in 1909

S. 0° 03' E., bet. secs. 34 and 35.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
	Over rolling land, through scattered shadscale, chapperal weeds and grass; ascend gentle N. slope.
12.00	Base of hills, bears E. and W.; ascend steep N. slope.
21.45	Top of ascent; over rolling land.
39.94	The $\frac{1}{4}$ sec. cor. of secs. 34 and 35, monumented with a lava stone, 24x14x6 ins., firmly set and plainly mkd $\frac{1}{4}$ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.
	T43S R15W
	$\frac{1}{4}$ S34 S35
	1973
	Deposit the original stone cor. alongside the iron post.

	S. $0^{\circ} 03'$ W., beginning new measurement.
	Over rolling land; descend gradual S. slope.
7.94	The closing cor. of secs. 34 and 35, on the Utah-Arizona boundary, monumented with an iron post, 2 ins. in diam., extending 14 ins. above ground with brass cap mkd.
	U T43S R15W
	<u>S34 S35</u> C C
	1909 A
	At the cor. of fences, bearing E., W. and N. $47^{\circ} 30'$ E.
	From the point of intersection on the Utah-Arizona State bdy., the 30 Mile Post, bears E., 30.00 chs. dist. and the 29 Mile Post, bears W., 49.90 chs. dist.
Reestablishment of the Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897	
	From the cor. of secs. 26, 27, 34 and 35.
	N. $0^{\circ} 03'$ W., bet. secs. 26 and 27.
	Over rolling land, with scattered shadscale, chapperal, weeds and grass; descend gentle N. slope.
15.00	Fort Pierce Wash, 2.50 chs. wide, 3 ft. deep, drains W.; over nearly level land.
39.50	Base of hill, bears NE. and SW.; ascend SE. slope.
39.97	The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 18x14x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T43S R15W</p> <p style="text-align: center;">¼ S27 S26</p> <p style="text-align: center;">1973</p> <p>from which</p> <p style="padding-left: 40px;">Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Deposit the original stone cor. alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 03' W., beginning new measurement.</p> <p>Over broken SE. slope.</p>
2.30	Top of sandstone ledges, bear NE. and SW., ascend gentle S. slope.
11.10	Rocky outcrop, bears N. 30° E. and S. 30° W.; over nearly level land.
39.94	The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20x12x5 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edges.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T43S R15W</p> <p style="text-align: center;">S22 S23 S27 S26</p> <p style="text-align: center;">1973</p> <p>Deposit the original stone cor. alongside the iron post.</p> <p>At the cor. of fence, which bears N. 26° W. and E.</p>
40.01	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>S. 89° 55' W., bet. secs. 23 and 26.</p> <p>Over nearly level land, with scattered shadscale, chap-peral, weeds and grass; along fence line.</p> <p>The ¼ sec. cor. of secs. 23 and 26, monumented with a sandstone, 18x8x4 ins., firmly set and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S. R. 5 W. Salt Lake County, Utah

CHAINS

T43S R15W

$$\frac{1}{4} \frac{S23}{S26}$$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, N.
of cor.

Deposit the original stone cor. alongside the iron post.

At cor. of fence, which bears N., S., E. and W.

S. 89° 57' W., beginning new measurement.

Over gentle E. slope; along fence line.

24.15 Small spur, slopes N.; descend gentle W. slope.

39.96 The cor. of secs. 22, 23, 26 and 27.

From the cor. of secs. 13, 14, 23 and 24.

West, bet. secs. 14 and 23.

Over nearly level land, with scattered shadscale, chap-
peral, weeds and grass.

5.85 Fence line, bears NW. and SE.

20.09 Fence line, bears NW. and SE.

39.97 The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, monumented with a
limestone, 16x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on
N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 16 ins.
in the ground and in a mound of stone, 3 ft. base, to
brass cap mkd.

T43S R15W

$$\frac{1}{4} \frac{S14}{S23}$$

1973

Deposit the original stone cor. alongside the iron post.

West, beginning new measurement.

27.03 Fence line, bears N. 27° 48' E. and S. 27° 48' W.

32.94 Center of C.A.A. Air Strip, bears N. 27° 48' E. and S.
27° 48' W.

39.99 The cor. of secs. 14, 15, 22 and 23, monumented with a
sandstone, 16x12x6 ins., firmly set and plainly mkd. with
3 notches on the S. and 2 on the E. edges, in fence line
that bears N. and S.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T43S R15W</p> <p style="text-align: center;">$\frac{S15 S14}{S22 S23}$</p> <p style="text-align: center;">1973</p> <p>Deposit the original stone cor. alongside the iron post.</p>
	<p>N. 0° 04' W., bet. secs. 14 and 15.</p> <p>Over gentle SE. slope, with scattered shadscale, chaparral, weeds and grass; along fence line.</p>
30.00	Power line, bears E., to C.A.A. Air Strip; along power line and fence.
32.00	Paved road, bears N. 75° W. and S. 75° E., to air strip.
40.00	The ¼ sec. cor. of secs. 14 and 15, monumented with a limestone, 18x12x6 ins., firmly set and plainly mkd. ¼ on W. face. At the cor. of fence which bears S. and NE.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T43S R15W</p> <p style="text-align: center;">$\frac{1}{4}$ S15 S14</p> <p style="text-align: center;">1973</p> <p>Deposit the original stone cor. alongside the iron post.</p>
	<p>N. 0° 02' W., beginning new measurement.</p> <p>Ascend gentle SE. slope.</p>
8.96	Leave power line, which bears N. 0° 30' E.; descend gentle N. slope.
10.75	Rim of mesa, bears NE. and SW.; descend steep NW. slope.
17.00	Base of hill, bears NE. and SW.; over nearly level land.
39.91	Wash, 8 lks. wide, 4 ins. deep, drains W.
39.96	The cor. of secs. 10, 11, 14 and 15, monumented with a red sandstone, 18x8x6 ins., firmly set and plainly mkd. with 4 notices on the S. and 2 on the E. edges.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
T. 43 S. R. 15 W. Salt Lake

CHAINS

T43S R15W

$$\frac{S10|S11}{S15|S14}$$

1973

Deposit the original stone cor. alongside the iron post.

From the cor. of secs. 11, 12, 13 and 14.

S. 89° 59' W., bet. secs. 11 and 14.

Over gentle rolling land, with scattered shadscale, chap-
peral, weeds and grass; along fence line.

- 8.00 Base of spur, bears N. and S.; ascend over E. slope.
13.60 Spur, slopes N.; along N. slope.
33.20 Slope change, descend over NW. slope.
39.99 The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a
sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$
on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

$$\frac{\frac{1}{4} S11}{S14}$$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, N.
of cor.

Deposit the original stone cor. alongside the iron post.

E.-W. fence line, bears N., 3 lks. dist.

West, beginning new measurement.

- 2.20 Wash, 10 lks. wide, 2 ft. deep, drains N. 20° E.; ascend
E. slope.
19.36 Point selected for the witness W. 1/16 sec. cor. of secs.
11 and 14.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 5 ins.
in the ground and in a mound of stone, 4 ft. base to brass
cap mkd.

W C
T43S R15W

$$\frac{1}{W16} \leftarrow \frac{S11}{S14}$$

1973

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
19.60	Rim of mesa, bears NE. and SW.; descend over broken NW. slope.
20.00	True point for the W. 1/16 sec. cor. of secs. 11 and 14, falls on broken NW. face of ledges and cannot be monumented.
26.60	Base of descent, bears NE. and SW.; over nearly level land.
39.70	Two strand power line, bears N. 0° 30' E. and S. 0° 30' W.
40.00	The cor. of secs. 10, 11, 14 and 15.
	From the cor. of secs. 26, 27, 34 and 35.
	S. 89° 58' W., bet. secs. 27 and 34.
	Over rolling land, with scattered shadscale, chapperal, weeds and grass; along gentle N. slope.
20.00	Base of ridge, bears N. and S.; ascend E. slope.
25.70	Top of low ridge, bears N. and S.; descend W. slope.
31.60	Bottom of draw, drains NW.; ascend E. slope.
39.80	Top of small spur, slopes N.; over rolling land.
39.99	The ¼ sec. cor. of secs. 27 and 34, monumented with a limestone, 16x12x5 ins., firmly set and plainly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
	T43S R15W
	$\frac{1}{4} \frac{S27}{S34}$
	1973
	Deposit the original stone cor. alongside the iron post.
	S. 89° 59' W., beginning new measurement.
	Descend over broken W. slope.
12.25	Wash, 25 lks. wide, 1½ ft. deep, drains irregularly NE.; ascend E. slope.
27.20	Along gentle N. slope.
30.70	Top of ridge, bears NW. and SE.; descend rocky SW. slope.
37.40	Base of ridge, bears N. and S.; over rolling land.
40.01	The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 24x12x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edges.
	At the cor. point

Dependent Resurvey of a Portion of the Subdivisional Line
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T43S R15W

S28|S27
S33|S34

1973

Deposit the original stone cor. alongside the iron post.

Reestablishment of a Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897, and the Retracement Executed by A.J. Stewart and L.A. Snow, Deputy Surveyors, in 1909.

S. 0° 03' E., bet. secs. 33 and 34.

Over nearly level land, with scattered shadscale, chap-peral, weeds and grass.

30.00 Wash, 30 lks. wide, 2 ft. deep, drains NE.; over gentle NW. slope.

39.99 The ¼ sec. cor. of secs. 33 and 34, monumented with a sandstone, 18x12x10 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

¼
S33|S34

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Deposit the original stone cor. alongside the iron post.

S. 0° 05' E., beginning new measurement.

7.91 The closing cor. of secs. 33 and 34, on the Utah-Arizona boundary monumented with an iron post, 2 ins. in diam., extending 14 ins. above the ground with brass cap mkd.

U
T43S R15W

S33|S34
C C

A
1909

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43S. R. 15W., Secs. 21, 22, 27 and 28, Twp. 43S., R. 15W., Co. 10E., Ariz.

CHAINS

From point of intersection on the Utah-Arizona State Bdy., the 29 Mile Post, bears N. 89° 58' E., 30.10 chs. dist. and the 28 Mile Post, bears S. 89° 58' W., 50.10 chs. dist.

Reestablishment of the Survey Executed by W. Jenkins and J.A. West, Deputy Surveyors, in 1897

From the cor. of secs. 27, 28, 33 and 34.

N. 0° 05' W., bet. secs. 27 and 28.

Over nearly level land, with scattered shadscale, chaparral, weeds and grass.

39.99 The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a sandstone, 20x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$
S28|S27

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Deposit the original stone cor. alongside the iron post.

N. 0° 04' W., beginning new measurement.

Over nearly level land.

4.50 Dirt road, bears E. and W.

17.00 Fort Pierce Wash, 2.70 chs. wide, 4 ft. deep, drains NW.; along SW. slope.

40.01 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 18x10x7 ins., firmly set and plainly mkd. with 3 notches on the E. and 2 on the S. edges.

At the cor point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap, mkd.

T43S R15W

S21|S22
S28|S27

1973

Dependent Resurvey of a Portion of the Subdivisional
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original stone cor. alongside the iron post.

From the cor. of secs. 22, 23, 26 and 27.

N. 89° 57' W., bet. secs. 22 and 27.

Over rolling land, with scattered shadscale, chapperal, weeds and grass.

4.35 Wash, 20 lks. wide, 2 ft. deep, drains SW.; ascend gen E. slope.

20.15 Top of ridge, bears N. and S.; descend over W. slope.

40.04 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, 18x12x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$ $\frac{S22}{S27}$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Deposit the original stone cor. alongside the iron post.

N. 89° 58' W., beginning new measurement.

4.35 Wash, 10 lks. wide, 6 ins. deep, drains S.; ascend over E. slope.

36.75 Top of ridge, bears N. and S.; descend steep W. slope.

40.04 The cor. of secs. 21, 22, 27 and 28.

N. 0° 03' W., bet. secs. 21 and 22.

Over broken land, with scattered shadscale, chapperal, weeds and grass; ascend along W. slope.

10.90 Rim of ridge, bears N. 30° W. and S. 30° E.; descend N. slope.

27.40 Bottom of draw, drains W.; ascend S. slope.

40.11 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 20x14x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap, mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

T43S R15W

 $\frac{1}{4}$
S21|S22

1973

Deposit the original stone cor. alongside the iron post.

N. 0° 04' W., beginning new measurement.

Over broken S. slope.

- 12.00 Top of ridge, bears NE. and SW.; descend over N. slope.
- 23.70 Bottom of draw, drains W.; ascend over S. slope.
- 32.00 Top of ridge, bears NE. and SW.; descend over NW. slope.
- 40.01 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 16x8x6 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

 $\frac{S16|S15}{S21|S22}$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high, SW. of cor.

Deposit the original stone cor. alongside the iron post.

At the end of fence line, from N.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 54' W., bet. secs. 21 and 28.

Over rolling land, with scattered shadscale, chapperal, weeds and grass; descend W. slope.

- 2.00 Base of ridge, bears N. and S.; descend gentle W. slope.
- 18.15 Fort Pierce Wash, 2.70 chs. wide, 4 ft. deep, drains N.; ascend gentle E. slope.
- 22.60 Dirt road, bears N. and S.
- 25.00 Top of small spur, slopes N.; descend gentle NW. slope.
- 28.95 Bottom of draw, drains N., 50 lks. dist. into main draw, thence N. 80° E.; along N. slope.
- 38.00 Bottom of draw, drains NE., 70 lks. dist., thence N. 80° E.; ascend SE. slope.

Dependent Resurvey of a Portion of the Subdivisional
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

- 39.96 The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, monumented with a basalt stone, 20x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap, mkd.
- T43S R15W
- $\frac{1}{4} \frac{S21}{S28}$
- 1973
- Deposit the original stone cor. alongside the iron post.
-
- N. $89^{\circ} 58'$ W., beginning new measurement.
- Over rolling land; ascend SE. slope.
- .70 Top of spur, slopes N. 80° E.; over rolling land.
- 39.88 Wash, 5 lks. wide, 3 ins. deep, drains NE.
- 39.98 The cor. of secs. 20, 21, 28 and 29, monumented with a limestone, 20x12x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the S. edges.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.
- T43S R15W
- $\frac{S20|S21}{S29|S28}$
- 1973
- from which
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Deposit the original stone cor. alongside the iron post.
- N. $0^{\circ} 04'$ W., bet. secs. 20 and 21.
- Over gentle rolling land, with lightly scattered shade scale weeds and grass.
- 40.01 The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented with a quartzite stone, 18x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

T43S R15W

 $\frac{1}{4}$
S20|S21

1973

Deposit the original stone cor. alongside the iron post.

N. 0° 03' W., beginning new measurement.

Over nearly level land, with scattered shadscale, chap-
eral and weeds.

32.70 Wash, 20 lks. wide, 5 ft. deep, drains N. 20° E.

35.70 Wash, 15 lks. wide, 2 ft. deep, drains NE.

39.99 The cor. of secs. 16, 17, 20 and 21, monumented with a
basalt stone, 20x14x8 ins., firmly set and plainly mkd.
with 4 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins.
in the ground with brass cap mkd.

T43S R15W

 $\frac{1}{4}$
S17|S16
S20|S21

1973

from which

Raise a mound of stone, 4 ft. base, 2 ft. high, SE.
of cor.

Deposit the original stone cor. alongside the iron post.

From this cor., U.S.G.S. Triangulation Station George,
bears N. 36° 09' 40" W., 177.67 chs. dist., with standard
tablet stamped, "GEORGE 1954", in Latitude 37° 03' 49.321"
N., and Longitude 113° 34' 19.499" W.

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 58' W., bet. secs. 16 and 21.

Over broken land, with scattered shadscale, chapperal,
weeds and grass; descend W. slope.

2.00 Small draw, drains SW.; ascend SE. slope.

10.35 Trail road, bears NE. and SW.

10.45 Rocky spur, slopes SW.; descend NW. slope.

14.15 Dirt road, from NE., bears W., over nearly level land.

37.49 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 16
and 21.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins.
in the ground with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S., R. 15 W., Salt Lake Division, Utah

CHAINS

W C
T43S R15W

$\frac{S16}{S21}$

1973

from which

A power pole, 10 ins. in diam., bears W., 39 lks. dist.

Cor. is located at W. edge of dirt road bearing E. and N.

- 39.98 True point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, at proportionate distance, no evidence of the original cor. could be found. The cor. point falls in Fort Pierce Wash, 5.00 chs. wide, 4 ft. deep, drains N.; over rolling land.
- 59.50 Gravel Crusher and stock pile, bears S., 5.00 chs. dist.; along dirt road from crusher.
- 79.50 Dirt road, from E., bears N. 10° W.
- 79.96 The cor. of secs. 16, 17, 20 and 21.

At the cor. of secs. 8, 9, 16 and 17, monumented with a limestone, 18x10x6 ins. firmly set and plainly mkd. with 4 notches on the E. and S. edges.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap, mkd.

T43S R15W

$\frac{S8|S9}{S17|S16}$

1973

from which

Raise a mound of stone, 3 ft. base, 2 ft. high. S. of cor.

Deposit the original stone cor. alongside the iron post.

N. $0^\circ 01'$ W., bet. secs. 8 and 9.

Over rolling land, with scattered shadscale, chapperal, weeds and grass; ascend SE. slope.

- 11.00 Top of ridge, bears NE. and SW.; descend NW. slope.
- 20.02 Point for the S. $\frac{1}{16}$ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap, mkd.

T43S R15W

S $\frac{1}{16}$
S8|S9

1973

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S. R. 15 W., Salt Lake Meridian Utah

CHAINS

30.20

Paved road, bears NE. and SW., also base of ridge; over rolling land.

40.04

Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, at proportionate dist., there is no remaining evidence of the original cor. The cor. point falls in N. edge of paved access road which bears E. and W. on curve and cannot be monumented.

At the cor. point

Bury brass cap, 2 ft. below surface of road, with brass cap mkd.

T43S R15W

$$\frac{1}{4}$$

$$S8|S9$$

1973

from which

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 24 ins. in the ground, for a reference monument, bears S. $18^{\circ} 05' E.$, 97 ft. dist., with brass cap mkd. RM T43S R15W $\frac{1}{4}$ S9 97 FT. 1973 and an arrow pointing to the cor.

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 24 ins. in the ground, for a reference monument, bears S. $48^{\circ} 10' W.$, 61 ft. dist., with brass cap mkd. RM T43S R15W $\frac{1}{4}$ S8 61 FT 1973 and an arrow pointing to the cor.

65.00

Fort Pierce Wash, 25 lks. wide, 8 ins. deep, flows N. $50^{\circ} W.$

80.08

The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, $18 \times 8 \times 6$ ins., firmly set and plainly mkd. with 5 notches on the S. and 4 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T43S R15W

$$\frac{S5|S4}{S8|S9}$$

1973

Deposit the original stone cor. alongside the iron post.

In fence line, which bears, N. $86^{\circ} 50' E.$ and S. $86^{\circ} 50' W.$

From the cor. of secs. 8, 9, 16 and 17.

S. $89^{\circ} 59' W.$, bet. secs. 8 and 17.

Over rolling land, with scattered shadscale, chapperal, weeds and grass; ascend SE. slope.

7.50

Small ridge, bears N. and S.; descend over broken W. slope.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S. R. 15 W., Salt Lake Meridian, Utah

CHAINS	
16.80	Dirt road, bears N. and S.
17.20	Small wash, 10 lks. wide, 4 ins. deep, drains N.; ascend E. slope.
20.005	Point for the E. 1/16 sec. cor. of secs. 8 and 17. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd. T43S R15W E $\frac{1}{16} \frac{S8}{S17}$ 1973
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
20.90	Top of spur, slopes N. 20° E.; descend NW. slope.
25.30	Base of descent, bears NE. and SW.; over nearly level ground
26.44	Paved road, bears N. 60° E. and curves S.; thence along S. edge of Bloomington Development.
40.01	The ¼ sec. cor. of secs. 8 and 17, monumented with a limestone, 17x6x5 ins., firmly set and plainly mkd. ¼ on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd. T43S R15W $\frac{1}{4} \frac{S8}{S17}$ 1973 from which Center of paved road, which bears E. and W., bears S., 42 lks. dist. Deposit the original stone cor. alongside the iron post. From this cor., U.S.G.S. Triangulation Station George, bears N. 45° 31' 40" W., 90.554 chs. dist., with standard tablet mkd. "GEORGE 1954". N. 89° 59' W., beginning new measurement.
20.025	Point for the W. 1/16 sec. cor. of secs. 8 and 17. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd. T43S R15W W $\frac{1}{16} \frac{S8}{S17}$ 1973

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS

- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 20.025 Leave Bloomington Development.
- 21.80 Paved road, from E., curves NW.; over rolling land.
- 40.05 The cor. of secs. 7, 8, 17 and 18, monumented with a limestone, 16x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 4 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{S7|S8}{S18|S17}$

1973

Deposit the original stone cor. alongside the iron post.

N. $0^{\circ} 02'$ W., bet. secs. 7 and 8.

Over rolling land, with scattered shadscale and chapperal ascend gentle S. slope.

- 1.17 Top of small spur, projects E.; over rolling land.
- 18.38 Paved road, bears N. 60° W. and S. 60° E.
- 39.85 Wash, 8 lks wide, 1 ft. deep, drains SE.
- 40.02 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a sandstone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$\frac{1}{4}$
S7|S8

1973

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Deposit the original stone cor. alongside the iron post.

N. $0^{\circ} 01'$ W., beginning new measurement.

Over rolling land.

- 8.10 Base of ridge, bears W. and SE.; ascend steep S. slope.
- 15.20 Top of ridge, bears NW. and SE.; thence along E. slope.
- 20.025 Point for the N. $1/16$ sec. cor. of secs. 7 and 8.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S. R. W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground and in a mound of stone, 5 ft. base, to brass cap, mkd.

T43S R15W

$$\begin{array}{r} N \ 1/16 \\ S7|S8 \end{array}$$

1973

27.90 Slope change; descend over NE. slope.

38.75 Dirt road, bears irregularly NE. and SW.

40.05 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 20x8x6 ins. firmly set and plainly mkd. with 5 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground and in a mound of stone, 4½ ft. base, to brass cap, mkd.

T43S R15W

$$\begin{array}{r} S6|S5 \\ S7|S8 \end{array}$$

1973

Deposit the original stone cor. alongside the iron post.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 56' W., bet. secs. 5 and 8.

Over gentle rolling land, with scattered shadscale, chaparral, weeds and grass.

18.85 Top of gentle ascent, bears N. and S.; descend gradual NW. slope.

29.25 Bottom of draw, drains S. 75° W.; ascend SE. slope.

37.00 Fort Pierce Wash, 25 lks. wide, 8 ins. deep, flows N.; over bottom land.

40.03 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance, there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T43S R15W

$$\begin{array}{r} S5 \\ \frac{1}{4} S8 \end{array}$$

1973

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of c.

Set a cedar post, 5 ft. long, alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

CHAINS	
45.50	Dirt road, bears N. and S.
45.65	Base of spur, bears N. and S.; ascend steep E. slope.
49.65	Top of narrow spur, projects NE.; descend NW. slope.
56.05	Wash, 10 lks. wide, 6 ins. deep, in bottom of draw, drains N. 40° E.; ascend SE. slope.
64.65	Ledgy rim of draw, bears NE. and S.; ascend SE. slope.
67.90	Spur, projects NE.; ascend NE. slope.
73.35	Bulldozed road, bears irregularly N. and SW.
80.06	The cor. of secs. 5, 6, 7 and 8.
	From the cor. of secs. 7, 8, 17 and 18.
	S. 89° 56' W., bet. secs. 7 and 18.
	Over rolling land, with scattered shadscale and chapparral.
39.45	Bulldozed road, along top of spur sloping S., bears N. and S.; descend along SW. slope.
39.98	The $\frac{1}{4}$ sec. cor. of secs. 7 and 18, monumented with a limestone, 14x14x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.
	T43S R15W
	$\frac{1}{4} \frac{S7}{S18}$
	1973
	from which
	Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
	Deposit the original stone cor. alongside the iron post.

	S. 89° 54' W., beginning new measurement.
.60	Small draw, drains S.; ascend gentle E. slope.
2.50	Top of small spur, slopes S.; over rolling land.
16.15	Top of high spur, slopes S.; descend over broken W. slope.
43.99	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. in diam., protruding 6 ins. above ground with the original cor., a limestone, 18x8x6 ins., buried alongside; brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S. R. 15 W. Salt Lake Meridian Utah

CHAINS

T43S
R16W R15W

S12|S7
S13|S18

1965

Stamp 1973 below the previous date.

From the cor. of secs. 5, 6, 7 and 8.

S. 89° 57' W., bet. secs. 6 and 7.

Over rolling land, with scattered shadscale and chappera
descend over NE. slope.

11.00 Slope change; along N. slope.

39.95 The ¼ sec. cor. of secs. 6 and 7, marked by an X and ¼,
on solid sandstone outcrop.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., on
solid rock, over cross (+) and in a mound of stone, 5 ft.
base, to top, with brass cap mkd.

T43S R15W

¼ S6
S7

1973

S. 89° 54' W., beginning new measurement.

Over rolling land, with scattered shadscale and chappera
descend along N. slope.

10.55 Bottom of draw, drains N.; ascend E. slope.

13.55 Top of spur, slopes N.; descend W. slope.

19.05 Bottom of draw, drains N. 20° W.; ascend E. slope.

24.65 Top of ledgy spur, slopes NW.; descend rocky W. slope.

36.00 Base of hill and new freeway (under construction), bears
N. and S.; over gentle rolling land.

43.97 True point for the cor. of secs. 1, 6, 7 and 12, from
which its Witness cor. bears S. 0° 02' E., 1.62 chs. dis-
monumented with an iron post, 2½ ins. in diam., prot. 4
4 ins. above ground, with brass cap mkd.

W C
T43S
R16W R15W

S1|S6
S12|S7

1965

Stamp 1973 below previous date.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S. R. 15 W. Salt Lake Meridian Utah

CHAINS

GENERAL DESCRIPTION

The area resurveyed within T. 43 S., R. 15 W., Salt Lake Meridian, Utah, varies from mountainous along east and south bds., to gentle rolling throughout the remaining portion. The elevation ranges from about 2,500 to 3,300 ft. above sea level. The soil is mostly sandy clay, with scattered outcroppings of gypsum. The vegetation consists of shadscale, chapperal and very sparse native grasses. The general drainage is to the NW., into the Virgin River, which flows SW.

A new freeway (under construction), is located in NW. tip of sec. 7. Further access to the township is provided by numerous secondary and trail roads. There is a gravel pit and crusher located in the northern portion of sec. 21. The Bloomington Development Corp. is located in sec. 8, and an abandoned Air Strip is located in secs. 14 and 23.

The average of a number of readings along the lines surveyed gives a mean magnetic declination of 16° E. with no noticeable difference due to local attraction.

319

CHAINS

Blank

Page

321

CERTIFICATE OF SURVEY

(I) (~~WE~~) Craig P. Sylvester, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd of January, 1973, (I) (~~WE~~) have retraced the Utah-Arizona State line between mile posts 28 and 31 and dependently resurveyed a portion of the east boundary and a portion of the subdivisional lines of T. 43 S., R.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~WE~~) and under (~~my~~) (~~OUR~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

March 6, 1974
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the retracement of the Utah-Arizona State line between mile posts 28 and 31 and the dependent resurvey of a portion of the east boundary and a portion of the subdivisional lines of T. 43 S., R. 15 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUL 8 1977
(Date)

R. T. ...
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I, *...*, is a true copy of the original field notes

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE WEST BOUNDARY

(PINE VALLEY GUIDE MERIDIAN)

OF

TOWNSHIP 43 SOUTH, RANGE 15 WEST

17400
meters

17400
meters

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

ANDREW NELSON

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 25, 19 65, which provided for the surveys
included under Group Number 484, approved JUNE 25, 1965,
and assignment instructions dated JUNE 25, 19 65.

Survey commenced JUNE 29, 19 65

Survey completed JULY 1, 19 65

INDEX DIAGRAM

Township 43 SOUTH, Range 15 WEST,

3	6	5	4	3	2	1
1	7	8	9	10	11	12
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Township 43 South, Range 15 West, Salt Lake Meridian, Utah

CHAINS

The history of surveys for the west boundary (Pine Valley Guide Meridian) of Township 43 South, Range 15 West, Salt Lake Meridian, Utah, is as follows:

The north 1 mile was surveyed by Joseph Gorlinski, in 1870. The north 1 mile was resurveyed and the south 5 miles surveyed by Washington Jenkins and Joseph A. West in 1897.

The following field notes are those of the dependent resurvey of a portion of the west boundary (Pine Valley Guide Meridian) of T. 43 S., R. 15 W.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instruction, 1947, and the Special Instructions for Group No. 484, Utah, dated June 25, 1965.

Before restoring the corners the lines of the original survey were retraced and a diligent search made for any evidence of the original corners or other calls of the original field note record. Identified original cors. were remonumented in their original positions; lost corners were reestablished by proportionate measurement.

The direction of the line of this survey was determined by angulation from the azimuth mark at U.S.C. & G.S. triangulation station "St. George Airport", located in sec. 36, T. 42 S., R. 16 W.

The geographic position for the cor. of secs. 7, 12, 13 and 18, as scaled from the U.S.G.S. quadrangle map "St. George, SE", 7½' series, 1954, is as follows:

Latitude 37° 03' 08" N., Longitude 113° 35' 09" W.

The mean magnetic declination is 15° 30' East

Dependent Resurvey of a Portion of the W. Bdy. (Pine Valley Guide Meridian), T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishment of the survey executed by Washington Jenkins and Joseph A. West in 1897.

Beginning at the cor. or secs. 7, 12, 13 and 18, T. 43 S., Rs. 15 and 16 W., monumented with a sandstone, 18x9x7 ins., firmly set 10 ins. in the ground, and plainly mkd. 2 notches on N. and 4 on S. edges, and witnessed by an old wagon hub and tall post alongside.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with brass cap mkd.

T43S
R16W R15W

S12|S7
S13|S18

1965

Dependent Resurvey of a Portion of the W. Bdy.
(Pine Valley Guide Meridian) T. 43 S., R. 15 W.
Salt Lake Meridian, Utah

CHAINS	
	Bury original cor. stone alongside iron post.
	N. 0° 02' W., bet. secn. 7 and 12.
	Over low rolling land through short scattered desert brush.
0.20	Shallow sandy wash, 20 lks. wide, drains NW.
7.50	Wash, drains W.
12.70	Wash, 50 lks. wide, drains SW.; asc. gently rolling S. slope.
22.93	Right-of-way net wire fence, bears NE. and SW.
24.75	Spur, slopes SW.; desc. over NW. slope.
27.40	Approximate center line of new proposed U.S. Highway No. 91, on curve, bears about N. 30° E. and S. 30° W.
33.53	Righth-of-way fence, parallel to highway.
34.90	Dirt access road, bears nearly N. and S. 5° W., thence along W. edge of road.
39.50	Road, turns W. into farm.
39.94	The $\frac{1}{4}$ sec. cor. of secn. 7 and 12, monumented with a sandstone, 19x8x5 ins., plainly mkd $\frac{1}{4}$ on W. face, and buried 24 ins. below surface of ground on W. edge of access road, on curve, bearing N. 30° E. and S.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 26 ins. in the ground, over broken glass, with brass cap mkd.
	T43S R16W R15W
	$\frac{1}{4}$ S12 S7
	1965
	from which
	An iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., set 26 ins. in the ground for a reference monument, bears N. 0° 02' W., 87 $\frac{1}{2}$ lks. dist., mkd. RM 57.8 FT. 1965, and an arrow pointing to the true cor.
	A highway right-of-way marker, set in concrete block, set in fence line, bears N. 11° E., 135 lks. dist.
	A highway right-of-way marker, set in concrete block, bears S. 32° W., 78.2 lks. dist.
	A power pole, bears N. 88° W., 53.7 lks. dist.
	Bury original cor. stone alongside iron post.

	N. 0° 02' W., beginning new measurement.
0.15	W. end of 2 ft. metal culvert under access road.

Dependent Resurvey of a Portion of the W. Bdy.
(Pine Valley Guide Meridian) T. 43 S., R. 15 W.
Salt Lake Meridian, Utah

CHAINS	
0.87	Net wire right-of-way fence, bears N. 30° E. and curves S., enter improved lands.
20.00	Fence, bears E. and W.
31.60	Wire fence bears E. and W.
37.66	Point for the witness cor. of secs. 1, 6, 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Point not monumented.
38.39	Point for the new witness cor. of secs. 1, 6, 7 and 12. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, and in a collar of concrete, with brass cap mkd.
	T43S R16W R15W W C S1↑S6 ----- S12 S7 1965
	Cor. is set in fence line, bears NE. and SW. at S. edge of dense willow brush.
38.97	Point for the meander cor. on left bank of the Virgin River, at proportionate dist.; there is remaining evidence of the original cor. Point not monumented. Thence across Virgin River, flows SW.
40.01	Point for the cor. of secs. 1, 6, 7 and 12 at proportionate dist. falls in Virgin River and cannot be perpetuated. Land, rolling and nearly level. Soil, light colored shale and sand. Timber, none. Undergrowth, scattered shadscale and sagebrush. Reestablishment of the Survey Executed by Joseph Gorlinski in 1870, and the Resurvey Executed by Washington Jenkins and Joseph A. West, in 1897.

	N. 0° 02' W., bet. secs. 1 and 6. Over bottom land of Virgin River.
8.30	Present right bank of Virgin River, bears NE. and SW., enter dense willows.
8.75	Point for the meander cor. on the right bank of Virgin River at proportionate dist.; there is no remaining evidence of the original cor. Point not monumented.
9.15	Canal, 8 lks. wide, drains SW.
9.50	Leave willows, asc. 200 ft. over steep S. slope.
14.53	The original meander cor. of secs. 1 and 6, established by Joseph Gorlinski, in 1870, and found by Jenkins and West in 1897, marked by a cross (+) and MC cut in solid rock on top of ledge, and witnessed by a mound of stone W. of cor. Cor. is located on top of ledge spur, bears

Dependent Resurvey of a Portion of the W. Bdy.
(Pine Valley Guide Meridian), T. 43 S., R. 15 W.,
Salt Lake Meridian Utah

CHAINS

N. 60° E. and S. 60° W. From this cor., the cor. of Tps. 42 and 43 S., Rs. 15 and 16 W., bears N. 0° 28' W.

Land, River bottom and hills.

Soil, light colored shale and sand.

Timber, none.

Undergrowth, willows, shadscale and sagebrush.

General Description

The portion of this township covered by this resurvey is rolling to level and hilly land along the Virgin River. It is covered with a scattered growth of shadscale and sagebrush with a dense growth of willows along the river, which flows SW. through section 6. The elevation varies from 2,520 ft. along the river to 2,840 ft. at the meander corner on the north side of the river.

The Virgin River drains the area in a southwestern direction. The area in the river bottom is farm land with a considerable amount of housing being developed to the west and south.

The magnetic declination was taken from U.S.G.S. quadrangle map "St. George, SE", and is 15° 30' East.

CERTIFICATE OF SURVEY

I, ~~was~~ Andrew Nelson

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th of June, 1965, (I) ~~was~~ have dependently resurveyed a portion of the west boundary (Pine Valley Guide Meridian), Township 43 South, Range 15 West

of the Salt Lake Meridian, in the State of Utah, are represented in the foregoing field notes as having been executed by (me), ~~was~~ and under ~~my~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, or in the specific manner described in the foregoing field notes.

March 27, 1975

(Date)



(Cadastral Surveyor)

Chief, Branch of Cadastral Surveys for Andrew Nelson (deceased)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.


The foregoing field notes of the dependent resurvey of a portion of the west boundary (Pine Valley Guide Meridian), Township 43 South, Range 15 West, Salt Lake Meridian, Utah

executed by Andrew Nelson, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved

MAR 23 1977

Date

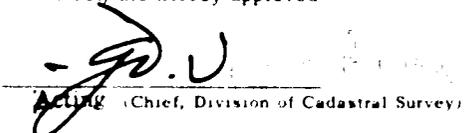

(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF THE
SUBDIVISIONAL LINES OF
SECTIONS 18, 19 AND 20
AND
THE SURVEY OF A PORTION OF THE
SUBDIVISION OF SECTION 18.
OF
TOWNSHIP 1 NORTH, RANGE 8 WEST

Of the Uintah Meridian,
the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

under special instructions dated December 17, 1974, approved December 18, 1974 and
Supplemental Instructions dated June 26, 1975 June 26, 1975 respectively

, which provided for the surveys included under U.S. Survey/Group
number 556, and assignment instructions dated April 23, 1975.

Survey commenced April 29, 1975

INDEX DIAGRAM

Township 1 N., Range 8 W.

6	5	4	3	2	1
7	8	9	10	11	12
7					
18	6 17	16	15	14	13
5	5				
19	4 20	2 21	22	23	24
3	2				
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of sec. 18 on pages 8 - 11.

Township 1 North, Range 8 West, Uintah Meridian, Utah

CHAINS

The south boundary (Uintah Special Base Line), the north boundary and west boundary (Second Guide Meridian West) were surveyed by Fred Johnson in 1903. The north 4 miles of the Second Guide Meridian West in T. 1 N., were resurveyed by Craig P. Sylvester concurrently under this same group and the record appears in the field notes of T. 1 N. R. 9 W. The east boundary was surveyed by Francis M. Lyman Jr. in 1903, the survey cancelled and surveyed again by Francis M. Lyman Jr. in 1905. The north 3 miles were retraced by O. E. Brashears for Washington Jenkins in 1905. The subdivisional lines were surveyed by Washington Jenkins in 1904, and the southeast portion of the subdivisional lines retraced by O. E. Brashears for Washington Jenkins in 1905. A portion of the corners were remonumented by Andrew Nelson in 1963, and Ferrel D. Reynolds in 1968.

The following field notes are those of a dependent resurvey of the subdivisional lines of sections 18, 19 and 20, and the survey of a portion of the interior subdivisional lines necessary for the subdivision of the south $\frac{1}{2}$ of section 18.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1973, and the Special Instructions for Group No. 556, Utah dated December 17, 1974, and the Supplemental Special Instructions dated June 26, 1975.

The directions of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by other observations on Polaris taken throughout the progress of the survey. Distances were determined by electronic measurement.

Topography was recorded on true lines where practical; lines impractical to retrace due to private property, heavy timber or rough terrain were determined by traverse method and topography scaled from U.S.G.S. topographic maps.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The geographic position for the southeast corner of sec. 20, as determined by ties to U.S.C. & G.S. bench mark "9W USBR" located in section 26, T. 2 N., R. 9 W., is as follows:

Latitude $40^{\circ}27'36.65''$ N. Longitude $110^{\circ}48'27.77''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ}00'$ E.

Dependent Resurvey of a Portion of the Subdivision
T. 1 N., R. 8 W., Uintah Meridian, Utah

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N. R. 8 W. Uintah Meridian

CHAINS

(Restoring the 1904 survey by Washington Jenkins)

Beginning at the cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2½ ins. diam., 20 ins. above ground, in a mound of stone, with brass cap mkd. as described in the remonumentation of corners in T. 1 N., R. 8 W. in 1968.

N. 0°01' E., bet. secs. 20 and 21.

Over mountainous land, covered with shadscale and oak brush; asc. along steep E slope in draw.

13.00 Draw, drains S. 15° E., from N; asc. up draw.

23.50 Leave bottom of draw, drains S from NW; asc. along W slope of draw.

39.87 The ¼ sec. cor. of secs. 20 and 21, determined by a mound of stone, no mks. could be identified. This is the best available evidence of the position of the original corner.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 1 N R 8 W
¼
S 20 | S 21
1975

N. 0°05' E., beginning new measurement.

Asc. SW slope.

10.50 Low spur, slopes S. 15° W.; asc. along W slope.

26.60 Small draw, drains S. 15° W.; asc. along E slope, enter scattered patches of aspen.

40.17 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2½ ins. diam., extending 6 ins. above ground, marked and witness as described in the remonumentation of corners in T. 1 N., R. 8 W. in 1968.

From the cor. of secs. 20, 21, 28 and 29.

N. 89°41' W., bet. secs. 20 and 29.

Over mountainous land, covered with shadscale and scattered oak brush; asc. steep E slope.

11.00 Ridge, bears N and S desc. steep SW slope.

40.15 The ¼ sec. cor. of secs. 20 and 29, monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with U.S. Department of Agriculture brass cap mkd.

¼ $\frac{S\ 20}{S\ 29}$
1968

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N. R. 8 W. Uintah Meridian. 117

CHAINS

- N. 89°38' W., beginning new measurement.
Desc. SW slope.
- 10.00 Base of steep descent, bears N. 25° W. and S. 25° E.;
desc. gentle SW slope.
- 19.935 Point for the W. 1/16 sec. cor. of secs. 20 and 29, at
midpoint.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.
- T 1 N R 8 W
W 1/16 $\frac{S 20}{S 29}$
1975
- Raise a mound of stone, 2 ft. base, 1½ ft. high, N of
cor.
- Fence, cor. bears E, 13 lks. dist., fences bears W,
and S; thence over valley land, along fence.
- 26.60 Rhodes Canal, 3 ft. deep, 12 lks. wide, flows S. 25° E.
- 36.50 Rim, bears NW and SE; desc. SW slope to bottom land.
- 39.87 The cor. of secs. 19, 20, 29 and 30, monumented with a
U.S. Department of Agriculture brass cap, at ground
level, with steel fence post alongside, brass cap mkd.
- $\frac{S 19 | S 20}{S 30 | S 29}$
1968
- Cor. is located on N edge of gravel road, and 10 lks. S
of E and W fence line.
-
- S. 89°57' W., bet. secs. 19 and 30.
Over bottom land, along gravel road.
- 9.00 Leave road which curves to NW.
- 12.00 Duchesne River, 3 ft. deep, 1.50 chs. wide, course
S. 42° E.; continue over bottom land, through underbrush.
- 19.935 The E. 1/16 sec. cor. of secs. 19 and 30, monumented with
an iron post, 2 ins. diam., extending 8 ins. above ground,
with U.S. Department of Agriculture brass cap mkd.
- E 1/16 $\frac{S 19}{S 30}$
1968
- Continue over grassy bottom land.
- 39.87 The ¼ sec. cor. of secs. 19 and 30, monumented with an
iron post, 2 ins. diam., extending 6 ins. above ground,
with original stone cor. and Unitah Engineering Co.
marker alongside, with the U.S. Department of Agriculture
brass cap mkd.
- ¼ $\frac{S 19}{S 30}$
1968

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N., R. 8 W., Uintah Meridian, Utah

CHAINS	
	S. 89°54' W., beginning new measurement.
	Asc. NE slope, along base of mountains, enter timber.
14.00	Spur, slopes N; desc. over NW slope.
32.60	West Fork Duchesne River, 2 ft. deep, 1.00 ch. wide, flows N. 50° E.; asc. SE slope.
36.50	Gravel road, bears N. 41° E. and S. 41° W.; asc. steep SE slope.
39.88	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent resurvey of the E. bdy. of T. 1 N., R. 9 W. (Second Guide Meridian West).
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0°14' E., bet. secs. 19 and 20.
	Over bottom land, covered with brush; asc. SW slope.
0.10	Fence, bears E and W; asc. SW slope.
3.60	Rim, bears NW and SE; asc. SW slope, over rolling bench.
6.80	Rhodes Canal, flows E from N; thence along canal.
10.30	Leave canal, course changes to NW.
19.94	The S. 1/16 sec. cor. of secs. 19 and 20, monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with U.S. Department of Agriculture brass cap mkd.
	S 1/16 S 19 S 20 1968
	Cor. is located on E and W fence line. Asc. general W slope on bench.
39.88	The ¼ sec. cor. of secs. 19 and 20, monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with U.S. Department of Agriculture brass cap mkd.
	¼ S 19 S 20 1968
	N. 0°02' W., beginning new measurement.
	Over bench, draining W.
20.80	Same canal, flows S. 31° W.
21.90	Fence, bears S. 32° W. and curves N along E side of gravel roadway; thence along roadway.
40.04	Point for the cor. of secs. 17, 18, 19 and 20, determined by fence lines to N, E and W, and roadway to S.

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N., R. 8 W., S. 17 & 20

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.

T 1 N R 8 W
S 18 | S 17
S 19 | S 20
1975

Cor. is located under wooden gate of cattle driveway.

From this cor., the NW cor. of a concrete foundation for cattle guard in road bears N. 64° E., 24½ lks. dist.; the SW cor. of same cattle guard bears S. 78° E., 21 lks. dist.

From the cor. of secs. 16, 17, 20 and 21.

N. 89°40' W., bet. secs. 17 and 20.

Over mountainous land, covered with scattered patches of oak brush and aspen; asc. SE slope.

- 5.00 Low ridge, bears N and S; desc. SW slope.
- 25.80 Small draw, drains S; asc. E slope.
- 30.50 Low ridge, bears N and S; desc. steep and ledgy W slope.
- 40.12 The ¼ sec. cor. of secs. 17 and 20, marked with a sandstone, 4 x 12 x 18 ins., in a mound of stone, plainly mkd. ¼. Also mound of stone W of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 1 N R 8 W
¼ S 17
S 20
1975

N. 89°49' W., beginning new measurement.

Desc. steep and ledgy W slope.

- 12.00 Base of ledgy W slope; desc. rocky W slope, in valley.
- 36.70 Rhodes Canal, drains S. 10° E.
- 39.40 Gravel road, bears N and S; line intersects road at cattle guard.
- 39.80 The cor. of secs. 17, 18, 19 and 20.

S. 89°49' W., bet. secs. 18 and 19.

Over mountain land, across small pasture, along E and W fence line; desc. gentle W slope.

- 9.40 Left bank Duchesne River, bears S. 12° E. and N. 12° W.; thence over river, about 2 ft. deep, swift current.

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N., R. 8 W., Uintah Meridian, Utah

CHAINS	
10.50	Right bank same river, bears N. 12° W. and S. 12° E.; asc. steep NE slope, through scattered aspen.
20.165	Point for the E. 1/16 sec. cor. of secs. 18 and 19, at midpoint. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd. <div style="text-align: center;"> T 1 N R 8 W E 1/16 $\frac{S 18}{S 19}$ 1975 </div>
	Asc. NE slope, along E and W fence line.
40.33	The ¼ sec. cor. of secs. 18 and 19, marked by an iron post, 2½ ins. diam., extending 6 ins. above ground, mkd. and witnessed as described in the remonumentation of corners in T. 1 N., R. 8 W., in 1968. Cor. is located at end of fence line, from E. <div style="text-align: center;"> _____ S. 89°44' W., beginning new measurement. </div>
	Asc. NE slope, through scattered patches of aspen and oak brush.
6.60	Base of ledgy NE slope, bears NW and SE; asc. ledgy NE slope.
19.745	Point for the W. 1/16 sec. cor. of secs. 18 and 19, at proportionate dist. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd. <div style="text-align: center;"> W 1/16 $\frac{S 18}{S 19}$ 1975 </div>
	Raise a small mound of stone E of cor.; asc. NE slope, through timber.
39.25	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent resurvey of the E. bdy. of T. 1 N., R. 9 W. (Second Guide Meridian West). From the cor. of secs. 17, 18, 19 and 20. N. 0°04' W., bet. secs. 17 and 18. Over mountain land, along N and S fence line, on W side of gravel road, and E side of small pasture.
12.40	Leave fence line, which bears to NW.
12.90	Gravel road, curves NW from S; asc. S slope, leave pasture bottom land.
15.80	Rhodes Canal, 2 ft. deep, 20 lks. wide, drains E, about 2.00 chs., thence southward; asc. S slope, through oak and sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N., R. 8 W., Uintah Meridian, Utah

CHAINS

- 19.94 Point for the S. 1/16 sec. cor. of secs. 17 and 18, at
point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, in a collar of stone, with brass cap mkd.
- T 1 N R 8 W
S 1/16
S 18 | S 17
1975
- Asc. SE slope, on E side of ridge, through dense oak
brush.
- 39.88 The ¼ sec. cor. of secs. 17 and 18, monumented with an
iron post, 2½ ins. diam., in a mound of stone to top,
mkd. and witnessed as described in the remonumentation
of corners in T. 1 N., R. 8 W., in 1968.
- _____
- N. 0°01' E., beginning new measurement.
- Asc. SE slope.
- 7.50 Draw, drains S. 13° E.; asc. SW slope.
- 35.00 Small spur, slopes SW; asc. along W slope.
- 39.69 The cor. of secs. 7, 8, 17 and 18, monumented with a
red sandstone, 12 x 14 x 24 ins., mkd. 5 notches on the
E and 4 notches on the S edges.
- At the corner point
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.
- T 1 N R 8 W
S 7 | S 8
S 18 | S 17
1975
- Deposit the marked stone alongside the iron post.
- Raise a mound of stone, 2 ft. base, 2 ft. high, W of
cor.
-
- N. 89°54' W., bet. secs. 7 and 18.
- Over mountainous land, covered with oak brush and aspen;
desc. W slope.
- 8.00 Draw, drains S from NE; asc. along irregular and broken
S slope.
- 10.20 Forest Service trail, bears S and curves NE.
- 27.00 High ridge, bears N and S; desc. steep and ledgy
E slope.
- 39.75 The ¼ sec. cor. of secs. 7 and 18, determined by a mound
of stone, no mks. identified. This position is harmon-
iously related to the surrounding corners, and was
accepted as the best evidence of the position of the
original corner. No bearing trees could be found.

Dependent Resurvey of a Portion of the Subdivision,
T. 1 N., R. 8 W., Uintah Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 1 N R 8 W
 $\frac{1}{4}$ $\frac{S 7}{S 18}$
 1975

N. 89°54' W., beginning new measurement.

Desc. ledgy W slope.

- 3.00 Base of rocky slide area and broken ledges; desc. rocky W slope.
- 19.60 Gravel road, bears N. 40° W. and S. 40° E.; desc. gentle W slope, over bottom land.
- 20.70 Rhodes Canal, 2 ft. deep, 15 lks. wide, flows S. 42° E.
- 30.60 Duchesne River, 3 ft. deep, 1.00 ch. wide, flows S. 10° E.; asc. E slope, through undergrowth.
- 36.00 Base of mountain, bears N and S. 20° E.; asc. NE slope.
- 39.75 The cor. of secs. 7, 12, 13 and 18, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent resurvey of the E. bdy. of T. 1 N., R. 9 W. (Second Guide Meridian West).

Subdivision of Sec. 18, T. 1 N., R. 8 W.,
 Uintah Meridian, Utah

From the ¼ sec. cor. of secs. 18 and 19.

N. 0°23' E., on the N and S center line of sec. 18.

Over mountainous land, covered with oak brush and aspen; desc. NE slope.

- 19.99 Point for the center south 1/16 sec. cor. of sec. 18, at midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

C
 S 1/16 | S 18
 C
 1975

- 25.40 Duchesne River, 2 ft. deep, 1.25 chs. wide, flows S. 72° E.; asc. gentle SW slope.
- 32.20 Rhodes Canal, 1 ft. deep, 15 lks. wide, flows S. 46° E.
- 38.90 Gravel road, bears NW and SE.

Subdivision of Sec. 18, T. 1 N., R. 8 W.,
 Uintah Meridian Utah

CHAINS

39.98 Point for the center $\frac{1}{4}$ sec. cor. of sec. 18, at inter-
 section with the E and W center line.
 Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
 in the ground, in a collar of stone, with brass cap mkd.

T 1 N R 8 W
 C $\frac{1}{4}$ S 18
 1975

From which

A pine, 5 ins. diam., bears S. 80° E., 15 lks.
 dist., mkd. BT.

Asc. SW slope of mountain.

51.50 Top of ascent, bears SE and N; thence along broken W
 slope.

60.60 Draw, drains W; asc. broken and ledgy SW slope.

79.77 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

From the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

S. $89^{\circ}58'$ W., on the E and W center line of sec. 18.

Over mountainous land, covered with oak brush and aspen;
 asc. SE slope.

5.20 Forest Service trail, on top of spur, bears N and S.;
 thence along S slope.

20.005 Point for the center east $\frac{1}{16}$ sec. cor. of sec. 18, at
 midpoint.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
 in the ground to bedrock, in a mound of stone, 3 ft. base
 to top, with brass cap mkd.

E $\frac{1}{16}$
 C $\frac{1}{16}$ S 18 C
 1975

Desc. SW slope.

23.00 Small draw, drains S.

40.01 The center $\frac{1}{4}$ sec. cor. of sec. 18.

42.10 Gravel road, bears NW and SE.

46.90 Rhodes Canal, 2 ft. deep, 15 lks. wide, flows S. 50° E.

48.80 Duchesne River, 2 ft. deep, 1.20 chs. wide, flows
 S. 53° E.; asc. gentle E slope, through oak and sagebrush.

59.92 Point for the center west $\frac{1}{16}$ sec. cor. of sec. 18, at
 proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
 in the ground to bedrock, in a mound of stone, 3 ft. base
 to top, with brass cap mkd.

Subdivision of Sec. 18, T. 1 N., R. 8 W.,
 Uintah Meridian, Utah

CHAINS

$$\begin{array}{c} \text{W } 1/16 \\ \text{C} \quad \frac{\quad}{\text{S } 18} \quad \text{C} \\ 1975 \end{array}$$

- 67.00 Base of steep ascent, bears N and SE; asc. W slope of mountain.
- 79.52 The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, mkd. and witnessed as described in the remonumentation of corners in T. 1 N., R. 8 W. in 1968.
- From the E. 1/16 sec. cor. of secs. 18 and 19.
- N. $0^{\circ}10'$ E., on the N and S center line of the $SE\frac{1}{4}$ of sec. 18.
- Over mountainous land, covered with oak brush; desc. NE slope.
- 18.50 Right bank Duchesne River, bears NW and SE.
- 19.60 Left bank same river, bears NW and SE; asc. S slope.
- 19.965 Point for the center 1/16 sec. cor. of the $SE\frac{1}{4}$ of sec. 18, at intersection with the E and W center line.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- $$\begin{array}{c} \text{SE } 1/16 \text{ S } 18 \\ 1975 \end{array}$$
- 21.20 Rhodes Canal, 1 ft. deep, 15 lks. wide, flows S 70° E.
- 24.70 Gravel road, bears NW and SE; asc. S slope, through oak brush.
- 39.93 The center east 1/16 sec. cor. of sec. 18.
- From the S. 1/16 sec. cor. of secs. 17 and 18.
- S. $89^{\circ}53'$ W., on the E and W center line of the $SE\frac{1}{4}$ of sec. 18.
- Over mountain land, through oak brush; along S slope.
- 2.70 U.S. Forest Service trail, bears N and S.
- 12.20 Gravel road, bears N. 70° W. and S. 70° E.
- 18.40 Rhodes Canal, flows S. 70° E.
- 20.085 The center 1/16 sec. cor. of the $SE\frac{1}{4}$ of sec. 18.
- 20.50 Left bank of Duchesne River, bears NW and SE.
- 21.70 Right bank same river, bears NW and SE irregularly; asc. along N slope, through heavy oak brush and aspen.
- 40.17 The center south 1/16 sec. cor. of sec. 18.

Subdivision of Sec. 18, T. 1 N., R. 8 W.,
T. 1 N., R. 8 W.

CHAINS

From the W. 1/16 sec. cor. of secs. 18 and 19.
N. 0°09' E., on the N and S center line of the SW¼ of
sec. 18.

Over mountain land, covered with oak brush and aspen
patches; desc. NE slope of mountain.

20.03 Point for the center 1/16 sec. cor. of the SW¼ of sec. 18,
at intersection with the E and W center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins.
in the ground to bedrock, in a mound of stone, 4 ft. base
to top, with brass cap mkd.

SW 1/16 S 18
1975

28.00 Base of mountain, bears N and SE; thence along gentle
E slope, covered with oak and sagebrush.

40.06 The center west 1/16 sec. cor. of sec. 18.

From the center south 1/16 sec. cor. of sec. 18.

S. 89°51' W., on the E and W center line of the SW¼ of
sec. 18.

Over mountain land, through oak brush and aspen; asc.
NE slope of mountain.

19.83 The center 1/16 sec. cor. of the SW¼ of sec. 18.

39.38 The S. 1/16 sec. cor. of secs. 13 and 18, on the W. bdy.
of the Tp., monumented with an iron post, 2½ ins. diam.,
set, mkd. and witnessed as described in the field notes
of the concurrent resurvey of the E. bdy. of T. 1 N.,
R. 9 W. (Second Guide Meridian West).

General Description

The portion of T 1 N., R. 8 W., surveyed consists of
bottom land along the Duchesne River, extending into the
higher mountains on either side of the river. The
mountains are covered with sagebrush and oak brush with
patches of aspen, pine and juniper timber. The river
bottom is covered with willows and cottonwood trees with
a few small grass pastures along the river.

The north portion of the Tp. is located within the
Ashley National Forest, the south portion is Indian
land. A gravel road bears NW and SE through secs. 18 and
19. The only buildings within the survey are the Stock-
more Ranger Station, located in the SE¼ of sec. 19. The
elevation of the land within the survey varies from about
7,000 to 8,500 above sea level.

The mean magnetic declination was found to be
15°00' E.

CHAINS

Blank

Page

(I) ~~(WXX)~~ Craig P. Sylvester, HEREBY
Supplemental Instructions dated June 26, 1975
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th
of December, 19 74, (I) ~~(WXX)~~ have dependently resurveyed the subdivi
lines of secs. 18, 19 and 20, and surveyed a portion of the subdivision
sec. 18, T. 1 N., R. 8 W.,

of the Uintah Meridian, in the State of Utah, with
are represented in the foregoing field notes as having been executed by (me), ~~(WXX)~~ and under (~~(WXX)~~
~~(WXX)~~ direction; and that said survey has been made in strict conformity with said special ins
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and
specific manner described in the foregoing field notes.

February 12, 1976
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the subdivisional lines
secs. 18, 19 and 20, and surveyed a portion of the subdivision of sec.
T. 1 N., R. 8 W., Uintah Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

JUN 08 1977
(Date)

W. J. ...
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I Certify That the foregoing transcript of the field notes of the above mentioned survey
, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

352

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF THE

NORTH 4 MILES OF THE SECOND GUIDE MERIDIAN WEST

IN TOWNSHIP 1 NORTH, BETWEEN RANGES 8 AND 9 WEST;

THE SUBDIVISIONAL LINES OF SECTION 1.

AND A

PARTIAL SUBDIVISION OF SECTION 1, 210

TOWNSHIP 1 NORTH, RANGE 9 WEST 211

Of the UINTAH Meridian,
the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated December 17, 1974, approved December 18, 1974 and
supplemental instructions dated June 26, 1975 and June 26, 1975 respectively

, which provided for the surveys included under U.S. Survey/Group
number 556, and assignment instructions dated April 23, 1975.

Survey commenced July 7, 1975

July 29, 1975

INDEX DIAGRAM

Township 1 N., Range 9 W.,

6	5	4	3	2	6 1	4
					5	
7	8	9	10	11	12	4
18	17	16	15	14	13	3
19	20	21	22	23	24	2
30	29	28	27	26	25	
31	32	33	34	35	36	

Subdivision of Sec. 1 on pages 7 - 9.

CHAINS

The history of surveys of Township 1 North, Range 9 West, Uintah Meridian, Utah is as follows:

The Uintah Special Base Line along the south boundary of Township 1 North, through Range 9 West; the Second Guide Meridian West between Ranges 8 and 9 West, through Township 1 North; the north and west boundaries, and subdivisional lines were surveyed by Fred Johnson in 1903. The north boundary of section 1 was concurrently resurveyed under this same group and appears in the dependent resurvey of Township 2 North, Range 9 West.

The following field notes describe the dependent resurvey of the north 4 miles of the Second Guide Meridian West in Township 1 North between Ranges 8 and 9 West; the subdivisional lines of section 1; and a partial subdivision of section 1, T. 1 N., R. 9 W., Uintah Meridian, Utah.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, the Special Instructions for Group 556, Utah, dated December 17, 1974, and Supplemental Special Instructions, dated June 26, 1975.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by other observations on Polaris taken throughout the progress of the survey. Distances were determined by electronic measurement.

The geographic position of the corner of secs. 19, 24, 25 and 30, on the E. bdy., as determined by a tie to the United States Coast and Geodetic Survey triangulation station Bench Mark "9W USBR" is as follows:

Latitude 40°27'36.9" N. Longitude 110°50'44.2" W.

The mean magnetic declination is 15°00' E.

Dependent Resurvey of the Second Guide Meridian West,
in T. 1 N., between Rs. 8 and 9 W., Uintah Meridian, Utah
(Restoring the 1903 survey by Fred Johnson)

Beginning at the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with a sandstone, 10 x 12 x 14 ins., firmly set and plainly mkd. 4 notches on the N, and 2 notches on the S edges with a scattered mound of stone W of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of North 4 Miles of the Second Guide Meridian West, T. 1 N., bet. Rs. 8 and 9 W., Uintah Mer., U.S.

CHAINS	
	T 1 N R 9 W R 8 W S 24 S 19 S 25 S 30 1975
	Deposit the mkd. stone in the mound alongside the iron post.
	N. 0°29' E., bet. secs. 19 and 24.
	Over mountainous land, covered with shadscale and sagebrush; asc. steep and rocky SE slope.
26.20	Small draw, drains SE; asc. SE slope.
35.00	Spur, slopes sharply S. 78° E.; thence along E slope.
39.97	The 1/4 sec. cor. of secs. 19 and 24, monumented with a sandstone, 6 x 10 x 24 ins., plainly mkd. 1/4. Scattered mound of stone.
	At the corner point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3. ft. base to top, with brass cap mkd.
	T 1 N R 9 W R 8 W 1/4 S 24 S 19 1975
	Deposit the mkd. stone alongside the iron post.
	Raise a mound of stone, 2 ft. base, 2 ft. high, E of cor.

	N. 0°02' W., beginning new measurement.
	Asc. along E slope.
3.40	Draw, drains S. 70° E.; asc. S slope.
18.00	Enter scattered patches of aspen and pine.
36.70	Lookout Point, on high ridge, which bears NW and SE; desc. NE slope, through timber.
39.74	The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 8 x 14 x 17 ins., plainly mkd. 3 notches on N and S edges, with a mound of stone W of cor.
	from which the original bearing trees
	A pine, 16 ins. diam., bears N. 53° E., 205 lks. dist., mkd. T1N R8W S18 BT.
	An aspen, 8 ins. diam., bears S. 55° E., 132 lks. dist., mkd. T1N R8W S19 BT.
	A dead aspen, bears S. 24° W., 75 lks. dist., mkd. T1N R9W S24 BT.
	At the corner point

Dependent Resurvey of North 4 Miles of the Second Guide Meridian West, T. 1 N., bet. Rs. 8 and 9 W., Uintah Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 1 N
R 9 W R 8 W
S 13 | S 18
S 24 | S 19
1975

from which the new bearing trees

A pine, 10 ins. diam., bears N. 55° E., 17 lks. dist., mkd. T1N R8W S18 BT.

A pine, 11 ins. diam., bears N. 10° W., 40 lks. dist., mkd. T1N R9W S13 BT.

Deposit the mkd. stone alongside the iron post.

N. 0°01' W., bet. secs. 13 and 18.

Over mountainous land, covered with timber; desc. steep and ledgy NE slope.

20.07 Point for the S. 1/16 sec. cor. of secs. 13 and 18, at midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

S 1/16
S 13 | S 18
1975

Cor. is located on spur, which slopes NE; leave timber, desc. along E slope, through oak brush.

40.14 The ¼ sec. cor. of secs. 13 and 18, monumented with an iron post, 2½ ins. diam., extending 10 ins. above ground, set and witnessed as described in the remonumentation of corners in T. 1 N., R. 8 W., in 1968.

N. 0°02' E., beginning new measurement.

Continue along broken E slope, through oak brush.

23.00 Base of ascent, bears E and W; asc. SE slope of spur.

30.00 Spur, slopes E; desc. ledgy NE slope, through timber.

39.88 The cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 8 x 10 x 14 ins., firmly set and plainly mkd. 2 notches on N, and 4 notches on S edges. No bearing tree identified. Mound of stone W of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of North 4 Miles of the Second Guide Meridian West. T. 1 N. bet. Rs. 8 and 9 W. Uintah Mer. Tr.

CHAINS

T 1 N
R 9 W R 8 W
S 12 | S 7
S 13 | S 18
1975

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 2 ft. high, W of cor.

N. 0°03' E., bet. secs. 7 and 12.

Over mountainous land, through timber; desc. NE slope.

- 3.50 Base of steep descent, bears N and SE irregularly; thence along E slope, through undergrowth and cottonwood trees.
- 27.20 Duchesne River, 2 ft. deep, 1.00 ch. wide, flows SE irregularly; asc. gentle W slope, in canyon.
- 36.00 Enter Aspen Campground.
- 39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, at proportionate distance. There is no evidence of original corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 1 N
R 9 W R 8 W
 $\frac{1}{4}$
S 12 | S 7
1975
- Set a painted pine post, 5 ins. diam., 4 ft. high alongside the iron post.
- 42.90 Leave Aspen campground.
- 48.00 Gravel road, bears NW and SE; asc. gentle W slope.
- 63.00 Base of mountain, bears NW and SE irregularly; asc. SW slope; enter oak brush and scattered patches of aspen.
- 67.40 Graded gravel road, bears NW and SE.
- 71.10 Same road, bears NW and SE.
- 79.94 The cor. of secs. 1, 6, 7 and 12, monumented with an iron post, 2½ ins. diam., extending 16 ins. above ground, in a mound of stone, set and witnessed as described in the remonumentation of corners in T. 1 N., R. 8 W., in 1968.
- N. 0°07' E., bet. secs. 1 and 6.
- Over mountainous land, covered with oak brush and aspen; asc. SW slope.
- 8.20 Graded gravel road, bears NW and SE.
- 13.50 Top of steep ascent, bears NW and SE irregularly; thence over small bench, through dense oak brush.
- 24.50 Same road, bears N. 85° E and curves SW; desc. NW slope.

Dependent Resurvey of North 4 Miles of the Second Guide
Meridian West, T. 1 N., bet. Rs. 8 and 9 W., Uintah Mer., Utah

CHAINS	
32.10	Draw, drains W; asc. SW slope.
40.05	The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 18 ins. above ground, in a mound of stone, set and witnessed as described in the remonumentation of corners in T. 1 N., R. 8 W., in 1968.
	—————
	N. $0^{\circ}06'$ E., beginning new measurement.
	Asc. along broken W slope.
13.20	Draw, drains SW; asc. steep S slope.
17.20	Same gravel road, bears N. 82° E. and curves NW along mountain, about 15.00 chs. to end.
33.00	Crest of steep ascent, bears E and NW; asc. gentle W slope on ridge, through dense aspen.
38.91	The cor. of Tps. 1 and 2 N., Rs. 8 and 9 W., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 20 ins. above ground, in a mound of stone, set and witnessed as described in the remonumentation of corners in T. 2 N., R. 9 W., in 1968.

Dependent Resurvey of a portion of the
Subdivisional Lines, T. 1 N., R. 9 W.,
Uintah Meridian, Utah
(Restoring the 1903 survey by Fred Johnson)

—————

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy.
of the Tp., hereintofore described.

S. $89^{\circ}10'$ W., bet. secs. 1 and 12.

Over mountain land covered with oak brush and scattered
patches of aspen; desc. broken and steep SW slope.

12.20 Gravel road, bears S. 10° E. and curves NW; desc. gentle
W slope, in canyon bottom.

16.50 Duchesne River, 2 ft. deep, 1.00 ch. wide, flows SE
irregularly; asc. gentle E slope.

28.00 Enter timber; asc. NE slope.

39.95 The $\frac{1}{4}$ sec. cor. of secs. 1 and 12, monumented with a
quartzite stone, 6 x 12 x 18 ins., firmly set and plainly
mkd. $\frac{1}{4}$.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, in a collar of stone, with brass cap mkd.

T 1 N R 9 W
 $\frac{1}{4}$ $\frac{S 1}{S 12}$
1975

from which

Dependent Resurvey of a portion of the Subdivisional
Lines, T. 1 N. R. 9 W. Uintah Meridian, Utah

CHAINS

An aspen, 6 ins. diam., bears N. 39°14' E., 14 lks.
dist., mkd. $\frac{1}{4}$ S1 BT.

An aspen, 9 ins. diam., bears S. 3°30' E., 2 lks.
dist., mkd. $\frac{1}{4}$ S12 BT.

An X on a boulder, bears N. 84°50' E., 48 lks.
dist.

An X on a boulder, bears N. 49°10' W., 8 lks. dist.

Deposit the mkd. stone alongside the iron post.

S. 89°12' W., beginning new measurement.

Asc. E slope, through timber.

- 3.20 Base of steep ascent, bears NW and SE irregularly; asc.
steep and ledgy E slope.
- 22.50 Spur, slopes sharply NE; asc. along N slope.
- 37.00 Head of draw, drains NE; asc. E slope.
- 39.23 The cor. of secs. 1, 2, 11 and 12, monumented with a
sandstone, firmly set and mkd. 5 notches on S and 1 notch
on E edge, with a mound of stone W of corner.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in
the ground, in a collar of stone, with brass cap mkd.

T	1	N	R	9	W
S	2		S	1	
S	11		S	12	
1975					

from which

A spruce, 10 ins. diam., bears N. 46° E., 100 lks.
dist., mkd. T1N R9W S1 BT.

Deposit the mkd. stone alongside the iron post.

N. 0°20' W., bet. secs. 1 and 2.

Over mountainous land, covered with aspen; desc. along
E slope.

- 10.50 Spur, slopes NE; desc. steep and rocky NE slope.
- 19.00 Spur, slopes NE; desc. N slope, through timber.
- 40.23 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, at propor-
tionate distance. There is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in
the ground to bedrock, in a mound of stone, 3 ft. base to
top, with brass cap mkd.

T	1	N	R	9	W
$\frac{1}{4}$					
S	2		S	1	
97					

Dependent Resurvey of a portion of the Subdivision
 Line of Sec. 1, T. 1 N., R. 9 W., Uintah Meridian, Utah

CHAINS

from which

A spruce, 18 ins. diam., bears S. 80° E., 30 lks.
 dist., mkd. T1N R9W S1 BT.

A spruce, 14 ins. diam., bears S. 15° W., 26 lks.
 dist., mkd. T1N R9W S2 BT.

Desc. N slope, through timber.

45.50 Draw, drains N. 82° E.; asc. SE slope.

52.10 Spur, slopes E; desc. NE slope.

60.345 Point for the N. 1/16 sec. cor. of secs. 1 and 2, at
 proportionate distance.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in
 the ground to bedrock, in a mound of stone, 3 ft. base to
 top, with brass cap mkd.

T 1 N R 9 W
 N 1/16
 S 2 | S 1
 1975

Desc. NE slope.

72.00 Base of mountain, bears N. 20° W. and S. 20° E.; desc.
 along E slope, in canyon.

80.01 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the
 Tp., monumented with an iron post, 2½ ins. diam.,
 extending 10 ins. above ground, mkd. and witnessed as
 described in the remonumentation of corners in T. 2 N.,
 R. 9 W., in 1968.

Subdivision of sec. 1, T. 1 N., R. 9 W.,
 Uintah Meridian, Utah

From the ¼ sec. cor. of secs. 1 and 12.

N. 0°04' W., on the N and S center line of sec. 1.

Over mountain land, through timber; desc. over NE slope,
 in canyon.

23.00 Duchesne River, 2 ft. deep, 90 lks. wide, flows E; asc.
 along gentle W slope, through cottonwood trees and under-
 growth.

40.15 Point for the center ¼ sec. cor. of sec. 1, at inter-
 section with the E and W center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in
 the ground, in a collar of stone, with brass cap mkd.

T 1 N R 9 W
 C ¼ S 1
 1975

Asc. gentle W slope.

54.00 Gravel road, bears S. 15° E. and N; thence along road.

Subdivision of sec. 1, T. 1 N., R. 9 W.,
 Uintah Meridian, Utah

CHAINS
 60.07

Point for the center north 1/16 sec. cor. of sec. 1, at proportionate distance, falls in gravel road and cannot be monumented.

Deposit brown glass and stone, 3 x 6 x 8 ins., marked "X" 18 ins. below surface of road

from which

An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground, in a collar of stone, for a reference monument, bears N. 55°30' E., 20 ft. dist., with brass cap mkd. T1N R9W CN1/16 S1 RM 20 FT. 1975 and an arrow pointing to the cor.

An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground, in a collar of stone, for a reference monument, bears S. 47°50' E., 21 ft. dist., with brass cap mkd. T1N R9W CN1/16 S1 RM 21 FT. 1975 and an arrow pointing to the cor.

61.90 Leave road, which curves NW; asc. gentle SW slope, enter scattered oak brush.

76.90 Creek bed, drains S. 41° W., small stream of water.

79.765 The ¼ sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., mkd. and witnessed as described in the concurrent resurvey of the S. bdy. of T. 2 N., R. 9 W.

From the ¼ sec. cor. of secs. 1 and 6, on the E. bdy. of the Tp.

S. 69°19' W., on the E and W center line of sec. 1.

Over broken mountain land, covered with oak brush; desc. steep SW slope.

7.00 Rocky spur, slopes S. 49° W.; desc. steep W slope.

23.00 Base steep descent, bears NW and SE irregularly; desc. W slope.

37.80 Gravel road, bears N. 8° W. and S. 8° E.

40.05 The center ¼ sec. cor. of sec. 1.

50.30 Duchesne River, 2 ft. deep, 90 lks. wide, drains S irregularly; asc. gentle E slope, enter scattered aspen.

59.76 Point for the center west 1/16 sec. cor. of sec. 1, at midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

W 1/16

C
 S 1
 1975

Asc. E slope.

63.00 Base of steep ascent, bears NW and SE irregularly; asc. steep NE slope.

Subdivision of sec. 1, T. 1 N., R. 9 W.,
 Uintah Meridian, Utah

CHAINS	
75.70	Spur, slopes N. 40° E.; thence along N slope.
79.47	The ¼ sec. cor. of secs. 1 and 2.
	From the center west 1/16 sec. cor. of sec. 1.
	N. 0°12' W., on the N and S center line of the NW¼ of sec. 1.
	Over mountain land, through aspen trees; along E slope.
20.02	Point for the center 1/16 sec. cor. of the NW¼ of sec. 1, at intersection with the E and W center line.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	NW 1/16 S 1 1975
27.00	Duchesne River, 2 ft. deep, 80 lks. wide, drains SE; asc. gentle W slope.
28.70	Gravel road, bears N. 40° W. and S. 40° E.
39.70	The W. 1/16 sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent resurvey of a portion of the S. bdy. of T. 2 N., R. 9 W.
	From the center north 1/16 sec. cor. of sec. 1.
	S. 89°36' W., on the E and W center line of the NW¼ of sec. 1.
	Over mountain land in canyon bottom; desc. gentle W slope.
9.50	Duchesne River, 2 ft. deep, 1.00 ch. wide, flows SE; asc. gentle E slope.
19.755	The center 1/16 sec. cor. of the NW¼ of sec. 1.
32.00	Base of mountain, bears NW and SE; asc. NE slope, through aspen.
39.51	The N. 1/16 sec. cor. of secs. 1 and 2.

General Description

The portion of T. 1 N., R. 9 W., surveyed consists of bottom land along the Duchesne River, extending into the higher mountainous land on either side of the river. The mountains are covered with sage and oak brush, with patches of aspen, pine and juniper timber. The river bottom is covered with willows and cottonwood trees, with a few small grass pastures.

The portion of the Tp. surveyed is located within the Ashley National Forest. A gravel road bears NW and SE, along the Duchesne River, in sec. 1. Elevation of the land surveyed varies from about 7200 to 8800 ft. above sea level.

Subdivision of sec. 1, T. 1 N., R. 9 W.,
Uintah Meridian, Utah

CHAINS

The mean magnetic declination was found to be
15°00' E.

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Survy. Surveying Tech.
Gail E. Reynolds	Surveying Tech.
Frank Profaizer	Surveying Tech.
Stewart Burt	Surveying Tech.
Craig Kennedy	Surveying Aid
Craig Black	Surveying Aid
Russel Brown	Surveying Aid
Timothy Ingram	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~We~~ Craig P. Sylvester

Supplemental Instructions dated June 26, 1975

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th

of December, 19 74, (I) ~~We~~ have dependently resurveyed the north 4 miles of the E. bdy., (Second Guide Meridian West), and the exterior subdivisional lines of sec. 1, and surveyed a portion of the subdivision of sec. 1, T. 1 N., R. 9 W.,

of the Uintah Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~us~~ and under ~~our~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

February 20, 1976
(Date)

Craig P. Sylvester
(Supervisory Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the north 4 miles of the E. bdy., (Second Guide Meridian West) and the exterior subdivisional lines of sec. 1, and the survey of a portion of the subdivision of sec. 1 of T. 1 N., R. 9 W., Uintah Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 0 8 1977
(Date)

[Signature]
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

_____, is a true copy of the original field notes

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE

EAST MILE OF THE SOUTH BOUNDARY;

THE SOUTH MILE OF THE SECOND GUIDE MERIDIAN WEST

THROUGH TOWNSHIP 2 NORTH

BETWEEN RANGES 8 AND 9 WEST;

THE SUBDIVISIONAL LINES OF SECTIONS 26 AND 36;

AND A

PARTIAL SUBDIVISION OF SECTIONS 26 AND 36

OF

TOWNSHIP 2 NORTH, RANGE 9 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated December 17, 1974, approved December 18, 1974 and
Supplemental Instructions dated June 26, 1975 June 26, 1975 respectively.

_____, which provided for the surveys included under U.S. Survey/Group
Number 556, and assignment instructions dated April 23, 1975.

Survey commenced July 1, 1975

August 1, 1975

INDEX DIAGRAM

Township 2 N., Range 9 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
				9	
30	29	28	27	7 26	5 25
				6	5
31	32	33	34	35	4 36
					1

Subdivision of sec. 36, pages 9 - 11
 Subdivision of sec. 26, pages 11 - 14

Township 2 North, Range 9 West, Uintah Meridian, Utah

CHAINS

The history of surveys of Township 2 North, Range 9 West, Uintah Meridian, Utah, is as follows:

The south boundary, and the Second Guide Meridian West between Ranges 8 and 9 West, through Township 2 North were surveyed by Fred Johnson in 1903. The west and north boundaries, and the subdivisional lines were surveyed by John W. McKim in 1903.

The following field notes describe the dependent resurvey of the east mile of the south boundary, the south mile of the Second Guide Meridian West between Ranges 8 and 9 West, through Township 2 North; the subdivisional lines of secs. 26 and 36; and a partial subdivision of secs. 26 and 36.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 556, Utah, dated December 17, 1974, and Supplemental Special Instructions, dated June 26, 1975.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were re-monumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of the lines were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by other observations on Polaris taken throughout the progress of the survey. Distances were determined by electronic measurement.

The geographic position of the southeast corner of the township determined by a tie to the United States Coast and Geodetic Survey triangulation station bench mark "9W USBR" is as follows:

Latitude 40°31'04.65" N. Longitude 110°50'43.77" W.

The mean magnetic declination is 15°00' E.

Dependent Resurvey of a portion of the S. Bdy. of
T. 2 N., R. 9 W., Uintah Meridian, Utah
(Restoring the 1903 survey by Fred Johnson)

Beginning at the cor. of Tps. 1 and 2 N., Rs. 8 and 9 W., monumented with an iron post, 2½ ins. diam., extending 20 ins. above ground, in a mound of stone, set and witnessed as described in the re-monumentation of corners in T. 2 N., R. 9 W. in 1968.

N. 89°40' W., bet. secs. 1 and 36.

Over mountainous land, covered with oak brush, and aspen trees; desc. W slope, on ridge top.

5.00 Crest steep descent, bears N and S; desc. steep and rocky W. slope.

Dependent Resurvey of a portion of the S. Bdy. of
T. 2 N., R. 9 W., Uintah

CHAINS	
33.00	Base of steep descent, bears N and S; desc. gentle W slope.
38.60	Swift Creek, 1 ft. deep, 10 lks. wide, drains SW.
40.13	The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a sandstone, 8 x 12 x 16 ins., in a mound of stone, plainly mkd. $\frac{1}{4}$.
	At the corner point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T 2 N R 9 W S 36 $\frac{1}{4}$ S 1 T 1 N 1975
	Deposit the mkd. stone in mound, alongside the iron post.
	Cor. is located at base of small lava rock slide.

	S. $89^{\circ}34'$ W., beginning new measurement.
	Desc. gentle SW slope.
9.00	Leave oak brush.
19.795	Point for the W. $1/16$ sec. cor. of secs. 1 and 36, at midpoint.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T 2 N R 9 W S 36 W $1/16$ S 1 T 1 N 1975
	Desc. gentle W slope in canyon, over small pasture.
28.50	Gravel road, bears NW and SE.
38.00	Left bank Duchesne River, bears NW and SE irregularly.
39.30	Right bank same river, bears NW and SE irregularly.
39.59	The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 20 ins. above ground, in a mound of stone, mkd. and witnessed as described in the remonumentation of corners in T. 2 N., R. 9 W., in 1968.

Dependent Resurvey of the south mile of the
Second Guide Meridian West, through T. 2 N.,
between Rs. 8 and 9 W., Uintah Meridian, Utah
(Restoring the 1903 survey by Fred Johnson)

Dependent Resurvey of the south mile of the 2nd G.M. West,
T. 2 N. bet. Rs. 8 and 9 W.. Uintah Meridian Utah

CHAINS

From the cor. of Tps. 1 and 2 N., Rs. 8 and 9 W.

North, bet. secs. 31 and 36.

Over mountainous land, covered with oak brush and aspen trees; along W slope on ridge top.

8.00 Crest of steep descent, bears S and NE irregularly; desc. steep NW slope.

31.50 Swift Creek, 6 ins. deep, 10 lks. wide, flows S. 36° W.; asc. along W slope in draw.

34.00 Small spur in draw, slopes SW; asc. along W slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, at mid-point. There is no evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N
R 9 W R 8 W
 $\frac{1}{4}$
S 36 | S 31
1975

from which

A pine, 20 ins. diam., bears N. 85°20' W., 26 lks. dist., mkd. $\frac{1}{4}$ BT.

A pine, 17 ins. diam., bears N. 3°10' W., 47 lks. dist., mkd. $\frac{1}{4}$ BT.

Cor. is located in old beaver pond, on N edge of small creek, which drains SW.

Asc. broken and irregular S slope.

66.00 Ridge, bears NE and SW irregularly; asc. along W slope of ridge.

74.30 Small draw, drains SW; asc. SW slope.

80.00 The cor. of secs. 25, 30, 31 and 36, monumented with a limestone, 6 x 10 x 16 ins., firmly set and mkd. 1 notch on S, and 5 notches on N edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 2 N
R 9 W R 8 W
S 25 | S 30
S 36 | S 31
1975

from which

A spruce, 15 ins. diam., bears N. 70° E., 86 lks. dist., mkd. T2N R8W S30 BT.

A spruce, 14 ins. diam., bears N. 65° W., 53 lks. dist., mkd. T2N R9W S25 BT.

Dependent Resurvey of the south mile of the 2nd G.M. West,
T. 2 N., bet. Rs. 8 and 9, Uintah Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah
(Restoring the 1903 survey by John W. McKim)

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy.
of the Tp.

N. 0°26' E., bet. secs. 35 and 36.

Over bottom land, along Duchesne River.

0.40 Right bank Duchesne River, bears NW and SE irregularly.

2.00 Left bank same river, bears NW and SE; thence up river
bottom.

7.00 Same river, flows SW; thence through willows and swamp
land.

17.00 Same river, flows SE.

20.275 Point for the S. 1/16 sec. cor. of secs. 35 and 36, at
midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
S 1/16
S 35 | S 36
1975

from which

A pine, 6 ins. diam., bears S. 81°40' E., 23 lks.
dist., mkd. 1/16 S36 BT.

A pine, 8 ins. diam., bears N. 79° W., 23 lks.
dist., mkd. 1/16 S35 BT.

36.60 Gravel road, bears NW and SE; asc. gentle SW slope, leave
river bottom.

40.55 The ¼ sec. cor. of secs. 35 and 36, monumented with an
iron post, 2½ ins. diam., extending 6 ins. above ground,
mkd. and witnessed as described in the remonumentation
of corners in T. 2 N., R. 9 W., in 1961.

N. 0°26' E., beginning new measurement.

Asc. gentle SW slope, covered with scattered patches of
aspens and oak brush.

39.74 The cor. of secs. 25, 26, 35 and 36, monumented with an
iron post, 2½ ins. diam., extending 8 ins. above ground,
mkd. and witnessed as described in the remonumentation of
corners in T. 2 N., R. 9 W., in 1961.

Dependent Resurvey, Portion of the Subdivision,
T. 2 N. R. 9 W. Uintah Meridian Utah

CHAINS

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

N. 89°51' W., bet. secs. 25 and 36.

Over mountainous land, covered with oak brush and aspen trees; desc. over SW slope.

19.50 Spur, slopes S. 50° W.; desc. W slope.

34.00 Slope changes; desc. over NW slope.

39.55 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, at midpoint. There is no evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W

$\frac{1}{4}$ $\frac{S 25}{S 36}$
1975

from which

A pine, 8 ins. diam., bears S. 30° E., 4 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

Desc. irregular W slope, through aspen trees.

78.50 Small irrigation ditch, drains S.

79.10 The cor. of secs. 25, 26, 35 and 36.

N. 0°06' E., bet. secs. 25 and 26.

Over mountain land, covered with oak brush and aspen trees; asc. along gentle W slope.

15.50 Mouth of small draw, drains W; asc. steep SW slope.

32.00 Spur, slopes W; desc. over steep NW slope.

39.80 The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground, mkd. and witnessed as described in the remonumentation of corners in T. 2 N., R. 9 W., in 1968.

N. 0°20' E., beginning new measurement.

Asc. along gentle W slope, in bottom of draw.

4.80 Hades Creek, 6 ins. deep, 12 lks. wide, drains SW; asc. S slope in canyon bottom.

10.00 Base of steep ascent, bears NE and SW; asc. steep and broken SE slope.

22.50 Spur, slopes S. 51° E.; asc. along steep and broken E slope.

39.83 The cor. of secs. 23, 24, 25 and 26, determined by a mound of stone, no mks. could be identified. This position is harmoniously related to the existing original corners and is the best available evidence of the original cor. position.

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 5 ft. base to top, with brass cap mkd.

T 2 N R 9 W
S 23 S 24
S 26 S 25
1975

from which

A pine, 7 ins. diam., bears S. 89° W., 46 lks. dist., mkd. S23 BT.

A pine, 12 ins. diam., bears N. $20^{\circ}40'$ W., 160 lks. dist., mkd. S23 BT.

From the cor. of secs. 25, 26, 35 and 36.

N. $89^{\circ}24'$ W., bet. secs. 26 and 35.

Over mountain land, covered with oak brush and aspen trees; desc. over W slope.

26.50 Gravel road, bears NW and SE; desc. gentle W slope, in river bottom.

34.40 Duchesne River, 2 ft. deep, 1.00 ch. wide, flows SE; asc. NE slope.

38.83 The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 14 ins. above ground, in a mound of stone, mkd. and witnessed as described in the remonumentation of corners in T. 2 N., R. 9 W., in 1968.

From this cor., the U.S.C. & G.S. bench marker "9W USBR" bears N. $49^{\circ}12'$ E., 13.845 chs. dist.

S. $87^{\circ}18'$ W., beginning new measurement.

Asc. NE slope, through patches of aspen trees.

20.535 Point for the W. $\frac{1}{16}$ sec. cor. of secs. 26 and 35, at midpoint.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
W $\frac{1}{16}$ S 26
S 35
1975

Asc. E slope, through aspen trees.

41.07 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 8 x 12 x 14 ins., firmly set and mkd. 1 notch on S and 2 notches on E edges, scattered mound of stone by cor.,

from which the original bearing trees

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah

CHAINS

An aspen, 8 ins. diam., bears S. 10°30' W., 8 lks. dist., mkd. T2N R9W S34 BT.

A dead aspen, 6 ins. diam., bears S. 10°30' E., 8 lks. dist., mkd. T2N R9W S35 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 2 N R 9 W	
S 27	S 26
S 34	S 35
1975	

from which

An aspen, 8 ins. diam., bears N. 48° E., 19 lks. dist., mkd. T2N R9W S26 BT.

An aspen, 6 ins. diam., bears N. 88° W., 3 lks. dist., mkd. T2N R9W S27 BT.

Deposit the mkd. stone alongside the iron post.

N. 0°06' E., bet. secs. 26 and 27.

Over mountainous land, through oak brush and aspen trees; desc. along E slope.

5.90 Small draw, drains N. 70° E.; desc. along E slope.

17.00 Spur, slopes N. 70° E.; desc. N slope.

19.795 Point for the S. 1/16 sec. cor. of secs. 26 and 27, at midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 2 N R 9 W	
S 1/16	
S 27	S 26
1975	

Cor. is located on steep N slope.

25.00 Draw, drains E; desc. along E slope.

36.60 Base of mountain, bears N. 15° W. and S. 15° E.; thence along gentle E slope, on W side of valley.

39.59 The ¼ sec. cor. of secs. 26 and 27, monumented with an iron post, 2½ ins. diam., extending 6 ins. above ground, mkd. and witnessed as described in the remonumentation of corners in T. 2 N., R. 9 W., in 1968.

N. 0°18' E., beginning new measurement.

Continue along gentle E slope in valley.

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah

CHAINS
6.70

Dirt road, bears N. 15° W. and S. 15° E.; thence over grass pasture, small marsh and willow patches.

20.01

Point for the N. 1/16 sec. cor. of secs. 26 and 27, at midpoint.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 N R 9 W
N 1/16
S 27 | S 26
1975

Set a wood post, 6 ins. diam., 6 ft. high, alongside the iron post.

Continue over river bottom land.

31.80

Duchesne River, 2 ft. deep, 60 lks. wide, drains SE; thence over marsh land.

40.02

The cor. of secs. 22, 23, 26 and 27, determined by a mound of stone, no mks. could be identified. This position is harmonously related to the existing original corners and is the best available evidence of the original corner position.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 2 N R 9 W
S 22 | S 23
S 27 | S 26
1975

from which

A pine, 14 ins. diam., bears N. 55° E., 32 lks. dist., mkd. T2N R9W S23 BT.

A pine, 10 ins. diam., bears N. 89° W., 61 lks. dist., mkd. T2N R9W S22 BT.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W of cor.

From this cor., the ¼ sec. cor. of secs. 22 and 23, bears N. 1°09' E., 39.96 chs. dist., monumented with a sandstone, 8 x 10 x 14 ins., firmly set and plainly mkd. ¼.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
¼
S 22 | S 23
1975

from which

An aspen, 6 ins. diam., bears N. 48° E., 29 lks. dist., mkd. ¼ S23 BT.

An aspen, 8 ins. diam., bears N. 47°30' W., 19 lks. dist., mkd. ¼ S22 BT.

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah

CHAINS

Note: The S. $\frac{1}{2}$ mile bet. secs. 22 and 23 was retraced to verify the latitudinal position of the cor. of secs. 22, 23, 26 and 27.

From the cor. of secs. 23, 24, 25 and 26.

S. $88^{\circ}53'$ W., bet. secs. 23 and 26.

Over mountainous land, covered with oak brush and aspen trees; asc. steep and rocky E slope.

1.50 Gravel road, bears N and S.

6.50 Ridge, bears N and S; desc. over steep SW slope.

31.00 Same road, bears NW and SE.

39.95 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at midpoint. There is no evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 2 N R 9 W

$$\frac{1}{4} \frac{S 23}{S 26}$$

1975

Desc. over SW slope, through aspen trees.

52.90 Gravel road, bears N. 22° W. and S. 22° E.; desc. SW slope, covered with oak brush.

59.925 Point for the W. $\frac{1}{16}$ sec. cor. of secs. 23 and 26, at midpoint.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W

$$W \frac{1}{16} \frac{S 23}{S 26}$$

1975

Desc. SW slope.

69.70 Gravel road, bears N. 60° W. and S. 60° E.; enter grass pasture and river bottom land.

79.90 The cor. of secs. 22, 23, 26 and 27.

Subdivision of sec. 36, T. 2 N., R. 9 W.,
Uintah Meridian, Utah

From the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S. bdy.

N. $0^{\circ}24'$ E., on the N and S center line of sec. 36.

Over mountain land, covered with oak brush; asc. along gentle W slope.

20.005 Point for the center south $\frac{1}{16}$ sec. cor. of sec. 36, at

Dependent Resurvey, Portion of the Subdivision,
T. 2 N., R. 9 W., Uintah Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
C
S 1/16 | S 36
C
1975

Asc. along gentle W slope.

32.00 Base of ascent, bears S and NW; asc. over SW slope, through oak brush and aspen trees.

40.01 Point for the center $\frac{1}{4}$ sec. cor. of sec. 36, at intersection with the E and W center line.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 2 N R 9 W
C $\frac{1}{4}$ S 36
1975

from which

An X, on large boulder, bears N. $63^{\circ}20'$ E., 7 lks. dist.

Asc. broken SW slope.

54.00 Spur, slopes W; desc. over N slope.

56.90 Small draw, drains W; asc. SW slope.

77.00 Spur, slopes W; desc. NW slope.

79.88 The $\frac{1}{4}$ sec. cor. of secs. 25 and 36.

From the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp.

N. $89^{\circ}40'$ W., on the E and W center line of sec. 36.

Over mountainous land, covered with oak brush and aspen trees; asc. SE slope.

13.50 Ridge, bears N and S irregularly; desc. steep and ledgy W slope.

39.84 The center $\frac{1}{4}$ sec. cor. of sec. 36.

50.00 Base of steep descent, bears NW and SE; desc. over gentle W slope, on E side of valley.

59.625 Point for the center west 1/16 sec. cor. of sec. 36, at midpoint.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
W 1/16
C ————— C
S 36
1975

Subdivision of sec. 36, T. 2 N., R. 9 W.,
Uintah Meridian, Utah

CHAINS

Desc. W slope in valley.

79.41 The 1/4 sec. cor. of secs. 35 and 36.

From the W. 1/16 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp.

N. 0°25' E., on the N and S center line of the SW 1/4 of sec. 36.

20.14 Point for the center 1/16 sec. cor. of the SW 1/4 of sec. 36, at intersection with the E and W center line.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
SW 1/16 S 36
1975

40.28 The center west 1/16 sec. cor. of sec. 36.

From the center south 1/16 sec. cor. of sec. 36.

S. 89°57' W., on the E and W center line of the SW 1/4 of sec. 36.

Desc. gentle SW slope.

19.79 The center 1/16 sec. cor. of the SW 1/4 of sec. 36.

37.50 Gravel road, bears N. 12° W. and S. 12° E.; thence over marshy river bottom land.

39.58 The S. 1/16 sec. cor. of secs. 35 and 36.

Subdivision of sec. 26, T. 2 N., R. 9 W.,
Uintah Meridian, Utah

From the 1/4 sec. cor. of secs. 26 and 35.

N. 0°35' W., on the N and S center line of sec. 26.

Over mountain valley land, covered with aspen trees; desc. NE slope.

5.50 Duchesne River, 2 ft. deep, 60 lks. wide, flows SE; thence up valley bottom.

19.27 Point for the center south 1/16 sec. cor. of sec. 26, at midpoint.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 N R 9 W
C
S 1/16 | S 26
C
1975

Subdivision of sec. 26, T. 2 N., R. 9 W.,
 Uintah Meridian, Utah

CHAINS	
	Asc. gentle W slope, through aspen trees.
38.54	Point for the center $\frac{1}{4}$ sec. cor. of sec. 26, at intersection with the E and W center line. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd. <div style="text-align: center;"> T 2 N R 9 W C $\frac{1}{4}$ S 26 1975 </div>
	Cor. is located in small pasture, 1.46 chs. W of fence, which bears N. 5° E. and S. 5° W.
52.20	Gravel road, bears N. 73° W. and curves SE; asc. over SW slope, through oak brush and aspen trees.
58.495	Point for the center north $1/16$ sec. cor. of sec. 26, at midpoint. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd. <div style="text-align: center;"> T 2 N R 9 W C N $1/16$ S 26 C 1975 </div>
61.10	Gravel road, bears NW and SE; asc. SW slope, through dense aspen trees.
78.45	The $\frac{1}{4}$ sec. cor. of secs. 23 and 26.
	From the $\frac{1}{4}$ sec. cor. of secs. 25 and 26. S. $88^{\circ}45'$ W., on the E and W center line of sec. 26. Over mountain land, covered with oak brush and aspen trees; desc. over NW slope, in draw.
1.90	Hades Creek, 6 ins. deep, 15 lks. wide, flows SW; thence along S slope, in draw.
9.00	Spur, slopes S; desc. W slope, into valley.
35.80	Gravel road, bears N. 20° E. and S. 20° W., to junction.
37.30	Gravel road, bears N. 5° E. and S. 5° W.
37.84	Fence, bears N. 5° E. and S. 5° W., thence over pasture.
39.30	The center $\frac{1}{4}$ sec. cor. of sec. 36.
53.80	Duchesne River, 2 ft. deep, 60 lks. wide, flows S. irregularly; thence over marshy bottom land.
59.59	Point for the center west $1/16$ sec. cor. of sec. 26, at midpoint. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

Subdivision of sec. 26, T. 2 N., R. 9 W.,
 Uintah Meridian, Utah

CHAINS

T 2 N R 9 W
 W 1/16
 C _____ C
 S 26
 1975

75.10 Unimproved dirt road, bears NW and SE; asc. gentle E slope, enter aspen trees.

79.88 The ¼ sec. cor. of secs. 26 and 27.

From the W. 1/16 sec. cor. of secs. 26 and 35.

N. 0°14' W., on the N and S center line of the SW¼ of sec. 26.

Over mountain land, through aspen trees; along E slope.

10.00 Slope changes; desc. NE slope.

19.535 Point for the center 1/16 sec. cor. of the SW¼ of sec. 26, at intersection with the E and W center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 2 N R 9 W
 SW 1/16 S 26
 1975

22.30 Leave timber; thence over pasture and river bottom land.

39.07 The center west 1/16 sec. cor. of sec. 26.

From the center south 1/16 sec. cor. of sec. 26.

S. 88°01' W., on the E and W center line of the SW¼ of sec. 26.

Over mountain valley land, covered with scattered patches of aspen trees; desc. over gentle W slope.

5.00 Enter river bottom land; thence over grass and ponds.

12.50 Duchesne River, 2 ft. deep, 60 lks. wide, flows S irregularly; continue over marsh land.

18.00 Enter aspen trees; asc. E slope.

20:40 The center 1/16 sec. cor. of the SW¼ of sec. 26.

Asc. E slope, through dense aspen trees.

27.50 Spur, slopes NE; asc. along N slope.

40.80 The S. 1/16 sec. cor. of secs. 26 and 27.

From the center west 1/16 sec. cor. of sec. 26.

N. 0°09' W., on the N and S center line of the NW¼ of sec. 26.

Over marshy river bottom land.

Subdivision of sec. 26, T. 2 N., R. 9 W.,
 Uintah Meridian

CHAINS

- 19.985 Point for the center 1/16 sec. cor. of the NW $\frac{1}{4}$ of sec. 26, at intersection with the E and W center line.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 2 N R 9 W
 NW 1/16 S 26
 1975
- 23.00 Duchesne River, 2 ft. deep, 50 lks. wide, flows SE.
- 27.50 Gravel road, bears NW and SE; asc. SW slope, enter oak brush.
- 39.97 The W. 1/16 sec. cor. of secs. 23 and 26.

From the center north 1/16 sec. cor. of sec. 26.

S. 88°49' W., on the E and W center line of the NW $\frac{1}{4}$ of sec. 26.

Over mountain land, covered with oak brush; desc. over SW slope.

- 14.70 Gravel road, bears NW and SE; enter river bottom land.
- 16.80 Duchesne River, 2 ft. deep, 60 lks. wide, flows SE.
- 20.13 The center 1/16 sec. cor. of the NW $\frac{1}{4}$ of sec. 26.
- 40.26 The N. 1/16 sec. cor. of secs. 26 and 27.

General Description

The portion of T. 2 N., R. 9 W., surveyed consists of bottom land along the Duchesne River, extending into the higher mountainous land on either side of the river. The mountains are covered with sage and oak brush, with patches of aspen, pine and juniper timber. The river bottom is covered with willows and cottonwood trees, with a few small grass pastures. There are several summer homes located in sec. 36, and Defas Dude Ranch, located in sec. 26.

The portion of the township surveyed is located within the Ashley National Forest. A gravel road bears NW and SE, generally along the Duchesne River, which flows SE through the township. The elevation of the land surveyed varies from about 7400 to 8600 ft. above sea level.

Mean magnetic declination was found to be 15°00' E.

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Supvy. Surveying Tech.
Gail E. Reynolds	Surveying Tech.
Frank Profaizer	Surveying Tech.
Stewart Burt	Surveying Tech.
Craig Kennedy	Surveying Aid
Craig Black	Surveying Aid
Russel Brown	Surveying Aid
Timothy Ingram	Surveying Aid

385

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Craig P. Sylvester, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th day of December, 1974, Supplemental Instructions dated June 26, 1975, (I) ~~(We)~~ have dependently resurveyed the east mile of the south boundary, the east boundary (Second Guide Meridian West) between sections 31 and 36, and the subdivisional lines of sections 26 and 36, and surveyed a portion of the subdivision of sections 26 and 36, T. 2 N., R. 9 W.

of the Uintah Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 1, 1976
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the east mile of the south boundary, the east boundary (Second Guide Meridian West) between sections 31 and 36, the subdivisional lines of sections 26 and 36 and the survey of portion of the subdivision of sections 26 and 36, T. 2 N., R. 9 W., Uintah Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 08 1977
(Date)

Bernard W. Foster
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys is~~
~~, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

388

ORIGINAL
FIELD NOTES

OF THE

COMPLETION SURVEY

OF

THE THIRD STANDARD PARALLEL SOUTH

(SOUTH BOUNDARY)

OF

TOWNSHIP 15 SOUTH, RANGE 17 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 7, 1973, approved JUNE 7, 1973,

_____, which provided for the surveys included under U.S. Survey/Group
Number 548, and assignment instructions dated JULY 20, 1973.

Survey commenced JULY 24, 1973

Survey completed JULY 27, 1973

INDEX DIAGRAM

Township 15 South, Range 17 East,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36
		1	2	3	4

T. 15 S., R. 17 E., Salt Lake Mer., Utah

CHAINS

The following field notes are those of the completion survey of the Third Standard Parallel South (South Boundary), T. 15 S., R. 17 E., Salt Lake Meridian, Utah.

The East Boundary was surveyed by Charles F. Moore, Surveyor, from 1930 to 1932. The west portion of the Third Standard Parallel South (South Boundary), was surveyed by Glen B. Hatch, Cadastral Surveyor, under the supervision of Craig P. Sylvester, Cadastral Surveyor, in 1961.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated June 7, 1973.

The direction of the lines of this survey were determined by reference to the true meridian established on line by hour angle observations on Polaris. The lines were carried forward by the tangent off-set method and the distances determined by chaining where possible; otherwise by triangulation and traverse methods. Where the triangulation and traverse methods were employed, the topography was scaled from U.S.G.S. quadrangles "Range Creek" and "Moonwater Point", 15' series.

The geographic position of the southeast corner of the township is at latitude $39^{\circ} 28' 09''$ North and longitude $109^{\circ} 57' 09''$ West, as computed from section line lies to U.S.C. & G.S. triangulation station "Carbon and Emery County Boundary Marker", which is common with the standard cor. of secs. 31 and 32, T. 15 S., R. 16 E., at latitude $39^{\circ} 28' 09.452''$ North and longitude $110^{\circ} 09' 28.134''$ West.

The magnetic declination was read several places along the line and the average was found to be $15^{\circ} 15'$ East.

Completion Survey of the Third Standard Parallel South (South Boundary), T. 15 S., R. 17 E., Salt Lake Mer., Utah

Beginning at the standard meander cor. on the S. bdy. of sec. 33, located 11.55 chs. East of the standard cor. of secs. 32 and 33, and monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 6 ins. above ground, and in a collar of stone, with brass cap mkd.

SC
T15S R17E

S33 / MC
1961

East, with the establishment of the Third Standard Parallel South along the S. bdy. of sec. 33, on a transit line describing the tangent, which bears East.

By triangulation, over waters of Green River flowing S. 50° W.

7.32 Point for the standard meander cor. of sec. 33 on the left bank of the Green River, bears N. 50° E. and S. 50° W. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Completion Survey of the Third Standard Parallel South
(South Boundary), T. 15 S., R. 17 E., Salt Lake Mer.,

CHAINS

SC
T15S R17E

MC $\frac{S33}{1973}$

Enter cottonwood timber.

- 14.95 Leave timber, bears NE. and SW.
22.45 Chandler Creek, 10 lks. wide, 6 ins. deep, flows NW.
23.80 Chandler Creek, flows SW. from NE.
25.15 Chandler Creek, flows NW. from SE.; asc. rocky SW. slope.
28.45 Point for the standard $\frac{1}{4}$ sec. cor. of sec. 33.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. above the ground, with brass cap mkd.

SC
T15S R17E

$\frac{1}{4}$ S33
1973

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

By traverse, asc. abruptly about 480 ft. over broken and precipitous SW. slope.

- 38.45 Ledy spur, projects S.; desc. about 480 ft. over broken and precipitous SE. slope.
48.45 Base of steep descent, bears SW. and curves E.; asc. over broken S. slope.
68.45 Point for the standard cor. of secs. 33 and 34, N. 1/4 sec. from the tangent.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. above the ground to bedrock, on a steep SW. slope, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

SC
T15S R17E

$\frac{S33|S34}{1973}$

Land, river bottom and broken breaks.
Soil, sandy along river bottom, rocky with exposed stone in breaks.
Timber, cottonwoods along river.
Undergrowth, willows, tamarack and sagebrush.

East, along the S. bdy. of sec. 34, on a transit describing the tangent, which bears S. $89^{\circ} 59.3'$ E.

Over broken and ledgy breaks of Green River, through scattered scrub timber. By triangulation, asc. about 480 ft. over rocky SW. slope.

- 2.20 Point of rocky spur, projects sharply S.; desc. about 480 ft. over rocky E. slope. Indian petroglyphs, on about 6x6 ft., bears South 74 lks. dist.

Completion Survey of the Third Standard Parallel South
(South Boundary), T. 15 S., R. 17 E., Salt Lake Mer., Utah

CHAINS	
5.50	Creek, 10 lks. wide, 6 ins. deep, flows SW.; asc. about 550 ft. over broken and ledgy W. slope.
6.60	Trail road, bears N. curving NE. and SW. curving W.
16.00	Narrow ledgy spur, projects N. 30° W.; desc. about 100 ft. over broken and precipitous NE. slope.
30.00	Draw, drains NW., asc. about 400 ft. over broken and ledgy SW. slope.
40.00	Point for the standard $\frac{1}{4}$ sec. cor. of sec. 34, N. 2 lks. from the tangent. Set an iron post, 36 ins. long, 1 in. diam., 6 ins. in the ground to bedrock, on a steep W. slope, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	SC T15S R17E <u>$\frac{1}{4}$ S34</u> 1973
	from which A scrub juniper, 10 ins. diam., bears South, 17 lks. dist., mkd. BT. No other trees within limits. Asc. 30 ft. over steep W. slope.
40.55	Narrow ledgy spur, projects N. 15° W.; continue by triangulation; desc. about 250 ft. over broken and ledgy NE. slope.
65.00	Spur, projects N. 15° E.; desc. abruptly about 200 ft. over precipitous E. slope.
79.00	Draw, drains NW.; asc. about 50 ft. over inaccessible SW. slope.
80.00	Point for the standard cor. of secs. 34 and 35, N. 3 lks. from the tangent, falls on inaccessible SW. slope and cannot be perpetuated. Point for the witness standard cor. of secs. 34 and 35, bears East 1.28 chs. dist., hereinafter described. Land, broken and precipitous breaks. Soil, rocky exposed sandstone. Timber, scattered scrub pinon and juniper, with pine timber on N. slopes. Undergrowth, oak brush, serviceberry and young mahogany.
	East, along the S. bdy. of sec. 35, on a transit line describing the tangent, which bears S. 89° 58.6' E. Continue by triangulation over broken land through scattered timber. Asc. about 100 ft. over precipitous SW. slope.
1.28	Point for the witness standard cor. of secs. 34 and 35, N. 3 lks. from the tangent. End triangulation. Set an iron post, 36 ins. long, 1 in. diam., over a cross (+) on solid sandstone, and in a mound of stone, 4 ft.

Completion Survey of the Third Standard Parallel South
(South Boundary) T. 15 S., R. 17 E. Salt Lake Mer.

CHAINS

base to top, with brass cap mkd.

WC
SC
T15S R17E
S34|S35
← 1973

By triangulation and traverse, asc. about 1,200 ft. over broken and ledgy SW. slope.

30.00 High broken spur, projects NW. End triangulation.

Point for the witness standard $\frac{1}{4}$ sec. cor. of sec. 35, N. $4\frac{1}{2}$ lks. from the tangent.

Set an iron post, 18 ins. long, 1 in. diam., 12 ins. from the ground to bedrock, at base of ledge, 15 ft. high, bears NW. and SE., and in a mound of stone, 3 ft. base to top, with brass cap mkd.

WC
SC
T15S R17E
 $\frac{1}{4}$ S35
→ 1973

By triangulation, asc. about 1,200 ft. over broken and precipitous NW. changing to N. slope. Enter dense pine timber.

40.00 Point for the standard $\frac{1}{4}$ sec. cor. of sec. 35, N. 5 lks. from the tangent, falls on steep and precipitous NW. slope. Point not monumented.

65.00 Narrow spur, projects sharply W. curving NW.; asc. along S. slope. Leave dense timber.

71.41 High narrow spur ridge, bears N. 60° W. and S. 60° E. End triangulation.

Point for the witness standard cor. of secs. 35 and 36 N. $6\frac{1}{2}$ lks. from the tangent.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. from the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
SC
T15S R17E
S35|S36
→ 1973

By triangulation, desc. about 400 ft. over broken and precipitous NE. slope.

80.00 Point for the standard cor. of secs. 35 and 36, N. 7 lks. from the tangent, falls on precipitous NE. slope deemed impractical to monument.

Land, broken and ledgy breaks.
Soil, rocky, considerable exposed sandstone,
Timber, dense pine on N. slopes, pinon and juniper on S. slopes, mahogany on S. slopes.
Undergrowth, sagebrush, serviceberry and oak brush.

Completion Survey of the Third Standard Parallel South
(South Boundary), T. 15 S., R. 17 E., Salt Lake Mer., Utah

CHAINS

East, along the S. bdy. of sec. 36, on a transit line describing the tangent, which bears S. 89° 57.9' E.

Continue by triangulation, over rough and broken breaks of the Green River, through scattered timber, desc. about 700 ft. over broken and precipitous NE. slope.

26.00 Deep draw, drains NW.; asc. about 1,000 ft. over broken SW. slope.

39.80 Base of ledge, 30 ft. high, bears N. and S. End Triangulation.

Point for the witness standard $\frac{1}{4}$ sec. cor. of sec. 36, N. 10 lks. from the tangent.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
SC
T15S R17E
 $\frac{1}{4}$ S36 →
1973

By triangulation and traverse, asc. abruptly about 30 ft. over precipitous ledge facing W.

40.00 Point for the standard $\frac{1}{4}$ sec. cor. of sec. 36, N. 10 lks. from the tangent, falls on ledge and cannot be perpetuated.

40.20 High, narrow inaccessible ledgy spur, projects N. 20° W., continue by triangulation and traverse, desc. about 950 ft. over broken and precipitous NE. slope.

65.00 Ledgy draw, drains N.; asc. about 650 ft. over broken and ledgy SW. slope.

77.94 Intersect the W. bdy. of sec. 31, T. 15 S., R. 18 E.

Point for the standard closing cor. of sec. 36, N. 13 lks. from the tangent. falls on inaccessible SW. slope and cannot be perpetuated.

Point for the witness standard closing cor. of sec. 36, bears S. 85° 37' E., 2.88 chs. dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

WC
SC
T15S T15S
R17E R18E
C ← S36 | S31
C |
1973

From the true point for the standard closing cor. of sec. 36, the true point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, T. 15 S., R. 17 and 18 E., bears South 1.23 chs. dist., from which its witness cor. bears south, 9.59 chs. dist., monumented with an iron post, 1 in. diam., extending 6 in. above ground, with brass cap mkd.

Completion Survey of the Third Standard Parallel South
(South Boundary) T. 15 S. R. 17 E. Salt Lake County, Utah

CHAINS

WC
 $\frac{1}{4}$
 S36↑S31
 1931

This witness cor. will now function as the witness $\frac{1}{4}$ cor. of sec. 31, T. 15 S., R. 18 E. only, and was re-
 ked.

WC
 $\frac{1}{4}$
 ↑S31
 1973
 1931

From the same point of intersection the witness cor. of secs. 30 and 31, T. 15 S., R. 18 E., bears North 46.49 chs. distance, monumented with an iron post, 2 ins. diam., extending 18 ins. above ground, and in a mound of stone, 3 ft. base with brass cap mkd.

T15S
 R17E R18E
 $\frac{S25}{S36}$ | $\frac{S30}{S31}$
 WC
 1931

Land, broken and ledgy breaks.
 Soil, rocky sand, exposed sandstone.
 Timber, pinon, juniper and pine.
 Undergrowth, serviceberry, oak brush and sagebrush.

General Description

The land along the Third Standard Parallel South, through Range 17 East, is rough and broken breaks along the Green River, which flows southerly through section. Soil along the river bottom is sandy and the soil in the higher elevations is rocky sand and loam with considerable exposed sandstone ledges. Timber consists of cottonwood along the Green River to scrub pinon and juniper in the breaks and pine along the north slopes of the higher elevation. Undergrowth is sagebrush, oak brush, serviceberry and young mahogany. The elevation varies from 7,000 ft. along the river to 7,600 ft. above sea level in the breaks along the East Boundary. The area drains in a westerly direction to the Green River.

Access to the township is by a trail road along Chandler Creek, flowing southwesterly through the township and boat or raft down the Green River.

Indian petroglyphs and dwellings were noted in several places along Chandler Creek.

The magnetic declination was read several places along this line and the average was found to be 15° 15' East.

CERTIFICATE OF SURVEY

(I) ~~We~~X Glen B. Hatch

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 7th of June, 1973, (I) ~~We~~ have completed the survey of the Third Standard Parallel South (South Boundary), Township 15 South, Range

of the Salt Lake Meridian, in the State of Utah are represented in the foregoing field notes as having been executed by (me), ~~us~~ and ~~you~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, in the specific manner described in the foregoing field notes.

January 11, 1974
(Date)

Glen B. Hatch
Supervisory (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 6 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the completion survey of the Third Standard Parallel South (South Boundary), Township 15 South, Range 17 East, Salt Lake

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAR 12 1975
(Date)

D. T. Barron
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

(Date)

(Date)
is a true copy of the original

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

CORRECTIVE SURVEY

OF

SECTION 5 (WEST BOUNDARY)

OF

TOWNSHIP 16 SOUTH, RANGE 18 EAST

Of the SALT LAKE MERIDIAN Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 7, 1973, approved JUNE 7, 1973,

_____, which provided for the surveys included under U.S. Survey/Group
Number: 548, and assignment instructions dated JULY 20, 19 73.

Survey commenced JULY 28, 19 73

Survey completed JULY 29, 19 73

INDEX DIAGRAM

Township _____ 16 South _____ Range _____ 18 East _____

3 2 64	4	8	2	1
8	9	10	11	12
17	16	15	14	13
20	21	22	23	24
29	28	27	26	25
32	33	34	35	36

Township 16 South, Range 18 East

CHAINS

The following field notes are those of the corrective survey of section 5, (West Boundary) T. 16 S., R. 18 E., Salt Lake Meridian, Utah.

The east 11.89 chs. of the N. Bdy. of sec. 5 (Third Standard Parallel South), was surveyed by Scott P. and John R. Stewart, Deputy Surveyors, in 1901, and was independently resurveyed by C. F. Moore, Surveyor, in 1930. The east 1 mile of the S. Bdy., T. 15 S., R. 17 E. (Third Standard Parallel South and the west portion of the N. Bdy. sec. 5, T. 16 S., R. 18 E.), was surveyed by C. F. Moore, Surveyor in 1930. The S. Bdy., the south portion of the E. Bdy. and the W. Bdy. of sec. 5, was surveyed by C. F. Moore, Surveyor in 1930. The north portion of the E. Bdy. of sec. 5 (W. Bdy. of T. 15 S., R. 18 E.), was surveyed by C. F. Moore, Surveyor, in 1930-32. The west portion of the N. Bdy. of sec. 5 (Third Standard Parallel South), was concurrently surveyed by Glen B. Hatch, Supervisory Cadastral Surveyor.

This survey was executed in accordance with the specifications as set forth in the manual of surveying instructions, 1947, and Special Instructions dated June 7, 1973.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation. The distances were determined by chaining where possible, otherwise by triangulation and traverse methods. Where the triangulation and traverse methods were employed the topography was scaled from U.S.G.S. quadrangle "Moonwater Point", 15' series.

The geographic position of the southeast corner of sec. 5, is at latitude $39^{\circ} 27' 18''$ N. and longitude $109^{\circ} 56' 59''$ W., as computed from section line ties to U.S.C. & G.S. triangulation station "Carbon and Emery County Boundary Marker", which is common with the standard cor. of secs. 31 and 32, T. 15 S., R. 16 E., at latitude $39^{\circ} 28' 09.452''$ N. and longitude $110^{\circ} 09' 28.134''$ W.

The mean magnetic declination was found to be $15^{\circ} 15'$ East.

Correction Survey of Sec. 5, (West Boundary),
T. 16 S., R. 18 E., Salt Lake Mer., Utah

NOTE:

The east 1 mile of the S. Bdy. T. 15 S., R. 17 E., (Third Standard Parallel South), which was surveyed in 1930, is now to be abandoned.

The original closing cor. of secs. 1 and 5, Tps. 16 S., Rs. 17 and 18 E., on the W. Bdy. of the Tp., which is located 37.19 chs. dist. North of the cor. of secs. 1, 5, 8 and 12, and monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd.

S1|S5
C C
R17E R18E
T16S
1930

Correction Survey of Sec. 5, (West Boundary)
T. 16 S. R. 18 E. Salt Lake Mer. Utah

CHAINS

This closing cor. will now function as an angle point, and was remarked

AP
S1|S5
R17E R18E
T16S
1973
1930

From this point, the original standard $\frac{1}{4}$ sec. cor. of secs. 35 and 36, T. 15 S., R. 17 E., bears East, 10.71 chs. dist., monumented with an iron post, 1 in. diam., extending 12 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

SC

$\frac{1}{4}$ S36
1930

This cor. will now be an amended monument, and the 1930 "AM" and 1973 were added to the brass cap markings.

From the same point, the original standard witness cor. of secs. 35 and 36, T. 15 S., R. 17 E., bears West, 19.70 chs. dist., monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, and in a collar of stone, 3 ft. base to top, with brass cap mkd.

SC
T15S R17E
WC ← $\frac{S35|S36}{1930}$

This cor. will now be an amended monument, and the 1930 "AM" and 1973 were added to the brass cap markings.

From the angle point bet. secs. 1 and 5, on the W. boundary of the Tp.

North, bet. secs. 1 and 5.

Beginning new measurement. Over gently rolling bench land of Moonwater Point, through sagebrush and service berry undergrowth.

2.81 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 5, at 40.00 chs. of northing from the cor. of secs. 1, 5, 8 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. above the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T16S
R17E R18E
 $\frac{1}{4}$
S1|S5
1973

20.00 Rim of Moonwater Point, bears E. and W.

20.18 Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. above the ground to bedrock, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, for a witness point, with brass cap mkd.

Correction Survey of Sec. 5, (West Boundary)
T. 16 S., R. 18 E., Salt Lake Mer., Utah

CHAINS

WP
T16S
R17E R18E
S1|S5
1973

By triangulation and traverse, desc. about 800 ft. over steep, and broken ledgy N. slope. Enter timber.

35.00 Draw, drains N. 10° W., thence along steep talus W. slope.

41.33 Intersect the Third Standard Parallel South.

Point for the closing cor. of Tps. 16 S., Rs. 17 and 18 E. falls on steep talus W. slope and deemed impractical to monument.

Point selected for the witness closing cor. of Tps. 16 S., Rs. 17 and 18 E., bears East, 8.34 chs. dist.

Set an iron post, 36 ins. long, 1 in. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

WC
T15S R17E
← S36
S1|S5
C C
R17E R18E
T16S
1973

From the point of intersection, point for the standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 15 S., R. 17 E., bears East, 12.67 chs. dist., and is witnessed West 0.20 chs. dist., with an iron post, 2½ ins. diam., set in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
SC
T15S R17E
← $\frac{1}{4}$ S36
1973

From the same point of intersection the true point for the standard cor. of secs. 35 and 36, T. 15 S., R. 17 E., bears West 27.33 chs. dist. and is witnessed West 8.59 chs. dist., with an iron post, 2½ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
SC
T15S R17E
← S35|S36
1973

Land, rolling bench and broken breaks.
Soil, rocky loam, exposed sandstone.
Timber, pine, N. portion.
Undergrowth, sagebrush, serviceberry and oak.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 5, on the Third Standard Parallel South (N. Bdy.), at 40.00 chs. of westing from the closing cor. of secs. 4 and 5, falls on broken N. slope of broken breaks, and deemed impractical to perpetuate.

Completion Survey of Sec. 5, (West Boundary),
T. 16 S., R. 18 E., Salt Lake Mer., Utah

CHAINS

From this point, point for the standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 15 S., R. 17 E., bears West, 9.83 chs. dist. hereinbefore described.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 5, on the W. bdy Sec. 31, T. 15 S., R. 18 E., at 40.00 chs. of north from the cor. of secs. 4, 5, 8 and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R18E T15S
 $\frac{1}{4}$ |R18E
S5|
1973

Set an oak post, 3 ins. diam., 6 ft. long, alongside iron post.

From this cor., the standard cor. of Tps. 15 S., Rs. 17 and 18 E., bears South, 2.75 chs. dist., monumented with an iron post, 2 ins. diam., extending 6 ins. above ground with mound of stone, 2 ft. base, 1 ft. high, N. of cor. and brass cap mkd.

SC
T15S
R17E R18E
S36|S31
1930

This cor. will now function as the standard cor. of T. 15 S., R. 18 E., only, and was remarked.

SC
T15S
R18E
T16S|S31
R18E
S5
1973
1930

Rebuild mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, NE. cor.

From the same cor., the witness $\frac{1}{4}$ sec. cor. of sec. 31, T. 15 S., R. 18 E., bears North 27.66 chs. dist., monumented with an iron post 1" diam., extending 6 ins. above ground, with brass cap mkd.

WC
 $\frac{1}{4}$
↑S31
|
1973
1931

General Description

The portion of section 5, T. 16 S., R. 18 E., covered in this survey is gently rolling bench land of water Point, dropping off into the broken and sometimes inaccessible breaks of Chandler Canyon. The e...

Completion Survey of Sec. 5, (West Boundary),
T. 16 S., R. 18 E., Salt Lake Mer., Utah

CHAINS

varies from 7,000 ft. to 8,360 ft. above sea level. The area drains in a northwesterly direction into Chandler Canyon.

Access to this portion of the township is by a rocky jeep road along Moonwater Point. The timber in the area consists of scattered patches of dense pine along the north slopes of the breaks, with undergrowth of sagebrush serviceberry and oak brush on the bench area. Soil is shallow loam, with considerable exposed sandstone ledges.

The mean magnetic declination was found to be 15° 15' East.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

(I) (~~was~~), Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 7th day of June, 1973, (I) (~~was~~) have made a corrective survey of section 5 (West Boundary), of Township 16 South, Range 18 East.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~was~~) and under (my) (~~own~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

1/21/74
(Date)

Glen B. Hatch
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 6 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the corrective survey of section 5 (West Boundary) of Township 16 South, Range 18 East, of the Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAR 1 8 1975
(Date)

T. Barron
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I hereby certify that the foregoing transcript of the field notes of the above mentioned survey is a true copy of the original field notes.

(Date)

(Date)

Blank

Page

411

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

112

FIELD NOTES

OF THE

RETRACEMENT OF A PORTION OF THE SUBDIVISIONAL LINES

AND

THE DEPENDENT RESURVEY OF THE BOUNDARIES OF UNCOMPAGRE UTE INDIAN

ALLOTMENT NO. 314

WITHIN

TOWNSHIP 14 SOUTH, RANGE 22 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

WILLIAM H. TELLER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 8, 19 75, approved APRIL 28, 1975


_____, which provided for the surveys included under U.S. Survey Group
Number 563, and assignment instructions dated MAY 14, 19 75

Survey commenced MAY 15, 19 75

Survey completed MAY 16, 19 75

INDEX DIAGRAM

Township 14 SOUTH, Range 22 EAST

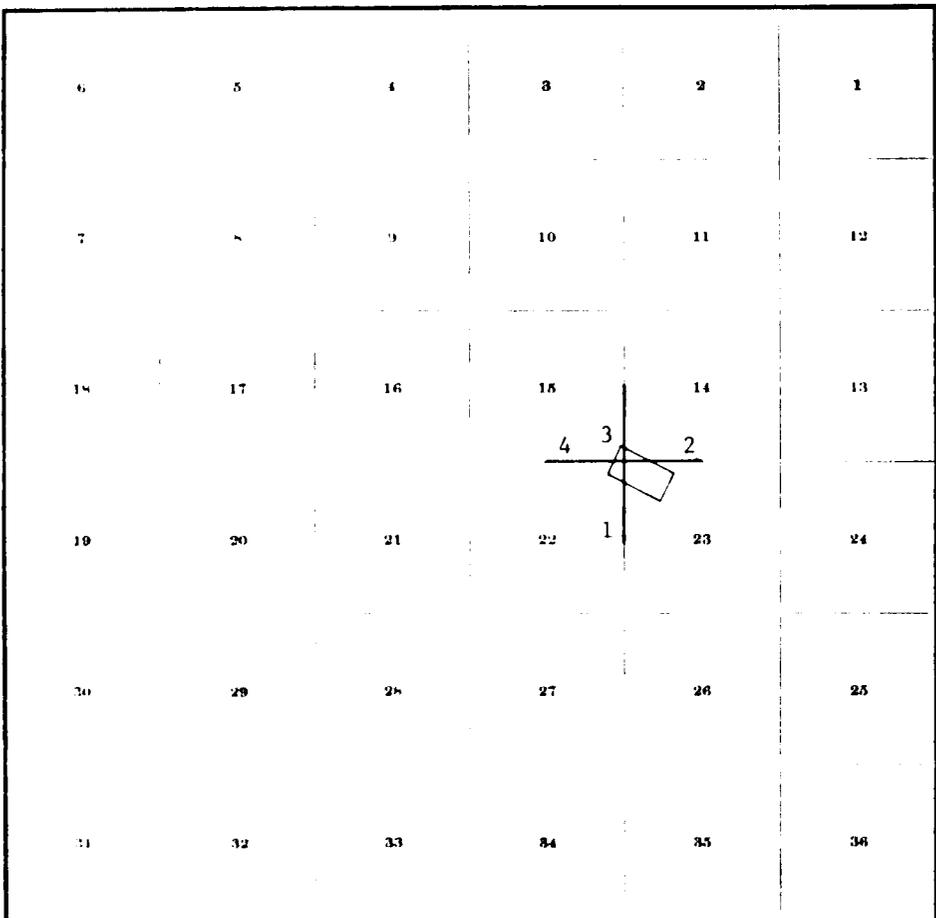

Accompany Ute Indian Allotment No. 314, pages 5 through 7

Township 14 South, Range 22 East
Salt Lake Meridian, Utah

414

CHAINS

The following field notes are those of the retracement of a portion of the subdivisional lines and the dependent resurvey of the boundaries of Uncompahgre Ute Indian Allotment No. 314, within Township 14 South, Range 22 East, Salt Lake Meridian, Utah.

History of Previous Surveys: The south and east boundaries and the subdivisional lines were surveyed by Ralph Gentry, U. S. Surveyor, in 1921, as shown upon the official plat approved June 23, 1922. The boundaries of Uncompahgre Ute Indian Allotment No. 314 were surveyed by Francis E. Joy, U. S. Surveyor, in 1913, as shown upon the official plat approved August 10, 1914.

The retracement and dependent resurvey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973 Edition, and Special Instructions dated April 8, 1975.

The directions of all lines of this survey were determined by solar transit method, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of Corner No. 1, as: Latitude $39^{\circ} 35.5' N.$, and Longitude $109^{\circ} 28.3' W.$ The mean magnetic declination is: $15\frac{1}{2}^{\circ}$ East.

MEMORANDUM

The survey of the Uncompahgre Ute Indian Allotment No. 314 was tied to a U. S. Location Monument "Guffen Spring." This location monument was not tied to the rectangular system of public land survey.

A patent was issued for Uncompahgre Ute Indian Allotment No. 314 to Ben Uncapiuke, on September 18, 1917, and described as: "a certain Tract of land in Township twelve south of Range twenty-one east of the Salt Lake Meridian, and a certain Tract of land in Uinta County, Utah, as shown on the Plats of Uncompahgre Ute Indian allotments, approved by the Commissioner of the General Land Office, August 10, 1914."


Retracement of a Portion of the Subdivisional Lines
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

Retracement of a Survey Executed by
Ralph Gentry, U. S. Surveyor,
in 1921

Retracement of a Portion of the Subdivisional Lines
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

CHAINS

Beginning at the 1/4 sec. cor. of secs. 22 and 23, which is monumented with an iron post, 1 inch in diam., firmly set, projecting 20 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, to the top, with a regulation (G.L.O.) brass cap mkd.



1921

substantiated by:

A pinyon pine, 9 ins. in diam., bears S. 73° 00' E., (record, pinon, 7 ins. in diam., bears S. 73° 15' E.) 27 lks. distant, scribing face overgrown.

A pinyon pine, 8 ins. in diam., bears S. 59° 30' W., (record, pinon, 4 ins. in diam., bears S. 59° 15' W.) 28 lks. distant, scribing face overgrown.


N. 0° 02' W., between secs. 22 and 23

27.95 Intersect line 4 - 1, Uncompahgre Ute Indian Allotment No. 314, from this point of intersection, Corner No. 1 (hereinafter described), bears S. 63° 11' E., 9.99 chs. distant.

39.50 Rut road, bears east and west.

40.00 The point for the corner of secs. 14, 15, 22, and 23 is determined at record course and record distance from the witness corner for the above sections (hereinafter described).

The 1/4 sec. cor. of secs. 14 and 23 is monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above the surface of the ground, with a regulation (G.L.O.) brass cap mkd.



1921

substantiated by:

A pinyon pine, 9 ins. in diam., (record, pinon, 7 ins. in diam), bears N. 63° 00' E., 17 lks. distant, scribing face overgrown.

416

Retracement of a Portion of the Subdivisional Lines
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

CHAINS

A juniper, 20 ins in diam. bears S. 60° 00' W., 274 lks. distant (record, cedar, bears S. 59° 30' W., 276 lks. distant), scribing face overgrown.

S. 89° 58' W., between secs. 14 and 23

37.08 Intersect line 2 - 3, Uncompahgre Ute Indian Allotment No. 314, from this point of intersection Corner No. 2 (hereinafter described), bears S. 63° 17' E., 12.90 chs. distant.

39.93 The true point for the cor. of secs. 14, 15, 22, and 23.

N. 0° 02' W., between secs. 14 and 15

0.40 The witness corner of secs. 14, 15, 22, and 23, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 18 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, to the top, with a regulation (G.L.O.) brass cap mkd.

T14S R22E
S 15 | S 14
S 22 | S 23
W C

1921
1975

substantiated by:

A pinyon pine, 11 ins in diam. (record, pinon, 9 ins. in diam.), bears N. 70° 00' E., 64 lks. distant, scribing face overgrown.

A pinyon pine, 10 ins in diam., bears S. 65° 00' E. (record, pinon, 8 ins. in diam., bears S. 65° 30' E.), 43 lks. distant, scribing face overgrown.

A juniper, 5 ins in diam. bears S. 89° 00' W., 30 lks. distant, (record, cedar, 4 ins. in diam., 31 lks. distant), scribed W C T14S R22E S15 BT.

A juniper, 11 ins in diam. bears N. 71° 30' W., (record, cedar, 10 ins. in diam., bears N. 70° 45' W.), 36 lks. distant, scribed W C T14S R22E S15 BT.

The date of 1975 is added to the above brass cap.

1.44 Intersect line 2 - 3, Uncompahgre Ute Indian Allotment No. 314, from this point of intersection, Corner No. 3 (hereinafter described), bears N. 63° 17' W., 2.23 chs. distant.

6.00 Spur, slopes northwest.

4
Retracement of a Portion of the Subdivisional Lines
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

CHAINS

40.00 The 1/4 sec. cor. of secs. 14 and 15 is monumented with an iron post, 1 inch in diam., firmly set, projecting 17 ins. above the surface of the ground, and in a small mound of stone, with a regulation (G.L.O.) brass cap mkd.

1/4
S 15 | S 14

1921

substantiated by:

A pinyon pine, 11 ins in diam. (record, pinon, 8 ins. in diam.), bears N. 9° 30' E., 98 lks. distant, scribing face overgrown.

A juniper (record, cedar), 8 ins in diam. bears S. 84° 00' W., 48 lks. distant, scribed 1/4 S15 BT.

Discontinue the retracement of this (second) meridional line at this corner.

From the true point for the cor. of secs. 14, 15, 22, and 23, (heretofore described)

N. 89° 57' W., between secs. 15 and 22

3.22 Intersect line 3 - 4, Uncompahgre Ute Indian Allotment No. 314, from this point of intersection, Corner No. 3 (hereinafter described), bears N. 26° 50' E., 2.73 chs. distant.

40.04 The 1/4 sec. cor. of secs. 15 and 22 is monumented with an iron post, 1 inch in diam., firmly set, projecting 19 ins. above the surface of the ground, and in a small mound of stone, with a regulation (G.L.O.) brass cap mkd.

1/4 $\frac{S 15}{S 22}$

1921

substantiated by:

A juniper (record, cedar), 8 ins. in diam., bears N. 32° 45' E. 62 lks. distant, scribed 1/4 S15 BT.

A juniper (record, cedar), 8 ins. in diam., bears S. 59° 45' W., 39 lks. distant, scribed 1/4 S22 BT.


Discontinue the retracement of the subdivisional lines at this corner.

CHAINS

Reestablishment of the Survey Executed by
Francis E. Joy, U. S. Surveyor, in 1913

Location Monument "Guffen Spring" is a tree monument,
multiple (3) stem juniper, the main trunk is 27 ins. in
diam., (record, cedar, 24 ins. in diam.), scribed G S L
M.

Beginning at Corner No. 1, Uncompahgre Ute Indian Allot-
ment No. 314, which is monumented with an iron post, 1
inch in diam., firmly set, projecting 9 ins. above the
surface of the ground, with a regulation (G.L.O.) brass
cap mkd.



substantiated by:

This corner monument is set on the north side at the
base of a juniper, 11 ins. in diam. (record, pinon,
6 ins. in diam.), scribed COR 1.

A juniper, 15 ins. in diam., bears N. 87° 00' E., 25
lks. distant (record, cedar, 14 ins. in diam., bears
N. 85° 30' E., 28 lks. distant), scribed COR 1 / 314
BT.

A pinyon pine, 9 ins. in diam., bears N. 7° 00' W.,
18 lks. distant (record, pinon, 7 ins. in diam.,
bears N. 7° 30' W., 17 lks. distant), scribing face
overgrown.

From this corner, Location Monument "Guffen Spring"
heretofore described, bears N. 9° 00' E., 7.44 chs.
distant.


N. 26° 49' E., on line 1 - 2, Uncompahgre Ute Indian
Allotment No. 314

12.10

Corner No. 2, Uncompahgre Ute Indian Allotment No. 314,
which is monumented with an iron post, 1 inch in diam.,
firmly set, projecting 10 ins. above the surface of the
ground, with a regulation (G.L.O.) brass cap mkd.

Dependent Resurvey of the Boundaries
of Uncompahgre Ute Indian Allotment No. 314
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

CHAINS



1913


substantiated by:

A pinyon pine, 14 ins. in diam., bears N. 76° 00' E., 45 lks. distant (record, pinon, 12 ins. in diam., bears N. 76° 00' E., 46 lks. distant), scribed COR 2 BT.

A juniper (record, cedar), 18 ins. in diam., bears N. 19° 30' W., 7 lks. distant, with a cross (+) scribed on the southeast.

N. 63° 17' W., on line 2 - 3, Uncompahgre Ute Indian Allotment No. 314

- 12.90 Intersect the third latitudinal line, between secs. 14 and 23; this point of intersection heretofore described.
- 16.09 Intersect the second meridional line, between secs. 14 and 15; this point of intersection heretofore described.
- 18.32 Corner No. 3, Uncompahgre Ute Indian Allotment No. 314, which is monumented with an iron post, 1 inch in diam., firmly set, projecting 19 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, with a regulation (G.L.O.) brass cap mkd.

1975
1913

substantiated by:

A pinyon pine, 14 ins. in diam., bears S. 42° 30' E. (record, pinon, 12 ins. in diam., bears S. 43° 15' E.), 44 lks. distant, scribing face overgrown.

A pinyon pine, 9 ins. in diam., bears S. 74° 15' W., (record, pinon, 8 ins. in diam., bears S. 73° 15' W.), 30 lks. distant, scribing face overgrown.

The date of 1975 is added to the above brass cap.

S. 26° 50' W., on line 3 - 4, Uncompahgre Ute Indian Allotment No. 314


- 2.73 Intersect the third latitudinal line, between secs. 15 and 22; this point of intersection heretofore described.

Dependent Resurvey of the Boundaries
of Uncompahgre Ute Indian Allotment No. 314
Township 14 South, Range 22 East
Salt Lake Meridian, Utah

420

CHAINS

- 12.07 Corner No. 4, Uncompahgre Ute Indian Allotment No. 314, which is monumented with an iron post, 1 inch in diam., firmly set, projecting 6 ins. above the surface of the ground, with a regulation (G.L.O.) brass cap mkd.

A P 

1975
1913

substantiated by:

A pinyon pine, 26 ins. in diam., bears S. 26° 30' W., 178 lks. distant (record, pinon, 24 ins. in diam., bears S. 25° 50' W., 176 lks. distant), scribed COR 4 BT.

A juniper, 14 ins. in diam., (record, cedar, 12 ins. in diam.), bears N. 57° 00' W., 109 lks. distant, scribed COR 4 BT.

The date of 1975 is added to the above brass cap.

S. 63° 11' E., on line 4 - 1, Uncompahgre Ute Indian Allotment No. 314

- 8.32 Intersect the second meridional line, between secs. 22 and 23; this point of intersection heretofore described.
- 18.31 Corner No. 1, Uncompahgre Ute Indian Allotment No. 314, and the place of beginning.

GENERAL DESCRIPTION

The land area encompassed in this retracement and dependent resurvey is rolling; soil is sandy and rocky; timber consists of juniper and pinyon pine; undergrowth, young trees and sagebrush.

Blank

Page

CERTIFICATE OF SURVEY

423

(I) ~~(We)~~ William H. Teller, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 8th

of April, 19 75, (I) ~~(We)~~ have retraced a portion of the subdivi-

lines and dependently resurveyed the boundaries of the Uncompahgre Ute

Indian Allotment No. 314, within Township 14 South, Range 22 East,

of the Salt Lake Meridian, in the State of Utah, which

are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my

~~(our)~~ direction; and that said survey has been made in strict conformity with said special instru-

tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in

specific manner described in the foregoing field notes.

June 13, 1975

(Date)

William H. Teller
(Cadastral Surveyor)
WILLIAM H. TELLER

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JUN 13 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the retracement of a portion of the subdivisional and the dependent resurvey of the boundaries of Uncompahgre Ute Indian Allotment No. 314, within Township 14 South, Range 22 East, of the Salt Lake Meridian, Utah

executed by William H. Teller, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUL 15 1976

(Date)

[Signature]
(Chief, Division of Cadastral Survey)

I CERTIFY That the foregoing transcript of the field notes of the above-described survey is a true copy of the original field notes

(Date)

(Chief, Division of Cadastral Survey) GPO 849

Blank

Page

Reid 7-29-76

Blank

Page

FIELD NOTES

OF THE

Remonumentation of Corners in

- ✓ 1244 TOWNSHIP 25 SOUTH, RANGE 1 EAST --- TOWNSHIP 26 SOUTH, RANGE 1 EAST
- ✓ 1251 TOWNSHIP 23 SOUTH, RANGE 2 EAST --- TOWNSHIP 24 SOUTH, RANGE 2 EAST
- ✓ 1300 TOWNSHIP 25 SOUTH, RANGE 2 EAST --- TOWNSHIP 26 SOUTH, RANGE 1 WEST
- ✓ 1050 TOWNSHIP 18 SOUTH, RANGE 2 WEST --- TOWNSHIP 19 SOUTH, RANGE 2 WEST
- ✓ 1257 TOWNSHIP 25 SOUTH, RANGE 2 WEST --- TOWNSHIP 26 SOUTH, RANGE 2 WEST
- ✓ 1252 TOWNSHIP 27 SOUTH, RANGE 2½ WEST --- TOWNSHIP 28 SOUTH, RANGE 2½ WEST
- ✓ 1117 TOWNSHIP 20 SOUTH, RANGE 3 WEST --- TOWNSHIP 24 SOUTH, RANGE 3 WEST
- ✓ 1252 TOWNSHIP 28 SOUTH, RANGE 3 WEST --- TOWNSHIP 29 SOUTH, RANGE 3 WEST
- ✓ TOWNSHIP 24 SOUTH, RANGE 4 WEST --- TOWNSHIP 27 SOUTH, RANGE 4 WEST
- ✓ 1252 TOWNSHIP 29 SOUTH, RANGE 4 WEST --- TOWNSHIP 25 SOUTH, RANGE 4½ WEST
- ✓ TOWNSHIP 24 SOUTH, RANGE 5 WEST --- TOWNSHIP 25 SOUTH, RANGE 5 WEST
- ✓ TOWNSHIP 26 SOUTH, RANGE 5 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 1961, approved February 16, 1961,

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated June 23, 1971.

Survey commenced July 5, 1972

Survey completed August 10, 1972

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 25 S. R. 1 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	2 2 1 33	34	35	36

Tp. 26 S. R. 1 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	3 34	3 35	36

Tp. 23 S. R. 2 E. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35 4	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 24 S. R. 2 E. MerSalt Lake

6	5	4	3	7	2	5	1
				•	•	•	
7	8	9	9	10	11	6	12
			•	•	•	•	
18	17	16	10	7	15	8	14
			•	•	•	•	
19	20	21	•	7	22	•	24
	•						
30	29	28	27	26	25		
	•						
31	32	33	34	•	5	35	36
				•	•	•	

Tp. 25 S. R. 2 E. MerSalt Lake

6	5	4	3	•	12	1
				•	11	
7	8	9	10		11	12
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Tp. 26 S. R. 1 W. MerSalt Lake

6	5	4	3	•	2	1
				•	12	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 26 S. R. 2 W. Mer. Salt Lake

6	5	4	3	18 2	17 1
7	8	9	10	11	12
18	17	16	15	17 14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 27 S. R. 2½ W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18 18	17 17	16	15	14	13
19 18	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

R3W R2½W

Tp. 28 S. R. 2½ W. Mer. Salt Lake

6	5	4	3	2	1
		20 19	19		
7	8	9	10 19	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp 18 S. R. 2 W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32 12	33	34	35	36

Tp 19 S. R. 2 W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33 13	34	35	36

Tp 25 S. R. 2 W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25 16 16
31	32	33	34	35 15 15	36 14

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

436

INDEX TO SECTION CORNER MONUMENTS

Tp. 26 S. R. 2 W. MerSalt Lake

6	5	4	3	18 2	17 1
7	8	9	10	11 17	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 27 S. R. 2½ W. MerSalt Lake

5	4	3	2	1
8	9	10	11	12
18 17	16	15	14	13
20 18	21	22	23	24
29	28	27	26	25
32	33	34	35	36

R3W | R2½W

Tp. 28 S. R. 2½ W. MerSalt Lake

6	5	4	3	2	1
7	8	20 19	10	11	12
18	17	16	19	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 20 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29 20	28	27	26	25
31	32	33	34	35	36

Tp. 24 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

21
22

Tp. 28 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	22 22	20 22	21	22	23
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 29 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18 23	17	16	15	14	13
23 19	20	21	22	23	24
23 ³⁰	29	28	27	26	25
31	32	33	34	35	36

Tp. 24 S. R. 4 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	26 26	25	14	13
19	20 28	21 25	22	23	24
30	29 27	28 27	27	26	25
24 31 24	27 32	33	34	35	36

Tp. 27 S. R. 4 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13 28
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 29 S. R. 4 W. Mer. Salt Lake

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	30
19	20	21	22	23	24	30
30	29	28	27	26	25	29
31	32	33	34	35	36	29
						28

Tp. 25 S. R. 4½ W. Mer. Salt Lake

		33	32	32	32	31	31	31	
6	5	4	3	33	2	1			
7	8	9	10	33	11	12			
18	17	16	15	14	13				
19	20	21	22	23	24				
30	29	28	27	26	25				
31	32	33	34	35	36				

Tp. 24 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	
			35	34	35	
			34	35		

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 25 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2 35 36	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 26 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	38 10	11	12
		39	37		36
18	17	16	15	14	13
		38		37	37
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners

CRAJMS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Fishlake National Forest. A Forester's compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 25 S., R. 1 E., Salt Lake Meridian, 15° 25' E.
 T. 26 S., R. 1 E., Salt Lake Meridian, 15° 25' E.
 T. 23 S., R. 2 E., Salt Lake Meridian, 15° 25' E.
 T. 24 S., R. 2 E., Salt Lake Meridian, 15° 20' E.
 T. 25 S., R. 2 E., Salt Lake Meridian, 15° 20' E.
 T. 26 S., R. 1 W., Salt Lake Meridian, 15° 25' E.
 T. 18 S., R. 2 W., Salt Lake Meridian, 15° 30' E.
 T. 19 S., R. 2 W., Salt Lake Meridian, 15° 30' E.
 T. 25 S., R. 2 W., Salt Lake Meridian, 15° 25' E.
 T. 26 S., R. 2 W., Salt Lake Meridian, 15° 25' E.
 T. 27 S., R. 2½ W., Salt Lake Meridian, 15° 15' E.
 T. 28 S., R. 2½ W., Salt Lake Meridian, 15° 15' E.
 T. 20 S., R. 3 W., Salt Lake Meridian, 15° 30' E.
 T. 24 S., R. 3 W., Salt Lake Meridian, 15° 30' E.
 T. 28 S., R. 3 W., Salt Lake Meridian, 15° 15' E.
 T. 29 S., R. 3 W., Salt Lake Meridian, 15° 15' E.
 T. 24 S., R. 4 W., Salt Lake Meridian, 15° 30' E.
 T. 27 S., R. 4 W., Salt Lake Meridian, 15° 25' E.
 T. 29 S., R. 4 W., Salt Lake Meridian, 15° 20' E.
 T. 25 S., R. 4½ W., Salt Lake Meridian, 15° 30' E.
 T. 24 S., R. 5 W., Salt Lake Meridian, 15° 30' E.
 T. 25 S., R. 5 W., Salt Lake Meridian, 15° 30' E.
 T. 26 S., R. 5 W., Salt Lake Meridian, 15° 30' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the U.S. Forest Service.

T. 25 S., R. 1 E., Salt Lake Meridian, ah

Township 25 South, Range 1 East, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following corners were established by Andrew P. Hanson in 1895.

At the NE. cor. of sec. 32, marked with a granite stone, 18x14x10 ins., firmly set and plainly mkd. with 4 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T25S R1E

S32 |

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on W. slope of hill. In sage and lightly scattered juniper growth.

Remonumentation of Corners in
T. 25 S., R. 1 E., Salt Lake Meridian, Utah

CHAINS

At the closing cor. of secs. 28 and 33, on the E. bdy. sec. 32, marked with a trachyte stone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the E., 1 on the S. edge and CC on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T25S R1E

$$S32 \begin{array}{|c} S28 \\ \hline S33 \end{array} \text{ CC}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on W. slope of hill. In sage and lightly scattered juniper growth.

At the ¼ sec. cor. of secs. 28 and 33, marked with a trachyte stone, 20x9x6 ins., firmly set and plainly mkd. ¼ on the E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T25S R1E

$$\frac{1}{4} \begin{array}{|c} S28 \\ \hline S33 \end{array}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on NW. slope of hill. In sage and scattered juniper growth.

At the closing cor. of secs. 28 and 29, on the N. bdy. sec. 32, marked with a trachyte stone, 18x11x6 ins., firmly set and plainly mkd. with 4 notches on the E., the S. edge, and CC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T25S R1E

$$\begin{array}{|c} \text{CC} \\ | \\ S29 \quad | \quad S28 \\ \hline S32 \end{array}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

Remonumentation of Corners in
T. 25 S., R. 1 E., Salt Lake Meridian, Utah

CRAINS

The cor. is located on gentle NW. slope of hill, 200 lks. dist. E. of dirt road that bears N. and S. In sage and lightly scattered juniper growth.

T. 26 S., R. 1 E., Salt Lake Meridian, Utah

Township 26 South, Range 1 East, Salt Lake Meridian, is located partially within the Fishlake National Forest. The subdivisional lines were surveyed by A. D. Ferron in 1883 and portions resurveyed by Elliot Bird from 1932 to 1934.

At the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, marked with a granite stone, 22x20x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T26S R1E

$\frac{1}{4}$
S34|S35

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle SE. slope, 2 lks. dist. E. of 7 strand fence line that bears N. and S. In sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, marked with a trachyte stone, 14x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T26S R1E

$\frac{1}{4}$ $\frac{S27}{S34}$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on NW. slope of hill, 19 lks. dist. S. of 5 strand fence line that bears E. and W. and 80 lks. dist. S. of paved road that bears N. 50° E. and S. 50° W. In sagebrush undergrowth.

T. 23 S., R. 2 E., Salt Lake Meridian, Utah

Township 23 South, Range 2 East, Salt Lake Meridian, is located within the Fishlake National Forest. The following cor. was established by Andrew P. Hanson in 1895 and resurveyed by Philipp D. Schoeber in 1900.

Remonumentation of Corners in
T. 23 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of sec. 35, on the S. bdy. of the
marked with a lava stone, 24x14x6 ins., firmly set
plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

An aspen, 12 ins. diam., bears North, 23 lks. dist.
mkd. $\frac{1}{4}$ S BT. (Record, N. 30° 05' E., 23 lks.)

An aspen, 15 ins. diam., bears N. 64° 30' E., 10
lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock, with brass cap mkd.

T23S R2E

$\frac{1}{4}$ S35

T24S R2E

1972

Deposit the original cor. stone alongside the iron post

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on NE. slope. In thick pine and
growth.

T. 24 S., R. 2 E., Salt Lake Meridian, Utah

Township 24 South, Range 2 East, Salt Lake Meridian,
located within the Fishlake National Forest. The fol-
ing corners were established by Andrew P. Hanson in 18

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, on the S. bdy.
the Tp., marked with a lava stone, 28x12x10 ins., firm-
set and plainly mkd. $\frac{1}{4}$ on N. face.

from which an original bearing tree:

An aspen, 12 ins. diam., bears S. 82° 5' E., 25 lks.
dist., with faint scribe marks, remarked $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T24S R2E

$\frac{1}{4}$ S35
S2

T25S R2E

1972

from which

An aspen, 6 ins. diam., bears N. 30° E., 29 lks.
dist., mkd. $\frac{1}{4}$ S35 BT.

Deposit the original cor. stone alongside the iron post

The cor. is located on W. slope of hill. At W. edge
aspens that bears N. and S.

Remonumentation of Corners in

CHAINS

At the cor. of secs. 1, 2, 11 and 12, marked with a lava stone, 19x11x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E
 S2 | S1
 S11 | S12
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on gentle NE. slope. In sage, grass and lightly scattered pine growth.

At the ¼ sec. cor. of secs. 1 and 2, marked with a trachyte stone, 18x10x7 ins., firmly set and plainly mkd. ¼ on W. face.

from which the original bearing trees:

A pine, 14 ins. diam., bears S. 47½° E., 17 lks. dist., mkd. ¼ S BT.

A pine, 30 ins. diam., bears N. 60° 10' W., 8 lks. dist., mkd. ¼ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R2E
 ¼
 S2 | S1
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located in small draw, that drains N. 30° E., 1 ch. dist. E. of dirt road that bears N. 30° E. and S. 30° W. In pine and aspen growth.

At the ¼ sec. cor. of secs. 34 and 35, marked with a trachyte stone, 18x12x9 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S R2E
 ¼
 S34 | S35
 1972

Remonumentation of Corners in
T. 24 S., R. 2 E., S. 1/4 Sec. 22 and 23

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle W. slope. In grass and sagebrush growth.

At the ¼ sec. cor. of secs. 22 and 23, marked with a stone, 17x10x6 ins., firmly set and dimly mkd. ¼ on face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E

 ½
S22|S23
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on W. slope of hill, 1 lk. dist. S. of 4 strand fence line that bears E. and W. In grass and sagebrush growth.

At the cor. of secs. 10, 11, 14 and 15, marked with a stone, 18x11x9 ins., firmly set and plainly mkd. with notches on the S. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S R2E

 S10|S11
 S15|S14
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle NW. slope, 1 ch. dist. S. of small draw, that drains W. In very lightly scattered growth.

At the ¼ sec. cor. of secs. 2 and 11, marked with a stone, 26x12x6 ins., firmly set and plainly mkd. ¼ on face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, with brass cap mkd.

Remonumentation of Corners in
T. 24 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T24S R2E

$\frac{1}{4}$ $\frac{S2}{S11}$
1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, $4\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on N. slope of lava flow, surrounded by pines on all sides.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a lava stone, 16x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E

$\frac{1}{4}$
S3|S2
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on SE. slope of hill. In grass and sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked with a trachyte stone, 18x9x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E

$\frac{1}{4}$
S21|S22
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located in rolling meadow land, on 5 strand fence line, that bears E. and W.

At the cor. of secs. 15, 16, 21 and 22, marked with a trachyte stone, 18x10x8 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of Corners in
T. 24 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T24S R2E
S16|S15
S21|S22
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. corner.

The cor. is located on rolling land. In grass and sagebrush growth.

At the ¼ sec. cor. of secs. 15 and 22, marked with a granite stone, 18x8x7 ins., firmly set and plainly marked on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap marked.

T24S R2E
¼ S15
S22
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling sagebrush flat.

At the ¼ sec. cor. of secs. 15 and 16, marked with a granite stone, 21x11x6 ins., firmly set and plainly marked. ¼ corner face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap marked.

T24S R2E
¼ S16|S15
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. corner.

The cor. is located on S. slope of hill, about 3½ miles distant N. of creek, 5 lks. wide, 6 ins. deep, that drains W.

At the cor. of secs. 9, 10, 15 and 16, marked with a granite stone, 23x10x9 ins., firmly set and plainly marked with notches on the S. and 3 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, with brass cap marked.

Remonumentation of Corners in
T. 2 S. R. 2 E. Salt Lake Meridian, Utah

CHAINS

T24S R2E
S9 | S10
S16 | S15
1972

from which

An aspen, 6 ins. diam., bears N. 62° E., 28 lks.
dist., mkd. T24S R2E S10 BT.

An aspen, 8 ins. diam., bears S. 55° E., 39 lks.
dist., mkd. T24S R2E S15 BT.

An aspen, 6 ins. diam., bears S. 45° W., 27 lks.
dist., mkd. T24S R2E S16 BT.

An aspen, 9 ins. diam., bears N. 76° W., 39½ lks.
dist., mkd. T24S R2E S9 BT.

Deposit the original cor. stone in mound alongside the
iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on NW. slope of hill. In thick aspen
growth.

At the ¼ sec. cor. of secs. 10 and 15, marked with a lava
stone, 18x9x7 ins., firmly set and plainly mkd. ¼ on N.
face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T24S R2E
¼ S10
S15
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, N. of
cor.

The cor. is located on gentle W. slope. In grass and
sagebrush growth.

At the ¼ sec. cor. of secs. 9 and 10, marked with a lava
stone, 18x9x6 ins., firmly set and plainly mkd. ¼ on W.
face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, with brass cap mkd.

T24S R2E
¼
S9 | S10
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

Remonumentation of Corners in

T. 24 S. R. 2 E. Sec. 16, 21, 29, 30, 31, 32

CHAINS

The cor. is located on SE. slope, 25 lks. dist., W. of small creek, 6 lks. wide, 1 ft. deep, drains S. 20° W. In grass and sagebrush growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a lava stone, 21x11x7 ins., firmly set and plainly mkd. 4 notches on the E. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T24S R2E

S20|S21

S29|S28

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NE. slope, about 2 chs. dist. N. of timber line that bears E. and W.

At the ¼ sec. cor. of secs. 16 and 21, marked with a chyte stone, 18x11x8 ins., firmly set and plainly mkd. on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R2E

¼ S16

S21

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling sagebrush flat.

At the cor. of secs. 29, 30, 31 and 32, marked with a lava stone, 18x11x5 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E

S30|S29

S31|S32

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle W. slope of hill. In grass and sagebrush growth.

Remonumentation of Corners in
T. 24 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 19, 20, 29 and 30, marked with a trachyte stone, 18x10x7 ins., firmly set and plainly mkd. with 5 notches on E. and 2 on S. edges.

from which an original bearing tree:

A spruce, 12 ins. diam., bears S. $33\frac{1}{2}^{\circ}$ W.,
24 lks. dist., mkd. T24S R2E S30 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T24S R2E
S19|S20
S30|S29
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on S. slope of hill. In scattered spruce growth.

T. 25 S., R. 2 E., Salt Lake Meridian, Utah

Township 25 South, Range 2 East, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Andrew P. Hanson in 1895.

At the cor. of secs. 2, 3, 10 and 11, marked with a lava stone, 18x11x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T25S R2E
S3 |S2
S10|S11
1972

from which

A fir, 10 ins. diam., bears S. 46° E., 12 lks. dist., mkd. T25S R2E S11 BT.

An aspen, 7 ins. diam., bears S. 42° W., 23 lks. dist., mkd. T25S R2E S10 BT.

An aspen, 6 ins. diam., bears N. 37° W., 25 lks. dist., mkd. T25S R2E S3 BT.

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on E. slope of hill. In thick fir and aspen growth.

457

Remonumentation of Corners in
T. 25 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a trachyte stone, 18x9x8 ins., firmly set and plainly mkd. on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T25S R2E

$\frac{1}{4}$
S3 | S2
1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on grassy NE. slope of hill.

T. 26 S., R. 1 W., Salt Lake Meridian, Utah

Township 26 South, Range 1 West, Salt Lake Meridian, located partially within the Fishlake National Forest. The following cor. was established by John G. Burrill in 1874.

At the cor. of secs. 2, 3, 10 and 11, marked with a granite stone, 14x10x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 2 on the E. edges.

from which an original bearing tree:

A cedar, 16 ins. diam., bears N. 44° W., 105 lks. dist., with faint scribe mks. (Record, N. 2° 30' W., 4.40 chs.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T26S R1W

S3 | S2
S10 | S11
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

The cor. is located on E. slope of hill. In scattered juniper growth.

T. 18 S., R. 2 W., Salt Lake Meridian, Utah

Township 18 South, Range 2 West, Salt Lake Meridian, located partially within the Fishlake National Forest. The following corner was established by Shadrack M. Richardson in 1883.

At the cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a gray granite stone, 14x12x7 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edges.

Remonumentation of Corners In

T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T18S R2W

S31|S32

S6

T19S R2W

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on E. slope of hill, 7 lks. dist. N. of 4 strand fence line that bears E. and W. In sage, oak and mahogany growth.

T. 19 S., R. 2 W., Salt Lake Meridian, Utah

Township 19 South, Range 2 West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The corners on the N. and S. bdys. were established by Henry Fitzhugh in 1882 and resurveyed by Heist and Woolle, in 1906. The interior corners by Ferdinand and Dickert in 1871 and resurveyed by Heist and Woolley in 1906.

At the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp., marked with a sandstone, 15x7x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R2W

 $\frac{1}{4}$ S33

S4

T20S R2W

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

The cor. is located on gentle E. slope, 20 lks. dist. N. of 3 strand fence line that bears E. and W. In scattered juniper growth.

At the closing cor. of secs. 5 and 6, on the N. bdy. of the Tp., marked with a gray granite stone, 16x10x6 ins., firmly set and plainly mkd. with 5 notches on the E., 1 on the W. edges and CC on S. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T18S R2W

S32

S6|S5

T19S R2W

1972

459

Remonumentation of Corners in
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on E. slope of hill, 2 lks. dist. E. of
of 4 strand fence line that bears E. and W. In sage and
and mahogany growth.

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked with a cor.
stone, 24x12x12 ins., firmly set and plainly mkd. $\frac{1}{4}$ on
face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T19S R2W

 $\frac{1}{4}$

S8 | S9

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle NE. slope, at the cor. of
4 strand fence line that bears N. and E. In sage and
oak growth.

At the cor. of secs. 4, 5, 8 and 9, marked with a cor.
stone, 16x14x8 ins., firmly set and plainly mkd. with
notches on the S. and 4 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T19S R2W

S5 | S4

S8 | S9

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of
cor.

The cor. is located on gentle NE. slope of hill, 6 lks.
dist. E. of cor. of 4 strand fence line that bears N.
S. and W. In sage and oak brush.

T. 25 S., R. 2 W., Salt Lake Meridian, Utah

Township 25 South, Range 2 West, Salt Lake Meridian, Utah,
located partially within the Fishlake National Forest.
The following corners were established by Andrew P. ...
in 1891.

At the standard cor. of secs. 35 and 36, on the S. by
the Tp., marked with a trachyte stone, 18x11x7 ins.,
firmly set and plainly mkd. with 5 notches on the E.,
on the W. edges and SC on N. face.

60

Remonumentation of Corners in
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

from which an original bearing tree:

A spruce, 14 ins. diam., bears S. 20° W., 20 lks. dist., mkd. T26S R2W S2 BT. (Record, S. 27° W., 15 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

SC
T25S R2W
S35|S36
S1
T26S R2W
1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on NW. slope of hill, 6 lks. dist. S. of cor. of netwire fence projecting N. and W. In thick spruce and aspen growth.

At the standard ¼ sec. cor. of sec. 35, on the S. bdy. of the Tp., marked with a trachyte stone, 18x12x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T25S R2W
¼ S35
T26S R2W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on grassy bottomland. On netwire fence line that bears E. and W.

At the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., marked with a trachyte stone, 22x12x8 ins., firmly set and plainly mkd. with 4 notches on the W., 2 on the E. and SC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T25S R2W
S34|S35
S2
T26S R2W
1972

461

Remonumentation of Corners in

T. 26 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.

The cor. is located on gentle W. slope, in netwire fence line that bears E. and W. In sagebrush, no timber.

At the cor. of secs. 25, 26, 35 and 36, marked with a trachyte stone, 21x14x8 ins., firmly set and plainly mkd with 1 notch on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T25S R2W
 S26|S25
 S35|S36
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2½ ft. base, 1 ft. high, W. of cor.

The cor. is located on gentle S. slope, at the cor. of netwire fence projecting S. and W. In sagebrush growth.

At the ¼ sec. cor. of secs. 25 and 36, marked with a trachyte stone, 22x10x6 ins., firmly set and plainly mkd ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T25S R2W
 ¼ S25
 S36
 1972

from which

An aspen, 6 ins. diam., bears S. 12° E., 14 lks. dist., mkd. T25S R2W ¼ S36 BT.

An aspen, 8 ins. diam., bears N. 25° W., 28 lks. dist., mkd. T25S R2W ¼ S25 BT.

Raise a mound of stone, 3 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on SW. slope of hill. In thick pine and aspen growth.

T. 26 S., R. 2 W., Salt Lake Meridian, Utah

Township 26 South, Range 2 West, Salt Lake Meridian, located within the Fishlake National Forest. The following corners were established by Breckon and McCarty in 1897.

Remonumentation of Corners in
T. 26 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, marked with a trachyte stone, 14x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which an original bearing tree:

An aspen, 14 ins. diam., bears S. 50° E., 36 lks.
dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 55° E., 15 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T26S R2W

$$\frac{1}{4} \frac{S11}{S14}$$

1972

from which

An aspen, 7 ins. diam., bears N. 47° E., 17 lks.
dist., mkd. T26S R2W $\frac{1}{4}$ S11 BT.

Raise a mound of stone, 3 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on gentle S. slope. In thick pine and aspen growth.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked with a trachyte stone, 16x10x8 ins., firmly set and plainly mkd. with 5 notches on the W., 1 on the E. and C C on the S. face.

from which the original bearing trees:

A spruce, 6 ins. diam., bears S. 52° 50' E., 15 lks. dist., mkd. T26S R2W S1 BT.

A spruce, 6 ins. diam., bears S. 34° 40' W., 6 lks. dist., mkd. T26S R2W S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, with brass cap mkd.

T25S R2W

$$\frac{S35}{S2|S1}$$

CC
T26S R2W
1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on steep NW. slope of hill, 12 lks. dist. S. of netwire fence line that bears E. and W. In thick pine and aspen growth.

Remuneration of Corners in
T. 26 S. R. 2 W. S. T. and the Meridian, Utah

CHAINS

At the closing cor. of secs. 2 and 3, on the N. bdy. the Tp., marked with a granite stone, 14x11x5 ins., ly set and plainly mkd. with 4 notches on the W., 2 on the E. and C C on the S. face.

from which an original bearing tree:

A pine, 24 ins. diam., bears S. 37° 45' W., 175 lks. dist., mkd. T26S R2W S3 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 in in the ground to bedrock and in a collar of stone to brass cap mkd.

T25S R2W
S34

S3|S2
CC
T26S R2W
1972

Deposit the original cor. stone alongside the iron post

The cor. is located on gentle N. slope, 7 lks. dist. of cor. of fence projecting E., W. and S. In scattered pine growth.

T. 27 S. R. 2½ W., Salt Lake Meridian, Utah

Township 27 South, Range 2½ West, Salt Lake Meridian, located within the Fishlake National Forest. The following corners were established by Breckon and McCarty in 1898.

At the cor. of secs. 20, 24, 25 and 29, on the W. bdy. the Tp., marked with a sandstone, 20x12x12 ins., ly set and plainly mkd. with 4 notches on the N. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 in in the ground to bedrock, with brass cap mkd.

T27S
R3W R2½W
S24|S20
S25|S29
1972

Deposit the original cor. stone alongside the iron post

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located in bottom of draw that drains S., 1½ lk. W. of netwire fence that bears N. and S. In scattered juniper growth.

At the ¼ sec. cor. of secs. 13 and 17, on the W. bdy. the Tp., marked with a sandstone, 14x10x6 ins., firmly set and plainly mkd. ¼ on W. face.

Remonumentation of Corners in
T. 27 S., R. 2½ W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T27S
R3W R2½W
½
S13 | S17
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on NW. slope of hill, 1 lk. W. of netwire fence line that bears E. and W. In sage and scattered juniper growth.

T. 28 S., R. 2½ W., Salt Lake Meridian, Utah

Township 28 South, Range 2½ West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following corners were established by Breckon and McCarty in 1897.

At the cor. of secs. 9, 10, 15 and 16, marked with a granite stone, 16x8x8 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T28S R2½W
S9 | S10
S16 | S15
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on SW. slope. In lightly scattered juniper and pinon growth.

At the cor. of secs. 3, 4, 9 and 10, marked with a granite stone, 16x14x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 3 on the E. edges.

from which an original bearing tree:

A cedar, 12 ins. diam., bears S. 9° 30' W., 53 lks. dist., mkd. T28S R2½W S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd.

T28S R2½W
S4 | S3
S9 | S10
1972

Remonumentation of Corners in
T. 28 S., R. 2 1/2 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone in mound alongside iron post.

Raise a mound of stone, 3 1/2 ft. base, to brass cap.

The cor. is located on gentle W. slope of hill. In-
tered oak, pinon and juniper growth.

At the 1/4 sec. cor. of secs. 4 and 9, marked with a
chryse stone, 14x10x6 ins., firmly set and plainly
on N. face.

from which an original bearing tree:

A cedar, 7 ins. diam., bears S. 56° 10' W., 27
lks. dist., mkd. 1/4 S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins.
in the ground to bedrock, with brass cap mkd.

T28S R2 1/2W
1/4 S4
S9
1972

Deposit the original cor. stone in mound alongside
iron post.

Raise a mound of stone, 3 1/2 ft. base, to brass cap.

The cor. is located on gentle SE. slope of hill, 60
dist. E. of top of spur projecting S. 65° W. In scat-
pinon and juniper growth.

T. 20 S., R. 3 W., Salt Lake Meridian, Utah

Township 20 South, Range 3 West, Salt Lake Meridian,
located partially within the Fishlake National Forest
The following corner was established by Shadrach M.
Richardson in 1883.

At the cor. of secs. 29, 30, 31 and 32, marked with a
flintstone, 14x12x6 ins., firmly set and plainly mkd.
with 5 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T20S R3W
S30|S29
S31|S32
1972

Deposit the original cor. stone alongside the iron post

The cor. is located on gentle rolling W. slope, at
cor. of 4 strand fence that bears N., S. and E. In
and scattered juniper growth.

Remonumentation of Corners in
T. 24 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T. 24 S., R. 3 W., Salt Lake Meridian, Utah

Township 24 South, Range 3 West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following corners were established by Andrew P. Hanson in 1891.

At the cor. of Tps. 24 and 25 S., Rs. 2 and 3 W., marked with a trachyte stone, 24x10x8 ins., firmly set and plainly mkd. with 6 notches on the N., S. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, with brass cap mkd.

T24S
R3W R2W
S36 | S6
S1 |
T25S
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on S. slope of hill, 23 lks. dist. W. of netwire fence that projects N. In scattered juniper growth.

At the ¼ sec. cor. of sec. 36, on the E. bdy. of the Tp., marked with a trachyte stone, 18x15x10 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S
R3W R2W
¼ |
S36 |
|
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on NW. slope of hill, on netwire fence line that bears N. and S. In lightly scattered juniper growth.

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., marked with a trachyte stone, 20x11x10 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, with brass cap mkd.

Remonumentation of Corners in
T. 24 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T24S R3W
S35|S36
 S2 |S1
 T25S R3W
 1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on NW. slope of hill. In sage and juniper growth.

T. 28 S., R. 3 W., Salt Lake Meridian, Utah

Township 28 South, Range 3 West, Salt Lake Meridian, located partially within the Fishlake National Forest. The corner of 19, 20, 29 and 30 was established by J. Gorlinski in 1871 and the $\frac{1}{4}$ cor. of secs. 19 and 30 was established by Breckon and McCarty in 1897.

At the cor. of secs. 19, 20, 29 and 30, marked with a granite stone, 16x12x8 ins., firmly set and plainly marked with 5 notches on the E. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T28S R3W
S19|S20
 S30|S29
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on SE. slope of hill. In pinon and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, marked with a trachyte stone, 16x12x8 ins., firmly set and plainly marked $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd.

T28S R3W
 $\frac{1}{4}$ S19
 S30
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on steep SE. slope of hill. In pinon and juniper growth.

Remonumentation of Corners in
T. 29 S., R. 3 W., Salt Lake Meridian, Utah

CORNER

T. 29 S., R. 3 W., Salt Lake Meridian, Utah

Township 29 South, Range 3 West, Salt Lake Meridian, borders the Fishlake National Forest. The following corners were established by Joseph Gorlinski in 1871.

At the cor. of secs. 30 and 31, on the W. bdy. of the Tp., marked with a gray sandstone, 26x16x12 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
S25 | S30
 | S31
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, E. of cor.

The cor. is located on rocky SE. slope of hill. In scattered pinon and juniper growth.

At the ¼ sec. cor. of sec. 19, on the W. bdy. of the Tp., marked with a trachyte stone, 18x14x10 ins., firmly set and plainly mkd. ¼ on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
 | ¼
 | S19
 |
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.

The cor. is located on gentle E. slope. In sage and shadscale.

At the cor. of secs. 18 and 19, on the W. bdy. of the Tp., marked with a white sandstone, 15x10x7 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges.

from which an original bearing tree:

A cedar, 7 ins. diam., bears N. 15° W., 65 lks. dist., mkd. T29S R4W S13 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

Remonumentation of Corners in
T. 29 S., R. 3 W., Salt Lake Meridian, Utah

T29S
R4W R3W
|
S13 | S18
| S19
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on gentle rolling E. slope. In-
tered pinon and juniper growth.

T. 24 S., R. 4 W., Salt Lake Meridian, Utah

Township 24 South, Range 4 West, Salt Lake Meridian,
located within the Fishlake National Forest. The fol-
lowing corners were established by Andrew P. Hanson in 1972.

At the cor. of Tps. 24 and 25 S., Rs. 4 and 4½ W.,
marked with a granite stone, 16x12x10 ins., firmly set and
plainly mkd. with 6 notches on 4 edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.
in the ground to bedrock, with brass cap mkd.

T24S
R4½W R4W
S36 | S31
S1 | S6
T25S
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located on steep SE. slope of hill, 15 lbs.
dist. S. of cor. of four strand fence line that bears
N. and W. In thick oak and chokecherry growth.

At the ¼ sec. cor. of secs. 31 and 36, on the W. bdy.
of the Tp., marked with a granite stone, 30x18x5 ins., firm-
ly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, with brass cap mkd.

T24S
R4½W R4W
¼
S36 | S31
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on SW. slope of hill, 5 lbs. dist.
of 5 strand fence line that bears N. and S. In sage and
oak brush.

Remonumentation of Corners in
T. 24 S., R. 4 W., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, marked with a trachyte stone, 20x12x3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W

$\frac{1}{4}$

S16|S15

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located at head of draw that drains S. 65° W., 72 lks. dist. E. of old fence line that bears N. and S. In sagebrush growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a limestone, 18x12x5 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W

S9 | S10

S16 | S15

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep NE. slope of hill. In thick oak and mahogany growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a trachyte stone, 18x10x8 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the E. edges.

from which an original bearing object:

A granite boulder, 13x10x8 ins., above ground, bears S. 76° E., 3 lks. dist., mkd. with a 6 inch cross (X).

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W

S20 | S21

S29 | S28

1972

Deposit the original cor. stone alongside the iron post.

Remonumentation of Corners in
T. 24 S. R. 4 W. Salt Lake Meridian

CHAINS

The cor. is located on NE. slope of hill, 2 lks. dist. of 4 strand fence line that bears N. and S. In thick brush.

At the cor. of secs. 16, 17, 20 and 21, marked with trachyte stone, 18x15x9 ins., firmly set and plainly with 4 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W
S17 | S16
S20 | S21
1972

Deposit the original cor. stone alongside the iron post

The cor. is located on NE. slope, 2 lks. dist. S. of of 5 strand fence line that bears N., S. and E. In and oak brush.

At the cor. of secs. 8, 9, 16 and 17, marked with a stone, 24x16x7 ins., firmly set and plainly mkd. with notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S R2W
S8 | S9
S17 | S16
1972

Deposit the original cor. stone alongside the iron post

The cor. is located on N. slope of draw, in 7 strand line that bears N. and S. In sage and oak brush.

At the ¼ sec. cor. of secs. 9 and 16, marked with a stone, 26x14x7 ins., firmly set and plainly mkd. ¼ on face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W
¼ S9
¼ S16
1972

Deposit the original cor. stone alongside the iron post

The cor. is located on NW. slope of draw, 30 lks. dist. S. of wash, 15 lks. wide, 2 ft. deep, that drains N. S. W. 1½ chs. dist. S. of trail road that bears E. and W.

Remonumentation of Corners in
T. 24 S. R. 4 W.. Salt Lake Meridian Utah

CHAINS

1 lk. dist. N. of 7 strand fence line that bears E. and
N. In sage and oak brush.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked with a tra-
chyte stone, 24x14x7 ins., firmly set and plainly mkd. $\frac{1}{4}$
on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T24S R4W

$\frac{1}{4}$

S31|S32

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of
cor.

The cor. is located on NE. slope of hill. In thick oak
brush.

At the cor. of secs. 29, 30, 31 and 32, marked with a tra-
chyte stone, 35x16x5 ins., firmly set and plainly mkd.
with 5 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T24S R4W

S30|S29

S31|S32

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on SE. slope of hill. In scrub aspen
growth.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a por-
phyry stone, 18x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$
on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in
the ground to solid bedrock, with brass cap mkd.

T24S R4W

$\frac{1}{4}$ $\frac{S29}{S32}$

1972

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located on SE. slope of hill. In mahogany,
oak and sagebrush.

Remonumentation of Corners in

T. 24 S., R. 4 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 19, 20, 29 and 30, marked with a trachyte stone, 22x10x8 ins., firmly set and plainly mkd. with 5 notches on the E. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4W
S19|S20
 S30|S29
 1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SE. slope, about 2 chains dist. W. of small draw that drains N. 50° E. In sagebrush growth.

T. 27 S., R. 4 W., Salt Lake Meridian, Utah

Township 27 South, Range 4 West, Salt Lake Meridian, crosses the Fishlake National Forest. The following corners established by John T. Breckon in 1896.

At the ¼ sec. cor. of secs. 13 and 24, marked with a trachyte stone, 16x10x6 ins., firmly set and plainly mkd. ¼ c on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T27S R4W
 ¼ S13
 S24
 1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on NW. slope of hill. In scattered pinon and juniper.

T. 29 S., R. 4 W., Salt Lake Meridian, Utah

Township 29 South, Range 4 West, Salt Lake Meridian, located partially within the Fishlake National Forest. The following corners were established by Page and Egan in 1900.

At the closing cor. of secs. 25 and 36, on the E. by the Tp., marked with a trachyte stone, 16x8x6 ins., firmly set and plainly mkd. with 5 notches on the N., 1 on the S. and CC on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

Remonumentation of Corners in
T. 29 S., R. 4 W., Salt Lake Meridian, Utah

CHAINS

T29S
R4W R3W
CC $\frac{S25}{S36}$ | S31
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

The cor. is located on rocky SE. slope of hill. In lightly scattered pinon and juniper growth.

At the closing cor. of secs. 24 and 25, on the E. bdy. of the Tp., marked with a trachyte stone, 16x10x5 ins., firmly set and plainly mkd. with 4 notches on the N., 2 notches on the S. and CC on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T29S
R4W R3W
CC $\frac{S24}{S25}$ | S30
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W. of cor.

The cor. is located on rocky S. slope of hill. In lightly scattered pinon and juniper growth.

At the ¼ sec. cor. of sec. 24, on the E. bdy. of the Tp., marked with a white sandstone, 16x10x4 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
¼ |
S24 |
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.

The cor. is located on gentle E. slope. In sage and shadscale.

At the closing cor. of secs. 13 and 24, on the E. bdy. of the Tp., marked with a trachyte stone, 19x10x8 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges and CC on W. face.

Remonumentation of Corners in
T. 2 S. R. 4 W. Salt Lake Meridian Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
CC $\frac{S13}{S24}$ | S19
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle rolling E. slope. In scattered pinon and juniper growth.

At the ¼ sec. cor. of sec. 13, on the E. bdy. of the Tp., marked with a trachyte stone, 16x11x4 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
½ |
S13 |
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on rolling E. slope. In scattered pinon and juniper growth.

At the closing cor. of secs. 12 and 13, on the E. bdy. of the Tp., marked with a trachyte stone, 14x12x10 ins., firmly set and plainly mkd. with 4 notches on S., 2 on N. and CC on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S
R4W R3W
CC $\frac{S12}{S13}$ | S18
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on SW. slope of hill. In pinon and juniper growth.

Remonumentation of Corners in
T. 25 S., R. 4½ W., Salt Lake Meridian, Utah

CHAINS

T. 25 S., R. 4½ W., Salt Lake Meridian, Utah

Township 25 South, Range 4½ West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Edward W. Koeber in 1883.

At the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., marked with a granite stone, 16x6x5 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R4½W
S35|S36
S2 |S1
T25S R4½W
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SE. slope, at the cor. of 4 strand fence that bears N., S., E. and W. In thick sage, serviceberry and chokecherry growth.

At the ¼ sec. cor. of secs. 2 and 35, on the N. bdy. of the Tp., marked with a granite stone, 15x13x7 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T24S R4½W
S35
¼ S2
T25S R4½W
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land and at the cor. of pole fence line that bears N. and E. In scattered aspen growth.

At the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., marked with a granite stone, 16x9x5 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T24S R4½W
S34|S35
S3 |S2
T25S R4½W
1972

Remonumentation of Corners in
T. 25 S., R. 4½ W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on nearly level ridge top that bears N. 50° W. and S. 50° E., 6 lks. dist. E. of cor. of 4 strand fence line that bears N., S. and W. In sage and serviceberry growth.

At the ¼ sec. cor. of secs. 3 and 34, on the N. bdy. of the Tp., marked with a granite stone, 14x12x5 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S R4½W
 S34
¼ ———
 S3
T25S R4½W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on steep NW. slope of hill, 32 lks. dist. N. of 4 strand fence line that bears E. and W. In lightly scattered aspen growth.

At the cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., marked with a granite stone, 30x18x10 ins., firmly set and plainly mkd. 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock with brass cap mkd.

T24S R4½W
 S33 | S34
 S4 | S3
T25S R4½W
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on NW. slope of hill. In scattered aspen growth.

At the ¼ sec. cor. of secs. 4 and 33, on the N. bdy. of the Tp., marked with a sandstone, 17x15x15 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

35
Remonumentation of Corners in
T. 25 S., R. 4 $\frac{1}{2}$ W., Salt Lake Meridian, Utah

CHAINS

T24S R4 $\frac{1}{2}$ W
$$\frac{1}{4} \frac{S33}{S4}$$
T25S R4 $\frac{1}{2}$ W
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on top of ridge that bears N. and S.
In sagebrush growth.

At the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of
the Tp., marked with a granite stone, 18x10x10 ins.,
firmly set and plainly mkd. with 4 notches on the E. and
2 on the W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in
the ground to bedrock, with brass cap mkd.

T24S R4 $\frac{1}{2}$ W
$$\frac{S32 | S33}{S5 | S4}$$
T25S R4 $\frac{1}{2}$ W
1972

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, to brass cap.

Deposit the original cor. stone alongside the iron post.

The cor. is located on NW. slope of hill, at the cor. of
4 strand fence line that bears N. and W. In oak, sage
and scattered aspen growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a gran-
ite stone, 20x14x4 ins., firmly set and plainly mkd. with
5 notches on the S. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins.
in the ground to bedrock, with brass cap mkd.

T25S R4 $\frac{1}{2}$ W
$$\frac{S3 | S2}{S10 | S11}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of
cor.

The cor. is located in bottom of draw that drains S., at
the cor. of fence projecting N., E. and S. 35° W. and 35
lks. dist. E. of trail road that bears N. and S. 35° W.
In oak and scattered aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a granite
stone, 25x13x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W.
face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins.
in the ground to bedrock, with brass cap mkd.

Remonumentation of Corners in
T. 25 S., R. 4½ W., Salt Lake Meridian, Utah

CHAINS

T25S R4½W

¼
S3 | S2
1972

Raise a mound of stone, 3½ ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on SE. slope of draw that drains S. in 4 strand fence line that bears N. and S. and 40 lks. dist. E. of trail road that bears N. and S. In sage, oak and scattered aspen growth.

T. 24 S., R. 5 W., Salt Lake Meridian, Utah

Township 24 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Henry Fitzhugh in 1882.

At the ¼ sec. cor. of secs. 34 and 35, marked with a granite stone, 15x14x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T24S R5W

¼
S34 | S35
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

from which

A juniper, 12 ins. diam., bears S. 40° E., 27 lks. dist., mkd. ¼ S35 BT.

The cor. is located on gentle W. slope, 7 lks. dist. N. of 6 strand fence line that bears E. and W. In oak and scattered juniper growth.

At the cor. of secs. 26, 27, 34 and 35. marked with a granite stone, 16x7x5 ins., firmly set and plainly mkd. with 2 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R5W

S27 | S26
S34 | S35
1972

Remonumentation of Corners in
T. 24 S., R. 5 W., Salt Lake Meridian, Utah

48

CHAINS

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope, 5 lks. dist. S. of 6 strand fence line that bears E. and W. and 15 lks. dist. S. of trail road that bears E. and W. In sage growth.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked with a granite stone, 25x20x12 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T24S R5W
 $\frac{1}{4}$ $\frac{S26}{S35}$
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle W. slope. In sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, marked with a granite stone, 20x14x9 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T24S R5W
 $\frac{1}{4}$ $\frac{S27}{S34}$
1972

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

Deposit the original cor. stone alongside the iron post.

The cor. is located on SW. slope, about $1\frac{1}{2}$ chs. dist. N. of trail road that bears N. 40° W. and S. 40° E. In sage and oak brush.

T. 25 S., R. 5 W., Salt Lake Meridian, Utah

Township 25 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Henry Fitzhugh in 1882.

At the cor. of secs. 2, 3, 10 and 11, marked with a granite stone, 30x11x5 ins., firmly set and plainly mkd. with 5 notches on the S. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

481

Remonumentation of Corners in
T. 25 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

T25S R5W
S3 | S2
S10 | S11
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on gentle SE. slope. In sage and lightly scattered juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, marked with a granite stone, 12x12x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T25S R5W
 $\frac{1}{4}$ S2
S11
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SW. slope, at the cor. of 5 strand fence line that bears N., S. and W. In sagebrush.

T. 26 S., R. 5 W., Salt Lake Meridian, Utah

Township 26 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Page and Erwin in 1900.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., marked with a trachyte stone, 12x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A pinon, 18 ins. diam., bears N. 36° E., 25 lks. dist., mkd. $\frac{1}{4}$ S7 BT. (Record, N. 28° E., 25 lks.)

A cedar, 12 ins. diam., bears N. 45° W., 21 lks. dist., mkd. $\frac{1}{4}$ S12 BT. (Record, N. 25° W., 21 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T26S
R5W R $4\frac{1}{2}$ W
 $\frac{1}{4}$
S12 | S7
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle SW. slope. In pinon and juniper growth.

Remonuemntation of Corners in
T. 26 S. R. 5 W. Salt Lake Meridian Utah

CHAINS

At the cor. of secs. 13, 14, 23 and 24, marked with a trachyte stone, 14x12x8 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T26S R5W
S14|S13
S23|S24
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on W. slope of hill. In scattered pinon and juniper growth.

At the cor. of secs. 14, 15, 22 and 23, marked with a trachyte stone, 18x14x10 ins., firmly set and plainly mkd. with 3 notches on the S. and 2 on the E. edges.

from which an original bearing tree:

A cedar, 14 ins. diam., bears S. 38° E., 30 lks. dist., mkd. T26S R5W S23 BT. (Record, S. 45° E., 65 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T26S R5W
S15|S14
S22|S23
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on top of spur projecting N. 40° W. In scattered pinon and juniper.

At the cor. of secs. 9, 10, 15 and 16, marked with a trachyte stone, 20x8x6 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edges.

from which the original bearing trees:

A cedar, 24 ins. diam., bears N. 65° E., 40 lks. dist., mkd. T26S R5W S10 BT.

A cedar, 24 ins. diam., bears S. 56° E., 41 lks. dist., mkd. T26S R5W S15 BT. (Record, S. 65° E., 42 lks.)

A cedar, 14 ins. diam., bears S. 86° W., 123 lks. dist., mkd. T26S R5W S16 BT.

A pinon, 14 ins. diam., bears N. 62° W., 195 lks. dist., mkd. T26S R5W S9 BT. (Record, N. 65° W., 175 lks.)

Remonumentation of Corners in
T. 26 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

30° E. In sage and oak brush.

At the cor. of secs. 8, 9, 16 and 17, marked with a trachyte stone, 12x8x6 ins., firmly set and plainly mkd. with 4 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T26S R5W

S8 | S9

S17 | S16

1972

Deposit the original cor. stone alongside the iron post.

Set a steel fence post alongside the iron post.

The cor. is located on NW. slope of hill. In scattered pinon and juniper growth.

A85

CHAINS

Blank

Page

487

CERTIFICATE OF SURVEY

(I) ~~We~~, Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, (I) ~~We~~ have remonumented corners in the following listed townships:

- Tps. 25 and 26 S., R. 1 E.
- Tps. 23, 24 and 25 S., R. 2 E.
- T. 26 S., R. 1 W.
- Tps. 18, 19, 25 and 26 S., R. 2 W.
- Tps. 27 and 28 S., R. 2 1/2 W.
- Tps. 20, 24, 28 and 29 S., R. 3 W.
- Tps. 24, 27 and 29 S., R. 4 W.
- T. 25 S., R. 4 1/2 W.
- Tps. 24, 25 and 26 S., R. 5 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~XXX~~ and under (my) ~~XXXX~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 23, 1973 (Date) *Ferrel D. Reynolds*
/s/ Ferrel D. Reynolds
(Cadastral Surveyor)

(Date) _____
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date AUG 23 1974

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in Tps. 25 and 26 S., R. 1 E., Tps. 23, 24 and 25 S., R. 2 E., T. 26 S., R. 1 W., Tps. 18, 19, 25 and 26 S., R. 2 W., Tps. 27 and 28 S., R. 2 1/2 W., Tps. 20, 24, 28 and 29 S., R. 3 W., Tps. 24, 27 and 29 S., R. 4 W., T. 25 S., R. 4 1/2 W., and Tps. 24, 25 and 26 S., R. 5 W., of the Salt Lake Meridian, Utah

executed by Ferrel D. Reynolds, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 25 1976 (Date) *J. J. [Signature]*
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in remonumentation of corners in Utah, is a true copy of the original field notes.~~

(Date) _____
(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Dixie National Forest
490

ORIGINAL
FIELD NOTES
OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 36 SOUTH, RANGE 1 EAST --- TOWNSHIP 33 SOUTH, RANGE 3 EAST

TOWNSHIP 33 SOUTH, RANGE 4 EAST --- TOWNSHIP 31 SOUTH, RANGE 2 WEST

TOWNSHIP 32 SOUTH, RANGE 2 WEST --- TOWNSHIP 33 SOUTH, RANGE 2 WEST

TOWNSHIP 35 SOUTH, RANGE 3 WEST --- TOWNSHIP 36 SOUTH, RANGE 3 WEST

TOWNSHIP 33 SOUTH, RANGE 4½ WEST --- TOWNSHIP 34 SOUTH, RANGE 4½ WEST

TOWNSHIP 34 SOUTH, RANGE 5 WEST --- TOWNSHIP 34 SOUTH, RANGE 7 WEST

TOWNSHIP 36 SOUTH, RANGE 7 WEST --- TOWNSHIP 37 SOUTH, RANGE 7 WEST

TOWNSHIP 35 SOUTH, RANGE 8 WEST --- TOWNSHIP 36 SOUTH, RANGE 8 WEST

TOWNSHIP 37 SOUTH, RANGE 14 WEST --- TOWNSHIP 37 SOUTH, RANGE 16 WEST

TOWNSHIP 38 SOUTH, RANGE 16 WEST --- TOWNSHIP 36 SOUTH, RANGE 18 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 1972, approved February 16, 1961,

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated June 23, 1971.

Survey commenced August 14, 1972

Survey completed September 13, 1972

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S. R. 1 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

● 1

Tp. 33 S. R. 3 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

● 5
● 3
● 5
● 4 25 ● 2
● 3 ● 4 ● 2

Tp. 33 S. R. 4 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

● 6

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 31 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 32 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 33 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 35 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
	● 11 ● 12 ● 10 ● 9				
7	● 11 ● 8 ● 10 ● 10	● 9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	● 12 ● 8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 33 S. R. 4½ W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
	● 12				
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 34 S. R. 4½ W. Mer. Salt Lake

6	5 ● 14	4	3	2	1
7	8 ● 14	9	10	11	12
18	17 ● 13 ● 13	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 34 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14 ● 14	13
19	20	21	22	23	24
30	29	28 ● 15	27	26	25
31	32	33	34	35	36

Tp. 34 S. R. 7 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32 ● 15	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S. R. 7 W. Mer. Salt Lake

6	22 5 21	21 4	3	2	22 1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23 20	24 18
30	29	28	27 20	26 19	18 16 17
31	32	33	34	35	16 36

Tp. 37 S. R. 7 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21 35	31 22 31	29 23 28	25 24 24 25
30	29	33 28	30 27	27 26	25
31	32	32 32	29 30	26 27	23 24
31	32	33	29 34	26 35	23 36

Tp. 35 S. R. 8 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32 34	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S. R. 8 W. Mer. Salt Lake

6	42 ● 41	5 ● 41	4	3	2	1
7	8	● 40	39 ● 38	10	11	12
18	17	● 40	38 ● 37	15	14	13
19	● 39	20	● 37	21	● 36	22
30	29	28	27	● 35	● 26	25
31	32	33	34	35	36	36

Tp. 37 S. R. 14 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	● 43	● 42	14	13
19	20	21	● 42	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 37 S. R. 16 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	● 45	● 45
			● 44	● 44	● 43

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 38 S. R. 16 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

47 46 45

Tp. 36 S. R. 18 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

47

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Dixie National Forest. A Forester's compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 36 S., R. 1 E., Salt Lake Meridian, 15° E.
 T. 33 S., R. 3 E., Salt Lake Meridian, 15° E.
 T. 33 S., R. 4 E., Salt Lake Meridian, 15° E.
 T. 31 S., R. 2 W., Salt Lake Meridian, 15° 15' E.
 T. 32 S., R. 2 W., Salt Lake Meridian, 15° 10' E.
 T. 33 S., R. 2 W., Salt Lake Meridian, 15° 10' E.
 T. 35 S., R. 3 W., Salt Lake Meridian, 15° 05' E.
 T. 36 S., R. 3 W., Salt Lake Meridian, 15° 05' E.
 T. 33 S., R. 4½ W., Salt Lake Meridian, 15° 15' E.
 T. 34 S., R. 4½ W., Salt Lake Meridian, 15° 15' E.
 T. 34 S., R. 5 W., Salt Lake Meridian, 15° 15' E.
 T. 34 S., R. 7 W., Salt Lake Meridian, 15° 20' E.
 T. 36 S., R. 7 W., Salt Lake Meridian, 15° 10' E.
 T. 37 S., R. 7 W., Salt Lake Meridian, 15° 10' E.
 T. 35 S., R. 8 W., Salt Lake Meridian, 15° 10' E.
 T. 36 S., R. 8 W., Salt Lake Meridian, 15° 05' E.
 T. 37 S., R. 14 W., Salt Lake Meridian, 15° 20' E.
 T. 37 S., R. 16 W., Salt Lake Meridian, 15° 30' E.
 T. 38 S., R. 16 W., Salt Lake Meridian, 15° 20' E.
 T. 36 S., R. 18 W., Salt Lake Meridian, 15° 35' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the U.S. Forest Service.

T. 36 S., R. 1 E., Salt Lake Meridian, Utah

Township 36 South, Range 1 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by Wm. Lewman in 1893 and resurveyed by E.S.C. Smith in 1922.

Point for the ¼ sec. cor. of secs. 4 and 33, on the S. bdy. of the Tp., determined from the record course and distance of an original bearing tree:

A yellow pine, 36 ins. diam., bears N. 25° W., 78 lks. dist., mkd. T36S R1E S33 BT.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R1E

 S33
 ¼ ———
 S4

T37S R1E

1972

Raise a mound of stone, 3½ ft. base, 1½ ft. high, N. of cor.

The cor. is located on N. slope of hill, in center of old logging road that bears N. and S. In thick fir and yellow pine growth.

Remonumentation of Corners in
T. 33 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

T. 33 S., R. 3 E., Salt Lake Meridian, Utah

Township 33 South, Range 3 East, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Frank T. Roberts in 1908.

At the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., marked with a volcanic stone, 15x14x3 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edges.

from which the original bearing trees:

A cedar, 14 ins. diam., bears N. 30° 47' E.,
174 lks. dist., mkd. T33S R4E S30 BT.

A pinon, 14 ins. diam., bears S. 3° 45' E.,
281 lks. dist., mkd. T33S R4E S31 BT.

A pinon, 10 ins. diam., bears S. 49° 51' W.,
340 lks. dist., mkd. T33S R3E S36 BT.

A pinon, 14 ins. diam., bears N. 25° 10' W.,
307 lks. dist., mkd. T33S R3E S25 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T33S
R3E R4E
S25|S30
S36|S31
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on rolling benchland. In scattered pinon and juniper growth.

At the ¼ sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., marked with a volcanic stone, 15x8x6 ins., firmly set and plainly mkd. ¼ on W. face.

from which the original bearing trees:

A cedar, 16 ins. diam., bears S. 12° 03' E.,
23 lks. dist., mkd. T33S R4E ¼ S30 BT.

A cedar, 10 ins. diam., bears S. 19° 30' W.,
36 lks. dist., mkd. T33S R3E ¼ S25 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T33S
R3E R4E
¼
S25|S30
1972

Remonumentation of Corners
T. 33 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep broken S. slope of hill. In thick pinon and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., marked with a volcanic stone, 20x11x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which an original bearing tree:

A cedar, 18 ins. diam., bears N. 61° 56' E.,
34 lks. dist., mkd. T33S R4E $\frac{1}{4}$ S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T33S
R3E R4E
 $\frac{1}{4}$
S24|S19
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle S. slope. In thick pinon and juniper growth.

At the cor. of secs. 25, 26, 35 and 36, marked with a volcanic stone, 15x9x4 ins., firmly set and plainly mkd. with 1 notch on the S. and E. edges.

from which the original bearing trees:

A cedar, 16 ins. diam., bears N. 29° 07' E.,
49 lks. dist., mkd. T33S R3E S25 BT.

A cedar, 12 ins. diam., bears S. 51° 46' E.,
99 lks. dist., mkd. T33S R3E S36 BT.

A cedar, 14 ins. diam., bears S. 20° W.,
87 lks. dist., mkd. T33S R3E S35 BT.

A pinon, 10 ins. diam., bears N. 23° 11' W.,
68 lks. dist., mkd. T33S R3E S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T33S R3E
S26|S25
S35|S36
1972

Remonumentation of Corners in
T. 33 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep broken SW. slope of hill. In thick pinon and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked with a volcanic stone, 20x12x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

A pinon, 12 ins. diam., bears N. 32° 13' E.,
208 lks. dist., mkd. T33S R3E $\frac{1}{4}$ S25 BT.

A pinon, 12 ins. diam., bears S. 78° E.,
107 lks. dist., mkd. T33S R3E $\frac{1}{4}$ S36 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T33S R3E
 $\frac{1}{4}$ S25
S36
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on gentle rolling benchland. In pinon and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, marked with a volcanic stone, 18x12x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A pinon, 10 ins. diam., bears N. 72° E., 62 lks. dist., mkd. T33S R3E $\frac{1}{4}$ S25 BT.

A pinon, 8 ins. diam., bears S. 51° W., 14 lks. dist., mkd. T33S R3E $\frac{1}{4}$ S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T33S R3E
 $\frac{1}{4}$
S26|S25
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Remonumentation of Corners in
T. 33 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located on top of ridge that bears N. 80° W. and S. 80° E. In pinon and juniper growth.

At the cor. of secs. 23, 24, 25 and 26, marked with a volcanic stone, 15x10x10 ins., firmly set and plainly mkd. with 2 notches on the S. and 1 on the E. edges.

from which the original bearing trees:

A pinon, 14 ins. diam., bears N. 54° 49' E.,
49 lks. dist., mkd. T33S R3E S24 BT.

A cedar, 16 ins. diam., bears S. 43° 16' E.,
63 lks. dist., mkd. T33S R3E S25 BT.

A pinon, 14 ins., diam., bears S. 29° 35' W.,
141 lks. dist., mkd. T33S R3E S26 BT.

A pinon, 10 ins. diam., bears N. 77° 02' W.,
97 lks. dist., mkd. T33S R3E S23 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T33S R3E
S23 | S24
S26 | S25
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on broken SE. slope of hill, 30 lks. dist. E. of small draw that drains S. 20° E. In thick pinon and juniper growth.

At the ¼ sec. cor. of secs. 13 and 24, marked with a volcanic stone, 18x9x7 ins., firmly set and plainly mkd. ¼ on N. face.

from which the original bearing trees:

A pinon, 16 ins. diam., bears S. 35° 25' E.,
25 lks. dist., mkd. T33S R3E ¼ S24 BT.

A pinon, 15 ins. diam., bears N. 46° 11' W.,
49 lks. dist., mkd. T33S R3E ¼ S13 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T33S R3E
¼ $\frac{S13}{S24}$
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

**Remonumentation of Corners in
T. 33 S., R. 3 E., Salt Lake Meridian, Utah**

CHAINS

The cor. is located on SE. slope. In thick pinon and juniper growth.

T. 33 S., R. 4 E., Salt Lake Meridian, Utah

Township 33 South, Range 4 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by Frank T. Roberts in 1908 and retraced by Thoma, Johnston and Nelson in 1916 and 1917.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, marked with a lava stone, 15x14x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

A pinon, 14 ins. diam., bears S. 31° 42' W.,
24 lks. dist., mkd. T33S R4E $\frac{1}{4}$ S30 BT.

A pinon, 12 ins. diam., bears N. 58° 51' W.,
40 lks. dist., mkd. T33S R4E $\frac{1}{4}$ S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T33S R4E
 $\frac{1}{4}$ $\frac{S19}{S30}$
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on gentle rolling W. slope. In pinon and juniper growth.

T. 31 S., R. 2 W., Salt Lake Meridian, Utah

Township 31 South, Range 2 West, Salt Lake Meridian, borders the Dixie National Forest. The following corner was established by Bailey and Burrill in 1874 and resurveyed by J. C. Thoma and E. R. Bunbury in 1915.

At the cor. of secs. 10, 11, 14 and 15, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T31S R2W
 $\frac{S10|S11}{S15|S14}$
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, to brass cap.

Remonumentation of Corners in
T. 31 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

The cor. is located on NW. slope of draw. In sage and shadscale.

T. 32 S., R. 2 W., Salt Lake Meridian, Utah

Township 32 South, Range 2 West, Salt Lake Meridian, borders the Dixie National Forest. The following corners were established by Bailey and Burrill in 1876.

At the cor. of secs. 22, 23, 26 and 27, marked with a trachyte stone, 24x10x8 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R2W
S22|S23
S27|S26
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on gentle rolling E. slope. In sage and shadscale.

At the ¼ sec. cor. of secs. 22 and 23, marked with a trachyte stone, 14x6x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T32S R2W
¼
S22|S23
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on gentle rolling NW. slope. In sage and shadscale.

At the ¼ sec. cor. of secs. 14 and 23, marked with a trachyte stone, 14x12x8 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a collar of stone to brass cap mkd.

T32S R2W
¼ S14
S23
1972

Remonumentation of Corners in
T. 32 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

The cor. is located near the top of ridge that bears E. and W. and at the cor. of 4 strand fence line that bears W. and S. In sage and shadscale.

At the cor. of secs. 10, 11, 14 and 15, marked with a trachyte stone, 14x8x6 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the E. edges.

from which

A pinon, 14 ins. diam., bears S. 56° W.,
31 lks. dist., mkd. T32S R2W S15 BT. (not recorded)

A pinon, 14 ins. diam., bears N. 56° E.,
50 lks. dist., mkd. T32S R2W S11 BT. (not recorded)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T32S R2W
S10|S11
S15|S14
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on S. slope of hill. In scattered pinon and juniper growth.

At the cor. of secs. 15, 16, 21 and 22, marked with a trachyte stone, 16x10x8 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R2W
S16|S15
S21|S22
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle N. slope. In sage and very lightly scattered pinon and juniper growth.

T. 33 S., R. 2 W., Salt Lake Meridian, Utah

Township 33 South, Range 2 West, Salt Lake Meridian, borders the Dixie National Forest. The following corner was established by Bailey and Burrill in 1876.

Remonumentation of Corners in
T. 33 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 17, 18, 19 and 20, marked with a trachyte stone, 20x10x8 ins., firmly set and plainly mkd. with 5 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T33S R2W
S18|S17
S19|S20
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling land. In sage and shadscale.

T. 35 S., R. 3 W., Salt Lake Meridian, Utah

Township 35 South, Range 3 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Bailey and Burrill in 1876.

At the cor. of secs. 3, 4, 9 and 10, marked with a sandstone, 14x12x10 ins., firmly set and plainly mkd. with 5 notches on the N. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T35S R3W
S4|S3
S9|S10
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land and at the cor. of 4 strand fence line that bears N. and W. In sagebrush.

At the ¼ sec. cor. of secs. 8 and 9, marked with a sandstone, 23x10x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T35S R3W
¼
S8|S9
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.

The cor. is located in draw, 60 lks. wide that drains S. In pine and juniper growth.

Remonumentation of Corners in
T. 35 S., R. 3 W., Salt Lake Meridian Utah

CHAINS

At the cor. of secs. 4, 5, 8 and 9, marked with a sandstone, 20x13x7 ins., firmly set and plainly mkd. with 5 notches on the S. and 4 on the E. edges.

from which an original bearing tree:

A yellow pine, 20 ins. diam., bears S. 45° E.,
36 lks. dist., mkd. T35S R3W S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T35S R3W

S5 | S4

S8 | S9

1972

from which

A yellow pine, 10 ins. diam., bears N. 83° E.,
24 lks. dist., mkd. T35S R3W S4 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.

The cor. is located on NE. slope of hill, 15 lks. dist. S. of 4 strand fence line that bears E. and W. In pine and juniper growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a broken limestone, 18x8x6 ins., firmly set and dimly mkd. with 5 notches on the E. and 4 on the S. edges.

from which an original bearing tree:

A yellow pine stump, 24 ins. diam., bears S. 85°
W., 20 lks. dist., mkd. S18 T35S R3W BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T35S R3W

S7 | S8

S18 | S17

1972

from which

A yellow pine, 18 ins. diam., bears N. 70° W.,
61 lks. dist., mkd. T35S R3W S7 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling land and in 4 strand fence line that bears N. and S. In pine and juniper growth.

At the ¼ sec. cor. of secs. 8 and 17, marked with a limestone, 13x8x6 ins., firmly set and plainly mkd. ¼ on N. face.

Remonumentation of Corners in
T. 15 S. R. 2 W. Salt Lake County, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T35S R3W

¼ $\frac{S8}{S17}$
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling land. In pine and juniper growth.

At the ¼ sec. cor. of secs. 7 and 8, marked with a broken sandstone, 20x20x18 ins., firmly set and dimly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 17 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T35S R3W

¼
S7|S8
1972

from which

A yellow pine, 15 ins. diam., bears S. 67° W., 18 lks. dist., mkd. T35S R3W ¼ S7 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on top of rocky ridge that bears N., 45° E. and S. 45° W., 5 lks. dist. E. of 4 strand fence line that bears N. and S. In pine and juniper growth.

At the cor. of secs. 5, 6, 7 and 8, marked with a limestone, 14x10x6 ins., firmly set and plainly mkd. with 5 notches on the S. and E. edges.

from which the original bearing trees:

A yellow pine, 10 ins. diam., bears S. 87° E., 11 lks. dist., mkd. T35S R3W S8 BT.

A yellow pine, 8 ins. diam., bears N. 42° W., 20 lks. dist., mkd. S6 BT. (Record, N. 80° W., 20 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, with brass cap mkd.

T35S R3W

$\frac{S6|S5}{S7|S8}$
1972

Remonumentation of Corners in
T. 35 S., R. 3 W. Salt Lake Meridian, Utah

CHAINS

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

Deposit the original cor. stone, in mound alongside the iron post.

The cor. is located on N. edge of ridge that bears N. 80° W. and S. 80° E. In pine and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked with a broken limestone, 20x14x10 ins., firmly set and dimly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T35S R3W

$\frac{1}{4}$ $\frac{S5}{S8}$
1972

from which

A yellow pine, 16 ins. diam., bears N. 68° W.,
21 lks. dist., mkd. T35S R3W $\frac{1}{4}$ S5 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling land and in a 4 strand fence line that bears E. and W. In scattered pine and juniper growth.

T. 36 S., R. 3 W., Salt Lake Meridian, Utah

Township 36 South, Range 3 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by T. C. Bailey in 1876.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, marked with a sandstone, 15x11x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T36S R3W

$\frac{1}{4}$
S7|S8
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling land, at the cor. of 5 strand fence line that bears N., S. and W. In sage and shadscale.

T. 33 S., R. $4\frac{1}{2}$ W., Salt Lake Meridian, Utah

Township 33 South, Range $4\frac{1}{2}$ West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by J. G. Burrill in 1874.

Remonumentation of Corners in
T. 33 S. R. 4½ W., Salt Lake Meridian, Utah

CMAINS

At the cor. of secs. 17, 18, 19 and 20, marked with a sandstone, 24x9x8 ins., firmly set and plainly mkd. with 5 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T33S R4½W
S18|S17
S19|S20
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling sagebrush flat. At the cor. of 4 strand fence line that bears E. and S.

T. 34 S., R. 4½ W., Salt Lake Meridian, Utah

Township 34 South, Range 4½ West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corners were established by J. G. Burrill in 1874.

At the cor. of secs. 17, 18, 19 and 20, marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R4½W
S18|S17
S19|S20
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located at head of small draw that drains W. and 45 lks. dist. S. of trail road that bears E. and W. In lightly scattered pinon and juniper growth.

At the ¼ sec. cor. of secs. 17 and 20, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R4½W
¼ S17
S20
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling benchland, 4 lks. dist. E. of 4 strand fence line that bears N. and S. and 30 lks. dist. E. of trail road that bears N. and S. on turn. No timber.

Remonumentation of Corners in
T. 34 S., R. 4 $\frac{1}{2}$ W., Salt Lake Meridian, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, marked with a sandstone, 14x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

A pinon, 6 ins. diam., bears S. 10° W., 8 lks.
dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 3° W., 12 lks.)

A pinon, 8 ins. diam., bears N. 20° W., 6 lks.
dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 4° E., 6 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R4 $\frac{1}{2}$ W
 $\frac{1}{4}$ $\frac{S8}{S17}$
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

The cor. is located on gentle W. slope, 81 lks. dist. W. of 4 strand fence line that bears N. and S. In scattered pinon and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked with a sandstone, 17x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R4 $\frac{1}{2}$ W
 $\frac{1}{4}$ $\frac{S5}{S8}$
1972

from which

A pinon, 12 ins. diam., bears N. 4° E., 16 lks.
dist., mkd. T34S R4 $\frac{1}{2}$ W S5 BT.

A pinon, 7 ins. diam., bears S. 19° E., 28 lks.
dist., mkd. $\frac{1}{4}$ S8 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

The cor. is located on gentle rolling W. slope, 45 lks. dist. W. of 4 strand fence line that bears N. and S. In pinon and juniper growth.

T. 34 S., R. 5 W., Salt Lake Meridian, Utah

Township 34 South, Range 5 West, Salt Lake Meridian, is located outside the Dixie National Forest. These corners are being used as right-of-way control corners. The fol-

Remonumentation of Corners in
T. 34 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

lowing corners were established by Bailey and Burrill in 1874.

At the cor. of secs. 13, 14, 23 and 24, marked with a sandstone, 17x14x12 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R5W
S14|S13
S23|S24
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is located in sagebrush flat.

At the cor. of secs. 28, 29, 32 and 33, marked with a volcanic stone, 16x14x12 ins., firmly set and dimly mkd. with 4 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T34S R5W
S29|S28
S32|S33
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on nearly level land, 5 lks. dist. N. of netwire fence line that bears E. and W., 12 lks. dist. S. of irrigation ditch 2 lks. wide, 6 ins. deep that flows E., 21 lks. dist. S. of a strand power line that bears E. and W. and 68 lks. dist. S. of hard surface road that bears E. and W.

T. 34 S., R. 7 W., Salt Lake Meridian, Utah

Township 34 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corner was established by T. C. Bailey in 1876.

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a volcanic stone, 15x12x4 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edges.

From which the original bearing trees:

An aspen, 10 ins. diam., bears N. 23° 45' E.,
31 lks. dist., mkd. T34S R7W S32 BT.

An aspen, 5 ins. diam., bears S. 21½° W., 39
lks. dist., mkd. T35S R7W S6 BT.

Remonumentation of Corners in
T. 34 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

An aspen, 7 ins. diam., bears N. 26° W., 22 lks.
dist., mkd. T34S R7W S31 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

T34S R7W
S31|S32
S6 |S5
T35S R7W
1972

from which

An aspen, 8 ins. diam., bears S. 33° E., 6 lks.
dist., mkd. T35S R7W S5 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on SW. slope of hill. In thick pine
and aspen growth.

T. 36 S., R. 7 W., Salt Lake Meridian, Utah

Township 36 South, Range 7 West, Salt Lake Meridian, is
located within the Dixie National Forest. The following
corners were established by Shadrach M. Richardson in
1884.

At the ¼ sec. cor. of secs. 35 and 36, marked with a sand-
stone, 16x10x10 ins., firmly set and dimly mkd. ¼ on W.
face.

from which the original bearing trees:

A yellow pine, 17 ins. diam., bears N. 45° E.,
18 lks. dist., mkd. ¼ S BT. (Record, N. 45° E.,
11 lks.)

A yellow pine, 24 ins. diam., bears S. 45° W.,
9 lks. dist., mkd. ¼ S BT. (Record, S. 45° E.,
6 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to brass
cap mkd.

T36S R7W
¼
S35|S36
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on W. slope of hill, 12 lks. dist.
W. of 5 strand fence line that bears N. and S. In pine
and juniper growth.

At the cor. of secs. 25, 26, 35 and 36, marked with a
sandstone, 16x14x9 ins., firmly set and plainly mkd. with
1 notch on the S. and E. edges.

Remonumentation of Corners in
T. 36 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

from which the original bearing trees:

A yellow pine, 20 ins. diam., bears N. 45° E.,
19 lks. dist., mkd. T36S R7E S25 BT. (Record, 14
lks.)

A yellow pine, 28 ins. diam., bears S. 6° E., 58
lks. dist., mkd. T36S R7W S36 BT. (Record, 40 lks.)

A cedar, 12 ins. diam., bears N. 45° W., 45 lks.
dist., mkd. T36S R7W S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in
the ground to bedrock, with brass cap mkd.

T36S R7W
S26|S25
S35|S36
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located on S. slope of hill. In pine and
juniper growth.

At the ¼ sec. cor. of secs. 25 and 36, marked with a sand-
stone, 14x10x5 ins., firmly set and plainly mkd. ¼ on N.
face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T36S R7W
¼ S25
S36
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SW. slope and one 5 strand
fence line that bears E. and W. In sagebrush clearing.

At the ¼ sec. cor. of secs. 25 and 36, marked with a
sandstone, 16x10x7 ins., firmly set and plainly mkd. ¼
on W. face.

from which the original bearing trees:

A yellow pine, 28 ins. diam., bears East 6 lks.
dist., mkd. ¼ S BT.

A yellow pine, 17 ins. diam., bears S. 41° W.,
27 lks. dist., mkd. ¼ S BT. (Record, S. 60° W.,
15 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Remonumentation of Corners in

T36S R7W

CHAINS

T36S R7W

 $\frac{1}{4}$

S26|S25

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is located on NE. slope of small hill. In scattered pine and juniper growth.

Point for the cor. of secs. 23, 24, 25 and 26, determined from the record course and distance of an original bearing tree:

A pine, 8 ins. diam., bears S. 20° E., 35 lks. dist., mkd. T36S R7W S25 BT.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T36S R7W

S23|S24

S26|S25

1972

Set a steel fence post alongside the cor.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on top of broken spur projecting S. In lightly scattered pine and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, marked with a limestone, 16x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

A yellow pine, 14 ins. diam., bears S. 75° W., 30 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 80° W., 25 lks.)

A yellow pine, 14 ins. diam., bears N. 75° W., 30 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 80° W., 20 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T36S R7W

 $\frac{1}{4}$ $\frac{S24}{S25}$

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep NW. slope of hill. In pine, fir and juniper growth.

Remonumentation of Corners in

T36S R7W S16

CHAINS

At the cor. of secs. 26, 27, 34 and 35, marked with a limestone, 16x12x10 ins., firmly set and plainly mkd. with 2 notches on the E. and 1 on the S. edges.

from which the original bearing trees:

A yellow pine, 18 ins. diam., bears N. 78° E., 43 lks. dist., mkd. T36S R7W S26 BT. (Record, N. 60° E., 35 lks.)

A yellow pine, 16 ins. diam., bears S. 31½° E., 137 lks. dist., mkd. T36S R7W S35 BT. (Record, S. 31½° E., 200 lks.)

A yellow pine, 14 ins. diam., bears S. 26° W., 200 lks. dist., mkd. T36S R7W S34 BT. (Record, S. 26° W., 230 lks. dist.)

A yellow pine, 12 ins. diam., bears N. 56° W., 48 lks. dist. mkd. T36S R7W S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T36S R7W
 S27 | S26
 S34 | S35
 1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep E. slope of draw that drains S. In scattered pine and juniper growth.

At the ¼ sec. cor. of secs. 26 and 35, marked with an old mound of stone.

from which the original bearing trees:

A spruce, 10 ins. diam., bears S. 32° W., 63 lks. dist., mkd. ¼ S BT. (Record, S. 70° W., 63 lks.)

A pine, 12 ins. diam., bears N. 50° W., 100 lks. dist., mkd. ¼ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd.

T36S R7W
 ¼ S26
 S35
 1972

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on top of low ridge that bears N. 50° W. and S. 50° E. In pine, juniper, fir and spruce growth.

At the cor. of secs. 22, 23, 26 and 27, marked with a broken limestone, 20x12x10 ins., firmly set and dimly mkd. with 2 notches on the S. and E. edges.

Remonumentation of Corners in
T. 36 S. R. 7 W. Salt Lake Meridian Utah

CHAINS

from which an original bearing tree:

A yellow pine stump, 36 ins. diam., bears S. 60°
W., 35 lks. dist., mkd. T36S R7W S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 3½ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T36S R7W
S22|S23
S27|S26
1972

from which

A yellow pine, 14 ins. diam., bears N. 62° E.,
105 lks. dist., mkd. T36S R7W S23 BT.

A yellow pine, 16 ins. diam., bears S. 58° E.,
107 lks. dist., mkd. T36S R7W S26 BT.

A yellow pine, 8 ins. diam., bears S. 78° W.,
70 lks. dist., mkd. S27 BT.

A yellow pine, 12 ins. diam., bears N. 20° W.,
21 lks. dist., mkd. T36S R7W S22 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located in small draw that drains E. In
thick pine growth.

At the ¼ sec. cor. of secs. 23 and 26, marked with a lime-
stone, 14x12x6 ins., firmly set and plainly mkd. ¼ on
N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to brass
cap mkd.

T36S R7W
¼ S23
S26
1972

from which

A yellow pine, 20 ins. diam., bears N. 20½° E.,
91 lks. dist., mkd. T36S R7W ¼ S23 BT.

A yellow pine, 26 ins. diam., bears S. 70° E.,
29 lks. dist., mkd. T36S R7W ¼ S26 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on N. slope of small draw that drains
E. In thick pine and fir growth.

At the cor. of secs. 27, 28, 33 and 34, marked with a
sandstone, 24x18x10 ins., firmly set and dimly mkd. with
3 notches on the E. and 1 on the S. edges.

Remonumentation of Corners in
T. 36 S. R. 7 W. Salt Lake Meridian Utah

CHAINS

from which the original bearing trees:

A yellow pine, 20 ins. diam., bears S. 24° E.,
124 lks. dist., mkd. T36S R7W S34 BT. (Record,
S. 20° E., 104 lks.)

A yellow pine, 30 ins. diam., bears S. 45° W.,
100 lks. dist., mkd. T36S R7W S33 BT.

A yellow pine, 24 ins. diam., bears N. 70° W.,
61 lks. dist., mkd. T36S R7W S28 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T36S R7W
S28 | S27
S33 | S34
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on SE. slope of hill. In pine and
juniper growth.

At the ¼ sec. cor. of secs. 4 and 5, located in Panguitch
Lake and marked with a volcanic stone, 15x12x10 ins.,
firmly set and plainly mkd. ¼ on W. face. This cor. is
accessible only when water is at extremely low stages.
Therefore: 3.00 chs. dist. South and on line between
this cor. and the cor. of secs. 4, 5, 6 and 9, point
selected for the witness ¼ sec. cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T36S R7W
¼
WC
S5 | S4
|
1972

This cor. is located at high water mark on the S. shore
of Panguitch Lake, in 5 strand fence line that bears N.
81° W. and S. 81° E. No timber.

At the cor. of secs. 5, 6, 7 and 8, marked with a lava
stone, 18x8x8 ins., firmly set and plainly mkd. with 5
notches on the S. and E. edges.

from which the original bearing trees:

A yellow pine, 20 ins. diam., bears N. 35° E., 132
lks. dist., mkd. T36S R7W S5 BT. (Record, S. 35°
E., 90 lks.)

A yellow pine, 30 ins. diam., bears S. 77° 30' E.,
142 lks. dist., mkd. T36S R7W S8 BT. (Record, S.
77½° E., 100 lks.)

A yellow pine, 26 ins. diam., bears S. 35° W.,
71 lks. dist., mkd. T36S R7W S6 BT. (Record, S. 35°
W., 60 lks. dist.)

Remonumentation of Corners in
T. 36 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T36S R7W
S6|S5
S7|S8
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on S. slope of hill. In pine and juniper growth.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked with a volcanic stone, 14x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which an original bearing tree:

A pine, 14 ins. diam., bears S. 15° W., 43 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 11° W., 30 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R7W
 $\frac{1}{4}$
S6|S5
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on NE. slope of hill. In thick pine, aspen and fir growth.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked with a sandstone, 20x10x6 ins., firmly set and plainly mkd. with 5 notches on the W., 1 on the E. and CC on S. face.

from which the original bearing trees:

A cedar stump, 10 ins. diam., bears S. 11° E., 190 lks. dist., mkd. T36S R7W S1 BT. (Record, S. 11° E., 120 lks.)

A pinon pine, 17 ins. diam., bears S. 31° W., 170 lks. dist., mkd. T36S R7W S2 BT. (Record, S. 31° W., 125 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

Remonumentation of Corners in
T. 36 S. R. 7 W. Salt Lake Meridian, Utah

CHAINS

T35S R7W

S36

S2 | S1

CC

T36S R7W

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on S. slope of hill. In scattered pine and juniper growth.

T. 37 S., R. 7 W., Salt Lake Meridian, Utah

Township 37 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by R. E. L. Collier and Alfred B. Lewis in 1895 and 1897.

At the $\frac{1}{4}$ sec. cor. of secs. 35 and 36, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A yellow pine, 24 ins. diam., bears S. 74° E.,
47 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

A yellow pine, 20 ins. diam., bears S. 40° 45' W.,
17 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T37S R7W

 $\frac{1}{4}$

S35|S36

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on SE. slope of hill. In scattered pine and juniper growth.

At the cor. of secs. 25, 26, 35 and 36, marked with a volcanic stone, 18x12x8 ins., firmly set and plainly mkd. with 1 notch on the S. and E. edges.

from which an original bearing tree:

A yellow pine, 40 ins. diam., bears N. 27° 30' E.,
62 lks. dist., mkd. T37S R7W S25 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W

S26|S25

S35|S36

1972

from which

Remonumentation of Corners in
T. 37 S. R. 7 W. Salt Lake

CHAINS

A yellow pine, 18 ins. diam., bears S. 6° E.,
38 lks. dist., mkd. T37S R7W S36 BT.

A yellow pine, 14 ins. diam., bears S. 79° W.,
25 lks. dist., mkd. T37S R7W S35 BT.

A yellow pine, 20 ins. diam., bears N. 4° W.,
70 lks. dist., mkd. T37S R7W S26 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, W. of
cor.

The cor. is located on rolling land. In scattered pine
growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked with a
sandstone, 14x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on
N. face.

from which the original bearing trees:

A yellow pine, 18 ins. diam., bears North,
5 lks. dist., mkd. $\frac{1}{4}$ S BT.

A yellow pine, 26 ins. diam., bears S. 4° W.,
48 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T37S R7W
 $\frac{1}{4}$ $\frac{S25}{S36}$
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on NE. slope of hill. In thick pine
and aspen growth.

At the cor. of secs. 23, 24, 25 and 26, marked with a
volcanic stone, 18x12x6 ins., firmly set and plainly mkd.
with 2 notches on the S. and 1 on the E. edges.

from which the original bearing tree:

A yellow pine stump, 4 ft. high, 40 lks. in diam.,
bears S. 28° W., 46 lks. dist., mkd. T37S R7W S26
BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground to bedrock, with brass cap mkd.

T37S R7W
 $\frac{S23|S24}{S26|S25}$
1972

Remonumentation of Corners in
T. 37 S. R. 7 W. Salt Lake Meridian, Utah

CHAINS

from which

A yellow pine, 12 ins. diam., bears N. 88° E.,
17 lks. dist., mkd. T37S R7W S24 BT.

A yellow pine, 12 ins. diam., bears N. 67° W.,
38 lks. dist., mkd. T37S R7W S23 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of
cor.

The cor. is located on gentle rolling mountain top. 75
lks. dist. S. of dirt road that bears E. and W. In scat-
tered pine growth.

At the ¼ sec. cor. of secs. 24 and 25, marked with a vol-
canic stone, 16x8x6 ins., firmly set and plainly mkd. ¼
on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to bedrock, with brass cap mkd.

T37S R7W
¼ $\frac{S24}{S25}$
1972

from which

A yellow pine, 14 ins. diam., bears N. 12° E.,
57 lks. dist., mkd. T37S R7W ¼ S24 BT.

A yellow pine, 12 ins. diam., bears S. 48° E.,
77 lks. dist., mkd. T37S R7W ¼ S25 BT.

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the
iron post.

The cor. is located on gentle rolling mountain top. In
thick pine growth.

At the ¼ sec. cor. of secs. 23 and 24, marked with a sand-
stone, 14x10x6 ins., firmly set and plainly mkd. ¼ on W.
face.

from which an original bearing tree:

A yellow pine, 20 ins. diam., bears N. 40° E.,
81 lks. dist., mkd. ¼ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T37S R7W
¼
S23|S24
1972

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

from which

A yellow pine, 20 ins. diam., bears S. 51° W.,
41 lks. dist., mkd. T37S R7W $\frac{1}{4}$ S23 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope. In thick pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, marked with a volcanic stone, 16x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A pine stump, 32 ins. diam., bears N. 79° 30' E.,
70 lks. dist., mkd. $\frac{1}{4}$ S BT.

A yellow pine, 32 ins. diam., bears S. 40° 45' W.,
118 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T37S R7W

$\frac{1}{4}$
S34|S35
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on rolling mountainous land. In thick pine growth.

At the cor. of secs. 26, 27, 34 and 35, marked with a volcanic stone, 16x10x6 ins., firmly set and plainly mkd. with 1 notch on the S. and 2 on the E. edges.

from which the original bearing trees:

A yellow pine, 12 ins. diam., bears N. 28° E.,
186 lks. dist., mkd. T37S R7W S26 BT.

A yellow pine, (dead on ground) bears S. 61° E.,
201 lks. dist., mkd. T37S R7W S35 BT.

A yellow pine, 12 ins. diam., bears S. 43° W.,
187 lks. dist., mkd. T37S R7W S34 BT.

A yellow pine, 24 ins. diam., bears N. 47° 30' W.,
200 lks. dist., mkd. T37S R7W S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T37S R7W

S27|S26
S34|S35
1972

Remonumentation of Corners in
T. 37 S. R. 7 W., Salt Lake Meridian. Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on rocky N. slope. In thick pine growth.

At the ¼ sec. cor. of secs. 26 and 35, marked with a volcanic stone, 16x10x8 ins., firmly set and plainly mkd. ¼ on N. face.

from which the original bearing trees:

A yellow pine, 20 ins. diam., bears N. 57° E.,
138 lks. dist., mkd. ¼ S BT.

A yellow pine, 17 ins. diam., bears S. 30° W.,
68 lks. dist., mkd. ¼ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, with brass cap mkd.

T37S R7W
¼ $\frac{S26}{S35}$
1972

Raise a mound of stone, 3½ ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located in small draw that drains E. In thick pine growth.

At the ¼ sec. cor. of secs. 26 and 27, marked with a volcanic stone, 14x12x5 ins., firmly set and plainly mkd. ¼ on W. face.

from which an original bearing tree:

A yellow pine, 20 ins. diam., bears S. 69° E.,
57 lks. dist., mkd. ¼ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W
¼
S27|S26
1972

from which

A yellow pine, 15 ins. diam., bears N. 77° W.,
16 lks. dist., mkd. ¼ S27 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on rolling mountainous land. In thick pine growth.

Remonumentation of Corners in
T. 37 S., R. 7 W., ~~Secs. 22, 23, 26 and 27~~

CHAINS

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edges.

from which the original bearing trees:

A yellow pine, 24 ins. diam., bears N. 15° 45' E.,
177 lks. dist., mkd. T37S R7W S23 BT.

A yellow pine, 30 ins. diam., bears S. 37° E.,
50 lks. dist., mkd. T37S R7W S26 BT.

A yellow pine, 36 ins. diam., bears S. 29° 30' W.,
111 lks. dist., mkd. T37S R7W S27 BT.

A yellow pine, 30 ins. diam., bears N. 17° W.,
181 lks. dist., mkd. T37S R7W S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground to bedrock, with brass cap mkd.

T37S R7W
S22|S23
S27|S26
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 ft. high, W. of
cor.

The cor. is located on gentle N. slope. In thick pine
growth.

At the ¼ sec. cor. of secs. 23 and 26, marked with a vol-
canic stone, 20x12x10 ins., firmly set and plainly mkd.
¼ on N. face.

from which an original bearing tree:

A yellow pine, 20 ins. diam., bears N. 27° E.,
20 lks. dist., mkd. ¼ S BT. (Record, N. 20° E.,
30 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock and in a collar of stone to
brass cap mkd.

T37S R7W
¼ S23
S26
1972

from which

A yellow pine, 8 ins. diam., bears S. 37° W.,
12 lks. dist., mkd. ¼ S26 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of
cor.

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

The cor. is located on gentle rolling mountain top. In thick pine growth.

At the 1/4 sec. cor. of secs. 22 and 23, marked with a limestone, 12x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W
1/4
S22|S23
1972

from which

A yellow pine, 10 ins. diam., bears S. 52° E., 40 lks. dist., mkd. 1/4 S23 BT.

A yellow pine, 8 ins. diam., bears N. 63° W., 27 lks. dist., mkd. 1/4 S22 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

The cor. is located on gentle rolling mountain top. In thick pine growth.

At the 1/4 sec. cor. of secs. 33 and 34, marked with a volcanic stone, 14x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

from which

A yellow pine, 20 ins. diam., bears S. 70° W., 45 lks. dist., mkd. 1/4 S33 BT. (Record, S. 60° W., 40 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to brass cap mkd.

T37S R7W
1/4
S33|S34
1972

Deposit the original cor. stone in mound alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

The cor. is located on NW. slope of hill. In thick pine growth.

At the cor. of secs. 27, 28, 33 and 34, marked with a volcanic stone, 18x12x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edges.

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W
S28|S27
S33|S34
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on nearly level grassy clearing.

At the ¼ sec. cor. of secs. 27 and 34, marked with a volcanic stone, 18x12x6 ins., firmly set and plainly mkd. ¼ on N. face.

from which the original bearing trees:

A pine stump, 3 ft. high, 36 ins. diam., bears
S. 25° W., 44 lks. dist., mkd. ¼ S BT. (Record,
S. 15° W., 44 lks.)

A pine, 36 ins. diam., bears N. 25° E., 62 lks.
dist., mkd. ¼ S BT. (Record, N. 15° E., 62 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T37S R7W
¼ S27
S34
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on NW. slope of hill. At E. edge of logging road that bears N. and S. In thick pine and aspen growth.

At the ¼ sec. cor. of secs. 27 and 28, marked with a sandstone, 20x10x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T37S R7W
¼
S28|S27
1972

from which

A yellow pine, 18 ins. diam., bears N. 66° E.,
58 lks. dist., mkd. ¼ S27 BT.

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian. Utah

CHAINS

A yellow pine, 10 ins. diam., bears N. 88° W.,
46 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling mountain land. In scattered pine growth.

At the cor. of secs. 21, 22, 27 and 28, marked with a broken limestone, 16x12x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 2 on the S. edges.

from which an original bearing tree:

A yellow pine (dead), 24 ins. diam., bears S. 62°
W., 118 lks. dist., mkd. T37S R7W S28 BT. (Record,
S. 22° W., 118 lks.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T37S R7W
S21|S22
S28|S27
1972

from which

An aspen, 14 ins. diam., bears N. 78° E., 49
lks. dist., mkd. T37S R7W S22 BT.

An aspen, 12 ins. diam., bears S. 5° E., 54
lks. dist., mkd. T37S R7W S27 BT.

An aspen, 8 ins. diam., bears N. 50° W., 36
lks. dist., mkd. T37S R7W S21 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle N. slope. In thick pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked with a volcanic stone, 14x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which an original bearing tree:

A yellow pine, 24 ins. diam., bears N. 75° E.,
61 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T37S R7W
 $\frac{1}{4}$
S21|S22
1972

from which

Remonumentation of Corners in
T. 37 S. R. 7 W. Salt Lake County, Utah

CHAINS

A yellow pine, 10 ins. diam., bears S. 87° W.,
24 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of
cor.

The cor. is located on nearly level land. In thick pine
growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a
sandstone, 12x8x6 ins., firmly set and dimly mkd. with 4
notches on the E. and 1 on the S. edges.

from which the original bearing trees:

A pine, (dead), 14 ins. diam., bears N. 70° 45' E.,
152 lks. dist., mkd. T37S R7W S28 BT.

A yellow pine, 16 ins. diam., bears S. 20° E.,
105 lks. dist., mkd. T37S R7W S33 BT.

A yellow pine (dead), 30 ins. diam., bears S. 62°
45' W., 91 lks. dist., mkd. T37S R7W S32 BT.

A pine (dead), 20 ins. diam., bears N. 18° 45' W.,
192 lks. dist., mkd. T37S R7W S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T37S R7W
S29|S28
S32|S33
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located near top of ridge that bears N. 30°
W. and S. 30° E. In thick pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, marked with a lime-
stone, 14x10x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N.
face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T37S R7W
S28
 $\frac{1}{4}$ S33
1972

from which

A yellow pine, 18 ins. diam., bears S. 76° W.,
40 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A yellow pine, 18 ins. diam., bears N. 34° W.,
59 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle rolling land. In thick pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, marked with a volcanic stone, 14x10x8 ins., firmly set and dimly mkd. $\frac{1}{4}$ on W. face.

from which an original bearing tree:

An aspen, 14 ins. diam., bears S. 83° E., 31 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 10 $\frac{1}{2}$ ° W., 31 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T37S R7W

$\frac{1}{4}$
S29|S28
1972

from which

An aspen, 6 ins. diam., bears N. 50° W., 6 lks. dist., mkd. T37S R7W $\frac{1}{4}$ S29 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on rolling mountainous land. 80 lks. dist. N. and 60 lks. dist. E. of old lava flow. In scattered pine and aspen growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a volcanic stone, 14x8x7 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the S. edges.

from which the original bearing trees:

An aspen (dead), 10 ins. diam., bears N. 41° E., 95 lks. dist., mkd. T37S R7W S21 BT.

A yellow pine, 20 ins. diam., bears S. 13° E., 123 lks. dist., mkd. T37S R7W S28 BT.

A yellow pine, 18 ins. diam., bears S. 62° W., 54 lks. dist., mkd. T37S R7W S29 BT.

A yellow pine, 30 ins. diam., bears N. 57° W., 184 lks. dist., mkd. T37S R7W S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W
S20|S21
S29|S28
1972

Remonumentation of Corners in
T. 37 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is located on NE. slope of hill. In thick pine and aspen growth.

T. 35 S., R. 8 W., Salt Lake Meridian, Utah

Township 35 South, Range 8 West, Salt Lake Meridian, is located within the Dixie National Forest. The following cor. was established by Andrew J. Stewart Jr. in 1883, retraced by Washington Jenkins in 1898 and retraced by Mayhew H. Dalley in 1908.

At the standard $\frac{1}{4}$ sec. cor. of sec. 32, on the S. bdy. of the Tp., marked with a lava stone, 16x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ SC on N. face.

from which the original bearing trees:

An aspen, 14 ins. diam., bears N. 51° 30' E., 87 lks. dist., mkd. SC $\frac{1}{4}$ S32 BT. (Record, N. 51° 30' W.)

A spruce, 14 ins. diam., bears N. 69° W., 96 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T35S R8W
 $\frac{1}{4}$ S32
T36S R8W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located in grassy clearing on top of ridge that bears N. 45° E. and S. 45° W. 72 lks. dist. E. of dirt road that bears N. 45° E. and S. 45° W. In thick pine growth.

T. 36 S., R. 8 W., Salt Lake Meridian, Utah

Township 36 South, Range 8 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Jenkins and West in 1908 and portions by Elliot Bird in 1927.

At the cor. of secs. 1, 2, 11 and 12, marked with a volcanic stone, 20x12x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edges.

from which the original bearing trees:

An aspen, 14 ins. diam., bears N. 3° E., 151 lks. dist., mkd. T36S R8W S1 BT.

Remonumentation of Corners in
T. 36 S., R. 8 W., Salt Lake Meridian, Utah

CHAINS

An aspen, 10 ins. diam., bears S. 15° E., 104 lks.
dist., mkd. T36S R8W S12 BT.

An aspen, 14 ins. diam., bears S. 29° W., 121 lks.
dist., mkd. T36S R8W S2 BT. (Record, S. 33° 30'
W., 77 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

T36S R8W
S2 | S1
S11 | S12
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located in nearly level clearing, surrounded
by aspen and pine growth.

At the ¼ sec. cor. of secs. 26 and 27, marked with a vol-
canic stone, 16x8x4 ins., firmly set and plainly mkd. ¼
on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T36S R8W
¼
S27 | S26
1972

from which

An aspen, 8 ins. diam., bears S. 81° E., 11 lks.
dist., mkd. T36S R8W ¼ S26 BT.

An aspen, 7 ins. diam., bears N. 46° W., 56 lks.
dist., mkd. T36S R8W ¼ S27 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, W. of
cor.

The cor. is located on rolling mountainous land. In
pine, aspen and fir growth.

At the ¼ sec. cor. of secs. 2 and 11, marked with a vol-
canic stone, 16x8x6 ins., firmly set and plainly mkd. ¼
on N. face.

from which the original bearing trees:

An aspen, 14 ins. diam., bears N. 12° E., 39 lks.
dist., mkd. ¼ S2 BT. (Record, N. 42° E. 39 lks.)

An aspen, 12 ins. diam., bears S. 57° E., 61 lks.
dist., mkd. ¼ S BT.

At the cor. point

Remonumentation of Corners in
T. 36 S. R. 8 W. Salt Lake County, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins in the ground, with brass cap mkd.

T36S R8W

$$\frac{1}{4} \frac{S2}{S11}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on S. slope of hill. 7 lks. dist. S. of netwire fence line that bears E. and W. In thick pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, marked with a lava stone, 12x7x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the original bearing trees:

An aspen, 16 ins. diam., bears N. $43^{\circ} 30$ E.,
77 lks. dist., mkd. $\frac{1}{4}$ S BT.

An aspen, 30 ins. diam., bears S. 40° W., 104 lks.
dist., mkd. $\frac{1}{4}$ S34 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

$$\frac{1}{4} \frac{S27}{S34}$$

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located in small sagebrush clearing, surrounded by aspen and pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked with a volcanic stone, 16x8x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

$$\frac{1}{4} \frac{S21|S22}{1972}$$

1972

from which

An aspen, 7 ins. diam., bears N. 56° E., 58 lks.
dist., mkd. T36S R8W $\frac{1}{4}$ S22 BT.

An aspen, 8 ins. diam., bears S. 29° W., 39 lks.
dist. mkd. T36S R8W $\frac{1}{4}$ S21 BT.

Remonumentation of Corners in
T. 36 S. R. 8 W. Salt Lake

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on rolling mountainous land. In thick pine, aspen and fir growth.

At the ¼ sec. cor. of secs. 20 and 21, marked with a lava stone, 16x8x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

¼
S20|S21
1972

from which

An aspen, 8 ins. diam., bears N. 65° E., 101 lks. dist., mkd. T36S R8W ¼ S21 BT.

A spruce, 6 ins. diam., bears S. 73° W., 28 lks. dist., mkd. ¼ S20 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

The cor. is located on gentle E. slope. In thick pine and aspen growth.

At the cor. of secs. 16, 17, 20 and 21, marked with a volcanic stone, 12x7x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 3 on the S. edges.

from which the original bearing trees:

An aspen, 14 ins. diam., bears S. 12° W., 110 lks. dist., mkd. T36S R8W S20 BT.

An aspen, 10 ins. diam., bears N. 33° W., 128 lks. dist., mkd. T36S R8W S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

S17|S16
S20|S21
1972

from which

An aspen, 5 ins. diam., bears N. 28° E., 55 lks. dist., mkd. S16 BT.

An aspen, 10 ins. diam., bears S. 50° E., 66 lks. dist., mkd. T36S R8W S21 BT.

Remonumentation of Corners in
T. 36 S. R. 8 W. Salt Lake Meridian

CHAINS

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

The cor. is located on S. slope of small draw that drains S. 75° E. In thick pine and aspen growth.

At the ¼ sec. cor. of secs. 16 and 17, marked with a volcanic stone, 16x8x8 ins., firmly set and dimly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

¼

S17|S16

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is located on SW. slope. In grassy clearing surrounded by aspen and pine growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a volcanic stone, 20x10x10 ins., firmly set and plainly mkd. with 4 notches on the S. and E. edges.

from which the original bearing trees:

An aspen, 10 ins. diam., bears N. 8° E., 80 lks. dist., mkd. T36S R8W S9 BT.

An aspen, 6 ins. diam., bears S. 17° E., 83 lks. dist., mkd. T36S R8W S16 BT. (Record, S. 27° E.)

An aspen, 8 ins. diam., bears S. 30° W., 73 lks. dist., mkd. T36S R8W S17 BT.

An aspen, 8 ins. diam., bears N. 40° W., 110 lks. dist., mkd. T36S R8W S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

S8 |S9

S17|S16

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

The cor. is located on gentle E. slope. In thick pine and aspen growth.

Remonumentation of Corners in

T36S R8W, Salt Lake Mountain, Utah

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked with a volcanic stone, 12x7x6, firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A spruce, 36 ins. diam., bears N. 23° E., 23 lks. dist., mkd. $\frac{1}{4}$ S BT.

A balsam, 14 ins. diam., bears N. 47° W., 38 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T36S R8W

$\frac{1}{4}$

S8 | S9

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle S. slope. In scattered fir and spruce growth.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, marked with a volcanic stone, 16x7x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which an original bearing tree:

An aspen, 8 ins. diam., bears N. 67° W., 36 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

$\frac{1}{4}$ S20

S29

1972

from which

An aspen, 5 ins. diam., bears S. 58° E., 10 lks. dist., mkd. T36S R8W $\frac{1}{4}$ S29 BT.

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located on gentle S. slope. In thick aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 20, marked with a volcanic stone, 20x6x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Remonumentation of Corners in
T. 36 S., R. 8 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

T36S R8W

¼

S19|S20

1972

from which

A spruce, 20 ins. diam., bears S. 34° E., 94 lks. dist., mkd. T36S R8W ¼ S20 BT.

An aspen, 6 ins. diam., bears S. 76° W., 56 lks. dist., mkd. T36S R8W ¼ S19 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located in small grassy clearing, surrounded by spruce and aspen growth.

At the cor. of secs. 17, 18, 19 and 20, marked with a volcanic stone, 20x7x5 ins., firmly set and plainly mkd. with 5 notches on the E. and 3 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W

S18|S17

S19|S20

1972

from which

A spruce, 15 ins. diam., bears N. 40° W., 151 lks. dist., mkd. T36S R8W S18 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located in grassy clearing, surrounded by aspen and spruce growth.

At the ¼ sec. cor. of secs. 8 and 17, marked with a volcanic stone, 16x6x6 ins., firmly set and dimly mkd. ¼ on N. face.

from which an original bearing tree:

A balsam stump, 3 ft. high, 16 ins. diam., bears N. 10° W., 4 lks. dist., with faint scribe mks.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T36S R8W

S8

¼
S17

1972

Remonumentation of Corners in
T. 36S. R. 8W. S. 5, 6, 7 and 8, Sec. 5, T. 36S. R. 8W. S. 5, 6, 7 and 8, Sec. 5

CHAINS

from which

An aspen, 10 ins. diam., bears S. 40° E., 34 lks.
dist., mkd. T36S R8W ¼ S17 BT.

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle W. slope. In thick pine and aspen growth.

At the cor. of secs. 5, 6, 7 and 8, marked with a trachyte stone, 15x10x4 ins., firmly set and plainly mkd. with 5 notches on the S. and E. edges.

from which the original bearing trees:

An aspen, 12 ins. diam., bears N. 27° E., 70 lks.
dist., mkd. T36S R8W S5 BT.

An aspen, 12 ins. diam., bears S. 35° E., 127 lks.
dist., mkd. T36S R8W S8 BT.

A balsam, 20 ins. diam., bears S. 19° W., 129 lks.
dist., mkd. T36S R8W S7 BT.

An aspen, 12 ins. diam., bears N. 51° W., 22 lks.
dist., mkd. T36S R8W S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R8W
S6|S5
S7|S8
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is located on E. slope of hill. In thick pine and aspen growth.

At the ¼ sec. cor. of secs. 5 and 8, marked with a volcanic stone, 14x8x8 ins., firmly set and plainly mkd. ¼ on N. face.

from which the original bearing trees:

An aspen, 9 ins. diam., bears S. 51° W., 14 lks.
dist., mkd. ¼ S BT. (Record, S. 40° W., 14 lks.)

An aspen, 7 ins. diam., bears N. 29° W., 20 lks.
dist., mkd. ¼ S BT. (Record, N. 45° W., 23 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

Re monumentation of Corners in
T. 36 S., R. 8 W., Salt Lake Meridian, Utah

T36S R8W

$\frac{1}{4}$ $\frac{S5}{S8}$

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on steep E. slope of hill. In thick aspen and pine growth.

Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, as determined from the record course and distance of the original bearing trees:

A balsam, 14 ins. diam., bears S. 52° 30' E.,
89 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

A spruce, 20 ins. diam., bears N. 51° W., 177 lks.
dist., mkd. $\frac{1}{4}$ S6 BT.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T36S R8W

$\frac{1}{4}$
S6|S5

1972

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of
cor.

The cor. is located on gentle SW. slope and at E. edge of
dirt road that bears N. and S. In scattered pine and fir
growth.

T. 37 S., R. 14 W., Salt Lake Meridian, Utah

Township 37 South, Range 14 West, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following corners were established by A. J. Stewart in
1873.

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, marked with a sand-
stone, 16x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W.
face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

T37S R14W

$\frac{1}{4}$
S16|S15

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SW. slope. In lightly scat-
tered pinon and juniper growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a gran-
ite stone, 18x12x10 ins., firmly set and plainly mkd.
with 4 notches on the S. and 3 on the E. edges.

Remonumentation of Corners in

T. 37 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS

from which the original bearing trees:

A cedar, 8 ins. diam., bears N. 38° E. 58 lks. dist., mkd. with a blaze. (Record, N. 45° E., 58 lks.)

A cedar, 8 ins. diam., bears S. 60° E., 35 lks. dist., mkd. with a blaze.

A cedar, 12 ins. diam., bears S. 25° W., 57 lks. dist., mkd. with a blaze.

A cedar, 14 ins. diam., bears N. 45° W., 97 lks. dist., mkd. with a blaze.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T37S R14W

S9 | S10

S16 | S15

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3½ ft. base, to brass cap.

The cor. is located on E. slope of hill. In thick pine and juniper growth.

At the ¼ sec. cor. of secs. 9 and 16, marked with a granite stone, 18x12x5 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd.

T37S R14W

¼ S9

S16

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap mkd.

The cor. is located on SW. slope of hill. In scattered pinon and juniper growth.

T. 37 S., R. 16 W., Salt Lake Meridian, Utah

Township 37 South, Range 16 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corners were established by T. C. Bailey in 1881 and retraced by Gentry and Heist in 1911.

At the cor. of secs. 35 and 36, on the S. bdy. of the Tp., marked with a sandstone, 20x20x5 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges.

At the cor. point

Remonumentation of Corners in
T. 37 S. R. 16 W. S. 16 E. Twp. 11 N. R. 16 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R16W
S35|S36
S1
T38S R16W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located on gentle SW. slope. In sagebrush, no timber.

At the cor. of secs. 34 and 35, on the S. bdy. of the Tp., marked with a granite stone, 18x12x6 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R16W
S34|S35
S2
T38S R16W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located on gentle SE. slope. In very lightly scattered juniper growth.

At the ¼ sec. cor. of sec. 34, on the S. bdy. of the Tp., marked with a granite stone, 10x10x6 ins., firmly set and dimly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R16W
¼ S34
T38S R16W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The cor. is located on nearly level sagebrush flat. 70 lks. dist. W. of wash that drains N. and in 4 strand fence line that bears E. and W. No timber.

Remonumentation of Corners in
T. 37 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS

At the cor. of secs. 25, 26, 35 and 36, marked with a granite stone, 19x18x9 ins., firmly set and plainly mkd. with 1 notch on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T37S R16W
S26|S25
S35|S36
1972

Raise a mound of stone, 4 ft. base, to brass cap.

Deposit the original cor. stone in mound alongside the iron post.

The cor. is located on NW. slope of hill. At the cor. of 4 strand fence line projecting N. and W. In sagebrush.

At the cor. of secs. 26, 27, 34 and 35, marked with a sandstone, 16x12x8 ins., firmly set and plainly mkd. with 2 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a collar of stone to brass cap mkd.

T37S R16W
S27|S26
S34|S35
1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on S. slope of hill, at head of draw that drains S. 25° E. In lightly scattered juniper growth.

T. 38 S., R. 16 W., Salt Lake Meridian, Utah

Township 38 South, Range 16 West, Salt Lake Meridian, is located within the Dixie National Forest. The following corners were established by Mayhew H. Dalley in 1899.

At the ¼ sec. cor. of secs. 1 and 2, marked with a trachyte stone, 12x8x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.

T38S R16W
¼
S2|S1
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, to brass cap.

Remonumentation of Corners in
T. 38 S., R. 16 W., Salt Lake Meridian. Nr. 1

CHAINS

The cor. is located on rocky W. slope of hill. On 4 strand fence line that bears N. and S. In very lightly scattered juniper growth.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked with a sandstone, 15x10x4 ins., firmly set and plainly mkd. with 5 notches on the W., 1 on E. and CC on S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R16W
S35
— S2|S1
CC
T38S R16W
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

The cor. is located on gentle SW. slope. 2 lks. dist. S. of cor. of 4 strand fence line projecting W., N. and S. In sage, no timber.

At the ¼ sec. cor. of secs. 2 and 11, marked with a sandstone, 14x12x5 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T38S R16W
S2
¼ — S11
1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on gentle NW. slope of hill. On 4 strand fence line that bears E. and W. In sage and serviceberry growth.

At the closing cor. of secs. 2 and 3, on the N. bdy. of the Tp., marked with a granite stone, 15x10x8 ins., firmly set and plainly mkd. with 4 notches on W., 2 on E. and CC on S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock and in a collar of stone to brass cap mkd.

Remonumentation of Corners in
T. 38 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS

T37S R16W

S34

S3|S2

CC

T38S R16W

1972

Deposit the original cor. stone alongside the iron post.

The cor. is located on gentle SE. slope. At the cor. of 4 strand fence line projecting W., N. and S. In very lightly scattered juniper growth.

T. 36 S., R. 18 W., Salt Lake Meridian, Utah

Township 36 South, Range 18 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by C. L. Ericzon in 1875 and resurveyed by F. T. Roberts in 1909.

At the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., marked with a trachyte stone, 18x12x10 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.

T36S R18W

S33|S34

S4|S3

T37S R18W

1972

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 4 ft. base, to brass cap.

The cor. is located on SE. slope of hill. In scattered pinon and juniper growth.

Blank

Page

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, (I) ~~(We)~~ have remonumented corners in the following townships:

T. 36 S., R. 1 E., T. 33 S., R. 3 E., T. 33 S., R. 4 E., Tps. 31, 32 and 33 S., R. 2 W., Tps. 35 and 36 S., R. 3 W., Tps. 33 and 34 S., R. 4 1/2 W., T. 34 S., R. 5 W., Tps. 34, 36 and 37 S., R. 7 W., Tps. 35 and 36 S., R. 8 W., T. 37 S., R. 14 W., Tps. 37 and 38 S., R. 16 W., and T. 36 S., R. 18 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 23, 1973 (Date)

Ferrel D. Reynolds (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date AUG 22 1974

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the remonumentation of corners in T. 36 S., R. 1 E., T. 33 S., R. 3 E., T. 33 S., R. 4 E., Tps. 31, 32 and 33 S., R. 2 W., Tps. 35 and 36 S., R. 3 W., Tps. 33 and 34 S., R. 4 1/2 W., T. 34 S., R. 5 W., Tps. 34, 36 and 37 S., R. 7 W., Tps. 35 and 36 S., R. 8 W., T. 37 S., R. 14 W., Tps. 37 and 38 S., R. 16 W., and T. 36 S., R. 18 W., of the Salt Lake Meridian, Utah

executed by Ferrel D. Reynolds.

having been critically examined and found correct, are hereby approved.

JUN 25 1976 (Date)

J. J. [Signature] Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in [redacted], is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)