

Volume

#

R0596

Township 39 South, Range 9 East

CHAINS

The ¼ sec. cor. of secs. 35 and 36, monumented with a brass cap, 1 in. diam., will be covered with pile of gravel.

from this point

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 20° E., 88.2 ft. dist., with brass cap mkd. ¼ S36 RM 1977 88.2 ft. and an arrow pointing to the cor.

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 75° E., 85.3 ft. dist., with brass cap mkd. ¼ S36 RM 1977 85.3 ft. and an arrow pointing to the cor.

Reference monuments established by Jerry L. Thomas, Cadastral Surveyor, April 1977.

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

A PORTION OF THE EAST AND SOUTH BOUNDARIES,

AND A PORTION OF THE SUBDIVISIONAL LINES,

OF

TOWNSHIP 18 SOUTH RANGE 7 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Jerry L. Thomas Supervisory Cadastral Surveyor

Under special instructions dated May 6, 19 75, approved May 7, 1975,

_____, which provided for the surveys included under U.S. Survey/Group
Number 559, and assignment instructions dated August 12, 19 75.

Survey commenced September 8, 19 75

Survey completed November 7, 19 75

INDEX DIAGRAM

Township 18 S., Range 7 E.

					32		20	
6	5	4	3	31	2	19	1	
	46	43	39		30		17	
7	45	8	42	9	38	10	29	11
	44	40	37		28		16	12
18	17	16	36	15	27	14	14	13
			35		26		13	13
19	20	21	33	22	25	28	13	24
			32		24		12	12
30	29	28	27	23	26	11	25	25
					20		10	10
31	32	33	34	21	35	8	36	36
			23		22			
			4		3		2	

Township 18 South, Range 7 East, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of a dependent resurvey of the south 3 miles of the east boundary, the east 3 miles of the south boundary and a portion of the subdivisional lines of T. 18 S., R. 7 E., Salt Lake Meridian, Utah.

The east 2 miles of the south boundary and the east boundary were surveyed by A. D. Ferron in 1873. The south 3 miles of the east boundary were resurveyed and a portion of the subdivisional lines surveyed by A. D. Ferron in 1882. The north boundary was surveyed by J. C. Dick in 1900. The south boundary of section 34 and a portion of the subdivisional lines were surveyed, and the south boundary of section 35, the north mile and the south mile of the east boundary, the north boundary of section 2 and a portion of the subdivisional lines were resurveyed or retraced by F. W. Hanson in 1909. The west 3 miles of the south boundary were surveyed and the south boundaries of sections 34 and 35 were retraced by J. W. Dougall in 1911. The west boundary and a portion of the subdivisional lines were surveyed, and the west 4 miles of the north boundary and a portion of the subdivisional lines resurveyed by H. W. Miller and L. E. Bolinger in 1916. The east 2 miles and portions of the south boundaries of sections 32 and 33, T. 17 S., R. 7 E., were resurveyed by J. L. Thomas in 1969. The north 3 miles of the east boundary were resurveyed by G. B. Hatch in 1970.

The resurvey was executed in accordance with specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 559, Utah, dated May 6, 1975.

The direction of the lines of this survey was determined by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey. The vertical angles of measurements made on the slope were ascertained by clinometer in good adjustment; the horizontal equivalents only are entered in the field notes.

Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners, bearing trees and other calls of the field note record. When duly identified the corner positions were remonumented and new bearing objects marked.

The geographic position of the southeast corner of T. 18 S., R. 7 E., as scaled from the quadrangle map, "Castle Dale, Utah," published by the Geological Survey in 1923, is as follows:

Latitude 39°12'22" N. Longitude 111°04'31" W.

The mean magnetic declination is 14°45' E.

Dependent Resurvey of a portion of the
South Boundary of T. 18 S., R. 7 E.,
Salt Lake Meridian, Utah

(Restoring the survey executed by A. D. Ferron in 1873)

Dependent Resurvey of a portion of the South Boundary,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

Beginning at the cor. of Tps. 18 and 19 S., Rs. 7 and 8 E. monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the concurrent resurvey of a portion of the E. Bdy. of T. 19 S., R. 7 E.

N. 89°56' W., bet. secs. 1 and 36.

Over nearly level land, along fence line on N edge of dirt road, bearing E and W.

- 5.81 New Western Ditch, flows S. 55° W.
- 21.40 Cor. of fences, extending N, S and E.
- 21.60 Dirt road, bears N and S; also intersection of road to E, bears S, 25 lks. dist.; thence over gentle rolling land; asc. over gradual SE slope.
- 41.42 Point for the ¼ sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 18 S R 7 E

¼ $\frac{S\ 36}{S\ 1}$

1975

Asc. along gentle S slope.

- 52.00 Wash, 20 lks. wide, 4 ft. deep, drains SE; asc. over E slope.
- 68.00 Rim of bench, bears N and SE; asc. over gentle SE slope.
- 76.00 Top of ascent, slopes SE; desc. over gradual SW slope.
- 82.84 The cor. of secs. 1, 2, 35 and 36, monumented with a sandstone, 25 x 14 x 8 ins., firmly set 12 ins. in the ground, mkd. 1 notch on E and 5 notches on W edge, with scattered mound of stone to W.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E

$\frac{S\ 35}{S\ 2}$ | $\frac{S\ 36}{S\ 1}$

T 19 S

1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post, 5 ft. long, alongside and raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.

Dependent Resurvey of a portion of the South Boundary,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

(Restoring the survey executed by A. D. Ferron in 1873,
the resurvey by F. W. Hanson in 1909,
and the retracement by J. W. Dougall in 1911)

N. 89°59' W., along the S. bdy. of sec. 35.

Desc. over gradual SW slope through scattering shadscale
and native grasses.

- 6.00 Dirt road, bears N. 45° W. and S. 45° E.; asc. over NE
slope.
- 9.10 Rim of narrow mesa, bears NW and SE; asc. over gentle
NE slope.
- 16.70 W rim of mesa, bears N and SE; desc. over N slope.
- 21.00 Bottom of deep draw, drains SE; asc. over E slope
- 27.00 Top of spur, slopes SE; desc. over SW slope.
- 31.00 Bottom of draw, drains SE; asc. over NE slope.
- 38.00 Top of spur, slopes SE; desc. along S slope.
- 40.00 Point selected for the witness $\frac{1}{4}$ sec. cor. of sec. 2,
T. 19 S., R. 7 E.
- Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.
- W C

← $\frac{1}{4}$ S 2

T 19 S R 7 E

1975
- Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, S of
iron post.
- Cor. is located on S slope, 15 lks. N of small wash,
draining SE.
- 40.54 Point for the $\frac{1}{4}$ sec. cor. of sec. 2, at proportionate
bearing and distance, falls in bottom of small wash,
draining SE, where it is impracticable to establish a
permanent monument; there is no remaining evidence of the
original cor.
- Thence, S. 89°40' W., beginning new measurement.
- Asc. along S slope.
- 0.85 Point for the $\frac{1}{4}$ sec. cor. of sec. 35, T. 18 S., R. 7 E.,
hereinafter described in the field notes of the dependent
resurvey of the subdivisional lines of T. 18 S., R. 7 E.
- 8.00 Top of spur, slopes SE; desc. over SW slope.
- 14.00 Small wash in bottom of draw, drains SE; asc. along S
slope.
- 22.00 Small wash, drains SE; asc. over NE slope.
- 38.00 Top of ascent, slopes SE; enter thick juniper and pinon

Dependent Resurvey of a portion of the South Boundary,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS
40.04

The cor. of secs. 2 and 3, T. 19 S., R. 7 E., monumented with a sandstone, 20 x 12 x 10 ins., firmly set 10 ins. in the ground, mkd. 2 notches on the E and 4 notches on the W edge, from which the original bearing trees

A pinon, 8 ins. diam., bears S. 47° E., 32 lks. dist., mkd. T19S R7E S2 BT. (Record, 33 lks.)

A pinon, 12 ins. diam., bears S. 61° W., 39 lks. dist., mkd. T19S R7E S3 BT. (Record, 38 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

$$\begin{array}{c} T\ 18\ S \\ \hline S\ 35 \\ \hline S\ 3 \quad | \quad S\ 2 \\ \quad \quad | \\ T\ 19\ S\ R\ 7\ E \\ 1975 \end{array}$$

Deposit the mkd. stone alongside the iron post.

Set a steel fence post, 66 ins. long, projecting 3 ins. above mound of stone, alongside the iron post.

(Restoring the survey executed by F. W. Hanson in 1909,
and the retracement by J. W. Dougall in 1911)

Thence, N. 89°52' W., beginning new measurement.

Asc. over E slope through thick juniper and pinon timber.

1.10 Point for the closing cor. of secs. 34 and 35, hereinafter described in the field notes of the dependent resurvey of the subdivisional lines in T. 18 S., R. 7 E.

Thence along the S. bdy. of sec. 34.

Asc. over rocky E slope through juniper and pinon timber.

25.00 Edge of clearing, bears N and S; thence through grassy clearing.

35.51 Point for the ¼ sec. cor. of sec. 3 only, on the S. bdy. of the Tp., at proportionate distance, based on the 1909 survey and the 1911 resurvey, as in accordance with the Special Instructions.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \quad S\ 3 \\ \hline T\ 19\ S\ R\ 7\ E \\ 1975 \end{array}$$

Dependent Resurvey of a portion of the South Boundary,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS	Asc. over rocky S slope; enter scattering scrub juniper and pinon timber.
40.22	<p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented with a sandstone, 24 x 15 x 8 ins., firmly set 12 ins. in the ground, mkd. $\frac{1}{4}$ on N face, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon, 16 ins. diam., bears S. 25° W., 40 lks dist., mkd. $\frac{1}{4}$ S BT.</p> <p style="padding-left: 40px;">A pinon, 9 ins. diam., bears N. 35° W., 36 lks. dist., mkd. S34 BT.</p> <p>To properly protect lotting for sections in Tps. 18 and 19 S., R. 7 E., this cor. will now function as an angle point only, and a new $\frac{1}{4}$ sec. cor. of minimum control for sec. 34 will be established.</p> <p>At the angle point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>A P</p> <p>T 18 S R 7 E</p> <hr style="width: 10%; margin: 0 auto;"/> <p>S 34</p> <p>S 3</p> <p>T 19 S</p> <p>1975</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p>
	Thence, N. 89°48' W., beginning new measurement.
	Asc. over rocky E slope through scattering scrub juniper and pinon timber.
0.74	The point for the $\frac{1}{4}$ sec. cor. of sec. 34 only, T. 18 S., R. 7 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines.
10.00	Slope changes; asc. over rocky SE slope.
32.40	Bottom of small wash in bottom of draw, drains SE; asc. over NE slope.
35.17	The closing cor. of secs. 3 and 4, T. 19 S., R. 7 E., monumented with an iron post, 2 ins. diam., projecting 18 ins. above ground, with brass cap mkd. as described in the official record of the 1911 survey of the subdivisional lines of T. 19 S., R. 7 E.
	Asc. over NE clay slope.
39.30	Top of narrow clay spur, slopes SE; thence along S slope.
39.50	The cor. of secs. 33 and 34, T. 18 S., R. 7 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. as described in the official record of the 1911 retracement of a portion of the N. bdy. of T. 19 S., R. 7 E.

Dependent Resurvey of a portion of the East Boundary,
T. 18 S. R. E a

(Restoring the survey executed by A. D. Ferron in 1873,
the resurvey by A. D. Ferron in 1882 and the resurvey by
F. W. Hanson in 1909)

CHAINS

From the cor. of Tps. 18 and 19 S., Rs. 7 and 8 E.

N. 0°33' W., bet. secs. 31 and 36.

Over nearly level land.

- 3.28 New Western Ditch, 20 lks. wide, flows SW.
- 16.00 Base of clay spur, bears E and W; asc. over S slope.
- 20.20 Top of spur, slopes E; desc. over NE slope.
- 31.00 Bottom of draw, drains SE; asc. over S slope.
- 36.00 Top of clay spur, slopes E; desc. over NE slope.
- 39.50 Cor. of barbed wire fences extending SW and N; thence
along fence line.
- 39.88 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, determined
latitudinally by proportionate measurement and longitudi-
nally by a fence line extending N and S.
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S
R 7 E R 8 E
|
 $\frac{1}{4}$
|
S 36 | S 31
|
1975

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

N. 0°25' W., beginning new measurement.

Desc. over NE slope, along fence line extending N and S.

- 8.00 Small wash at bottom of descent, drains E; thence over
nearly level land.
- 20.10 New Western Ditch, 20 lks. wide, flows SE.
- 39.88 The cor. of secs. 25, 30, 31 and 36, at intersection of
barbed wire fences extending E, W and S. This position
is harmoniously related with identified existing original
cors. in the area, and is accepted as the best available
evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the East Boundary,
T. 18 S. R. 7 E. Salt Lake Meridian Utah

CHAINS

T 18 S	
R 7 E R 8 E	
S 25	S 30
S 36	S 31
1975	

(Restoring the survey executed by A. D. Ferron in 1873
and the resurvey by A. D. Ferron in 1882)

N. 0°18' W., bet. secs. 25 and 30.

Enter cultivated land.

- 20.00 Leave farm yard and cultivated land; enter rolling hills; asc. over S slope, along fence line extending N.
- 22.00 New Western Ditch, flows SW.
- 25.00 Top of spur, slopes E; desc. over NE slope.
- 37.00 Cor. of fences, extending S and NW; thence over nearly level land.
- 40.23 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S	
R 7 E R 8 E	
$\frac{1}{4}$	
S 25	S 30
1975	

Cor. is set by cor. of fences, extending E and SW.

Enter cultivated land.

- 50.00 Leave cultivated land; enter slightly broken land.
- 80.00 Top of small spur, slopes E; desc. over gentle N slope.
- 80.46 The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 30 x 20 x 12 ins., firmly set, extending 10 ins. above ground, mkd. 2 notches on S and 4 notches on N edge.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S	
R 7 E R 8 E	
S 24	S 19
S 25	S 30
1975	

Dependent Resurvey of a portion of the East Boundary
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Cor. is set in fence line, projecting E and W.

N. 0°25' W., bet. secs. 19 and 24.

Over gentle rolling land through scattering shadscale and native grasses.

12.00 Begin ascent over SE slope.

18.00 Top of ascent, slopes E; desc. over gradual NE slope.

40.76 Point for the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S
R 7 E R 8 E
|
S 24 | S 19
|
1975

Set a steel fence post, 64 ins. long, projecting 3 ft. above ground, alongside the iron post.

42.90 Cor. of fences, extending N and E; thence along fence line

61.80 Intersection of dirt roads, bearing N, W and SE; thence along E edge of road.

62.20 Cottonwood Creek, 2 chs. wide, flows SE.

78.86 Intersection of State Highway No. 29 and dirt road, bears N. 57°30' W. and S. 57°30' E., and S along section line.

79.58 Cor. of fences, extending N, N. 57°30' W. and S. 57°30' E.; thence along fence line.

81.52 The cor. of secs. 13, 18, 19 and 24, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1970 resurvey of the W. bdy. of T. 18 S., R. 8 E.

Dependent Resurvey of a portion
of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

(Restoring the survey executed by F. W. Hanson in 1909)

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., heretofore described.

N. 0°04' E., bet. secs. 35 and 36.

Asc. over gradual SE slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- 8.00 Top of spur, bears E and W; asc. over SE slope.
- 14.00 Top of spur, slopes SE; desc. over steep NE slope.
- 18.00 Bottom of draw, drains SE; asc. over SW slope; enter scattering juniper and pinon timber.
- 28.00 Spur, slopes SE; asc. over gradual SE slope.
- 39.84 The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a sandstone, 18 x 8 x 6 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on W face, from which the original bearing trees

A juniper, 6 ins. diam., bears S. $51\frac{3}{4}^{\circ}$ E., 34 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

A pinon, 7 ins. diam., bears S. 89° W., 61 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 18 S R 7 E	
$\frac{1}{4}$	
S 35	S 36
1975	

Deposit the mkd. stone alongside the iron post.

N. $0^{\circ}13'$ E., beginning new measurement.

Asc. over gradual SE slope through scattering juniper and pinon timber.

- 9.55 Trail road, bears E and W.
- 30.35 S rim of deep ravine, bears E and W; desc. over steep N slope.
- 38.50 Bottom of ravine, drains E; asc. over S slope.
- 40.12 The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 18 x 10 x 6 ins., firmly set 10 ins. in the ground, dimly mkd. 1 notch on the S and E edge, from which the original bearing trees

A juniper, 6 ins. diam., bears S. $40\frac{1}{2}^{\circ}$ E., 190 lks. dist., mkd. T18S R7E S36 BT.

A pinon, 4 ins. diam., bears S. $58\frac{1}{2}^{\circ}$ W., 128 lks. dist., mkd. T18S R7E S35 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E	
S 26	S 25
S 35	S 36

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meri a

CHAINS

Deposit the mkd. stone alongside the iron post.

Corner is set on S slope, 10 ft. above bottom of ravine.

(Restoring the survey executed by A. D. Ferron in 1882,
and the resurvey by F. W. Hanson in 1909)

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy.
of the Tp., heretofore described.

West, bet. secs. 25 and 36.

Over nearly level land along fence line, extending E
and W.

- 6.40 Western Ditch, flows S; fence line, curves SW.
- 10.40 Fence line, extending N and S.
- 16.00 Base of ascent, bears NW and SE; asc. over NE slope.
- 40.20 NE rim of spur, bears NW and SE; thence along gentle N
slope; enter sparsely scattering juniper and pinon timber.
- 41.01 The $\frac{1}{4}$ sec. cor. of sec. 25, monumented with a grey sand-
stone, 20 x 12 x 4 ins., firmly set 10 ins. in the ground,
mkd. $\frac{1}{2}$ on N face, with a scattering mound of stone to N,
from which the remains of the original bearing tree

A cedar stump, 8 ins. diam., bears S. 57° E., 72
lks. dist. (Record, 68 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 10 ins.
in the ground to bedrock, in a mound of stone, 3½ ft.
base to top, with brass cap mkd.

T 18 S R 7 E

¼ S 25

1975

Deposit the mkd. stone alongside the iron post.

N. 89°45' W., beginning new measurement.

Asc. along gentle N slope, through sparsely scattering
juniper and pinon timber.

- 0.94 Point for the $\frac{1}{4}$ sec. cor. of sec. 36 only, hereinafter
described.
- Begin ascent over NE slope of clay spur.
- 16.25 Top of spur, slopes S. 75° E.; thence along steep S slope.
- 26.00 Begin descent over steep SW slope.
- 30.00 Bottom of draw, drains S; asc. over SE slope.
- 34.00 Spur, slopes S; desc. along S slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS
40.95

cor. of secs. 25, 26, 35 and 36.

the point for the $\frac{1}{4}$ sec. cor. of sec. 36 only, on the
N. bdy. of sec. 36, at proportionate dist., based on the
1909 resurvey of a portion of the subdivisional lines.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T 18 S R 6 E

$\frac{1}{4}$ S 36
1975

From this point, the $\frac{1}{4}$ sec. cor. of sec. 25, bears
S. $89^{\circ}45'$ E., 0.94 chs. dist., heretofore described,
and the cor. of secs. 25, 26, 35 and 36, bears
N. $89^{\circ}45'$ W., 40.01 chs. dist., heretofore described.

N. $0^{\circ}09'$ E., bet. secs. 25 and 26.

Asc. over steep S clay slope.

- 5.80 N rim of ravine, bears E and W; thence along gentle E
slope of bench.
- 21.80 N rim of bench, bears E and W; desc. over steep N slope;
leave juniper and pinon timber.
- 32.00 Base of descent, bears E and W; thence over gentle
rolling land.
- 39.00 Wash, 15 lks. wide, 4 ft. deep, drains N. 80° E.
- 40.28 The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a
sandstone, 18 x 7 x 6 ins., firmly set 9 ins. in the
ground, mkd. $\frac{1}{4}$ on W face and a scattering mound of stone
to W.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$
|
S 26 | S 25
|
1975

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of
cor.

N. $0^{\circ}06'$ E., beginning new measurement.

Asc. gentle E slope, through scattering shadscale and
native grasses.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. W. Salt Lake Meridian a

CHAINS

- 10.00 Begin descent over NE slope.
- 34.00 Wash, 20 lks. wide, 3 ft. deep, drains E; asc. over gradual SE slope.
- 39.98 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 14 x 14 x 6 ins., firmly set 7 ins. in the ground, mkd. 2 notches on S and 1 notch on E edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S	R 7 E
S 23	S 24
S 26	S 25
1975	

Deposit the mkd. stone alongside the iron post.

Set a steel fence post, 64 ins. long, projecting 3 ft. above ground, alongside, and raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

(Restoring the survey executed by A. D. Ferron in 1882)

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., heretofore described.

S. 89°59' W., bet. secs. 24 and 25.

Asc. along gentle N slope of draw through scattering shadscale and native grasses.

- 24.00 Leave draw; thence over nearly level land.
- 32.00 Enter canyon bottom with scattered cottonwood timber.
- 40.58 Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T 18 S	R 7 E
¼ S 24	S 25
1975	

- 40.80 Wash, 10 lks. wide, 3 ft. deep, drains N. 85° E.; asc. over gradual E slope of canyon bottom.
- 54.00 Leave canyon; thence over nearly level land.
- 75.00 Begin ascent over gradual SE slope.
- 81.16 The cor. of secs. 23, 24, 25 and 26.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake County, Utah

CHAINS

(Restoring the survey executed by A. D. Ferron in 1882,
and the retracement by F. W. Hanson in 1909)

N. 0°05' E., bet. secs. 23 and 24.

Asc. over gradual SE slope through scattering shadscale
and native grasses.

- 19.70 Top of clay spur, slopes NE; desc. over NE slope.
- 38.60 New Western Canal, flows SE.
- 40.55 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, at cor. of
barbed wire fences extending E and NW. This position
is harmoniously related to identified original cors.,
and is accepted as the best available evidence of the
original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S R 7 E
 $\frac{1}{4}$
 |
 S 23 | S 24
 |
 1975

N. 0°02' E., beginning new measurement.

Over nearly level land along W end of cultivated land.

- 4.00 Wash, 20 lks. wide, 6 ins. deep, drains E.
- 14.00 Base of spur, bears NE and SW; asc. over SE slope.
- 22.00 Top of spur, slopes E; desc. over N slope into creek
bottom.
- 30.00 Enter creek bottom with scattered cottonwood timber and
thick underbrush.
- 40.44 Point for the cor. of secs. 13, 14, 23 and 24, determined
latitudinally by proportionate measurement and longitudi-
nally by the extension of a fence line to the N, falls
in Cottonwood Creek, 2 chs. wide, flowing SE, where it
is impracticable to establish a permanent monument, there
is no remaining evidence of the original corner.

(Restoring the survey executed by A. D. Ferron in 1882)

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy.
of the Tp., is monumented with an iron post, $2\frac{1}{2}$ ins.
diam., firmly set, projecting 6 ins. above ground, with
brass cap mkd. as described in the official record of
the 1970 resurvey of the W. bdy. of T. 18 S., R. 8 E.

S. 89°33' W., bet. secs. 13 and 24.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian Utah

CHAINS

Over cultivated land.

- 2.99 Fence line, extending N. 57°30' W. and S. 57°30' E.
3.71 State Highway No. 29, bears N. 57°30' W. and S. 57°30' E.
4.43 Fence line, extending N. 57°30' W. and S. 57°30' E.;
enter cultivated land.
40.22 Point for the ¼ sec. cor. of secs. 13 and 24, at propor-
tionate distance; there is no remaining evidence of the
original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S R 7 E

¼ $\frac{S\ 13}{S\ 24}$

1975

from which

A sandstone boulder, 2 x 2 x 1 ft. above ground,
bears N. 75¼° E., 6 lks. dist. to a cross
chiseled 12 ins. above ground near SW cor., mkd.
B + O.

Cor. is set on S edge of cultivated land, 1 ch. N of
Cottonwood Creek.

Enter creek bottom land through thick cottonwood timber.

- 75.00 Cottonwood Creek, 2 chs. wide, flows SE; thence along
creek bottom.
80.44 True point for the cor. of secs. 13, 14, 23 and 24.

(Restoring the survey executed by A. D. Ferron in 1882,
and the retracement by F. W. Hanson in 1909)

N. 0°10' E., bet. secs. 13 and 14.

Over creek bottom land, through thick cottonwood timber
and underbrush.

- 2.10 Leave creek bottom; beginning of fence line extending N.
2.37 Point selected for the witness cor. of secs. 13, 14, 23
and 24.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

W C
T 18 S R 7 E

$\frac{S\ 14}{S\ 23}$ | $\frac{S\ 13}{S\ 24}$



1975

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

Cor. is set in fence line extending N and S.

Along fence line over nearly level land.

- 14.00 State Highway No. 29, bears NW and SE; desc. over gentle NE slope.
- 32.00 Grimes Wash, 30 lks. wide, 2 ft. deep, drains SE; asc. over SW slope.
- 40.32 The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a sandstone, 26 x 10 x 6 ins., firmly set 14 ins. in the ground, mkd. $\frac{1}{4}$ on W face and a mound of stone to the W.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

```

T 18 S R 7 E
  |
   $\frac{1}{4}$ 
  |
S 14 | S 13
  |
  1975

```

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

(Restoring the survey executed by A. D. Ferron in 1882)

N. $0^{\circ}26'$ E., beginning new measurement.

Asc. over SW slope through scattering shadscale, rabbit brush and native grasses.

- 8.00 Top of spur, slopes W; thence along rocky W slope.
- 18.00 Begin descent over NW slope.
- 39.00 Small wash in bottom of draw, drains W; asc. over SE clay slope.
- 40.00 Top of clay spur, slopes W; thence along W slope.
- 40.28 Point for the cor. of secs. 11, 12, 13 and 14, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

```

T 18 S R 7 E
  |
  S 11 | S 12
  S 14 | S 13
  |
  1975

```

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W of cor.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt lake Meridian Utah

CHAINS

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., is monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above mound of stone, 4 ft. base, 1½ ft. high, with brass cap mkd. as described in the official record of the 1970 resurvey of the W. bdy. of T. 18 S., R. 8 E.

S. 89°37' W., bet. secs. 12 and 13.

Asc. over SE slope through scattering juniper and pinon timber.

- 12.00 Top of spur, slopes S; desc. over SW slope.
- 18.00 Bottom of draw, drains S; asc. over steep SE slope.
- 26.00 Top of ridge, slopes S; thence along S slope.
- 33.00 Bottom of small draw, drains S; asc. over SE slope.
- 36.00 Top of spur, slopes S; desc. over SW slope; leave timber.
- 40.66 Point for the ¼ sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T 18 S R 7 E

¼ $\frac{S\ 12}{S\ 13}$

1975

Desc. over steep SW slope.

- 60.00 Small wash at bottom of descent, drains S; asc. over SE slope.
- 68.00 Top of spur, slopes S; desc. over W slope.
- 81.32 The cor. of secs. 11, 12, 13 and 14.

(Restoring the survey executed by A. D. Ferron in 1882,
and the resurvey by F. M. Hanson in 1909)

N. 0°04' W., bet. secs. 11 and 12.

Asc. along W slope through scattering shadscale and brigham tea.

- 11.00 Bottom of small draw, drains SW; asc. over SE slope.
- 26.00 Slope changes; asc. over S slope.
- 35.00 Top of ascent, slopes W; thence along rocky W slope through scattering juniper and pinon timber.
- 40.10 Spur, slopes W; desc. over NW slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian Utah


CHAINS

40.28

The 1/4 sec. cor. of secs. 11 and 12, monumented with a red sandstone, 25 x 12 x 8 ins., firmly set 12 ins. in the ground, mkd. 1/4 on W face and a scattering mound of stone to W.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W of cor.

N. 0°10' E., beginning new measurement.

Desc. over NW slope.

4.00

Bottom of draw, drains W; asc. over SW slope.

7.00

Top of spur, slopes W; desc. over steep NW slope.

32.00

Base of ridge, bears NE and SW; thence across bottom of draw.

34.00

Base of spur, bears NW and SE; asc. over SW slope.

37.00

Top of ascent, slopes W; thence along rocky W slope through scattering juniper and pinon timber.


40.35

The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 18 x 10 x 6 ins., firmly set 8 ins. in the ground, mkd. 5 notches on S and 1 notch on E edge, from which the original bearing tree

A juniper, 4 ins. diam., bears S. 44° E., 5 lks. dist., mkd. T18S R7E S12 BT.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Cor. is set on steep W slope, 60 ft. below top of ridge.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian

CHAINS

- From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., is monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1970 resurvey of the W. bdy. of T. 18 S., R. 8 E.
- S. 89°46' W., bet. secs. 1 and 12.
- Asc. over NE slope, through scattering juniper and pinon timber.
- 14.00 Top of spur, projects SE; desc. over SW slope.
- 24.00 Head of draw, drains SE; asc. over E slope.
- 36.00 Top of spur, slopes SE; desc. over SW slope.
- 38.00 Bottom of draw, drains SE; asc. over E slope.
- 41.25 Point for the ¼ sec. cor. of sec. 12, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 36 ins. long, 1 in. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T 18 S R 7 E
-
- ¼ S 12
1975
- Asc. over E slope.
- 41.50 Top of ridge, bears N and S; thence along gentle S slope.
- 42.34 The point for the ¼ sec. cor. of sec. 1 only, at proportionate distance, based on the 1909 resurvey of a portion of the subdivisional lines.
- At the corner point
- Set an iron post, 36 ins. long, 2½ in. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T 18 S R 7 E
-
- ¼ S 1
1975
- 47.00 W rim of ridge, bears N and S; desc. over steep W slope.
- 70.00 Small wash in bottom of draw, drains SW; asc. over SE slope.
- 77.00 Top of ridge, slopes S; desc. over steep rocky W slope.
- 82.50 The cor. of secs. 1, 2, 11 and 12.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

(Restoring the survey executed by F.M. Hanson in 1909)

N. 0°19' E., bet. secs. 1 and 2.

Along steep rocky W slope through sparsely scattering juniper and pinon timber.

38.00 Slope changes; desc. over NW slope.

40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$
 |
 S 2 | S 1
 |
 1975

Corner is located 10 lks. E of small wash, draining S.

Desc. over steep rocky NW slope.

50.00 Base of descent, bears NE and SW; thence desc. over gentle NW slope.

70.00 Head of draw, drains SW; thence along gentle W slope.

81.14 The closing cor. of secs. 1 and 2, monumented with a sandstone, 12 x 8 x 8 ins., above ground, firmly set and mkd. 5 grooves on W, 1 groove on E and CC on S face, from which the original bearing tree

A juniper, 5 ins. diam., bears S. $12\frac{3}{4}^\circ$ W., 41 lks. dist., mkd. T18S R7E S2 BT.

Add the marks "AM" on S face.

81.42 Intersect the S. bdy. of sec. 36, T. 17 S., R. 7 E.

Point for the closing cor. of secs. 1 and 2.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 17 S R 7 E

S 36
 ———
 S 2 | S 1
 |
 C C

T 18 S R 7 E

1975

From this point, the cor. of secs. 35 and 36, T. 17 S., R. 7 E., bears N. $89^\circ55'$ W., 3.67 chs. dist., and the $\frac{1}{4}$ sec. cor. of sec. 36, T. 17 S., R. 7 E., bears S. $89^\circ55'$ E., 36.34 chs. dist.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS
34.00

Rim of bench, bears SW and E; asc. over gradual E slope.

40.89 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 20 x 12 x 8 ins., firmly set 10 ins. in the ground, mkd. 1 notch on S and 2 notches on E edge, with a scattering mound of stone to E; from which the original bearing trees

A juniper, 10 ins. diam., bears N. 35 3/4° E.,
47 lks. dist., mkd. T18S R7E S26 BT.

A pinon, 12 ins. diam., bears S. 27° E., 42 lks.
dist., mkd. T18S R7E S35 BT.

A pinon, 20 ins. diam., bears S. 35° W., 88 lks.
dist., mkd. T18S R7E S34 BT.

A pinon, 14 ins. diam., bears N. 51 3/4° W., 41
lks. dist., mkd. T18S R7E S27 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18	S	R	7	E
S 27		S 26		
S 34		S 35		
1975				

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of
cor.

S. 0°33' W., bet. secs. 34 and 35.

Along gradual E slope of Buzzard Bench through thick
juniper and pinon.

1.10 Rim of bench, bears E and W; desc. over steep S slope;
leave timber.

24.70 Dirt road, bears E and W.

32.00 Enter scattering juniper and pinon timber.

36.00 Head of draw, drains SE; thence over gradual S slope.

39.91 The ¼ sec. cor. of secs. 34 and 35, monumented with a
sandstone, 18 x 9 x 7 ins., firmly set 8 ins. in the
ground, mkd. ¼ on W face, from which the original bearing
trees

A pinon, 8 ins. diam., bears S. 27° E., 14 lks.
dist., mkd. ¼ S35 BT.

A juniper, 14 ins. diam., bears N. 74¼° W., 7 lks.
dist., mkd. ¼ S34 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base to top, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian Utah

CHAINS

T 18 S R 7 E
 $\frac{1}{4}$
 S 34 | S 35
 1975

Deposit the mkd. stone alongside the iron post.

S. $0^{\circ}04'$ E., beginning new measurement.

Desc. over gradual S slope through scattering juniper and pinon timber.

- 8.00 Rim of ravine, bears NW and SE; desc. over SW slope.
- 13.00 Small wash in bottom of ravine, drains SE; leave timber; asc. over NE slope.
- 16.00 Top of clay spur, slopes E; thence along E slope.
- 25.00 Top of clay spur, slopes SE; desc. over S slope.
- 32.00 Small wash drains SE; asc. along broken E slope; enter scattering juniper and pinon timber.
- 39.62 Intersect the S. bdy. of T. 18 S., R. 7 E.

oint for the closing cor. of secs. 34 and 35.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. ase to top, with brass cap mkd.

T 18 S R 7 E
 C C
 |
 S 34 | S 35
 S 3
 T 19 S
 1975

rom this point the original closing cor. of secs. 34 and 35, monumented with a stationary sandstone, 4 x 16 x 12 ins., above ground, mkd. 4 notches on W and C on S face bears S. $0^{\circ}04'$ E., 0.03 chs. dist. Add the arks "AM" on N face, 6 ins. above ground, from which the riginal bearing trees

A juniper, 10 ins. diam., bears N. $32\frac{3}{4}^{\circ}$ E., 39 lks. dist., mkd. T18S R7E S34 BT.

A pinon, 7 ins. diam., bears N. $55\frac{3}{4}^{\circ}$ W., 33 lks. dist., mkd. T18S R7E S35 BT.

rom the same point the cor. of secs. 2 and 3, T. 19 S., . 7 E., heretofore described, bears S. $89^{\circ}52'$ E., 1.10 hs. dist.

he point for the $\frac{1}{4}$ sec. cor. of sec. 35 only, T. 18 S., . 7 E., is at proportionate dist. on the S. bdy. of ec. 35.

et an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. n the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian, Utah

CHAINS

T 18 S R 7 E

$\frac{1}{4}$ S 35
1975

Cor. is located on S slope, 7 ft. above bottom of wash, draining E.

From this point the true point for the $\frac{1}{4}$ sec. cor. of sec. 2, T. 19 S., R. 7 E., bears N. $89^{\circ}40'$ E., 0.85 chs. dist. and is witnessed S. $89^{\circ}59'$ E., 0.54 chs. dist.

From the same point, the cor. of secs. 2 and 3, T. 19 S., R. 7 E., bears S. $89^{\circ}40'$ W., 39.19 chs. dist.

The point for the $\frac{1}{4}$ sec. cor. of sec. 34 only, T. 18 S., R. 7 E., on the S. bdy. of sec. 34, at proportionate distance, based on the 1909 survey and the 1911 resurvey, as in accordance with the Special Instructions.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ S 34
1975

From this point an angle point bet. secs. 3 and 34, heretofore described, bears S. $89^{\circ}48'$ E., 0.74 chs. dist.

From the same point, the cor. of secs. 33 and 34, T. 18 S., R. 7 E., bears N. $89^{\circ}48'$ W., 38.76 chs. dist.

(Restoring the survey executed by F. W. Hanson in 1909, and the retracement by H. W. Miller and L. E. Bolinger in 1916)

From the cor. of secs. 26, 27, 34 and 35.

N. $0^{\circ}02'$ E., bet. secs. 26 and 27.

Along gradual E slope of Buzzard Bench through thick juniper and pinon timber.

26.60 Rim of deep ravine, bears E and W; desc. over steep N slope; leave timber.

40.10 The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 18 x 12 x 4 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on W face, from which the remains of the original bearing trees

A juniper, 15 ins. diam., bears S. $62\frac{3}{4}^{\circ}$ E., 73 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A dead pinon, 5 ins. diam., bears S. $81\frac{1}{2}^{\circ}$ W., 66 lks. dist., mkd. $\frac{1}{4}$ S27 BT.


At the corner point

24

Dependent Resurvey of a portion of the Subdivisional lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

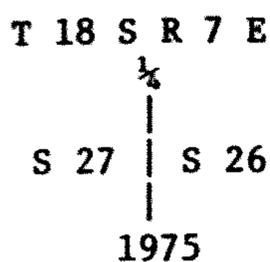

Deposit the mkd. stone alongside the iron post.

N. 0°16' E., beginning new measurement.

Desc. over steep N slope.


- 4.00 Wash, 20 lks. wide, 6 ins. deep, in bottom of ravine, drains E; asc. over S slope.
- 10.00 Top of sandstone ledge, 50 ft. high, bears E and W; asc. over gradual S slope.
- 18.00 Base of high ridge, bears NW and SE; asc. over steep rocky SW slope.
- 34.25 W point of high ridge, projecting NE; desc. over steep N slope through scattering juniper and pinon timber.
- 40.46 The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20 x 10 x 8 ins., firmly set 10 ins. in the ground, mkd. 2 notches on the S and E edge, from which the original bearing trees

A dead pinon, 10 ins. diam., bears N. 69 3/4° E., 52½ lks. dist., mkd. T18S R7E S23 BT.

A juniper, 8 ins. diam., bears N. 27½° W., 17 lks. dist., mkd. T18S R7E S22 BT. (Record, 16 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

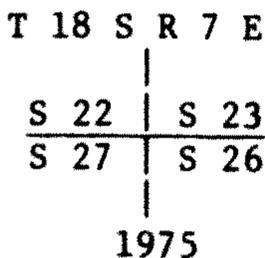

Deposit the mkd. stone alongside the iron post.

(Restoring the survey executed by F. W. Hanson in 1909)

From the cor. of secs. 23, 24, 25 and 26.

N. 88°53' W., bet. secs. 23 and 26.

Asc. over gradual SE slope.

- 26.00 Begin abrupt ascent.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S.. R. 7 E. Salt Lake Meridian, Utah

CHAINS

- 29.00 Top of spur, bears NW and SE; desc. over SW slope.
- 37.90 Wash in bottom of ravine, drains SE; asc. over gradual NE slope.
- 40.21 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a sandstone, 26 x 16 x 5 ins., firmly set 10 ins. in the ground, mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ $\frac{S\ 23}{S\ 26}$

1975

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

S. $88^{\circ}37'$ W., beginning new measurement.

Asc. over broken SE slope and perpendicular ledges.

- 18.50 Top of high ridge, bears N. 60° E. and S. 60° W.; desc. along broken N slope through scattering juniper and pinon timber.

- 41.54 The cor. of secs. 22, 23, 26 and 27.

N. $0^{\circ}20'$ E., bet. secs. 22 and 23.

Desc. over steep rocky N slope through scattering juniper and pinon timber.

- 3.00 Base of main descent, bears E and W; desc. over gradual N slope.
- 20.00 Wash, 25 lks. wide, 5 ft. deep, in bottom of ravine, drains E; asc. over S slope.
- 30.00 Rim of ravine, bears NE and SW; asc. over gradual SE slope.
- 40.14 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 18 x 10 x 8 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$

S 22 | S 23

1975

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

N. 0°04' E., beginning new measurement.

Asc. over gradual SE slope through scattering juniper and pinon timber.

- 9.00 Rim of hollow, bears NW and SE; desc. over NE slope.
- 14.00 Wash, 20 lks. wide, 4 ft. deep, in bottom of hollow, drains SE; asc. over S slope.
- 20.00 Top of spur, slopes E; desc. over NE slope.
- 25.00 Bottom of draw, drains E; asc. over SE slope.
- 28.25 Top of spur, slopes E; desc. over N slope.
- 38.00 Base of steep descent, bears E and W; desc. over gradual NE slope to cor.
- 40.10 Wash, 20 lks. wide, 12 ins. deep, drains E.
- 40.52 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 26 x 24 x 16 ins., firmly set 12 ins. in the ground, mkd. 3 notches on S and 2 notches on E edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18	S R	7 E
S 15		S 14
S 22		S 23
1975		

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

(Restoring the survey executed by A. D. Ferron in 1882,
and the retracement by F. W. Hanson in 1909)

From true point for the cor. of secs. 13, 14, 23 and 24.

S. 89°29' W., bet. secs. 14 and 23.

Along creek bottom.

- 23.00 Leave creek bottom; asc. over gradual NE slope.
- 32.00 Base of steep ascent, bears NW and SE; asc. over NE slope through scattering juniper and pinon timber.
- 35.20 New Western Canal, flows SE.
- 39.00 Rim of bench, bears NW and SE; asc. over gentle NE slope.
- 40.48 The ¼ sec. cor. of secs. 14 and 23, determined from the remains of the original bearing trees

Dependent Resurvey of a portion of the Subdivisional Lines,
 T 18 S R 7 E

CHAINS

A pinon, 12 ins. diam., bears S. 64° E., 54 lks.
 dist., mkd. $\frac{1}{4}$ S23 BT.

A juniper, 6 ins. diam., bears N. 64½° W., 35 lks.
 dist., mkd. $\frac{1}{4}$ S14 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 15 ins.
 in the ground to bedrock, in a mound of stone, 4 ft.
 base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ $\frac{S\ 14}{S\ 23}$

1975

S. 89°47' W., beginning new measurement.

Asc. over gradual NE slope through thick juniper and
 pinon timber.

- 1.20 Small wash in bottom of draw, drains NE.
- 9.50 Edge of timber, bears N and S; enter native grasses and
 scattering shadscale.
- 24.50 W rim of bench, bears N and S; desc. over W slope.
- 29.00 Base of descent, bears N and S; thence over gentle
 rolling land.
- 39.80 Wash, 20 lks. wide, 12 ins. deep, drains NE.
- 40.95 The cor. of secs. 14, 15, 22 and 23.

(Restoring the survey executed by A. D. Ferron in 1882)

N. 0°48' E., bet. secs. 14 and 15.


Over gentle rolling land through scattering shadscale
 and native grasses.

- 2.00 Begin ascent, over SE slope.
- 21.00 Top of spur, slopes NE; desc. over steep N slope.
- 30.00 Bottom of draw, drains NE; thence along E slope.
- 38.00 Top of spur, projects NE; desc. over gradual N slope.
- 40.40 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 14
 and 15.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
 in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian Utah

CHAINS



Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.

- 40.82 The ¼ sec. cor. of secs. 14 and 15, on the eroding right bank of canal, monumented with a sandstone, 20 x 12 x 8 ins., firmly set 10 ins. in the ground, mkd. ¼ on W face, in fence line, extending E and W.

True cor. point not remonumented due to danger of destruction by further erosion of canal bank.


N. 0°08' W., beginning new measurement.

Desc. over gradual N slope.

- 0.15 New Western Canal, 30 lks. wide, flows SE.
- 10.00 Cottonwood Creek, 2 chs. wide, flows SE; asc. over gradual S slope.
- 26.25 State Highway No. 29, bears N. 68° W. and S. 68° E.
- 37.60 Spur, slopes E; desc. over N slope.
- 39.00 Wash, 15 lks. wide, 2 ft. deep, drains SE.
- 40.26 The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 16 x 14 x 6 ins., firmly set 10 ins. in the ground, mkd. 4 notches on S and 2 notches on E edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

From the cor. of secs. 11, 12, 13 and 14.

S. 89°41' W., bet. secs. 11 and 14.

Desc. over W slope through scattering shadscale and native grasses.

- 3.50 Grimes Wash, 40 lks. wide, 10 ft. deep, drains S; thence along gentle S slope.
- 14.00 Small wash, drains SE; asc. over NE slope.
- 19.00 Gravel road, bears N and S.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS	
24.00	Base of ridge, bears NW and SE; asc. over steep rocky NE slope.
30.00	E rim of ridge, bears NW and SE; thence along gentle S slope.
35.30	W rim of ridge, bears NW and SE; desc. over SW slope.
40.89	The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a sandstone, 14 x 10 x 4 ins., firmly set 7 ins. in the ground, mkd. $\frac{1}{4}$ on N face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 18 S R 7 E
	$\frac{1}{4}$ $\frac{S 11}{S 14}$
	1975
	Deposit the mkd. stone alongside the iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

	N. $89^{\circ}38'$ W., beginning new measurement.
	Desc. over steep SW slope.
3.00	Bottom of draw, drains S; asc. over steep E slope.
9.00	Top of spur, projects S; desc. over steep W slope.
24.00	Base of descent, bears N and S; thence over nearly level land.
36.60	Top of low ridge, bears N and S; desc. over W slope to cor.
40.42	The cor. of secs. 10, 11, 14 and 15.
	N. $0^{\circ}02'$ W., bet. secs. 10 and 11.
	Asc. over gradual S slope through scattering shadscale and native grasses.
8.00	Base of steep ascent, bears NE and SW; asc. over SE slope.
24.30	Rim of bench, bears NE and SW; asc. over gradual S slope through scattering juniper and pinon timber.
40.25	The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 16 x 10 x 4 ins., firmly set 8 ins. in the ground, mkd. $\frac{1}{4}$ on W face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian Utah

CHAINS

T 18 S R 7 E
 $\frac{1}{2}$
 |
 S 10 | S 11
 |
 1975

Deposit the mkd. stone alongside the iron post.

N. 1°05' E., beginning new measurement.

Asc. over gradual S slope.

14.00 Enter scattering juniper and pinon timber.

40.28 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 16 x 10 x 6 ins., firmly set 8 ins. in the ground, mkd. 5 notches on S and 2 notches on E edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T 18 S R 7 E
 |
 S 3 | S 2
 S 10 | S 11
 |
 1975

Deposit the mkd. stone alongside the iron post.

(Restoring the survey executed by A. D. Ferron in 1882,
and the resurvey by F. W. Hanson in 1909)

From the cor. of secs. 1, 2, 11 and 12.

S. 89°51' W., bet. secs. 2 and 11.

Desc. over steep W slope through scattering juniper and pinon timber.

10.00 Grimes Wash, 30 lks. wide, 10 ft. deep, drains S; thence along gradual S slope.

26.00 Gravel road, bears NW and SE; asc. over NE slope.

30.00 Rim of ridge, bears NW and S; thence along S slope of ridge top.

40.26 The $\frac{1}{2}$ sec. cor. of secs. 2 and 11, monumented with a sandstone, 18 x 9 x 6 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{2}$ on N face, from which the original bearing trees

A juniper, 10 ins. diam., bears S. 41° E., 30 lks dist., mkd. $\frac{1}{2}$ S11 BT.

A juniper, 8 ins. diam., bears N. 17° W., 28 lks. dist., mkd. $\frac{1}{2}$ S2 BT.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T 18 S R 7 E

¼ $\frac{S 2}{S 11}$

1975

Deposit the mkd. stone alongside the iron post.

N. 89°51' W., beginning new measurement.

Along gradual S slope of ridge top through scattering juniper and pinon timber.

- 4.00 Begin descent over SW slope.
- 11.00 Bottom of draw, drains S. 25° E.; asc. over E slope.
- 18.00 Top of ridge, bears N and S; desc. over SW slope.
- 35.00 Bottom of draw, drains S. 20° W.; thence along gradual S slope.
- 40.34 The cor. of secs. 2, 3, 10 and 11.

(Restoring the survey executed by F. W. Hanson in 1909, and the retracement by H. W. Miller and L. E. Bolinger in 1916)

N. 0°05' W., bet. secs. 2 and 3.

Asc. over gradual S slope through scattering juniper and pinon timber.

- 40.16 The ¼ sec. cor. of secs. 2 and 3, monumented with a sandstone, 14 x 9 x 8 ins., firmly set 7 ins. in the ground, mkd. ¼ on W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 18 S R 7 E

¼
|
S 3 | S 2

1975

Deposit the mkd. stone alongside the iron post.

N. 0°18' W., beginning new measurement.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- Asc. over gradual S slope through scattering juniper and pinon timber.
- 2.00 Begin descent over NE slope.
- 10.00 Small wash in bottom of draw, drains SE; asc. over gradual SE slope.
- 41.21 The closing cor. of secs. 2 and 3, monumented with a sandstone, 18 x 9 x 7 ins., firmly set 9 ins. in the ground, mkd. 2 grooves on E, 4 grooves on W and CC on S face, on the N. bdy. of the Tp., from which the original bearing trees

A pinon, 5 ins. diam., bears S. $10\frac{1}{2}^{\circ}$ E., 12 lks. dist., mkd. T18S R7E S2 BT.

A pinon, 11 ins. diam., bears S. 51° W., 40 lks. dist., mkd. T18S R7E S3 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 17 S R 7 E

S 35	
S 3	S 2
C C	

T 18 S R 7 E
1975

Deposit the mkd. stone alongside the iron post.

From this point the cor. of secs. 34 and 35, T. 17 S., R. 7 E., bears S. $89^{\circ}53'$ W., 2.35 chs. dist.

From the same point, the $\frac{1}{4}$ sec. cor. of sec. 35, T. 17 S., R. 7 E., bears N. $89^{\circ}53'$ E., 38.58 chs. dist.

The point for the $\frac{1}{4}$ sec. cor. of sec. 2, T. 18 S., R. 7 E., is at midpoint on the N. bdy. of sec. 2.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 17 S R 7 E

$\frac{1}{4}$ S 2	
T 18 S R 7 E	
1975	

From this point the $\frac{1}{4}$ sec. cor. of sec. 35, T. 17 S., R. 7 E., bears S. $89^{\circ}53'$ W., 2.05 chs. dist.

From the same point, the cor. of secs. 35 and 36, T. 17 S., R. 7 E., bears N. $89^{\circ}55'$ E., 36.99 chs. dist.

From the cor. of secs. 22, 23, 26 and 27.

N. $89^{\circ}38'$ W., bet. secs. 22 and 27.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Secs. 22 and 27, T. 18 S., R. 7 E.

CHAINS

- Long steep N slope through scattering juniper and pinon timber.
- 2.00 Slope changes; desc. over steep NW slope.
- 16.00 Wash, 25 lks. wide, 4 ft. deep at base of descent, drains NE; asc. over broken SE slope.
- 30.00 Wash, 20 lks. wide, 2 ft. deep, drains S. 85° E.; asc. over NE slope.
- 40.11 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, 18 x 12 x 5 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on N face, from which the original bearing trees
- A juniper, 18 ins. diam., bears N. 36° E., 12 lks. dist., dimly mkd. $\frac{1}{4}$ S BT.
- A juniper, 8 ins. diam., bears S. 63° E., 12 lks. dist., mkd. $\frac{1}{4}$ S 27 BT.
- At the corner point
- Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.
- T 18 S R 7 E
- $\frac{1}{4}$ $\frac{S 22}{S 27}$
- 1975
- Deposit the mkd. stone alongside the iron post.
-
- N. 88°58' W., beginning new measurement.
- Asc. over NE slope through scattering juniper and pinon timber.
- 27.00 Top of spur, slopes N; desc. along broken N slope.
- 33.00 Bottom of draw, drains NE; asc. over steep E slope.
- 40.13 The cor. of secs. 22 and 27, monumented with an iron post, 2 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of a portion of the subdivisional lines of T. 18 S., R. 7 E.
- N. 0°05' W., along the W. bdy. of sec. 22.
- Asc. along steep E slope through scattering juniper and pinon timber.
- 2.00 Slope changes; asc. over rocky SE slope.
- 4.30 Top of spur, slopes NE; desc. over NW slope.
- 14.00 Bottom of deep ravine, drains NE; asc. over steep SE slope.
- 20.00 Top of spur, slopes NE; desc. along E slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian Utah

CHAINS

- 28.00 Bottom of draw, drains NE; asc. over SE slope.
- 36.00 Top of ascent, slopes E; desc. over NE slope.
- 40.47 The $\frac{1}{4}$ sec. cor. of sec. 22, monumented with a sandstone, 18 x 8 x 6 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on E face, from which the original bearing tree

A juniper, 18 ins. diam., bears S. 40° E., 42 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T 18 S R 7 E

|
| $\frac{1}{4}$
| S 22
1975

Deposit the mkd. stone alongside the iron post.

From this point the $\frac{1}{4}$ sec. cor. of sec. 21, bears S. $0^{\circ}05'$ E., 1.80 chs. dist.

N. $0^{\circ}20'$ E., beginning new measurement.

Enter bottom of ravine.

- 4.40 Wash, 20 lks. wide, 5 ft. deep, in bottom of ravine, drains SE; thence along broken W slope.
- 12.40 Top of ridge, bears NW about 1 ch., thence SW; also head of ravine, drains S. 60° E.; thence over bench land.
- 24.20 Desc. abruptly over N slope.
- 25.90 Bottom of draw, drains N. 60° E.; asc. over S slope.
- 27.30 Top of ridge, slopes N. 60° E.; desc. over N slope.
- 35.40 Bottom of draw, drains SE; asc. over SW slope.
- 38.60 Spur, projects W; asc. along broken W slope.
- 39.94 The cor. of secs. 15, 16, 21 and 22, determined by the remains of a mound of stone and the original bearing object

A stationary sandstone boulder, 8 x 6 x 3 ft. above ground, bears S. 20° E., 5 lks. dist. to a cross 3 ft. above ground near NW cor., mkd. T18S R7E S 22.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

T 18 S R 7 E

S 16	S 15
S 21	S 22

1975

Cor. is located 3 ft. above bottom of small draw,
draining SW.

(Restoring the survey executed by A. D. Ferron in 1882,
and the resurvey by F. W. Hanson in 1909)

From the cor. of secs. 14, 15, 22 and 23.

N. 89°21' W., bet. secs. 15 and 22.

Asc. over gradual E slope through scattering shadscale
and native grasses.

20.00 Bottom of small wash, drains S. 60° E.; asc. over gradual
NE slope.

21.50 Same wash, drains N. 75° E.; asc. over SE slope.

26.60 Base of main ascent; asc. over steep E slope.

40.11 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, determined from the
remains of the original bearing tree

A pinon, 7 ins. diam., bears N. 39° W., 39 lks.
dist., mkd. $\frac{1}{4}$ S15 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$	S 15	
	S 22	

1975

N. 89°50' W., beginning new measurement.

Asc. over steep E slope through scattering juniper and
pinon timber.

1.60 Rim of plateau, bears S and NE; asc. over gradual NE
slope.

5.20 Top of ascent, bears NW and SE; desc. over steep SW
slope.

7.20 Head of ravine, drains SW; asc. over SE slope.

13.00 Top of spur, projects S; desc. along rocky S slope.

18.60 Head of ravine, drains S; asc. along S slope.

23.70 Top of spur, projects S; thence along steep S slope.

33

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS
37.50

Top of spur, projects SW; desc. over broken W slope.

40.33

The cor. of secs. 15, 16, 21 and 22.

(Restoring the surey executed by A. D. Ferron in 1882,
the resurvey by F. W. Hanson in 1909, and the
retracement by H. W. Miller and L. E. Bolinger in 1916)

N. 0°05' W., bet. secs. 15 and 16.

Asc. along broken W slope of clay spur.

0.60

Top of small clay spur, projects W; continue ascent
along W slope.

7.10

Saddle of divide, bears E and W; desc. over broken N
slope.

22.80

Wash in bottom of hollow, drains N. 15° E.; asc. over
steep SE slope.

32.25

Top of ascent, slopes N. 30° E.; desc. over gradual N
slope.

40.28

The ¼ sec. cor. of secs. 15 and 16, monumented with a
sandstone, 18 x 10 x 8 ins., firmly set 10 ins. in the
ground, mkd. ¼ on W face, from which the original bearing
trees

A dead pinon, 7 ins. diam., bears S. 72° E.,
60 lks. dist., mkd. ¼ S15 BT. (Record, N. 72° E.,
50 lks.)

A pinon, 12 ins. diam., bears N. 77° W., 17½ lks.
dist., mkd. ¼ S16 BT. (Record, 26 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 15 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T 18 S R 7 E
 |
 ¼
 |
 S 16 | S 15
 |
 1975

Deposit the mkd. stone alongside the iron post.

N. 0°21' E., beginning new measurement.

Desc. over gradual N slope through scattering juniper
and pinon timber.

21.80

Rim of plateau, bears NE and SW; desc. over broken NW
slope.

30.70

Enter ravine; desc. over NE slope.

33.00

Wash, 30 lks. wide, 15 ft. deep, in bottom of ravine,
drains N. 25° E.; asc. over SE slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

- CHAINS
36.40 Top of spur on W side of ravine, slopes NE; desc. over
W slope.
- 38.00 Base of spur, bears NE and SW; thence desc. over gradual
W slope.
- 40.40 The cor. of secs. 9, 10, 15 and 16, monumented with a
stationary sandstone boulder, 20 x 16 x 13 ins. above
ground, mkd. 4 notches on S and 3 notches on E edge.
True cor. point cannot be remonumented due to irregular
shape of sandstone boulder.

(Restoring the survey executed by A. D. Ferron in 1882)

from the cor. of secs. 10, 11, 14 and 15.

N. 89°56' W., bet. secs. 10 and 15.

Along gentle S slope.

- 3.00 Base of ridge, bears NW and SE; asc. over rocky NE slope.
- 15.80 Top of ridge, bears N and S; thence along gradual S
slope through scattering juniper and pinon timber.
- 20.10 Rim of ravine, bears N and S; desc. over W slope.
- 24.00 Wash, 30 lks. wide, 5 ft. deep, in bottom of ravine,
drains S. 25° W.; asc. over SE slope.
- 32.00 Top of spur, slopes S; desc. over SW slope.
- 34.00 Base of descent, bears NW and SE; thence over gentle
rolling land.
- 35.00 State Highway No. 29, bears N. 45° W. and S. 45° E.
- 40.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, determined
longitudinally by a fence line extending N and S, and
latitudinally by proportionate distance.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ $\frac{S 10}{S 15}$

1975

Cor. is located 7 lks. S of cor. of fences extending S,
and paralleling highway.

N. 89°56' W., beginning new measurement.

Over cultivated land.

- 18.00 Edge of cultivated land, bears NW and SE; enter creek
bottom.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian Utah

CHAINS

- 20.00 Cottonwood Creek, 2 chs. wide, flows SE; asc. over gradual NE slope.
- 30.00 Top of spur, slopes N; desc. over NW slope.
- 34.00 Small wash in bottom of draw, drains N; asc. over NE slope.
- 36.40 Top of narrow ridge, bears N and S; desc. over steep W slope.
- 38.90 Bottom of deep wash, 30 lks. wide, 10 ft. deep, drains N. 10° E. in bottom of ravine; thence along ravine bottom.
- 39.90 The cor. of secs. 9, 10, 15 and 16.


(Restoring the survey executed by A. D. Ferron in 1882,
and the resurvey by F. W. Hanson in 1909)

N. $0^{\circ}09'$ E., bet. secs. 9 and 10.

Desc. over gradual N slope of ravine bottom.

- 0.02 Point selected for the witness cor. of secs. 9, 10, 15 and 16.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

- 4.00 Bottom of wash, 30 lks. wide, 7 ft. deep, drains N. 10° W.
- 11.00 Cottonwood Creek, 2 chs. wide, flows SE; asc. over gradual S slope.
- 30.00 State Highway No. 29, bears W and SE.
- 40.39 The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a sandstone, 20 x 14 x 8 ins., firmly set 10 ins. in the ground, dimly mkd. $\frac{1}{4}$ on W face, from which the original bearing object

A limestone ledge, 5 ft. high, bears N. 73° E.,
50 lks. dist., markings have flaked off.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

T 18 S R 7 E

	½	
S 9		S 10
	1975	

Deposit the dimly mkd. stone alongside the iron post.

N. 0°29' E., beginning new measurement.

Asc. over steep rocky SW slope.

- 12.90 SW rim of high butte, bears NW and SE; asc. over gradual SE slope.
- 18.10 NE rim of butte, bears NW and SE; desc. over steep NE slope.
- 24.00 Base of steep descent, bears NW and SE; desc. over gradual NE slope.
- 39.47 The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 20 x 12 x 8 ins., firmly set 10 ins. in the ground, mkd. 5 notches on S and 3 notches on E edge, from which the original bearing tree

A dead cedar, 6 ins. diam., bears N. 62½° E.,
47 lks. dist., mkd. T18S R7E S3 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E

S 4		S 3
S 9		S 10
	1975	

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

(Restoring the survey executed by A. D. Ferron in 1882, the resurvey by F. W. Hanson in 1909, and the resurvey by H. W. Miller and L. E. Bolinger in 1916)

From the cor. of secs. 2, 3, 10 and 11.

. 89°32' W., bet. secs. 3 and 10.

gradual S slope through scattering juniper and pinon timber.

- 11.70 sh, 20 lks. wide, 1 ft. deep, drains S; asc. abruptly.
- 17.80 edge of bench, bears N and S; thence over broken bench top.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian a

CHAINS

- 22.50 Wash, 1 ch. wide, 12 ft. deep, drains S. 20° E.
- 32.75 W edge of bench, bears N and S; leave timber; desc. over steep W slope.
- 40.04 The witness $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above ground, with brass cap mkd. as described in the official record of the 1961 resurvey of a portion of the subdivisional lines of T. 18 S., R. 7 E., from which the 1916 bearing trees

A pinon, 8 ins. diam., bears S. 64° E., 35 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A juniper, 5 ins. diam., bears N. 42° W., 69 lks. dist., mkd. $\frac{1}{4}$ S3 BT. (Record, N. 54 $\frac{1}{2}$ ° W.)

S. 89°34' W., beginning new measurement.

- 0.50 Enter wide wash, 75 lks. wide, 12 ft. deep, drains SE.
- 0.56 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, at proportionate distance, falls in wash, where it is impracticable to establish a permanent monument.

S. 89°34' W., beginning new measurement.

- 0.69 Leave wash; asc. over gradual E slope.
- 6.94 E rim of bench, bears N and S; thence along gentle S slope of bench top; leave timber.
- 23.69 W rim of bench, bears N and S; desc. over SW slope.
- 27.59 Bottom of gulch, drains S. 80° E. about 3 chs., thence S; asc. over SE slope.
- 30.24 Top of ridge, bears NW and SE; desc. over SW slope.
- 39.24 Wash, 15 lks. wide, 3 ft. deep, drains S. 20° E.; asc. over gradual NE slope.
- 40.60 The cor. of secs. 3, 4, 9 and 10.

(Restoring the survey executed by F. W. Hanson in 1909, and the retracement by H. W. Miller and L. E. Bolinger in 1916)

From the cor. of secs. 9, 10, 15 and 16.

S. 89°42' W., bet. secs. 9 and 16.

Along gentle N slope.

- 0.90 Base of spur, bears NW and SE; asc. over NE slope.
- 9.00 Top of spur, slopes N; desc. over NW slope.
- 32.00 Base of descent, bears NE and SW; desc. over gentle NW slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS
37.00

Wash in bottom of draw, drains N; asc. over gentle NE slope.

40.03

The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, monumented with a sandstone, 12 x 12 x 8 ins., firmly set 8 ins. in the ground, mkd. $\frac{1}{4}$ on N face, from which the remaining original bearing tree

A pinon, 6 ins. diam., bears N. 30° W., 12 lks. dist., with a healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ $\frac{S 9}{S 16}$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located 37 $\frac{1}{2}$ lks. S of fence line, bearing E and W.

N. 89°54' W., beginning new measurement.

Asc. over gradual NE slope.

15.00

Base of spur, bears NW and SE; asc. over NE slope through scattering juniper and pinon timber.

31.00

Top of spur, slopes N; desc. over NW slope.

37.00

Small wash in bottom of hollow, drains N; asc. over steep E slope.

39.69

The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 24 x 8 x 6 ins., firmly set 12 ins. in the ground, mkd. 4 notches on the S and E edge, from which the original bearing trees

A juniper, 7 ins. diam., bears N. 40° E., 29 lks. dist., mkd. T18S R7E S9 BT.

A pinon, 8 ins. diam., bears S. 11° W., 58 lks. dist., mkd. T18S R7E S17 BT.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 18 S R 7 E

$\frac{S 8}{S 17}$ | $\frac{S 9}{S 16}$

1975

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

(Restoring the survey executed by F. W. Hanson in 1909)

N. 0°57' W., bet. secs. 8 and 9.

Along steep E slope through scattering juniper and pinon timber.


- 3.00 Slope changes; desc. over NE slope.
- 18.00 Base of steep descent, bears NW and SE; desc. over gradual N slope.
- 34.70 Cottonwood Creek, 1.50 chs. wide, flows E; asc. over gradual S slope.
- 36.45 State Highway No. 29, bears E and W.
- 38.45 Base of spur, bears NE and SW; asc. over SE slope.
- 40.68 The ¼ sec. cor. of secs. 8 and 9, monumented with a sandstone, 18 x 12 x 8 ins., firmly set 9 ins. in the ground, mkd. ¼ on W face, from which the original bearing trees

A pinon, 10 ins. diam., bears S. 13° E., 66 lks. dist., mkd. ¼ S9 BT.

A pinon, 11 ins. diam., bears S. 58½° W., 57 lks. dist., mkd. ¼ S8 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

N. 0°59' E., beginning new measurement.

Asc. over gentle SE slope.

- 0.50 Top of small clay spur, slopes SW; desc. over NW slope.
- 3.50 Bottom of wash, 20 lks. wide, 4 ft. deep, drains S. 20° W. from N; thence along bottom of wash.
- 7.50 Leave wash turns N. 40° W.
- 10.00 Base of steep ascent, bears NW and SE; asc. over SW slope.
- 12.75 Top of spur, slopes W; leave timber; desc. over NW slope.
- 19.90 Wash, 20 lks. wide, 8 ft. deep, drains S. 45° W.; asc. over gradual S slope.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S. R. 7 E. Salt Lake Meridian Utah

CHAINS

- 34.00 Base of clay ridge, bears NE and SW; asc. over steep SE slope.
- 38.00 Top of ascent, slopes E; thence along steep E slope to cor.
- 39.60 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 24 x 12 x 6 ins., firmly set 14 ins. in the ground, mkd. 5 notches on S and 4 notches on the E edge, from which the original bearing object

A limestone ledge facing E, bears S. 22 3/4° W., 25 lks. dist., markings have flaked off.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E

S 5	S 4
S 8	S 9

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on a steep E clay slope, 75 ft. above bottom of gulch.

(Restoring the survey executed by F. W. Hanson in 1909, and the retracement by H. W. Miller and L. E. Bolinger in 1916)

From the cor. of secs. 3, 4, 9 and 10.

N. 89°52' W., bet. secs. 4 and 9.

Asc. over gradual NE slope.

- 6.00 Low saddle between high ridges, bears NW and SE; asc. over SE slope.
- 27.10 Top of ridge, bears N and S; desc. over W slope.
- 33.80 Wash, 30 lks. wide, 7 ft. deep, drains irregularly S; asc. over SE slope.
- 39.97 The 1/4 sec. cor. of secs. 4 and 9, monumented with a sandstone, 20 x 18 x 18 ins., firmly set 10 ins. in the ground, mkd. 1/4 on N face.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 18 S R 7 E

1/4	S 4
	S 9

1975

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S.. R. 7 E.. Salt Lake County, Utah.

CHAINS

from which

A sandstone boulder, 8 x 6 x 5 ft. above ground,
bears N. 46° E., to a cross, 4 ft. above ground,
mkd. B + O.

N. 89°43' W., beginning new measurement.

Asc. over SE slope.

- 1.75 Top of spur, slopes SE; desc. over SW slope.
5.00 Bottom of draw, drains SE; asc. over steep E slope.
20.00 Top of ridge, bears N and S; desc. over steep W slope.
35.00 Wash in bottom of hollow, drains S; asc. over E clay
slope.
40.11 The cor. of secs. 4, 5, 8 and 9.

From the cor. of secs. 8, 9, 16 and 17

N. 89°53' W., bet. secs. 8 and 17.

Asc. over steep E slope through scattering juniper and
pinon timber.

- 2.75 Top of ridge, slopes N; thence along broken N slope.
7.60 Begin descent over steep NW slope.
24.00 Bottom of draw, drains N; thence along broken N slope.
32.75 Wash in bottom of ravine, drains NE; asc. over steep
SE slope.
39.10 Top of spur, slopes N; desc. gradually over NW slope.
40.12 The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a
stationary sandstone boulder, 5 x 4 x 3 ft. above ground,
mkd. with a cross and a $\frac{1}{4}$ on NE face, from which the
original bearing trees

A juniper, 12 ins. diam., bears N. 3 $\frac{1}{2}$ ° E., 35 lks.
dist., mkd. $\frac{1}{4}$ S8 BT.

A pinon, 10 ins. diam., bears S. 49° W., 14 lks.
dist., mkd. $\frac{1}{4}$ S 17 BT.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., underneath
true point on boulder, 24 ins. in the ground, with brass
cap mkd.

T 18 S R 7 E

$\frac{1}{4}$ $\frac{S 8}{S 17}$

1975

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89°59' W., beginning new measurement. Asc. over gradual NE slope.
4.00	Base of main ascent; asc. over steep and rocky E slope.
39.80	The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam. firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of a portion of the subdivisional lines of T. 18 S., R. 7 E.
	N. 0°30' E., bet. secs. 7 and 8. Along steep E slope through large sandstone boulders.
2.00	Slope changes; desc. over steep NE slope.
23.15	Top of rocky spur, projects NE; desc. abruptly over NE slope.
40.03	The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a sandstone, 18 x 10 x 7 ins., firmly set 9 ins. in the ground, mkd. $\frac{1}{4}$ on W face, from which the original bearing trees A juniper, 10 ins. diam., bears N. 68° E., 7 lks. dist., mkd. $\frac{1}{4}$ S8 BT. A juniper, 10 ins. diam., bears S. 78° W., 19 lks. dist., mkd. $\frac{1}{4}$ S7 BT. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T 18 S R 7 E ½ S 7 S 8 1975
	Deposit the mkd. stone alongside the iron post.
	N. 0°02' W., beginning new measurement. Desc. over steep NE slope through scattering juniper and pinon timber.
9.15	Base of mountain, bears NW and SE; leave juniper and pinon timber; enter bottom of Cottonwood Canyon.
16.00	Enter cottonwood timber, bears W and SE.
17.30	Cottonwood Creek, 2 chs. wide, flows E.
20.25	Enter cultivated land.
25.35	State Highway No. 29, bears N. 74° W. and S. 74° E.
35.60	Leave cultivated land; asc. over gradual S slope.

41

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- 37.10 Base of clay spur, bears NE and SW; asc. over S slope to cor.
- 40.22 The cor. of secs. 5, 6, 7 and 8, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of a portion of the subdivisional lines of T. 18 S., R. 7 E.
-
- From the cor. of secs. 4, 5, 8 and 9.
- West, bet. secs. 5 and 8.
- Asc. over steep E clay slope of spur.
- 0.40 Slope changes; asc. over SE slope.
- 2.90 Top of spur, slopes S; desc. over SW slope.
- 6.20 Base of spur, bears NW and SE; desc. over gradual SW slope.
- 10.40 Wash in bottom of ravine, drains S. 20° E.; asc. over NE slope.
- 19.00 Top of spur, slopes SE; thence along steep rocky S slope.
- 26.00 Bottom of draw, drains S; asc. over SE slope.
- 39.85 The $\frac{1}{4}$ sec. cor. of sec. 5 only, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of a portion of the subdivisional lines of T. 18 S., R. 7 E., from which the 1916 bearing trees
- A juniper, 30 ins. diam., bears N. 39 $\frac{3}{4}$ ° E., 53 lks. dist., mkd. $\frac{1}{4}$ S5 BT.
- A pinon, 6 ins. diam., bears N. 49 $\frac{1}{2}$ ° W., 38 lks. dist., mkd. $\frac{1}{4}$ S5 BT.
-
- West, beginning new measurement.
- Along gentle S slope through scattering juniper and pinon timber.
- 0.31 The $\frac{1}{4}$ sec. cor. of sec. 8 only, monumented with a sandstone, 18 x 8 x 8 ins., firmly set 10 ins. in the ground, mkd. $\frac{1}{4}$ on S face, from which the 1909 bearing tree
- A pinon, 12 ins. diam., bears S. 50° E., 19 lks. dist., mkd. $\frac{1}{4}$ S8 BT. (Record, S. 45 $\frac{1}{2}$ ° E., 20 lks.)
- At the corner point
- Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 18 S R 7 E
-
- $\frac{1}{4}$ S 8
1975
- Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 18 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- Along gentle S slope of bench.
- 2.25 W edge of bench, bears NE and SW; desc. over broken W slope.
- 14.50 Wash at base of descent, 15 lks. wide, 9 ft. deep, drains SW; thence over rolling land.
- 31.40 Wash in bottom of wide draw, 30 lks. wide, 2 ft. deep, drains S; leave scattering timber; asc. over SE slope.
- 39.84 The cor. of secs. 5, 6, 7 and 8.

General Description

The land encompassed in this survey is located about two miles west of the town of Orangeville. The northern portion of the township is drained by numerous washes draining south into Cottonwood Creek, which drains in a southeasterly direction through the north portion of the township. The southwest portion of the township drains partly north into Cottonwood Creek and east into several large washes draining southeast. Elevation ranges from about 6,000 feet above sea level in the Cottonwood Creek bottom to about 9,000 feet above sea level on the North Horn Mountain.

Access is by way of State Highway No. 29, which enters the township on the east boundary through section 24, and leaves the township on the west boundary through section 7. There are also numerous unimproved or lightly gravelled roads.

Most of the timber in this township consists of juniper and pinon on the bench lands and scattered cottonwood timber along the creek bottom.

The principal use of the area is livestock grazing with some cultivated land along the eastern portion of the township and along Cottonwood Creek.

The mean of a considerable number of observations of the magnetic declination throughout the township is 14°45' E.

CHAINS

Volume

#

R0596

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Glen B. Hatch	Supvy. Cadastral Surveyor
Daniel Mates	Surveying Technician
Frank Profazier	Surveying Aid
Stewart Burt	Surveying Aid
Don Buhler	Surveying Technician
John Hales	Surveying Aid
Kathryn Johnson	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(was)~~, Jerry L. Thomas

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 6th day of May, 1975, (I) ~~(was)~~ have dependently resurveyed the south 3 miles of the east boundary, the east 3 miles of the south boundary and a portion of the subdivisional lines of T. 18 S., R. 7 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(was)~~ and under (my) ~~(was)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 31, 1977
(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the south 3 miles of the east boundary, the east 3 miles of the south boundary and a portion of the subdivisional lines of T. 18 S., R. 7 E., Salt Lake Meridian, Utah

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 18 1978
(Date)

Bernard W. Foley
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE EAST BOUNDARY,

SECOND GUIDE MERIDIAN EAST

AND

SUBDIVISIONAL LINES OF

SECTIONS 13 AND 35,

TOWNSHIP 19 SOUTH, RANGE 7 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Jerry L. Thomas Supervisory Cadastral Surveyor

Under special instructions dated May 6, 19 75, approved May 7, 1975,

_____, which provided for the surveys included under U.S. Survey/Group
Number 559, and assignment instructions dated August 12, 19 75

Survey commenced August 21, 19 75

Survey completed November 7, 19 75

INDEX DIAGRAM

Township 19 S., Range 7 E.

6	5	4	3	2	1 5
7	8	9	10	11	12 4 8
18	17	16	15	14	7 13 3 6
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	11 10 35	9 36 1

Township 19 South, Range 7 East, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary, Second Guide Meridian East and sections 13 and 35 of the subdivisional lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah.

The east 4 miles of the south boundary, the east boundary, (Second Guide Meridian East) the east 2 miles of the north boundary and the east portion of the subdivisional lines were surveyed by A. D. Ferron in 1873. The north boundary of section 3 was surveyed and the north boundary of section 2 was resurveyed by F. W. Hanson in 1909. The west 2 miles of the south boundary and the west boundary were surveyed by C. S. Jarvis in 1910. The west 3 miles of the north boundary and the west portion of the subdivisional lines were surveyed, the south boundary of section 33, the east boundary of sections 12 and 13, the north boundary of sections 2 and 3, the north 3 miles of the west boundary and a portion of the subdivisional lines were retraced or resurveyed by J. W. Dougall in 1911. The south boundary was resurveyed by G. B. Hatch and A. L. Tuft in 1962.

The resurvey was executed in accordance with specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 559, Utah, dated May 6, 1975.

The direction of the lines of this survey was determined by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey. The vertical angles of measurements made on the slope were ascertained by a clinometer in good adjustment; the horizontal equivalents only are entered in the field notes.

Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners, bearing trees and other calls of the field note record. When duly identified the corner positions were remonumented and new bearing objects marked.

The geographic position of the southeast corner of T. 19 S., R. 7 E., as scaled from the quadrangle map, "Castle Dale, Utah," published by the Geological Survey in 1923, is as follows:

Latitude 39°07'02" N. Longitude 111°04'29" W.

The mean magnetic declination is 14°45' E.

Dependent Resurvey of a portion of the East Boundary,
Second Guide Meridian East of T. 19 S., R. 7 E.,
Salt Lake Meridian, Utah

(Restoring the survey executed by A. D. Ferron in 1873)

Beginning at the cor. of Tps. 19 and 20 S., Rs. 7 and 8 E., monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1962 resurvey of the N. Bdy. of T. 20 S., R. 7 E.

, 2
 Dependent Resurvey of a portion of the East Boundary,
 Second Guide Meridian East of T. 19 S., R. 7 E.,
 Salt Lake Meridian, Utah

CHAINS

N. 0°32' W., bet. secs. 31 and 36.

Over gentle rolling land through sparsely scattering shadscale.


3.55 Power line, 3 strands, bears N. 26° E. and S. 26° W.; along gentle E slope.

28.00 Begin descent over gradual N slope.

34.00 Bottom of descent, bears E and W; thence over nearly level land.

40.30 Point for the ¼ sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Set a cottonwood post, 6 ft. long, projecting 4 ft. above ground, alongside the iron post.

44.00 Fence line, bears E and W.

54.55 Cor. of fence, bears E and N; enter swamp land.

62.60 Base of low ridge, bears E and W; asc. over S slope.

69.60 Top of ridge, bears E and W; desc. over N slope.

80.60 Point for the cor. of secs. 25, 30, 31 and 36, determined longitudinally by the extension of a fence line to the S, and latitudinally at midpoint between right-of-way fences, bearing E and W. This position falls in N edge of gravel road, bearing E and W, and is accepted as the best available evidence of the original cor. position.

Set an iron post, 12 ins. long, 1 in. diam., 6 ins. below surface of the road with brass cap mkd. T19S R7E R8E S25 S30 S31 S36 1975.

from which

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, in E-W fence line, for a reference monument, bears S. 43°10' W., 57 lks. dist., with brass cap mkd. T19S R7E S36 RM 1975 and an arrow pointing to the cor.

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, in E-W fence line, for a reference monument, bears N. 23°01' W., 49 lks. dist., with brass cap mkd. T19S R7E S25 RM 1975 and an arrow pointing to the cor.

From the same point, the point for the corner of secs. 13, 18, 19 and 24 bears N. 0°25' W., 162.34 chs., herein-after described.

Dependent Resurvey of a portion of the East Boundary,
Second Guide Meridian East of T. 19 S., R. 7 E.,
Salt Lake Meridian, Utah

CHAINS

(Restoring the survey executed by A. D. Ferron in 1873
and the retracement executed by J. W. Dougall in 1911)

Point for the cor. of secs. 13, 18, 19 and 24, determined longitudinally by a fence line to the north and latitudinally by the extension of a fence line to the east, falls in dirt road bearing E and W. This position agrees with survey completed by Private Surveyors, Coon, King and Knowlton, Consulting Engineers and Land Surveyors, Salt Lake City, Utah, and is accepted as the best available evidence of the original cor. position.

Set an iron post, 12 ins. long, 1 in. diam., 8 ins. below surface of the road with brass cap mkd. T19S R7E R8E S13 S18 S19 S24 1975.

from which

An iron post, 2 ins. diam., extending 6 ins. above ground, for a reference monument, bears N. 57°16' E., 60 lks. dist., with brass cap mkd. Ref. Cor. T19S R7E R8E S13 S18 S19 S24 1975 39.68 dist. and an arrow pointing to the cor. This Reference Monument was set by Coon, King and Knowlton, Private Surveyors. No improvements can be made on this monument.

An iron post, 2 ins. diam., extending 6 ins. above ground, for a reference monument, bears S. 57°16' W., 69 lks. dist., with brass cap mkd. Ref. Cor. T19S R7E R8E S13 S18 S19 S24 1975 45.42 dist. and an arrow pointing to the cor. This Reference Monument was set by Coon, King and Knowlton, Private Surveyors. No improvements can be made on this monument.

N. 0°27' W., bet. secs. 13 and 18.

Over nearly level land.

0.92 Cor. of fences, extending E, W and N; along fence line.

40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, falls at the cor. of fences, extending E, W and S. This position is harmoniously related to existing original cors., and is accepted as the best available evidence of the original corner position.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, along north edge of cedar fence post, with brass cap mkd.

T 19 S
R 7 E R 8 E
|
½
|
S 13 | S 18
|
1975

N. 0°35' W., beginning new measurement.


Dependent Resurvey of a portion of the East Boundary,
Second Guide Meridian East of T. 19 S., R. 7 E.,
Salt Lake Meridian, Utah

CHAINS

- Asc. over gradual S slope.
- 13.45 Gravel road, bears N. 45° W. and S. 45° E.
- 15.00 Top of spur, slopes SE; desc. over NE slope.
- 22.00 Bottom of draw, drains SE; asc. over SW slope.
- 26.00 Top of ridge, bears NW and SE; desc. over NE slope.
- 39.00 Small wash in bottom of hollow, drains SE; asc. over gradual S slope.
- 40.96 Point for the cor. of secs. 7, 12, 13 and 18, falls at the cor. of fences, extending N and W. This position is harmoniously related to existing original cors., and is accepted as the best available evidence of the original corner position.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, along E edge of cedar fence post, with brass cap mkd.




N. 0°28' W., bet. secs. 7 and 12.

Asc. over gradual S slope along fence line.

- 22.50 Top of spur, slopes E; desc. over N slope.
- 30.50 Bottom of draw, drains E; asc. over S slope.
- 37.50 Top of ridge, bears E and W; desc. along E slope.
- 39.94 The ¼ sec. cor. of secs. 7 and 12, monumented with a sandstone, 20 x 14 x 8 ins., firmly set 10 ins. in the ground, mkd. ¼ on W face and in a scattering mound of stone.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Corner is set in old fence line, bearing N and S, with new fence line, bearing N and S, 7 lks. W of cor.

5
 Dependent Resurvey of a portion of the East Boundary,
 Second Guide Meridian East of T. 19 S., R. 7 E.,
 Salt Lake Meridian, Utah

CHAINS

- N. 0°31' W., beginning new measurement.
 Desc. along E slope along fence line.
 5.00 Bottom of draw, drains E; asc. over S slope.
 10.00 Top of spur, slopes E; desc. over NE slope.
 19.00 Small wash in bottom of hollow, drains SE; asc. over S slope. End of fence line.
 24.00 Rim of hollow, bears E and W; asc. over gradual S slope.
 28.36 Cor. of fences, extending N and E. Along fence line.
 40.21 The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 20 x 12 x 6 ins., firmly set 10 ins. in the ground, mkd. 5 notches on S and 1 notch on N edge, surrounded by a scattering mound of stone.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T 19 S			
R 7	E R	8	E
S 1		S 6	
S 12		S 7	
1975			

Deposit the mkd. stone alongside the iron post.

Corner is set in fence line, bearing N and S.

(Restoring the survey executed by A. D. Ferron in 1873)

N. 0°24' W., bet. secs. 1 and 6.


Asc. over gradual S slope through scattering shadscale and native grasses; along fence line.

- 14.00 N rim of Johnson Bench, bears NW and SE; desc. over NE slope.
 18.00 Bottom of draw, drains E; asc. over S slope.
 23.00 Top of spur, slopes E; desc. over N slope.
 28.00 Small wash in bottom of hollow, drains SE; asc. over SW slope; leave fence line.
 31.00 Enter pasture land.
 40.59 Point for the ¼ sec. cor. of secs. 1 and 6, falls at the cor. of fences, extending E, W and N. This position is harmoniously related to existing original cors., and is accepted as the best available evidence of the original corner position.

At the corner point

Dependent Resurvey of a portion of the East Boundary,
Second Guide Meridian East of T. 19 S., R. 7 E.,
Salt Lake Meridian, Utah

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground along S edge of cedar fence post, with brass cap mkd.

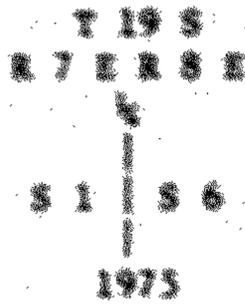

S. 0°35' W., beginning new measurement.

Over nearly level pasture land along fence line.


40.00 Cor. of fences, extending E, W and S.

40.23 Gravel road, bears E and W.

40.30 Point for the cor. of Tps. 18 and 19 S., Rs. 7 and 8 E., determined longitudinally by a fence line to the S, and latitudinally by a fence line, bearing E and W. This position agrees with local residents of the area, and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

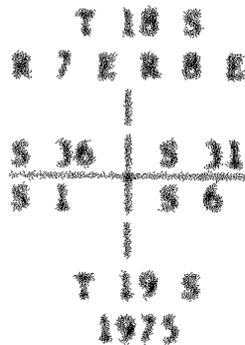

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, S of iron post.

Corner is set under fence line, bearing E and W, and in the bottom of the old Western Ditch.

Dependent Resurvey of a portion of the Subdivisional
Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

(Restoring the survey executed by A. D. Ferron in 1873)

From the cor. of secs. 13, 18, 19 and 24, E. My., here-
before described.

S. 89°00' W., bet. secs. 13 and 24.

Over nearly level land along dirt road.

Dependent Resurvey of a portion of the Subdivisional Lines of T. 19 S. R. 7 E. Salt Lake County, Utah

CHAINS
40.66

Point for the 1/4 sec. cor. of secs. 13 and 24, falls on north edge of dirt road, midpoint between right-of-way fences and in line with fence line to S. This position agrees with survey completed by Private Surveyors, Coon, King and Knowlton and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E

1/4 S 13
S 24

1975

N. 89°00' W., beginning new measurement.

Over nearly level land along N edge of dirt road.

30.50

Road, curves N. 88°30' W.; thence along S side of fence, bearing E and W.

40.53

The cor. of secs. 13, 14, 23 and 24, monumented with a brass tablet, imbedded in a cylinder of concrete, 7 ins. diam., 6 ins. above surface of ground. This marker was set by Coon, King and Knowlton, Private Surveyors, is harmoniously related to existing original corners, and is accepted as the best available evidence of the original corner position. Brass tablet is marked

T 19 S R 7 E

S 14 | S 13
S 23 | S 24

1975

King RLS 1929

No improvements can be made on this cor.

(Restoring the survey executed by A. D. Ferron in 1873 and the retracement executed by J. W. Dougall in 1911)

N. 0°24' W., bet. secs. 13 and 14.

Over nearly level land.

0.14

Fence line, bears E and W.

0.44

Dirt road, bears N. 88°30' W. and S. 88°30' E.

0.75

Cor. of fences, extending E, W and N; along fence line separating irrigated land.

40.73

Point for the 1/4 sec. cor. of secs. 13 and 14, determined by cor. of fences, extending N, S, E and W. This position is harmoniously related to an existing original cor., and is accepted as the best available evidence of the original corner position.

Dependent Resurvey of a portion of the Subdivisional
Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E
|
 $\frac{1}{4}$
|
S 14 | S 13
|
1975

Corner is set by small wood panel used as gate for sheep.

N. $0^{\circ}54'$ W., beginning new measurement.

Over nearly level land along fence line separating pasture land.

- 33.00 Leave fence line and pasture land; asc. over gentle S slope.
- 40.50 Top of E slope of knoll; desc. along E slope.
- 40.73 The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, 2 ins. diam., projecting 10 ins. above ground, with brass cap mkd.

T 19 S R 7 E
|
S 11 | S 12
S 14 | S 13
|
1911

Corner is located on a NE slope, 5 ft. below top of clay knoll.

(Restoring the survey executed by A. D. Ferron in 1873)

From the cor. of secs. 7, 12, 13 and 18, E. bdy., heretofore described.

N. $88^{\circ}19'$ W., bet. secs. 12 and 13.

Desc. along gentle S slope along fence line.

- 3.00 Small wash in bottom of hollow, drains SE; asc over gradual NE slope.
- 23.00 Top of spur, projects SE; desc. along gentle S slope.
- 38.88 Cor. of fences, extending S. $88^{\circ}19'$ E. and S. 72° W.
- 40.41 Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, determined longitudinally by the extension of a fence line to the S, and latitudinally by the extension of a fence line to the E. This position is harmoniously related to an existing original cor., and is accepted as the best available evidence of the original corner position.

At the corner point

Dependent Resurvey of a portion of the Subdivisional
Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E

¼ $\frac{S\ 12}{S\ 13}$

1975

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of corner.

Cor. of fences, extending S and N. 72° E., bears S. 50 lks. dist.

N. 89°05' W., beginning new measurement.

Desc. over gentle SW slope.

8.00 Enter cultivated land.

28.00 Leave cultivated land; enter scattering sagebrush and greasewood.

29.00 Wash, 25 lks. wide, 6 ft. deep, drains SE; asc. over gradual NE slope.

40.90 The cor. of secs. 11, 12, 13 and 14.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., is monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1962 dependent resurvey of the N. bdy. of T. 20 S., R. 7 E.

N. 0°17' E., bet. secs. 35 and 36.

Desc. over steep NW slope, through scattering shadscale and native grasses.

5.10 Bottom of draw, drains SW; asc. over steep S slope.

7.10 Top of narrow ridge, bears E and W; desc. over NE slope.

14.30 Bottom of draw, drains NE; asc. over S slope of clay ridge.

22.35 Top of ridge, bears E and W; desc. over NE slope.

40.00 Base of ridge, bears E and W; desc. over gentle N slope.

40.39 Point for the ¼ sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E

¼
|
S 35 | S 36

1975

Dependent Resurvey of a portion of the Subdivisional
Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- Set a cottonwood post, 5 ft. long, extending 3 ft. above ground, alongside the iron post.
- 41.05 Dirt road, bears E and W.
- 41.36 Fence line, bears NE and SW.
- 80.31 Cor. of fences, extending S and W.
- 80.78 Point for the cor. of secs. 25, 26, 35 and 36, determined longitudinally by the extension of a fence line to the S, and latitudinally at midpoint between right-of-way fences, bearing E and W. This position falls in N edge of gravel road, bearing E and W, and is accepted as the best available evidence of the original cor. position.
- Set a spike, 6 ins. long, 6 ins. below surface of road.
- from which
- An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 39°20' W., 61 lks. dist., with brass cap mkd. T19S R7E S35 RM 1975 and an arrow pointing to the cor.
- An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 68° W., 73½ lks. dist., with brass cap mkd. T19S R7E S26 RM 1975 and an arrow pointing to the cor.
-
- From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., is monumented with an iron post, 2½ ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1962 resurvey of the N. bdy. of T. 20 S., R. 7 E.
- N. 0°11' W., bet. secs. 34 and 35.
- Over gentle rolling land through scattering shadscale and native grasses.
- 1.20 Irrigation canal, 10 lks. wide, flows SE.
- 1.50 Dirt road, bears NW and SE.
- 25.76 State Highway No. 10, 44 lks. wide, bears N. 50°22' E., and S. 50°22' W.
- 33.95 Irrigation canal, 20 lks. wide, flows E.
- 40.25 Point for the ¼ sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 28 ins. long, 2½ ins. diam., over broken glass, 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E
 ¼
 S 34 | S 35
 1975

Dependent Resurvey of a portion of the Subdivisional Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

- Set a cottonwood post, 4 ft. long, projecting 2 ft. above ground, alongside the iron post.
- Asc. over gradual S slope.
- 54.00 Base of gravel ridge, bears NE and SW; asc. over steep SE slope.
- 61.30 Top of ridge, bears NE and SW; desc. over broken NW slope.
- 80.25 Top of small narrow spur, slopes NW; desc. over NE slope.
- 80.50 The cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, mkd. as described in the official record of the 1911 resurvey of a portion of the subdivisional lines of T. 19 S., R. 7 E.

From the cor. of secs. 25, 26, 35 and 36.

N. 89°56' W., bet. secs. 26 and 35.

Over nearly level land, along dirt road through Clawson townsite.

- 12.00 Main intersection of Clawson townsite, with roads extending N, S, E and W.
- 27.25 State Highway No. 10, 44 lks. wide, bears N. 23°12' E., and S. 23°12' W. and the intersection of a dirt road, extending E; leave Clawson townsite.
- 28.20 Cor. of fences, paralleling State Highway No. 10, and extending W.
- 40.28 Point for the ¼ sec. cor. of secs. 26 and 35, at cor. of fences, extending N, S, E and SW. This position is harmoniously related to existing original corners and is accepted as the best available evidence of the original corner position.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 19 S R 7 E

¼	S 26
	S 35

1975

S. 89°58' W., beginning new measurement.

Asc. over gentle NE slope.

- 14.30 Irrigation canal, 20 lks. wide, flows NW.
- 15.00 Base of clay ridge, bears N and S; asc. over SE slope.
- 22.40 Top of ridge, bears NE and SW; desc. over steep NW slope.
- 28.50 Bottom of draw, drains NW; thence along N slope.

Dependent Resurvey of a portion of the Subdivisional
Lines of T. 19 S., R. 7 E., Salt Lake Meridian, Utah

CHAINS

36.40 Top of spur, slopes N; desc. over NW slope.
39.00 Bottom of draw, drains N; asc. over NE slope.
41.19 The cor. of secs. 26, 27, 34 and 35.

General Description

Township 19 South, Range 7 East, is situated about 3 miles northeast of Ferron, Utah. Clawson, Utah is located in sections 26 and 35. In the portion resurveyed the elevation varies from 5,900 to 6,000 feet above sea level. The soil varies from clay to clay loam with some loam and gravel in portions of section 35.

There is some cultivated land in the portion resurveyed. State Highway No. 10, crosses through section 35, with numerous dirt roads providing access to the farm lands.

An average number of readings throughout the area resurveyed gives a mean magnetic declination of $14^{\circ}45'$ E.

CERTIFICATE OF SURVEY

(I) ~~XXX~~, Jerry L. Thomas

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 6th day of May, 1975, (I) ~~XXX~~ have dependently resurveyed a portion of the east boundary, Second Guide Meridian East and sections 13 and 35 of the subdivisional lines of T. 19 S., R. 7 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~XXX~~ and under (my) ~~XXX~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 5, 1975

(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary, Second Guide Meridian East and sections 13 and 35 of the subdivisional lines of T. 19 S., R. 7 E.

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 18 1978

(Date)

Bernard W. [Signature]
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

~~, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY OF THE TOWNSHIP

AND

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 27 SOUTH, RANGE 18 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,

_____, which provided for the surveys included under ~~XXXXXX~~ Group
Number 485, and assignment instructions dated JULY 16, 1965.

Survey commenced AUGUST 24, 1965

Survey completed DECEMBER 2, 1965

INDEX DIAGRAM

Township 27
~~28~~ SOUTH, Range 18 EAST

6	7	5	4	3	2	1
		6	5			
7	8	9	10	11	12	2
			4	4	3	
18	17	16	15	14	13	2
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary of the township and the survey of a portion of the subdivisional lines within Township 27 South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south boundary was surveyed by Chester A. Swiatek, Cartographer (Cadastral) and Leland P. Lewis, Cartographic Survey Aid, in 1954, as described in the official record of the north boundary of Tp. 28 S., R. 18 E., and shown upon the official plat of that township, accepted June 20, 1955. The east boundary was surveyed by Andrew D. Nelson, Cartographer (Cadastral), and Leland P. Lewis, Cartographic Survey Aid, in 1954, as described in the official record of the west boundary of Tp. 27 S., R. 19 E., and shown upon the official plat of that township, accepted June 20, 1955. The west boundary was surveyed by Chester A. Swiatek, Cartographer (Cadastral), in 1954, as described in the official record of the east boundary of Tp. 27 S., R. 17½ E., and shown upon the official plat of that township, accepted June 20, 1955. The north boundary was surveyed by Chester A. Swiatek, Cartographer (Cadastral) and Leland P. Lewis, Cartographic Survey Aid, in 1954, as described in the official record of the south boundary of Tp. 26 S., R. 18 E., and shown upon the official plat of that township, accepted June 9, 1955. The south boundary of fractional Tp. 26 S., R. 17½ E., was surveyed by Leland P. Lewis, Cartographic Survey Aid, in 1954, and shown upon the official plat of that township, accepted June 9, 1955. A portion of the subdivisional lines were surveyed by Chester A. Swiatek, Cartographer (Cadastral) and Leland P. Lewis, Cartographic Survey Aid, in 1954, as shown upon the official plat accepted June 20, 1955.

These surveys were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.


The data furnished with the Special Instructions give the geographic position of the witness corner for the 1/4 section corner of sections 13 and 18 on the east boundary of the township, as: Latitude 38° 27.2' N., and Longitude 109° 52.8' W. The mean magnetic declination is 15° East.

Dependent Resurvey of a Portion of the East Boundary
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Reestablishment of the Survey Executed by
Andrew D. Nelson, Cartographer (Cadastral)
and Leland P. Lewis, Cartographic Survey Aid
in 1954

The witness 1/4 sec. cor. of secs. 13 and 18, which is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3 ft. base, 1½ ft. high, with regulation (G.L.O.) brass cap mkd.




NORTH, through Tps. 27 S., between RS. 18 and 19 E., and between secs. 13 and 18

26.37 The point for the witness corner of secs. 7, 12, 13, and 18, which is determined at proportionate distance; there is no evidence of the original corner. This point is located on steep southwest slope. I did not remonument this witness corner point.

35.12 The point for the corner of secs. 7, 12, 13, and 18, which is determined at proportionate distance.

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.



1965

NORTH, between secs. 7 and 12

Descend 250 ft. over steep north slope.

6.00 Draw, drains west, ascend 720 ft. over broken southwest slope.

Dependent Resurvey of a Portion of the East Boundary
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

- 23.00 spur, slopes west, descend 810 ft. over broken north slope.
- 39.98 The 1/4 sec. cor. of secs. 7 and 12 is monumented with an iron post, 1-inch in diam., firmly set, projecting 9 ins. above the surface of the ground, and in a collar of stone, with regulation (G.L.O.) brass cap mkd.

1/4
S 12 | S 7

1954

Discontinue the dependent resurvey of the range line at this corner.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

From the corner of secs. 7, 12, 13, and 18 on the east boundary of the township, herefore described.

WEST, between secs. 12 and 13

Descend 250 ft. along broken north slope.

- 15.00 Draw, drains N. 20° W., ascend 400 ft. over broken northeast slope.

- 36.00 Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, for the witness 1/4 sec. cor. of secs. 12 and 13, with brass cap mkd.

W C
T27S R18E
1/4 ← S 12
S 13

1965

Ascend 600 ft. over broken northeast slope.

- 40.00 The true point for the 1/4 sec. cor. of secs. 12 and 13 is located on rough and broken northeast slope, an unsafe location for a monument.

Thence, continue over rough and broken land.

- 80.00 The point for the cor. of secs. 11, 12, 13, and 14.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R18E
S 11 | S 12
S 14 | S 13

1965

Land, rough and broken.
Soil, sandy and rocky.
No timber or undergrowth.

WEST, between secs. 11 and 14

Over rough and broken land.

40.00 The point for the 1/4 sec. cor. of secs. 11 and 14.

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R18E
1/4 S 11
S 14

1965

47.00 Wash in Trail Canyon, drains northwest.

80.00 The point for the cor. of secs. 10, 11, 14, and 15.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 5 ft. base, to the top, with brass cap mkd.

T27S R18E
S 10 | S 11
S 15 | S 14

1965

Land, rough and broken.
Soil, sandy and rocky.
No timber or undergrowth.

N. 0° 02' W., between secs. 10 and 11

Over rough and broken land.

22.50 Wash in Trail Canyon, drains northwest.

40.18 The point for the 1/4 sec. cor. of secs. 10 and 11.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R18E

1/4

S 10 | S 11

1965

67.30 Wash in Taylor Canyon, 150 lks. wide, 20 ft. deep, drains northwest.

80.36 The cor. of secs. 2, 3, 10, and 11 is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 9 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T27S R18E

S 3 | S 2

S 10 | S 11

1954

Land, rough and broken.
Soil, sandy and rocky.
No timber or undergrowth.

The cor. of secs. 3, 4, 9, and 10 is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 11 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T27S R18E

S 4 | S 3

S 9 | S 10

1954

S. 89° 50' W., between secs. 4 and 9

Over broken land, crossing a series of draws and dry washes.

0.15 Wash, drains north.

3.30 Wash, drains north.

19.60 Wash, drains north.

20.90 Wash, drains north.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS	
40.00	<p>The point for the 1/4 sec. cor. of secs. 4 and 9.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T27S R18E 1/4 $\frac{S\ 4}{S\ 9}$</p> <p style="text-align: center;">1965</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, north of the corner.</p>
48.00	Wash, drains north.
54.75	Wash, drains north.
65.80	Wash, drains north.
70.70	Base of ascent, bears northwest and southeast; ascend 140 ft. over northeast slope.
74.60	Rim (eastern), 60 ft. high, bears northwest and southeast.
77.65	Rim (western), 20 ft. high, bears N. 70° E. and S. 70° W., descend 70 ft. along broken north slope.
80.00	<p>The point for the cor. of secs. 4, 5, 8, and 9.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T27S R18E $\frac{S\ 5\ S\ 4}{S\ 8\ S\ 9}$</p> <p style="text-align: center;">1965</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, west of the corner.</p> <p>Land, rough and broken. Soil, sandy and rocky. No timber or undergrowth.</p> <hr/> <p>S. 89° 50' W., between secs. 5 and 8</p> <p>Along broken north slope.</p>
22.10	Draw, drains north.
40.00	<p>The point for the 1/4 sec. cor. of secs. 5 and 8.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T27S R18E
1/4 $\frac{S}{S} \frac{5}{8}$

1965

This corner is located near the head of a small box canyon, that drains north.

- 53.50 Draw, drains north, ascend 90 ft. along broken north slope.
- 62.40 Ridge spur, slopes north, descend 60 ft. along broken north slope.
- 70.30 Draw, drains north.
- 80.00 The point for the cor. of secs. 5, 6, 7, and 8.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 5 ft. base, to the top, with brass cap mkd.

T27S R18E
 $\frac{S}{S} \frac{6}{7} | \frac{S}{S} \frac{5}{8}$

1965

Land, rough and broken.
Soil, sandy and rocky.
No timber or undergrowth.

N. 0° 03' W., between secs. 5 and 6

Descend over steep and rocky northeast slope.

- 25.00 Wash in Taylor Canyon, drains west, ascend along broken west slope.
- 40.00 The point for the 1/4 sec. cor. of secs. 5 and 6.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R18E
1/4
S 6 | S 5

1965

- 65.20 Wash, drains southwest, ascend over rough and broken south slope.
- 77.00 Spur, slopes southwest, ascend over broken south slope.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

80.00 The point for the 80 1/16 sec. cor. of secs. 5 and 6.
Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R18E
1/16 80
S 6 | S 5

1965

86.58 Intersect the south boundary of Tp. 26 S., R. 18 E., (the north boundary of this township), the point for the closing corner of secs. 5 and 6.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T26S
S 31
S 6 | S 5
C | C
T27S R18E

1965

From this closing corner, the south 1/4 sec. cor. of sec. 31, Tp. 26 S., R. 18 E., bears WEST, 10.47 chs. distant, and is monumented with an iron post, 1-inch in diam., firmly set, projecting 17 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

1/4 S 31

1954

From this same closing corner, the cor. of secs. 31 and 32, on the south boundary of Tp. 26 S., R. 18 E., bears EAST, 29.53 chs. distant, and is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 9 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T26S R18E
S 31 | S 32
S 5
T27S

1954

Township 27 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

GENERAL DESCRIPTION

The elevation varies from 4060 ft. above sea level near the point for intersection of the section line between sections 5 and 6 and the wash within Taylor Canyon to 5250 ft. above sea level near the corner of sections 11, 12, 13, and 14. The soil is sandy and rocky. For the most part, there is no timber nor undergrowth.

#

R0596

Volume


#

R0596

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Gerald W. Hochstrasser, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65, (I) ~~(We)~~ have dependently resurveyed a portion of the east boundary of the township and surveyed a portion of the subdivisional lines within Township 27 South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

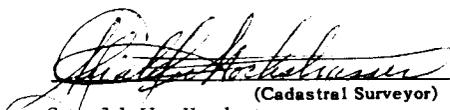June 22, 1976
(Date) 
(Cadastral Surveyor)
Gerald W. Hochstrasser

(Date) _____
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary of the township and the survey of a portion of the subdivisional lines Township 27 South, Range 19 East, of the Salt Lake Meridian, Utah executed by Gerald W. Hochstrasser Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date) 
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.

(Date) _____
(Chief, Division of Cadastral Survey) GPO 649-628

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY

AND

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 28½ SOUTH, RANGE 18 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARP IN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,


_____, which provided for the surveys included under ~~U.S. Survey~~/Group
Number 485, and assignment instructions dated MARCH 31, 1966.

Survey commenced JUNE 27, 1967

Survey completed JULY 6, 1967

INDEX DIAGRAM

Township $28\frac{1}{2}$ SOUTH Range 18 EAST

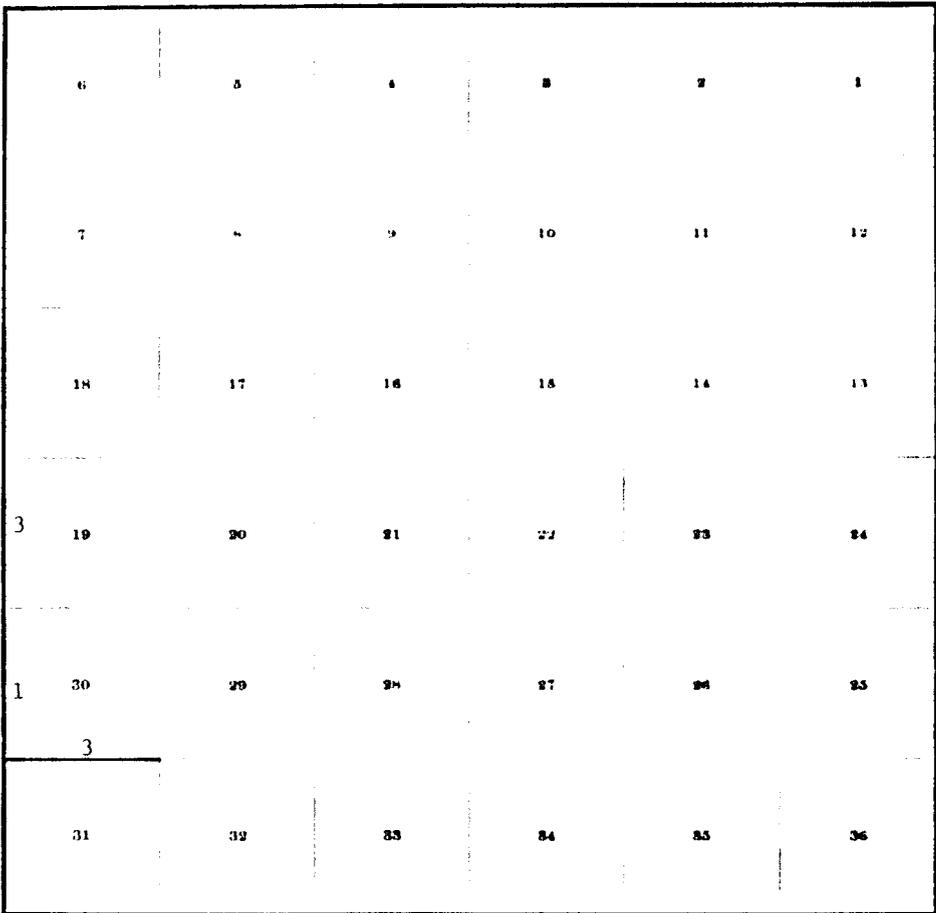

Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the west boundary of the township and the survey of a portion of the subdivisional lines of Township 28½ South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: A portion of the west boundary was surveyed by Lynn G. Edmonds, Cartographic Survey Aid, in 1954. The south boundary and a portion of the subdivisional lines were surveyed by Paul W. Russell, Cartographic Survey Aid, in 1955, as shown upon the official plat accepted April 11, 1956.

The dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The geographic position for the southwest corner of this township taken from the official plat, accepted April 11, 1956, is: Latitude 38° 19' 32" N., and Longitude 109° 59' 45" W. The mean magnetic declination is 15° East.

Dependent Resurvey of a Portion
of the West Boundary
Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Lynn G. Edmonds, Cartographic Survey Aid
in 1954

Beginning at the cor. of secs. 25, 30, 31, and 36 on the west boundary of the township, which is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 5 ins. above the surface of the ground, with brass cap mkd.

T28S T28½S
R17E | R18E
S 25 | S 30
S 36 | S 31

1954

substantiated by:

A mound of stone, 3 ft. base, 2 ft. high, west of the corner.

Dependent Resurvey of a Portion
of the West Boundary
Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 11' E., through Tps. 28 and 28½ S., and between Rs. 17 and 18 E., and between secs. 25 and 30

Over gently rolling land.

18.60 Draw, drains northeast; ascend over gentle southeast slope.

19.17 Set a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., 6 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, for witness point No. 2, secs. 25 and 30, with brass cap, 1½ ins. in diam., mkd.

WP 2
T28S T28½S
R17E | R18E
S 25 | S 30

1967

40.00 The 1/4 sec. cor. of secs. 25 and 30, is monumented with an iron post, 2½ ins. in diam., firmly set, in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

1/4
S 25 | S 30
1954

N. 0° 13' E., beginning new measurement

Over gently rolling land, through sagebrush.

13.80 Low spur, slopes east. At this point on line, set a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 25 and 30, with brass cap, 1½ ins. in diam., mkd.

WP 1
T28S T28½S
R17E | R18E
S 25 | S 30

1967

40.00 The cor. of secs. 19, 24, 25, and 30, is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 5 ins. above the surface of the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the West Boundary
Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T28S T28½S
R17E | R18E
S 24 | S 19
S 25 | S 30

1954

N. 0° 06' E., between secs. 19 and 24

Over gently rolling land, along top of low spur, slopes north.

- 13.13 The north end of spur. At this point on line, set a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., on bedrock and in a mound of stone, 2½ ft. base, to the top, for witness point No. 1, secs. 19 and 24, with brass cap, 1½ ins. in diam., mkd.

WP 1
T28S T28½S
R17E | R18E
S 24 | S 19

1967

Descend over north slope.

- 21.70 Base of main descent; thence, over barren sandstone.

- 40.01 The 1/4 sec. cor. of secs. 19 and 24, is monumented with an iron post, 1-inch in diam., firmly set, projecting 9 ins. above the surface of the ground, with regulation (G.L.O.) brass cap mkd.

1/4
S 24 | S 19

1954

Discontinue the dependent resurvey of the range line at this corner.

Survey of a Portion of the Subdivisional Lines
Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

The cor. of secs. 29, 30, 31, and 32 which is monumented with an iron post, 1-inch in diam., firmly set, projecting 10 ins. above the surface of the ground, with regulation (G.L.O.) brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 28½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T28½S R18E
S 30 | S 29
S 31 | S 32

1955

N. 89° 56' W., between secs. 30 and 31

Over nearly level, barren sandstone benches.

40.00 The point for the 1/4 sec. cor. of secs. 30 and 31.

Set an iron post, 28 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T28½S R18E
1/4 S 30
S 31

1967

Over gently rolling land, through sagebrush and grass.

59.32 Set a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., 12 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, for witness point No. 1, secs. 30 and 31, with brass cap, 1½ ins. in diam., mkd.

WP 1
T28½S R18E
S 30
S 31

1967

78.82 The cor. of secs. 25, 30, 31, and 36 on the west boundary of the township.

GENERAL DESCRIPTION


The area of this survey is located along the Millard Canyon Benches, with drainage into the Green River. The area of this survey has an elevation of approximately 4400 ft. above sea level. The soil is sandy and rocky. No timber; undergrowth, sagebrush.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65, (I) ~~(We)~~ have dependently resurveyed a portion of the west boundary and surveyed a portion of the subdivisional lines, Township 28½ South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 20, 1976
(Date)


(Cadastral Surveyor)
Ray Harpin

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the west boundary and the survey of a portion of the subdivisional lines, Township 28½ South, Range 18 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-628

Volume

#

R0596

Volume

#

R0596

INDEX DIAGRAM

Township 29 SOUTH, Range 18 EAST,

6 10	5 9	4	8	2	1
7	8 8	9	10	11	12
18	17 7	16 6	15	14	13
19	20	21 5	22	23	24
30	29	28 5	27 4	26	25
31	32	33	34 3 2	35	36

Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the south boundary and a portion of the subdivisional lines, Township 29 South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: A portion of the south boundary and a portion of the subdivisional lines were surveyed by Paul K. Russell, Cartographic Survey Aid, in 1955, as shown upon the official plat accepted April 11, 1956. A portion of the north boundary was surveyed by Paul K. Russell, Cartographic Survey Aid, in 1955, as shown upon the official plat of Tp. 28½ S., R. 18 E., and was accepted April 11, 1956.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of the corner of sections 34 and 35 on the south boundary of the township, as: Latitude 38° 14.3' N., and Longitude 109° 55.4' W. The mean magnetic declination is 15° East.

Survey of a Portion of the South Boundary
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

The witness 1/4 sec. cor. of secs. 4 and 33 on the south boundary of the township, which is monumented with an iron post, 2½ ins. in diam., firmly set, over a cross (+) chiseled in bedrock, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

1/4 $\frac{S \ 33}{S \ 4}$ → W C

1955

The true point for the 1/4 sec. cor. of secs. 4 and 33 on the south boundary of the township, which is determined at record (EAST) course and record (0.57 chs.) distance from the above witness 1/4 sec. corner.

Survey of a Portion of the South Boundary
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

EAST, on a random line, making proper offsets to the north from the tangent to the parallel at intervals of 40.00 chs. distance, setting temporary 1/4 sec. cor. and sec. cors. between Townships 29 and 30 South, and through Range 18 East, and between sections 4 and 33

Descend over rough and broken east slope

40.00 The point for the cor. of secs. 3, 4, 33, and 34, north 0.5-link from tangent.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T29S R18E
S 33 | S 34

S 4 | S 3
T30S

1967

This corner is located within Jasper Canyon.

EAST, along the south boundary of section 34, continue on the heretofore described tangent to the parallel.

Descend over rough and broken east slope

40.00 The point for the south 1/4 sec. cor. of sec. 34, north 1-link distance from the tangent.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R18E
1/4 S 34

1967

Continue on the heretofore described tangent to the parallel, bears S. 89° 59.3' E.

79.27 At a point north 2 lks. distance from the tangent.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 4 ft. base, to the top, for the witness cor. of secs. 34 and 35, with brass cap mkd.

W C
T29S R18E
S 34 | S 35
 →
S 2
T30S

1967

Survey of a Portion of the South Boundary
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

80.00 The true point for the cor. of secs. 34 and 35, north 2 lks. distance from the tangent, on the south boundary of the township is located on the sloping face of an inaccessible boulder and impracticable to monument.

Discontinue the survey of the township line at this corner.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

Continuing from the true point for the cor. of secs. 34 and 35 on the south boundary of the township

N. 0° 01' W., between secs. 34 and 35

Over rough and broken canyons.

23.29 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 34 and 35, with brass cap mkd.

WP 1
T29S R18E
S 34 | S 35

1967

This monument is located on the west face of a boulder, 4 ft. high.

40.00 The point for the 1/4 sec. cor. of secs. 34 and 35.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T29S R18E
1/4
S 34 | S 35

1967

80.00 The point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 28 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

4
 Survey of a Portion of the Subdivisional Lines
 Township 29 South, Range 18 East
 Salt Lake Meridian, Utah

CHAINS

T29S R18E
S 27 | S 26
 S 34 | S 35

1967

This corner is located on a bench, 30 lks. west of a canyon rim.

Discontinue the regular order of survey at this corner.

WEST, between secs. 27 and 34

Ascend over broken ledges.

7.00 Sandstone spur, slopes south. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 4 ft. base to the top, for witness point No. 1, secs. 27 and 34, with brass cap mkd.

WP 1
 T29S R18E
S 27
 S 34

1967

Over broken canyons, ledges, and spurs.

40.00 The point for the 1/4 sec. cor. of secs. 27 and 34.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T29S R18E
 1/4 S 27
 S 34

1967

54.51 Narrow spur, slopes northeast. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3½ ft. base, to the top, for witness point No. 2, secs. 27 and 34, with brass cap mkd.

WP 2
 T29S R18E
S 27
 S 34

1967

80.00 The point for the cor. of secs. 27, 28, 33, and 34.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 4 ins. in the ground, over a cross (+) chiseled in sandstone, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R18E
S 28 | S 27
S 33 | S 34

1967

This corner is located in a pocket, overlooking a deep canyon.

N. 0° 02' W., between secs. 27 and 28

Over broken canyons and ledges.

40.00 The point for the 1/4 sec. cor. of secs. 27 and 28. This corner is located on an inaccessible southeast slope. I did not monument.

45.59 Narrow sandstone ridge, bears east and west. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on a boulder, and in a mound of stone, 4 ft. base, to the top, for the witness 1/4 sec. cor. of secs. 27 and 28, with brass cap mkd.

W C
T29S R18E
1/4
S 28 | S 27
↓

1967

80.00 The point for the cor. of secs. 21, 22, 27, and 28.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T29S R18E
S 21 | S 22
S 28 | S 27

1967

This corner is located on steep northeast slope.

N. 0° 02' W., between secs. 21 and 22.

Over a series of canyons and broken ledges.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS	
15.92	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 21 and 22, with brass cap mkd.</p> <p style="text-align: center;">WP 1 T29S R18E S 21 S 22 1967</p> <p>This monument is located on a bench overlooking a deep canyon.</p>
40.00	<p>The point for the 1/4 sec. cor. of secs. 21 and 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">T29S R18E 1/4 S 21 S 22 1967</p>
80.00	<p>The point for the cor. of secs. 15, 16, 21, and 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.</p> <p style="text-align: center;">T29S R18E S 16 S 15 S 21 S 22 1967</p> <p>This corner is located on a gentle north slope.</p>
	<p>WEST, between secs. 16 and 21</p> <p>Over broken canyons and inaccessible boulders and sandstone formations.</p>
19.95	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., 12 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for witness point No. 1, secs. 16 and 21, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

WP 1
T29S R18E
S 16
S 21

1967

Ascend 450 ft. over broken canyons and ledges.

40.00 The point for the 1/4 sec. cor. of secs. 16 and 21.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T29S R18E
1/4 S 16
S 21

1967

68.49 Rim of canyon, bears northeast and southwest. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point No. 2, secs. 16 and 21, with brass cap mkd.

WP 2
T29S R18E
S 16
S 21

1967

Over gently rolling land, through scattering juniper.

80.00 The point for the cor. of secs. 16, 17, 20, and 21.

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, with brass cap mkd.

T29S R18E
S 17 | S 16
S 20 | S 21

1967

This corner is located on a gentle northeast slope.

N. 0° 03' W., between secs. 16 and 17

Over rolling mesa to broken canyons and ledges.

40.00 The point for the 1/4 sec. cor. of secs. 16 and 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T29S R18E
1/4

S 17 | S 16

1967

80.00 The point for the cor. of secs. 8, 9, 16, and 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base to the top, with brass cap mkd.

T29S R18E
S 8 | S 9
S 17 | S 16

1967

This corner is located near a short vertical ledge, on a spur, that slopes southeast.

N. 0° 03' W., between secs. 8 and 9

Ascend over vertical ledge to mesa.

21.74 Rim, bears northeast and southwest. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point of secs. 8 and 9, with brass cap mkd.

W P
T29S R18E
S 8 | S 9

1967

Over rolling land, through scattering juniper.

34.43 Rim, bearing west and northeast. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for witness 1/4 sec. cor. of secs. 8 and 9, with brass cap mkd.

W C
T29S R18E
1/4
A
S 8 | S 9

1967

Descend over broken north slope.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

40.00 The point for the 1/4 sec. cor. of secs. 8 and 9. This corner is located on an inaccessible north slope. I did not monument.

67.60 South rim of canyon, bears northeast and southwest. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point of secs. 8 and 9, with brass cap mkd.

W P
T29S R18E

S 8 | S 9

1967

78.00 North rim of canyon, bears northeast and southwest; thence, over gently rolling land.

80.00 The point for the cor. of secs. 4, 5, 8, and 9

Set an iron post, 28 ins. long, 2½ ins. in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R18E

S 5 | S 4
S 8 | S 9

1967

This corner is located on a gentle southeast slope.

WEST, between secs. 5 and 8

Ascend over rough and broken land.

27.14 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 4 ft. base, to the top, for witness point No. 1, secs. 5 and 8, with brass cap mkd.

WP 1
T29S R18E

S 5
S 8

1967

40.00 The point for the 1/4 sec. cor. of secs. 5 and 8.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T29S R18E
1/4 $\frac{S\ 5}{S\ 8}$

1967

72.02 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 4 ft. base, to the top, for witness point No. 2, secs. 5 and 8, with brass cap mkd.

WP 2
T29S R18E
 $\frac{S\ 5}{S\ 8}$

1967

This monument is located on a high narrow mesa, bears north and south.

Descend 160 ft. over west slope of mesa through sparse sagebrush.

80.00 The point for the cor. of secs. 5, 6, 7, and 8.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R18E
 $\frac{S\ 6\ |S\ 5}{S\ 7\ |S\ 8}$

1967

N. 0° 21' E., between secs. 5 and 6

Along west slope, through sparse sagebrush.

14.71 Spur, slopes west. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., 2 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 5 and 6, with brass cap mkd.

WP 1
T29S R18E

S 6|S 5

1967

40.00 The point for the 1/4 sec. cor. of secs. 5 and 6. This corner is located in an unsafe location for monument. I did not monument.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

45.47 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for witness 1/4 sec. cor. of secs. 5 and 6, with brass cap mkd.

W C
T29S R18E
1/4
S 6 | S 5
↓

1967

45.90 South rim of Deadhorse Canyon, bears southwest and east, descend over broken northwest slope.

79.50 The cor. of secs. 5, 6, 31, and 32, Tps. 28½ and 29 S., R. 18 E., on the north boundary of the township, which is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 10 ins. above the surface of the ground, and in a small mound of stone, with brass cap mkd.

T28½S R18E
S 31 | S 32
S 6 | S 5
T29S

1955

Discontinue the survey of the township at this corner.

GENERAL DESCRIPTION

The area of this survey is located along the Stillwater Canyon, with drainage into the Green River. The elevation varies from 4500 ft. above sea level near the corner of sections 34 and 35 (on the south boundary of the township) to 5052 ft. above sea level near the corner of sections 5, 6, 7, and 8. The soil is sandy and rocky. No timber; undergrowth, sagebrush.

Volume

#

R0596

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65. (I) ~~(We)~~ have surveyed a portion of the south boundary and a portion of the subdivisonal lines, Township 29 South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 21, 1976

(Date)



Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL


BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the south boundary and a portion of the subdivisonal lines, Township 29 South, Range 18 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JAN 03 1978

(Date)

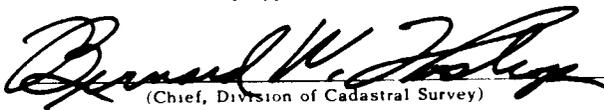

(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-626

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SIXTH STANDARD PARALLEL SOUTH

(THE SOUTH BOUNDARY OF SECTION 33)

AND

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 30 SOUTH, RANGE 18 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 19 65, approved JULY 22, 1965,

_____, which provided for the surveys included under U.S. Survey/Group
Number 485, and assignment instructions dated MARCH 31, 19 66.

Survey commenced JULY 11, 19 67

Survey completed JULY 19, 19 67

INDEX DIAGRAM

Township 30 SOUTH, Range 18 EAST,

6	5	4	8 7	2	1
7	8	9	10 6	11	12
18	17	16	15 5	14	13
19	20	21	22 4	23	24
			4		
30	29	28 3	27	26	25
31	32	33 3	34	35	36
		1			

Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the Sixth Standard Parallel South (the south boundary of section 33), and the survey of a portion of the subdivisional lines, Township 30 South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: A portion of the Sixth Standard Parallel South was surveyed by Charles F. Moore, U. S. Surveyor, in 1934. A portion of the north boundary was surveyed by Paul K. Russell, Cartographic Survey Aid, in 1955, as described in the official record of the south boundary of Tp. 29 S., R. 18 E., and shown upon the official plat accepted April 11, 1956. A portion of the north boundary was surveyed as described in the official record of the south boundary of Tp. 29 S., R. 18 E., executed concurrently with this group.

The dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the true point for the standard corner of sections 33 and 34 (on the south boundary of the township), as: Latitude $38^{\circ} 09.1' N.$, and Longitude $109^{\circ} 56.4' W.$ The mean magnetic declination is 15° East.

Dependent Resurvey of a Portion of the Sixth Standard Parallel South, the South Boundary of Township 30 South, Range 18 East (the South Boundary of Section 33) Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Charles F. Moore, U. S. Surveyor, in 1934

From the standard $1/4$ sec. cor. of sec. 33, on the Sixth Standard Parallel South, which is monumented with an iron post, 1-inch in diam., firmly set, projecting 30 ins. above the surface of the ground, and in a small mound of stone, with regulation (G.L.O.) brass cap mkd.

S C
 $1/4$ S 33

1934

Parallel South, the South Boundary of
Township 30 South, Range 18 East
(the South Boundary of Section 33)
Salt Lake Meridian, Utah

CHAINS

EAST, along the Sixth Standard Parallel South, through
Range 18 East, and the south boundary of sec. 33

Ascend over west slope.

- 23.67 Set an iron post, 28 ins. long, 2½ ins. in diam., over
a cross (+) chiseled in sandstone, and in a mound of
stone, 4 ft. base, to the top, for witness point No. 2,
sec. 33, with brass cap mkd.

WP 2
T30S R18E
S 33

1967

This monument is located near the west rim of a mesa.

Over gently rolling land, through scattering juniper.

- 35.72 Set an iron post, 28 ins. long, 2½ ins. in diam., over a
cross (+) chiseled in sandstone, and in a mound of stone,
4 ft. base, to the top, for witness point No. 1, sec. 33,
with brass cap mkd.

WP 1
T30S R18E
S 33

1967

This monument is located on the east rim of the mesa and
overlooking Surprise Valley to the east.

- 39.80 The witness standard corner of secs. 33 and 34 is monu-
mented with an iron post, 2 ins. in diam., firmly set,
projecting 13 ins. above the surface of the ground, and
in a small mound of stone, with regulation (G.L.O.) brass
cap mkd.

W C
S C
T30S R18E
S 33 | S 34 →

1934

- 40.00 The true point for the standard corner of secs. 33 and 34,
which is determined at record (EAST) course and record
(0.20 chain) distant from the heretofore described
witness corner.

Discontinue the dependent resurvey of the Standard
Parallel at this corner.

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 02' W., between secs. 33 and 34

Ascend along broken rims and ledges of Surprise Valley and Spanish Bottom.

40.00 The point for the 1/4 sec. cor. of secs. 33 and 34.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E
1/4
S 33 | S 34

1967

80.00 The point for the cor. of secs. 27, 28, 33, and 34.

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, and in a collar of stone, with brass cap mkd.

T30S R18E
S 28 | S 27
S 33 | S 34

1967

This corner is located on a gentle south slope among scattering juniper.

N. 0° 02' W. between secs. 27 and 28

Over huge inaccessible boulders and limestone outcrop formations through the area known as The Maze.

40.00 The point for the 1/4 sec. cor. of secs. 27 and 28.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E
1/4
S 28 | S 27

1967

80.00 The point for the cor. of secs. 21, 22, 27, and 28 is located on the steep west slope of a sandstone formation an unsafe location for monument.

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, for a witness corner of secs. 21, 22, 27, and 28, with brass cap mkd.

W C
T30S R18E
S 21 | S 22 →
S 28 | S 27

1967

This witness corner is located on a gentle south slope among scattering juniper.

From this witness corner the true point for the cor. of secs. 21, 22, 27, and 28, bears EAST, 5.73 chs. distant.

EAST, between secs. 22 and 27

Over huge inaccessible boulders and sandstone formations of The Maze.

40.00 The point for the 1/4 sec. cor. of secs. 22 and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E
1/4 S 22
 S 27

1967

80.00 The point for the cor. of secs. 22, 23, 26, and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T30S R18E
S 22 | S 23
S 27 | S 26

1967

N. 0° 01' W., between secs. 22 and 23

Over huge inaccessible sandstone formations of The Maze.

40.00 The point for the 1/4 sec. cor. of secs. 22 and 23.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T30S R18E

1/4

S 22 | S 23

1967

- 75.12 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for the witness corner of secs. 14, 15, 22, and 23, with brass cap mkd.

W C

T30S R18E

$$\begin{array}{c} \uparrow \\ \text{S } 15 \text{ | S } 14 \\ \text{S } 22 \text{ | S } 23 \end{array}$$

1967

This witness corner is located on a gentle north slope.

- 80.00 The true point for the cor. of secs. 14, 15, 22, and 23, is located on a steep sandstone slope, an unsafe location for monument.

N. 0° 01' W., between secs. 14 and 15

Over huge boulders and sandstone formations of The Maze.

- 16.94 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 4 ft. base, to the top, for witness point No. 1, secs. 14 and 15, with brass cap mkd.

WP 1

T30S R18E

S 15 | S 14

1967

This monument is located on a spur, slopes east.

- 40.00 The point for the 1/4 sec. cor. of secs. 14 and 15.

Set an iron post, 38 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E

1/4

S 15 | S 14

1967

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

62.82 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point No. 2, secs. 14 and 15, with brass cap mkd.

WP 2
T30S R18E
S 15 | S 14

1967

This monument is located on the south rim of a deep canyon.

80.00 The point for the cor. of secs. 10, 11, 14, and 15.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E
S 10 | S 11
S 15 | S 14

1967

N. 0° 01' W., between secs. 10 and 11

Over deep canyons, broken ledges and sandstone formations of The Maze.

20.26 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 10 and 11, with brass cap mkd.

WP 1
T30S R18E
S 10 | S 11

1967

This monument is located on a spur, slopes east, overlooking a deep canyon to the south, and the Green River to the northeast.

Over broken west rim of Stillwater Canyon of the Green River.

40.00 The point for the 1/4 sec. cor. of secs. 10 and 11.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CLAIMS

T30S R18E
1/4

S 10 | S 11

1967

80.00

The point for the cor. of secs. 2, 3, 10, and 11 is located on a vertical ledge of Stillwater Canyon of the Green River, an unsafe location for monument.

N. 0° 01' W., between secs. 2 and 3

Over deep canyons, vertical ledges, and spurs with broken sandstone formations of The Maze.

7.07

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for the witness corner of secs. 2, 3, 10, and 11, with brass cap mkd.

W C
T30S R18E
S 3 | S 2
S 10 | S 11

1967

This corner is located on a spur, slopes east.

40.00

The point for the 1/4 sec. cor. of secs. 2 and 3

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T30S R18E
1/4

S 3 | S 2

1967

79.60

Intersect the south boundary of Tp. 29 S., R. 18 E.

The point for the closing cor. of secs. 2 and 3.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R18E
S 34
S 3 | S 2
C C
T30S

1967

Survey of a Portion of the Subdivisional Lines
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

From this closing corner, the true point for the cor. of secs. 34 and 35, Tp. 29 S., R. 18 E., bears EAST, 0.70 chs. distant. This true corner point is determined at record (EAST) course and record (0.73 chain) distance from the witness corner for the above sections, and is monumented with an iron post, 2½ ins. in diam., set and marked as described in the field note record of the survey of a portion of the south boundary of Tp. 29 S., R. 18 E., executed concurrently with this group.

GENERAL DESCRIPTION

The area of this survey is located along Stillwater Canyon, with drainage into the Colorado and the Green Rivers. The elevation varies from 4400 ft. above sea level near the closing corner of sections 2 and 3 (on the north boundary of the township) to 5120 ft. above sea level along the south boundary of section 33. The soil is sandy and rocky. Timber, scattering juniper; undergrowth, brush and grass.

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
James C. Lillian	Surveying Aid
Ned E. Carnahan	Surveying Aid
Robert R. Gibson	Surveying Aid
Douglas G. Detmer	Surveying Aid
Michael L. Nygren	Surveying Aid
Ronald B. Lorensen	Surveying Aid


CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1965, (I) ~~(We)~~ have dependently resurveyed a portion of the Sixth Standard Parallel South (the south boundary of section 33) and surveyed a portion of the subdivisional lines of Township 30 South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976

(Date)



Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the Sixth Standard Parallel South (the south boundary of section 33) and the survey of a portion of the subdivisional lines within Township 30 South, Range 18 East, of the Salt Lake Meridian, Utah executed by Ray Harpin, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 03 1978

(Date)



(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date) _____
(Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596


INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX DIAGRAM

Township 30½ SOUTH, Range 18 EAST

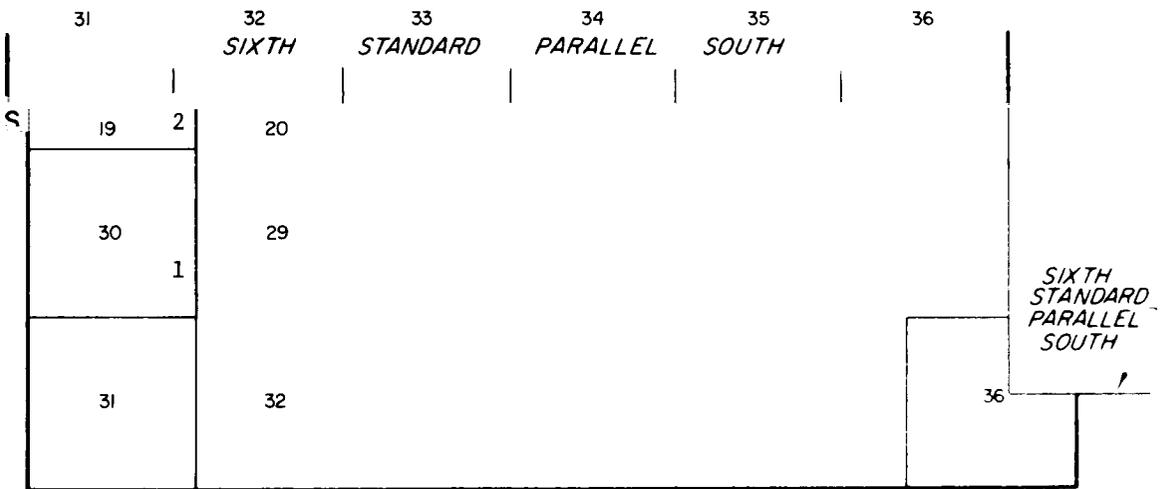

Volume

#

R0596

Township 30½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines, Township 30½ South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: A portion of the Sixth Standard Parallel South (the north boundary of the township) was surveyed by Charles F. Moore, U. S. Surveyor, in 1934. A portion of the Sixth Standard Parallel South was surveyed by George D. Voorhees, Cadastral Surveyor, in 1960, as shown upon the official plat accepted September 14, 1962. A portion of the Sixth Standard Parallel South was dependently resurveyed as described in the official record of the south boundary of section 33, Tp. 30 S., R. 18 E., executed concurrently with this group. The south boundary, a portion of the east and west boundaries and a portion of the subdivisional lines were surveyed by Fred R. Chappell, Cadastral Surveyor, in 1957, as shown upon the official plat accepted October 13, 1958.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The geographic position for the southeast corner of this township was taken from the official plat, accepted October 13, 1958, as: Latitude 38° 07' 09.6" N., and Longitude 109° 52' 54.6" W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 30½ South, Range 18 East
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 29, 30, 31, and 32, which is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 6 ins. above the surface of the ground, with brass cap mkd.

T30½S R18E
S 30 | S 29
S 31 | S 32

1957


Survey of a Portion of the Subdivisional Lines
 Township 30½ South, Range 18 East
 Salt Lake Meridian, Utah

CHAINS

N. 0° 03' W., between secs. 29 and 30

Over rolling hills across Main Flat of Ernies Country.

- 30.69 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base, to the top, for witness 1/4 sec. cor. of secs. 29 and 30, with brass cap mkd.




1967

This monument is located on a spur, slopes west, of a prominent sandstone knoll overlooking Ernies Country.

- 40.00 The true point for the 1/4 sec. cor. of secs. 29 and 30, is located on a broken east slope; I did not monument this corner point.

- 70.00 Rocky ridge spur, slopes southwest. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3½ ft. base, to the top, for the witness corner of secs. 19, 20, 29, and 30, with brass cap mkd.




1967

- 80.00 The true point for the cor. of secs. 19, 20, 29, and 30; which is located on a boulder covered steep southwest slope. I did not monument this corner point.

N. 0° 03' W., between secs. 19 and 20

Over broken canyons and ledges.

- 10.44 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in bedrock, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 19 and 20, with brass cap mkd.



1967

Survey of a Portion of the Subdivisional Lines
Township 30½ South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

- This monumented is located near the west edge of a ridge, bears southeast and northwest.
- 10.60 Descend over northeast slope, through scattering juniper.
- 17.07 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3 ft. base, to the top, for the witness closing corner of secs. 19 and 20, with brass cap mkd.

W C
T30S R18E
S 32
↑
S 19 | S 20
C | C
T30½S R18E

1967

- This corner is located on a rim above a vertical ledge.
- 20.26 Intersect the Sixth Standard Parallel South.
- The true point for the closing corner of secs. 19 and 20. This corner point is located on vertical ledges and steep talus of a deep canyon. I did not monument.

From this true corner point, the true point for the standard corner of secs. 31 and 32, Tp. 30 S., R. 18 E., bears WEST, 16.70 chs. distant. This true corner point is determined at record (EAST) course and record (0.26 chain) distant from the witness standard corner. the witness standard corner is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 3½ ft. base, 3 ft. high, with regulation (G.L.O.) brass cap mkd.

S C
T30S R18E
S 31 | S 32 → WC

1934

substantiated by:

A pinyon pine, 5 ins. in diam., bears N. 52° 45' E., 37 lks. distant, scribed W C B T.

A pinyon pine, 5 ins. in diam., bears N. 56° 00' W., 22 lks. distant, scribed W C B T.

GENERAL DESCRIPTION

The area of this survey is located along Cataract Canyon, with drainage into the Colorado River. The elevation varies from 5200 ft. above sea level near the cor. of secs. 29, 30, 31, and 32 to 5600 ft. above sea level near the closing corner of sections 19 and 20 (on the north boundary of this township). The soil is sandy and rocky. Timber consists of scattering juniper and pinyon pine; undergrowth, brush and grass.

140

Volume

#

R0596

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
James C. Lillian	Surveying Aid
Ned E. Carnahan	Surveying Aid
Robert R. Gibson	Surveying Aid
Douglas G. Detmer	Surveying Aid
Michael L. Nygren	Surveying Aid
Ronald B. Lorensen	Surveying Aid

CERTIFICATE OF SURVEY

(I) (We) Ray Harpin

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1965, (I) (We) have surveyed a portion of the subdivisional lines within Township 30½ South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976

(Date)

Ray Harpin
Ray Harpin

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines within Township 30½ South, Range 18 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 03 1978

(Date)

Bernard W. Tolson
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 31 SOUTH, RANGE 18 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,

_____, which provided for the surveys included under U.S. Survey/Group
Number 485, and assignment instructions dated MARCH 31, 1966.

Survey commenced MAY 4, 1966

Survey completed JULY 26, 1967

INDEX DIAGRAM

Township	11. South	12	13	14. East	15
6	1	2	3	4	5
7	6	7	8	9	10
14	17	18	19	20	21
19	26	27	28	29	30
27	34	35	36	37	38
30	39	40	41	42	43
31	47	48	49	50	51

Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 31 South, Range 18 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The exterior boundaries and a portion of the subdivisional lines were surveyed by Fred R. Chappell, Cadastral Surveyor, and Phil D. Smith and Donald A. Cannon, Cartographic Survey Aids, in 1957, as shown upon the official plat accepted October 13, 1958.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 19, 24, 25, and 30, on the east boundary of the township, as: Latitude $38^{\circ} 03.7' N.$, and Longitude $109^{\circ} 52.9' W.$ The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 19, 24, 25, and 30, Tps. 31 S., Rs. 18 and 19 E., which is monumented with an iron post, $2\frac{1}{2}$ ins. in diam., firmly set, projecting 16 ins. above the surface of the ground, and in a small mound of stone, with brass cap mkd.

T31S
R18E R19E
S 24 | S 19
S 25 | S 30

1957

WEST, between secs. 24 and 25

Over rolling hills and broken canyons, through scattering pinyon pine and juniper.

33.65

Spur, slopes north. At this point raise a cairn of stone, 3 ft. base, 2 ft. high; thence, descend 100 ft. over steep west slope.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

40.00 The point for the 1/4 sec. cor. of secs. 24 and 25.
Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R18E
1/4 $\frac{S\ 24}{S\ 25}$

1966

This corner is located near the south end of a box canyon.

Ascend 150 ft. over steep east slope.

53.85 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 15 ins. in the ground, and in a small mound of stone, with brass cap 1½ ins. in diam., mkd. 53.85 1966.

60.00 Descend 65 ft. over broken west slope.

75.75 Dry wash, 30 lks. wide on curve, drains north; ascend 35 ft. over northeast slope.

80.00 The point for the cor. of secs. 23, 24, 25, and 26.

Set an iron post, 28 ins. long, 2½ ins. in diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R18E
 $\frac{S\ 23\ |S\ 24}{S\ 26\ |S\ 25}$

1966

from which

A pinyon pine, 10 ins. in diam., bears N. 89° 45'
E., 21 lks. distant, scribed T31S R18E S24 BT.

This corner is located approximately 1 chain south of a dry wash, drains east.

Discontinue regular order of survey at this corner.

WEST, between secs. 23 and 26

Ascend 100 ft. over steep northeast slope, through scattering juniper and pinyon pine.

6.80 West rim of canyon; thence, over rolling hills.

22.92 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap 1½ ins. in diam., mkd. 22.92 1966.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah


CHAINS

- 24.00 East rim of graben, bears northeast and southwest; thence, over grass covered graben.
- 33.50 West rim of graben.
- 36.00 Descend 50 ft. over west slope of graben.
- 40.00 The point for the 1/4 sec. cor. of secs. 23 and 26.
Set an iron post, 28 ins. long, 2½ ins. in diam., on bed-rock, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.
- T31S R18E
1/4 $\frac{S}{S}$ $\frac{23}{26}$
1966
- from which
- A pinyon pine, 8 ins. in diam., bears N. 58° 45' E., 55 lks. distant, scribed 1/4 S23 BT.
- A pinyon pine, 6 ins. in diam., bears S. 22° 30' E., 29 lks. distant, scribed 1/4 S26 BT.
- Descend 50 ft. over west slope.
- 46.50 Enter bottom of graben, thence, over nearly level grass-land.
- 48.90 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 16 ins. in the ground, with brass cap 1½ ins. in diam., mkd. 48.90 1966.
- 51.00 Dry wash, 20 lks wide, drains north; ascend 110 ft. over east slope.
- 58.40 West rim of graben; thence, over nearly level land, through scattering pinyon and junper.
- 58.71 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 12 ins. in the ground, with brass cap 1½ ins. in diam., mkd. 58.71 1966.
- 62.92 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 12 ins. in the ground, with brass cap 1½ ins. in diam., mkd. 62.92 1966.
- 63.15 East rim of a graben, descend over to grass-covered graben floor.
- 72.35 Trail road, 10 ft. wide, bears north and south.
- 72.82 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 16 ins. in the ground, with brass cap 1½ ins. in diam., mkd. 72.82 1966.
- Ascend over steep east slope.
- 75.30 West rim of graben; thence, over rolling hills and broken canyons, through scattering juniper and pinyon pine.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

79.93 Set an iron post, 28 ins. long, 2½ ins. in diam., on bedrock, and in a mound of stone, 3 ft. base, to the top, for the witness cor. of secs. 22, 23, 26, and 27, with brass cap mkd.



1966

from which

A large boulder, bears S. 65° 30' E., 15 lks. distant, scribed B+O on the face.

A pinyon pine, 6 ins. in diam., bears S. 73° 30' W., 35 lks. distant, scribed X BT.

80.00 The true point for the cor. of secs. 22, 23, 26, and 27 is located among large boulders, an unsafe location for monument.

S. 89° 56' W., between secs. 22 and 27

Over rolling hills and broken canyons, through scattering pinyon pine and juniper.

13.89 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap 1½ ins. in diam., mkd. 13.89 1966.

14.50 East rim of graben, bears northeast and southwest; thence, over grass covered graben.

32.30 West rim of graben. A boulder approximately 60 ft. high and 1 chain in diam.,

32.49 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap 1½ ins. in diam., mkd. 32.49 1966.

Over broken canyons and rolling hills, through scattering pinyon pine and juniper.

39.97 The point for the 1/4 sec. cor. of secs. 22 and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

	T31S R18E
	1/4 S 22
	S 27

1966

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

from which

A pinyon pine, 10 ins. in diam., bears N. 11° 00' W., 38 lks. distant, scribed 1/4 S22 BT.

- 47.10 West rim of a canyon, bears northeast and southwest.
- 58.87 East rim of a canyon, bears northeast and southwest.
Raise a cairn of stone, 3 ft. base, 2 ft. high.
Descend 130 ft. over west slope.
- 61.00 Over gently rolling valley, through scattering pinyon pine.
- 79.94 The cor. of secs. 21, 22, 27, and 28, is monumented with an iron post, 2½ ins. in diam., firmly set projecting 15 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R18E
S 21 | S 22
S 28 | S 27

1957

WEST, between secs. 21 and 28

Ascend 190 ft. over broken east slope, through scattering pinyon pine and juniper.

- 16.36 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 21 and 28, with brass cap mkd.

WP 1
T31S R18E
S 21
S 28

1967

Over rolling hills with broken canyons, through scattering pinyon pine and juniper.

- 40.00 The point for the 1/4 sec. cor. of secs. 21 and 28.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R18E
1/4 S 21
S 28

1967

- 50.30 Set an iron post, 28 ins. long, 2½ ins. in diam., 20 ins. in the ground, for witness point No. 2, secs. 21 and 28, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

WP 2
T31S R18E
S 21
S 28

1967

This corner is located near the center of a graben.

80.00 The point for the cor. of secs. 20, 21, 28, and 29.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R18E
S 20 | S 21
S 29 | S 28

1967

WEST, between secs. 20 and 29

Over rolling hills with broken canyons through scattering pinyon pine and juniper.

9.93 Spur, slopes north. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and raise a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 20 and 29, with brass cap mkd.

WP 1
T31S R18E
S 20
S 29

1967

40.00 The point for the 1/4 sec. cor. of secs. 20 and 29.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R18E
1/4 S 20
S 29

1967

54.95 Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a collar of stone, for witness point No. 2, secs. 20 and 29, with brass cap mkd.

WP 2
T31S R18E
S 20
S 29

1967

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

This corner is located on a gentle east slope.

80.00 The point for the cor. of secs. 19, 20, 29, and 30.

Set an iron post, 28 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R18E
S 19 | S 20
S 30 | S 29

1967

This corner is located on a gentle north slope.

S. 89° 43' W., between secs. 19 and 30

Over rolling hills with broken canyons, through scattering pinyon pine and juniper.

40.00 The point for the 1/4 sec. cor. of secs. 19 and 30 is located on a broken vertical ledge, an unsafe location for monument.

43.52 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for the witness 1/4 sec. cor. of secs. 19 and 30, with brass cap mkd.

W C
T31S R18E
1/4 S 19 →
S 30

1967

This witness corner is located near a rim on a gentle west slope.

68.45 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in sandstone, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 19 and 30, with brass cap mkd.

WP 1
T31S R18E
S 19
S 30

1967

This corner is located on a gentle south slope.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

82.01

The cor. of secs. 19, 24, 25, and 30, Tps. 31 S., Rs. 17 and 18 E., is monumented with an iron post, 2½ ins. in diam., over a cross (+) chiseled on sandstone surface, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T31S
R17E R18E
S 24 | S 19
S 25 | S 30

1957

GENERAL DESCRIPTION

The area of this survey known as the Grabens, with drainage into the Colorado River. The elevation varies from 5600 ft. above sea level near the corner of sections 20, 21, 28, and 29 to 6000 ft. above sea level near the corner of sections 19, 24, 25, and 30 (on the east boundary of the township). The soil is sandy and rocky. Timber, scattering juniper and Pinyon pine; undergrowth, brush and grass.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Terry S. Dabel	Surveying Aid
Rodney J. Bush	Surveying Aid
Douglas C. Tapia	Surveying Aid
Delbert B. Pierce	Surveying Aid
James C. Lillian	Surveying Aid
Ned E. Carnahan	Surveying Aid
Robert R. Gibson	Surveying Aid
Douglas G. Detmer	Surveying Aid
Michael L. Nygren	Surveying Aid
Ronald B. Lorensen	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65, (I) ~~(We)~~ have surveyed a portion of the subdivisional lines within Township 31 South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines within Township 31 South, Range 18 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in

is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 649-

Volume

#

R0596

Volume

#

R0596

INDEX DIAGRAM

Township 27 SOUTH, Range 19 EAST

6	5	4	3	2	1
7	8	9	10	11	12
8	6		5		
18	17	16	15 4	14	13
19	20	21	22 3	23	24
				2	1
30	29	28	27	26	25
31	32	33	34	35	36

Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 27 South, Range 19 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The east boundary was surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1926, as described in the official record of the west boundary of Tp. 27 S., R. 20 E., and as shown upon the official plat of that township, approved July 15, 1932, and accepted December 9, 1932. The south boundary was surveyed by Andrew D. Nelson and Chester A. Swiatek, Cartographers (Cadastral) and Leland P. Lewis, Cartographic Survey Aid, in 1954, as described in the official record of the north boundary of Tp. 28 S., R. 19 E., and shown upon the official plat of that township, accepted June 20, 1955. The west boundary and a portion of the subdivisional lines were surveyed by Andrew D. Nelson, Cartographer (Cadastral) and Leland P. Lewis, Cartographic Survey Aid, in 1954, as shown upon the official plat accepted June 20, 1955. A portion of the west boundary was dependently resurveyed as described in the official record of the east boundary of Tp. 27 S., R. 18 E., executed concurrently with this group.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 19, 24, 35 and 30 on the east boundary of the township, as: Latitude $38^{\circ} 25.7' N.$, and Longitude $109^{\circ} 46.3' W.$ The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

The cor. of secs. 19, 24, 25, and 30 on the east boundary of the township, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, with regulation (G.L.O.) brass cap mkd.

T29S
R19E R20E
S 24 | S 19
S 25 | S 30

1926

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS	
40.00	<p>WEST, between secs. 24 and 25.</p> <p>Over rough and broken land.</p> <p>The point for the 1/4 sec. cor. of secs. 24 and 25.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p>
	<p>T27S R19E</p> <p>1/4 $\frac{S\ 24}{S\ 25}$</p> <p>1965</p>
80.00	<p>The point for the cor. of secs. 23, 24, 25, and 26.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p>
	<p>T27S R19E</p> <p>S 23 S 24</p> <p>S 26 S 25</p> <p>1965</p>
	<p>Discontinue the regular order of survey at this corner.</p> <p>Land, rough and broken. Soil, sandy and rocky. No timber; undergrowth, brush and grass.</p>
40.00	<p>WEST, between secs. 23 and 26</p> <p>Over rough and broken land.</p> <p>The point for the 1/4 sec. cor. of secs. 23 and 26.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p>
	<p>T27S R19E</p> <p>1/4 $\frac{S\ 23}{S\ 26}$</p> <p>1965</p>
80.00	<p>The point for the cor. of secs. 22, 23, 26, and 27.</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 16 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

T27S R19E
S 22 | S 23
S 27 | S 26

1965


Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees, brush, and grass.

N. 0° 01' W., between secs. 22 and 23

Descend 900 ft. over north (talus) slope.

37.87 Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, for a witness 1/4 sec. cor. of secs. 22 and 23, with brass cap mkd.

W C
T27S R19E
1/4



1966

40.00 The true point for the 1/4 sec. cor. of secs. 22 and 23 is located on a steep talus slope, an unsafe location for a monument.

Ascend 900 ft. over steep south (talus) slope.

63.05 South rim of a bench, bearing east and northwest.

68.38 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 7 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of secs. 22 and 23, with brass cap, 1½ ins. in diam., mkd.

W P
S 22 | S 23

1966

74.88 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, for the witness corner of secs. 14, 15, 22, and 23, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

W C
T27S R19E
↑
S 15 | S 14
S 22 | S 23

1966

Raise a mound of stone, 2½ ft. base, 1½ ft. high, west of the corner.

80.00 The true point for the cor. of secs. 14, 15, 22, and 23 is located on a steep north (talus) slope, an unsafe location for a monument.

Land, rough and broken.
Soil, sandy and rocky.
Timber, juniper and pinyon pine.
Undergrowth, young trees, brush and grass.

N. 0° 01' W., between secs. 14 and 15

Descend 800 ft. over north (talus) slope.

40.00 The point for the 1/4 sec. cor. of secs. 14 and 15 is located on a steep north (talus) slope, an unsafe location for a monument.

48.83 Set an iron post, 28 ins. long, 2½ ins. in diam., 13 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness 1/4 sec. cor. of secs. 14 and 15, with brass cap mkd.

W C
T27S R19E
1/4
S 15 | S 14
↓

1966

Raise a mound of stone, 2 ft. base, 1½ ft. high, west of the corner.

56.73 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 15 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of secs. 14 and 15, with brass cap 1½ ins. in diam., mkd.

W P
S 15 | S 14

1966

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

80.00

The point for the cor. of secs. 10, 11, 14, and 15 is located on a steep south (talus) slope, an unsafe location for a monument.

From this true corner point, the point for the witness corner of secs. 10, 11, 14, and 15 bears NORTH, 3.97 chs. distant, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

W C
T27S R19E
S 10 | S 11
S 15 | S 14
▼

1966

This witness corner is located on the south rim of a bench, which bears east and west.

Land, rough and broken.

Soil, rocky.

Timber, scattering juniper and pinyon pine.

Undergrowth, young trees, brush and grass.

N. 89° 48' W., between secs. 10 and 15

Ascend along rough and broken south (talus) slope.

16.15

Ridge spur, slopes south. At this point on line, I chiseled a cross (+) on bedrock and placed a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., over the cross and in a mound of stone, 2½ ft. base, to the top, for a witness point of secs. 10 and 15, with brass cap 1½ ins. in diam., mkd.

W P
S 10
S 15

1966

40.00

The point for the 1/4 sec. cor. of secs. 10 and 15.

Set an iron post, 28 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T27S R19E
1/4 S 10
S 15

1966

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

Ascend 100 ft. over broken east slope.

- 45.53 Eastern rim of Red Sea Flat, bears northeast and southwest. At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 11 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of secs. 10 and 15, with brass cap 1½ ins. in diam., mkd.

W P
S 10
S 15

1966

- 53.79 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 15 ins. in the ground, and in a small mound of stone, for a witness point of secs. 10 and 15, with brass cap 1½ ins. in diam., mkd.

W P
S 10
S 15

1966

- 60.69 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 15 ins. in the ground, and in a small mound of stone, for a witness point of secs. 10 and 15, with brass cap 1½ ins. in diam., mkd.

W P
S 10
S 15

1966

- 80.64 The cor. of secs. 9, 10, 15, and 16, is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 9 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T27S R19E
S 9 | S 10
S 16 | S 15

1954

Land, rough and broken to rolling.
Soil, sandy and rocky.
No timber; undergrowth, brush.

The true point for the cor. of secs. 8, 9, 16, and 17, which is determined from the hereinafter described witness corner.

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

From this true corner point, the witness corner bears record (S. 0° 03' E.) course, and record (1.70 chs.) distant, and is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 17 ins. above the surface of the ground, and in a mound of stone, 4½ ft. base, to the top, with brass cap mkd.

W C
T27S R19E
A
S 8 | S 9
S 17 | S 16

1954

WEST, between secs. 8 and 17

Descend along broken north slope.

30.00 Wash, 50 lks. wide, 10 ft. deep, drains. S. 60° W.

40.00 The point for the 1/4 sec. cor. of secs. 8 and 17.

Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a collar of stone, with brass cap mkd.

T27S R19E
1/4 S 8
S 17

1965

Raise a mound of stone, 3 ft. base, 2½ ft. high, north of the corner.

40.90 Wash in Taylor Canyon, 50 lks. wide, 6 ft. deep, drains northwest.

44.50 Same wash, drains S. 80° W.

68.80 Same wash, drains N. 80° W.

74.40 Ascend along broken north slope through large boulders.

80.00 The point for the cor. of secs. 7, 8, 17, and 18.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T27S R19E
S 7 | S 8
S 18 | S 17

1965

Survey of a Portion of the Subdivisional Lines
Township 27 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees, brush and grass.

S. 89° 59' W., between secs. 7 and 18

Ascend over broken northeast slope.

24.60 Rim rock, bears northwest and southeast, top of ascent.
At this point on line, I chiseled a cross (+) on bedrock
and built a mound of stone, 3 ft. base, 2 ft. high, over
the above cross; thence, descend over west slope.

40.00 The point for the 1/4 sec. cor. of secs. 7 and 18.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a
cross (+) chiseled on bedrock, and in a mound of stone,
5 ft. base, to the top, with brass cap mkd.

T27S R19E
1/4 $\frac{S 7}{S 18}$

1965

45.70 At this point on line, I chiseled a cross (+) on bedrock
and built a mound of stone, 3 ft. base, 2½ ft. high, over
the above cross; thence, descend 300 ft. over west slope.

78.58 The cor. of secs. 7, 12, 13, and 18 on the west boundary
of the township, which is monumented with an iron post,
2½ ins. in diam., firmly set, projecting 17 ins. above
the surface of the ground, and in a mound of stone, 3 ft.
base, to the top, and marked as described in the field-
note record of the dependent resurvey of a portion of the
east boundary of Tp. 27 S., R. 18 E., executed concu-
rently with this group.

Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees, brush and grass.

GENERAL DESCRIPTION

The elevation varies from 4560 ft. above sea level
near the 1/4 section corner of sections 8 and 17 to 5840
ft. above sea level near the corner of sections 9, 10,
15, and 16. The soil is sandy and rocky. Timber,
scattering juniper and pinyon pine; undergrowth, brush
and grass.

CERTIFICATE OF SURVEY

(I/We), Gerald W. Hochstrasser and Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1965, (I/We) have surveyed a portion of the subdivisional lines within Township 27 South, Range 19 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (us) and under/(my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 22, 1976 (Date) [Signature] (Cadastral Surveyor) Gerald W. Hochstrasser

May 25, 1976 (Date) [Signature] (Cadastral Surveyor) Ray Harpin

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines Township 27 South, Range 19 East, of the Salt Lake Meridian, Utah

executed by Gerald W. Hochstrasser and Ray Harpin, Cadastral Surveyors having been critically examined and found correct, are hereby approved.

June 03 1978 (Date) [Signature] (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) _____ (Chief, Division of Cadastral Survey) 690 600-020

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

AND

SURVEY OF A PORTION OF THE SUBDIVISION LINES

WITHIN A NUMBER OF SECTIONS

TOWNSHIP 29 SOUTH, RANGE 19 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER CADASTRAL SURVEYOR

RAY HARPIN CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 19 65, approved JULY 22, 1965,

_____, which provided for the surveys included under ~~XXXX Survey~~ Group
Number 485, and assignment instructions dated JULY 16, 19 65
AND MARCH 31, 1966

Survey commenced AUGUST 2, 19 65

Survey completed JUNE 6, 19 67

INDEX DIAGRAM

Township 29 SOUTH, Range 19 EAST,

6	5	4	3	2	1
					9
					11
7	8	9	10	11	10
					8
18	17	16	15	14	12
					7
19	20	21	22	23	13
					6
30	29	28	27	26	25
				5	4
31	32	33	34	35	2
					36

Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary of the township; survey of a portion of the subdivisional lines and the survey of a portion of the subdivision lines within a number of sections Township 29 South, Range 19 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The east boundary was surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1926, as described in the official record of the west boundary of Tp. 29 S., R. 20 E., and as shown upon the official plat of that township, approved October 25, 1928, and accepted December 31, 1928. A portion of the south boundary was surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1928, as shown upon the official plat accepted May 25, 1961.

These surveys were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 35 and 36 on the south boundary of the township, as: Latitude $38^{\circ} 13.7' N.$, and Longitude $109^{\circ} 47.3' W.$ The mean magnetic declination is 15° East.

Dependent Resurvey of a Portion of the East Boundary
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Charles F. Moore and Robert C. Yundt
U. S. Surveyors, in 1926

The cor. of secs. 7, 12, 13, and 18 on the east boundary of the township, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, with regulation (G.L.O.) brass cap mkd.

T29S
R19E R20E
S 12 | S 7
S 13 | S 18

1926

Dependent Resurvey of a Portion of the East Boundary
 Township 29 South, Range 19 East
 Salt Lake Meridian, Utah

CHAINS

N. 0° 03' W., through Tps. 29 S., between Rs. 19 and 20 E., and between secs. 7 and 12.

40.28

The 1/4 sec. cor. of secs. 7 and 12 is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 4 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

1/4
 S 12 | S 7

1926

substantiated by:

A reference mark (bearing object), bears N. 65° 00' E., 47 lks. distant, scribed on face of ledge X B0 1/4.

A reference mark (bearing object), bears N. 31° 00' W., 157 lks. distant, scribed on face of ledge X B0 1/4.

N. 0° 03' W., beginning new measurement.

40.10

The cor. of secs. 1, 6, 7, and 12 is monumented with an iron post, 2 ins. in diam., firmly set, projecting 23 ins. above the surface of the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

T29S
 R19E R20E
 S 1 | S 6
 S 12 | S 7

1926

Discontinue the dependent resurvey of the range line at this corner.

Survey of a Portion of the Subdivisional Lines
 Township 29 South, Range 19 East
 Salt Lake Meridian, Utah

The cor. of secs. 35 and 36 on the south boundary of the township, which is monumented with an iron post, 2 (record 2½) ins. in diam., firmly set, projecting 30 ins. above the surface of the ground and in a mound of stone, 3½ ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

T29S R19E
S 35 | S 36
S 36
T29½S R19E

1928

substantiated by:

A juniper, 14 ins. in diam., bears N. 78° 45' E.,
241 lks. distant, scribed T29S R19E S36 BT.

A reference mark (bearing object), bears N. 47° 15'
W., 24 lks. distant, scribed on the face of ledge X
BO S35.

N. 0° 01' W., between secs. 35 and 36

Over a series of rims and canyons, through scattering
juniper and pinyon pine.

- 5.00 Ridge spur, slopes northeast.
- 17.00 Draw, drains northeast.
- 22.00 Ridge spur, slopes northeast.
- 26.00 Draw, drains northeast.
- 31.00 Spur, slopes northeast.
- 40.00 The point for the 1/4 sec. cor. of secs. 35 and
36.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a
cross (+) chiseled on bedrock, and in a mound of stone,
4 ft. base, to the top, with brass cap mkd.

T29S R19E
1/4

S 35 | S 36

1965

This corner is located at the base of a ledge, 40 ft.
high, facing north.

- 42.20 Draw, drains northeast.
- 50.20 Spur, slopes northeast.
- 54.85 At this point on line, I chiseled a cross (+) on
bedrock and built on a mound of stone, 3 ft. base, 2 ft.
high, over the above cross.
- 68.10 Draw, drains northwest.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

69.85 Spur, slopes west. At this point on line, I chiseled a cross (+) on bedrock and built a mound of stone, 3 ft. base, 2 ft. high, over the above cross.

75.15 Draw, drains northeast.

79.00 Draw (same draw as 75.15 chs.), drains west.

80.00 The cor. of secs. 25, 26, 35, and 36.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R19E
S 26 | S 25
S 35 | S 36

1965

Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees, brush and grass.

The cor. of secs. 25, 30, 31, and 36 on the east boundary of the township, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 31 ins. above the surface of the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

T29S
R19E R20E
S 25 | S 30
S 36 | S 31

1926

S. 89° 51' W., between secs. 25 and 36

Over rough and broken land, through scattering timber.

10.25 Spur, slopes northeast.

35.90 Draw, drains southwest.

39.99 The point for the 1/4 sec. cor. of secs. 25 and 36.

Set an iron post, 36 ins. long, 1-inch in diam., 5 ins. in the ground, and in a mound of stone, 5 ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

T29S R19E
1/4 S 25
S 36

1965

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

- 50.50 Draw, drains southwest.
64.80 Ridge, bears N. 80° E. and S. 80° W.
67.00 Ridge (same ridge as 64.80 chs.), bears N. 80° W.
79.98 The cor. of secs. 25, 26, 35, and 36.

Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees and brush.

N. 0° 01' W., between secs. 25 and 26

Over a series of rims and canyons, through scattering juniper and pinyon pine.

- 9.80 Draw, drains west.
18.90 Spur, slopes west. At this point on line, I chiseled a cross (+) on bedrock and built a mound of stone, 3 ft. base, 2 ft. high, over the above cross.
24.20 Draw, drains west.
27.85 Spur, slopes west. At this point on line, I chiseled a cross (+) on bedrock and built a mound of stone, 3 ft. base, 2 ft. high, over the above cross.
40.00 The point for the 1/4 sec. cor. of secs. 25 and 26.
Set an iron post, 28 ins. long, 2½ ins. in diam., 19 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R19E

1/4

S 26 | S 25

1965

- 54.60 At this point on line, I chiseled a cross (+) on bedrock and built a mound of stone, 3 ft. base, 2 ft. high, over the above cross.
67.70 Draw, drains northwest.
71.30 Spur, slopes west. At this point on line, I chiseled a cross (+) on bedrock and built a mound of stone, 3 ft. base, 2 ft. high, over the above cross.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

80.00 The point for the cor. of secs. 23, 24, 25, and 26.

Set an iron post, 28 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T29S R19E
S 23 | S 24
S 26 | S 25

1965

Land, rough and broken.
Soil, sandy and rocky.
Timber, scattering juniper and pinyon pine.
Undergrowth, young trees and brush.

The cor. of secs. 19, 24, 25, and 30 on the east boundary of the township, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 4 ft. base, 3 ft. high, with regulation (G.L.O.) brass cap mkd.

T29S
R19E R20E
S 24 | S 19
S 25 | S 30

1926

substantiated by:

A reference mark (bearing object), bears N. 20° 00' E., 23 lks. distant, scribed on the face of ledge X BO S19.

S. 89° 55' W., between secs. 24 and 25

Over rough and broken land, through scattering timber.

10.90 Draw, drains northeast.

39.97 The point for the 1/4 sec. cor. of secs. 24 and 25.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R19E
1/4 S 24
S 25

1965

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

67.30 Draw, drains northwest.

79.94 The cor. of secs. 23, 24, 25, and 26.

Land, rough and broken.

Soil, sandy and rocky.

Timber, juniper and pinyon pine.

Undergrowth, young trees and brush.

Discontinue the regular order of survey at this corner.

The cor. of secs. 13, 18, 19, and 24 on the east boundary of the township, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 4 ft. base, 3 ft. high, with regulation (G.L.O.) brass cap mkd.

T29S
R19E R20E
S 13 | S 18
S 24 | S 19

1926

substantiated by:

A reference mark (bearing object), bears N. 85° 00' E., 190 lks. distant, scribed on the face of ledge X BO S18.

A reference mark (bearing object), bears S. 20° 00' E., 180 lks. distant, scribed on the face of ledge X BO S19.

S. 89° 55' W., between secs. 13 and 24

Over rough and broken land.

40.00 The point for the 1/4 sec. cor. of secs. 13 and 24.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T29S R19E
1/4 S 13
S 24

1965

Land, broken.

Soil, sandy and rocky.

No timber; undergrowth, brush.

Discontinue the regular order of survey at this corner.

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 7, 12, 13, and 18 on the east boundary of the township, heretofore described.

WEST, between secs. 12 and 13

Over rough and broken land.

- 6.75 Ridge spur, slopes north. At this point on line, I chiseled a cross (+) on bedrock, and placed a copper-coated steel stake, 30 ins. long, 1/2-inch in diam., over the cross and in a mound of stone, 4 ft. base, to the top, for a witness point of secs. 12 and 13, with brass cap, 1½ ins. in diam., mkd.

W P
S 12
S 13

1967

- 14.70 Indian Creek, drains southwest.
- 26.20 Indian Creek (the above creek), drains north, ascend over northeast slope.
- 40.00 The point for the 1/4 sec. cor. of secs. 12 and 13.
- Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, with regulation brass cap mkd.

T29S R19E
1/4 S 12
S 13

1967

Descend over broken west slope.

- 48.50 Base of descent, bears north and south; thence, across the ancient (abandoned) Indian Creek bottom.
- 61.30 Leave bottomland, ascend over broken east slope.
- 71.00 Ridge spur, slopes north, descend over broken west slope.
- 77.20 Draw, drains north, ascend over northeast slope.
- 80.00 The point for the cor. of secs. 11, 12, 13, and 14.
- Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

T29S R19E
S 11 | S 12
S 14 | S 13

1967

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

Land, rough and broken.
Soil, sandy and rocky.
No timber; undergrowth, brush.

N. 0° 01' W., between secs. 11 and 12


Descend over northeast slope.

30.30 The left bank of the Colorado River, course S. 47° 15' W.
The point for the meander corner of secs. 11 and 12; I
did not monument this corner point.

40.00 The point for the 1/4 sec. cor. of secs. 11 and 12. This
corner point is located within the bed of the Colorado
River.

42.10 The right bank of the Colorado River, course S. 30° 30' W.
The point for the meander corner of secs. 11 and 12; I
did not monument this corner point.


47.00 Set a plastic post, 30 ins. long, 2½ ins. in diam., 15
ins. in the ground, and in a small mound of stone, for
the witness 1/4 sec. cor. of secs. 11 and 12, with
regulation brass cap mkd.



Ascend over southeast slope.

80.00 The point for the cor. of secs. 1, 2, 11, and 12.

Set a plastic post, 30 ins. long, 2½ ins. in diam., over
a cross (+) chiseled on bedrock, and in a mound of stone,
4 ft. base, to the top, with regulation brass cap mkd.



Land, rough and broken.
Soil, sandy and rocky.
No timber; undergrowth, brush.

From the cor. of secs. 1, 6, 7, and 12 on the east bound-
ary of the township, heretofore described.

S. 89° 44' W., between secs. 1 and 12

Survey of a Portion of the Subdivisional Lines
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

Ascend along broken north slope.

32.50 Ridge spur, slopes northwest, descend over west slope.

39.98 The point for the 1/4 sec. cor. of secs. 1 and 12.

Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

T29S R19E
1/4 $\frac{S\ 1}{S\ 12}$

1967

60.78 The left bank of the Colorado River, course S. 12° 00' W. The point for the meander corner of secs. 1 and 12; I did not monument this corner point.

67.58 The right bank of the Colorado River, course S. 19° 45' W. The point for the meander corner of secs. 1 and 12; I did not monument this corner point.

79.96 The cor. of secs. 1, 2, 11, and 12.

Land, rough and broken.
Soil, sandy and rocky.
No timber; undergrowth, brush and grass.

Discontinue the survey of the subdivisional lines of this township at this corner.

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

Thence, in section 12

From the 1/4 sec. cor. of secs. 12 and 13.

N. 0° 02' W., on the north and south center line of sec. 12

40.14 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 12.

Set a plastic post, 30 ins. long, 2½ ins. in diam., 23 ins. in the ground, with regulation brass cap mkd.

T29S R19E
C 1/4
S 12

1967

1

Survey of a Portion of the Subdivision Lines
Within a Number of Sections
Township 29 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS
80.19

The 1/4 sec. cor. of secs. 1 and 12.

The 1/4 sec. cor. of secs. 7 and 12 on the east boundary
of the township, heretofore described.

S. 89° 48' W., on the east and west center line of sec.
12

Descend over broken northwest slope.

39.99 Intersect the north and south center line, the center 1/4
sec. cor. of sec. 12.

44.00 Indian Creek, drains northwest.

71.64 The left bank of the Colorado River, course S. 36° 15' W.
The point for the special meander corner of sec. 12; I
did not monument this corner point.

79.98 The true point for the 1/4 sec. cor. of secs. 11 and 12,
heretofore described.

From the point for the meander corner of secs. 1 and 12,
on the right bank of the Colorado River, heretofore
described.

Thence, with the meanders of the right bank (down stream)
of the Colorado River, through section 12.

S. 19° 45' W., 3.20 chs.

SOUTH 5.40 chs.

S. 5° 15' W., 4.10 chs.

S. 9° 45' W., 7.65 chs.

S. 26° 00' W., 2.50 chs.

S. 16° 45' W., 2.50 chs.

S. 24° 30' W., 3.40 chs.

S. 35° 30' W., 7.90 chs.

S. 25° 35' W., 4.18 chs. At the end of course.

The point for the meander
corner of secs. 11 and 12,
heretofore described.

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 29 South, Range 19 East
 Salt Lake Meridian, Utah

CHAINS

From the point for the meander corner of secs. 1 and 12, on the left bank of the Colorado River, heretofore described.

Thence, with the meanders of the left bank (down stream) of the Colorado River, through section 12.

S. 12° 00' W., 6.15 chs.

S. 6° 15' W., 7.30 chs.

S. 16° 30' W., 3.20 chs.

S. 8° 00' W., 6.00 chs.

S. 24° 45' W., 7.30 chs.

S. 13° 00' W., 3.10 chs.

S. 21° 50' W., 8.76 chs. At the end of course, intersect the east and west center line, the point for the special meander corner of sec. 12, heretofore described.

S. 36° 15' W., 7.15 chs.

S. 46° 02' W., 5.71 chs. At the end of course.

The point for the meander corner of secs. 11 and 12, heretofore described.

Thence, in section 13


From the 1/4 sec. cor. of secs. 13 and 24, heretofore described.

N. 0° 04' W., on the north and south center line of sec. 13.

Over broken west slope.

5.74

At this point on line, I chiseled a cross (+) on bedrock, and placed a copper-coated steel stake, 36 ins. long, 1/2 inch in diam., over the cross and in a mound of stone, 3 ft. base, to the top, for a witness point of sec. 13, with brass cap 1½ ins. in diam., mkd.




1967

1

Survey of a Portion of the Subdivision Lines
 Within a Number of Sections
 Township 29 South, Range 19 East
 Salt Lake Meridian, Utah

CHAINS

42.95 Ridge spur, slopes east. At this point on line, I chiseled a cross (+) on bedrock, and set a plastic post, 30 ins. long, 2½ ins. in diam., over the cross and in a mound of stone, 4 ft. base to the top, for a witness point of sec. 13, with regulation brass cap mkd.



1967

80.03 The 1/4 sec. cor. of secs. 12 and 13, heretofore described.

Thence, in section 24

From the 1/4 sec. cor. of secs. 24 and 25, heretofore described.

N. 0° 02' E., on the north and south center line of sec. 24

Ascend over south slope.

3.50 Spur, slopes southeast.

15.15 Spur, slopes east. At this point on line, build a mound of stone, 3 ft. base, 2 ft. high.

54.85 Spur, slopes east. At this point on line, I chiseled a cross (+) on bedrock, and built a mound of stone, 3 ft. base, 2 ft. high over the above cross.

80.12 The 1/4 sec. cor. of secs. 13 and 24, heretofore described.

GENERAL DESCRIPTION

The elevation varies from 3900 ft. above sea level within the bed of the Colorado River near the true point for the 1/4 sec. cor. of secs. 11 and 12 to 4800 ft. above sea level near the cor. of secs. 1, 2, 11, and 12. The soil is sandy and rocky. Timber consists of scattering juniper and pinyon pine; undergrowth, young trees, brush and grass.

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Woodrow W. Campbell	Surveying Aid
Randy Earl	Surveying Aid
Arthur K. VanBuren	Surveying Aid
William Beck	Surveying Aid
Rodney J. Busk	Surveying Aid
Douglas C. Tapia	Surveying Aid
Terry S. Dabel	Surveying Aid
Delbert B. Pierce	Surveying Aid
Darrell G. Keck	Surveying Aid
Douglas G. Detmer	Surveying Aid

CERTIFICATE OF SURVEY

(I)(We), Gerald W. Hochstrasser and Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65, (I)(We) have dependently resurveyed a portion of the east boundary, surveyed a portion of the subdivisional lines and surveyed a portion of the subdivision lines within a number of sections, Township 29 South, Range 19 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 22, 1976 (Date) [Signature] (Cadastral Surveyor) Gerald W. Hochstrasser

June 22, 1976 (Date) [Signature] (Cadastral Surveyor) Ray Harpin

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary, survey of a portion of the subdivisional lines and the survey of a portion of the subdivision lines within a number of sections, Township 29 South, Range 19 East, of the Salt Lake Meridian, Utah executed by Gerald W. Hochstrasser and Ray Harpin, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

JAN 03 1978 (Date) [Signature] (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey) GPO 849-628

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISION LINES

(THE NORTH AND SOUTH CENTER LINE OF SECTION 36),

TOWNSHIP 29½ SOUTH, RANGE 19 EAST

AND

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

(THE SOUTH AND WEST BOUNDARIES OF SECTION 1)

AND

THE SURVEY OF A PORTION OF THE SUBDIVISION LINES

(THE NORTH AND SOUTH CENTER LINE AND THE EAST AND WEST CENTER LINE

OF SECTION 1)

TOWNSHIP 30 SOUTH, RANGE 19 EAST

Of the SALT LAKE

Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 19 65, approved JULY 22, 1965

_____, which provided for the surveys included under U.S. Survey Group
Number 485, and assignment instructions dated JULY 16, 19 65

Survey commenced JULY 26, 19 65

Survey completed AUGUST 2, 19 65


INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX DIAGRAM

Townships 29½ and 30 SOUTH, Range 19 EAST

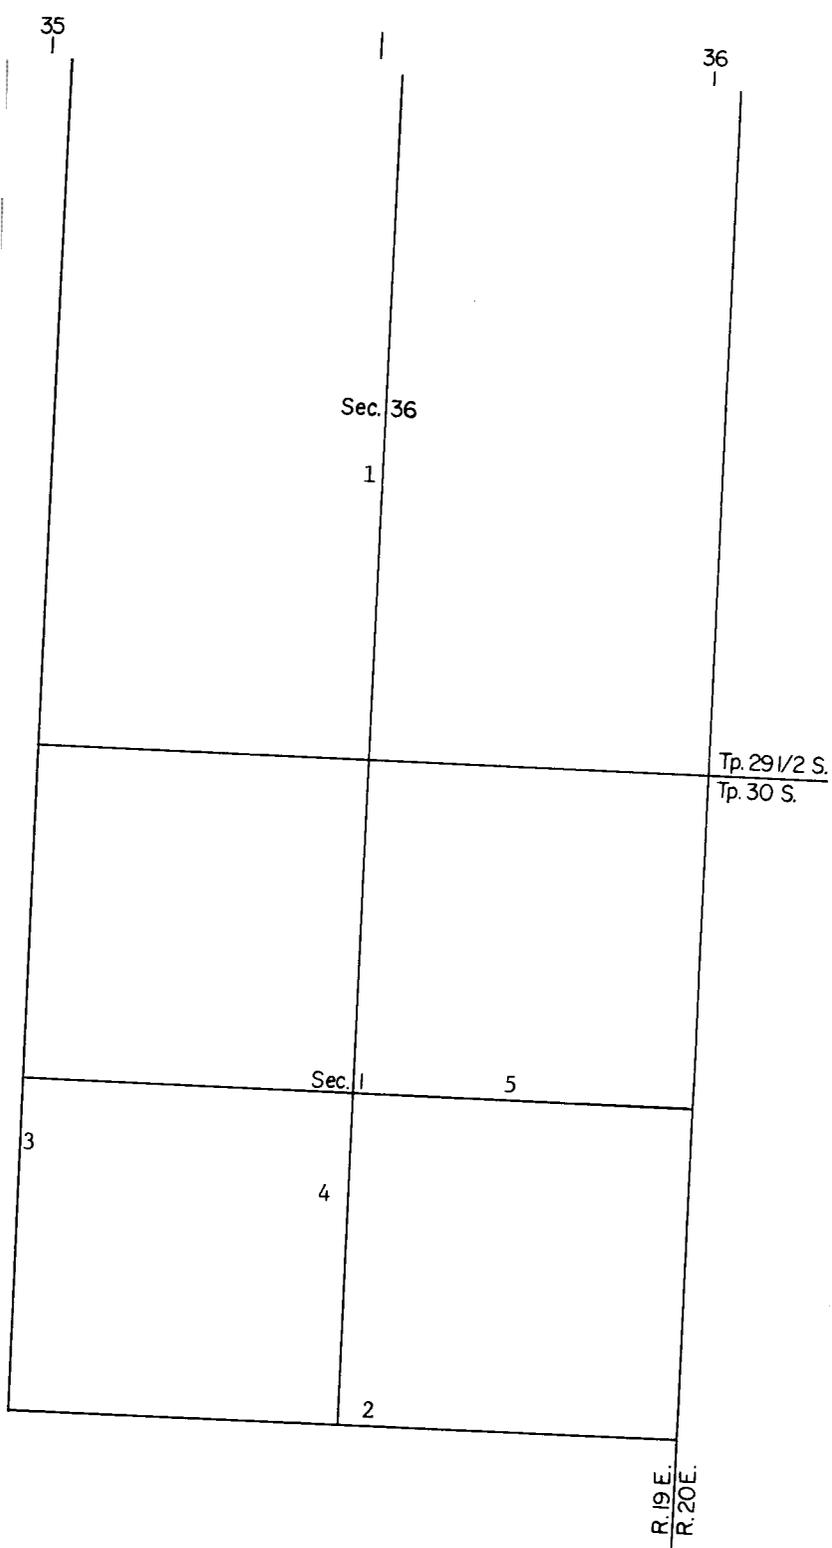

R. 19 E.
 R. 20 E.
 Tp. 29 S.
 Tp. 29 1/2 S.

Volume

#

R0596

Townships 29½ and 30 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivision lines (the north and south center line of section 36), Township 29½ South, Range 19 East, and the survey of a portion of the subdivisional lines (the south and west boundaries of section 1) and the survey of a portion of the subdivision lines (the north and south center line and the east and west center line of section 1), Township 30 South, Range 19 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: Township 29½ South, Range 19 East. The east boundary was surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1927, as described in the official record of the west boundary of Tp. 29½ S., R. 20 E., and as shown upon the official plat of that township, approved March 25, 1931, and accepted April 24, 1931. A portion of the north boundary was surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1928, as described in the official record of the south boundary of Tp. 29 S., R. 19 E., and as shown upon the official plat of that township, accepted May 25, 1961. A portion of the south boundary and a portion of the subdivisional lines were surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1928, as shown upon the official plat accepted May 25, 1961. Township 30 South, Range 19 East. The east boundary was surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1927, as described in the official record of the west boundary of Tp. 30 S., R. 20 E., and shown upon the official plat of that township, approved February 19, 1931, and accepted April 24, 1931.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 1, 6, 7, and 12 on the east boundary of Township 30 South, Range 19 East, as: Latitude 38° 12.0' N., and Longitude 109° 46.7' W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivision Lines
(the North and South Center Line of Section 36)
Township 29½ South, Range 19 East
Salt Lake Meridian, Utah

The 1/4 sec. cor. of secs. 1 and 36, Tps. 29½ and 30 S., R. 19 E., which is monumented with an iron post, 1-inch in diam., firmly set, projecting 13 ins. above the surface of the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation (G.L.O.) brass cap mkd.

Survey of a Portion of the Subdivision Lines
(The North and South Center Line of Section 36)
Township 29½ South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

1/4 $\frac{S\ 36}{S\ 1}$

1928

from which

A juniper, 14 ins. in diam., bears S. 60° 30' W.,
326 lks. distant, scribed 1/4 S1 BT.

A juniper, 10 ins. in diam., bears N. 26° 30' W.,
230 lks. distant, scribed 1/4 S36 BT.

N. 0° 14' W., on the north and south center line of sec.
36

Over a series of draws, drains east to northeast.

- 55.90 Spur, slopes northeast. At this point on line, I
chiseled a cross (+) on bedrock and built a mound of
stone, 3 ft. base, 2½ ft. high, over the above cross.
- 69.70 Ledge, 40 ft. high, faces southeast. At this point on
line, I chiseled a cross (+) on bedrock and built a mound
of stone, 3 ft. base, 2 ft. high, over the above cross.
- 80.90 Spur, slopes northeast. At this point on line, I
chiseled a cross (+) on bedrock and built a mound of
stone, 3 ft. base, 2 ft. high, over the above cross.
- 82.23 The north 1/4 sec. cor. of sec. 36, Tp. 29½ S., R. 19 E.,
which is monumented with an iron post, 1-inch in diam.,
firmly set in a mound of stone, 4 ft. base, 3 ft. high,
with regulation (G.L.O.) brass cap mkd.

1/4 S 36

1928

from which

A reference mark (bearing object) bears S. 74° 00'
E., 21 lks. distant, scribed on the face of ledge X
BO S36.

Survey of a Portion of the Subdivisional Lines
(the South and West Boundaries of Section 1)
Township 30 South, Range 19 East
Salt Lake Meridian, Utah

The cor. of secs. 1, 6, 7, and 12, Tps. 30 S., Rs. 19 and
20 E., which is monumented with an iron post, 2 ins. in
diam., firmly set, projecting 2½ ft. above the surface of
the ground, and in a mound of stone, 2½ ft. base, to the
top, with regulation (G.L.O.) brass cap mkd.

3

Survey of a Portion of the Subdivisional Lines
(The South and West Boundaries of Section 1)
Township 30 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

T30S
R19E R20E
S 1 | S 6
S 12 | S 7

1927

substantiated by:

A pinyon pine, 14 ins. in diam., bears N. 3° 15' E.,
336 lks. distant, scribed T30S R20E S6 BT.

A pinyon pine, 7 ins. in diam., bears S. 59° 45' E.,
122 lks. distant, scribed T30S R20E S7 BT.

A pinyon pine, 13 ins. in diam., bears S. 27° 45'
W., 114 lks. distant, scribed T30S R19E S12 BT.

A pinyon pine, 12 ins. diam., bears N. 64° 00' W.,
121 lks. distant, scribed T30S R19E S1 BT.

WEST, between secs. 1 and 12

Descend over west slope, through scattering timber.

18.50 Trail road, bears northeast and southwest.

34.40 Descend over steep west slope.

40.00 The point for the 1/4 sec. cor. of secs. 1 and 12.

Set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

T30S R19E
1/4 S 1
S 12

1965

42.00 Salt Creek, drains north.

80.00 The point for the cor. of secs. 1, 2, 11, and 12.

Set an iron post, 28 ins. long, 2½ ins. in diam., 13 ins.
in the ground, and in a mound of stone, 3 ft. base, to
the top, with brass cap mkd.

T30S R19E
S 2 | S 1
S 11 | S 12

1965

N. 0° 07' E., between secs. 1 and 2

0.80 Salt Creek, drains west, ascend over south to southeast
slope.

Survey of a Portion of the Subdivision Lines
 (The South and West Boundaries of Section 1)
 Township 30 South, Range 19 East
 Salt Lake Meridian, Utah

CHAINS

- 19.00 Ridge, bears southwest and northeast, descend along west slope.
- 36.00 Rim, bears northwest and southeast.
- 40.00 The point for the 1/4 sec. cor. of secs. 1 and 2.
 Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T30S R19E
 1/4

S 2 | S 1

1965

Descend along west slope.

- 79.89 The cor. of secs. 1, 2, 35, and 36 on the north boundary of the township, which is monumented with an iron post, 2 (record 2½) ins. in diam., firmly set, projecting 13 ins. above the surface of the ground, and in a small mound of stone, with brass regulation (G.L.O.) brass cap mkd.

T29½S R19E

S 35 | S 36

S 2 | S 1

T30S

1928

substantiated by:

A juniper, 4 ins. in diam., bears N. 66° 30' E., 133 lks. distant, scribed BT.

A juniper, 11 ins. in diam., bears S. 26° 30' E., 280 lks. distant, scribed T30S R19E S1 BT.

A juniper, 7 ins. in diam., bears S. 37° 30' W., 137 lks. distant, scribed T30S R19E S2 BT.

A juniper, 9 ins. in diam., bears N. 48° 30' W., 172 lks. distant, scribed T29½S R19E S35 BT.

The Survey of a Portion of the Subdivision Lines
 (The North and South Center Line
 and the East and West Center Line of Section 1)
 Township 30 South, Range 19 East
 Salt Lake Meridian, Utah

From the 1/4 sec. cor. of secs. 1 and 12.

N. 0° 05' E., on the north and south center line of section 1

CHAINS

- 39.97 Intersect the east and west center line, the point for the center 1/4 sec. cor. of sec. 1.
Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T30S R19E
C 1/4 S 1

1965

- 79.90 The 1/4 sec. cor. of secs. 1 and 36 on the north boundary of the township, heretofore described.

The 1/4 sec. cor. of secs. 1 and 6 on the east boundary of the township, which is monumented with an iron post, 1-inch in diam., firmly set, projecting 13 ins. above the surface of the ground, and in a small mound of stone, with regulation (G.L.O.) brass cap mkd.

1/4
S 1 | S 6

1927

N. 89° 57' W., on the east and west center line of section 1.

- 39.96 Intersect the north and south center line, the center 1/4 sec. cor. of sec. 1.

- 79.90 The 1/4 sec. cor. of secs. 1 and 2.

GENERAL DESCRIPTION

The elevation varies from 4220 ft. above sea level near the corner of sections 1, 2, 11, and 12 to 4890 ft. above sea level near the 1/4 section corner of sections 1 and 36, Tps. 29½ and 30 S., R. 19 E. The soil is sandy and rocky. Timber, scattering juniper and pinyon pine; undergrowth, brush and grass.

Volume

#

R0596

(March 1969)

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


NAMES	CAPACITY
Woodrow W. Campbell	Surveying Aid
Randy Earl	Surveying Aid
Arthur K. VanBuren	Surveying Aid
William Beck	Surveying Aid
Rodney J. Busk	Surveying Aid
Douglas C. Tapia	Surveying Aid
Terry S. Dabel	Surveying Aid
Delbert B. Pierce	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(We)~~, GERALD W. HOCHSTRASSER, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1965, (I) ~~(We)~~ have surveyed a portion of the subdivision lines (the north and south center line of section 36) Township 29½ South, Range 19 East, and surveyed a portion of the subdivisional lines (the south and west boundaries of section 1) and surveyed a portion of the subdivision lines (the north and south center line, and the east and west center line of section 1) Township 30 South, Range 19 East, of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 22, 1976

(Date)


(Cadastral Surveyor)
Gerald W. Hochstrasser

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivision lines (the north and south center line of section 36) Township 29½ South, Range 19 East, and the survey of a portion of the subdivisional lines (the south and west boundaries of section 1) and the survey of a portion of the subdivision lines (the north and south center line and the east and west center line of section 1) Township 30 South, Range 19 East, of the Salt Lake Meridian, Utah.

executed by Gerald W. Hochstrasser, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 03 1978

(Date)


(Chief, Division of Cadastral Survey)

I CERTIFY That the foregoing description of the field notes for the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-626

Volume

#

R0596

20

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 31 SOUTH, RANGE 19 EAST

Of the SALT LAKE Meridian,
In the State of UTAH

EXECUTED BY

RAY HAPRIN CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965

_____, which provided for the surveys included under ~~BY SURVEY~~/Group
Number 485, and assignment instructions dated MARCH 31, 1966.

Survey commenced MAY 5, 1966

Survey completed AUGUST 7, 1967

INDEX DIAGRAM

Township 31 SOUTH, Range 19 EAST,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19 7	20 5	21 4	22 3	23	24
30	29	28	27 2	26	25
31	32	33	34 1	35	36

Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 31 South, Range 19 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south boundary was surveyed by Craig P. Sylvester and Donald A. Cannon, Cartographic Survey Aids, in 1956, as described in the official record of the north boundary of Tp. 32 S., R. 19 E., and shown upon the official plat of that township, accepted September 17, 1957. The west boundary was surveyed by Fred R. Chappell, Cadastral Surveyor, in 1957, as described in the official record of the east boundary of Tp. 31 S., R. 18 E., and as shown upon the official plat of that township, accepted October 13, 1958. The east and north boundaries and a portion of the subdivisional lines were surveyed by Dell Cazier, Cadastral Surveyor, and Donald A. Cannon and Craig P. Sylvester, Cartographic Survey Aids, in 1957, as shown upon the official plat accepted October 13, 1958.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 2, 3, 34, and 35, on the south boundary of the township, as: Latitude $38^{\circ} 02' N.$, and Longitude $109^{\circ} 48.4' W.$ The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 2, 3, 34, and 35, Tps. 31 and 32, Rs. 19 E., (on the south boundary of the township), which is monumented with an iron post, $2\frac{1}{2}$ ins. in diam., firmly set in a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd.

T31S R19E

S 34 | S 35

S 3 | S 2

T32S

1956

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 01' W., between secs. 34 and 35

Across a series canyons and ascend over steep vertical ledges on south slope.

20.74 The south rim of mesa, bears northeast and southwest. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 34 and 35, with brass cap mkd.

WP 1
T31S R19E
S 34 | S 35

1967

Over gently rolling mesa top, through scattering juniper and pinyon pine.

40.00 The point for the 1/4 sec. cor. of secs. 34 and 35.

Set an iron post, 28 ins. long, 2½ ins. in diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base, 16 ins. high, with brass cap mkd.

T31S R19E
1/4
S 34 | S 35

1967

80.00 The point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R19E
S 27 | S 26
S 34 | S 35

1967

N. 0° 01' W., between secs. 26 and 27

Over gently rolling mesa top, through scattering juniper and pinyon pine.

24.53 Set an iron post, 28 ins. long, 2½ ins. in diam., 21 ins. in the ground, for the witness point No. 1, secs. 26 and 27, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

WP 1
T31S R19E
S 27 | S 26

1967

This corner is located on a gentle southeast slope near the ridge top, bears east and west.

40.00 The point for the 1/4 sec. cor. of secs. 26 and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on sandstone, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R19E
1/4
S 27 | S 26

1967

This corner is located on a gentle northeast slope.

Descend over northeast sandstone slope.

80.00 The point for the cor. of secs. 22, 23, 26, and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T31S R19E
S 22 | S 23
S 27 | S 26

1967

from which

A large sandstone boulder, approximately 50 ft. high, bears N. 59° 38' W., 66 lks. distant, scribed B+O on the southeast face, 5 ft. above the ground.

This corner is located in a narrow valley, bearing northeast and southwest and on the left bank of a dry wash, drains northeast.

WEST, between secs. 22 and 27

Ascend over steep east slope of canyon.

25.28 Ridge, bears north and south. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in bedrock, and in a mound of stone, 3½ ft. base, to the top, for witness point No. 1, secs. 22 and 27, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

WP 1
T31S R19E
S 22
S 27

1967

Thence, over broken ledges, and spurs of The Needles.

40.00 The point for the 1/4 sec. cor. of secs. 22 and 27.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in bedrock, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R19E
1/4 S 22
S 27

1967

80.00 The point for the cor. of secs. 21, 22, 27, and 28.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in bedrock, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R19E
S 21 | S 22
S 28 | S 27

1967

WEST, between secs. 21 and 28

Over broken ledges and spurs of The Needles.

20.79 Narrow ridge, bears north and south. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, for witness point No. 1, secs. 21 and 28, with brass cap mkd.

WP 1
T31S R19E
S 21
S 28

1967

39.98 The point for the 1/4 sec. cor. of secs. 21 and 28.

Set an iron post, 28 ins. long, 2½ ins. in diam., 5 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

T31S R19E
1/4 $\frac{S\ 21}{S\ 28}$

1967

79.96 Intersect the east boundary of sec. 20.

The point for the closing corner of secs. 21 and 28

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R19E
S 20 $\frac{S\ 21\ C}{S\ 28\ C}$

1967

From this closing corner, the witness 1/4 sec. cor. of secs. 20 and 21, bears N. 0° 03' W., 38.17 chs. distant, and is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 11 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T31S R19E
W C
1/4
↑
S 20 | S 21

1957

From this same closing corner, the cor. of secs. 20, 21, 28, and 29, bears S. 0° 03' E., 1.15 chs. distant, and is monumented with an iron post, 2½ ins. in diam., firmly set on bedrock, and in a mound of stone, 4 ft. base, 2 ft. high, I designated this corner to function for the cor. of secs. 20 and 29 only, and re-marked the brass cap, as:

T31S R19E
 $\frac{S\ 20}{S\ 29}$ | S 28

67

1957

WEST, between secs. 20 and 29

Across an area of boulders, through scattering juniper

13.36 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 16 ins. in the ground, with brass cap 1½ ins. in diam., mkd. 13.36 1966.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CORNER

- 15.75 Butler Wash, 45 lks. wide, drains north; ascend 90 ft. over steep east slope.
- 21.00 Ridge spur, slopes northwest; descend 70 ft. over west slope.
- 31.00 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 16 ins. in the ground, with brass cap 1 1/4 ins. in diam., mkd. 31.00 1966.
- 32.70 Wash, 30 lks. wide, drains north; ascend 15 ft. over steep northeast slope.
- 35.20 Top of ascent; thence, over rolling hills, through scattering juniper.
- 40.00 The point for the 1/4 sec. cor. of secs. 20 and 29
- Set an iron post, 28 ins. long, 2 1/4 ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3/4 ft. base, to the top, with brass cap mkd.

T31S R19E
1/4 S 20
S 29

1966

from which

A juniper, 5 ins. in diam., bears N. 89° 45' E., 110 lks. distant, scribed 1/4 S20 BT.

A juniper, 10 ins. in diam., bears S. 44° 00' W., 8 lks. distant, scribed 1/4 S29 BT.

- 44.00 Enter scattering juniper and pinyon pine.
- 48.20 Wash, 15 lks. wide, 15 lks. deep, drains north.
- 67.70 Wash, 20 lks. wide, 45 lks. deep, drains north.
- 72.30 Wash, 45 lks. wide, drains north.
- 80.00 The point for the cor. of secs. 19, 20, 29, and 30.
- Set an iron post, 28 ins. long, 2 1/4 ins. in diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R19E
S 19 | S 20
S 30 | S 29

1966

from which

A pinyon pine, 4 ins. in diam., bears N. 76° 30' E., 9 lks. distant, scribed X BT.

A pinyon pine, 4 ins. in diam., bears S. 6° 00' E., 12 lks. distant, scribed X BT.

This corner is located south of a huge boulder.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

S. 89° 56' W., between secs. 19 and 30

Over rolling hills across a series of small broken canyons and washes, through scattering pinyon pine and juniper.

- 38.98 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, for the witness 1/4 sec. cor. of secs. 19 and 30, with brass cap mkd.

W C
T31S R19E
1/4 ← $\frac{S\ 19}{S\ 30}$

1966

This witness corner is located on a rim over looking a small valley.

- 40.00 The true point for the 1/4 sec. cor. of secs. 19 and 30, which is located on an area of boulder slide, sloping west; an unsafe location for a monument.

Descend 20 ft. over west slope, through scattering juniper and pinyon pine.

- 41.00 Bottom of descent, thence, across valley.

- 45.45 Wash, 20 lks. wide, drains north.

- 46.98 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 12 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, with brass cap 1½ ins. in diam., mkd. 46.98 1966.

- 49.00 Ascend 90 ft. over steep east slope.

- 56.00 Rim, continue over broken land, through scattering pinyon pine and juniper.

- 61.50 Wash, 60 lks. wide, drains north.

- 77.60 The cor. of secs. 19, 24, 25, and 30, Tps. 31 S., Rs. 18 and 19 E., (on the west boundary of the township), which is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 16 ins. above the surface of the ground, and in a small mound of stone, with brass cap mkd.

T31S
R18E R19E
 $\frac{S\ 24\ | S\ 19}{S\ 25\ | S\ 30}$

1957

Township 31 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

GENERAL DESCRIPTION

The area of this survey is known as The Needles, with drainage into the Colorado River. The elevation varies from 5680 ft. above sea level near the corner of secs. 20, 21, 28, and 29, to 6640 ft. above sea level near the 1/4 section corner of sections 34 and 35. The soil is sandy and rocky. Timber consists of scattering juniper and pinyon pine; undergrowth, brush and grass.

CERTIFICATE OF SURVEY


By ~~me~~ Ray Harpin

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th of July, 1965, I (We) have surveyed a portion of the subdivisional lines within Township 31 South, Range 19 East,

of the Salt Lake Meridian, in the State of Utah, are represented in the foregoing field notes as having been executed by (me), (us) and under (his) direction, and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

May 25, 1976

Date:



(Cadastral Surveyor)

Ray Harpin

Date:

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.


The foregoing field notes of the survey of a portion of the subdivisional lines within Township 31 South, Range 19 East, of the Salt Lake Meridian, Utah,

executed by Ray Harpin, Cadastral Surveyor

have been critically examined and found correct, are hereby approved

May 03 1978

Date:



Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing is a copy of the field notes of the above-described survey

is a true copy of the original field notes

Date:

Chief, Division of Cadastral Survey

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 32 SOUTH, RANGE 19 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,

_____, which provided for the surveys included under U.S. Survey/Group
Number 485, and assignment instructions dated MARCH 31, 1966.

Survey commenced AUGUST 8, 1967

Survey completed AUGUST 8, 1967

INDEX DIAGRAM

Township 32 South, Range 19 East,

6	5	4	3	2	1
7	8	9	10	11	12
				3	1
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 32 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 32 South, Range 19 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The exterior boundaries and a portion of the subdivisional lines were surveyed by Craig P. Sylvester and Donald A. Cannon, Cartographic Survey Aids, in 1956, as shown upon the official plat accepted September 17, 1957.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 7, 12, 13, and 18, on the east boundary of the township, as: Latitude 38° 00.2' N., and Longitude 109° 46.4' W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 19 East
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 7, 12, 13, and 18, Tps. 32 S., Rs. 19 and 20 E. (on the east boundary of the township), which is monumented with an iron post, 2½ ins. in firmly set, projecting 22 ins. above the surface of the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T32S
R19E R20E
S 12 | S 7
S 13 | S 18

1956

WEST, between secs. 12 and 13

Ascend over broken east slope, through scattering juniper and pinyon pine.

5.34

Spur, slopes north. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled in bedrock, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, secs. 12 and 13, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

WP 1
T32S R19E
S 12
S 13

1967

26.37 Large, barren spur, slopes southwest. I chiseled a cross (+) on bedrock, and raised a mound of stone, 2 ft. base, 1½ ft. high, over the cross (+).

28.50 West side of spur, descend over large boulders into valley.

40.00 The point for the 1/4 sec. cor. of secs. 12 and 13.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T32S R19E
1/4 S 12
S 13

1967

60.28 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base to the top, for witness point No. 2, secs. 12 and 13, with brass cap mkd.

WP 2
T32S R19E
S 12
S 13

1967

This corner is located on a gentle northwest slope in scattering juniper.

Ascend over steep east slope, through scattering juniper.

80.00 The point for the cor. of secs. 11, 12, 13, and 14.

Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T32S R19E
S 11 | S 12
S 14 | S 13

1967

This corner is located on a gentle southeast slope.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 06' W., between secs. 11 and 12

Ascend over slight southeast slope, through scattering juniper and pinyon pine.

1.70 Descend over a series of broken canyons.

32.06 Barren spur, slopes east. At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, for the witness 1/4 sec. cor. of secs. 11 and 12, with brass cap mkd.

W C
T32S R19E
1/4
A
S 11 | S 12

1967

39.90 The true point for the 1/4 sec. cor. of secs. 11 and 12. This corner point is located within a rocky and broken area, an unsafe location for a monument.

79.80 The cor. of secs. 1, 2, 11, and 12 is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 13 ins. above the surface of the ground, and in a mound of stone, 2½ ft. base, to the top, with brass cap mkd.

T32S R19E
S 2 | S 1
S 11 | S 12

1956

Discontinue the survey of the township at this corner.

GENERAL DESCRIPTION

The area of this survey is rough and broken; with drainage to the north into the West Fork of the Salt Creek. The elevation varies from 5820 ft. above sea level near the 1/4 sec. cor. of sections 12 and 13 to 6320 ft. above sea level near the corner of sections 11, 12, 13, and 14. The soil is sandy and rocky. Timber consists of scattering juniper and pinyon pine; undergrowth, brush and grass.

Volume

#

R0596


CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th of July, 19 65, (I) ~~(We)~~ have surveyed a portion of the subdivisional lines within Township 32 South, Range 19 East,

of the Salt Lake Meridian, in the State of Utah, are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and ~~(her)~~ ~~(but)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, in the specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines within Township 32 South, Range 19 East, of the Salt Lake Meridian,

executed by Ray Harpin, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described survey is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GP

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISION LINES

(THE NORTH AND SOUTH CENTER LINE OF SECTION 33)

TOWNSHIP 27 SOUTH, RANGE 20 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 19 65, approved JULY 22, 1966

_____, which provided for the surveys included under ~~XXXXXX~~ Group
Number 485, and assignment instructions dated MARCH 31, 19 66

Survey commenced APRIL 21, 19 66

Survey completed APRIL 22, 19 66

INDEX DIAGRAM

Township 27 SOUTH, Range 20 EAST

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	1 33	34	35	36

Township 27 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivision lines (the north and south center line of section 33), Township 27 South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south, east and west boundaries were surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1926 and 1927. The subdivisional lines were surveyed by Charles F. Moore, Robert C. Yundt, and Elliot Bird, U. S. Surveyors, in 1926 and 1927. The north 1/4 section corners (on the north boundary of this township) the sixth latitude of sections were established by Robert C. Yundt, U. S. Surveyor, in 1927. The meanders of the Colorado River were surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1926 and 1927, as shown upon the official plat approved July 15, 1932, and accepted December 9, 1932.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the 1/4 section corner of sections 4 and 33 on the south boundary of the township, as: Latitude 38° 24.2' N., and Longitude 109° 43.5' W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivision Lines
(the North and South Center Line of Section 33)
Township 27 South, Range 20 East
Salt Lake Meridian, Utah

The 1/4 sec. cor. of secs. 4 and 33 on the south boundary of the township, which is monumented with an iron post, 1-inch in diam., firmly set, in a mound of stone, 3 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

1/4 $\frac{S\ 33}{S\ 4}$


1926

(the North and South Center Line of Section 33)
 Township 27 South, Range 20 East
 Salt Lake Meridian, Utah

CHAINS


N. 0° 07' W., on the north and south center line of sec. 33.

- 3.60 South rim of a canyon, near the eastern end, rim bearing northeast and west.
- 10.20 North rim of canyon, rim bears east and west.
- 34.88 At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, for a witness point of sec. 33, with brass cap mkd.



1966

- 42.40 South rim of a canyon, bears northeast and southwest.
- 57.20 North rim of canyon, rim bears N. 80° E. and S. 80° W.
- 79.88 The 1/4 sec. cor. of secs. 28 and 33 is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.



1926

GENERAL DESCRIPTION

The elevation varies from 4020 ft. above sea level near the 1/4 section corner of sections 4 and 33 on the south boundary of the township to 4400 ft. above sea level near the 1/4 section corner of secs. 28 and 33. The soil is sandy and rocky. No timber; undergrowth, brush and grass.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original
FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE EAST FOUR MILES OF THE
SEVENTH STANDARD PARALLEL SOUTH THROUGH RANGE 1
EAST, AND A SURVEY OF SECTIONS 1 AND 2, TOWNSHIP
36 SOUTH, RANGE 1 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Milton R. Workman Cadastral Surveyor

Under special instructions dated April 24, 19 69, which provided for the surveys
included under Group Number 508, approved May 2, 1969
and assignment instructions dated June 9, 19 70.

Survey commenced July 7, 19 70

Survey completed July 23, 19 70

Blank

Page

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISION LINES

(THE NORTH AND SOUTH CENTER LINE OF SECTIONS 4, 9, 16, AND 21)

WITHIN

TOWNSHIP 28 SOUTH, RANGE 20 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,

_____, which provided for the surveys included under ~~N.S. Survey~~ / Group
Number 485, and assignment instructions dated MARCH 21, 1966.

Survey commenced APRIL 22, 1966

Survey completed JUNE 7, 1966

INDEX DIAGRAM

Township 28 SOUTH, Range 20 EAST

6	5	1	8	2	1
7	8	3	10	11	12
18	17	4	15	14	13
19	20	5	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 28 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivision lines (the north and south center line of sections 4, 9, 16, and 21), Township 28 South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south boundary was independently resurveyed, the east, west, and north boundaries, and the subdivisional lines were surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1926 and 1927. The meanders of the Colorado River were surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1927, as shown upon the official plat approved January 23, 1933, and accepted June 28, 1933.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.


The data furnished with the special instructions give the geographic position for the 1/4 section corner of sections 21 and 28, as: Latitude 38° 20.7' N., and Longitude 109° 43.4' W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivision Lines
(The North and South Center Line
of Sections 4, 9, 16, and 21)
Township 28 South, Range 20 East
Salt Lake Meridian, Utah

Thence, in section 4

The true point for the 1/4 sec. cor. of secs. 4 and 9, which is determined from the hereinafter described witness 1/4 sec. cor.

From this true corner point, the witness 1/4 sec. cor. of secs. 4 and 9, bears (record WEST) and record (1.995 chs.) distant, and is monumented with an iron post, firmly set, projecting 17 ins. above the surface of the ground and in a mound of stone, 2½ ft. base, to the top, with regulation (G.L.O.) brass cap mkd.



1927


Survey of a portion of the 11th Division
 (The North and South Center Line
 of Sections 4, 9, 16, and 21)
 Township 28 South, Range 20 East
 Salt Lake Meridian, Utah

CHAINS

N. 0° 06' E., on the north and south center line of sec.
 4

Descend over north slope.

6.00 At this point on line, set a copper-coated steel stake,
 24 ins. long, 1/2 inch in diam., 7 ins. in the ground,
 and in a mound of stone, 2 ft. base, to the top, for a
 witness point of sec. 4, with brass cap 1 1/2 ins. in diam.,
 mkd.



1966

7.55 Trail road, bearing west and southeast.

11.55 Same trail road, bears southeast and northwest.

15.90 Same trail road, bears northeast and southwest.


18.65 Same trail road, bears southeast and northwest.

25.25 Same trail road, bears northeast and southwest.

29.00 Draw, drains west.

35.00 Same trail road, bears southeast and northwest.


39.07 At this point on line, set an iron post, 28 ins. long,
 2 1/2 ins. in diam., 11 ins. in the ground, and in a mound
 of stone, 2 ft. base, to the top, for a witness point of
 sec. 4, with brass cap mkd.



1966

42.10 Same trail road, bears east and west; thence, across a
 series of draws.

75.30 At this point on line, set a copper-coated steel stake,
 24 ins. long, 1/2 inch in diam., 7 ins. in the ground,
 and in a mound of stone, 2 ft. base, to the top, for a
 witness point of sec. 4, with brass cap 1 1/2 ins. in diam.,
 mkd.



1966

Survey of a Portion of the Subdivision Lines
 (The North and South Center Line
 of Sections 4, 9, 16, and 21)
 Township 28 South, Range 20 East
 Salt Lake Meridian, Utah

CHAINS

79.97 The 1/4 sec. cor. of secs. 4 and 33 on the north boundary of the township, which is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

1/4 $\frac{S\ 33}{S\ 4}$

1926

Thence, in section 9

The 1/4 sec. cor. of secs. 9 and 16 is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3½ ft. base, 3 ft. high, with regulation (G.L.O.) brass cap mkd.

1/4 $\frac{S\ 9}{S\ 16}$

1927

N. 0° 12' W., on the north and south center line of sec. 9

31.66 At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of sec. 9, with brass cap mkd.

W P
 T28S R20E

C
 |
 S | 9
 |
 C

1966

52.74 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 20 ins. in the ground, for a witness point of sec. 9, with brass cap 1½ ins. in diam., mkd.

W P
 C
 |
 S | 9
 |
 C

1966

67.50 Trail road, bears northwest and southeast.

(The North and South Center Line
of Sections 4, 9, 16, and 21)
Township 28 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

74.20 Base of sandstone ledge, bears east and west; thence, ascend over south to southwest slope.

79.94 The true point for the 1/4 sec. cor. of secs. 4 and 9, heretofore described.

Thence, in section 16

The 1/4 sec. cor. of secs. 16 and 21 is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 4 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

$$\frac{1}{4} \begin{array}{c} S \ 16 \\ S \ 21 \end{array}$$

1927

N. 0° 02' E., on the north and south center line of sec. 16.

12.85 Left bank of wash in Lockhart Canyon. At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 17 ins. in the ground, for a witness point of sec. 16, with brass cap 1½ ins. in diam., mkd.

$$\begin{array}{c} W \ P \\ C \\ | \\ S \ 16 \\ | \\ C \end{array}$$

1966

13.20 Wash in Lockhart Canyon, drains west.

22.54 Right bank of wash in Lockhart Canyon. At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 7 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of sec. 16. with brass cap 1½ ins. in diam., mkd.

$$\begin{array}{c} W \ P \\ C \\ | \\ S \ 16 \\ | \\ C \end{array}$$

1966

Ascend over steep and broken southeast slope.

CHAINS

46.74 Huge boulder. At this point on line, I chiseled a cross (+) on the above boulder and placed an iron post, 28 ins. long, 2½ ins. in diam, over the cross and in a mound of stone, 3 ft. base, to the top, for a witness point of sec. 16, with brass cap mkd.

W P
 T28S R20E
 C
 |
 S 16
 |
 C

1966

Thence, over a series of small broken canyons, with drainage to the west.

79.99 The 1/4 sec. cor. of secs. 9 and 16, heretofore described.

Thence, in section 21

The 1/4 sec. cor. of secs. 21 and 28 is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3½ ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

1/4 $\frac{S\ 21}{S\ 28}$

1927

N. 0° 04' E., on the north and south center line of sec. 21

9.30 Wash in Horsethief Canyon, drains northwest.

22.74 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 7 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for a witness point of sec. 21, with brass cap 1½ ins. in diam., mkd.

W P
 C
 |
 S 21
 |
 C

1966

41.91 At this point on line, set an iron post, 28 ins. long, 2½ ins. in diam., 11 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, for a witness point of sec. 21, with brass cap mkd.

(The North and South Center Line
of Sections 4, 9, 16, and 21)
Township 28 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

W P
T28S R20E
C
S | 21
C

1966

56.90 Ridge spur, slopes west. At this point on line, I chiseled a cross (+) on bedrock and placed a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., over the cross and in a mound of stone, 3 ft. base, to the top, for a witness point of sec. 21, with brass cap, 1½ ins. in diam., mkd.

W P
C
S | 21
C

1966

71.34 At this point on line, set a copper-coated steel stake, 24 ins. long, 1/2 inch in diam., 7 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for a witness point of sec. 21, with brass cap 1½ ins. in diam., mkd.

W P
C
S | 21
C

1966

Descend 200 ft. over broken north slope.

79.87 The 1/4 sec. cor. of secs. 16 and 21, heretofore described.

GENERAL DESCRIPTION

The elevation varies from 3940 ft. above sea level near the point of intersection of the north and south center line of section 16 and the wash within Lockhart Canyon to 4640 ft. above sea level near the true point for the 1/4 section corner of sections 4 and 9. The soil is sandy and rocky. No timber; undergrowth, brush and grass.

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July , 19 65 , (I) ~~(We)~~ have surveyed a portion of the subdivision lines (the north and south center line of sections 4, 9, 16, and 21), Township 28 South, Range 20 East,

of the Salt Lake Meridian, in the State of Utah , which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivision lines (the north and south center line of sections 4, 9, 16, and 21) Township 28 South, Range 20 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in , is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-626

Volume

#

R0596

Volume

#

R0596

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISION LINES

(THE EAST AND WEST CENTER LINE OF SECTION 7),

WITHIN

TOWNSHIP 29 SOUTH, RANGE 20 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 1965, approved JULY 22, 1965,

_____, which provided for the surveys included under U.S. Survey/Group
Number 485, and assignment instructions dated MARCH 31, 1966.

Survey commenced MAY 25, 1967

Survey completed MAY 26, 1967

INDEX DIAGRAM

Township 29 SOUTH, Range 20 EAST,

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

Township 29 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the survey of a portion of the subdivision lines (the east and west center line of section 7), Township 29 South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The east and north boundaries were independently resurveyed, the south and west boundaries, and the subdivisional lines were surveyed by Charles F. Moore and Robert C. Yundt, U. S. Surveyors, in 1926 and 1927; the meanders of the Colorado River were surveyed by Carl S. Swanholm, U. S. Cadastral Engineer, in 1927, as shown upon the official plat approved October 25, 1928, and accepted December 31, 1928. A portion of the west boundary was dependently resurveyed as described in the official record of the east boundary of section 12, Township 29 South, Range 19 East, executed concurrently with this group.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions for Group No. 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 7, 8, 17, and 18, as: Latitude $38^{\circ} 17.2' N.$, and Longitude $109^{\circ} 45.2' W.$ The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivision Lines
(the East and West Center Line of Section 7)
Township 29 South, Range 20 East
Salt Lake Meridian, Utah

The $1/4$ sec. cor. of secs. 7 and 8, which is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, with regulation (G.L.O.) brass cap mkd.

$1/4$
S 7 | S 8

1927

N. $89^{\circ} 39' W.$, on the east and west center line of sec.
7

Ascend over southeast slope.

Survey of a Portion of the Subdivision Lines
 (the East and West Center Line of Section 7)
 Township 29 South, Range 20 East
 Salt Lake Meridian, Utah

CHAINS

13.31 Ridge spur, slopes south. At this point on line, I chiseled a cross (+) on bedrock and placed a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., over the cross and in a mound of stone, 3 ft. base, to the top, with brass cap, 1½ ins. in diam., mkd. S7 13.31 1967.

Descend over southwest slope.

29.80 Draw, drains south, ascend over southeast to south slope.

40.80 At this point on line, I chiseled a cross (+) on bedrock and set a plastic post, 30 ins. long, 2½ ins. in diam., over the cross and in a mound of stone, 4 ft. base, to the top, for a witness point, of sec. 7, with regulation brass cap mkd.

W P
 T29S R20E
 S 7

1967

from which

A vertical sandstone wall, bears NORTH, 8 lks. distant, 6 ft. above the surface of the ground, I scribed B X O.

50.30 Ridge spur, slopes southeast. At this point on line, I chiseled a cross (+) on bedrock and placed a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., over the cross and in a mound of stone, 3 ft. base, to the top, with brass cap, 1½ ins. in diam. mkd. 50.30 1967.

76.82 Ridge spur, slopes north. At this point on line, I chiseled a cross (+) on bedrock and placed a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., over the cross and in a mound of stone, 3 ft. base, to the top, with brass cap, 1½ ins. in diam., mkd. 76.82 1967.

79.28 The 1/4 sec. cor. of secs. 7 and 12 on the west boundary of the township, which is monumented with an iron post, 1-inch in diam. firmly set in a mound of stone, 4 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

1/4
 S 12 | S 7

1926

substantiated by:


A reference mark (bearing object), bears N. 65° 00' E., 47 lks. distant, scribed on face of ledge X BO 1/4.

A reference mark (bearing object), bears N. 31° 00' W., 157 lks. distant, scribed on face of ledge X BO 1/4.

CHAINS

GENERAL DESCRIPTION

The elevation varies from 4240 ft. above sea level near the witness point (located at 40.80 chs. distant on the above east and west center line) of section 7 to 4640 ft. above sea level near the 1/4 sec. cor. of secs. 7 and 12 on the west boundary of the township. The soil is sandy and rocky. No timber; undergrowth, brush and grass.



Volume

#

R0596

CERTIFICATE OF SURVEY

(I/~~we~~), Ray Harpin

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1955, (I/~~we~~) have surveyed a portion of the subdivision lines (the east and west center line of section 7), within Township 29 South, Range 20 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~us~~)/and under (my) (~~our~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 22, 1976

(Date)

Ray Harpin
Ray Harpin

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivision lines (the east and west center line of section 7), within Township 29 South, Range 20 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 03 1978

(Date)

Bernard W. Foster
(Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey) GPO 849-626~~

239

Volume

#

R0596

Volume

#

R0596

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 30½ SOUTH, RANGE 20 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

RAY HARPIN

CADASTRAL SURVEYOR

Under special instructions dated JULY 16, 19 65, approved JULY 22, 1965,

_____, which provided for the surveys included under ~~XXXXXXX~~/Group
Number 485, and assignment instructions dated MARCH 31, 19 66.

Survey commenced AUGUST 10, 19 67

Survey completed AUGUST 10, 19 67

INDEX DIAGRAM

Township 30½ SOUTH, Range 20 EAST

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
<i>SIXTH</i>		<i>STANDARD</i>		<i>PARALLEL</i>	
31	32	33	34	35	36
			1		

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 30½ South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The east boundary was surveyed by Stewart and Anderson, U. S. Surveyors, in 1911. The Sixth Standard Parallel South (the north boundary of the township) was surveyed by Charles Frank Moore and Robert C. Yundt, U. S. Surveyors, in 1927, as described in the official record of the above standard parallel (the south boundary) of Tp. 30 S., R. 20 E., and shown upon the official plat of that township approved February 19, 1931 and accepted April 24, 1931. The south boundary was surveyed by Fred R. Chappell, Cadastral Surveyor, and Craig P. Sylvester, Cartographic Survey Aid, in 1957, as described in the official record of the north boundary of Tp. 31 S., R. 20 E., and as shown upon the official plat of that township accepted October 13, 1958. The west boundary was surveyed by Dell Cazier, Cadastral Surveyor, and Craig P. Sylvester and Donald A. Cannon, Cartographic Survey Aids, in 1957. A portion of the subdivisional lines was surveyed by Fred R. Chappell, Cadastral Surveyor, in 1957, as shown upon the official plat accepted October 13, 1958.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 2, 3, 34, and 35 on the south boundary of the township, as: Latitude 38° 07.2' N., and Longitude 109° 42.0' W. The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 30½ South, Range 20 East
Salt Lake Meridian, Utah

The cor. of secs. 2, 3, 34, and 35, Tps. 30½ and 31 S., R. 20 E., (on the south boundary of the township), which is monumented with an iron post, 2½ ins. in diam., firmly set in a mound of stone, 3 ft. base, 20 ins. high, with brass cap mkd.

T30½S R20E
S 34 | S 35
S 3 | S 2
T31S

1957

Survey of a Portion of the Subdivisional Lines
Township 30½ South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

N. 0° 01' W., between secs. 34 and 35

Descend over northwest slope.

29.94 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, for witness point No. 1, of secs. 34 and 35, with brass cap mkd.

WP 1
T30½S R20E
S 34 | S 35

1967

Ascend over west to southwest slope.

41.50 Intersect the Sixth Standard Parallel South

The point for the closing corner of secs. 34 and 35

Set an iron post, 28 ins. long, 2½ ins. in diam., on bedrock (between two boulders), and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T30S R20E
S 35
S 34 | S 35
C | C
T30½S

1967

From this closing corner, the Standard 1/4 sec. cor. of sec. 35, bears EAST, 14.47 chs. distant, and is monumented with an iron post, 1-inch in diam., firmly set in a mound of stone, 3 ft. base, 2½ ft. high, with regulation (G.L.O.) brass cap mkd.

S C
1/4 S 35

1927

From this same corner the Standard cor. of secs. 34 and 35, bears WEST, 25.53 chs. distant, and is monumented with an iron post, 2 ins. in diam., firmly set, projecting 13 ins. above the surface of the ground, with regulation (G.L.O.) brass cap mkd.

S C
T30S R20E
S 34 | S 35

1927

Discontinue the survey of the subdivisional lines at this corner.

CHAINS

GENERAL DESCRIPTION

The area encompassed in this survey is rough and broken. Drainage is to the west into Horse Canyon. The elevation varies from 5400 above sea level at a point on line between sections 34 and 35 (approximately 11 chs. distant north of the south boundary) to 5600 ft. above sea level near the closing corner of sections 34 and 35 on the north boundary of the township. The soil is sandy and rocky. Timber, scattering juniper and pinyon pine; undergrowth, brush and grass.

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


NAMES	CAPACITY
Darrell G. Keck	Surveying Aid
Ned E. Carnahan	Surveying Aid
Douglas G. Detmer	Surveying Aid
Robert R. Gibson	Surveying Aid
Michael L. Nyoren	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July , 19 65 , (I) ~~(We)~~ have surveyed a portion of the subdivisional lines within Township 30½ South, Range 20 East,

of the Salt Lake Meridian, in the State of Utah , which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines within Township 30½ South, Range 20 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

169

Volume

#

R0596

Volume

#

R0596

INDEX DIAGRAM

Township 31 SOUTH, Range 20 EAST,

6	5	4	3	2	1
7	8	9	10 6	11	12
18	17	16	15 5	14	13
19	20	21	22 4	23	24
30	29	28	27 3	26	25
31	32	33	34 3 2	35	36
				1	

CHAINS

The following field notes are those of the dependent resurvey of a portion of the south boundary and the survey of a portion of the subdivisional lines within Township 31 South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The east boundary was surveyed by Stewart and Anderson, U. S. Surveyors, in 1911. The south boundary was surveyed by Fred R. Chappell, Cadastral Surveyor, and Craig P. Sylvester, Cartographic Survey Aid, in 1957, as described in the official record of the north boundary of Tp. 32 S., R. 20 E., and as shown upon the official plat of that township accepted October 13, 1958. The west boundary was surveyed by Dell Cazier, Cadastral Surveyor, and Craig P. Sylvester and Donald A. Cannon, Cartographic Survey Aids, in 1957, as described in the official record of the east boundary of Tp. 31 S., R. 19 E., and shown upon the official plat of that township, accepted October 13, 1958. The north boundary and a portion of the subdivisional lines were surveyed by Fred R. Chappell, Cadastral Surveyor, and Craig P. Sylvester, Cartographic Survey Aid, in 1957, as shown upon the official plat accepted October 13, 1958.

The dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 2, 3, 34, and 35 on the south boundary of the township, as: Latitude $38^{\circ} 01.9' N.$, and Longitude $109^{\circ} 42.0' W.$ The mean magnetic declination is 15° East.

Dependent Resurvey of a Portion
of the South Boundary
Township 31 South, Range 20 East
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Fred R. Chappell, Cadastral Surveyor and
Craig P. Sylvester, Cartographic Survey Aid
in 1957

The 1/4 sec. cor. of secs. 2 and 35, Tps. 31 and 32 S., R. 20 E. (on the south boundary of the township), which is monumented with an iron post, $2\frac{1}{2}$ ins. in diam., firmly set in a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, with brass cap mkd.

Dependent Resurvey of a Portion
of the South Boundary
Township 31 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

T31S R20E
1/4 $\frac{S\ 35}{S\ 2}$
T32S
1957

S. 89° 56' W., between Tps. 31 and 32 S., through R. 20 E., and between secs. 2 and 35

40.13

The point for the cor. of secs. 2, 3, 34, and 35 is determined at proportionate distance. This corner point was not monumented during the original survey.

From this true point for the above section corner the point for a witness corner bears S. 0° 09' E., 7.10 chs. distant; set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

W C
T31S R20E
A
 $\frac{S\ 34\ | S\ 35}{S\ 3\ | S\ 2}$
T32S
1967

S. 89° 56' W., between secs. 3 and 34

40.13

The true point for the 1/4 sec. cor. of secs. 3 and 34 is determined at proportionate distance.

From this true point for the above corner the witness 1/4 sec. cor. of secs. 3 and 34 bears S. 89° 56' W., 6.53 chs. distant, and is monumented with an iron post, 2½ ins. in diam., firmly set in a mound of stone, 4 ft. base, 2½ ft. high, with brass cap mkd.

T31S R20E
1/4 $\frac{S\ 34}{S\ 3}$ → W
T32S C
1957

Discontinue the dependent resurvey of the township line at this corner point.

Survey of a Portion of the Subdivisional Lines
 Township 31 South, Range 20 East
 Salt Lake Meridian, Utah

CHAINS

From the true point for the corner of sections 2, 3, 34, and 34 on the south boundary of the township, heretofore described.

N. 0° 01' W., between secs. 34 and 35

Over broken ledges of Davis Canyon.

20.27

Set a plastic post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, for the witness point, of secs. 34 and 35, with regulation brass cap mkd.

W P
 T31S R20E

S 34 | S 35

1967

This corner is located 20 lks. east of the right bank of the wash in Davis Canyon.

39.56

Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to the top, for the witness 1/4 sec. cor. of secs. 34 and 35, with regulation brass cap mkd.

W C
 T31S R20E

1/4
 ↑
 S 34 | S 35

1967

This corner is located on a sandstone ridge, 35 lks. wide, bears east and west.

40.00

The true point for the 1/4 sec. cor. of secs. 34 and 35 is located on an inaccessible ledge, an unsafe location for monument.

80.00

The point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R20E
 S 27 | S 26
 S 34 | S 35

1967

N. 0° 01' W., between secs. 26 and 27

Over broken rims and canyons.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

15.42 Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, 18 ins. high, for the witness point, of secs. 26 and 27, with regulation brass cap mkd.

W P
T31S R20E
S 27 | S 26

1967

40.00 The point for the 1/4 sec. cor. of secs. 26 and 27.

Set a plastic post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

T31S R20E
1/4
S 27 | S 26

1967

80.00 The true point for the cor. of secs. 22, 23, 26, and 27 is location on a steep slope, an unsafe location for monument.

N. 0° 01' W., between secs. 22 and 23

Over broken canyons.

3.91 Set a plastic post, 30 ins. long, 2½ ins. in diam., 6 ins in the ground, and in a mound of stone, 3 ft. base, to the top, for the witness corner of secs. 22, 23, 26, and 27, with regulation brass cap mkd.

W C
T31S R20E
S 22 | S 23
S 27 | S 26
↓

1967

This corner is located on a spur, bears east.

40.00 The point for the 1/4 sec. cor. of secs. 22 and 23.

Set a plastic post, 30 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

CHAINS

T31S R20E
1/4

S 22 | S 23

1967

46.23 Set a plastic post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for the witness point of secs. 22 and 23, with regulation brass cap mkd.

W P
T31S R20E

S 22 | S 23

1967

This corner is located on a high ridge, bears east and west.

80.00 The point for the cor. of secs. 14, 15, 22, and 23.

Set a plastic post, 30 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

T31S R20E
S 15 | S 14
S 22 | S 23

1967

N. 0° 01' W., between secs. 14 and 15

Over broken canyons.

15.28 Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 2½ ft. base, to the top, for witness point No. 1, of secs. 14 and 15, with brass cap mkd.

WP 1
T31S R20E

S 15 | S 14

1967

This corner is located on a long narrow spur, slopes east.

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

40.00 The point for the 1/4 sec. cor. of secs. 14 and 15.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R20E
1/4

S 15 | S 14

1967

51.04 Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, for witness point No. 2, of secs. 14 and 15, with brass cap mkd.

WP 2
T31S R20E

S 15 | S 14

1967

This corner is located on a long narrow spur, slopes east.

80.00 The point for the cor. of secs. 10, 11, 14, and 15.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R20E
S 10 | S 11
S 15 | S 14

1967

N. 0° 15' W., between secs. 10 and 11

Along broken east slopes.

39.98 The point for the 1/4 sec. cor. of secs. 10 and 11.

Set an iron post, 28 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with brass cap mkd.

T31S R20E
1/4

S 10 | S 11

1967

Survey of a Portion of the Subdivisional Lines
Township 31 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

66.16 Set an iron post, 28 ins. long, 2½ ins. in diam., 3 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, for witness point No. 1, of secs. 10 and 11, with brass cap mkd.

WP 1
T31S R20E

S 10 | S 11

1967

70.70 Descend over steep broken north slope.

79.96 The cor. of secs. 2, 3, 10, and 11 is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 22 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T31S R20E
S 3 | S 2
S 10 | S 11

1957

Discontinue the survey of the township at this corner.

GENERAL DESCRIPTION

The area encompassed in this survey is rough and broken with deep canyons. For the most part drainage is to the northeast into Davis Canyon. The elevation varies from 5360 ft. above sea level near the 1/4 sec. cor. of secs. 26 and 27 to 6160 ft. above sea level near the 1/4 sec. cor. of secs. 14 and 15. The soil is sandy and rocky. There is not timber or undergrowth.

Volume

#

R0596

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 19 65, (I) ~~(We)~~ have dependently resurveyed a portion of the south boundary and surveyed a portion of the subdivisional lines, within Township 31 South, Range 20 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the south boundary and the survey of a portion of the subdivisional lines within Township 31 South, Range 20 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-626

Volume

#

R0596

Volume

#

R0596

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

WITHIN

TOWNSHIP 32 SOUTH, RANGE 20 EAST

Of the _____ SALT LAKE _____ Meridian,
In the State of _____ UTAH _____

EXECUTED BY

RAY HARPIN _____
CADASTRAL SURVEYOR

Under special instructions dated _____ JULY 16 _____, 1965, approved _____ JULY 22, 1965 _____

_____, which provided for the surveys included under U.S. Survey/Group
Number _____ 485 _____, and assignment instructions dated _____ MARCH 31 _____, 19 66 _____

Survey commenced _____ JUNE 9 _____, 19 67

Survey completed _____ AUGUST 9 _____, 19 67

INDEX DIAGRAM

Township 32 South, Range 20 East

6	5	4	3	2	1
7	8	9	10 3	11	12
18 4	17	16	15 2 1	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CHAINS

The following field notes are those of the survey of a portion of the subdivisional lines within Township 32 South, Range 20 East, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south and east boundaries and a portion of the subdivisional lines were surveyed by Stewart and Anderson, U. S. Surveyors, in 1911, as shown upon the official plat approved March 28, 1914. A portion of the subdivisional lines (the west and north boundaries of section 36) were surveyed by Donald A. Cannon, Cartographic Survey Aid, in 1956, as shown upon the official plat accepted September 17, 1957. The west boundary was surveyed by Craig P. Sylvester and Donald A. Cannon, Cartographic Survey Aids, in 1956, as described in the official record of the east boundary of Tp. 32 S., R. 19 E., and shown upon the official plat of that township, accepted September 17, 1957. The north boundary and a portion of the subdivisional lines were surveyed by Fred R. Chappell, Cadastral Surveyor, and Craig P. Sylvester, Cartographic Survey Aid, in 1957, as shown upon the official plat accepted October 13, 1958. A portion of the north boundary was dependently resurveyed as described in the official record of the south boundary of Township 31 South, Range 20 East, executed concurrently with this group.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and the Special Instructions for Group 485, Utah, dated July 16, 1965.

The direction of all lines of this survey was determined by direct altitude observations on the sun, for azimuth and refers to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position for the corner of sections 14 and 15, as: Latitude $37^{\circ} 59.4' N.$, and Longitude $109^{\circ} 42.0' W.$ The mean magnetic declination is 15° East.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 20 East
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 15, 16, 21, and 22, which is monumented with an iron post, $2\frac{1}{2}$ ins. in diam., firmly set, projecting 6 ins. above the surface of the ground, and in a collar of stone, with brass cap mkd.

T32S R20E
S 16 | S 15
S 21 | S 22

1957

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

S. 89° 47' E., along the south boundary of sec. 15

Over gently rolling bottomland of Big Pocket Canyon.

- 15.00 Approximate distance to east edge of the bottomland of Big Pocket Canyon.
- 39.26 The point for the south 1/4 sec. cor. of sec. 15. This corner point is located on a steep rocky west slope, an unsafe location for a monument.
- 47.79 Set an iron post, 28 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base to the top, for the witness south 1/4 sec. cor. of sec. 15, with brass cap mkd.

W C
T32S R20E
← 1/4 S 15

1967

This monument is located on broken rim over looking Big Pocket Canyon.

Over broken rims and canyons.

- 68.71 Set a copper-coated steel stake, 24 ins. long, 1/2-inch in diam., 10 ins. in the ground, and in a mound of stone, 2 ft. base, to the top, for witness point No. 1, sec. 15 (only), with brass cap 1½ ins. in diam., mkd.

WP 1
S 15

1967

This monument is located on a low spur, slopes southwest.

- 76.70 Rimrock, descend 20 ft. over broken southeast slope.
- 79.26 The point for the cor. of secs. 14 and 15

Set a plastic post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with regulation brass cap mkd.

T32S R20E
S 15 | S 14

1967

This corner is located 5 lks. east of a vertical ledge near the talus slope.

N. 0° 01' W., between secs. 14 and 15

Ascend over broken ledges, through scattering juniper.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

9.26 Set a plastic post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, for witness point No. 1, secs. 14 and 15, with regulation brass cap mkd.

WP 1
T32S R20E

S 15 | S 14

1967

This monument is located on the east end of a spur, slopes southwest.

Over broken rim, ledges, and canyons.

40.00 The point for the 1/4 sec. cor. of secs. 14 and 15.

Set a plastic post, 30 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with regulation brass cap mkd.

T32S R20E
1/4

S 15 | S 14

1967

This corner is located on a steep rocky north slope.

80.00 The point for the cor. of secs. 10, 11, 14 and 15.

Set a plastic post, 30 ins. long, 2½ ins. in diam., 7 ins. in the ground, and in a mound of stone, 3½ ft. base, to the top, with regulation brass cap mkd.

T32S R20E
S 10 | S 11
S 15 | S 14

1967

This corner is located on a steep rocky east slope.

N. 0° 01' W., between secs. 10 and 11

40.00 The point for the 1/4 sec. cor. of secs. 10 and 11

Set a plastic post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a collar of stone, with regulation brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

T32S R20E

1/4

S 10 | S 11

1967

Over nearly level mesa top, through scattering juniper.

49.00 North rim of mesa, bears east and northwest; thence, along broken east slope, through scattering juniper.

61.18 Set a copper-coated steel stake, 36 ins. long, 1/2-inch in diam., 24 ins. in the ground, for witness point No. 1, secs. 10 and 11, with brass cap 1½ ins. in diam., mkd.

WP 1

S 10 | S 11

1967

Raise a mound of stone, 3 ft. base, 2 ft. high, northwest of the monument.

This monument is located on a steep east slope.

80.00 The cor. of secs. 2, 3, 10, and 11, is monumented with an iron post, 2½ ins. in diam., firmly set. projecting 21 ins. above the surface of the ground, and in a mound of stone, with brass cap mkd.

T32S R20E

S 3 | S 2

S 10 | S 11

1957

Discontinue the survey of the second meridional line at this corner.

The cor. of secs. 17, 18, 19, and 20, is marked with a cross (+) chiseled on a stone ledge.

substantiated by:

A pinyon (record: pinon) pine, 10 ins. in diam., bears N. 54° 00' E., 155 lks. distant, scribed T32S R20E S17 BT.

A juniper, 8 ins. in diam., bears S. 40° 00' W., 47 lks. distant, scribed T32S R20E S19 BT.

from which

An iron post, 28 ins. long, 2½ ins. in diam., set over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to the top, for a reference monument, bears SOUTH, 10 lks. distant, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
 Township 32 South, Range 20 East

CHAINS

R M
 T32S R20E
 S 19 | S 20

1967

This reference monument is located on top of a ledge, approximately 6 ft. in elevation above the corner.

N. 89° 55' W., between secs. 18 and 19

Descent over western slope, crossing a series of rims.

40.00 The point for the 1/4 sec. cor. of secs. 18 and 19.

Set an iron post, 28 ins. long, 2½ ins. in diam., 9 ins. in the ground, and in a mound of stone, 3 ft. base, to the top, with brass cap mkd.

T32S R20E
 1/4 $\frac{S 18}{S 19}$

1967

This corner is located on a gentle south slope.

78.40 Intersect the west boundary of the township

The true point for the cor. of secs. 13, 18, 19, and 24, which is determined from the hereinafter described witness corners.

From this true corner point the witness cor. of secs. 13, 18, 19, and 24, bears (record SOUTH) course and record (6.50 chs.) distant, and is monumented with an iron post, 2½ ins. in diam., firmly set in a mound of stone, 3½ ft. base, 2 ft. high, with brass cap mkd.

W C
 T32S
 R19E R20E
 S 13 | S 18
 S 24 | S 19

1956

From this same true corner point the witness 1/4 sec. cor. of secs. 13 and 18, bears (record NORTH) course and record (38.50 chs.) distant, and is monumented with an iron post, 2½ ins. in diam., firmly set in a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines
Township 32 South, Range 20 East
Salt Lake Meridian, Utah

CHAINS

T32S
W C
1/4
↑
R19E | R20E
S 13 | S 18

1956

Discontinue the survey of the subdivisional lines at this corner.

GENERAL DESCRIPTION

The elevation varies from 5930 ft. above sea level near the cor. of secs. 15, 16, 21, and 22 to 6800 ft. above sea level near the 1/4 sec. cor. of secs. 18 and 19. The soil is sandy and rocky. Timber, scattering juniper and pinyon pine; undergrowth, brush and grass.

#


R0596

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ray Harpin, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of July, 1965 (I) ~~(We)~~ have surveyed a portion of the subdivisional lines within Township 32 South, Range 20 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 25, 1976
(Date)


Ray Harpin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of a portion of the subdivisional lines within Township 32 South, Range 20 East, of the Salt Lake Meridian, Utah

executed by Ray Harpin, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 03 1978
(Date)


(Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey) GPO 849-828~~

Volume

#

R0596

Volume

#

R0596

(April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
EIGHTH STANDARD PARALLEL SOUTH
RANGE 5 WEST, THE SOUTH AND NORTH LINES
OF THE PARALLEL AND MOUNTAIN THROUGH
TOWNSHIP 40 SOUTH

THE WEST MILE OF THE NORTH BOUNDARY
THE SOUTH MILE OF THE EAST BOUNDARY

AND
A PORTION OF THE SUBDIVISIONAL LINES OF
TOWNSHIP 40 SOUTH, RANGE 5 WEST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Milton R. Workman Supervisory Cadastral Surveyor

Under special instructions dated August 28, 19 74, approved August 29, 1974

_____, which provided for the surveys included under U.S. Survey/Group
Number 555, and assignment instructions dated August 29, 19 74

Survey commenced September 9, 19 74

Survey completed October 18, 19 74

INDEX DIAGRAM

Township 40 S., Range 5 W.,

7	8 6	34 5	4	3	2	1
33	7 34 8	9	10	11	12	27
32	18 32 17	26 16	21 15	16 14	13	25
30	19 31 20	24 21	20 22	23	24	13
28	30 29 29	23 28	19 27	15 26	12 25	12
6	7 31 27 32	22 33	17 34	14 35	11 36 10	2

T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

The following field notes are those of a dependent resurvey of the Eighth Standard Parallel South through Range 5 West, the south and north miles of the Panguitch and Kanab Guide Meridian through Township 40 South, the west mile of the north boundary, the south mile of the east boundary and a portion of the subdivisional lines of Township 40 South, Range 5 West.

T. 40 S., R. 5 W.

History of Survey

Surveyed by Retr. or Resurveyed by

SOUTH BOUNDARY (Eighth Standard Parallel South)

All Bailey and Burrill 1876

WEST BOUNDARY (Panguitch and Kanab Guide Meridian)

All J. G. Burrill 1876
 N. 1 mile A. J. Stewart Jr. 1883
 All but the N C. P. Sylvester 1974
 and S miles

EAST BOUNDARY

S. 2 miles J. G. Burrill 1876
 A. J. Stewart Jr. 1883
 N. 4 miles A. J. Stewart Jr. 1883
 All A. Nelson and 1911
 W. A. Stumm

NORTH BOUNDARY

W. 2 mile J. G. Burrill 1876
 A. J. Stewart Jr. 1883
 E. 4 miles A. J. Stewart Jr. 1883
 E. 5 miles A. Nelson and 1911
 W. A. Stumm

SUBDIVISIONS

W and S por- J. G. Burrill 1876
 tions
 Remaining por- A. Nelson and 1911
 tion W. A. Stumm

The dependent resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated August 28, 1974.

The directions of all lines were determined by direct solar observations. The lines were carried forward by sustained angulation being supplemented by observations on Polaris taken throughout the progress of the survey. The measurements were made with the Hewlett Packard Electronic Distance Measure, 3800A.

Prior to restoration of any corners, all necessary lines of the original survey were retraced and a diligent search was made for any evidence of the original monuments and other calls of the official record. Identified corners were remonumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence of the control of each corner.

Dependent Resurvey of the Eighth Standard Parallel South
through R. 5 W., Salt Lake Meridian, Utah

The geographic position of the southeast corner of the township, as determined through section line ties from U.S.G.S. triangulation station "SKUM", which is a standard U.S.G.S. tablet stamped "SKUM 1954" in buried boulder set flush with the ground, located N. 52°51'50" E., 22.834 chains from the corner of sections 29, 30, 31 and 32, T. 40 S., R. 5 W., is as follows:

Latitude 37°16'57" N. Longitude 112°21'34" W.

The mean magnetic declination is 14°45' E.

Dependent Resurvey of the Eighth Standard Parallel South
through R. 5 W., Salt Lake Meridian, Utah

(Restoring the 1876 survey by Bailey and Burrill)

Beginning at the standard cor. of T. 40 S., Rs. 4½ and 5 W., monumented with an iron post, 3 ins. diam., protruding 12 ins. above ground, with brass cap mkd.

S C
T 40 S
R 5 W R 4½ W

S 36 | S 31
1911

S. 89°53' W., on the S. bdy. of sec. 36.

Over rolling land, through scattering timber and sagebrush.

39.82 Point for the standard ¼ sec. cor. of sec. 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

¼ S 36
1974

70.60 Draw, drains S, enter lava bed.

79.64 The standard cor. of secs. 35 and 36, monumented with a trachyte stone, 16 x 12 x 8 ins., mkd. 1 notch on E and 5 notches on W edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

S 35 | S 36
S 2
1974

Dependent Resurvey of the Eighth Standard Parallel South
 T 40 S R 5 W Salt Lake District, Utah

CHAINS

Bury the mkd. stone alongside the iron post.

S. 89°47' W., on the S. bdy. of sec. 35.

Over rolling land, through scattering timber and sagebrush.

39.60 Trail road, bears N and S.

39.76 The standard $\frac{1}{4}$ sec. cor. of sec. 35, monumented with a trachyte stone, 12 x 10 x 7 ins., mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
 T 40 S R 5 W

$\frac{1}{4}$ S 35
 1974

Bury the mkd. stone alongside the iron post.

S. 89°53' W., beginning new measurement.

31.00 Enter dense timber.

39.79 The standard cor. of secs. 34 and 35, monumented with a trachyte stone, 16 x 8 x 6 ins., mkd. 2 notches on the E, 6 notches on N and 4 notches on W edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
 T 40 S R 5 W

S 34 | S 35
 S 3
 1974

Raise a mound of stone, 2 ft. base, 1½ ft. high, N of cor.

Bury the mkd. stone alongside the iron post.

S. 89°30' W., on the S. bdy. of sec. 34.

Over rolling land, through dense timber and sagebrush.

39.38 The standard $\frac{1}{4}$ sec. cor. of sec. 34, monumented with a trachyte stone, 18 x 8 x 6 ins. mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Eighth Standard Parallel South
through R. 5 W., Salt Lake Meridian, Utah

CHAINS

S C
T 40 S R 5 W

$\frac{1}{2}$ S 34
1974

from which

A juniper, 10 ins. diam., bears N. 50° E.,
24 lks. dist., mkd. $\frac{1}{2}$ S34 BT.

Bury the mkd. stone alongside the iron post.

S. 89°40' W., beginning new measurement.

- 8.00 Leave lava beds.
14.00 Trail road, bears N. 35° W. and S. 35° E.
20.00 Wash, 20 lks. wide, 10 ft. deep, drains SE.
39.61 The standard cor. of secs. 33 and 34, determined from
the original bearing tree

A pinon, 16 ins. diam., bears N. 10° W., 115 lks.
dist., mkd. S33 T40S R5W BT. (Record calls for
a cedar)

t the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

S C
T 40 S R 5 W

S 33 | S 34
S 4
1974

. 89°48' W., on the S. bdy. of sec. 33.

er rolling land, through dense timber and sagebrush.

- 39.68 he standard $\frac{1}{4}$ sec. cor. of sec. 33, monumented with a
andstone, 16 x 4 x 4 ins., mkd. $\frac{1}{4}$ on N face.

t the corner point

et an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
n the ground, with brass cap mkd.

S C
T 40 S R 5 W

$\frac{1}{4}$ S 33
1974

ury the mkd. stone alongside the iron post.

. 89°17' W., beginning new measurement.

- 8.00 dge, bears N and S.

Dependent Resurvey of the Eighth Standard Parallel South
through R. 5 W. Salt Lake Meridian Utah

CHAINS

35.50

Gypsum ridge, bears N and S.

38.60

The standard cor. of secs. 32 and 33, monumented with a deteriorated gypsum stone, 12 x 6 x 3 ins., firmly set in the ground, with no visible marks, from which the original bearing tree

A pinon, 18 ins. diam., bears N. 80° E., 12 lks. dist., mkd. S33 T40S R5W BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

S 32 | S 33
S 5
1974

from which

A juniper, 12 ins. diam., bears N. 27° W., 72 lks. dist., mkd. T40S R5W S32 BT.

Bury the unmkd. stone alongside the iron post.

N. 89°32' W., on the S. bdy. of sec. 32.

Over rolling land, through dense timber and sagebrush.

10.00

State highway 136, a graveled road between Glendale and Kanab, bears N. 47° W. and S. 47° E.

12.00

Wash, 25 lks. wide, 10 ft. deep, drains S. 45° E.

27.85

Ridge, bears N and S.

32.50

Draw, drains N.

38.60

Spur, slopes N.

38.66

The standard ¼ sec. cor. of sec. 32, monumented with a quartz boulder, 14 x 12 x 5 ins., mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

¼ S 32
1974

Bury the mkd. stone alongside the iron post.

S. 89°27' W., beginning new measurement.

8.35

Draw, drains N.

16.45

Ridge, bears N and S.

Dependent Resurvey of the Eighth Standard Parallel South
throu h R. 5 W., Salt Lake Meridian, Utah

CHAINS
39.08

The standard cor. of secs. 31 and 32, determined from the original bearing tree

A juniper, 10 ins. diam., bears N. 45° W., 8 lks. dist., mkd. S31 T40S R5W BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

S 31 | S 32
S 6
1974

Cor. is located on low ridge, bears NW and SE.

S. 89°53' W., on the S. bdy. of sec. 31.

Over rolling land, through dense timber and sagebrush.

15.15 Red ridge, bears N and S.

40.33 Point for the standard ¼ sec. cor. of sec. 31, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 40 S R 5 W

¼ S 31
1974

from which

A juniper, 10 ins. diam., bears N. 10° E., 66.5 lks. dist., mkd. ¼ S31 BT.

80.66 The standard cor. of T. 40 S., Rs. 5 and 6 W., monumented with an iron post, 2½ ins. diam., protruding 8 ins. above ground, with brass cap mkd.

S C
T 40 S
R 6 W R 5 W

S 36 | S 31
1959/

This cor. was reestablished by George D. Voorhees during the survey of T. 41 S., R. 6 W., in 1959.

Dependent Resurvey of the Panguitch and Kanab Guide Meridian through T. 40 S., between Rs. 5 and 6 W., Salt Lake Meridian, Utah

Dependent Resurvey of the Panguitch and Kanab Guide Meridian through T. 40 S., between Rs. 5 and 6 W., Salt Lake Meridian, Utah

CHAINS

(Restoring the 1876 survey by J. G. Burrill)

N. 0°35' E., bet. secs. 31 and 36.

Over rolling land, through dense timber and sagebrush.


6.40 Ridge, bears E and W.

24.25 Wash, 10 lks. wide, 3 ft. deep, drains W.

28.70 State highway 136, a graveled road, bears E to Kanab and W to Glendale.

40.24 Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.




from which

A juniper, 12 ins. diam., bears N. 42° E., 32 lks. dist., mkd. 1/4 S31 BT.


A juniper, 10 ins. diam., bears N. 75° W., 77 lks. dist., mkd. 1/4 S36 BT.

80.48 The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, protruding 6 ins. above ground, with brass cap mkd.



(Restoring the 1876 survey by J. G. Burrill, and the 1883 resurvey by A. J. Stewart Jr.)

From the cor. of secs. 1, 6, 7 and 12, monumented with an iron post, 2 1/2 ins. diam., protruding 6 ins. above ground, with brass cap mkd.



Dependent Resurvey of the Panguitch and Kanab Guide
Meridian through T. 40 S., between Rs. 5 and 6 W.,
Salt Lake Meridian Utah

CHAINS

N. $0^{\circ}52'$ W., bet. secs. 1 and 6, on the W. bdy. of the
Tp.

Over rolling hills, through dense timber and sagebrush.

38.17 The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a
trachyte stone, 12 x 8 x 7 ins., mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

	T 40 S	
	R 6 W R 5 W	
	$\frac{1}{4}$	
	S 1 S 6	
	1974	

Bury the mkd. stone alongside the iron post.

N. $0^{\circ}33'$ E., beginning new measurement.

23.50 Trail road, bears NE and SW.

41.42 The cor. of Tps. 39 and 40 S., Rs. 5 and 6 W., monumented
with a sandstone, 24 x 12 x 3 ins., mkd. 6 notches on N,
S, E and W edges.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins.
in the ground to solid rock, in a mound of stone, 3 ft.
base to top of brass cap, mkd.

	T 39 S	
	R 6 W R 5 W	
	S 36 S 31	
	S 1 S 6	
	T 40 S	
	1974	

Bury the mkd. stone alongside the iron post.

Cor. is located in cor. of fences, bearing N and W.

Dependent Resurvey of a portion of the N. bdy. of
sec. 6, T. 40 S., R. 5 W., Salt Lake Meridian, Utah

"Point for the cor. of secs. 5, 6, 31 and 32, on the N.
bdy. of the Tp., falls in a gravel road. This point was
shown to me by an adjacent landowner, Mr. V. Heaton,
who is a long time resident of Alton, Utah. Mr. Heaton
explained that he remembers when the present road was only
a trail road and that the cor. was monumented with a
3-inch iron post located on the east edge. He also
stated that a few years ago the county widened the road
at that time the iron post monument was destroyed. This
position was verified by record ties to the $\frac{1}{4}$ sec. cor.

Dependent Resurvey of a portion of the N. bdy. of
sec. 6. T. 40 S. R. 5 W. Salt Lake Meridian. 117.1

CHAINS

secs. 5 and 32 and the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, and
is accepted as the best available evidence of the original
cor. position."

Set a brass cap, 12 ins. below surface of the road.

from which

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set
24 ins. in the ground, for a reference monument,
bears N. $73^{\circ}30'$ W., 63.5 lks. dist., with brass
cap mkd. RM T39S R5W S31 42 FT 1974 and an arrow
pointing to the cor.

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set
24 ins. in the ground, for a reference monument,
bears N. $73^{\circ}30'$ E., 63.5 lks. dist., with brass
cap mkd. RM T39S R5W S32 42 FT 1974 and an arrow
pointing to the cor.

From this point the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, bears
S. $2^{\circ}40'$ E., 38.35 chs. dist., monumented with an iron
post, 1 in. diam., protruding 6 ins. above the ground,
with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S\ 6 \ | \ S\ 5 \\ | \\ 1911 \end{array}$$

From the same point the $\frac{1}{4}$ sec. cor. of secs. 5 and 32,
Tps. 39 and 40 S., bears N. $89^{\circ}40'$ E., 40.00 chs. dist.,
monumented with an iron post, 1 in. diam, protruding 6
ins. above ground, with brass cap mkd.

$$\frac{1}{4} \frac{S\ 32}{S\ 5}$$

1911

N. $86^{\circ}48'$ W., bet. secs. 6 and 31, on the N. bdy. of
the Tp.

Over rolling land, through scattering timber and sage-
brush.

10.80 Ridge, bears N and S.

36.58 The $\frac{1}{4}$ sec. cor. of secs. 6 and 31, monumented with a
sandstone, 12 x 8 x 6 ins., mkd. $\frac{1}{4}$ on N face.

from which

A juniper, 14 ins. diam., bears S. 10° E., 12 lks.
dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 39 S R 5 W

$$\frac{1}{4} \frac{S\ 31}{S\ 6}$$

T 40 S
1974

Dependent Resurvey of a portion of the N. bdy. of
sec. 6 T. 40 S. R. 5 W. Salt Lake Meridian Utah

CHAINS

Bury the mkd. stone alongside the iron post.

N. 89°33' W., beginning new measurement.

37.75 Trail road, bears N and S.

39.18 The cor. of Tps. 39 and 40 S., Rs. 5 and 6 W., heretofore described.

Dependent Resurvey of a portion of the E. bdy. of sec.
36, T. 40 S., R. 5 W., Salt Lake Meridian, Utah

(Restoring the 1876 survey by J. G. Burrill; the
1883 resurvey by A. J. Stewart Jr. and the
1911 retracement by A. Nelson and W. A. Stumm)

From the standard cor. of T. 40 S., Rs. 4½ and 5 W., here-
tofore described.

N. 0°03' E., bet. secs. 31 and 36.

Over nearly level land, through wildly scattering timber
and sagebrush.

39.91 The ¼ sec. cor. of secs. 31 and 36, monumented with a
sandstone, 12 x 7 x 3 ins., mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

```

      T 40 S
      R 5 W R 4½ W
          |
          ¼
          |
      S 36 | S 31
          |
          1974
  
```

Bury the mkd. stone alongside the iron post.

Set a cedar post, 5 ft. long, 2 ft. in the ground, along-
side the iron post.

N. 0°03' E., beginning new measurement.

14.90 Jeep trail, bears E and W.

39.77 The cor. of secs. 25, 30, 31 and 36, monumented with an
iron post, 2 ins. diam., protruding 14 ins. above ground,
with brass cap mkd.

Dependent Resurvey of a portion of the E. Bdy. of sec.
35, T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

T 40 S
R 5 W R 4½ W

S 25 | S 30
S 36 | S 31

1911

Dependent Resurvey of a portion of the Subdivisional
Lines, T. 40 S., R. 5 W., Salt Lake Meridian, Utah

Reestablishment of the survey executed by
J. G. Burrill in 1876

From the standard cor. of secs. 35 and 36, on the S. bdy.
of the Tp., heretofore described.

N. 0°09' E., bet. secs. 35 and 36.

Over rolling land, through scattering timber and sage-
brush.

25.00 Wash, drains E.

39.86 Point for the ¼ sec. cor. of secs. 35 and 36, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W

¼
|
S 35 | S 36

1974

from which

A juniper, 8 ins. diam., bears N. 56° E., 59 lks.
dist., mkd. ¼ S36 BT.

A juniper, 10 ins. diam., bears S. 40° W., 80 lks.
dist., mkd. ¼ S35 BT.

79.72 The cor. of secs. 25, 26, 35 and 36, monumented with a
sandstone, 16 x 6 x 3 ins., mkd. 1 notch on E and S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W

S 26 | S 25
S 35 | S 36

1974

Bury the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy.
of the Tp., heretofore described.

N. 89°56' W., bet. secs. 25 and 36.

Over rolling land, through dense timber and sagebrush.

39.02 The ¼ sec. cor. of secs. 25 and 36, monumented with a
sandstone, 18 x 8 x 5 ins., mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W

¼ $\frac{S\ 25}{S\ 36}$

1974

Bury the mkd. stone alongside the iron post.

S. 89°47' W., beginning new measurement.

10.00 Jeep trail, bears N. 20° W. and S. 20° E.

20.50 Draw, drains S.

40.47 The cor. of secs. 25, 26, 35 and 36.

N. 0°13' W., bet. secs. 25 and 26.

Over rolling hills, through dense timber and sagebrush.

39.88 Point for the ¼ sec. cor. of secs. 25 and 26, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to solid rock, in a mound of stone, 3 ft.
base to top of brass cap, mkd.

T 40 S R 5 W

¼
|
S 26 | S 25

1974

from which

A juniper, 8 ins. diam., bears N. 85° E., 25 lks.
dist., mkd. ¼ BT.

79.76 The cor. of secs. 25 and 26, monumented with a sandstone,
12 x 8 x 6 ins., mkd. 2 notches on S and 1 notch on E
edges.

from which

A juniper, 12 ins. diam., bears S. 30° E., 78 lks.
dist., mkd. T40S R5W S25 BT. (Record, pinon,
7 ins. diam., bears S. 87° E., 52 lks. dist.).

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian, Utah

CHAINS

A pinon, 6 ins. diam., bears S. 65° W., 37 lks.
dist., mkd. T40S R5W S26 BT. (Record, 70 lks.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T 40 S R 6 W

S 24
S 26 | S 25

1974

Bury the mkd. stone alongside the iron post.

Reestablishment of the survey executed by J. G. Burrill
in 1876 and the retracement executed by A. Nelson and
W. A. Stumm in 1911

From the cor. of sec. 24 and 25, on the E. bdy. of the
Tp., monumented with an iron post, 3 ins. diam., pro-
truding 12 ins. above the ground, with brass cap mkd.

T 40 S

R 5 W
S 24 | R 4 W
S 25 |

1911

N. 89°45' W., on the N. bdy. of sec. 25.

Over rolling hills, through dense timber and sagebrush.

39.48

The ¼ sec. cor. of sec. 25, deter. ed from an original
bearing tree

A juniper, 10 ins. diam., bears N. 49° E., 14 lks.
dist., mkd. ¼ S24 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 40 S R 5 W

¼ S 25

1974

from which

A pinon, 8 ins. diam., bears S. 15° W., 39 lks.
dist., mkd. ¼ S25 BT.

N. 89°27' W., beginning new measurement.

11.50

Jeep trail, bears S and NE.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W., Salt Lake Meridian Utah

CHAINS

- 13.00 Draw, drains S.
39.55 The cor. of secs. 25 and 26.

Reestablishment of the survey executed by
J. G. Burrill in 1876

From the standard cor. of secs. 34 and 35, on the S. bdy.
of the Tp., heretofore described.

N. 0°10' E., bet. secs. 34 and 35.

Over rolling land, through dense timber and sagebrush.

- 39.92 The $\frac{1}{2}$ sec. cor. of secs. 34 and 35, monumented with a
trachyte stone, 16 x 10 x 3 ins., mkd. $\frac{1}{2}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W
 |
 $\frac{1}{2}$
 |
S 34 | S 35
 |
 1974

Bury the mkd. stone alongside the iron post.

Set a juniper post, 5 ft. high, 2 ft. in the ground,
alongside the iron post.

Cor. is located in sagebrush flat.

N. 0°10' E., beginning new measurement.

- 17.80 Trail road, bears N. 60° E. and S. 60° W.
39.92 Point for the cor. of secs. 26, 27, 34 and 35, at propor-
tionate distance; there is no remaining evidence of the
original corner.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to solid rock, in a mound of stone, 3 ft.
base to top of brass cap, mkd.

T 40 S R 5 W

S 27 | S 26
S 34 | S 35

1974

from which

A pinon, 10 ins. diam., bears S. 20° W., 14 lks.
dist., mkd. T40S R5W S34 BT.

A pinon, 10 ins. diam., bears N. 40° W., 38 lks.
dist., mkd. T40S R5W S27 BT.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 25, 26, 35 and 36.

S. 89°55' W., bet. secs. 26 and 35.

Over rolling land, through dense timber and sagebrush.

39.76 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$

1974

from which

A juniper, 12 ins. diam., bears S. 40° W., 46 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

50.00 Wash, 20 lks. wide, 15 ft. deep, drains S.

79.52 The cor. of secs. 26, 27, 34 and 35.

N. 0°40' E., bet. secs. 26 and 27.

Over rolling hills, through dense timber and sagebrush.

34.80 Trail road, bears N. 55° E. and S. 55° W.

39.92 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$
S 27 | S 26

1974

from which

A juniper, 18 ins. diam., bears N. 40° E., 14 lks. dist., mkd. $\frac{1}{4}$ S BT.

79.84 The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 16 x 10 x 5 ins., mkd. 2 notches on S and E edges.

from which

A juniper, 12 ins. diam., bears S. 51 $\frac{1}{2}$ ° W., 60 lks. dist., mkd. T40S R5W S27 BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian Utah

CHAINS

T 40 S R 5 W

S 22		S 23
S 27		S 26

1974

Bury the mkd. stone alongside the iron post.

Reestablishment of the survey executed by J. G. Burrill
in 1876 and the retracement executed by A. Nelson and
W. A. Stumm in 1911

From the cor. of secs. 25 and 26.

S. 89°55' W., bet. secs. 23 and 26, along the N. bdy. of
sec. 26.

Over rolling hills, through dense timber and sagebrush.

- 7.60 Ridge, bears N and S.
30.60 Trail road, bears N. 30° E. and S. 30° W.
38.66 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a
sandstone, 12 x 12 x 4 ins., mkd. $\frac{1}{4}$ on N face.

from which

A juniper, 10 ins. diam., bears N. 75° E., 16 lks.
dist., mkd. $\frac{1}{4}$ S23 BT. (Record, 14 lks.)

A pinon, 10 ins. diam., bears South, 78 lks. dist.,
mkd. $\frac{1}{4}$ S26 BT. (Record, 80 lks.)

t the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$		S 23
		S 26

1974

ury the mkd. stone alongside the iron post.

West, beginning new measurement.

- 21.45 Ridge, bears NE and SW.
33.55 Top of ridge, bears N and S, 110 ft. above sec. cor.
39.60 The cor. of secs. 22, 23, 26 and 27.

From the cor. of secs. 14, 15, 22 and 23, monumented with
an iron post, 2 ins. diam., protruding 2 ins. above ground
ith brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W., Secs. 14 and 15, Unit 1

CHAINS

T 40 S R 5 W

S 15 | S 14
S 22 | S 23

1911

N. 0°27' W., bet. secs. 14 and 15.

Over rolling hills, through scattering timber and sagebrush.

11.50 Trail road, bears N. 37° E. and S. 37° W.

21.50 Draw, drains E.

27.00 Draw, drains SE.

38.50 Enter dense timber.

40.00 The 1/2 sec. cor. of secs. 14 and 15, monumented with a sandstone, 12 x 8 x 8 ins., mkd. 1/2 on W face.

from which

A juniper, 16 ins. diam., bears S. 80° W., 25 lks. dist., mkd. 1/2 S15 BT.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

1/2
|
S 15 | S 14

1974

Bury the mkd. stone alongside the iron post.

N. 0°01' W., beginning new measurement.

39.58 The cor. of secs. 14 and 15, monumented with an iron post, 2 ins. diam., protruding 10 ins. above ground, with brass cap mkd.

T 40 S R 5 W

S 11
S 15 | S 14
1911

Reestablishment of the survey executed by
J. G. Burrill in 1876

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., heretofore described.

N. 0°12' W., bet. secs. 33 and 34.

Dependent Resurvey of a portion of the Subdivisional Lines,

CHAINS

Over rolling hills, through dense timber and sagebrush.

12.75 Wash, 20 lks. wide, 10 ft. deep, drains SE.

39.84 The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a sandstone, 15 x 10 x 5 ins., mkd. $\frac{1}{4}$ on W face.

from which

A juniper, 12 ins. diam., bears N. 30° W., 15 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, 40 lks.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 33 \quad | \quad \text{S } 34 \\ | \\ 1974 \end{array}$$

Bury the mkd. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, N of cor.

N. 0°04' E., beginning new measurement.

29.50 Wash, drains SE.

30.50 Trail road, bears N. 43° W. and SE on a curve.

40.51 The cor. of secs. 27, 28, 33 and 34, monumented with a trachyte stone, 14 x 9 x 5 ins., mkd. 1 notch on S and 3 notches on E edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{c} \text{S } 28 \quad | \quad \text{S } 27 \\ \text{S } 33 \quad | \quad \text{S } 34 \end{array}$$

1974

from which

A juniper, 10 ins. diam., bears S. 33° E., 39 lks. dist., mkd. T40S R5W S34 BT.

A juniper, 12 ins. diam., bears N. 28° W., 15 lks. dist., mkd. T40S R5W S28 BT.

Bury the mkd. stone alongside the iron post.

From the cor. of secs. 26, 27, 34 and 35.

S. 89°57' W., bet. secs. 27 and 34.

Over rolling hills, through dense timber and sagebrush.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

9.25

Ridge, bears N and S.

39.66

Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$

1974

from which

A pinon, 12 ins. diam., bears S. 7° W., 71 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

A juniper, 12 ins. diam., bears N. 30° W., $70\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S27 BT.

40.15

Trail road, bears N. 25° W. and S. 25° E.

79.32

The cor. of secs. 27, 28, 33 and 34.

N. $0^\circ 37'$ E., bet. secs. 27 and 28.

Over rolling hills, through dense timber and sagebrush.

39.96

Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top of brass cap, mkd.

T 40 S R 5 W

$\frac{1}{4}$
S 28 | S 27

1974

79.92

The cor. of secs. 21, 22, 27 and 28, monumented with a trachyte stone, 16 x 10 x 6 ins., mkd. 2 notches on the S and 3 notches on E edges.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top of brass cap, mkd.

T 40 S R 5 W

$\frac{S\ 21}{S\ 28}$ | $\frac{S\ 22}{S\ 27}$

1974

Bury the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 22, 23, 26 and 27.

S. 89°39' W., bet. secs. 22 and 27.

Over rolling hills, through dense timber and sagebrush.

14.75 Trail road, bears N and S.

39.52 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, 16 x 8 x 6 ins., mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$ $\frac{S\ 22}{S\ 27}$

1974

from which

A juniper, 6 ins. diam., bears S. 79°45' E., 31 lks. dist., mkd. $\frac{1}{4}$ S BT.

A pinon, 12 ins. diam., bears N. 79°10' W., 22 lks. dist., mkd. $\frac{1}{4}$ BT.

Bury the mkd. stone alongside the iron post.

Cor. is located on SE slope.

N. 89°42' W., beginning new measurement.

0.50 Ridge, bears NE and SW.

39.86 The cor. of secs. 21, 22, 27 and 28.

N. 0°21' E., bet. secs. 21 and 22.

Over lava bench, through scattering timber and sagebrush.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top of brass cap, mkd.

T 40 S R 5 W

$\frac{1}{4}$
|
S 21 | S 22

1974

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

46.00 Leave lava bench, enter flat land.

73.50 Trail road, bears E and W, enter scattering timber.

Dependent Resurvey of a portion of the Subdivisional Lines,
T 40 S R 5 W. S. 16, 15, 21, 22. M. 1, 2, 3, 4.

CHAINS

80.02

The cor. of secs. 15, 16, 21 and 22, monumented with a broken trachyte stone, 4 x 4 x 4 ins., with 3 notches, at the cor. of fences, bearing N, S. 1°30' E. and W.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

S 16	S 15
S 21	S 22

1974

Bury the mkd. stone alongside the iron post.

From the cor. of secs. 14, 15, 22 and 23.

S. 89°48' W., bet. secs. 15 and 22.

Over rolling land, through scattering timber and sagebrush.

4.50 Trail road, bears N. 40° E. and S. 40° W.

26.25 Trail road, bears N. 30° W. and S. 30° E.

39.68 Point for the ¼ sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

¼	S 15
	S 22

1974

from which

A juniper, 12 ins. diam., bears S. 67°10' W., 124 lks. dist., mkd. ¼ S22 BT.

A juniper, 8 ins. diam., bears N. 33°45' W., 73 lks. dist., mkd. ¼ S15 BT.

Set a juniper post, 5 ft. high, 2 ft. in the ground, alongside the iron post.

Begin asc. over SE slope of Bald Knoll.

63.00 Top of ascent; desc. over SW slope of Bald Knoll.

79.36 The cor. of secs. 15, 16, 21 and 22.

N. 1°26' W., bet. secs. 15 and 16.

Over rolling land, through scattering timber and sagebrush.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS
39.59

The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, determined by mound of stone at the cor. of fences, bearing N and E. This position is harmoniously related with other identified original corners in the area, and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W
 $\frac{1}{4}$
 |
S 16 | S 15
 |
 1974

N. $0^{\circ}12'$ W., beginning new measurement.

- 8.00 Cor. of fences, bears S and E.
12.20 Trail road, bears E and W.
39.90 The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., protruding 10 ins. above ground, with brass cap mkd.

T 40 S R 5 W

S 9 | S 10
S 16 | S 15

1911

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., heretofore described.

N. $0^{\circ}26'$ W., bet. secs. 32 and 33.

Over rolling hills, through dense timber and sagebrush.

- 22.00 Ridge, bears NE and SW.
40.20 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W
 $\frac{1}{4}$
 |
S 32 | S 33
 |
 1974

from which

A pinon, 12 ins. diam., bears N. 60° W., 57 lks. dist., mkd. $\frac{1}{4}$ S BT.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian, Utah

CHAINS

67.70

Trail road, bears N. 60° E. and S. 60° W.

80.40

Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

S 29	S 28
S 32	S 33

1974

From the cor. of secs. 27, 28, 33 and 34.

N. 89°35' W., bet. secs. 28 and 33.

Over rolling hills, through dense timber and sagebrush.

8.00

Trail road, bears N. 43° W. and S. 43° E.

10.00

Wash, drains SE.

39.35

Point for the ¼ sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

¼	S 28
	S 33

1974

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

52.00

Ridge, bears N and S.

78.70

The cor. of secs. 28, 29, 32 and 33.

N. 0°05' E., bet. secs. 28 and 29.

Over rolling hills, through dense timber and sagebrush.

40.20

Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

S 29	S 28
------	------

1974

Dependent Resurvey of a portion of the Subdivisional Lines,

CHAINS

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

80.40 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 12 x 10 x 2 ins., mkd. 4 notches on E and 2 notches on S edges.

from which

A pinon, 12 ins. diam., bears N. 70° E., 65 lks dist., with healed blaze. (Record, N. 50° E., 28 lks.)

A juniper, 12 ins. diam., bears S. 21° W., 14 lks. dist., mkd. T40S R5W S28 BT. (Record, S. 65° E., 35 lks.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top of brass cap, mkd.

T 40 S R 5 W

S 20	S 21
S 29	S 28

1974

Bury the mkd. stone alongside the iron post.

From the cor. of secs. 21, 22, 27 and 28.

N. $89^{\circ}13'$ W., bet. secs. 21 and 28.

Over rolling hills, through dense timber and sagebrush.

39.75 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in a crack of a lava stone, in a mound 3 ft. base to top of brass cap, mkd.

T 40 S R 5 W

$\frac{1}{4}$	S 21	
	S 28	

1974

45.00 Trail road, bears N. 18° W. and S. 18° E.

79.50 The cor. of secs. 20, 21, 28 and 29.

N. $0^{\circ}11'$ E., bet. secs. 20 and 21.


Over rolling hills, through dense timber and sagebrush.

39.61 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey of a portion of the Subdivisional Lines,
 T4S R5W S20E

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

79.22


The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 18 x 18 x 4 ins., mkd. 4 notches on E and 3 notches on S edges.

from which

A juniper, 12 ins. diam., bears S. 45° W., 21 lks. dist., mkd. T40S R5W S20 BT. (No original record of this tree)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top of brass cap, mkd.



from which

A juniper, 14 ins. diam., bears S. 80° E., 43 lks. dist., mkd. T40S R5W S21 BT.

Bury the mkd. stone alongside the iron post.

Set a steel fence post, 6 ft. long, alongside the iron post.

From the cor. of secs. 15, 16, 21 and 22.

N. 89°20' W., bet. secs. 16 and 21.

Over nearly level land, through sagebrush, along fence line, trail road on N side of fence.

27.80

Cor. of fences, bears S. 35 lks., fences bear S. 6° W., and E.

28.00

Trail road, bears N and S.

35.50

Ridge, bears NW and SE.

39.82

The ¼ sec. cor. of secs. 16 and 21, monumented with a sandstone, 16 x 8 x 3 ins., mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W., Salt Lake Meridian

CHAINS

T 40 S R 5 W

$$\frac{1}{4} \begin{array}{r} \text{S } 16 \\ \text{S } 21 \end{array}$$

1974

Bury the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

S. 89°47' W., beginning new measurement.

- 1.50 Trail road, bears N and S.
18.50 Wash, drains S. 10° W.
27.00 Enter hills and dense timber.
39.93 The cor. of secs. 16, 17, 20 and 21.

N. 0°33' W., bet. secs. 16 and 17.

Over rolling hills, through dense timber and sagebrush.

- 24.00 Draw, drains SE.
39.52 Point for the ¼ sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 17 \quad | \quad \text{S } 16 \\ | \\ 1974 \end{array}$$

from which

A juniper, 8 ins. diam., bears S. 44°40' E., 21½ lks. dist., mkd. ¼ S BT.

A juniper, 10 ins. diam., bears S. 88°10' W., 15 lks. dist., mkd. ¼ S BT.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W of cor.

- 77.50 Junction of trail roads, bearing NE, SE, NW and SW.
79.04 The cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 ins. diam., protruding 12 ins. above ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{r|l} \text{S } 8 & \text{S } 9 \\ \text{S } 17 & \text{S } 16 \end{array}$$

1911

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W. Salt Lake Meridian, Utah

CHAINS

Reestablishment of the survey executed by J. G. Burrill
in 1876 and the retracement executed by A. Nelson and
W. A. Stumm in 1911

From the cor. of secs. 9, 10, 15 and 16.

S. 89°38' W., bet. secs. 9 and 16.

Over rolling hills, through dense timber and sagebrush.

0.20 Trail road, bears N and S.

39.38 The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, monumented with a
sandstone, 18 x 12 x 6 ins., mkd. $\frac{1}{4}$ on N face.

from which

A pinon, 12 ins. diam., bears S. 30° W., 28 lks.
dist., mkd. $\frac{1}{4}$ S16 BT.

A juniper, 10 ins. diam., bears N. 25° W., 81 $\frac{1}{2}$ lks.
dist., mkd. $\frac{1}{4}$ S9 BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T 40 S R 5 W

$\frac{1}{4}$ $\frac{S 9}{S 16}$

1974

Bury the mkd. stone alongside the iron post.

N. 89°49' W., beginning new measurement.

6.10 Trail road, bears N and S.

39.00 Trail road, bears NE and SW.

40.00 The cor. of secs. 8, 9, 16 and 17.

Reestablishment of the survey executed by
J. G. Burrill in 1876

From the standard cor. of secs. 31 and 32, on the S. bdy.
of the Tp., heretofore described.

N. 1°03' W., bet. secs. 31 and 32.

Over rolling hills, through dense timber and sagebrush.

40.31 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,

CHAINS

T 40 S R 5 W

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 31 \quad | \quad \text{S } 32 \\ | \\ 1974 \end{array}$$

- 53.00 Wash, 30 lks. wide, 12 ft. deep, drains SE.
- 59.50 State highway No. 136, a graveled road bet. Glendale and Kanab, bears N. 48° W. to Glendale and S. 48° E. to Kanab.
- 80.62 Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{c} \text{S } 30 \quad | \quad \text{S } 29 \\ \text{S } 31 \quad | \quad \text{S } 32 \end{array}$$

1974

From this corner, U.S.G.S. triangulation station "SKUM", bears N. 52°51' 50" E., 22.834 chains.

From the cor. of secs. 28, 29, 32 and 33.

N. 89°52' W., bet. secs. 29 and 32.

Over rolling hills, through dense timber and sagebrush.

- 39.28 Point for the ¼ sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\frac{1}{4} \frac{\text{S } 29}{\text{S } 32}$$

1974

- 78.56 The cor. of secs. 29, 30, 31 and 32.

S. 89°45' W., bet. secs. 30 and 31.

Over rolling hills, through dense timber and sagebrush.

- 21.00 Wash, in bottom of draw, drains S.
- 23.10 Trail road, bears N and S.
- 39.21 Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian Utah

CHAINS

T 40 S R 5 W

$\frac{1}{4}$ $\frac{S\ 30}{S\ 31}$

1974

47.90 Spur, slopes S.

78.31 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., heretofore described.


From the cor. of secs. 29, 30, 31 and 32.

N. 0°05' E., bet. secs. 29 and 30.

Over rolling hills, through dense timber and sagebrush.

38.46 Point selected for witness $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top of brass cap, mkd.



40.31 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, at proportionate distance; falls in a draw, drains W, where a cor. cannot be perpetuated; there is no remaining evidence of the original corner.

64.00 Draw, drains SW.

80.62 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 10 x 8 x 4 ins., mkd. 5 notches on E and 2 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 40 S R 5 W

$\frac{S\ 19}{S\ 30}$ | $\frac{S\ 20}{S\ 29}$

1974

from which

A juniper, 14 ins. diam., bears S. 67°45' W., 71 lks. dist., mkd. S30 BT.

A juniper, 16 ins. diam., bears N. 23°30' W., 16 lks. dist., mkd. S19 BT.

Bury the mkd. stone alongside the iron post.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian

CHAINS

From the cor. of secs. 20, 21, 28 and 29.

N. 89°41' W., bet. secs. 20 and 29.

Over rolling hills, through dense timber and sagebrush.

29.00 Trail road, bears NW and SE.

33.50 Trail road, bears N and S.

39.31 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\frac{1}{4} \frac{S \ 20}{S \ 29}$$

1974

Set a juniper post, 5 ft. high, 2 ft. in the ground, alongside the iron post.

Cor. is located on W edge of sagebrush flat.

57.50 Draw, drains SW.

78.62 The cor. of secs. 19, 20, 29 and 30.

S. 89°21' W., bet. secs. 19 and 30.

Over rolling hills, through dense timber and sagebrush.

39.34 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock, in a mound of stone, 4 ft. above to top of brass cap, mkd.

T 40 S R 5 W

$$\frac{1}{4} \frac{S \ 19}{S \ 30}$$

1974

Cor. is located on W slope.

78.62 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the P., monumented with an iron post, $2\frac{1}{2}$ ins. diam., 8 ins. above ground, with brass cap mkd.

T 40 S
R 6 W R 5 W

$$\frac{S \ 24 \ | \ S \ 19}{S \ 25 \ | \ S \ 30}$$

1974

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 19, 20, 29 and 30.

N. 0°15' W., bet. secs. 19 and 20.

Over rolling hills through dense timber and sagebrush.


4.00 Trail road, bears NE and SW.

15.00 Trail road, bears NW and SE.

39.45 Small draw, drains W.

39.50 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.




Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

74.00 Wash, 20 lks. wide, 8 ft. deep, drains W.

79.00 Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.



from which

A juniper, 10 ins. diam., bears N. 35°30' E.,
60 lks. dist., mkd. T40S R5W S17 BT.

A juniper, 10 ins. diam., bears S. 67°40' E.,
44 lks. dist., mkd. T40S R5W S20 BT.

A juniper, 12 ins. diam., bears S. 26° W.,
31 lks. dist., mkd. T40S R5W S19 BT.

A juniper, 8 ins. diam., bears N. 62° W.,
76 lks. dist., mkd. T40S R5W S18 BT.

From the cor. of secs. 16, 17, 20 and 21.

N. 89°50' W., bet. secs. 17 and 20.

Over rolling hills, through dense timber and sagebrush.

38.00 Trail road, bears N and S.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian Utah

CHAINS

39.62

Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\frac{1}{4} \frac{S 17}{S 20}$$

1974

from which

A juniper, 8 ins. diam., bears S. 40° W., 21 lks. dist., mkd. $\frac{1}{4}$ S BT.

A juniper, 10 ins. diam., bears N. 65° W., 20 lks. dist., mkd. $\frac{1}{4}$ S BT.

79.24 The cor. of secs. 17, 18, 19 and 20.

S. $89^\circ 45'$ W., bet. secs. 18 and 19.

Over rolling hills, through dense timber and sagebrush.

25.00 State highway 136, a graveled road in Sink Valley, bears N and S.

38.72 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C

T 40 S R 5 W

$$\frac{1}{4} \frac{S 18}{S 19}$$

1974

39.60 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, at proportionate distance, falls in Sink Valley Wash, 1.00 ch. wide, 20 ft. deep, drains S, where a cor. cannot be perpetuated; there is no remaining evidence of the original corner.

79.16 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., protruding 6 ins. above ground, with brass cap mkd.

T 40 S

R 6 W R 5 W

$$\frac{S 13}{S 24} \mid \frac{S 18}{S 19}$$

1974

From the cor. of secs. 17, 18, 19 and 20.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W., Salt Lake Meridian, Utah


CHAINS

N. 0°42' W., bet. secs. 17 and 18.

Over rolling hills, through dense timber and sagebrush.

39.50 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

67.00 Wash, 25 lks. wide, 6 ft. deep, drains W.

72.50 Trail road, bears NE and SW.

79.00 The cor. of secs. 7, 8, 17 and 18, determined from the original bearing trees

A pinon, 6 ins. diam., bears N. 54° E., 50 lks. dist., mkd. T40S R5W S8 BT.

A juniper, 8 ins. diam., bears S. $73^\circ 30'$ E., 40 lks. dist., mkd. T40S R5W S17 BT.


A pinon, 10 ins. diam., bears S. 8° W., 69 lks. dist., mkd. T40S R5W S18 BT.

A juniper, 8 ins. diam., bears N. 31° W., 79 lks. dist., mkd. T40S R5W S7 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top of brass cap, mkd.

T 40 S R 5 W



1974

S. $89^\circ 44'$ W., bet. secs. 7 and 18.

Over rolling land through dense timber and sagebrush.

2.30 Spur, slopes S.

15.00 State highway No. 136, a graveled road in Sink Valley, bears N. 13° E. and S. 13° W.

29.00 Sink Valley wash, 1.00 ch. wide, 15 ft. deep, drains S.

39.38 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S. R. 5 W. Salt Lake Meridian Uta

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\frac{1}{4} \begin{array}{r} S 7 \\ S 18 \end{array}$$

1974

from which

A juniper, 6 ins. diam., bears N. $27^{\circ}30'$ W., 19 lks. dist., mkd. $\frac{1}{4}$ S7 BT.

66.60 Jeep trail, bears N and S.

78.43 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., protruding 10 ins. above ground, with brass cap mkd.

T 40 S
R 6 W R 5 W

$$\begin{array}{r|l} S 12 & S 7 \\ S 13 & S 18 \end{array}$$

1974

The cor. of secs. 5, 6, 7 and 8, was restored by double proportionate measurement; there is no remaining evidence of the original cor. and no remaining evidence of the iron post established by A. Nelson and W. Stumm in 1911.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W

$$\begin{array}{r|l} S 6 & S 5 \\ S 7 & S 8 \end{array}$$

1974

et a juniper post, 5 ft. high, 2 ft. in the ground, alongside the iron post.

rom this point the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, bears $3^{\circ}54'$ W., 38.40 chs. dist., heretofore described.

rom the same point the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, bears N. $89^{\circ}48'$ E., 39.08 chs. dist., monumented with an iron post, 1 in. diam., protruding 8 ins. above ground, with brass cap mkd.


$$\frac{1}{4} \begin{array}{r} S 5 \\ S 8 \end{array}$$

1911

rom the same point the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, bears S. $1^{\circ}15'$ W., 40.18 chs. dist., monumented with an iron post, 1 in. diam., protruding 10 ins. above ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines,
T. 40 S., R. 5 W., Salt Lake Meridian, Utah

CHAINS



S. 89°29' W., bet. secs. 6 and 7.

Over rolling hills, through dense timber and sagebrush.

1.00 Graveled road in Sink Valley, bears N. 5° E. and S. 5° W.


10.00 Sink Valley Wash, 1.00 ch. wide, 20 ft. deep, drains S.

34.50 Wash, 50 lks. wide, 10 ft. deep, drains S.

40.20 Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 5 W



1974

from which

A juniper, 6 ins. diam., bears N. 76° E., 38 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

62.00 Jeep trail, bears N and S.

80.05 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., heretofore described.

General Description

The portion of Township 40 South, Range 5 West, covered by this resurvey is mostly high rolling hills, covered with dense juniper and pinon. The undergrowth is mainly sagebrush. The general elevation ranges from about 6,400 to 7,200 ft. above sea level. The township is accessible by the improved graveled road running between Kanab and Alton, and by numerous trail roads located throughout the township. The soil is a deep clay loam and very fertile in the bottom lands, and consists of volcanic lava in the hills and bench areas. The general drainage of the township is in a southwesterly direction. There were no permanent habitations or fresh water noted.

The average of a number of readings over all parts of the township gives a value of 14°45' E., for the mean magnetic declination.

Volume

#

R0596

CERTIFICATE OF SURVEY

~~XXXX~~ Milton R. Workman, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 28th day

of August, 1974, (I ~~we~~) have dependently resurveyed the Eighth Standard Parallel South through Range 5 West, the south and north miles of the Panguitch and Kanab Guide Meridian through Township 40 South, the west mile of the north boundary, the south mile of the east boundary and a portion of the subdivisional lines of Township 40 South, Range 5 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me ~~XXXX~~ and under (my) ~~XXXX~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 3, 1975
(Date)

Milton R. Workman
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the Eighth Standard Parallel South through Range 5 West, the south and north miles of the Panguitch and Kanab Guide Meridian through Township 40 South, the west mile of the north boundary, the south mile of the east boundary and a portion of the subdivisional lines of Township 40 South, Range 5 West, Salt Lake Meridian, Utah

executed by Milton R. Workman, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 30 1975
(Date)

J. Voorhees
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes.~~

~~(Date) (Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596

(April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES,

AND THE SURVEY OF

THE SUBDIVISION OF SECTION 21

TOWNSHIP 42 SOUTH, RANGE 6 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated April 1, 1977, approved April 4, 1977,

_____, which provided for the surveys included under U.S. Survey/Group
Number 570, and assignment instructions dated April 5, 1977.

Survey commenced April 6, 1977

Survey completed April 15, 1977

INDEX DIAGRAM

Township 42 S., Range 6 W.

6	5	4	8	2	1
7	8	9	10	11	12
18	17	10 16	15	14	13
		8	3		
19	9	13	3		
	20 7	12 11 12	2 22	28	24
		13			
	6	4			
30	29	5 28	27	26	25
31	32	33	34	35	36

CHAINS

Township 42 South, Range 6 West, Salt Lake Meridian, Utah

The subdivisional lines were surveyed by A. B. Lewis in 1897.

The following field notes are those of a dependent resurvey of the exterior boundaries of sec. 21 and adjacent lines needed for control, and the survey of a portion of the subdivisional lines in sec. 21.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1973, and the Special Instructions for Group 570, Utah, dated April 1, 1977.

The directions of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous observations on Polaris taken throughout the progress of the survey.

Measurements were determined by electronic means along lines where accessible. Distances to topography on lines run by traverse due to rough terrain, timber and private property are approximately as scaled from U.S.G.S. topographic sheets.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The geographic position for the southeast corner of sec. 21, as scaled from U.S.G.S. topographic sheet "Kanab, Utah" 1957, 15 minute series, is as follows.

Latitude $37^{\circ}08'13''$ N. Longitude $112^{\circ}31'12''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ}30'$ E.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

(Restoring the 1897 survey by A. B. Lewis)

Beginning at the cor. of secs. 21, 22, 27 and 28, monumented with a squared cedar post, 3 ft. high, firmly set, with faint scribe marks still visible, from which the original bearing trees

A cedar 14, ins. diam., bears N. 41° E., 115 lks.
dist., mkd. T42S R6W S22 BT.

A cedar, 12 ins. diam., bears S. 42° E., 13 lks.
dist., mkd. T42S R6W R27 BT.

A cedar, 13 ins. diam., bears S. 64° W., 23 lks.
dist., mkd. T42S R6W S28 BT.

A cedar, 14 ins. diam., bears N. 43° W., 17 lks.
dist., mkd. T42S R6W S21 BT.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 21	S 22
S 28	S 27

1977

Set original post, upside down, alongside the iron post.

N. $0^{\circ}08'$ W., bet. secs. 21 and 22.

Over rolling sandy land, through heavy growth of juniper
trees; desc. along gentle W slope.

39.63 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
S 21 S 22

1977

from which

A cedar, 8 ins. diam., bears N. 85° E., 148 lks.
dist., mkd. BT.

A cedar, 12 ins. diam., bears S. $35^{\circ}30'$ W., 63 lks.
dist., mkd. BT.

esc. over gentle NW slope.

56.70 ow spur, slopes W; desc. over NW slope.

59.445 oint for the N $\frac{1}{16}$ sec. cor. of secs. 21 and 22, at
idpoint.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock, in a mound of stone, 4 ft. base
o top of brass cap, mkd.

T 42 S R 6 W

N $\frac{1}{16}$

S 21	S 22
------	------

1977

70.00 raw, drains N. 60° W.; asc. S slope.

77.50 pur, slopes W; desc. over NW slope.

79.26 oint for the cor. of secs. 15, 16, 21 and 22, at propor-
tionate distance; there is no remaining evidence of the
riginal corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 42 S R 6 W

$\frac{S\ 16}{S\ 21} \mid \frac{S\ 15}{S\ 22}$

1977

Set a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. 89°05' E., bet. secs. 15 and 22.

Over broken land, through juniper and pinon timber; asc. over NW slope.

- 7.00 Low spur, slopes N; desc. over NE slope.
- 10.50 Draw, drains N. 25° W., asc. over NW slope.
- 34.60 Spur, slopes N; thence along gentle N slope.
- 39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, determined at record course and distance from the original bearing trees

A cedar, 14 ins. diam., bears S. 42°30' E., 57 lks. dist., mkd. $\frac{1}{4}$ S BT.

A cedar, 12 ins. diam., bears N. 28° W., 44 lks. dist., mkd. $\frac{1}{4}$ S BT.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4} \frac{S\ 15}{S\ 22}$

1977

From the cor. of secs. 15, 16, 21 and 22.

N. 0°01' W., bet. secs. 15 and 16.

Over broken land, covered with juniper; desc. over NW slope.

- 4.00 Deep wash in draw, drains S. 70° W.; asc. over S slope.
 - 10.50 Low spur, slopes SW; desc. over NW slope.
 - 19.80 Wash in Brown Canyon, drains S. 48° W.; asc. over SE slope.
 - 28.00 N rim of small canyon, bears NE and SW; asc. over sandy SW slope of bench through heavy growth of juniper.
 - 39.63 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, determined at record course and distance from original bearing trees
- A cedar, 18 ins. diam., bears N. 28° E., 46 lks. dist., mkd. $\frac{1}{4}$ S BT.
- A cedar, 12 ins. diam., bears S. 73° W., 87 lks. dist., mkd. $\frac{1}{4}$ S BT.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W. Salt Lake Meridian Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W
 $\frac{1}{4}$
 |
 S 16 | S 15
 |
 1977

Set a cedar post, 5 ft. high, alongside the iron post.

From the cor. of secs. 21, 22, 27 and 28.

S. 89°52' W., bet. secs. 21 and 28.

Over rolling sandy land, covered with dense growth of
juniper; desc. over gentle W slope.

40.02 The ¼ sec. cor. of secs. 21 and 28, monumented with a
squared cedar post, firmly set, with faint scribe mks.
visible, from which the original bearing trees

A cedar, 18 ins. diam., bears N. 31° W., 97 lks.
dist., mkd. ¼ S BT.

A cedar, 18 ins. diam., bears S. 78° W., 169 lks.
dist., mkd. ¼ S BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W
 $\frac{1}{4}$ $\frac{S 21}{S 28}$
 1977

Set original stake, upside down, alongside the iron post.

. 89°48' W., beginning new measurement.

esc. over gentle NW slope.

15.00 lope changes; desc. along sandy N slope of spur, which
slopes W.

19.93 oint for the W 1/16 sec. cor. of secs. 21 and 28, at
idpoint.

et an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W
 W 1/16 $\frac{S 21}{S 28}$
 1977

et a cedar post, 5 ft. high, alongside the iron post.

esc. a

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian Utah

CHAINS

- 30.00 Base of hills; thence over sandy bench, in Kanab Creek Canyon.
- 36.20 Dirt trail road, bears N and S.
- 38.86 Point selected for the witness corner of secs. 20, 21, 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
T 42 S R 6 W

S 20 | S 21
S 29 | S 28

1977

Set a cedar post, 5 ft. high, alongside the iron post.

- 39.70 W crest of sand bench, bears S and NW; desc. over steep and sandy W slope.

- 39.86 Point for the cor. of secs. 20, 21, 28 and 29, at proportionate distance; there is no remaining evidence of the original corner. This point falls on loose and sandy slope where permanent monument cannot be perpetuated.

Set a cedar post, 6 ins. diam., 8 ft. long, 4 ft. in the ground, squared at the top, mkd. with 2 grooves on the E and 4 grooves on the S face.

S. 0°16' W., bet. secs. 28 and 29.

Over sandy land, in Kanab Creek Canyon; desc. over sandy SW slope.

- 1.30 Base of sandy slope; thence down bottom of Kanab Creek.
- 4.20 Kanab Creek, drains SE.
- 17.30 Kanab Creek, drains SW.
- 20.00 Base of ascent, bears NE and SW; asc. over sandy NW slope.
- 23.20 Dirt road, bears NE and SW; thence over bench.
- 31.40 Same dirt road, bears E and NW.
- 33.23 The witness point bet. secs. 28 and 29, marked with a sandstone, 16 x 8 x 6 ins., firmly set with dim mks., from which the original bearing trees

A fallen cedar, 20 ins. diam., bears N. 50° E., 61 lks. dist., mkd. WP.

A cedar, 16 ins. diam., bears S. 30° W., 53 lks. dist., mkd. WP.

At the witness point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

W P
T 42 S R 6 W

S 29 | S 28

1977

Deposit the mkd. stone alongside the iron post, and set a cedar post, 5 ft. high alongside.

From the true point for the cor. of secs. 20, 21, 28 and 29.

N. 89°35' W., bet. secs. 20 and 29.

Over broken land, in Kanab Creek Canyon; desc. over steep and sandy W slope.

- 2.90 Base of sandy decent, bears N and SE; thence over creek bottom.
- 5.60 Kanab Creek, drains SE; small stream of water.
- 7.80 Base of ascent, bears N and S irregularly; asc. E slope.
- 13.40 Graded dirt road, bears N and S.
- 20.00 Crest of steep ascent, bears N and S irregularly; leave canyon; asc. over gentle E slope of bench, enter heavy juniper growth.
- 39.90 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, at proportionate distance; the old original cedar stake marking this cor. was found lying loose and could not be used to reestablish the corner position.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$$\frac{1}{4} \frac{S 20}{S 29}$$

1977

Deposit old original stake and glass alongside the iron post.

from which

A cedar, 8 ins. diam., bears S. 24° W., 56 lks. dist., mkd. BT.

Corner is located 33 lks. S of E and W fence line.

- 79.80 The cor. of secs. 19, 20, 29 and 30, marked with a cedar stake, firmly set, with faint scribe mks. still visible, from which the original bearing tree

A cedar, 24 ins. diam., bears S. 75° E., 113 lks. dist., mkd. T42S R6W S29 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a portion of the Subdivisional lines
of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

T 42 S R 6 W

S 19 | S 20
S 30 | S 29

1977

Deposit original stake, upside down, alongside the iron post.

From the true point for the cor. of secs. 20, 21, 28 and 29.

N. 0°20' E., bet. secs. 20 and 21.

Over broken land on E. side of Kanab Canyon; along steep and sandy W slope.

20.14 Point for the S 1/16 sec. cor. of secs. 20 and 21, at midpoint.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 1/4 ins. in the ground, with brass cap mkd.

T 42 S R 6 W
S 1/16

S 20 | S 21

1977

from which

A cedar, 10 ins. diam., bears N. 50° E., 59 lks. dist., mkd. 1/16 BT.

Set a cedar post, 6 ins. diam., 7 ft. long, 4 ft. in the ground, alongside the iron post.

Asc. along steep and sandy W slope.

20.90 Crest of sandy W slope, bears N and S irre. dir., asc. along W slope.

36.00 Dirt road, bears NW and S.

40.28 Point for the 1/4 sec. cor. of secs. 20 and 21, determined by original bearing tree. This cor. position was also marked with an old cedar stake, no identifiable markings, from which an original bearing tree

A cedar, 14 ins. diam., bears S. 59°30' E., 147 lks. dist., mkd. 1/4 S BT.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 1/4 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 20 | S 21

1977

from which

A cedar, 10 ins. diam., bears N. 45°30' W., 59 lks. dist., mkd. BT.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S. R. 6 W. Salt Lake Meridian

CHAINS

Corner is located on N slope, in small gully, which drains
W.

N. 0°43' W., beginning new measurement.

Desc. along broken W slope.

- 8.50 Kanab Creek, drains SW; thence up bottom land.
24.00 Same creek, drains SE.
38.00 Small spur in canyon bottom, slopes W.
39.74 Point selected for the witness cor. of secs. 16, 17, 20
and 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, in a mound of stone, 4 ft. base to top of
brass cap, mkd.

W C
T 42 S R 6 W

S 17 ↑ S 16
S 20 | S 21

1977

Deposit cedar post alongside the witness cor.

- 39.99 Point for the cor. of secs. 16, 17, 20 and 21, at propor-
tionate distance, falls in Kanab Creek and cannot be
monumented; there is no remaining evidence of the original
corner.

From the cor. of secs. 15, 16, 21 and 22.

N. 89°15' W., bet. secs. 16 and 21.

Over broken land; desc. over NW slope.

- 5.50 Enter bottom of John R. Canyon across deep washes and
gullies.
34.00 Crest of small bench in bottom of John R. Canyon, bears
NE and SW; thence over small brush covered bench.
34.20 Wash in bottom of John R. Canyon, drains SW.
39.99 Point for the ¼ sec. cor. of secs. 16 and 21, at propor-
tionate distance; there is no evidence of the original
corner.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

¼ S 16
S 21

1977

Set cedar post, 5 ft. high, alongside the iron post,
continue over brush covered bench.

Dependent Resurvey of a portion of the Subdivisional Lines
 T 42 S R 6 W

CHAINS

57.985 Point selected for the witness W 1/16 sec. cor. of secs. 16 and 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
 T 42 S R 6 W

W 1/16 ← $\frac{S\ 16}{S\ 21}$

1977

Set cedar post, 5 ft. high, alongside the iron post.

58.10 Base of steep ascent, bears NE and SW; asc. over steep SE slope and sandstone ledges facing SE.

59.985 Point for the W 1/16 sec. cor. of secs. 16 and 21, falls on sandstone ledges and cannot be monumented.

69.50 High spur, slopes S; desc. over steep W slope, and sandstone ledges facing W.

79.50 Kanab Creek, drains SW.

79.98 True point for the cor. of secs. 16, 17, 20 and 21, from which its witness cor. bears S. 0°43' E., 0.25 chs. dist.

S. 89°57' W., bet. secs. 17 and 20.

Over Kanab Creek bottom.

3.80 Base of ascent, bears S and NE; asc. steep sandy E slope.

8.20 Graded dirt road, bears N and S; asc. E slope.

10.30 Dirt road, bears SE and curves W.

15.40 Crest of steep ascent, bears N and S irregularly; asc. gentle E slope, on sandy bench, enter heavy growth of sagebrush and juniper timber.

39.79 Point for the ¼ sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼ $\frac{S\ 17}{S\ 20}$

1977

Set cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

79.58 The cor. of secs. 17, 18, 19 and 20, marked by a hub with cedar post alongside, and old survey lath, from which the original bearing trees

A cedar, 14 ins. diam., bears N. 14°45' E., 64 lks. dist., mkd. with dim scribe mks.

Dependent Resurvey of a portion of the Subdivisional Lines
of T. 42 S. R. 6 W. Salt Lake Meridian Utah

CHAINS

A cedar, 16 ins. diam., bears N. 70°40' E., 112 lks.
dist., mkd. T42S R6W S17 BT.

A cedar, now dead, bears S. 46°20' W., 162 lks.
dist., mkd. T42S R6W S19 BT.

A cedar, 16 ins. diam., bears N. 30° W., 46 lks.
dist., mkd. T42S R6W S18 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 18	S 17
S 19	S 20

1977

Set cedar post, 5 ft. high, alongside the iron post.

From the true point for the cor. of secs. 16, 17, 20 and
21, from which its witness cor. bears S. 0°43' E., 0.25
chs. dist.

N. 0°49' W., bet. secs. 16 and 17.

Over Kanab Creek bottom.

- 3.50 Sand point, projects E.
- 5.70 Kanab Creek, flows SE.
- 10.20 Sandstone point, projects W.
- 26.00 Kanab Creek, flows SW; also dirt road in canyon bottom,
bears SW and N. 15° E.
- 36.00 Sandstone point, projects E; thence up bottom of Kanab
Creek Canyon.
- 39.99 Point for the ¼ sec. cor. of secs. 16 and 17, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

	¼	
S 17		S 16

1977

Set cedar post, 5 ft. high, alongside corner.

Continue up Kanab Creek Canyon.

- 78.00 Base of ascent, bears NE and SW; asc. over sandy SE slope.
- 79.98 The cor. of secs. 8, 9, 16 and 17, monumented by a cedar
post with flagging and survey lath around, this position
is recognized as the original corner point and is the
best available evidence of the original corner position.

At the corner point

pendent Resurvey of a portion of the Subdivisional Lines
of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 8 | S 9
S 17 | S 16

1977

Set cedar post, 5 ft. high, alongside the corner.

Subdivision of Sec. 21,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

From the ¼ sec. cor. of secs. 21 and 28.

N. 0°07' W., on the N and S center line of sec. 21.

Over rolling sandy bench land, covered with juniper trees.

20.035 Point for the center south 1/16 sec. cor. of sec. 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

C
|
S 1/16 | S 21
|
C
1977

20.80 Trail road, bears E and W.

40.07 Point for the center ¼ sec. cor. of sec. 21, at inter-
section with the E and W center line.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W
C ¼ S 21

1977

Set cedar post, 5 ft. high, alongside the iron post.

59.98 Point for the center north 1/16 sec. cor. of sec. 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W
C
N 1/16 | S 21
|
C
1977

Set cedar post, 5 ft. long, 2 ft. deep, alongside corner.

65.00 Crest of steep descent, bears NE and SW; desc. over
NW slope.

Subdivision of Sec. 21,
T. 42 S., R. 6 W., Salt Lake Meridian Utah

- CHAINS
72.50 Deep wash in canyon bottom, drains SW; asc. over SE slope.
76.90 Crest of steep SE slope, bears E and SW; thence over sagebrush flat.
79.89 The $\frac{1}{4}$ sec. cor. of secs. 16 and 21.

From the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.

N. $89^{\circ}31'$ W., on the E and W center line of sec. 21.

Over rolling sandy land, through juniper trees; desc. over gentle W slope.

- 40.00 The center $\frac{1}{4}$ sec. cor. of sec. 21.
59.78 Point for the center west $1/16$ sec. cor. of sec. 21.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W
W $1/16$

C ——— C
S 21
1977

Set cedar post, 5 ft. high, alongside the corner.

- 74.00 W edge of bench, bears N and S irregularly; desc. W slope, into Kanab Creek Canyon.
79.56 The $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

From the N $1/16$ sec. cor. of secs. 21 and 22.

N. $89^{\circ}23'$ W., on the E and W center line of the NE $\frac{1}{4}$ of sec. 21.

Over sandy land, covered with juniper trees; desc. over gentle W slope.

- 40.00 The center north $1/16$ sec. cor. of sec. 21.

From the W $1/16$ sec. cor. of secs. 21 and 28.

N. $0^{\circ}07'$ E., on the N and S center line of the SW $\frac{1}{4}$ of sec. 21.

Over broken land, through juniper trees; desc. N slope of small draw.

- 3.80 Small draw, drains W; asc. S slope.
8.00 Spur, slopes W; desc. over N slope.
12.90 Hollow, drains W, also dirt road, bears W and SE to mouth of cave and underground lake; asc. over S slope.
15.80 Crest of steep ascent, thence over rolling sandy bench.

CHAINS

20.08

Point for the center 1/16 sec. cor. of the SW $\frac{1}{4}$ of sec. 21, at intersection with the E and W center line.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

CSW 1/16 S 21

1977

Set cedar post, 4 ft. high, alongside the corner.

From this cor., the mouth of cave and underground lake bears S. 15°22' E., 11.60 chs. dist.

40.17

The center west 1/16 sec. cor. of sec. 21.

From the center south 1/16 sec. cor. of sec. 21.

N. 89°39' W., on the E and W center line of the SW $\frac{1}{4}$ of sec. 21.

Over sandy rolling land, covered with juniper; desc. over gentle W slope.

19.85

The center 1/16 sec. cor. of the SW $\frac{1}{4}$ of sec. 21.

25.70

Crest of descent, bears N and S; desc. over W slope.

31.80

Base of descent, bears N and S; thence over sandy brush covered flat.

37.10

Dirt road, bears N and S.

39.30

Crest of steep sandy descent, bears N and S; desc. over sandy W slope.

39.71

The S 1/16 sec. cor. of secs. 20 and 21.

From the center west 1/16 sec. cor. of sec. 21.

N. 0°25' W., on the N and S center line of sec. 21.

Over sandy rolling land, through juniper trees.

25.00

Crest of steep descent, bears NE and SW; desc. over NW slope.

29.50

Deep wash in canyon, drains SW; asc. sandy SE slope.

34.60

Crest steep sandy slope, bears SW and NE; thence over sagebrush flat.

38.60

Base of steep ascent, bears NE and SW; asc. over steep SE slope and ledges facing SE.

39.91

True point for the W 1/16 sec. cor. of secs. 16 and 21, from which its witness cor. bears S. 89°15' E., 2.00 chs. dist.

Subdivision of sec. 21,
T. 42 S. R. 6 W. Salt Lake Meridian Utah

CHAINS

General Description


The portion of T. 42 S., R. 6 W., covered by this survey consists mainly of rolling sandy bench land, covered with juniper trees. Kanab Creek flows south along the west side of sec. 21, and John Brown Canyon, with a small stream of water in bottom, drains west across the north portion of sec. 21. There is a cave and underground lake located in the SE $\frac{1}{4}$ of the SW $\frac{1}{4}$ of sec. 21. Several dirt trail roads are located within sec. 21. No permanent habitation was noted during the survey. The elevations vary from about 5200 to 5700 ft. above sea level.

CERTIFICATE OF SURVEY

I, ~~XXX~~ Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st day of April, 19 77. (I) ~~(We)~~ have dependently resurveyed a portion of the subdivisional lines and surveyed the subdivision lines of section 21, T. 42 S., R. 6 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~XXXX~~ and under (my) ~~XXXX~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 29, 1977
(Date)

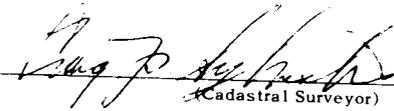
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and the survey of the subdivision of section 21, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

58 1977
Date


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I Certify that the foregoing transcript of the field notes of the above described surveys in~~
is a true copy of the original field notes.

~~(Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 33 SOUTH, RANGE 4 EAST

TOWNSHIP 30 SOUTH, RANGE 6 EAST

TOWNSHIP 35 SOUTH, RANGE 2 WEST

TOWNSHIP 34 SOUTH, RANGE 3 WEST

TOWNSHIP 36 SOUTH, RANGE 4½ WEST

TOWNSHIP 36 SOUTH, RANGE 5 WEST

TOWNSHIP 39 SOUTH, RANGE 6 WEST

TOWNSHIP 35 SOUTH, RANGE 7 WEST

TOWNSHIP 38 SOUTH, RANGE 7 WEST

TOWNSHIP 35 SOUTH, RANGE 8 WEST

TOWNSHIP 39 SOUTH, RANGE 8 WEST

TOWNSHIP 36 SOUTH, RANGE 9 WEST

TOWNSHIP 37 SOUTH, RANGE 14 WEST

TOWNSHIP 36 SOUTH, RANGE 15 WEST

TOWNSHIP 40 SOUTH, RANGE 15 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Gail E. Reynolds Cadastral Surveyor

Under Supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

Under special instructions dated February 15, 19 61, approved February 16, 1961,

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated July 3, 1975.

Survey commenced August 11, 19 75

Survey completed September 5, 19 75

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX TO SECTION CORNER MONUMENTS

Tp. 33 S. R. 4 E. Mer. Salt Lake

6	5	4	3	6 2	4 1
				6	3
7	8	9	10	11	3 12
					3
18	17	16	15	14 5	2 13
				5	2
19	20	21	22	23	1 24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 30 S. R. 6 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 35 S. R. 2 W. Mer. Salt Lake

6	5 8	4	3 7	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 34 S. R. 3 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

• 8 (at corner of sections 25 and 26)

• 8 (at corner of sections 35 and 36)

Tp. 36 S. R. 4½ W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

• 9 (at corner of sections 8 and 9)

Tp. 36 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

• 9 (at corner of sections 35 and 36)

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 39 S. R. 6 W. Mer. Salt Lake

6	5	4	3	2	1
				10	
7	8	12	11	11	12
		9	10	11	
18	17	16	10	14	13
			15		
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 35 S. R. 7 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
14	15				
14					
13	31	32	33	34	35
13					36

Tp. 38 S. R. 7 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	16	33	34	35
		33			36

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 35 S. R. 8 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17 ●	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36 ●

16

Tp. 39 S. R. 8 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14 ●	13 ●
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

18 18 18
19 18 18
17 13

Tp. 36 S. R. 9 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

20
19

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 37 S. R. 14 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	● ²¹ ₁₆	15	14	13
19	20	21	● ²⁰ ₂₂	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S. R. 15 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	● ²² ₃₅	● ²³ ₃₆

Tp. 40 S. R. 15 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	● ²³ ₁₀	11	12
18	17	● ²³ ₁₇	● ²⁴ ₁₆	15	14
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Volume

#

R0596

Remonumentation of corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Dixie National Forest. A Forester's compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

- T. 33 S., R. 4 E., Salt Lake Meridian, 14°30' E.
- T. 30 S., R. 6 E., Salt Lake Meridian, 14°36' E.
- T. 35 S., R. 2 W., Salt Lake Meridian, 14°43' E.
- T. 34 S., R. 3 W., Salt Lake Meridian, 14°42' E.
- T. 36 S., R. 4½ W., Salt Lake Meridian, 14°44' E.
- T. 36 S., R. 5 W., Salt Lake Meridian, 14°44' E.
- T. 39 S., R. 6 W., Salt Lake Meridian, 14°40' E.
- T. 35 S., R. 7 W., Salt Lake Meridian, 14°47' E.
- T. 38 S., R. 7 W., Salt Lake Meridian, 14°49' E.
- T. 35 S., R. 8 W., Salt Lake Meridian, 14°47' E.
- T. 39 S., R. 8 W., Salt Lake Meridian, 14°41' E.
- T. 36 S., R. 9 W., Salt Lake Meridian, 14°51' E.
- T. 37 S., R. 14 W., Salt Lake Meridian, 14°51' E.
- T. 36 S., R. 15 W., Salt Lake Meridian, 14°58' E.
- T. 40 S., R. 15 W., Salt Lake Meridian, 14°50' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 33 S., R. 4 E., Salt Lake Meridian, Utah

Township 33 South, Range 4 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following cors. were established by Frank T. Roberts in 1908. A retracement was run between secs. 2 and 3, 14 and 15, 22 and 23, by Thoma, Johnston and Nelson in 1917.


The ¼ sec. cor. of secs. 23 and 24, monumented with a sandstone, 15 x 12 x 4 ins., firmly set and plainly mkd. ¼ on W face.

from which the original bearing tree

A pinon, 12 ins. diam., bears N. 53½° W., 25 lks. dist., mkd. T33S R4E S23 BT. (Record, 215 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Cor. is located on NW slope in pinon and juniper timber, 40 lks. N of trail road, bears NE and SW.

Remonumentation of corners in T. 33 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

The cor. of secs. 13, 14, 23 and 24, monumented with a lava stone, 17 x 9 x 6 ins., firmly set 7 ins. in the ground and plainly mkd. 1 notch on E and 3 notches on S edges.

from which the original bearing trees

A juniper, 20 ins. diam., bears N. 54°47' E., 41 lks. dist., mkd. T33S R4E S24 BT.

A pinon, 10 ins. diam., bears S. 41°38' E., 10 lks. dist., mkd. T33S R4E S24 BT.

A pinon, 14 ins. diam., bears S. 22°05' W., 27 lks. dist., mkd. T33S R4E S23 BT.

A pinon, 10 ins. diam., bears N. 61°09' W., 30 lks. dist., mkd. T33S R4E S14 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 33 S	R 4 E
S 14	S 13
S 23	S 24
1975	

Deposit the mkd. stone alongside the iron post.

Cor. is located on NE slope in dense juniper and pinon timber.

The ¼ sec. cor. of secs. 13 and 14, monumented with a lava stone, 16 x 8 x 6 ins., firmly set 8 ins. in the ground, and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and over a cross, in a mound of stone, 4 ft. base, with brass cap mkd.

T 33 S	R 4 E
S 14	S 13
1975	

from which

A juniper, 4 ins. diam., bears S. 78½° E., 42 lks. dist., mkd. BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on E edge of sagebrush flat, encircled by juniper and pinon timber.

The cor. of secs. 11, 12, 13 and 14, monumented with a granite stone, 20 x 12 x 5 ins., firmly set 10 ins. in the ground and plainly mkd. 1 notch on E and 4 notches on S edges.

from which

A pinon, 16 ins. diam., bears N. 26°50' E., 126 lks. dist., mkd. T33S R4E S12 BT.

A juniper, 20 ins. diam., bears S. 76°40' E., 139 lks. dist., mkd. T33S R4E S13 BT.

A juniper. 20 ins. diam., bears S. 32°44' W., 199 lks. dist., mkd. T33S R4E S14 BT. (Record, 99 lks. dist.)

A pinon, 12 ins. diam., bears N. 70°20' W., 127 lks. dist., mkd. T33S R4E S11 BT. (Record, juniper)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base, with brass cap mkd.

T 33 S R 4 E		
S 11		S 12
S 14		S 13
1975		

Deposit the mkd. stone alongside the iron post.

Cor. is located on flat ridge top, 25 lks. W of trail road that bears S. 45° E. and N. 45° W., in sagebrush and dense juniper and pinon timber.

The ¼ sec. cor. of secs. 11 and 12, monumented with a lava stone, 20 x 12 x 5 ins., firmly set 8 ins. in the ground and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock and over a cross, encircled by a mound of stone, 4 ft. base, with brass cap mkd.

T 33 S R 4 E		
S 11		S 12
¼		
1975		

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on flat topped ridge in sagebrush and scattering juniper and pinon timber. No suitable bearing trees are available.

The cor. of secs. 1, 2, 11 and 12, monumented with a lava stone, 20 x 12 x 7 ins., firmly set 10 ins. in the ground and plainly mkd. 1 notch on E and 5 notches on S edges.

Remonumentation of corners in T. 33 S., R. 4 E.,
Salt Lake Meridian Utah

CHAINS

from which the original bearing tree

A pinon, 12 ins. diam., bears S. $46^{\circ}26'$ W., 247 lks.
dist., mkd. T33S R4E S11 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins.
in the ground to bedrock, in a collar of stone, with
brass cap mkd.

T 33 S R 4 E	
S 2	S 1
S 11	S 12
1975	

from which

A pinon, 4 ins. diam., bears N. 44° E., 63 lks.
dist., mkd. BT.

A pinon, 4 ins. diam., bears S. 62° E., $77\frac{1}{2}$ lks.
dist., mkd. BT.

A pinon, 4 ins. diam., bears N. 38° W., 31 lks.
dist., mkd. BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on flat ridge top in dense juniper and
pinon timber.

The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented with a lava
stone, 16 x 10 x 6 ins., firmly set 8 ins. in the ground
and plainly mkd. $\frac{1}{4}$ on W face.

from which the original bearing trees

A juniper, 15 ins. diam., bears S. $83\frac{1}{2}^{\circ}$ E., 505 lks.
dist., mkd. T33S R4E S1 BT.

A juniper, 18 ins. diam., bears S. $89^{\circ}28'$ W., 181 lks.
dist., mkd. T33S R4E S2 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins.
in the ground to bedrock, in a collar of stone, with
brass cap mkd.

T 33 S R 4 E	
$\frac{1}{4}$	S 1
S 2	S 1
1975	

Deposit the mkd. stone alongside the iron post.

Cor. is located on S slope in juniper and ponderosa pine
timber.

the cor. of secs. 14, 15, 22 and 23, monumented with a lava stone, 15 x 14 x 7 ins., firmly set 6 ins. in the ground and plainly mkd. 2 notches on E and 3 notches on S edges.

from which the original bearing trees

A pinon, 12 ins. diam., bears N. $64^{\circ}07'$ E., 113 lks. dist., mkd. T33S R4E S14 BT.

A pinon, 8 ins. diam., bears S. $50^{\circ}11'$ E., 34 lks. dist., mkd. T33S R4E S23 BT.

A pinon, 18 ins. diam., bears S. $19^{\circ}38'$ W., 50 lks. dist., mkd. T33S R4E S22 BT.

A pinon, 14 ins. diam., bears N. $70^{\circ}50'$ W., 100 lks. dist., mkd. T33S R4E S15 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock and over a cross, encircled by mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 33 S R 4 E	
S 15	S 14
S 22	S 23
1975	

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on top of a plateau in dense juniper and pinon timber.

The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, monumented with a lava stone, 18 x 10 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face.

from which the original bearing trees

A pinon, 14 ins. diam., bears S. $34^{\circ}14'$ E., 27 lks. dist., mkd. T33S R4E S23 BT.

A pinon, 15 ins. diam., bears N. $62^{\circ}04'$ W., 10 lks. dist., mkd. T33S R4E S14 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and over a cross, encircled by a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 33 S R 4 E	
$\frac{1}{4}$	
S 14	S 23
S 23	
1975	

Deposit the mkd. stone alongside the iron post.

Cor. is located on SW slope, 63 lks. E of Nazar Creek, 6 ins. deep, 2 lks. wide, flows S. 45° E., in dense pinon and juniper timber.

Remonumentation of corners in T. 33 S., R. 4 E.,
Salt Lake Meridian Utah

CHAINS

The cor. of secs. 2, 3, 10 and 11, monumented with a lava stone, 14 x 8 x 6 ins., firmly set in mound of stone and plainly mkd. with 2 notches on E and 5 notches on S edges. This cor. has been recognized as the cor. by local residents of the area and was verified by Mr. Burns Ormand, long time resident and adjacent land owner. No evidence of the original bearing trees are available.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 33 S R 4 E	
S 3	S 2
S 10	S 11
1975	

Deposit the mkd. stone alongside the iron post.

Cor. is located on nearly level land at the end of a 4 strand barbwire fence line that bears East only, in sagebrush and scattering pinon and juniper timber.

At the ¼ sec. cor. of secs. 2 and 3, monumented with a lava stone, 16 x 14 x 8 ins., firmly set 6 ins. in the ground and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and over a cross, encircled by mound of stone, 4 ft. base to top, with brass cap mkd.

T 33 S R 4 E	
S 3	S 2
¼	
1975	

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on nearly level land at the NE corner of grass pasture, N. 45° E., 5 lks. dist. from barbwire fence corner that bears S and W, in dense juniper and pinon timber.

T. 30 S., R. 6 E., Salt Lake Meridian, Utah

Township 30 South, Range 6 East, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by A. D. Ferron and A. Jessen in 1895.

The standard ¼ sec. cor. of sec. 31 only, on the S. bdy. of the Tp., monumented with a lava stone, 30 x 16 x 13 ins., firmly set 20 ins. in the ground and plainly mkd. ¼ SC on N face, witnessed by a mound of stone, 2 ft. base, 1½ ft. high, S of corner.

Remonumentation of corners in T. 30 S., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS

from which

A ponderosa pine, 18 ins. diam., bears S. $3\frac{1}{2}^{\circ}$ E.,
40 lks. dist., mkd. $\frac{1}{4}$ S BT SC. (No record of
bearing tree).

A ponderosa pine, 22 ins. diam., bears N. 11° W.,
74 lks. dist., mkd. $\frac{1}{4}$ S BT SC. (No record of
bearing tree. Growth ring count to blaze on trees
show the markings to be approximately 30 years old.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

S C
T 30 S R 6 E

 $\frac{1}{4}$ S 31

1975

Deposit the mkd. stone alongside the iron post.

Move original mound of stone to N of corner.

Cor. is located on nearly level land in scattering
ponderosa pine timber.

T. 35 S., R. 2 W., Salt Lake Meridian, Utah

Township 35 South, Range 2 West, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following corners were established by T. C. Bailey in
1876. The cor. of secs. 3, 4, 9 and 10 was resurveyed
by Andrew Nelson in 1918.

The cor. of secs. 3, 4, 9 and 10, monumented with a sand-
stone, 18 x 15 x 6 ins., firmly set in mound of stone and
plainly mkd. 3 grooves on E face and 5 notches on S edge.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 35 S R 2 W
|
S 4 | S 3
S 9 | S 10
|
1975

from which

A ponderosa pine, 14 ins. diam., bears N. $61\frac{1}{2}^{\circ}$ E.,
31 lks. dist., mkd. T35S R2W S3 BT.

A ponderosa pine, 20 ins. diam., bears S. 52° E.,
55 lks. dist., mkd. T35S R2W S10 BT.

A ponderosa pine, 5 ins. diam., bears S. 29° W.,
 $23\frac{1}{2}$ lks. dist., mkd. BT.

A ponderosa pine, 18 ins. diam., bears N. $63\frac{1}{2}^{\circ}$ W.,
 $38\frac{1}{2}$ lks. dist., mkd. T35S R2W S4 BT.

Deposit the mkd. stone alongside the iron post.

Remonumentation of corners in T. 35 S., R. 2 W.
Salt Lake Meridian, Utah

CHAINS

Cor. is located on top of low spur that slopes N and in ponderosa pine timber.

The $\frac{1}{2}$ sec. cor. of secs. 5 and 8, monumented with a cobblestone, 12 x 8 x 5 ins., firmly set 6 ins. in the ground and plainly mkd. $\frac{1}{2}$ on N face.

at the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 35 S R 2 W

$$\frac{1}{2} \begin{array}{c} S 5 \\ S 8 \end{array}$$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located in sagebrush flat.

T. 34 S., R. 3 W., Salt Lake Meridian, Utah

Township 34 South, Range 3 West, Salt Lake Meridian, is located within the Dixie National Forest. The following cors. were established by Bailey and Burrill on the S. bdy. and J. G. Burrill on the E. bdy., in 1876.

The cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with a trachyte stone, 9 x 8 x 8 ins., firmly set in a collar of stone and plainly mkd. 1 notch on E edge and 5 notches on W edge.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 34 S R 3 W

$$\begin{array}{c|c} S 35 & S 36 \\ \hline S 2 & S 1 \end{array}$$

T 35 S
1975

Deposit the mkd. stone alongside the iron post.

Cor. is located in sagebrush flat, 20 lks. W of trail road that bears N and S.

The $\frac{1}{2}$ sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., monumented with a cobblestone, 13 x 8 x 5 ins., firmly set 5 ins. in the ground and plainly mkd. $\frac{1}{2}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of corners in T. 34 S., R. 3 W.,
Salt Lake Meridian, Utah

CHAINS

T 34 S
R 3 W R 2 W
|
1/2
|
S 25 | S 30
|
1975

Deposit the mkd. stone alongside the iron post.

Set a fir post alongside the iron post.

Cor. is located in sagebrush flat.

T. 36 S., R. 4 $\frac{1}{2}$ W., Salt Lake Meridian, Utah

Township 36 South, Range 4 $\frac{1}{2}$ West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following cor. was established by Elliot Bird in 1925.

The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, determined from the original bearing trees

A ponderosa pine stump, 32 ins. diam., bears
S. 30° E., 79 lks. dist., mkd. $\frac{1}{4}$ S BT.

A pinon, 8 ins. diam., bears N. 77° W., 56 lks.
dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 36 S R 4 $\frac{1}{2}$ W
|
1/4
|
S 8 | S 9
|
1975

Raise mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, W of cor.

Cor. is located on SW slope at N edge of draw that drains
SW, in ponderosa pine timber.

T. 36 S., R. 5 W., Salt Lake Meridian, Utah

Township 36 South, Range 5 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following corner was established by Bailey and Burrill in 1874, and resurveyed by Elliot Bird in 1925.

The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a sandstone, 12 x 6 x 6 ins., firmly set in a collar of stone and plainly mkd. $\frac{1}{4}$ on W face, with a Homestead Entry survey cor. alongside, 18 x 14 x 4 ins., mkd. 10 HES117.

from which the original bearing trees

A pinon, 18 ins. diam., bears N. 67° E., 50 lks.
dist., mkd. with a grown over blaze.

Remonumentation of corners in T. 36 S., R. 5 W.,
Salt Lake Meridian Utah

CHAINS

A pinon, 12 ins. diam., bears N. 24° W., 30 lks.
dist., mkd. $\frac{1}{4}$ S35 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with Homestead Entry Cor. in original
position alongside, with brass cap mkd.

T 36 S R 5 W		
½		
S 35		S 36
1975		

Deposit the mkd. stone alongside the iron post.

Cor. is located on S slope in juniper and pinon timber.

T. 39 S., R. 6 W., Salt Lake Meridian, Utah

Township 39 South, Range 6 West, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following cors. were established by Shadrack M. Richardson
in 1884.

The cor. of secs. 2, 3, 10 and 11, monumented with a
sandstone, 14 x 10 x 5 ins., firmly set in a collar of
stone and plainly mkd. 2 notches on E and 5 notches on
S edges.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, in a collar of stone, with
brass cap mkd.

T 39 S R 6 W		
S 3		S 2
S 10		S 11
1975		

from which

A juniper, 24 ins. diam., bears S. 80° E., 8 lks.
dist., mkd. T39S R6W S11 BT.

A juniper, 10 ins. diam., bears S. 82° W., 48 lks.
dist., mkd. T39S R6W S10 BT. No other suitable
bearing trees available.

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle S slope, 4.00 chs. N of hollow
that drains S. 45° W., in sagebrush and scattering
juniper timber.

The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a
limestone, 18 x 10 x 6 ins., firmly set in a collar of
stone and plainly mkd. $\frac{1}{4}$ on W face.

At the corner point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 39 S R 6 W
|
1/4
|
S 16 | S 15
|
1975

from which

A douglas fir, 8 ins. diam., bears S. 78° E., 29 lks. dist., mkd. ¼ SBT.

A douglas fir, 18 ins. diam., bears N. 32½° W., 22½ lks. dist., mkd. ¼ S16 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on N slope in manzanita bushes and douglas fir timber.

The ¼ sec. cor. of secs. 10 and 15, monumented with a sandstone, 14 x 10 x 6 ins., firmly set 7 ins. in the ground and plainly mkd. ¼ on N face.

from which the original bearing trees

A ponderosa pine, 24 ins. diam., bears N. 13½° E., 192 lks. dist., mkd. with a blaze, scribe mks. partially grown over. (Record, 172 lks. dist.)

A ponderosa pine stump, 20 ins. diam., bears S. 28° W., 97 lks. dist., with no visible scribe mks. (Record, 100 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 39 S R 6 W
|
1/4
|
S 10
|
S 15
|
1975

from which

A ponderosa pine, 14 ins. diam., bears S. 28° W., 88½ lks. dist., mkd. ¼ S15 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on NW slope, 90 lks. S of bottom of draw, that drains W, in ponderosa pine timber.

The ¼ sec. cor. of secs. 9 and 10, monumented with a sandstone, 18 x 8 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. ¼ on W face.

Remonumentation of corners in T. 39 S., R. 6 W.,
Salt Lake Meridian, Utah

CHAINS

from which the original bearing trees

A ponderosa pine, 26 ins. diam., bears S. 79° E.,
80 lks. dist., mkd. with grown over blaze.

A ponderosa pine, 30 ins. diam., bears S. 31° W.,
78 lks. dist., mkd. with grown over blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 39 S R 6 W
 |
 ½
 |
 S 9 | S 10
 |
 1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SE slope in manzanita bushes and
scattering ponderosa pine timber.

The ¼ sec. cor. of secs. 8 and 9, monumented with a
limestone, 14 x 12 x 6 ins., firmly set in mound of stone
and plainly mkd. ¼ on W face.

from which the original bearing trees

A ponderosa pine, 14 ins. diam., bears N. 80° E.,
15 lks. dist., mkd. ¼ S BT.

A fallen ponderosa pine, 24 ins. diam., bears
S. 89° W., 37 lks. dist., mkd. with a grown over
blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins.
in the ground to bedrock and over a cross, encircled with
a mound of stone, 4½ ft. base, with brass cap mkd.

T 39 S R 6 W
 |
 ¼
 |
 S 8 | S 9
 |
 1975

from which

A ponderosa pine, 26 ins. diam., bears N. 48° W.,
40 lks. dist., mkd. ¼ S8 BT.

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on top of spur that slopes E, in
ponderosa pine and juniper timber.

Remonumentation of corners in T. 35 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS

T. 35 S., R. 7 W., Salt Lake Meridian, Utah

Township 35 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The following cors. were established by Andrew J. Stewart Jr. on the S. bdy. of the Tp. in 1883. The W. bdy. and subdivisional lines of the Tp. by Shadrack M. Richardson in 1884.

The standard $\frac{1}{4}$ sec. cor. of sec. 31 only, on the S. bdy. of the Tp., monumented with a lava stone, 24 x 15 x 11 ins., firmly set in a mound of stone and dimly mkd. $\frac{1}{4}$ on N face.

from which the original bearing tree

A fallen pine, 40 ins. diam., bears South, 10 lks. dist., mkd. $\frac{1}{4}$ SBT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

S C
T 35 S R 7 W

$\frac{1}{4}$ S 31
1975

from which

A ponderosa pine, 10 ins. diam., bears N. 40° E., 19 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

A douglas fir, 12 ins. diam., bears S. 34° W., 8 lks. dist., mkd. S6 BT.

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

Cor. is located on NE slope in dense douglas fir, ponderosa pine, blue spruce and aspen timber.

The standard cor. of Township 35 South, Ranges 7 and 8 West on the S. bdy. of the Tp., monumented with a limestone, 30 x 20 x 8 ins., firmly set 15 ins. in the ground and plainly mkd. 6 notches on E and W edges and 6 grooves on N face.

from which the original bearing trees

A ponderosa pine, 10 ins. diam., bears N. 5° E., 21 lks. dist., mkd. with faint scribe mks.

A ponderosa pine stump, 15 ins. diam., bears N. 86° W., 22 lks. dist., with no visible scribe mks. (Record, N. 79° W.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of corners in T. 35 S., R. 7 W.,
Salt Lake Meridian Utah

CHAINS

S C
T 35 S
R 8 W R 7 W

S 36 | S 31
1975/

from which

A white fir, 15 ins. diam., bears N. 15° E., 52 lks.
lks. dist., mkd. T35S R7W S31 BT.

A ponderosa pine, 10 ins. diam., bears S. 20° E.,
14 lks. dist., mkd. T36S R8W S1 BT.

A white fir, 10 ins. diam., bears N. 31° W., 43 lks.
dist., mkd. T35S R8W S36 BT.

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.

Cor. is located on steep N slope in dense white fir,
ponderosa pine and douglas fir timber.

The ¼ sec. cor. of sec. 31 only, on the W. bdy. of the
Tp., monumented with a lava stone, 15 x 10 x 7 ins.,
firmly set in a mound of stone, no visible mks. on the
stone. This cor. position was verified by a nearby known
cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 35 S
R 8 W R 7 W

| ¼
| S 31

1975

from which

A ponderosa pine, 32 ins. diam., bears S. 70° E.,
84 lks. dist., mkd. ¼ S31 BT.

An aspen, 10 ins. diam., bears N. 85° W., 21 lks.
dist., mkd. S36 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle N slope in aspen, white fir and
ponderosa pine timber.

The cor. of secs. 30 and 31, on the W. bdy. of the Tp.,
monumented with a lava stone, 18 x 10 x 6 ins., firmly
set in a mound of stone and plainly mkd. 1 notch on S
and 5 notches on N edges.

from which the original bearing tree


Remonumentation of corners in T. 35 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS

A juniper, 36 ins. diam., bears S. 50° W., 15 lks. dist., mkd. T35S R8W S36 BT. (Record, S. 65° W., 13 lks. dist., mkd. T35S R7W S25 BT.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock and over a cross. Raise a mound of stone encircling iron post, 4½ ft. base, with brass cap mkd.



from which

An aspen, 10 ins. diam., bears N. 24° E., 4½ lks. dist., mkd. T35S R7W S30 BT.


Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on rocky S slope in scattering aspen and juniper timber.

The ¼ sec. cor. of secs. 30 and 31, monumented with a lava stone, 14 x 12 x 7 ins., firmly set in a mound of stone and extending 8 ins. out of the ground. Plainly mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to solid rock and over a cross. Raise a mound of stone, 3 ft. base to top, with brass cap mkd.



from which

A ponderosa pine, 6 ins. diam., bears N. 29° E., 45 lks. dist., mkd. BT.

A ponderosa pine, 14 ins. diam., bears S. 13° W., 39 lks. dist., mkd. ¼ S31 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on E slope, 250 lks. W of small stream that drains S, in ponderosa pine and fir timber.

T. 38 S., R. 7 W., Salt Lake Meridian, Utah

Township 38 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The following cor. was established by Shadrack M. Richardson in 1885 and resurveyed by E. Bird and A. Nelson in 1947.

Remonumentation of corners in T. 38 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS

The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, determined from the original bearing trees.

A ponderosa pine stump, 40 ins. diam., bears N. 65° E., 50 lks. dist., with faint scribe mks.

A ponderosa pine, 30 ins. diam., bears N. 33° W., 62 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 38 S R 7 W
|
 $\frac{1}{4}$
|
S 32 | S 33
|
1975

from which

A ponderosa pine, 10 ins. diam., bears N. 32° E., 24 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

T. 35 S., R. 8 W., Salt Lake Meridian, Utah

Township 35 South, Range 8 West, Salt Lake Meridian, is located within the Dixie National Forest. The following $\frac{1}{4}$ sec. cor. of secs. 17 and 20, was established by Robert E. Lee Collier in 1895 and retraced by Mayhew H. Dalley in 1908. The $\frac{1}{4}$ sec. cor. of sec. 36 only, on the E. bdy. was established by Robert E. Lee Collier in 1895, on a resurvey.

The $\frac{1}{4}$ sec. cor. of sec. 36, on the E. bdy. of the Tp., monumented with a lava stone, 18 x 12 x 8 ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 35 S
R 8 W R 7 W
|
 $\frac{1}{4}$
|
S 36
|
1975

from which

A ponderosa pine, 20 ins. diam., bears S. 31° E., 35 lks. dist., mkd. S31 BT.

A ponderosa pine, 14 ins. diam., bears N. 49° W., 32 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

Remonumentation of corners in T. 35 S., R. 8 W.,
Salt Lake Meridian, Utah

CHAINS

Cor. is located on gentle N slope in aspen, fir and ponderosa pine timber.

The $\frac{1}{4}$ sec. cor. of secs. 17 and 20, monumented with a lava stone, 14 x 8 x 6 ins., firmly set in a collar of stone and plainly mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 35 S R 8 W

$\frac{1}{4}$ $\frac{S 17}{S 20}$

1975

from which

A ponderosa pine, 8 ins. diam., bears S. 44° E., 30 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

A juniper, 8 ins. diam., bears N. 23° W., 22 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on steep E slope, 3.00 chs. W of ridge that bears N and S, in pine and aspen timber.

T. 39 S., R. 8 W., Salt Lake Meridian, Utah

Township 39 South, Range 8 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The following cors. were established by Alfred B. Lewis in 1897.

The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a limestone, 15 x 12 x 8 ins., firmly set 6 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face, witnessed by a steel fence post alongside.

from which the original bearing tree

A ponderosa pine, 45 ins. diam., bears N. $11\frac{1}{2}^\circ$ W., 76 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, 85 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 39 S R 8 W

$\frac{1}{4}$
|
S 14 | S 13

1975

from which

1:

Remonumentation of corners in T. 39 S., R. 8 W.,
Salt Lake Meridian, Utah

CHAINS

A ponderosa pine, 11 ins. diam., bears S. $68\frac{1}{2}^{\circ}$ E.,
50 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle SE slope in dense ponderosa
pine and fir timber.

The cor. of secs. 11, 12, 13 and 14, monumented with a
limestone, 12 x 8 x 8 ins., firmly set in a mound of
stone and plainly mkd. 1 notch on E and 4 notches on S
edges, witnessed by a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft.
high, N of cor.

from which the original bearing trees

A ponderosa pine, 20 ins. diam., bears N. 39° E.,
26 lks. dist., mkd. T39S R8W S13 BT.

A ponderosa pine, 15 ins. diam., bears S. 36° E.,
67 lks. dist., mkd. with a grown over blaze.

A ponderosa pine, 18 ins. diam., bears S. $31\frac{1}{2}^{\circ}$ W.,
34 lks. dist., mkd. T39S R8W S14 BT.

A ponderosa pine, 20 ins. diam., bears N. $42\frac{1}{2}^{\circ}$ W.,
42 lks. dist. mkd. with a grown over blaze.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T 39 S R 8 W			
S 11		S 12	
S 14		S 13	
1975			

Deposit the mkd. stone alongside the iron post.

Cor. is located on spur, slopes S, and in ponderosa pine
timber.

The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, monumented with a
sandstone, 18 x 14 x 6 ins., firmly set 10 ins. in the
ground, in a mound of stone, plainly mkd. $\frac{1}{4}$ on N face.

from which the original bearing trees

A ponderosa pine, 30 ins. diam., bears S. 32° W.,
48 lks. dist., mkd. with a grown over blaze, remark
with $\frac{1}{4}$ S13 BT above old blaze.

A ponderosa pine, 20 ins. diam., bears N. 54° W.,
70 lks. dist., mkd. with grown over blaze, remark
with $\frac{1}{4}$ S12 BT over blaze.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

Remonumentation of corners in T. 39 S., R. 8 W.,
Salt Lake Meridian, Utah

CHAINS

T 39 S R 8 W

$$\frac{1}{4} \frac{S 12}{S 13}$$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on S slope in dense ponderosa pine and fir timber.

The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a limestone, 12 x 12 x 8 ins., firmly set in a mound of stone, dimly mkd. $\frac{1}{4}$ on N face.

from which the original bearing trees

A ponderosa pine, 44 ins. diam., bears S. 51° E.,
45 lks. dist., mkd. with a grown over blaze.

A balsam pine, 15 ins. diam., bears N. 11½° W.,
45 lks. dist., mkd. $\frac{1}{4}$ SBT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, in a collar of stone, with brass
cap mkd.

T 39 S R 8 W

$$\frac{1}{4} \frac{S 11}{S 14}$$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SW slope in ponderosa and balsam
pine timber.

T. 36 S., R. 9 W., Salt Lake Meridian, Utah

Township 36 South, Range 9 West, Salt Lake Meridian, is
located within the Dixie National Forest. The following
cors. were established by Jenkins and West in 1897.

The sec. cor. of secs. 24 and 25, on the E. bdy. of the
Tp., monumented with a lava rock, 18 x 12 x 6 ins.,
firmly set 10 ins. in the ground and plainly mkd. 2
notches on S, and 4 notches on N edges, witnessed by a
mound of stone, 4 ft. base, 2 ft. high, W of corner.

from which the original bearing tree

A pine stump, 24 ins. diam., bears S. 35° W., 35
lks. dist., mkd. with a partial blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

Remonumentation of corners in T. 36 S., R. 9 W.,
Salt Lake Meridian, Utah

CHAINS

T 36 S
R 9 W R 8 W
|
S 24 | S 30
S 25 |
|
1975

from which

A balsam pine, 20 ins. diam., bears S. 57° W.,
24 lks. dist., mkd. S25 BT.

A balsam pine, 18 ins. diam., bears N. 79° W.,
27 lks. dist., mkd. T36S R9W S24 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on NW slope, 20 lks. E of pine pole fence
line that bears N and S, in fir timber.

The sec. cor. of secs. 13 and 24, on the E. bdy. of the
Tp., monumented with a lava stone, 18 x 12 x 6 ins.,
firmly set in a mound of stone and plainly mkd. 3 notches
on N and S edges.

At the corner point

Set an iron post. 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, in a collar of stone, with brass
cap mkd.

T 36 S
R 9 W R 8 W
|
S 13 | S 19
S 24 |
|
1975

from which

A balsam pine, 12 ins. diam., bears S. 73° W.,
21 lks. dist., mkd. T36S R9W S24 BT.

A balsam pine, 12 ins. diam., bears N. 21½° W.,
51 lks. dist., mkd. T36S R9W S13 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle N slope in pole fence line
that bears N and S, in balsam pine timber.

T. 37 S., R. 14 W., Salt Lake Meridian, Utah

Township 37 South, Range 14 West, Salt Lake Meridian, is
located partially within the Dixie National Forest. The
following cors. were established by A. D. Stewart Jr. in
1873.

The ¼ sec. cor. of secs. 21 and 22, monumented with a
granite stone, 18 x 10 x 9 ins., firmly set in a mound of
stone and plainly mkd. ¼ on W face.

Remonumentation of corners in T. 37 S., R. 14 W.,
Salt Lake Meridian, Utah

CHAINS


from which the original bearing trees

A juniper, 10 ins. diam., bears East 22 lks. dist.,
mkd. with a blaze. (Record, 26 lks. dist.)

A juniper, 10 ins. diam., bears S. 75° W., 42 lks.
dist., mkd. with a blaze.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T 37 S R 14 W



Deposit the mkd. stone alongside the iron post.

Set a cedar post alongside the iron post.

Cor. is located on N slope in dense juniper and pinon
timber.


The ¼ sec. cor. of secs. 15 and 22, monumented with a
granite stone, 24 x 10 x 8 ins., firmly set in a mound of
stone and plainly mkd. ¼ on N face.

from which the original bearing tree

A fallen pinon, bears South 65 lks. dist., mkd.
with faint scribe mks.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins.
in the ground to bedrock, in a mound of stone, 5½ ft.
base to top, with brass cap mkd.

T 37 S R 14 W



1975

from which

A juniper, 6 ins. diam., bears N. 55° E., 11 lks.
dist., mkd. BT.

A juniper, 8 ins. diam., bears S. 18° W., 59 lks.
dist., mkd. ¼ BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on N slope in dense pinon and juniper
timber.

The ¼ sec. cor. of secs. 16 and 17, monumented with a
sandstone, 20 x 10 x 10 ins., firmly set in a mound of
stone and plainly mkd. ¼ on W face.

Remonumentation of corners in T. 37 S., R. 14 W.,
Salt Lake Meridian, Utah

CHAINS

from which the original bearing trees

A juniper, 14 ins. diam., bears N. 80° E., 25 lks.
dist., mkd. $\frac{1}{4}$ S16 BT.

A fallen pinon, 10 ins. diam., bears N. 70° W.,
40 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock and over a cross, with a mound
of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 37 S R 14 W
 $\frac{1}{4}$
 |
 S 17 | S 16
 |
 1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SE slope in pinon and juniper timber.

T. 36 S., R. 15 W., Salt Lake Meridian, Utah

Township 36 South, Range 15 West, Salt Lake Meridian, is
located within the Dixie National Forest. The following
cors. were established by A. J. Stewart in 1874.

The $\frac{1}{4}$ sec. cor. of secs. 2 and 35, on the S. bdy. of the
Tp., monumented with a granite stone, 16 x 12 x 8 ins.,
firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N
face, witnessed by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft.
high, N of corner.

from which the original bearing trees

A juniper, 12 ins. diam., bears N. 55° E., 80 lks.
dist., mkd. $\frac{1}{4}$ S35 BT.

A juniper, 10 ins. diam., bears S. 10° E., 130 lks.
dist., mkd. $\frac{1}{4}$ S2 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground to bedrock and over a cross, in a mound
of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 36 S R 15 W

 $\frac{1}{4}$ $\frac{S\ 35}{S\ 2}$

T 37 S
1975

Deposit the mkd. stone alongside the iron post.

Cor. falls on gentle W slope, 56 lks. N of 4 strand
barbwire fence line that bears E and W in scattering
juniper timber.

Remonumentation of corners in T. 36 S., R. 15 W.,
Salt Lake Meridian Utah

CHAINS

At the sec. cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with a limestone, 24 x 12 x 12 ins., extending 10 ins. above ground and plainly mkd. 1 notch on E and 5 notches on W edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock and over a cross, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 36 S R 15 W	
S 35	S 36
S 2	S 1
T 37 S	
1975	

Deposit the mkd. stone alongside the iron post.

Cor. falls on gentle S slope in N and S 4 strand barbwire fence line, 40 lks. N of fence cor., bears N, E and W, in scattering juniper timber.

T. 40 S., R. 15 W., Salt Lake Meridian, Utah

Township 40 South, Range 15 West, Salt Lake Meridian, is located within the Dixie National Forest. The following cors. were established by Harvey D. Heist in 1903.

At the cor. of secs. 9, 10, 15 and 16, monumented with a granite stone, 24 x 14 x 12 ins., firmly set and plainly mkd. 3 notches on E and 4 notches on S edges, witnessed by a mound of stone to W, 3 ft. base, 1½ ft. high.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to brass cap mkd.

T 40 S R 15 W	
S 9	S 10
S 16	S 15
1975	

Deposit the mkd. stone alongside the iron post.

Cor. falls on W slope in dense oak and scattering mahogany timber.

At the cor. of secs. 16, 17, 20 and 21, monumented with a lava stone, 15 x 12 x 12 ins., firmly set in a mound of stone and plainly mkd. 4 notches on E and 3 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock and over a cross, in a mound of stone, 4½ ft. base to brass cap mkd.

Remonumentation of corners in T. 40 S., R. 15 W.,
Salt Lake Meridian Utah

CHAINS

T 40 S R 15 W

S 17	S 16
S 20	S 21

1975

Deposit the mkd. stone in mound alongside the iron post.

Cor. falls on top of bluff at the SW edge of sagebrush flat encircled by oak and mahogany timber.

At the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, monumented with a lava stone, 16 x 9 x 5 ins., extending 8 ins. above ground and plainly mkd. $\frac{1}{4}$ on N face; witnessed by a mound of stone to N, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 40 S R 15 W

$\frac{1}{4}$ S 16
S 21

1975

Deposit the mkd. stone alongside the iron post.

Cor. falls on SW slope in scrub oak, mahogany and sagebrush growth.

CERTIFICATE OF SURVEY


~~XX~~(We). Glen B. Hatch, Supervisory Cadastral Surveyor , HEREBY
Gail E. Reynolds, Cadastral Surveyor
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day

of February . 19 61 . ~~XX~~(We) have remonumented corners in
T. 33 S., R. 4 E., Salt Lake Meridian T. 36 S., R. 15 W., Salt Lake Meridian
T. 30 S., R. 6 E., Salt Lake Meridian T. 40 S., R. 15 W., Salt Lake Meridian
T. 35 S., R. 2 W., Salt Lake Meridian
T. 34 S., R. 3 W., Salt Lake Meridian
T. 36 S., R. 4½ W., Salt Lake Meridian
T. 36 S., R. 5 W., Salt Lake Meridian
T. 39 S., R. 6 W., Salt Lake Meridian
T. 35 S., R. 7 W., Salt Lake Meridian
T. 38 S., R. 7 W., Salt Lake Meridian
T. 35 S., R. 8 W., Salt Lake Meridian
T. 39 S., R. 8 W., Salt Lake Meridian
T. 36 S., R. 9 W., Salt Lake Meridian
T. 37 S., R. 14 W., Salt Lake Meridian


of the Salt Lake Meridian, in the State of Utah , which
are represented in the foregoing field notes as having been executed by (me), ~~XX~~ and under (my)
~~XXX~~ direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

Under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

February 17, 1976
(Date)

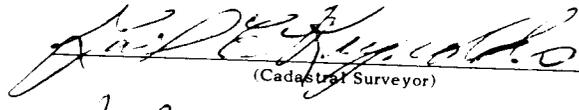
(Cadastral Surveyor)

February 17, 1976
(Date)

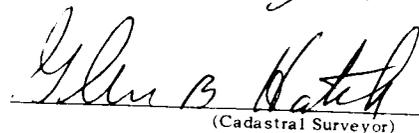

(Cadastral Surveyor)
Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in
T. 33 S., R. 4 E., Salt Lake Meridian T. 35 S., R. 7 W., Salt Lake Meridian
T. 30 S., R. 6 E., Salt Lake Meridian T. 38 S., R. 7 W., Salt Lake Meridian
T. 35 S., R. 2 W., Salt Lake Meridian T. 35 S., R. 8 W., Salt Lake Meridian
T. 34 S., R. 3 W., Salt Lake Meridian T. 39 S., R. 8 W., Salt Lake Meridian
T. 36 S., R. 4½ W., Salt Lake Meridian T. 36 S., R. 9 W., Salt Lake Meridian
T. 36 S., R. 5 W., Salt Lake Meridian T. 37 S., R. 14 W., Salt Lake Meridian
T. 39 S., R. 6 W., Salt Lake Meridian T. 36 S., R. 15 W., Salt Lake Meridian
executed by Gail E. Reynolds, Cadastral T. 40 S., R. 15 W., Salt Lake Meridian
Surveyor under the Supervision of Glen B. Hatch, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

FEB 27 1978
Date

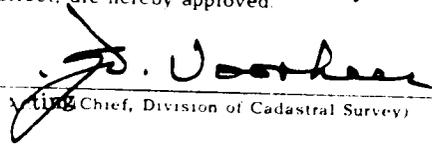
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I Certify~~ That the foregoing transcript of the field notes of the above described surveys in
is a true copy of the original field notes.

~~Date~~ ~~(Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596

ORIGINAL
FIELD NOTES

OF THE
REMONUMENTATION OF CORNERS

IN

TOWNSHIP 14 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN

TOWNSHIP 13 NORTH, RANGE 14 WEST, SALT LAKE MERIDIAN

TOWNSHIP 15 NORTH, RANGE 14 WEST, SALT LAKE MERIDIAN

TOWNSHIP 13 NORTH, RANGE 15 WEST, SALT LAKE MERIDIAN

TOWNSHIP 15 NORTH, RANGE 15 WEST, SALT LAKE MERIDIAN

TOWNSHIP 13 NORTH, RANGE 16 WEST, SALT LAKE MERIDIAN

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Gail E. Reynolds Cadastral Surveyor

Under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

Under special instructions dated February 15, 19 61 approved February 16, 1961

_____, which provided for the surveys included under U.S. Survey/Group
Number 447, and assignment instructions dated July 3, 1975

Survey commenced September 7, 1975

Survey completed September 18, 1975

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX TO SECTION CORNER MONUMENTS

Tp. 14 N. R. 13 W. Mer. Salt Lake

6	5	2 4 1	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13 ¹
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 13 N. R. 14 W. Mer Salt Lake

6	3 5	3 4	2	3	2	1
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Tp. 15 N. R. 14 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	4 4

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 13 N. R. 15 W. Mer. Salt Lake

6	5	4	3	2	1
7 4	8	9 5	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 15 N. R. 15 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	6 5 36

Tp. 13 N. R. 16 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10 9	11 8	12 7 7
18	17	16	9 15	8 14	7 13 6
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Volume

#

R0596

Remonumentation of Corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Sawtooth National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declination was found to be as follows:

- T. 14 N., R. 13 W., Salt Lake Meridian, 16°30' E.
- T. 13 N., R. 14 W., Salt Lake Meridian, 16°30' E.
- T. 15 N., R. 14 W., Salt Lake Meridian, 16°32' E.
- T. 13 N., R. 15 W., Salt Lake Meridian, 16°32' E.
- T. 15 N., R. 15 W., Salt Lake Meridian, 16°36' E.
- T. 13 N., R. 16 W., Salt Lake Meridian, 16°38' E.

The position of each corner was marked by the original monument or determined from the corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.


T. 14 N., R. 13 W., Salt Lake Meridian, Utah

Township 14 North, Range 13 West, Salt Lake Meridian, is located partially within the Sawtooth National Forest. The following corners were established by Andrew P. Hanson in 1893.

The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., monumented with a quartzite stone, 18 x 12 x 7 ins., firmly set 10 ins. in the ground, mkd. $\frac{1}{4}$ on W face, witnessed by a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Cor. is located on NE slope and in a four strand barbwire fence line, bears N and S.

The cor. of secs. 4, 5, 8 and 9, monumented with a quartzite stone, 18 x 12 x 9 ins., firmly set 10 ins. in the ground and plainly mkd. with 4 notches on E and 5 notches on S edges, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

2
Remonumentation of corners in T. 14 N., R. 13 W.,
Salt Lake Meridian, Utah

CHAINS

T 14 N R 13 W

S 5	S 4
S 8	S 9

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on N slope, 1.50 chs. N of ridge that bears E and W, in low shadscale growth.

The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a mica stone, 14 x 13 x 3 ins., firmly set 7 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on W face, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 14 N R 13 W

$\frac{1}{4}$
S 5
S 4

1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum post alongside the iron post.

Cor. is located on gentle SE slope, in old downed fence line, bears N and S, in low shadscale growth, no timber.

T. 13 N., R. 14 W., Salt Lake Meridian, Utah

Township 13 North, Range 14 West, Salt Lake Meridian, is located partially within the Sawtooth National Forest. The following cors. were established by Andrew P. Hanson in 1893.

At the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, on the N. bdy. of the Tp., monumented with a quartzite stone, 18 x 9 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 14 N R 14 W

$\frac{1}{4}$	S 33
	S 4

T 13 N
1975

Deposit the mkd. stone alongside the iron post.

Remuneration of corners in T. 13 N., R. 14 W.,
Salt Lake Meridian, Utah

CHAINS


Set a steel fence post alongside the iron post.

Cor. is located on SW slope, on quartzite outcrop, in
sagebrush growth, no timber.

The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the
Tp., monumented with a quartzite stone, 16 x 15 x 5 ins.,
firmly set 8 ins. in the ground and plainly mkd. 4 notches
on E and 2 notches on W edges, witnessed by a mound of
stone, 3 ft. base, 1½ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.


Set a steel fence post alongside the iron post.

Cor. is located on gentle NE slope in dense sagebrush
growth, no timber.

At the ¼ sec. cor. of secs. 5 and 32, on the N. bdy. of
the Tp., monumented with a mica stone, 18 x 15 x 3 ins.,
firmly set 10 ins. in the ground and plainly mkd. with
¼ on N face, witnessed by a mound of stone, 3 ft. base,
1½ ft. high to N. (Record, a quartzite stone, 18 x 12 x
8 ins.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on W slope in sagebrush growth, no timber.

T. 15 N., R. 14 W., Salt Lake Meridian, Utah

Township 15 North, Range 14 West, Salt Lake Meridian, is
located partially within the Sawtooth National Forest.
The following cors. were established by Andrew P. Hanson
in 1896.

Remonumentation of corners in T. 15 N., R. 14 W.,
Salt Lake Meridian, Utah

CHAINS

The cor. of secs. 25, 26, 35 and 36, monumented with a quartzite stone, 18 x 6 x 5 ins., firmly set 17 ins. in the ground and plainly mkd. with 1 notch on E and S edges. This cor. has been recognized as the cor. for many years by local land owners and was verified by Mr. Roland Ross, long time resident and previous owner of property that cor. is located on.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 30 ins. in the ground, with brass cap mkd.

T 15 N R 14 W

S 26	S 25
S 35	S 36

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located in grass pasture 47 lks. S of SE bank of small pond and N. 63° W., 82½ lks. dist. from a picket fence cor. which bears S and E, thence encircling yard and brick home.

The ¼ sec. cor. of secs. 25 and 36, monumented with a quartzite stone, 18 x 10 x 7 ins., firmly set 6 ins. in the ground, and plainly mkd. with ¼ on N face. Mr. Roland Ross, long time resident of the area, verified this cor. position as being recognized as the cor. by local land owners for many years.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 19 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 15 N R 14 W

¼	S 25	S 36

1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located in cultivated field and in large deposit of stone.

T. 13 N., R. 15 W., Salt Lake Meridian, Utah

Township 13 North, Range 15 West, Salt Lake Meridian, is located partially within the Sawtooth National Forest. The following cors. were established by Andrew P. Hanson in 1893.

The cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with a quartzite stone, 26 x 12 x 4 ins., firmly set 12 ins. in the ground and plainly mkd. with 2 notches on E and 4 notches on S edges, witnessed by a mound of stone, 4 ft. base, 2 ft. high.

Remonumentation of corners in T. 13 N., R. 15 W.,
Salt Lake Meridian, Utah

CHAINS

the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 13 N
R 16 W R 15 W
S 12 | S 7
 | S 18
 |
 1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on S slope in sagebrush growth, no timber.

The ¼ sec. cor. of secs. 9 and 16, monumented with a quartzite stone, 18 x 11 x 5 ins., firmly set 10 ins. in the ground and plainly mkd. ¼ on N face, witnessed by a mound of stone, 3 ft. base, 1½ ft. high.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 13 N R 15 W
¼ $\frac{S 9}{S 16}$
1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum post alongside the iron post.

Cor. is located on W slope in low sagebrush growth, no timber.

T. 15 N., R. 15 W., Salt Lake Meridian, Utah

Township 15 North, Range 15 West, Salt Lake Meridian, is located in the Sawtooth National Forest. The following cors. were established by Nephi P. Anderson in 1892.

The cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with a quartzite stone, 17 x 14 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. with 1 notch on E and 5 notches on W edges, witnessed by a mound of stone, 4 ft. base, 1½ ft. high.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

Remonumentation of corners in T. 15 N., R. 15 W.,
Salt Lake Meridian, Utah

CHAINS

T 15 N R 15 W

S 35	S 36
S 2	S 1

T 14 N

1975

Deposit the mkd. stone alongside the iron post.

The cor. is located in sagebrush growth, S 9°30' E., 12 lks. dist. from a four strand barbwire fence corner that bears N, E, S and W.

The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a quartzite stone, 40 x 12 x 8 ins., firmly set 25 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face. (Record, 34 x 12 x 5 ins.)

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 15 N R 15 W

S 35	S 36
------	------

1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on N slope, in four strand barbwire fence line that bears N and S, in low sagebrush growth, no timber.

T. 13 N., R. 16 W., Salt Lake Meridian, Utah

Township 13 North, Range 16 West, Salt Lake Meridian, is located partially within the Sawtooth National Forest. The following cors. were established by Nephi P. Anderson in 1903.

The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., monumented with a quartzite stone, 16 x 11 x 6 ins., firmly set 6 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face. Witnessed by a mound of stone, 3 ft. base 1 $\frac{1}{2}$ ft. high, to W.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 N
R 16 W R 15 W

S 13	S 18
------	------

1975

Remuneration of corners in T. 13 N., R. 16 W.,
Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on S slope in sagebrush growth, 94 lks.
N of small stream that drains S. 45° E., no timber.

The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a
quartzite stone, 15 x 11 x 3 ins., firmly set 10 ins. in
the ground and plainly mkd. $\frac{1}{4}$ on W face, witnessed by
mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 N R 16 W	
S 14	S 13
1975	

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

The cor. of secs. 11, 12, 13 and 14, monumented with a
quartzite stone, 15 x 11 x 3 ins., firmly set 8 ins. in
the ground and plainly mkd. 1 notch on E and 4 notches
on S edges, witnessed by a mound of stone, 3 ft.
base 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 N R 16 W	
S 11	S 12
S 14	S 13
1975	

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on SE slope in sagebrush growth, no
timber.

The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, monumented with a
quartzite stone, 18 x 9 x 3 ins., firmly set 9 ins. in
the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by
a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins.
in the ground to bedrock, in a mound of stone, 3 $\frac{1}{2}$ ft.
base to top, with brass cap mkd.

Remonumentation of corners in T. 13 N., R. 16 W.,
Salt Lake Meridian, Utah

CHAINS

T 13 N R 16 W

$$\frac{1}{4} \frac{S 12}{S 13}$$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SE slope in sagebrush growth, no timber.

The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a sandstone, 17 x 6 x 5 ins., firmly set 6 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 N R 16 W

$$\begin{array}{c} \frac{1}{4} \\ | \\ S 15 \quad | \quad S 14 \\ | \\ 1975 \end{array}$$

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on W slope at N edge of draw that drains irregularly SE, in sage and bitterbrush growth, no timber.

The cor. of secs. 10, 11, 14 and 15, monumented with a quartzite stone, 13 x 8 x 6 ins., firmly set 6 ins. in the ground and plainly mkd. 2 notches on E and 4 notches on S edges, witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 N R 16 W

$$\begin{array}{c} | \\ \frac{S 10 \quad | \quad S 11}{S 15 \quad | \quad S 14} \\ | \\ 1975 \end{array}$$

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on gentle NE slope in sagebrush growth, no timber.

The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a limestone, 15 x 8 x 6 ins., firmly set 5 ins. in the

Remonumentation of corners in T. 13 N., R. 16 W.,
Salt Lake Meridian, Utah

CHAINS

ound and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a
of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of corner.
(Record, quartzite)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 N R 16 W

$\frac{1}{4}$ $\frac{S 11}{S 14}$

1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on S slope in bunchgrass and sagebrush
growth, no timber.

The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a
mica stone, 13 x 9 x 5 ins., firmly set 5 ins. in the
ground and plainly mkd. $\frac{1}{4}$ on W face, witnessed by a mound
of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to shale rock, in a mound of stone, 5 ft.
base to top, with brass cap mkd. (Destroy old mound)

T 13 N R 16 W

$\frac{1}{4}$
|
S 16 | S 15

1975

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on S slope, 1.00 ch. S of top of spur
that slopes W, and in sagebrush growth, no timber.

The $\frac{1}{4}$ sec. cor. of secs. 10 and 15, monumented with a
quartzite stone, 18 x 7 x 4 ins., firmly set 10 ins. in
the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed
by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 N R 16 W

$\frac{1}{4}$ $\frac{S 10}{S 15}$

1975

Remonumentation of corners in T. 13 N., R. 16 W.,
Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

Cor. is located on N slope in sagebrush growth and at
the S tip of small patch of aspen trees. No suitable
bearing trees.

CERTIFICATE OF SURVEY

~~XX~~ (We) Glen B. Hatch, Supervisory Cadastral Surveyor . HEREBY
Gail E. Reynolds, Cadastral Surveyor
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day

of February 19 61 ~~XX~~ (We) have remonumented [redacted] corners in

- T. 14 N., Rv 13 W., Salt Lake Meridian
- T. 13 N., R. 14 W., Salt Lake Meridian
- T. 15 N., R. 14 W., Salt Lake Meridian
- T. 13 N., R. 15 W., Salt Lake Meridian
- T. 15 N., R. 15 W., Salt Lake Meridian
- T. 13 N., R. 16 W., Salt Lake Meridian

at the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me) ~~XXX~~ and under (my) ~~XXX~~ direction, and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

January 16, 1976
(Date)

Gail E. Reynolds
(Cadastral Surveyor)

January 16, 1976
(Date)

Glen B. Hatch
(Cadastral Surveyor)

Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of the following corners in

- T. 14 N., R. 13 W., Salt Lake Meridian
- T. 13 N., R. 14 W., Salt Lake Meridian
- T. 15 N., R. 14 W., Salt Lake Meridian
- T. 13 N., R. 15 W., Salt Lake Meridian
- T. 15 N., R. 15 W., Salt Lake Meridian
- T. 13 N., R. 16 W., Salt Lake Meridian

Gail E. Reynolds, Cadastral Surveyor, under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor, are hereby approved

FEB 27 1978

Date

J. J. [Signature]
Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I hereby certify that the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes~~

~~Date: _____ Chief, Division of Cadastral Survey~~

Volume

#

R0596

Volume

#

R0596

ORIGINAL
FIELD NOTES

OF THE
REMONUMENTATION OF CORNERS IN

TOWNSHIP 10 SOUTH, RANGE 2 EAST, SALT LAKE MERIDIAN

TOWNSHIP 5 SOUTH, RANGE 4 EAST, SALT LAKE MERIDIAN

TOWNSHIP 7 SOUTH, RANGE 4 EAST, SALT LAKE MERIDIAN

TOWNSHIP 8 SOUTH, RANGE 4 EAST, SALT LAKE MERIDIAN

TOWNSHIP 9 SOUTH, RANGE 4 EAST, SALT LAKE MERIDIAN

TOWNSHIP 8 SOUTH, RANGE 5 EAST, SALT LAKE MERIDIAN

TOWNSHIP 9 SOUTH, RANGE 5 EAST, SALT LAKE MERIDIAN

TOWNSHIP 10 SOUTH, RANGE 6 EAST, SALT LAKE MERIDIAN

TOWNSHIP 1 SOUTH, RANGE 10 WEST, UINTAH MERIDIAN

TOWNSHIP 2 SOUTH, RANGE 10 WEST, UINTAH MERIDIAN

TOWNSHIP 5 SOUTH, RANGE 10 WEST, UINTAH MERIDIAN

TOWNSHIP 2 SOUTH, RANGE 12 WEST, UINTAH MERIDIAN

Of the SALT LAKE AND UINTAH MERIDIANS Meridian,

In the State of Utah

EXECUTED BY

Gail E. Reynolds, Cadastral Surveyor

Under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

Under special instructions dated February 15, 1961, approved February 16, 1961.

_____, which provided for the surveys included under U.S. Survey Group
Number 447, and assignment instructions dated July 3, 1975.

Survey commenced July 7, 1975

Survey completed August 7, 1975

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX TO SECTION CORNER MONUMENTS

Tp. 10 S. R. 2 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27 2	26 1	25
31	32	33	34	35	36

Tp. 5 S. R. 4 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11 3	12 3
18	17	16	15	14	13 2
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 7 S. R. 4 E. Mer. Salt Lake

6	5	4 10	3 10	2 8	1 9
7	8	9 7	10 8	11 7	12 6
18	17	16	15	14	13
19 4	20 10	21 9	22	23	24 5
30	29	28	27	26	25
31	32	33	34	35	36

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 8 S. R. 4 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24 12
30	29	28	27 13	26 12	25 12
31	32	33	34	35 11	36

Tp. 9 S. R. 4 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 8 S. R. 5 E. Mer. Salt Lake

6	5 14	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 9 S., R. 5 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	15 ● 34	35	36

Tp. 10 S., R. 6 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
				● 17	● 17
18	17	16	15	14	13
				● 17	● 16
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 1 S., R. 10 W. Mer. Uintah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
			● 22	● 22	
19	20	21	22	23	24
● 23	● 23	● 21	● 21		
30	29	28	27	26	25
● 19	● 24		● 21	● 20	
● 19	● 22	● 33	● 34		
● 19	● 18	● 18			

Volume

#

R0596

INDEX TO SECTION CORNER MONUMENTS

Tp. 2 S. R. 10 W. Mer. Uintah

24	6	5	4	3	2	1
	7	8	9	10	11	12
	18	17	16	15	14	13
	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36

Tp. 5 S. R. 10 W. Mer. Uintah

	6	5	4	3	2	1
	7	8	9	10	11	12
	18	17	25	15	14	13
	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36

Tp. 2 S. R. 12 W. Mer. Uintah

	6	5	4	3	2	1
	7	8	9	10	11	12
	18	17	16	15	14	13
19	20	21	22	23	24	
28	29	28	27	26	25	
30	32	33	34	35	36	
	27					

Volume

#

R0596

Remonumentation of corners in Utah

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Uinta National Forest. A Forester's compass was used to determine the bearing of new corner accessories. The mean magnetic declination was found to be as follows:

- T. 10 S., R. 2 E., Salt Lake Meridian, 15°14' E.
- T. 5 S., R. 4 E., Salt Lake Meridian, 15°21' E.
- T. 7 S., R. 4 E., Salt Lake Meridian, 15°18' E.
- T. 8 S., R. 4 E., Salt Lake Meridian, 15°16' E.
- T. 9 S., R. 4 E., Salt Lake Meridian, 15°14' E.
- T. 8 S., R. 5 E., Salt Lake Meridian, 15°15' E.
- T. 9 S., R. 5 E., Salt Lake Meridian, 15°09' E.
- T. 10 S., R. 6 E., Salt Lake Meridian, 15°06' E.
- T. 1 S., R. 10 W., Uintah Meridian, 15°12' E.
- T. 2 S., R. 10 W., Uintah Meridian, 15°12' E.
- T. 5 S., R. 10 W., Uintah Meridian, 15°04' E.
- T. 2 S., R. 12 W., Uintah Meridian, 15°11' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 10 S., R. 2 E., Salt Lake Meridian, Utah

Township 10 South, Range 2 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following corners were established by Andrew P. Hanson in 1898.

The cor. of secs. 26, 27, 34 and 35, monumented with a limestone, 18 x 8 x 6 ins., firmly set 12 ins. in the ground and plainly mkd. 2 notches on E and 1 notch on S edge.

from which the original bearing trees

- A fir, 40 ins. diam., bears N. 64°45' E., 17 lks. dist., mkd. with a grown over blaze.
- A fir, 24 ins. diam., bears S. 48°10' W., 58 lks. dist., mkd. with a grown over blaze.
- A fir, 45 ins. diam., bears N. 12°40' W., 51 lks. dist., mkd. with a grown over blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 10 S R 2 E			
S 27		S 26	
S 34		S 35	
1975			

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

Set an aluminum fence post alongside the iron post.

Remonumentation of corners in T. 10 S., R. 2 E.,
Salt Lake Meridian, Utah

CHAINS

Cor. is located on N slope, 150 lks. N of ridge that bears E and W, in scattering fir and grass growth.

The cor. of secs. 27, 28, 33 and 34, monumented with a lava stone, 18 x 10 x 7 ins., firmly set 12 ins. in the ground and plainly mkd. 3 notches on E and 1 notch on S edges.

from which the original bearing trees

A fir, 50 ins. diam., bears N. 2°35' E., 51 lks. dist., mkd. with a grown over blaze.

An aspen, 10 ins. diam., bears S. 65°15' E., 19 lks. dist., mkd. T10S R2E S34 BT.

A fir, 50 ins. diam., bears S. 3°25' W., 42 lks. dist., mkd. with a grown over blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 10 S R 2 E

S 28	S 27
S 33	S 34

1975

from which

An aspen, 14 ins. diam., bears S. 88° W., 33½ lks. dist., mkd. T10S R2E S33 BT.

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on gentle N slope in aspen and fir timber.

T. 5 S., R. 4 E., Salt Lake Meridian, Utah

Township 5 South, Range 4 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cor. of secs. 11, 12, 13 and 14 was established by Joseph Gorkinski in 1869 and resurveyed by Andrew J. Stewart Jr. in 1881. The cors. of 10, 11, 14 and 15, and 13, 14, 23 and 24 were established by Andrew J. Stewart Jr. in 1881.

The cor. of secs. 13, 14, 23 and 24, monumented with a granite stone, 20 x 14 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. 1 notch on E and 3 notches on S edges, witnessed by a mound of stone, 3 ft. base, 1½ ft. high, S of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of corners in T. 5 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

T 5 S R 4 E

S 14	S 13
S 23	S 24

1975

Deposit the mkd. stone alongside the iron post.

Due to dense brush W of cor. the original mound was deemed impracticable to move.

The cor. is located on gentle N slope in dense oak brush and undergrowth.

The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 18 x 10 x 8 ins., firmly set 10 ins. in the ground, alongside a fence cor. and plainly mkd. 1 notch on E and 4 notches on S edges, witnessed by a mound of stone, 4 ft. base, 2½ ft. high, E of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 5 S R 4 E

S 11	S 12
S 14	S 13

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle N slope in a net wire fence cor. that bears N, S, E and W, and on the E edge of an improved dirt road that bears S. 30° E. and N. 30° W.

The cor. of secs. 10, 11, 14 and 15, monumented with a granite stone, 20 x 8 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. 2 notches on E and 4 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 5 S R 4 E

S 10	S 11
S 15	S 14

1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum post, 5 ft. high, alongside the iron post.

Cor. is located on gentle N slope in dense oak brush and sagebrush.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS


T. 7 S., R. 4 E., Salt Lake Meridian, Utah

Township 7 South, Range 4 East, Salt Lake Meridian, is located within the Uinta National Forest. The following cors. were established by Henry Fitzhugh and Nicholas Fitzhugh on the W. bdy. of the T. in 1895 and the N. bdy. and subdivisional lines by Scott P. Stewart and John R. Stewart in 1899. The private land claim cors. were established by Scott P. Stewart and John R. Stewart in 1901.

The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with a sandstone, 15 x 15 x 15 ins., firmly set 8 ins. in the ground and plainly mkd. 4 notches on N and 2 notches on S edges. (Record, 36 x 24 x 8 ins.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.



from which

A fir, 30 ins. diam., bears S. 67°30' E., 20 lks. dist., mkd. T7S R4E S30 BT.

A fir, 6 ins. diam., bears S. 77° W., 23½ lks. dist., mkd. BT.


Deposit the mkd. stone alongside the iron post.

Cor. is located on top of ridge that bears S. 25° E. and N. 25° W., in maple, fir and oak brush timber.

The cor. of secs. 4, 33, 34, 44 and 47, on the N. bdy. of the Tp., monumented with a sandstone, 24 x 6 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. 3 grooves on E and W faces and 45CCMM12AV on S face. This cor. is angle cor. #5 on Moroni Miners private land claim survey and angle cor. #12 on Alfred Voyse private land claim survey including special secs. 44 and 47.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.



Deposit the mkd. stone alongside the iron post.

CHAINS

Cor. is located on W edge of sagebrush flat on top of wide ridge encircled by oak brush and in an old downed fence cor., bears N, S, E and W.

The $\frac{1}{4}$ sec. cor. of secs. 4 and 33, on the N. bdy. of the Tp., monumented with a sandstone, 15 x 10 x 8 ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of cor.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap mkd.

T 6 S R 4 E

$\frac{1}{4}$ $\frac{S 33}{S 4}$

T 7 S
1975

Deposit the mkd. stone alongside the iron post.

Cor. is located 36 lks. N of 4 strand barbwire fence line that bears E and W, on SW slope and in a dense oak brush and maple timber growth.

The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with a quartzite stone, 20 x 12 x 6 ins., firmly set in a mound of stone and plainly mkd. 4 notches on E and 2 notches on W edges.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to solid rock and over a cross, encircled by a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 6 S R 4 E

$\frac{S 32}{S 5}$ | $\frac{S 33}{S 4}$

T 7 S
1975

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on SE slope in oak brush.

The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, monumented with a limestone, 22 x 12 x 7 ins., firmly set 12 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of cor.

from which the original bearing tree

An oak, 12 ins. diam., bears N. 70° E., 37 lks. dist., mkd. with a grown over blaze.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 7 S R 4 E

$\frac{1}{4}$ $\frac{S 24}{S 25}$

1975

from which

A juniper, 6 ins. diam., bears S. 12° E., 50 lks. dist., mkd. T7S R4E S25 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on N slope in oak and maple timber.

The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 16 x 10 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. 2 notches on E and 4 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.

T 7 S R 4 E

$\frac{S 10}{S 15}$ | $\frac{S 11}{S 14}$

1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum post, 5 ft. high, alongside the iron post.

Cor. is located on S slope in scattering oak brush.

The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a sandstone, 14 x 10 x 7 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a small mound of stone, N of cor.

from which an unrecorded bearing tree, recently mkd.

A maple, 10 ins. diam., bears S. $21\frac{1}{2}^\circ$ W., 98 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S14 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap mkd.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

T 7 S R 4 E

$\frac{1}{4}$ $\frac{S 11}{S 14}$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located 100 lks. N of dirt road in bottom of canyon that drains S. 80° W., in oak brush and maple timber.

The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 14 x 12 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap, mkd.

T 7 S R 4 E

$\frac{1}{4}$
|
S 10 | S 11

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located 100 lks. S of opening in hollow in dense oak and maple tree timber.

The cor. of secs. 2, 3, 10 and 11, monumented with a flintstone, 16 x 10 x 4 ins., firmly set 6 ins. in the ground and plainly mkd. 2 notches on E and 5 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap, mkd.

T 7 S R 4 E

|
S 3 | S 2
S 10 | S 11

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on N edge of sagebrush flat in oak brush.

The cor. of secs. 9, 10, 15 and 16, and angle cor. # 2 of Sara Elizabeth Strong's private land claim survey, monumented with a sandstone, 36 x 12 x 8 ins., firmly set in a mound of stone and plainly mkd. 3 notches on E and 4 notches on S edges and dimly mkd. lettering on SE face.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in rock slide and in a mound of stone, 5 ft. base, to top of brass cap, mkd.

T 7	S	R	4	E
S 9		S 10		
S 16		S 15		
	1975			

from which

A box elder, 24 ins. diam., bears S. 85° W., 34 lks. dist., mkd. T7S R4E S16 BT.

Deposit the mkd. stone in mound alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.

Cor. is located at the base of E slope in rock slide and E edge of pasture.

The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a quartzite stone, 20 x 11 x 6 ins., firmly set in a mound of stone and plainly mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock and over a cross, encircled by a mound of stone, 5 ft. base, to top of brass cap, mkd.

T 7	S	R	4	E
	$\frac{1}{4}$			
S 9		S 10		
	1975			

Deposit the mkd. stone in mound of stone alongside the iron post.

Set an aluminum post, 5 ft. high, alongside the iron post.

Cor. is located on SW slope in oak brush timber.

The cor. of secs. 3, 4, 9 and 10, monumented with a quartzite stone, 20 x 12 x 8 ins., firmly set 8 ins. in the ground and plainly mkd. 3 notches on E and 5 notches on S edges, witnessed by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

T 7 S R 4 E
|
S 4 | S 3
S 9 | S 10
|
1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on S slope, 33 lks. N of cut for new road that bears NE and SW and in a burn area.

The $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with a sandstone, 16 x 10 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a private land claim closing cor. 2 lks. to East, firmly set in a mound of stone and plainly mkd. CCWTC on E face and HMDjr on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, to top of brass cap, mkd.

T 7 S R 4 E
 $\frac{1}{4}$ $\frac{S 3}{S 10}$
1975

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

Cor. is located on gentle S slope, 2 lks. W of netwire fence line that bears N. $3^{\circ}45'$ W. and S. $3^{\circ}45'$ E., in grass growth.

The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented with a limestone, 14 x 14 x 8 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W face, witnessed by a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 7 S R 4 E
 $\frac{1}{4}$
|
S 20 | S 21
|
1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum post, 5 ft. high, alongside the iron post.

Cor. is located 130 lks. S of improved gravel road, bears E and W, on NE slope in oak brush and serviceberry undergrowth.

Remonumentation of corners in T. 7 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

The cor. of secs. 4, 5, 8 and 9, monumented with a limestone, 15 x 8 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. 4 notches on E and 5 notches on S edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

$$\begin{array}{c} T\ 7\ S\ R\ 4\ E \\ | \\ S\ 5\ | \ S\ 4 \\ S\ 8\ | \ S\ 9 \\ | \\ 1975 \end{array}$$

Deposit the mkd. stone alongside the iron post.

Cor. is located in small hollow, drains E and in dense oak brush and maple timber.

The ¼ sec. cor. of secs. 4 and 9, monumented with a sandstone, 14 x 10 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

$$\begin{array}{c} T\ 7\ S\ R\ 4\ E \\ \\ \frac{1}{4} \frac{S\ 4}{S\ 9} \\ \\ 1975 \end{array}$$

Deposit the mkd. stone alongside the iron post.

Cor. is located in 4 strand fence cor. that bears E and N, in dense oak timber.

The ¼ sec. cor. of secs. 19 and 20, monumented with a quartzite stone, 18 x 10 x 8 ins., firmly set 8 ins. in the ground and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock and over a cross, encircled by a mound of stone, 4 ft. base to top, with brass cap mkd.

$$\begin{array}{c} T\ 7\ S\ R\ 4\ E \\ | \\ \frac{1}{4} \\ | \\ S\ 19\ | \ S\ 20 \\ | \\ 1975 \end{array}$$

Deposit the mkd. stone in mound alongside the iron post.

CHAINS

Cor. is located on SE slope, 30 lks. S of top of spur that slopes E and on E side of small clearing in oak brush and maple timber.


T. 8 S., R. 4 E., Salt Lake Meridian, Utah

Township 8 South, Range 4 East, Salt Lake Meridian, is located within the Uinta National Forest. The following cor. on the S. bdy. of the Tp., was established by E. H. Hesse in 1883, and the subdivisional cors. of the Tp. by Scott P. Stewart and John R. Stewart in 1899.

The cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with a sandstone, 15 x 12 x 7 ins., firmly set in a mound of stone and plainly mkd. 2 notches on E and 4 notches on W edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap, mkd.



Deposit the mkd. stone alongside the iron post.


Set an aluminum fence post, 5 ft. high, post alongside the iron post.

Cor. is located in a netwire fence line that bears E and W and in scattering oak brush and sagebrush undergrowth.

The ¼ sec. cor. of secs. 25 and 26, monumented with a limestone, 20 x 12 x 10 ins., firmly set in a mound of stone and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base, to top of brass cap, mkd.



Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post alongside the iron post.

Cor. is located on SE slope in old fence cor. (wire on ground) that bears N, S and W, in scattering oak undergrowth.

Remonumentation of corners in T. 8 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, monumented with a quartzite stone, 20 x 12 x 6 ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, 2 ft. base, 1 ft. high, N of cor.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, to top of brass cap, mkd.

T 8 S R 4 E

$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$

1975

from which

A juniper, 10 ins. diam., bears N. $72^{\circ}30'$ W., 85 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum post alongside the iron post.

Cor. is located on top of bluff that slopes W in old E and W fence line, in sagebrush and scattering juniper timber.

The $\frac{1}{4}$ sec. cor. of secs. 23 and 24, monumented with a limestone, 18 x 12 x 8 ins., firmly set in a mound of stone and plainly mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap mkd.

T 8 S R 4 E

$\frac{1}{4}$
|
S 23 | S 24

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located in old downed fence cor. that bears N, E and S, in grass and scattering oak brush timber.

The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with a sandstone, 28 x 10 x 8 ins., firmly set 20 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, 2 ft. base, 1 ft. high, N of cor.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

Remonumentation of corners in T. 8 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

T 8 S R 4 E

1/4 S 26
S 35

1975

Deposit the mkd. stone alongside the iron post.

from which

An oak, 10 ins. diam., bears S. 40° E., 28 lks.
dist., mkd. 1/4 S35 BT.

An oak, 14 ins. diam., bears N. 19° W., 12 lks.
dist., mkd. 1/4 S26 BT.

Cor. is located on S slope in oak and maple timber.

The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 18 x 10 x 4 ins., firmly set in a mound of stone and plainly mkd. 3 notches on E and 1 notch on S edges.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to solid rock and over a cross, encircled by a mound of stone, 4 1/2 ft. base, to top of brass cap, mkd.

T 8 S R 4 E

S 28 | S 27
S 33 | S 34

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SE slope, 45 lks. S of top of ridge that bears N. 70° E. and S. 70° W., in scrub oak undergrowth.

T. 9 S., R. 4 E., Salt Lake Meridian, Utah

Township 9 South, Range 4 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cors. were established by Ernest H. Hesse in 1883.

The 1/4 sec. cor. of secs. 1 and 2, monumented with a conglomerate stone, 14 x 12 x 6 ins., firmly set in a mound of stone and plainly mkd. 1/4 on W face.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, to top of brass cap, mkd.

T 9 S R 4 E

1/4
S 2 | S 1

1975

Remonumentation of corners in T. 9 S., R. 4 E.,
Salt Lake Meridian, Utah

CHAINS

from which

A juniper, 8 ins. diam., bears N. 36°30' E.,
64 lks. dist., mkd. BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on NW slope, 9½ lks. W of 4 strand
barbwire fence line that bears N and S, in scattering
juniper timber.

The ¼ sec. cor. of secs. 2 and 3, monumented with a con-
glomerate stone, 24 x 10 x 10 ins., firmly set 10 ins. in
the ground and in a mound of stone, plainly mkd. ¼ on W
face.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins.
in the ground to bedrock, in a mound of stone to top of
brass cap, mkd.

T 9 S R 4 E
 |
 ¼
 |
 S 3 | S 2
 |
 1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on spur that slopes S, in scattering
oak brush.

The ¼ sec. cor. of secs. 3 and 10, monumented with a
sandstone, 30 x 12 x 4 ins., firmly set 15 ins. in the
ground and in a mound of stone, plainly mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 9 S R 4 E

¼ S 3
 S 10

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on NE slope in sagebrush and scattering
oak brush.

T. 8 S., R. 5 E., Salt Lake Meridian, Utah

Township 8 South, Range 5 East, Salt Lake Meridian, is
located within the Uinta National Forest. The following
cor. was established by Adolphe Jessen in 1901.


The ¼ sec. cor. of secs. 5 and 6, monumented with a lime-
stone, 14 x 8 x 5 ins., firmly set 8 ins. in the ground
and plainly mkd. ¼ on W face.

Remonumentation of corners in T. 8 S., R. 5 E.,
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone to top of brass cap, mkd.



Deposit the mkd. stone alongside the iron post.

Cor. is located in 5 strand barbwire fence cor. that bears N, E and W, and on top of spur that slopes S, in oak brush.

T. 9 S., R. 5 E., Salt Lake Meridian, Utah

Township 9 South, Range 5 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cor. was established by Ernest H. Hesse in 1883.

The ¼ sec. cor. of secs. 33 and 34, monumented by a limestone, 18 x 8 x 8 ins., firmly set and in a mound of stone, plainly mkd. with ¼ on W face.


from which the original bearing trees

A juniper, 36 ins. diam., bears N. 35° E., 13 lks. dist., mkd. ¼ S34 BT.

A juniper, 40 ins. diam., bears N. 40° W., 45 lks. dist., mkd. ¼ S33 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and over a cross, encircled by a mound of stone, 3 ft. base, to top of brass cap mkd.



Deposit the mkd. stone in mound alongside the iron post.

Set an aluminum fence post, 4 ft. high, alongside the iron post.

Cor. is located on N slope, 15 lks. N of trail road, bears S. 45° E. and N. 45° W.

T. 10 S., R. 6 E., Salt Lake Meridian, Utah

Township 10 South, Range 6 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cors. were established by Augustus D. Ferron in 1882 and resurveyed by Andrew P. Hanson in 1907.

Remuneration of corners in T. 10 S., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS

The cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with a sandstone, 24 x 14 x 4 ins., firmly set 10 ins. in the ground and plainly mkd. 3 notches on N and S edges.

from which the original bearing trees

A juniper, 30 ins. diam., bears S. 14°30' W., 25 lks. dist., mkd. with a partially grown over blaze. (Record, S. 36°15' W., 30 lks. dist.)

A pinon, 20 ins. diam., bears N. 54° W., 69 lks. dist., mkd. with a partially grown over blaze. (Record, N. 58°15' W., 76 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 10 S	
R 6 E R 7 E	
S 13	S 18
S 24	S 19
1975	

Deposit the mkd. stone alongside the iron post.

Cor. is located on top of low ridge, bears E and W, and in old downed fence line bearing E and W; in scattering pinon and juniper timber.

The ¼ sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., monumented with a sandstone, 14 x 10 x 10 ins., firmly set 6 ins. in the ground and plainly mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a collar of stone to top of brass cap mkd.

T 10 S	
R 6 E R 7 E	
¼	
S 13	S 18
1975	

from which

A pinon, 8 ins. diam., bears N. 78° E., 17 lks. dist., mkd. BT.

A pinon, 20 ins. diam., bears West 14 lks. dist., mkd. T10S R6E S13 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on S slope and in old barbwire fence line that bears N and S, in juniper and pinon timber.

Remonumentation of corners in T. 10 S., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS

Cor. of secs. 13, 14, 23 and 24, monumented with a sandstone, 16 x 12 x 3 ins., firmly set 10 ins. in the ground and plainly mkd. 1 notch on E and 3 notches on S edges, witnessed by a mound of stone, 2 ft. base, 1 ft. high, E of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone to top of brass cap, mkd.

T 10 S R 6 E

S 14	S 13
S 23	S 24

1975

from which

A juniper, 4 ins. diam., bears N. 72°30' E., 103 lks. dist., mkd. BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on gentle N slope in netwire fence line that bears N and S, and in scattering juniper timber.

The ¼ sec. cor. of secs. 12 and 13, monumented with a sandstone, 20 x 12 x 4 ins., firmly set 15 ins. in the ground and plainly mkd. ¼ on N face, witnessed by a mound of stone, 2 ft. base, 1½ ft. high, N of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 10 S R 6 E

¼	S 12
	S 13

1975

from which

A juniper, 6 ins. diam., bears N. 49°30' W., 8 lks. dist., mkd. BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on NW slope and in old barbwire fence cor. that bears N and W, in oak brush and scattering juniper timber.

The ¼ sec. cor. of secs. 11 and 14, monumented with a shale rock, 22 x 12 x 6 ins., firmly set in a mound of stone and plainly mkd. ¼ on N face.

from which the original bearing tree

A cedar, 24 ins. diam., bears N. 40° E., 4 lks. dist., mkd. ¼ S BT.

Remonumentation of corners in T. 10 S., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone to top of ~~stone~~ brass cap, mkd.

T 10 S R 6 E

$\frac{1}{2}$ $\frac{S\ 11}{S\ 14}$

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on top of spur that slopes S. 40° E., and in scattering juniper and pinon timber.

T. 1 S., R. 10 W., Uintah Meridian, Utah

Township 1 South, Range 10 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cors. were established by H. D. Page and B. S. Kershaw in 1904.

The cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with a quartzite stone, 14 x 12 x 8 ins. firmly set 8 ins. in the ground and plainly mkd. 4 notches on E and 2 notches on W edges, witnessed by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 1 S R 10 W

$\frac{S\ 32}{S\ 5}$ | $\frac{S\ 33}{S\ 4}$

T 2 S

1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on SW slope in small round hollow in grass, sagebrush and scattering oak brush.

The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp., monumented with a quartzite stone, 12 x 10 x 10 ins., firmly set 8 ins. in the ground and plainly mkd. $\frac{1}{2}$ on N face, witnessed by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of corner.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Remonumentation of corners in T. 1 S., R. 10 W.,
Utah Meridian, Utah

CHAINS

T 1 S R 10 W

¼ S 32
S 5
T 2 S
1975

from which

An aspen, 5 ins. diam., bears S. 78° E., 38 lks.
dist., mkd. T2S R10W ¼ S5 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on SE slope in opening between oak
and aspen timber.

The cor. of Townships 1 and 2 South, Ranges 10 and 11 West,
monumented with a sandstone, 14 x 10 x 7 ins., firmly
set 8 ins. in the ground and plainly mkd. 6 notches on
N, E, S and W edges.

from which the original bearing trees

An aspen, 12 ins. diam., bears N. 55° E., 20 lks.
dist., mkd. T1S R10W S31 BT.

An aspen, 8 ins. diam., bears S. 16° E., 23 lks.
dist., mkd. T2S R10W S6 BT.

An aspen, 12 ins. diam., bears S. 32° W., 30 lks.
dist., mkd. T2S R11W S1 BT.

An aspen, 8 ins. diam., bears N. 50° W., 39 lks.
dist., mkd. T1S R11W S36 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, in a collar of stone to top of brass cap,
mkd.

T 1 S
R 11 W R 10 W
|
S 36 | S 31
S 1 | S 6
|
T 2 S
1975

Deposit the mkd. stone alongside the iron post.

Cor. is located on NE slope in dense aspen timber and
chokecherry undergrowth.

The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of
the Tp., monumented with a sandstone, 18 x 18 x 8 ins.,
firmly set in a mound of stone and plainly mkd. 1 notch
on S and 5 notches on N edge.

from which the original bearing tree

An aspen, 14 ins. diam., bears S. 30° E., 23 lks.
dist., mkd. T1S R10W S31 BT.

Remonumentation of corners in T. 1 S., R. 10 W.,
 Uintah Meridian, Utah

CHAINS

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone to top of brass cap, mkd.

T 1 S	
R 11 W R 10 W	
S 25	S 30
S 36	S 31
1975	

from which

An aspen, 10 ins. diam., bears N. $19^{\circ}30'$ E., $64\frac{1}{2}$ lks. dist., mkd. T1S R10W S30 BT.

An aspen, 4 ins. diam., bears N. 62° W., 18 lks. dist., mkd. T1S R11W S25 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on E slope in scattering aspen timber.

The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 14 x 10 x 6 ins., firmly set 8 ins. in the ground and dimly mkd., witnessed by a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of corner. (Record, cobblestone)

from which the original bearing trees

An aspen, 12 ins. diam., bears N. 59° E., 41 lks. dist., mkd. T1S R10W S26 BT. (Record, N. 50° E.)

An aspen, 14 ins. diam., bears S. 48° E., 38 lks. dist., mkd. T1S R10W S35 BT.

An aspen, 16 ins. diam., bears S. 49° W., 61 lks. dist., mkd. T1S R10W S34 BT. (Record, S. 15° W.)

An aspen, 10 ins. diam., bears N. 17° W., 22 lks. dist., mkd. T1S R10W S27 BT. (Record, N. 8° W.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 1 S R 10 W	
S 27	S 26
S 34	S 35
1975	

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on N slope in dense aspen timber.

22

Remonumentation of corners in T. 1 S., R. 10 W.,
Uintah Meridian, Utah

CHAINS

The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, monumented with a quartzite stone, 12 x 10 x 8 ins., firmly set 8 ins. in the ground and dimly mkd. $\frac{1}{4}$ on N face.

from which the original bearing tree:

A fir, 10 ins. diam., bears N. 60° W., 8 lks. dist., mkd. $\frac{1}{4}$ S27 BT. (Record, N. 15° W.)

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 1 S R 10 W

$\frac{1}{4}$ $\frac{S 27}{S 34}$

1975

from which

A fir, 10 ins. diam., bears N. 53°30' E., 33 lks. dist., mkd. T1S R10W S27 BT.

A fir, 8 ins. diam., bears S. 15° W., 57 lks. dist., mkd. T1S R10W S34 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on SW slope in dense fir timber.

The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 16 x 8 x 6 ins., firmly set 8 ins. in the ground and plainly mkd. 3 notches on E and 2 notches on S edges, witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of corner.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 1 S R 10 W

$\frac{S 21}{S 28}$ | $\frac{S 22}{S 27}$

1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on SW slope, 150 lks. N of small creek, 2 lks. wide, 2 ins. deep draining irregularly SW and in an opening encircled by aspen timber.

Remonumentation of corners in T. 1 S., R. 10 W.,
 Uintah Meridian, Utah

CHAINS

The cor. of secs. 15, 16, 21 and 22, monumented with a quartzite stone, 12 x 9 x 6 ins., firmly set 8 ins. in the ground, in a mound of stone and plainly mkd. 3 notches on E and S edges and 1S on NE face, 10W on SW face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, to top of brass cap, mkd.

T 1 S R 10 W			
S 16		S 15	
S 21		S 22	
1975			

Deposit the mkd. stone alongside the iron post.

Cor. is located on top of plateau on gentle N slope in grass cover.

The ¼ sec. cor. of secs. 15 and 22, monumented with a sandstone, 16 x 8 x 5 ins., firmly set 8 ins. in the ground and plainly mkd. ¼ on N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone to top of brass cap, mkd.

T 1 S R 10 W			
¼		S 15	
		S 22	
1975			

Deposit the mkd. stone alongside the iron post.

Cor. is located on top of small knoll covered with grass.

The witness ¼ sec. cor. of secs. 32 and 33, reestablished at record bearing and distance from original bearing trees

A lodge pole pine, 10 ins. diam., bears
 N. 75°30' E., 62 lks. dist., mkd. WC ¼ S33 BT.

A pine stump, 18 ins. diam., bears S. 47° W., 25 lks. dist., with a downed pine alongside, with fragmentary scribe mks. on open blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock ledge and over a cross, with mound of stone, 4 ft. base, to top of brass cap, mkd.

Remonumentation of corners in T. 1 S., R. 10 W.,
Uintah Meridian, Utah

CHAINS

W C
T 1 S R 10 W
 $\frac{1}{4}$
 |
S 32 | S 33
 |
 1975

from which

A fir, 5 ins. diam., bears S. 69° W., 6 lks. dist.,
mkd. $W\frac{1}{4}$ S32 BT.

Cor. is located on steep N slope on ledge and in pinion
timber.

The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, monumented with a
limestone, 15 x 10 x 4 ins., firmly set 8 ins. in the
ground and plainly mkd. $\frac{1}{4}$ on N face.

from which the original bearing tree

An aspen, 14 ins. diam., bears N. 33°30' E., 12 lks.
dist., mkd. $\frac{1}{4}$ S21 BT. (Record, N. 73° E., 32 lks.
dist.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 1 S R 10 W

$\frac{1}{4}$ $\frac{S 21}{S 28}$

1975

from which

An aspen, 15 ins. diam., bears S. 18° E., 18 lks.
dist., mkd. $\frac{1}{4}$ S21 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on N slope in dense aspen timber.

The cor. of secs. 19, 20, 29 and 30, monumented with a
limestone, 20 x 14 x 4 ins., firmly set 10 ins. in the
ground and plainly mkd. 5 notches on E and 2 notches on
S edges.

from which the original bearing trees

An aspen, 6 ins. diam., bears S. 10° E., 9 lks. dist.,
mkd. T1S R10W S29 BT.

An aspen, 5 ins. diam., bears S. 44° W., 19 lks.
dist., mkd. T1S R10W S30 BT.

An aspen, 6 ins. diam., bears N. 50° W., 11 lks.
dist., mkd. T1S R10W S19 BT.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Remonumentation of corners in T. 1 S., R. 10 W.,
 Uintah Meridian, Utah

CHAINS

T 1 S R 10 W

S 19	S 20
S 30	S 29

1975

from which

A spruce, 30 ins. diam., bears N. 28° E., 28 lks.
 dist., mkd. T1S R10W S20 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the
 iron post.

Cor. is located on NW slope in dense spruce and aspen
 timber.

The $\frac{1}{2}$ sec. cor of secs. 30 and 31, monumented with a
 sandstone, 18 x 8 x 6 ins., firmly set 8 ins. in the
 ground and plainly mkd. $\frac{1}{2}$ on N face.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
 in the ground, with brass cap mkd.

T 1 S R 10 W

$\frac{1}{2}$	S 30	
	S 31	

1975

from which

An aspen, 4 ins. diam., bears N. 36° E., 93 lks.
 dist., mkd. $\frac{1}{2}$ S30 BT.

An aspen, 5 ins. diam., bears S. 40° E., 103 lks.
 dist., mkd. $\frac{1}{2}$ S31 BT.

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N of
 corner.

Cor. is located 255 lks. dist. S of E - W 4 strand barb-
 wire fence line and on gentle NW slope in opening in
 aspen timber.

T. 2 S., R. 10 W., Uintah Meridian, Utah

Township 2 South, Range 10 West, Uintah Meridian, is
 located partially within the Uinta National Forest. The
 following cor. was established by Stewart and Heist in
 1912.

The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the
 Tp., monumented with a sandstone, 14 x 12 x 6 ins.,
 firmly set 10 ins. in the ground and plainly mkd. 1 notch
 on N and 5 notches on S edges.

25
Remonumentation of corners in T. 2 S., R. 10 W.,
Uintah Meridian, Utah

CHAINS

from which the original bearing trees

An aspen, 6 ins. diam., bears N. 70° E., 18 lks.
dist., mkd. T2S R10W S6 BT.

An aspen, 10 ins. diam., bears S. 57° E., 11 lks.
dist., mkd. T2S R10W S7 BT.

An aspen, 10 ins. diam., bears N. 10° W., 11 lks.
dist., mkd. T2S R11W S1 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 2 S
R 11 W R 10 W
|
S 1 | S 6
S 12 | S 7
|
1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron
post.

Cor. is located on N slope in dense aspen timber.

T. 5 S., R. 10 W., Uintah Meridian, Utah

Township 5 South, Range 10 West, Uintah Meridian, is
located partially within the Uinta National Forest. The
following cors. were established by S. P. Stewart and
C. S. Jarvis in 1904.

The ¼ sec. cor. of secs. 16 and 17, monumented with a
sandstone, 18 x 8 x 4 ins., firmly set 12 ins. in the
ground and plainly mkd. ¼ on W face.

from which the original bearing trees

A white pine, 18 ins. diam., bears S. 20°30' E.,
157 lks. dist., mkd. ¼ S16 BT.

An aspen, 24 ins. diam., bears S. 20°40' W.,
62 lks. dist., mkd. with a blaze and faint scribe
mks.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 5 S R 10 W
¼
|
S 17 | S 16
|
1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the
iron post.

Remonumentation of corners in T. 5 S., R. 10 W.,
 Uintah Meridian, Utah

CHAINS

Cor. is located on gentle S slope in scattering aspen and white fir timber.

The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 24 x 12 x 6 ins., firmly set 14 ins. in the ground and plainly mkd. 4 notches on E and S edges.

from which the original bearing tree

An aspen, 20 ins. diam., bears N. 56°41' W., 57 lks. dist., mkd. with a grown over blaze.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 5 S R 10 W			
S 8		S 9	
S 17		S 16	
1975			

from which

An aspen, 10 ins. diam., bears S. 52° E., 53 lks. dist., mkd. T5S R10W S16 BT.

An aspen, 6 ins. diam., bears S. 22°30' W., 37 lks. dist., mkd. T5S R10W S17 BT.

An aspen, 12 ins. diam., bears N. 77°30' W., 50 lks. dist., mkd. T5S R10W S8 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on S slope in aspen timber.

The cor. of secs. 7, 8, 17 and 18, monumented with a squared aspen post that is badly deteriorated but still standing. Faint scribe mks. on a portion of the post.

from which the original bearing tree

A spruce, 26 ins. diam., bears S. 26° E., 406 lks. dist., mkd. T5S R10W S17 BT.

at the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 5 S R 10 W			
S 7		S 8	
S 18		S 17	
1975			

Deposit the mkd. aspen post alongside the iron post.

Remonumentation of corners in T. 5 S., R. 10 W.,
 Uintah Meridian, Utah

CHAINS

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on SW slope in sagebrush undergrowth.

The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a sand stone, 16 x 8 x 4 ins., firmly set 12 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face.

from which the original bearing trees

A balsam fir, 24 ins. diam., bears S. 46° E., 307 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

A balsam fir, 30 ins. diam., bears N. 2°30' W., 97 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 5 S R 10 W

$\frac{1}{4}$ $\frac{S 8}{S 17}$

1975

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the iron post.

Cor. is located on N slope in pine timber.

T. 2 S., R. 12 W., Uintah Meridian, Utah

Township 2 South, Range 12 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cor. on the W. bdy. of the Tp., was established by A. H. Brown and F. M. Brown in 1903. The cor. on the S. bdy. of the Tp., and the subdivisional cor. were established by J. M. Lantz in 1904.

The cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with a quartzite stone, 16 x 12 x 10 ins., firmly set in a mound of stone and plainly mkd. 5 notches on E and 1 notch on W edges.

from which the original bearing trees

An aspen, 12 ins. diam., bears N. 52° E., 44 lks. dist., mkd. T2S R12W S32 BT.

A fir, 16 ins. diam., bears S. 27° W., 114 lks. dist., mkd. T3S R12W S6 BT. (Record, aspen)

An aspen, 24 ins. diam., bears N. 20° W., 74 lks. dist., mkd. T2S R12W S31 BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone. to top of brass cap, mkd.

Remonumentation of corners in T. 2 S., R. 12 W.,
 Uintah Meridian, Utah

CHAINS

T 2 S R 12 W	
S 31 S 32	
S 6 S 5	
T 3 S	
1975	

from which

A fir, 16 ins. diam., bears S. 28° E., 58 lks. dist.,
 mkd. T3S R12W S5 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on NE slope on E side of a clearing in
 fir and aspen timber.

The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of
 the Tp., monumented with a sandstone, 16 x 10 x 7 ins.,
 firmly set 8 ins. in the ground and plainly mkd. 2 notches
 on S and 4 notches on N edges, witnessed by a mound of
 stone, 3 ft. base, W of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins.
 in the ground to bedrock, in a mound of stone, 3 ft. base,
 to top of brass cap, mkd.

T 2 S	
R 13 W R 12 W	
S 24 S 19	
S 25 S 30	
1975	

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, in original mound of stone,
 W of cor.

Cor. is located on gentle NW slope in center of a clearing
 in pine and aspen timber.

The cor. of secs. 20, 21, 28 and 29, monumented with a
 sandstone, 13 x 9 x 7 ins., firmly set 6 ins. in the
 ground and plainly mkd. 4 notches on E and 2 notches on
 S edges, witnessed by a mound of stone, 3 ft. base, 1½ ft.
 high, W of cor.

from which the original bearing trees

An aspen, 12 ins. diam., bears N. 37°30' E., 101
 lks. dist., mkd. T2S R12W S21 BT. (Record, 111 lks.
 dist.)

An aspen, 14 ins. diam., bears S. 32° E., 101 lks.
 dist., mkd. T2S R12W S28 BT. (Record, S. 36° E.,
 94 lks. dist.)

Remonumentation of corners in T. 2 S., R. 12 W.,
 Uintah Meridian, Utah

CHAINS

An aspen, 8 ins. diam., bears S. 32° W., 42 lks.
 dist., mkd. T2S R12W S29 BT. (Record, S. 35° W.,
 32 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
 in the ground, with brass cap mkd.

T	2	S	R	12	W
S	20		S	21	
S	29		S	28	
		1975			

from which

An aspen, 8 ins. diam., bears N. 46° W., 55 lks.
 dist., mkd. T2S R12W S20 BT.

Deposit the mkd. stone alongside the iron post.

Set an aluminum fence post, 5 ft. high, alongside the
 iron post.

Cor. is located on N slope in aspen timber.

CHAINS

Volume

#

R0596


CERTIFICATE OF SURVEY


~~(X)~~(We), Glen B. Hatch, Supervisory Cadastral Surveyor, HEREBY
Gail E. Reynolds, Cadastral Surveyor
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day
of February, 19 61, ~~(X)~~(We) have remonumented [redacted] corners in

- T. 10 S., R. 2 E., Salt Lake Meridian
- T. 5 S., R. 4 E., Salt Lake Meridian
- T. 7 S., R. 4 E., Salt Lake Meridian
- T. 8 S., R. 4 E., Salt Lake Meridian
- T. 9 S., R. 4 E., Salt Lake Meridian
- T. 8 S., R. 5 E., Salt Lake Meridian
- T. 9 S., R. 5 E., Salt Lake Meridian
- T. 10 S., R. 6 E., Salt Lake Meridian
- T. 1 S., R. 10 W., Uintah Meridian
- T. 2 S., R. 10 W., Uintah Meridian
- T. 5 S., R. 10 W., Uintah Meridian
- T. 2 S., R. 12 W., Uintah Meridian

of the Salt Lake and Uintah Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by (me), ~~(X)~~ and under (my)
~~(X)~~ direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

Under the supervision of Glen B. Hatch, Supervisory Cadastral Surveyor

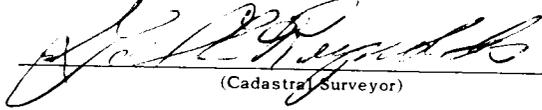April 18, 1977
(Date) 
(Cadastral Surveyor)

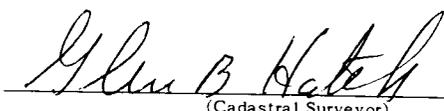
April 18, 1977
(Date) 
(Cadastral Surveyor)
Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

- The foregoing field notes of the remonumented corners in
- | | |
|---------------------------------------|---------------------------------------|
| T. 10 S., R. 2 E., Salt Lake Meridian | T. 9 S., R. 5 E., Salt Lake Meridian |
| T. 5 S., R. 4 E., Salt Lake Meridian | T. 10 S., R. 6 E., Salt Lake Meridian |
| T. 7 S., R. 4 E., Salt Lake Meridian | T. 1 S., R. 10 W., Uintah Meridian |
| T. 8 S., R. 4 E., Salt Lake Meridian | T. 2 S., R. 10 W., Uintah Meridian |
| T. 9 S., R. 4 E., Salt Lake Meridian | T. 5 S., R. 10 W., Uintah Meridian |
| T. 8 S., R. 5 E., Salt Lake Meridian | T. 2 S., R. 12 W., Uintah Meridian |

executed by Gail E. Reynolds, Cadastral Surveyor under the supervision of
Glen B. Hatch, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

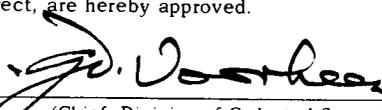FEB 27 1978
(Date) 
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes.~~

~~(Date) (Chief, Division of Cadastral Survey)~~

Volume

#

R0596

Volume

#

R0596