

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R600

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF
A PORTION OF THE SECOND STANDARD PARALLEL NORTH
(SOUTH BOUNDARY) AND
A PORTION OF THE GUIDE MERIDIAN EAST
(EAST BOUNDARY) AND
A PORTION OF THE SUBDIVISIONAL LINES OF
TOWNSHIP 9 NORTH, RANGE 6 EAST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Glen B. Hatch Supervisory Cadastral Surveyor

Under special instructions dated May 8, 19 70, approved May 11, 1970,

_____, which provided for the surveys included under U.S. Survey/Group
Number 519, and assignment instructions dated June 29, 19 70.

Survey commenced July 20, 19 70

Survey completed September 14, 19 78

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R600

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF
A PORTION OF THE SECOND STANDARD PARALLEL NORTH
(SOUTH BOUNDARY) AND
A PORTION OF THE GUIDE MERIDIAN EAST
(EAST BOUNDARY) AND
A PORTION OF THE SUBDIVISIONAL LINES OF
TOWNSHIP 9 NORTH, RANGE 6 EAST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Glen B. Hatch Supervisory Cadastral Surveyor

Under special instructions dated May 8, 19 70, approved May 11, 1970,

_____, which provided for the surveys included under U.S. Survey/Group
Number 519, and assignment instructions dated June 29, 19 70.

Survey commenced July 20, 19 70

Survey completed September 14, 19 78

INDEX DIAGRAM

Township 9 North, Range 6 East

6 61 60	5 48 59	4 40 48	3 29 39	2 17 28	1 8 16
7 58 57	8 47 57	9 38 46	10 27 37	11 15 26	12 7 14
13 56 55	14 45 54	15 36 44	16 25 35	17 13 24	18 5 13
19 52 50	20 43 49	21 34 42	22 22 33	23 11 21	24 4 11
25 30	41 29	28 32	27 20 31	26 9 19	25
31	32	33 30	34 18 2	35	36

Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS

The Guide Meridian East (East boundary) was surveyed by Julian Bausman in 1869. The second Standard Parallel North (South boundary), the West boundary, the North boundary and the subdivisional lines were surveyed by T. C. Bailey and John G. Burrill in 1875. The Second Standard Parallel North (South boundary) was resurveyed by Frank E. Baxter and William B. Dougall in 1896. The South boundary of section 31, the South 3 miles of the West boundary, and sections 19, 30 and 31 were retraced or resurveyed, and tracts 46 and 47 surveyed by John W. Dougall and Thomas C. Rathbone from 1914 to 1917. The West boundary was resurveyed by Howard W. Miller and William E. Hiester in 1920. The North boundary was resurveyed by Glen B. Hatch in 1964. The following field notes are those of the dependent resurvey of a portion of the Second Standard Parallel North (South boundary) and a portion of the Guide Meridian East (East boundary) and a portion of the subdivisional lines of Township 9 North, Range 6 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 8, 1970.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation, being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. The details of such traverses or triangulations have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from the field notes.

The geographic position for the southeast corner of section 34, is at latitude $41^{\circ} 27' 56.38''$ N. and longitude $111^{\circ} 14' 43.30''$ W., as computed from tie to U.S.C. & G.S. triangulation station "Woodruff," a standard bronze disc set in bedrock, at latitude $41^{\circ} 27' 46.182''$ N. and longitude $111^{\circ} 14' 29.079''$ W., located S. $46^{\circ} 23' E.$, 22.67 chs. dist., from the standard cor. of sec. 34 and 35, Township 9 North, Range 6 East.

The mean magnetic declination was read at several stations throughout the township and the average of these readings was found to be $16^{\circ} 30'$ East.

Dependent Resurvey of a Portion of the Second Standard
Parallel North (South Boundary), T. 9 N., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of the Second Standard
Parallel North (South Boundary), T. 9 N., R. 6 E.,
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
T. C. Bailey and John G. Burrill in 1875 and the
Resurvey Executed by Frank E. Baxter and
William B. Dougall in 1897

Beginning at the standard cor. of secs. 34 and 35, monu-
mented with a sandstone, 15x10x8 ins., firmly set and
plainly mkd. 2 notches on E. and 4 on W. edges, and
dimly mkd. SC on N. face, with a small mound of stone,
N. of cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

SC
T9N R6E

S34 | S35

1970

Bury stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high,
N. of cor.

From this cor., U.S.C. & G.S. triangulation station
"Woodruff," bears S. 46° 23' E., 22.67 chs. dist.

N. 88° 52' W., along the S. bdy. of sec. 34.

Over rolling mountain land through dense undergrowth.
Asc. 10 ft. over E. slope.

2.30 The closing cor. of secs. 2 and 3, T. 8 N., R. 6 E.,
bears North, .03 chs. dist., monumented with a sand-
stone, 8x8x5 ins., above ground plainly mkd. 2 notches
on E. and 4 on W. edges, and CC on S. face. Cor. is on
ridge, bears N. and S.; desc. 130 ft. over W. slope.

21.10 Wash, in draw, drains N. 15° W.; asc. 40 ft. over NE.
slope.

33.00 Point of spur, slopes N.; desc. 20 ft. over NW. slope.

38.65 Small draw, drains N. 20° E.; asc. 15 ft. over SE. slope.

39.93 The standard ¼ sec. cor. of sec. 34, monumented with a
broken sandstone, 20x8x4 ins., firmly set and dimly mkd.
¼ on N. face, and in a small mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Second Standard
Parallel North (South Boundary), T. 9 N., R. 6 E.,
Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">SC R9N R6E</p> <p style="text-align: center;">$\frac{1}{4}$ S34 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 88° 04' W., beginning new measurement.</p> <p>Asc. 55 ft. over general E. slope.</p>
15.00	Ridge, bears North and curves S.50° E.; desc. 270 ft. over W. slope.
35.45	Draw, drains N. 6° E.; asc. 70 ft. over E. slope.
39.00	Spur, slopes N.; desc. 10 ft. over W. slope.
39.70	The standard cor. of secs. 33 and 34, monumented with a sandstone, 20x13x6 ins., loosely set and plainly mkd. 3 notches on one edge, SC on one face, and partially broken on edge for other markings.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">SC T9N R6E</p> <p style="text-align: center;">S33 S34 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p> <p>Land, rolling mountains. Soil, rocky clay. No timber. Undergrowth, dense sagebrush, scattered buck brush and service berry.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of a Portion of the Guide Meridian East, (East Boundary) Township 9 North, Range 6 East, Salt Lake Meridian, Utah</p> <hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by Julian Bausman in 1869</p> <hr/>

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS

The cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., monumented with a sandstone, 24x10x8 ins., firmly set and plainly mkd. 4 notches on N. and 2 on S. edges, and witnessed by a small mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R6E R7E

S24|S19
S25|S30

1970

Bury stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0° 12' E., bet. secs. 19 and 24.

Over mountainous land through dense sagebrush undergrowth. Asc. 75 ft. over SE. slope.

- 3.25 Fence, bears nearly E. and W.
- 29.25 Ridge, bears N. 70° E. and S. 70° W.; desc. 50 ft. over gentle NW. slope.
- 30.45 Trail road, bears N. 40° E. and S. 40° W.
- 37.15 Fence, bears S. 54° 58' W. and N. 54° 58' E., 20 lks. thence nearly N.
- 40.25 The ¼ sec. cor. of secs. 19 and 24, monumented with a grey sandstone, 24x10x5 ins., firmly set, but no visible markings. This is the only sandstone in nearby area and I accept it as the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.

T9N
R6E R7E

¼
|
S24|S19

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Cor. is located 23 lks. W. of N. and S. fence line.

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS	
	N. 0° 11' E., beginning new measurement.
	Continue along W. side of fence. Desc. 110 ft. over NW. slope.
13.95	Wash, 15 lks. wide, 6 ft. deep, in draw, drains N. 40° E. asc. 20 ft. over SE. slope.
19.35	Spur, slopes N. 60° E.; desc. 110 ft. over NW. slope.
32.51	Fence, bears N. 62° 45' E. and S. 62° 45' W., continue along N. and S. fence line.
40.23	The cor. of secs. 13, 18, 19, and 24, at cor. of fences, bearing South, N. 0° 15' E., N. 88° E., and S. 73° 45' W., monumented with a broken sandstone, 20x9x6 ins., plainly mkd. 3 notches on one edge.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E R7E S13 S18 S24 S19
	1970
	Bury stone cor. alongside iron post.
	Land, mountainous. Soil, rocky clay. No timber. Undergrowth, dense sagebrush, scattered service berry.
	N. 0° 15' E., bet. secs. 13 and 18.
	Over gently rolling meadow land, and along fence line. Desc. 25 ft. over gentle N. slope.
7.55	Ditch, drains E.
15.75	Right bank of Woodruff Creek, 4 ft. high, with stream of water, 30 lks. wide, 2 ft. deep, flows irregularly S. 70° E., enter willows.
16.65	Left bank of Woodruff Creek, 5 ft. high, bears irregularly N. 70° W. and S. 70° E.
22.05	Slough, 1.00 chs. wide; asc. 50 ft. over gently rolling land. Leave willows.
30.25	Stream of water, 10 lks. wide, 6 ins. deep, flows E.
35.01	Fence, bears W., continue along fence line. Leave meadow.
38.52	SE. cor. of small cemetary, bears W. 25 lks. dist.
40.05	NE. cor. of cemetary, bears W. 21 lks. dist.
40.07	Point for the ¼ sec. cor. of secs. 13 and 18, at proportionate dist., latitudinally and in a fence line bearing S. 0° 15' W., and N. 0° 02' W., which, according to adjacent land owner is on the township boundary.

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R6E R7E
¼
|
S13|S18
1970

N. 0° 02' W., beginning new measurement.

Asc. 100 ft. over gentle SE. slope.

- 5.87 Right of way fence, bears N. 64° E. and S. 64° W.
- 6.75 Telephone line, bears N. 72° 15' E. and S. 72° 15' W., about 4.00 chs., thence about S. 50° W.
- 7.07 State Highway, No. 39, on curve, bears N. 64° E. and S. 64° W., curving S. 50° W.
- 7.73 Right of way fence, parallel to highway.
- 9.25 Irrigation ditch, 10 lks. wide, 3 ft. deep, drains N. 47° E.
- 12.35 Top of ascent, slopes E.; desc. 15 ft. over gentle NE. slope.
- 14.65 Trail road, on curve, bears N. 52° W. and S. 35° E.
- 20.00 Bottom of descent, slopes E.; asc. 35 ft. over SE. slope.
- 20.17 Fence, bears N. 64° 51' W. and S. 15° 45' E.
- 21.05 Trail road, on curve bears N. 2° W. and S. 7° W.
- 29.90 Spur, slopes E.; desc. 15 ft. over gentle NE. slope.
- 35.75 Wash, 15 lks. wide, 2 ft. deep, drains E.; asc. 10 ft. over gentle S. slope.
- 40.07 The cor. of secs. 7, 12, 13, and 18, monumented with a sandstone, 18x12x4 ins., loosely set and plainly mkd. 4 notches on S. and 2 on N. edges, and witnessed by a scattered mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R6E R7E

S12|S7
S13|S18
1970

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS	
	<p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Land, meadow S. portion; rolling N. portion. Soil, loam, S. portion; gravel clay N. portion. No timber. Undergrowth, sagebrush with willows along Woodruff Creek</p>
	<p>N. 0° 04' E., bet. secs. 7 and 12.</p> <p>Over gently rolling land through sagebrush undergrowth. Desc. 10 ft. over gentle NE. slope.</p>
3.65	Wash, 15 lks. wide, 4 ft. deep, drains N. 47° E., 25 lks. thence, S. 58° E.; asc. 110 ft. over gently rolling SW. slope.
14.50	Wash, 10 lks. wide, 3 ft. deep, drains S. 46° W.
25.30	Wash, 10 lks. wide, 3 ft. deep, drains S. 70° W.
38.00	Top of ascent, slopes W.; desc. 5 ft. over NW. slope.
40.26	<p>The ¼ sec. cor. of secs. 7 and 12, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. ¼ on W. face, and witnessed by a small mound of stone to W.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E R7E ¼ S12 S7 1970</p>
	<p>Bury stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor</p>
	<p>N. 0° 03' E., beginning new measurement.</p> <p>Desc. 30 ft. over gently rolling N. slope.</p>
7.90	Draw, drains E.; asc. 35 ft. over S. slope.
17.00	Point of spur, slopes W.; desc. 70 ft. over NW. slope.
35.00	Bottom of wide hollow, drains E.; asc. 10 ft. over gentle SW. slope.
37.97	Trail road, bears N. 80° E. and N. 71° W., about 4.00 chs. to junction with trail road from S.
40.29	The cor. of secs. 1, 6, 7, and 12, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges, and witnessed by a mound of stone, 2 ft. base to W.

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E R7E S1 S6 S12 S7 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor</p> <p>Land, rolling. Soil, gravel clay. No timber. Undergrowth, sagebrush.</p>
	<p>N. 0° 02' W., bet. secs. 1 and 6.</p> <p>Over rolling land through sagebrush undergrowth. Asc. 100 ft. over S. slope.</p>
18.80	Trail road, on ridge, bears N. 64° E. and S. 64° W.; desc. 70 ft. over NW. slope.
31.20	Draw, drains N. 60° W.; asc. 50 ft. over SW. slope.
36.00	Point of spur, slopes W.; desc. 35 ft. over NW. slope.
40.30	Point for the ¼ sec. cor. of secs. 1 and 6 at proportionate dist.; there is no remaining evidence of the orig. cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins., in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E R7E ¼ S1 S6 1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Desc. 75 ft. over rolling NW. slope.</p>
48.70	Draw, drains N. 42° E.; asc. 25 ft. along E. slope.
55.95	Top of ascent, slopes E.; desc. 55 ft. over gently rolling NE. slope.
62.43	Fence, bears N. 75° W. and S. 75° E.
65.30	Wash, 30 lks. wide, 10 ft. deep, in Sage Hollow, drains S. 75° E.
66.80	Improved dirt road, bears West and S. 80° E.; asc. 55 ft. over SW. slope.

Dependent Resurvey of a Portion of the
Guide Meridian East, (East Boundary)
Township 9 North, Range 6 East, Salt Lake Meridian, Utah

CHAINS	
79.00	Top of ascent, bears N. 40° W. and S. 40° E.
80.60	The cor. of Tps. 9 and 10 N., Rs. 6 and 7 E., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T10N R6E R7E <u>S36 S31</u> <u>S1 S6</u> T9N 1964</p>
	This cor. is also used by the U.S.G.S. as a triangulation station at Lat. 41° 33' 10.214" N., Long. 111° 12' 26.258" W.
	<p>Land, rolling. Soil, rocky clay. No timber. Undergrowth, sagebrush and rabbitbrush.</p>
	Dependent Resurvey of a Portion of the Subdivision, T. 9 N., R. 6 E.
	Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875.
	<p style="text-align: center;">_____</p> <p>The cor. of secs. 25, 26, 35, and 36, monumented with a broken sandstone, 15x8x4 ins., loosely set and plainly mkd. 1 notch on each of 2 edges, and witnessed by a small mound of stone to W.</p>
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T9N R6E <u>S26 S25</u> <u>S35 S36</u> 1970</p>
	Bury stone cor. alongside iron post.
	Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	N. 1° 25' W., bet. secs. 25 and 26.
	Over mountainous land through widely scattered timber and dense undergrowth. Asc. 15 ft. over gentle SE. slope.
5.80	Ridge, bears N. 50° E. and S. 50° W., curving S.; desc. 110 ft. over N. slope.
12.00	Leave widely scattered timber.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
15.65	Draw, drains N. 75° E.; asc. 80 ft. over SE. slope.
26.90	Trail road, on ridge, bears N. 60° E. and S. 60° W.; desc. 55 ft. over NW. slope.
36.80	Small draw, drains N. 45° R., desc. 5 ft. along E. slope.
37.80	Fence, bears N. 44° 45' E. and S. 44° 45' W.
39.47	Point for the ¼ sec. cor. of secs. 25 and 26 at pro- portionate dist.; there is no remaining evidence of the orig. cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E
	½ S26 S25
	1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Desc. 20 ft. over gentle NE. slope.
41.27	Six cable power line, bears N. 66° 32' E. and S. 66° 32' W.
43.02	Six cable power line, bears N. 66° 32' E. and S. 66° 32' W., with trail road alongside.
46.95	Small draw, drains E.; asc. 15 ft. over S. slope.
49.35	Small spur, slopes E.; desc. 15 ft. over N. slope.
51.75	Small draw, drains E.; asc. 10 ft. over SE. slope.
54.00	Small spur, slopes E.; desc. 40 ft. over NE. slope.
68.95	Small draw, drains N. 80° E.; asc. 20 ft. over SE. slope.
72.75	Trail road, on spur, bears E. and W.; desc. 30 ft. over N. slope.
78.94	The cor. of secs. 23, 24, 25, and 26, monumented with a sandstone, 20x8x6 ins., (record--14x9x8 ins.) firmly set, and plainly mkd. 1 notch on E. and 2 on S. edges, and witnessed by a mound of stone to W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E
	S23 S24 S26 S25
	1970
	Bury stone cor. alongside iron post.
	Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, mountainous. Soil, rocky clay. Timber, widely scattered juniper S. 12.00 chs., no timber No. portion. Undergrowth, dense, sagebrush and scattered service berry and buck brush.</p>
	<p>From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp.</p> <p>S. 87° 39' W., bet. secs. 24 and 25.</p> <p>Over mountainous land through dense undergrowth. Asc. 155 ft. over SE. slope.</p>
38.60	Fence, bears N. 45° 02' E. and S. 45° 02' W.
40.45	Ridge, bears N. 45° E. and S. 45° W.
41.10	Point for the ¼ sec. cor. of secs. 24 and 25, at pro- portionate dist.; there is no remaining evidence of the orig. cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E
	¼ $\frac{S24}{S25}$
	1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	Desc. 50 ft. over W. slope.
47.10	Head of draw, drains N. 15° W.; asc. 45 ft. over NE. slope.
57.35	Ridge, bears N. 15° W. and S. 15° E.; desc. 90 ft. over SW. slope.
65.00	Draw, drains N. 25° W.; asc. 45 ft. over NE. slope.
69.75	Trail road, bears N. 7° W. and curves S. 25° W.
77.00	Small spur, slopes N. 75° E.; asc. 10 ft. over gentle NE. slope.
78.78	Cor. of fence, bears N. 3.44 chs. dist., fence bears nearly N. and S. 89° W.
82.20	The cor. of secs. 23, 24, 25, and 26.
	<p>Land, mountainous. Soil, rocky clay. No timber. Undergrowth, sagebrush, scattered buck brush and service berry.</p>
	N. 1° 46' E., bet. secs. 23 and 24.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	Over rolling mountain land through dense sagebrush, desc. 50 ft. over N. slope.
3.60	Broken fence, bears about W. and N. 88° E.
4.50	Draw, bears N. 60° E.; asc. 40 ft. over SE. slope.
11.20	Ridge, bears N. 60° E. and S. 60° W.; desc. 240 ft. over NW. slope.
23.35	Fence, bears N. 85° W. and S. 85° E.
27.35	Trail road, bears N. 68° E. and S. 68° W.
29.50	Base of hill, bears N. 70° E. and S. 70° W.; enter meadow land; desc. 10 ft. over gentle NW. slope.
40.42	Point for the ¼ sec. cor. of secs. 23 and 24 at proportionate dist.; falls in meadow on private land and is not monumented; there is no remaining evidence of the orig. cor. Continue over meadow land.
47.80	Irrigation ditch, 10 lks. wide, drains E.
52.65	Irrigation ditch, 10 lks. wide, drains N. 40° E.
62.90	Woodruff Creek, 50 lks. wide, 3 ft. deep, flows irregularly N. 57° E.; asc. 35 ft. over gentle SE. slope.
67.00	Trail road, bears N. 48° W. and S. 48° E.
67.50	Fence, bears N. 77° E. and S. 77° W.
74.65	Enter cultivated land.
79.93	Point selected for the witness cor. of secs. 13, 14, 23, and 24, on ditch bank, curves SE. and NW. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> <p>T9N R6E W C $\begin{array}{c} \uparrow \\ \hline \text{S14} \text{S13} \\ \hline \text{S23} \text{S24} \end{array}$ 1970</p> </div>
80.00	Ditch, drains SE.
80.84	Point for the cor. of secs. 13, 14, 23, and 24 at proportionate dist., falls on private cultivated land and is not monumented; there is no remaining evidence of the orig. cor. Land, rolling mountains S. portion; meadow and farm land N. portion. Soil, clay. No timber. Undergrowth, sagebrush with willows along Woodruff Creek.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the Tp.
	S. 87° 49' W., bet. secs. 13 and 24.
	Over private meadow land, by triangulation. Topography scaled from U.S.G.S. sheets.
22.50	Ditch(creek)flows irregularly N. 15° E.
34.00	Small creek, flows N. 20° E.
40.02	Point for the ¼ sec. cor. of secs. 13 and 24 at proportionate dist., falls in private meadow land and is not monumented. There is no remaining evidence of the orig. cor.
	Continue over meadow land.
42.50	Woodruff Crrek, flows N. 40° E. from N. 50° W.
50.00	Woodruff Creek, flows N. 10° E.
75.00	Base of hill, bears N. 50° E. and S. 50° W.; leave meadow, enter cultivated land.
78.00	Irrigation ditch, 5 lks. wide, on curve, drains N. from W.
80.04	True point for the cor. of secs. 13, 14, 23, and 24.
	Land, meadow and cultivated. Soil, clay. No timber. Undergrowth, dense willows along banks of creek.
	N. 0° 05' E., bet. secs. 13 and 14.
	Over cultivated land.
4.35	Right of way fence, bears N. 72° 24' E. and S. 72° 24' W. leave cultivated land.
4.97	State Highway No. 39, bears N. 72° 24' E. and S. 72° 24' W.
5.66	Right of way fence, parallel to highway, enter sagebrush; asc. 180 ft. over SE. slope.
23.70	Point of spur, slopes N. 45° E., desc. 100 ft. over NE. slope.
31.05	Dry Basin Wash, 30 lks. wide, 5 ft. deep, drains S. 54° E.; asc. 95 ft. over SW. slope.
39.00	Point of spur, slopes W.; desc. 15 ft. over NW. slope.
40.40	Point for the ¼ sec. cor. of secs. 13 and 14 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	T9N R6E $\frac{1}{4}$ S14 S13 1970	
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.	
	Desc. 15 ft. over NW. slope.	
40.90	Draw, drains W.; asc. 15 ft. over SW. slope.	
42.60	Spur, slopes W.; desc. 40 ft. over NW. slope.	
43.80	Draw, drains W.; asc. 15 ft. over SW. slope.	
45.00	Spur, slopes W.; desc. 40 ft. over NW slope.	
51.20	Dry Basin Wash, 30 lks. wide, 6 ft. deep, drains S. 36° W.; asc. 65 ft. over SE. slope.	
70.40	Top of ascent, slopes E.; desc. 15 ft. over NE. slope.	
72.80	Draw, drains E.; asc. 40 ft. over SW. slope.	
77.60	Spur, slopes E.; desc. 30 ft. over NE. slope.	
80.80	The cor. of secs. 11, 12, 13, and 14, monumented with a sandstone, 16x8x4 ins., firmly set in a mound of stone, and plainly mkd. 4 notches on S. and 1 on E. edges.	
	At the cor. point	
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E S11 S12 S14 S13 1970	
	Bury stone cor. alongside iron post.	
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.	
	Land, mountainous. Soil, rocky clay. No timber. Undergrowth, sagebrush and rabbitbrush.	
	From the cor. of secs. 7, 12, 13, and 18, on the E. bdy. of the Tp.	
	S. $89^{\circ} 39'$ W., bet. secs. 12 and 13.	
	Over rolling mountain land through sagebrush undergrowth. Asc. 90 ft. over SE. slope.	
1.80	Trail road, bears N. 4° E. and South.	
25.00	Head of draw, drains S. 65° E.; asc. 50 ft. over E. slope.	
40.02	The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, in cor. of fences bearing N. $63^{\circ} 20'$ W., S. $63^{\circ} 20'$ E., and S. $1^{\circ} 20'$ E.,	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>monumented with a sandstone, 16x12x9 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E $\frac{1}{4}$ S12 S13 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. $86^{\circ} 50'$ W., beginning new measurement.</p> <p>Asc. 70 ft. over SE. slope.</p> <p>3.05 Trail road, bears N. 50° W. and S. 50° E.</p> <p>12.40 Ridge, bears N. 30° E. and S. 60° W.; desc. 30 ft. over NW. slope.</p> <p>22.05 Draw, drains S. 60° W.; asc. 45 ft. over SE. slope.</p> <p>33.50 Point of spur, slopes S. 60° W.; desc. 40 ft. over W. slope.</p> <p>35.35 Dry Basin Wash, 20 lks. wide, 6 ft. deep, drains S. 10° E.; asc. 30 ft. over NE. slope.</p> <p>40.04 The cor. of secs. 11, 12, 13, and 14.</p> <p>Land, rolling mountain. Soil, rocky clay. No timber. Undergrowth, sagebrush.</p> <hr/> <p>N. $0^{\circ} 01'$ E., bet. secs. 11 and 12.</p> <p>Over rolling mountain land through sagebrush undergrowth. Desc. 15 ft. over NE. slope.</p> <p>1.30 Small draw, drains E.; asc. 50 ft. over S. slope.</p> <p>9.00 Spur, slopes E.; desc. 20 ft. over N. slope.</p> <p>15.90 Dry Basin Wash, 10 lks. wide, 2 ft. deep, drains S. 74° E.; asc. 130 ft. over SE. slope.</p> <p>16.60 Trail road, bears N. 85° W. and S. 85° E.</p> <p>27.50 Fence, bears N. 62° W. and S. 62° E.</p> <p>39.62 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12 at proportionate distance; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E ¼</p> <p style="text-align: center;">S11 S12</p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Asc. 100 ft. over SE. slope. Enter timber.</p>
46.10	Ridge, bears E. from N.; thence along gentle E. slope of ridge.
70.45	Ridge, bears N. 35° E.; desc. 130 ft. over NW. slope.
77.00	Leave timber, bears E. and W.
79.24	Point for the cor. of secs. 1, 2, 11, and 12 at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">S2 S1 S11 S12</p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Land, rolling mountain. Soil, rocky clay. Timber, scattered juniper N. ½; no timber S. ½. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp.</p> <p>S. 87° 19' W., bet. secs. 1 and 12.</p> <p>Over gently rolling mountain land through sagebrush undergrowth. Desc. 10 ft. over gentle SW. slope.</p>
7.50	Trail road, bears N. 75° W. and S. 75° E.
10.50	Wash, drains S. 75° E. from W., asc. 75 ft. over gentle NE. slope.
40.03	Point for the ¼ sec. cor. of secs. 1 and 12 at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	T9N R6E $\frac{1}{4}$ $\frac{S1}{S12}$ 1970	
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.	
	Asc. 45 ft. over NE. slope.	
54.00	Draw, drains N. 85° E. from S. 45° W.; asc. 105 ft. over SE. slope. Enter scattered timber.	
63.85	Ridge, bears N. 30° W. and S., curving S. 45° W.; desc. 75 ft. over SW. slope. Leave scattered timber.	
75.00	Flat draw, drains N. 60° W.; thence along N. slope.	
80.06	The cor. of secs. 1, 2, 11, and 12. Land, rolling mountain. Soil, clay. Timber, widely scattered juniper W. portion. Undergrowth, sagebrush.	
	N. 1° 22' W., bet. secs. 1 and 2. Over gently rolling land through sagebrush undergrowth. Desc. 35 ft. over NE. slope.	
4.80	Draw, drains N. 70° W.; asc. 15 ft. over SW. slope.	
11.70	Top of ascent, slopes W.; desc. 65 ft. over NW. slope.	
23.95	Trail road, bears S. 23° W. and N. 23° E., curving N. 46° E.	
25.00	Draw, drains N. 46° E., desc. 30 ft. along E. slope.	
39.63	Point for the ¼ sec. cor. of secs. 1 and 2 at pro- portionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E $\frac{1}{4}$ S2 S1 1970	
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.	
	Desc. 30 ft. over NE. slope.	
54.95	Draw, drains N. 70° E.; asc. 40 ft. over SE. slope.	
62.80	Spur, slopes N. 70° E.; desc. 55 ft. over N. slope.	
72.93	Fence, bears S. 58° 55' W. and N. 58° 55' E., about 2.00 chs., thence about S. 85° E.	
74.80	Sage Hollow, 30 lks. wide, 6 ft. deep, drains E.; asc. 50 ft. over S. slope.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
78.90	Improved dirt road, bears S. 79° E. and N. 89° W.	
84.22	The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., protruding 6 ins., above ground, and in a fence line, bearing N. 32° 35' W. and S. 32° 35' E., with brass cap mkd.	
	T10N R6E	
	$\frac{S35 S36}{S2 S1}$	
	T9N 1964	
	Land, rolling mountain. Soil, clay. No timber. Undergrowth, sagebrush.	
	From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp.	
	N. 0° 29' W., bet. secs. 34 and 35.	
	Over mountainous land through sagebrush undergrowth.	
	Asc. 15 ft. over gentle SE. slope of ridge.	
11.50	Top of descent, slopes N.; desc. 225 ft. over N. slope.	
39.14	Point for the ¼ sec. cor. of secs. 34 and 35 at proportionate distance; there is no remaining evidence of the original cor.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E	
	$\frac{1}{4}$	
	S34 S35	
	1970	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.	
	Desc. 10 ft. over N. slope.	
39.50	Draw, drains W.; asc. 140 ft. over S. slope.	
53.70	Ridge, bears E. and W.; desc. 150 ft. over NW. slope.	
68.05	Draw, drains W.; asc. 80 ft. over S. slope.	
75.65	Ridge, bears E. and W.; desc. 20 ft. over N. slope.	
78.28	The original cor. of secs. 26, 27, 34, and 35, monumented with a sandstone, 18x12x3 ins., loosely set and plainly mkd. 2 notches on one edge, and 1 notch on adjacent edge, and witnessed by a small scattered mound of stone.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T9N R6E

S27|S26
S34|S35

1970

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high,
W. of cor.

Land, mountainous.

Soil, rocky clay.

No timber.

Undergrowth, sagebrush, small buck brush and service
berry.

From the cor. of secs. 25, 26, 35, and 36.

S. 89° 27' W., bet. secs. 26 and 35.

Over mountainous land through widely scattered timber
and dense undergrowth. Asc. 5 ft. over E. slope.

0.90 Ridge, bears N. and S.; desc. 40 ft. over W. slope.

6.80 Draw, drains N.; asc. 150 ft. over SE. slope.

25.50 Spur, slopes N. 40° E., from W.; asc. 15 ft. over gentle
NE. slope; leave timber.

39.62 The ¼ sec. cor. of secs. 26 and 35, at cor. of fence,
bears S. and N. 44° 55' E., monumented with a sandstone,
12x10x4 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T9N R6E

¼ S26
S35

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
N. of cor.

S. 88° 12' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	Desc. 10 ft. along N. slope.
8.75	Head of draw, drains N. 50° E.; asc. 75 ft. over SE. slope.
14.80	Improved dirt road, bears N. 20° 15' E. and S. 20° 15' W.
16.00	Ridge, bears N. and S.; desc. 40 ft. over W. slope.
25.00	Head of draw, drains N. 30° W.; desc. 30 ft. along N. slope.
35.70	Trail road, bears N. and S. curving S. 65° E.
39.90	The cor. of secs. 26, 27, 34, and 35.
	Land, mountainous. Soil, rocky clay. Timber, widely scattered juniper E. portion; no timber W. portion. Undergrowth, sagebrush, small buck brush and service berry.
	N. 0° 09' W., bet. secs. 26 and 27.
	Over rolling mountain land through dense undergrowth. Desc. 30 ft. over N. slope.
4.00	Head of draw, drains W.; asc. 60 ft. over SW. slope.
8.45	Six cable power line, bears N. 66° 32' E. and S. 66° 32' W.
10.60	Six cable power line, bears N. 66° 32' E. and S. 66° 32' W.
11.20	Trail road, on ridge, bears N. 15° W. and S. 15° E.; thence along ridge, top
18.40	Ridge, bears N. 35° W.; desc. 70 ft. over NE. slope.
26.90	Head of draw, drains N. 80° E.; asc. 25 ft. over S. slope.
30.70	Spur, slopes E.; desc. 20 ft. over NE. slope.
36.90	Head of draw, drains E.; asc. 30 ft. over SE. slope.
39.89	The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone, 13x12x3 ins., (record--20x15x8 ins.) loosely set and plainly mkd. ¼ on one face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E ¼ S27 S26
	1970
	Bury stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p style="text-align: center;">_____</p> <p>N. 0° 45' W., beginning new measurement.</p> <p>Asc. 10 ft. over gentle SE. slope.</p>
3.10	Top of ascent, bears E. and W.; desc. 35 ft. over NE. slope.
9.10	Draw, drains E.; asc. 30 ft. over SE. slope.
16.10	Point of ridge, bears N. 60° E. and curves S.; desc. 100 ft. over NW. slope.
23.50	Fence, bears N. 69° 15' E. and S. 69° 15' W.
24.80	Top of abrupt descent, bears nearly E. and W.; desc. 350 ft. over steep N. slope.
29.00	Beginning of broken fence line, bears nearly N., thence along fence line.
34.80	Irrigation ditch, 10 lks. wide, 3 ft. deep, drains E., enter meadow land, with dense willows along fence line and ditch.
39.87	Point for the cor. of secs. 22, 23, 26, and 27, at proportionate distance, latitudinally, and controlled longitudinally by fence line bearing S. 0° 45' E. and N. 0° 10' E. There is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in fence line, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">S22 S23 S27 S26</p> <p style="text-align: center;">1970</p> <p>Land, mountainous S. portion; meadow N. portion. Soil, clay loam. No timber. Undergrowth, sagebrush S. portion; meadow N. portion.</p>
	<p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>S. 89° 23' W., bet. secs. 23 and 26.</p> <p>Over rolling mountain land through sagebrush undergrowth. Asc. 15 ft. along N. slope.</p>
9.10	Head of draw, drains N. 60° E.; asc. 40 ft. over NE. slope.
10.90	Trail road, bears N and S.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
11.72	Broken fence line, on ridge, bears N. 44° 45' E. and S. 44° 45' W.; desc. 45 ft. over NW. slope.	
20.50	Draw, drains N. 20° E.; asc. 100 ft. over NE. slope.	
29.90	Point of spur, slopes N.; desc. 135 ft. over SW. slope.	
33.06	Old fence line, bears N and S.	
39.06	Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26 at proportionate distance; there is no remaining evidence of the original cor.	
	Set an iron post, 30 ins. long, 2½ ins diam., 12 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.	
	T9N R6E	
	$\frac{1}{4} \frac{S23}{S26}$	
	1970	
	Desc. 60 ft. over SW. slope.	
39.87	Old broken fence line, bears N. 2° W. and S. 2° E.	
40.60	Draw, drains N. 30° W., from S. 75° E.; asc. 40 ft. over NE. slope.	
45.10	Top of ascent, slopes N.; thence along N. slope.	
47.90	Spur, slopes N. 60° W.; desc. 130 ft. over NW. slope.	
54.50	Draw, drains N.; asc. 30 ft. over NE. slope.	
56.60	Point of spur, slopes N.; desc. 80 ft. over NW. slope.	
60.60	Irrigation ditch, 10 lks. wide, 3 ft. deep, drains N. 50° E., from S. 67° W.; enter meadow land.	
62.27	Fence, bears N. and S.	
78.12	The cor. of secs. 22, 23, 26, and 27. Land, rolling mountain E. portion; meadow land W. portion. Soil, clay loam. Undergrowth, sagebrush with willows along ditches and fence lines W. portion.	
	N. 0° 10' E., bet. secs. 22 and 23.	
	By triangulation, along fence line through dense willows and meadow land.	
25.00	Woodruff Creek, flows irregularly N. 50° E.	
31.00	Fence, bears E. and W. leave meadow and fence line, enter cultivated land. Farm buildings bear East about 11.50 chs. dist.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
39.87	Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23 at proportionate distance, falls on private cultivated land and is not monumented; there is no remaining evidence of the original cor.
	Continue over cultivated land.
44.66	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 22 and 23, on right of way fence, bears N. $64^{\circ} 20'$ E. and S. $64^{\circ} 20'$ W.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E $\frac{1}{4}$ S22 S23 V WC 1970
	Leave cultivated land.
45.33	State Highway No. 39, bears N. $64^{\circ} 20'$ E. and S. $64^{\circ} 20'$ W.
46.00	Right of way fence, parallel to highway; enter cultivated land.
51.70	Irrigation ditch, drains S. 78° E.; leave cultivated land, asc. 150 ft. over S. slope.
58.65	Spur, slopes W.; desc. 75 ft. over NW. slope. Enter scattered timber.
61.15	Draw, drains W.; asc. 25 ft. over S. slope.
62.59	Fence, bears E. and W.
67.75	Draw, drains W.; asc. 25 ft. over S. slope.
69.75	Spur, slopes W.; desc. 35 ft. over N. slope.
73.15	Draw, drains W.; asc. 80 ft. over S. slope.
77.75	Spur, slopes W.; desc. 25 ft. over N. slope.
79.74	The cor. of secs. 14, 15, 22, and 23, monumented with a broken sandstone, 10x10x4 ins., firmly set and plainly mkd. 2 notches on E. and 3 on S. edges, and witnessed by a small mound of stone to W.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E S15 S14 S22 S23 1970

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	<p>From which</p> <p>A juniper, 4 ins. diam., bears N. 42° 30' E., 17½ lks. dist., mkd. BT.</p> <p>A juniper, 10 ins. diam., bears N. 10° W., 51 lks. dist., mkd. T9N R6E S15 BT.</p> <p>Bury original stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Land, meadow S. portion; rolling mountain N. portion. Soil, clay loam. No timber S. portion; scattered pinon and juniper N. portion. Undergrowth, sagebrush and meadow grass.</p>	
	<p>From the true point for the cor. of secs. 13, 14, 23, and 24.</p> <p>S. 88° 35' W., bet. secs. 14 and 23.</p> <p>Over cultivated land.</p> <p>5.20 Irrigation ditch, 10 lks. wide, 2 ft. deep, on curve, drains S. 45° E. from S. 77° W.</p> <p>8.25 Farm road, bears N. 10° W. and S. 10° E.</p> <p>15.90 Right of way fence, on curve, bears N. 72° 45' E. and S. 50 W. Leave cultivated land.</p> <p>25.66 State Highway No. 39, on curve, bears N. 84° E. and S. 44° 30' W.</p> <p>28.73 Right of way fence, on curve, bears N. 77° 50' E. and S. 41° W.; asc. 120 ft. over SE slope.</p> <p>37.68 Fence, bears N. 53° 30' W. and S. 53° 30' E.</p> <p>40.20 Point for the ¼ sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original cor. Point falls on ridge, bears NW. and SE.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">¼ $\frac{S14}{S 23}$</p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Desc. 20 ft. over SW. slope. Enter widely scattered timber.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
47.00	Draw, drains S. 40° E.; asc. 245 ft. over SE. slope.
62.10	Ridge, bears N. and S.; desc. 70 ft. over W. slope.
71.00	Spur, slopes S. 85° W.; desc. 120 ft. along N. slope.
80.40	The cor. of secs. 14, 15, 22, and 23.
	<p>Land, nearly level cultivated E. portion; mountainous W. portion. Soil, gravelly loam. Timber, scattered pinon and juniper W. ½; no timber E. ½. Undergrowth, sagebrush.</p>
	N. 0° 35' E., bet. secs. 14 and 15.
	Over mountainous land through scattered timber. Desc. 15 ft. over N. slope.
1.30	Small draw, drains W.; asc. 30 ft. over S. slope.
4.30	Point of spur, slopes W.; desc. 35 ft. over NW. slope.
11.65	Wash, 15 lks. wide, 4 ft. deep, drains W.
13.55	Wash, 20 lks. wide, 6 ft. deep, drains S. 33° W.; asc. 30 ft. along bottom of draw.
23.40	Same wash, drains S. 75° E. about 2.00 chs., thence S., from N. 60° W.; asc. 100 ft. over SW. slope.
29.80	Point of spur, slopes SW.; desc. 50 ft. over NW. slope.
39.78	<p>The ¼ sec. cor. of secs. 14 and 15, monumented with a sandstone, 20x18x7 ins., firmly set and plainly mkd. ¼ on W. face.</p>
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T9N R6E ¼ S15 S14</p>
	1970
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

	N. 0° 06' E., beginning new measurement.
0.75	Wash, 10 lks. wide, 3 ft. deep, in draw, drains S. 50° W. asc. 70 ft. over SW. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
15.50	Spur, slopes S. 10° E.; asc. 60 ft. over gentle SE. slope of spur.
40.53	<p>The cor. of secs. 10, 11, 14, and 15, monumented with a sandstone, 20x18x8 ins., loosely set in a small scattered mound of stone, and plainly mkd. 2 notches on the E, and 4 on S. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;"><u>S10 S11</u> <u>S15 S14</u></p> <p style="text-align: center;">1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	From the cor. of secs. 11, 12, 13, and 14.
	S. 88° 17' W., bet. secs. 11 and 14.
	Over rolling mountain land through sagebrush undergrowth. Asc 140 ft. over NE. slope.
25.35	Ridge, bears N. 60° E. and S. 60° W.; desc. 50 ft. over NW. slope.
35.95	Draw, drains N. 20° E.; asc. 35 ft. over NE. slope.
37.80	Trail road, bears N. 18° E. and S. 22° W.
39.97	<p>Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;"><u>¼ S 11</u> <u>S14</u></p> <p style="text-align: center;">1970</p>
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
	Asc. 45 ft. over NE. slope.
50.70	Point of spur, slopes N.; desc. 15 ft. over NW. slope.
55.70	Draw, drains N. 45° E., curving N. 65° E.; asc. 110 ft. over E. slope.

NS

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
70.50	Fence, bears N. 10° 30' W. and S. 10° 30' E. Enter widely scattered timber.
72.00	Ridge, bears N. and S.; desc. 30 ft. over W. slope.
79.20	Draw, drains S.; asc. 20 ft. over SE. slope.
79.94	The cor. of secs. 10, 11, 14, and 15. Land, rolling mountain. Soil, clay loam. Timber, widely scattered juniper W. portion. Undergrowth, sagebrush.
	N. 0° 20' W., bet. secs. 10 and 11. Over rolling mountain land through widely scattered timber. Asc. 50 ft. over SE. slope.
22.50	Ridge, bears E. from W. and S.; desc. 115 ft. over N. slope. Leave timber.
36.30	Dry Basin Wash, drains E.; asc. 15 ft. over SE. slope.
38.60	Trail road, bears N. 86° W. and S. 86° E.
40.40	Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R6E $\frac{1}{4}$ S10 S11 1970 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
41.00	Wash, drains S. 75° E. from N. 30° W.; asc. 195 ft. over SW. slope.
43.40	Fence, bears N. 15° 15' W. and S. 15° 15' E.
46.50	Enter scattered timber.
63.00	Leave timber.
71.00	Ridge, bears E. and W.; desc. 90 ft. over N. slope.
71.42	Fence, bears N. 77° 32' W. and N. 77° 32' E., 27 lks. to cor.; thence N. 36° 59' E. and S. 62° 41' E.
80.80	Point for the cor. of secs. 2, 3, 10, and 11, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	T9N R6E $\frac{S3}{S10} \frac{S2}{S11}$ 1970
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Land, rolling mountain. Soil, clay loam. Timber, scattered to widely scattered juniper. Undergrowth, sagebrush.
	From the cor. of secs. 1, 2, 11, and 12. S. 89° 31' W., bet. secs. 2 and 11. Over rolling mountain land through widely scattered timber. Desc. 40 ft. over NW. slope.
11.50	Wash, drains N.
15.75	Draw, drains N. 50° E.; asc. 125 ft. over SE. slope.
18.35	Trail road, bears N. 50° E. and S. 50° W.
39.10	Spur, slopes N. 15° E.; desc. 10 ft. over NW. slope.
40.19	Point for the ¼ sec. cor. of secs. 2 and 11, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E $\frac{1}{4} \frac{S2}{S11}$ 1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor. From this cor., U.S.G.S. triangulation station "2-14X" bears S. 71° 22' W., 13.235 chs. dist., at latitude 41° 32' 13.521" N. and longitude 111° 14' 20.496" W., a ½ in. reinforcing rod projecting 0.1 ft. above ground. Desc. 10 ft. over NW. slope.
42.00	Head of draw, drains N. 10° E.; asc. 105 ft. over NE. slope.
48.00	Top of ascent, slopes N.; asc. 5 ft. along N. slope.
49.32	Net wire fence enclosure, 8 ft. high, bears N. 8° 15' W. about 1.75 chs. and S. 8° 15' E., 2.15 chs., thence S. 81° 45' W.; desc. 15 ft. along N. slope.
58.65	Same fence, bears N. 81° 45' E. and S. 81° 45' W., 21 lks. to top, thence S. 8° 15' E.; asc. 30 ft. along N. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
61.00	Top of ascent, slopes N.; desc. 15 ft. over NW. slope.
65.70	Draw, drains N. 30° E.; asc. 30 ft. over NE. slope.
70.65	Spur, slopes N. 30° E.; desc. 10 ft. over NW. slope.
72.96	Fence, bears N. 36° 50' E. and S. 36° 50' W.
75.00	Draw, drains N.; asc. 10 ft. along N slope.
80.38	The cor. of secs. 2, 3, 10, and 11.
	Land, rolling mountain. Soil, clay loam. Timber, widely scattered juniper. Undergrowth, sagebrush and small buck brush.
	N. 0° 25' E., bet. secs. 2 and 3.
	Over rolling mountain land through widely scattered timber. Desc. 70 ft. over N. slope.
10.60	Draw, drains N. 67° E.; asc. 100 ft. over SE. slope.
28.20	Ridge, bears S. 65° W. and curves E.; desc. 110 ft. over N. slope.
40.40	Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E $\frac{1}{4}$ S3 S2 1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Desc. 130 ft. over N. slope.
51.00	Draw, drains N. 70° E.; asc. 95 ft. over SE. slope.
51.95	Trail road, bears N. 70° E. and S. 70° E.
64.10	Trail road, on ridge, bears N. 70° E. and S. 70° W.; desc. 115 ft. over NW. slope.
78.80	Draw, drains N. 70° E.; asc. 15 ft. over S. slope.
80.15	Trail road, bears N. 70° E. and S. 70° W.
83.00	Trail road, bears E and W.
83.60	Low spur, slopes E.; desc. 10 ft. over N. slope.
85.48	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., protruding 6 ins. above ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	T10N R6E S34 S35 S3 S2 T9N 1964
	Land, rolling mountain. Soil, rocky clay. Timber, widely scattered juniper S. portion. Undergrowth, sagebrush and service berry.
	From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp. N. 1° 42' W., bet. secs. 33 and 34. Over rolling mountain land through dense undergrowth. Desc. 65 ft. over NW. slope.
8.60	Draw, drains E.; asc. 95 ft. over S. slope.
15.24	Top of ascent, on W. slope of ridge, bears N. 5° E. and S. 5° W.; desc. 60 ft. over NW. slope.
39.42	Point for the 1/4 sec. cor. of secs. 33 and 34, at pro- portionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E 1/4 S33 S34 1978
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Desc. 150 ft. over NW. slope.
51.35	Trail road, bears N. 27° E. and S. 27° W.
52.75	Six cable power line, bears N. 66° 28' E. and S. 66° 28' E.
54.00	Wash, 15 lks. wide, 4 ft. deep, in draw, drains N. 36° E. asc. 35 ft. over SE. slope.
54.45	Six cable power line, bears N. 66° 28' E. and S. 66° 28' W.
56.90	Trail road, bears N. 50° E. and S. 50° W.
78.14	Point of spur, slopes N. 45° E.; desc. 15 ft. over NW. slope.
78.84	Point for the cor. of secs. 27, 28, 33, and 34, deter- mined longitudinally by proportionate measurement and latitudinally by an old fence bearing E. and W. There is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T9N R6E</p> <p>S28 S27 S33 S34</p> <p>1978</p> <p>From this cor., the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, bears S. $89^{\circ} 46'$ W., 38.44 chs. dist., monumented with a sandstone, 9x9x4 ins., (record--20x16x5 ins.) firmly set in an old abandoned fence line, and plainly mkd. $\frac{1}{4}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p>T9N R6E</p> <p>$\frac{1}{4}$ $\frac{S28}{S33}$</p> <p>1970</p> <p>Bury cor. stone alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <p>Land, rolling mountain. Soil, rocky clay. No timber. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>N. $89^{\circ} 42'$ W., bet. secs. 27 and 34.</p> <p>Over rolling mountain land through sagebrush and service berry undergrowth. Desc. 245 ft. over NW. slope.</p>
19.47	Six cable power line, bears N. $67^{\circ} 58'$ E. and S. $67^{\circ} 58'$ W.
23.90	Wash, 25 lks. wide, 6 ft. deep, drains N. 40° W.; thence across draw.
24.56	Six cable power line, bears N. $67^{\circ} 58'$ E. and S. $67^{\circ} 58'$ W.
26.80	Wash, 40 lks. wide, 10 ft. deep, drains N. 10° W.; asc. 185 ft. over E. slope.
38.35	Ridge, bears N. and S.; desc. 20 ft. over gentle NW. slope.
41.50	Head of shallow draw, drains N. 45° W.; asc. 5 ft. over NE. slope.
42.54	The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, at cor. of fence, bears N. $0^{\circ} 20'$ W. and S. $89^{\circ} 43'$ W., monumented with a sandstone, 18x10x8 ins., loosely set and plainly mkd. $\frac{1}{4}$ on one face. This cor. was in place at time fence was built, according to Carter Cornia, long time resident and adjacent land owner, and is accepted as being in the original position.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">¼ $\frac{S27}{S34}$</p> <p style="text-align: center;">1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <p style="text-align: center;">—————</p> <p>S. 89° 43' W., beginning new measurement.</p> <p>Along fence line. Asc. 5 ft. over gentle NE. slope.</p>
2.90	Top of ascent, slopes N. 40° W.; desc. 270 ft. over NE. slope.
27.40	Draw, drains N.; asc. 90 ft. over NE. slope.
29.20	Trail road, bears N. and S.
38.55	Top of ascent, slopes N. 35° E.
38.69	The cor. of secs. 27, 28, 33, and 34.
	<p>Land, rolling mountain. Soil, rocky clay. No timber. Undergrowth, sagebrush and service berry.</p>
	<p>N. 1° 43' E., bet. secs. 27 and 28.</p> <p>Over rolling land through sagebrush undergrowth; desc. over NW. slope.</p>
10.00	Enter meadow land, bears NE. and SW.
19.50	Woodruff Creek, 20 lks. wide, 12" deep, flows irregularly NE.
29.50	Leave meadow land; asc. over SE. slope.
31.75	Dirt road, bears NE. and SW.; enter scattered timber.
39.72	Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>

Dependent resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T9N R6E $\frac{1}{4}$ S28 S27 1978</p> <p>From this cor., some large rocks in small draw, draining S. 10° E., bears S. 85° W., 2.07 chs. dist.</p> <p>Continue ascent over SE. slope</p>
55.00	Small spur, slopes E.; asc. along E. slope. Leave timber
58.80	Ridge, bears NE. and SW.; desc. over NW. slope.
77.00	Enter meadow land, bears nearly E. and W.
78.75	Fence, bears N. 88° 15' E. and S. 88° 15' W., 1.52 chs. to cor.; thence S. 3° E. about 10.00 chs.
79.20	Spring branch, 3 lks. wides, 6" deep, flows irregularly N. 75° E. from irregularly S. 65° W.
79.44	Point for the cor. of secs. 21, 22, 27, and 28, at proportionate distance.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E S21 S22 S28 S27 1978</p> <p>From this cor., a sandstone, 16x10x10 ins., plainly mkd. 3 notches on one edge, at cor. of fences, extending N. 88° 15' E., and S. 3° E., bears S. 63° 44' W., 1.69 chs. dist. This is not the original cor. stone, but is in the same position as the original, according to a statement made to me in 1970 by Carter Cornia, life long resident and adjacent land owner, but is not accepted as the cor. position.</p> <p>Land, rolling mountain with meadow along creek bottoms. Soil, rocky on mountains, loam in creek bottoms. Timber, scattered juniper on mountain portion between creeks. Undergrowth, sagebrush with willows and grass along creek bottoms.</p>
	<p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>S. 89° 48' W., bet. secs. 22 and 27.</p> <p>Over nearly level meadow land through dense patches of willows. By triangulation. Topography scaled.</p>
39.61	Point for the ¼ sec. cor. of secs. 22 and 27, at proportionate distance falls on private meadow land and is not monumented; there is no remaining evidence of the original cor.
39.95	Woodruff Creek, flows irregularly N. 40° E.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
42.75	Birch Creek, flows N. 15° E., from S. 70° W.
59.43	Fence, bears nearly N. and S.
59.67	Dirt road, bears nearly N. and S.
59.93	Fence, bears nearly N. and S., 35 lks. to fence bearing S. 88° 15' W.
60.79	Fence, bears N., and S. 20 lks. to fence bearing S. 88° 15' W. and N. 88° 15' E.
70.27	Birch Creek, flows S. 80° E. from N. 80° W.
78.32	Birch Creek, flows irregularly N. 75° E. from S. 75° W.
79.22	The cor. of secs. 21, 22, 27, and 28.
	<p>Land, meadow. Soil, loam. No timber. Undergrowth, dense willows along fence lines and creeks.</p>
	<p>N. 0° 36' W., bet. secs. 21 and 22.</p>
	<p>Over nearly level meadow land.</p>
6.97	Birch Creek, 15 lks. wide, 4 ft. deep, flows irregularly E.
9.20	Canal, 15 lks. wide, 4 ft. deep, flows nearly E.; asc. 25 ft. over gentle S. slope.
11.18	Right of way fence, bears N. 67° 30' W. and S. 63° E.
11.93	State Highway No. 39, on slight curve, bears N. 67° 30' W. and S. 63° E.; asc. 340 ft. over steep and broken SW. slope.
21.75	Top of bluff ledge, bears N. 70° W. and curves N.; asc. 20 ft. along E. slope. Enter timber.
27.60	Spur, slopes S. 43° E.; desc. 15 ft. over gentle NE. slope.
28.95	Fence, bears N. 43° 45' W. and S. 43° 45' E.
39.70	Point for the ¼ sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 2½ ft. base, to top, with brass cap, mkd.</p>
	<p>T9N R6E ¼ S21 S22 1978</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	Desc. 35 ft. over NE. slope.
42.00	Flat draw, drains E.; asc. 25 ft. over gentle S. slope.
46.25	Small spur, slopes E.; desc. 15 ft. over N. slope.
49.15	Draw, drains E.; asc. 95 ft. over SE. slope.
63.70	Trail road, on ridge, bears E. and W.; desc. 15 ft. over gentle NE. slope. Leave timber. Enter reseeded area.
79.40	The cor. of secs. 15, 16, 21, and 22, monumented with a broken sandstone, 14x10x6 ins., firmly set and plainly mkd. 1 notch on S. and E. edges. Top of stone broken and missing. (Record--20x10x5 ins.)
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E
	S16 S15 S21 S22
	1970
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	Land, meadow S. portion; mountainous and rolling N. portion. Soil, clay loam. Timber, scattered juniper and pinon. Undergrowth, meadow grass, sagebrush and buck brush.
	From the cor. of secs. 14, 15, 22, and 23.
	S. 89° 38' W., bet. secs. 15 and 22.
	Over rolling mountain land, through scattered timber. Desc. 85 ft. along N. slope.
5.95	Wash, 20 lks. wide, 6 ft. deep, in draw, drains S. 6° E.; asc. 100 ft. over SE. slope.
13.35	Spur, slopes S. 45° E.; asc. 35 ft. along S. slope.
19.70	Spur, slopes S.; desc. 30 ft. along S. slope.
27.00	Bottom of descent, slopes S.; asc. 45 ft. over SE. slope.
34.50	Spur, slopes S. about 2.50 chs. to end; desc. 60 ft. over W. slope.
37.60	Trail road, bears N. and S.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
37.75	Wash, in draw, drains S. 15° E. about 2.00 chs. to junction with wash from W.; asc. 5 ft. over SE. slope.
40.29	<p>Point for the ¼ sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;"> $\frac{S15}{\frac{1}{4} S22}$ </p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p> <p>Asc. 335 ft. over SE. slope.</p>
66.10	Leave timber, enter reseeded area.
80.58	<p>The cor. of secs. 15, 16, 21, and 22.</p> <p>Land, mountainous. Soil, gravelly clay. Timber, juniper and pinon. Undergrowth, sagebrush, scattered small buck brush.</p>
10.00	<p>N. 0° 05' W., bet. secs. 15 and 16.</p> <p>Over rolling mountain land through reseeded area. Asc. 40 ft. over gentle SE. slope.</p> <p>Top of ascent, bears E. and W.; desc. 20 ft. over gently rolling land.</p>
35.50	Trail road, bears N. 27° 20' E. and S. 27° 20' W.
35.60	Fence, bears N. 27° 20' E. and S. 27° 20' W., leave reseeded area. Enter sagebrush.
40.92	<p>Point for the ¼ sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;"> $\frac{S16 S15}{\frac{1}{4}}$ </p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Desc. 70 ft. over N. slope.</p>
47.85	Draw, drains W.; asc. 25 ft. over S. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS							
51.05	Small spur, slopes W.; asc. 105 ft. over SW. slope.						
54.20	Trail road, bears N. 45° E. and S. 45° W,						
54.50	Wash, 15 lks. wide, 2 ft. deep, drains S. 40° W. Enter scattered timber.						
81.84	The cor. of secs. 9, 10, 15, and 16, monumented with a sandstone, 16x12x6 ins., firmly set and plainly mkd. 4 notches on S. and 3 on E. edges.						
	from which the remains of the original bearing tree:						
	A juniper stump, bears N. 60° W., 60 lks. dist.						
	At the cor. point						
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.						
	T9N R6E						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">S9</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S10</td> </tr> <tr> <td style="padding: 0 5px;">S16</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S15</td> </tr> </table>	S9		S10	S16		S15
S9		S10					
S16		S15					
	1970						
	Bury stone cor. alongside iron post.						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Land, rolling mountain.						
	Soil, rocky.						
	Timber, scattered juniper N. portion.						
	Undergrowth, grass, sagebrush and small buck brush.						
	From the cor. of secs. 10, 11, 14, and 15.						
	N. 89° 24' W., bet. secs. 10 and 15.						
	Over mountain land through scattered timber. Asc. 55 ft. over E. slope.						
11.15	Ridge, bears N. and S.; desc. 90 ft. over W. slope. Leave timber.						
31.30	Draw, drains S. 30° E., asc. 55 ft. over NE. slope.						
31.60	Trail road, bears S. 17° E. and curves N. 1° W.						
39.65	Small spur, slopes S.; desc. 5 ft. over SW. slope.						
40.58	Point for the ¼ sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the original cor.						
	Set an iron post, 2½ ins. diam., 30 ins. long, 24 ins. in the ground, with brass cap mkd.						

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T9N R6E $\frac{1}{4}$ $\frac{S10}{S15}$ 1970</p>	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p>	
	<p>Desc. 15 ft. over SW. slope.</p>	
48.50	<p>Draw, drains S. 60° E.; asc. 235 ft. over NE. slope.</p>	
74.85	<p>Trail road, bears N. 1° 40' E. and S. 1° 40' W.</p>	
74.96	<p>Fence, bears N. 1° 40' E. and S. 1° 40' W.</p>	
81.16	<p>The cor. of secs. 9, 10, 15, and 16. Land, rolling mountain. Soil, clay loam. Timber, scattered juniper E. 11.00 chs. Undergrowth, sagebrush and grass.</p>	
	<p>N. 0° 21' E., bet. secs. 9 and 10.</p>	
	<p>Over mountainous land through sagebrush undergrowth. Asc. 5 ft. over SE. slope.</p>	
4.00	<p>Ridge, bears N. 30° E. and S. 30° W.; desc. 80 ft. over NW. slope.</p>	
15.15	<p>Draw, drains S. 50° W.; asc. 145 ft. over SE. slope.</p>	
40.29	<p>The ¼ sec. cor. of secs. 9 and 10, monumented with a sandstone, 18x10x3 ins., firmly set and plainly mkd. ¼ on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T9N R6E $\frac{1}{4}$ S9 S10 1970</p>	
	<p>Bury stone cor. alongside iron post.</p>	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p>	
	<p>N. 0° 35' E., beginning new measurement.</p>	
	<p>Asc. 15 ft. over S. slope.</p>	
4.85	<p>Ridge, bears E. and W.; desc. 220 ft. over NW. slope.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
8.90	Trail road, bears N. 57° 30' W. and S. 57° 30' E.
9.25	Fence, bears N. 57° 30' W. and S. 57° 30' E.
15.40	Aspen grove, bears West 4.50 chs. dist.
30.00	Draw, drains N. 45° E.; asc. 160 ft. over SE. slope.
40.15	The cor. of secs. 3, 4, 9, and 10, monumented with a sandstone, 18x8x6 ins., firmly set and plainly mkd. 5 notches on S. and 3 on E edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E S4 S3 S9 S10 1970
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, rolling mountain. Soil, clay loam. Timber, scattered patches of aspen. Undergrowth. sagebrush, service berry and chokecherry.
	From the cor. of secs. 2, 3, 10, and 11.
	N. 89° 36' W., bet. secs. 3 and 10.
	Over rolling mountain land through scattered timber. Desc. 5 ft. along N. slope.
11.90	Draw, drains N. 45° E.; asc. 100 ft. over NE. slope.
31.20	Ridge, bears N. 45° W. and S. 30° E.; desc. 20 ft. over SW. slope. Leave timber.
40.04	Point for the ¼ sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E ¼ S3 S10 1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	Desc. 35 ft. over SW. slope.
45.70	Draw, drains N.; asc. 95 ft. over NE. slope.
59.60	Point of spur, slopes N.; desc. 40 ft. over NW. slope.
69.30	Draw, drains N. 45° E.; asc. 100 ft. over SE. slope.
80.08	The cor. of secs. 3, 4, 9, and 10.
	Land, rolling mountain. Soil, clay loam. Timber, scattered juniper E. portion. Undergrowth, sagebrush and service berry.
	N. 0° 21' E., bet. secs. 3 and 4.
	Over mountainous land through sagebrush undergrowth. Asc. 5 ft. over SE. slope.
2.00	Ridge, bears N. 45° E. and S. 45° W.; desc. 175 ft. over NW. slope.
24.20	Draw, drains N. 30° E.; asc. 120 ft. over SE. slope.
40.13	The ¼ sec. cor. of secs. 3 and 4, monumented with a sandstone, 24x12x5 ins., loosely set and dimly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E
	¼ S4 S3 1970
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

	N. 0° 31' E., beginning new measurement
	Asc. 15 ft. over SE. slope.
2.00	Ridge, bears N. 45° E. and S. 45° W.; desc. 185 ft. over NW. slope.
19.00	Draw, drains irregularly E.; asc. 110 ft. over S. slope.
19.20	Trail road, bears E. and W.
35.00	Trail road, on ridge, bears E. and W.; desc. 80 ft. over N. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
45.12	<p>The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., protruding 6 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R6E</p> <p style="text-align: center;">S33 S34 S4 S3 T9N 1964</p> <p>Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush service berry and chokecherry.</p>
	<p>From the ¼ sec. cor. of secs. 28 and 29, monumented with a sandstone, 20x12x2 ins., firmly set in a small mound of stone, and plainly mkd. ¼ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E ¼ S29 S28 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>N. 0° 21' E., bet. secs. 28 and 29.</p> <p>Over mountainous land through scattered timber. Asc. 75 ft. over S. slope.</p>
5.65	Trail road on divide bet. Birch Creek and Woodruff Creek, bears E. and W.; desc. 375 ft. over N. slope.
28.25	Draw, drains E.; asc. 145 ft. over S. slope.
31.90	Small draw, drains S. 30° E.
39.15	<p>Point for the cor. of secs. 20, 21, 28, and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">S20 S21 S29 S28</p> <p style="text-align: center;">1970</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Land, mountainous. Soil, clay loam. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 89° 35' W., bet. secs. 21 and 28.</p> <p>Over meadow and cultivated land.</p>
16.30	Canal, 10 lks. wide, 2 ft. deep, drains S. 50° E.; leave cultivated and meadow land, enter sagebrush; asc. 170 ft. over NE. slope.
16.50	Fence, bears N. 42° W. and S. 42° E.
16.60	Trail road, parallel to fence.
35.50	Small draw, drains N. 45° E.
39.36	The ¼ sec. cor. of secs. 21 and 28, on spur, slopes N., monumented with a washed boulder, 12x10x6 ins., firmly set and plainly mkd. ¼ on N. face.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">¼ $\frac{S21}{S28}$</p> <p style="text-align: center;">1970</p>
	<p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 86° 55' W., beginning new measurement.</p> <p>Desc. 10 ft. over W. slope.</p>
1.80	Small draw, drains N. 15° E.; asc. 65 ft. over E. slope.
6.30	Spur, slopes N.; desc. 90 ft. over NW. slope.
17.05	Trail road, bears N. 45° E. and S. 45° W.
18.20	Wash, in draw, drains N. 44° E.; asc. 265 ft. over SE. slope.
23.00	Enter timber.
38.83	The cor. of secs. 20, 21, 28, and 29.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, rolling meadow E. portion; mountainous W. portion. Soil, loam E. portion; rocky W. portion. Timber, scattered juniper W. portion. Undergrowth, grass sagebrush and small buck brush.</p>
	<p>N. 2° 40' W., bet. secs. 20 and 21.</p> <p>Over mountainous land through scattered timber. Asc. 115 ft. over SE. slope.</p>
5.90	Spur, slopes E.; desc. 335 ft. over steep NE. slope.
27.90	Draw, drains N. 50° E.; asc. 65 ft. over SE. slope.
31.20	Point of spur, slopes E.; desc. 30 ft. along E. slope.
39.19	<p>The ¼ sec. cor. of secs. 20 and 21, monumented with a blue limestone, 14x8x5 ins., (record--sandstone, 14x8x6 ins.) firmly set in a mound of stone, and plainly mkd. ¼ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E ¼ S20 S21 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p>
	<p>N. 0° 05' W., beginning new measurement.</p> <p>Desc. 175 ft. over NE. slope.</p>
8.64	Right of way fence, bears N. 66° 30' W. and S. 66° 30' E.
8.90	Birch Creek, 20 lks. wide, 3 ft. deep, flows S. 65° E., asc. 160 ft. over SW. slope.
9.62	State Highway No. 39, bears N. 66° 30' W. and S. 66° 30' E.
10.34	Right of way fence, parallel to highway.
13.45	Fence, bears N. 61° W. and curves S. 46° E.
13.50	Old road, bears N. 61° W. and curves S. 46° E.
20.00	Spur, slopes SE.; asc. 60 ft. over SE. slope. Enter scattered timber.
36.90	Small draw, drains E.
38.62	The cor. of secs. 16, 17, 20, and 21, monumented with a sandstone, 20x9x8 ins., firmly set and plainly mkd. 3 notches on S. and 4 on E. edges, and witnessed by a mound of stone to W.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E S17 S16 S20 S21 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Land, mountainous. Soil, clay loam. Timber, scattered juniper N. portion. Undergrowth, sagebrush, dense willows along Birch Creek.</p>
	<p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>S. 87° 32' W., bet. secs. 16 and 21.</p> <p>Over rolling mountain land through reseeded area. Asc. 110 ft. over SE. slope.</p>
14.40	Trail road, on ridge, bears N. and S.; desc. 75 ft. over W. slope.
15.27	Fence, bears N. 4° 20' E. and S. 4° 20' W.; enter scattered timber.
23.75	Gulch, drains S. 65° W.; desc. 105 ft. along S. slope.
32.40	Head of draw, drains S.; asc. 50 ft. over SE. slope.
36.70	Ridge, bears N. 37° E. and S. 37° W.; desc. 50 ft. over NW. slope.
36.96	Fence, bears N. 37° 18' E. and S. 37° 18' W.
39.53	Point for the ¼ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E S16 ¼ S21 1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p> <p>Desc. 225 ft. over NW. slope.</p>
47.00	Leave timber.
57.50	Wash, 15 lks. wide, 4 ft. deep, drains S. 55° W.; thence over nearly level land.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
59.45	Wash, 20 lks. wide, 4 ft. deep, drains S. 40° W.
66.00	Trail road, bears N. 30° E. and S. 30° W.; asc. 125 ft. over SE. slope. Enter scattered timber.
72.00	Point of spur, slopes S. 20° E.; desc. 15 ft. over SW. slope.
74.95	Small draw, drains S. 10° E.; asc. 45 ft. over NE. slope.
79.06	The cor. of secs. 16, 17, 20, and 21.
	<p>Land, rolling mountain. Soil, rocky clay loam. Timber, scattered juniper. Undergrowth, sagebrush, small buck brush and service berry.</p>
	N. 0° 59' E., bet. secs. 16 and 17.
	Over mountainous land through scattered timber. Desc. 15 ft. over NE. slope.
5.50	Small draw, drains S. 36° E.; asc. 245 ft. over steep SE. slope.
16.25	Top of steep ascent, slopes E.; asc. 135 ft. along E. changing to SE. slope.
40.01	The ¼ sec. cor. of secs. 16 and 17, monumented with a sandstone, 14x10x5 ins., firmly set and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T9N R6E ¼ S17 S16 1970</p>
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	N. 1° 47' W., beginning new measurement.
	Asc. 10 ft. along E. slope.
4.00	Top of ascent, slopes E.; desc. 450 ft. over NE. slope. Leave timber.
39.38	The cor. of secs. 8, 9, 16, and 17, monumented with a sandstone, 14x14x5 ins., firmly set and plainly mkd. 4 notches on S. and E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	T9N R6E S8 S9 S17 S16 1970
	Bury stone cor. alongside iron post. Land, mountainous. Soil, clay loam. Timber, scattered juniper S. portion. Undergrowth, sagebrush.
	From the cor. of secs. 9, 10, 15, and 16. S. 85° 40' W., bet. secs. 9 and 16. Over rolling mountain land through scattered timber. Asc. 15 ft. over E. slope.
2.40	Ridge, bears N. and S.; desc. 210 ft. over NW. slope.
15.15	Canyon, drains irregularly S. 45° W.; asc. 135 ft. over SE. slope.
28.30	Spur, slopes S.; desc. 230 ft. over W. slope.
38.50	Canyon, drains S.; asc. 10 ft. over E. slope.
39.84	Point for the ¼ sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E ¼ $\frac{S9}{S16}$ 1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor. Asc. 150 ft. over E. slope.
49.20	Spur, slopes S.; desc. 85 ft. over W. slope.
52.90	Draw, drains S.; asc. 60 ft. over E. slope.
57.00	Ridge, bears N. and S.; desc. 275 ft. over SW. slope.
69.00	Leave timber.
72.00	Trail road, bears S. 45° E. and N. 45° W.; wash, drains S. 30° W.
78.00	Wash, 30 lks. wide, 8 ft. deep, drains irregularly S. 30° E.
79.68	The cor. of secs. 8, 9, 16, and 17.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, mountainous. Soil, clay loam. Timber, scattered juniper E. portion. Undergrowth, sagebrush.</p>
	<p>N. 1° 17' E., bet. secs. 8 and 9.</p> <p>Over mountainous land, through sagebrush undergrowth. Desc. 10 ft. over NE. slope.</p>
5.40	Wash, 30 lks. wide, 8 ft. deep, drains S. 55° E.; asc. 500 ft. over gentle S. slope.
6.85	Trail road, bears N. 58° W. and S. 58° E.
37.00	Top of ridge, bears E. and W.; desc. 10 ft. over N. slope.
39.91	<p>The ¼ sec. cor. of secs. 8 and 9, monumented with a sandstone, 14x10x3 ins., firmly set and plainly mkd. ¼ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E ¼</p> <p style="text-align: center;">S8 S9 1970</p> <p>Bury stone cor. alongside iron post.</p>
	<p>N. 0° 28' W., beginning new measurement.</p> <p>Desc. 150 ft. over N. slope.</p>
18.90	Draw, drains W.; asc. 15 ft. over S. slope.
22.00	Spur, slopes W.; desc. 60 ft. over N. slope.
30.00	Draw, drains S. 45° W.; asc. 145 ft. over SE. slope.
40.41	<p>The cor. of secs. 4, 5, 8, and 9, monumented with a sandstone, 18x11x5 ins., firmly set in a mound of stone, and plainly mkd. 5 notches on S. and 4 on E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">S5 S4 S8 S9</p> <p style="text-align: center;">1970</p> <p>Bury stone cor. alongside iron post.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush.</p>	
	<p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>S. 85° 27' W., bet. secs. 4 and 9.</p> <p>Over mountainous land, through sagebrush undergrowth. Asc. 10 ft. over E. slope.</p>	
1.90	Small spur, slopes N.; desc. 35 ft. over W. slope.	
6.90	Draw, drains N.; asc. 125 ft. over general NE. slope.	
39.98	<p>Point for the ¼ sec. cor. of secs. 4 and 9, at pro- portionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">¼ $\frac{S4}{S9}$</p> <p style="text-align: center;">1970</p>	
	Asc. 195 ft. over E. slope.	
42.04	Fence, bears N. 55° 45' W. and S. 55° 45' E.	
65.45	Trail road, bears N. and S.	
69.00	Ridge, bears N. and S.; desc. 60 ft. over W. slope.	
75.50	Draw, drains S.; asc. 65 ft. over SE. slope.	
79.96	<p>The cor. of secs. 4, 5, 8, and 9.</p> <p>Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush.</p>	
	<p>N. 0° 45' E., bet. secs. 4 and 5.</p> <p>Over mountainous land through sagebrush undergrowth. Asc. 85 ft. over SE. slope.</p>	
14.25	Ridge, bears E. and W.; desc. 120 ft. over N. slope.	
18.52	Fence, bears N. 40° E. and S. 40° W.	
20.35	Trail road, bears E. and W.	
23.65	Unimproved dirt road, bears E. and W.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
33.45	Draw, drains E.; asc. 30 ft. over S. slope.
37.80	Low ridge, bears E. and W.; desc. 50 ft. over N. slope.
39.48	Fence, bears N. 25° W. and S. 25° E.
43.47	Point for the ¼ sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E ¼ S5 S4 1970
	Desc. 20 ft. over N. slope.
44.05	Draw, drains irregularly E.; asc. 30 ft. over S. slope.
47.80	Ridge, bears E. and W.; desc. 50 ft. over NE. slope.
54.25	Draw, drains irregularly S. 45° E.; asc. 90 ft. over SW. slope.
69.35	Ridge, bears E. and W.; desc. 65 ft. over N. slope.
75.85	Draw, drains irregularly E.; asc. 75 ft. over S. slope.
92.15	the cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., 6 ins. above ground, with brass cap mkd.
	T10S R6E S32 S33 S5 S4 T9N 1970
	Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 20, 21, 28, and 29.
	N. 89° 59' W., bet. secs. 20 and 29.
	Over mountainous land through juniper timber. Asc. 160 ft. over SE. slope.
10.90	Top of ascent, slopes S.; desc. 30 ft. over SW. slope.
13.80	Head of draw, drains S. 38° E.; asc. 350 ft. over steep SE. slope.
14.80	Leave timber, bears N and S.
21.40	Trail road, bears N. and S.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
38.77	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">$\frac{1}{4} \frac{\\$20}{\\$29}$</p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>	
39.40	<p>Ridge, bears N. 40° E. from W.; desc. 60 ft. along N. slope.</p>	
48.73	<p>Fence, bears N. $76^\circ 40'$ E. and S. $76^\circ 40'$ W.</p>	
71.00	<p>Spur, slopes N. 15° W.; desc. 100 ft. over SW. slope.</p>	
74.60	<p>Draw, drains N. 50° W.; thence along N. slope.</p>	
77.54	<p>The cor. of secs. 19, 20, 29, and 30, monumented with a sandstone, 18x12x3 ins., firmly set and plainly mkd. 5 notches on E. and 2 on S. edges, and witnessed by a mound of stone, 2 ft. base, 1 ft. high, N. of cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E $\frac{\\$19}{\\$30} \frac{\\$20}{\\$29}$ 1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Rebuild mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <p>Land, mountainous. Soil, rocky clay loam. Timber, young aspen extreme W. portion; juniper E. portion. Undergrowth, sagebrush, service berry, choke cherry and oak brush.</p>	
<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875 and the Retracement Executed by John W. Dougall and Thomas C. Rathbone in 1914.</p>		
<p style="text-align: center;">N. $86^\circ 11'$ W., bet. secs. 19 and 30.</p> <p>Over mountainous land through scattered patches of aspen timber and dense undergrowth. Along N. slope.</p>		

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
4.65	Spur, slopes N. 35° W.; desc. 90 ft. over SW. slope.
9.85	Draw, drains N. 35° W.; asc. 30 ft. over NE. slope.
12.85	Spur, slopes N; desc. 25 ft. over NW. slope.
14.25	Draw, drains N.; asc. 50 ft. over NE. slope.
17.55	Spur, slopes N. 20° E.; desc. 40 ft. over NW. slope.
23.15	Draw, drains N.; asc. 60 ft. over NE. slope.
30.35	Spur, slopes N. 20° E.; desc. 10 ft. over gentle NW. slope.
37.15	Draw, drains N.; asc. 40 ft. over E. slope.
39.65	Spur, slopes N.; desc. 10 ft. along N. slope.
42.25	Head of draw, drains N.; asc. 10 ft. over NE. slope.
42.33	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">$\frac{1}{4} \frac{S19}{S30}$</p> <p style="text-align: center;">1970</p> <p>Asc. 25 ft. over steep NE. slope.</p>
43.33	<p>The closing cor. of secs. 19 and 30, on the E. bdy. of Tract 46, monumented with an iron post, 1 in. diam., protruding 6 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <p style="text-align: center;">TR46 $\frac{ C S19}{ C S30}$</p> <p style="text-align: center;">1914</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 86° 11' W., beginning new measurement.</p> <p>Asc. 85 ft. over steep NE. slope. Enter dense young aspen.</p>
3.20	Ridge, bars N. and S. Leave timber; desc. 50 ft. over W. slope.
3.40	Fence, bears S. 6° 10' E. and N. 6° 10' W., 1.86 chs. dist., thence N. 22° 30' E.
6.20	Head of draw, drains N. 50° W.; asc. 25 ft. over NE. slope
15.00	Spur, slopes N. 46° W.; desc. 55 ft. over SW. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS								
20.00	<p>The closing cor. of secs. 19 and 30, on the W. bdy. of Tract 46, monumented with an iron post, 1 in. diam., 12 ins. above ground, and witnessed by a mound of stone, 2 ft. base, 1 ft. high, W. of cor., with brass cap mkd.</p> <p style="text-align: center;">T9N R6E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S19 C</td> <td rowspan="2" style="padding: 0 10px;"> </td> <td rowspan="2" style="padding: 0 10px;">TR 46</td> </tr> <tr> <td style="border-top: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S30 C</td> </tr> </table> <p style="text-align: center;">1914</p>	S19 C		TR 46	S30 C			
S19 C		TR 46						
S30 C								
	<p>N. 86° 11' W., beginning new measurement.</p> <p>Desc. 50 ft. over SW. slope.</p>							
2.85	<p>Draw, drains N. 35° W.; asc. 110 ft. over NE. slope.</p>							
8.00	<p>Enter dense young aspen timber, bears N. 35° W. and S. 35° E.</p>							
12.55	<p>Spur, slopes N. 35° W. Leave timber; desc. 150 ft. over NW. slope.</p>							
21.85	<p>The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with an iron post, 3 ins. diam., protruding 10 ins. above ground, and witnessed by a mound of stone to E., and with brass cap mkd.</p> <p style="text-align: center;">T9N R5E R6E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td rowspan="2" style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S19</td> </tr> <tr> <td style="border-top: 1px solid black; border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S30</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Land, mountainous. Soil, rocky clay loam. Timber, scattered patches of dense young aspen. Undergrowth, oak brush, choke cherry, service berry and sagebrush.</p>	S25		S19			S30	
S25		S19						
			S30					
	<p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 1° 12' E., bet. secs. 19 and 20.</p> <p>Over mountainous land, through dense young aspen timber and oak brush and service berry undergrowth. Desc. 20 ft. over NE. slope.</p> <p>2.00 Draw, drains N. 50° W.; desc. 40 ft. along W. slope. Leave timber.</p> <p>8.15 Spur, slopes N. 15° W.; desc. 350 ft. over NE. slope.</p> <p>22.50 Enter aspen timber.</p> <p>25.00 Leave aspen timber.</p> <p>39.47 The ¼ sec. cor. of secs. 19 and 20, monumented with a sandstone, 20x12x4 ins., firmly set and plainly mkd. ¼ on W. face.</p>							

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R6E
¼
S19|S20
1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 1° 07' E., beginning new measurement.

Desc. 130 ft. over N. slope.

- 12.55 State Highway No. 39, bears N. 71° E. and S. 71° W.
- 13.35 Creek, with clear water, 2 lks. wide, 3 ins. deep, flows irregularly N. 70° E.; asc. 80 ft. over SE. slope.
- 17.35 Fence, bears E. and W.
- 20.05 Spur, slopes E.; desc. 115 ft. over N. slope.
- 27.35 Birch Creek, 10 lks. wide, 3 ft. deep, flows E.; asc. 240 ft. over SW. slope.
- 29.05 Improved dirt road, bears E. and W. to Birch Creek Reservoir.
- 39.05 The cor. of secs. 17, 18, 19, and 20, monumented with a sandstone, 14x10x6 ins., firmly set and plainly mkd. 5 notches on E. and 2 on S edges, and witnessed by a small mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T9N R6E
S18|S17
S19|S20
1970

Bury stone cor. alongside iron post.

Land, mountainous.

Soil, rocky clay loam.

Timber, young aspen extreme S. portion.

Undergrowth, oak brush, choke cherry, sagebrush and service berry.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875</p> <hr/>
	<p>From the cor. of secs. 16, 17, 20, and 21. N. 87° 45' W., bet. secs. 17 and 20. Over mountainous land through scattered juniper timber and dense undergrowth. Asc. 110 ft. over SE. slope.</p>
6.00	Spur, slopes S. 15° W.; desc. 90 ft. over SW. slope.
11.05	Draw, drains S.; asc. 55 ft. over E. slope.
13.70	Ridge, bears N. 15° E. and S. 15° W.; desc. 125 ft. over W. slope.
21.60	Wash, 20 lks. wide, 4 ft. deep, in draw, drains S.; asc. 135 ft. over E. slope. Leave timber.
23.50	Trail road, bears N and S.
32.75	Ridge, bears N. and S.; desc. 30 ft. over W. slope.
35.08	The ¼ sec. cor. of secs. 17 and 20, monumented with a broken sandstone, 14x10x8 ins., firmly set in a small mound of stone, and plainly mkd. ¼ on N. face.
	<p>At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<p>T9N R6E</p> <p>¼ $\frac{S17}{S20}$</p> <p>1970</p>
	<p>Bury stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p> <hr/>
	<p>S. 88° 50' W., beginning new measurement. Desc. 60 ft. over W. slope.</p>
3.70	Draw, drains S.; asc. 155 ft. over E. slope.
12.90	Ridge, bears N. and S. 20° E.; desc. 170 ft. over W. slope.
26.50	Draw, drains S.; asc. 160 ft. over E. slope.
35.20	Ridge, bears N. and S.; desc. 35 ft. over SW. slope.
39.17	The cor. of secs. 17, 18, 19, and 20.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, mountainous. Soil, rocky clay loam. Timber, scattered juniper E. portion. Undergrowth, sagebrush and service berry.</p>
	<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875 and the Retracement Executed by John W. Dougall and Thomas C. Rathbone in 1914</p>
	<p>N. 85° 06' W., bet. secs. 18 and 19.</p> <p>Over mountainous land through dense undergrowth. Desc. 115 ft. over SW. slope.</p>
13.30	Draw, drains S.; asc. 35 ft. over E. slope.
17.00	Spur, slopes S.; desc. 30 ft. over W. slope.
25.50	Draw, drains S.; asc. 80 ft. over E. slope.
34.00	Spur, slopes S.; desc. 110 ft. over W. slope.
40.00	Trail road, bears N. and S.
41.50	Draw, drains S.
42.97	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, at pro- portionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T9N R6E</p> $\frac{\frac{1}{4} S18}{S19}$ <p>1970</p>
	<p>Asc. 240 ft. over E. slope.</p>
49.85	Spur, slopes S.; desc. 40 ft. over SW. slope.
52.90	Draw, drains S. 45° E.; asc. 45 ft. over NE. slope.
59.90	Spur, slopes S.; desc. 225 ft. over W. slope.
81.60	Draw, drains S.; asc. 90 ft. over E. slope.
86.47	<p>The cor. of secs. 18 and 19, on the W. bdy. of the Tp., monumented with an iron post, 3 ins. diam., protruding 10 ins. above ground, with brass cap mkd.</p>
	<p>T9N R5E R6E S24 S18 S19</p> <p>1914</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, mountainous. Soil, rocky loam. No timber. Undergrowth, dense sagebrush, with willows and service berry along Birch Creek.</p>
	<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875</p>
	<p>From the cor. of secs. 17, 18, 19, and 20. N. 0° 39' W., bet. secs. 17 and 18. Over mountainous land through dense undergrowth. Asc. 165 ft. over SW. slope.</p>
16.00	High ridge, bears N. 45° W. and S. 45° E.; desc. 115 ft. over NE. slope.
30.00	Draw, drains irregularly E.; asc. 45 ft. over SE. slope
39.84	The ¼ sec. cor. of secs. 17 and 18, monumented with a sandstone, 10x8x3 ins., firmly set and plainly mkd. ¼ on W. face.
	<p>At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T9N R6E ¼ S18 S17 1970</p>
	<p>Bury stone cor. alongside iron post. Cor. located on E. slope, 50 lks. W. of draw, drains S.</p>
	<p>N. 0° 50' W., beginning new measurement. Asc. 100 ft. over SE. slope.</p>
18.50	Slope becomes abrupt; asc. 290 ft. over steep S. slope.
31.60	Top of steep ascent; asc. 10 ft. over gentle S. slope.
34.50	Trail road, on high ridge, bears E. and W.; desc. 30 ft. over N. slope.
39.21	The cor. of secs. 7, 8, 17, and 18, monumented with a sandstone, 18x8x6 ins., firmly set and plainly mkd. 5 notches on E. and 4 on S. edges.
	<p>At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T9N R6E</p> <p>$\frac{S7}{S18} \frac{S8}{S17}$</p> <p>1970</p> <p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>N. 89° 40' W., bet. secs. 8 and 17.</p> <p>Over mountainous land through dense undergrowth. Asc. 225 ft. over NE. slope.</p>
16.70	Trail road, bears N. and S.
35.30	<p>The ¼ sec. cor. of secs. 8 and 17, monumented with a sandstone, 15x10x5 ins., firmly set and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p>T9N R6E</p> <p>$\frac{1}{4} \frac{S8}{S17}$</p> <p>1970</p> <p>Bury stone cor. alongside the iron post.</p>
	<p>N. 89° 47' W., beginning new measurement.</p> <p>Asc. 365 ft. over E. slope.</p>
7.40	Fence, bears N. and S.
29.60	Fence, bears N. 45° W. and S. 45° E.; asc. 35 ft. over gentle NE. slope.
39.13	<p>The cor. of secs. 7, 8, 17, and 18.</p> <p>Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush, chokecherry and service berry.</p>
	N. 84° 26' W., bet. secs. 7 and 18.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
	Over mountainous land through sagebrush undergrowth. Asc. 10 ft. over NE. slope.	
5.70	Ridge, bears E., W., and N.; desc. 320 ft. over W. changing to SW. slope.	
10.00	Trail road, bears N. 45° W. and S. 45° E.	
42.29	Point for the ¼ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E	
	¼ $\frac{S7}{S18}$	
	1970	
	Raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.	
	Desc. 15 ft. along S. slope.	
44.00	Draw, drains irregularly; S.; asc. 185 ft. over E. slope.	
53.15	Spur, slopes S.; desc. 100 ft. over W. slope.	
58.75	Draw, drains S.; asc. 235 ft. over E. slope.	
70.75	Spur, slopes S.; desc. 140 ft. over W. slope.	
80.50	Draw, drains S.; asc. 150 ft. over E. slope.	
84.85	The cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with an iron post, 3 ins. diam., protruding 12 ins. above ground, with brass cap mkd.	
	T9N R5E R6E	
	S13 $\frac{S7}{S18}$	
	1914	
	Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush and service berry.	
	From the cor. of secs. 7, 8, 17, and 18.	
	N. 0° 48' E., bet. secs. 7 and 8.	
	Over mountainous land through sagebrush undergrowth. Desc. 400 ft. over N. slope.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
5.65	Fence, bears N. 62° W. and S. 62° E.
36.40	Draw, drains irregularly E.; asc. 10 ft. over S. slope.
39.76	Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R6E $\frac{1}{4}$ S7 S8
	1970
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Asc. 35 ft. over E. slope.
42.05	Spur, slopes E.; desc. 185 ft. over N. slope.
61.17	Fence, bears N. 60° W. and S. 60° E.; thence along fence bearing N.
74.00	Wash, drains S. 70° E.
79.52	The cor. of secs. 5, 6, 7, and 8, monumented with a sandstone, 12x12x4 ins., firmly set and plainly mkd. 5 notches on S. and E. edges, at cor. of fences, bears S. and E.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins in the ground, with brass cap mkd.
	T9N R6E S6 S5 S7 S8
	1970
	Bury stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, mountainous. Soil, clay loam. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 4, 5, 8, and 9.
	S. 89° 46' W., bet. secs. 5 and 8.
	Over mountainous land, through sagebrush undergrowth. Asc. 40 ft. over E. slope.
10.00	Ridge, bears N. and S.; desc. 350 ft. over SW. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS		
18.21	Fence, bears N. 54° E. and S. 54° W.	
36.92	Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E	
	¼ $\frac{S5}{S8}$	
	1970	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.	
	Desc. 125 ft. over SW. slope.	
62.70	Fence, bears N. 40° W. and S. 40° E.; thence along fence line, bears W.	
62.85	Dirt road, bears N. 40° W. and S. 40° E.	
65.00	Draw, drains S. 45° E.; asc. 20 ft. over NE. slope.	
73.84	The cor. of secs. 5, 6, 7, and 8.	
	Land, mountainous E. portion; rolling W. portion. Soil, clay loam. No timber. Undergrowth, sagebrush, grass and greasewood.	
	N. 84° 18' W., bet. secs. 6 and 7.	
	Over gently rolling land through sagebrush undergrowth.	
30.00	Wash, drains N. 70° E.	
39.70	Unimproved dirt road, bears N. 70° E. and S. 70° W.	
42.63	Point for the ¼ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T9N R6E	
	¼ $\frac{S6}{S7}$	
	1970	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.	
	Asc. 50 ft. over SE. slope.	
45.70	Top of ascent, slopes S.; desc. 50 ft. over SW. slope.	
58.00	Draw, drains S. 45° E.; asc. 25 ft. over NE. slope.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS	
76.50	Spur, slopes S. 40° E.; desc. 15 ft. along S. slope.
85.26	The cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with an iron post, 3 ins. diam., protruding 12 ins. above ground, with brass cap mkd.
T9N R5E R6E	
$S12 \begin{array}{ c} S6 \\ \hline S7 \end{array}$	
1914	
Land, rolling E. portion; mountainous W. portion. Soil, clay loam. No timber. Undergrowth, sagebrush and scattered service berry.	
From the cor. of secs. 5, 6, 7, and 8.	
N. 3° 07' W., bet. secs. 5 and 6.	
Over mountainous land, through sagebrush undergrowth. Desc. 20 ft. over NE. slope.	
5.00	Draw, drains S. 45° E.; asc. 155 ft. over S. slope.
9.50	Unimproved dirt road, bears N. 73° W. and S. 73° E.
17.30	Spur, slopes W.; desc. 75 ft. over N. slope.
31.00	Draw, drains S. 45° W.; asc. 120 ft. over SW. slope.
38.30	Top of ascent, slopes W.; desc. 10 ft. along W. slope.
44.16	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
T9N R6E $\frac{1}{4}$ S6 S5 1970	
Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.	
Asc. 175 ft. over SW. slope.	
62.30	Trail road, bears N. 67° E. and S. 67° W.
63.45	Ridge, bears E. and W.; desc. 260 ft. over NW. slope.
85.30	Draw, drains N. 80° W.; asc. 80 ft. over SE. slope.
93.30	The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., protruding 6 ins. above ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 9 N., R. 6 E., Salt Lake Meridian, Utah

CHAINS

T10N R6E
S31|S32
S6|S5

T9N
1964

Land, mountains.
Soil, clay loam.
No timber.
Undergrowth, sagebrush and scattered service berry.

General Description

Township 9 North, Range 6 East, is located 2 miles West of Woodruff, Utah. It is mostly mountainous land covered with dense sagebrush undergrowth and some scattered juniper and pinon timber with good meadow land along the bottom of Woodruff Creek. Soil is mostly clay loam. The area is drained in an easterly direction by Woodruff Creek and Birch Creek, which both have a good stream of water. The area is accessible by State Highway No. 39, which enters the township on the East boundary of section 13 and bears westerly through the township, leaving on the West boundary of section 19. There are numerous trail and unimproved dirt roads throughout the township. The elevation varies from about 6,000 to 7,000 ft. above sea level. There are several ranch houses and buildings located along Woodruff Creek.


Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Morris E. Blackburn	Surveying Technician
Stephen Cherry	Survey Aid
Frank H. Christensen	Survey Aid
Raymond Burgess	Survey Aid

Handwritten signature or initials

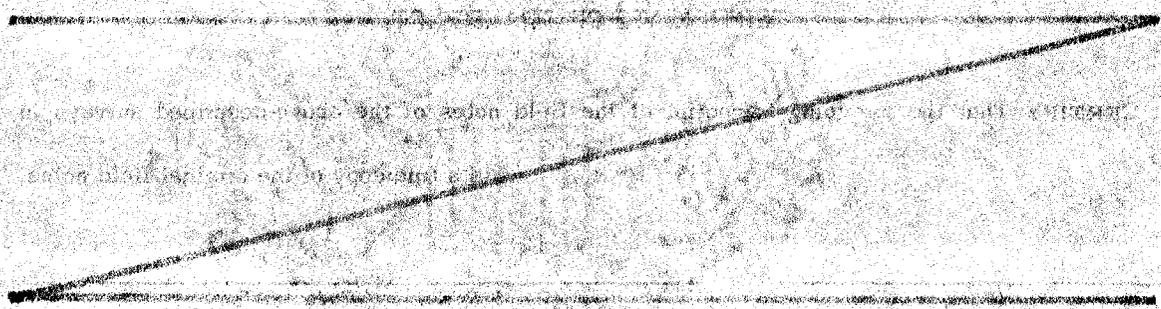

CERTIFICATE OF SURVEY

(DXXV) Glen B. Hatch, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 8th day of May, 1970, (DXXV) have dependently resurveyed a portion of the Second Standard Parallel North (South Boundary) and a portion of the Guide Meridian East (East Boundary) and a portion of the subdivisional lines of Township 9 North, Range 6 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (DXXV) and under (my) (DXXV) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 9, 1978 (Date) [Signature: Glen B. Hatch] (Cadastral Surveyor) Supervisory (Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Washington, D.C. Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the Second Standard Parallel North (South Boundary) and a portion of the Guide Meridian East (East Boundary) and a portion of the subdivisional lines of Township 9 North, Range 6 East, Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

APR 16 1980 (Date) [Signature: J. W. ...] (Chief, Cadastral Survey Examination and Approval Staff)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE NORTH BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SURVEY OF THE SUBDIVISION OF SECTIONS 1, 12 AND 13

OF

TOWNSHIP 19 SOUTH, RANGE 2 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated March 7, 19 80, approved March 7, 1980,
and Supplemental Special Instructed dated July 2, 1980, and approved July 2, 1980.

_____, which provided for the surveys included under U.S. Survey/Group
Number 597, and assignment instructions dated April 2, 19 80.

Survey commenced June 1, 19 80

Survey completed August 5, 19 80

INDEX DIAGRAM

Township 19 South, Range 2 West

					5	
6	5	4	3	2	1	4
					10	
7	8	9	10	11	12	3
					9	
18	17	16	15	14	13	2
					9	
19	20	21	22	23	24	1
30	29	28	27	26	25	
31	32	33	34	35	36	

Subdivision of Section 1
 Subdivision of Section 12
 Subdivision of Section 13

Page 10
 Page 11
 Page 12

Township 19 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

The east boundary and a portion of the subdivisional lines were surveyed by H.D. Heist and E.V. Woolley in 1906. The north boundary was surveyed by S.M. Richardson in 1883 and resurveyed by H.D. Heist and E.V. Woolley in 1906.

The following field notes are those of a dependent resurvey of a portion of the east boundary, a portion of the north boundary and a portion of the subdivisional lines, and the survey of the subdivision of sections 1, 12 and 13 of Township 19 South, Range 2 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group 597, Utah, dated March 7, 1980, and Supplemental Special Instructions dated July 2, 1980.

The directions of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Measurements were determined by electronic means.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position for the southeast corner of sec. 24, as scaled from United States Geological topographic map "Scipio South" is as follows:

Latitude $39^{\circ} 08.3' N.$ Longitude $112^{\circ} 00.8' W.$

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be $15^{\circ} 30' E.$

Dependent Resurvey of a Portion of the East Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

(Restoring the Survey Executed by
H.D. Heist and E.V. Woolley in 1906)

Beginning at the cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with a broken sandstone, 16 x 8 x 8 ins., plainly mkd. 4 notches on the N edge, other marks weathered away, from which the original bearing trees

A pinon, 8 ins. diam., bears S. $58^{\circ} W.$, 22 lks.
dist., mkd. T19S R2W S25 BT.

Dependent Resurvey of a Portion of the East Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

A cedar, 7 ins. diam., bears N. 46° W., 15 lks.
dist., mkd. T19S R2W S24 BT.

At the corner point

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, and in a collar of stone, with cap mkd.

T 19 S
R 2 W R $1\frac{1}{2}$ W

S 24 | S 22
S 25 |

1980

Bury the mkd. stone alongside the aluminum post.

N. $1^{\circ} 05'$ W., along the E. bdy. of sec. 24.

Over broken mountain land, along general E slope.

31.40 Ridge, bears SW and N irregular, thence along ridge.

40.14 Point for the $\frac{1}{4}$ sec. cor. of sec. 24 only, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base, to top of cap, mkd.

T 19 S
R 2 W R $1\frac{1}{2}$ W

$\frac{1}{4}$ |
|
S 24 |

1980

Continue over ridge.

49.10 Leave ridge, which bears NW, thence along general E slope.

80.28 Point for the cor. of secs. 13 and 24 only, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of cap, mkd.

T 19 S
R 2 W R $1\frac{1}{2}$ W

S 13 | S 15
S 24 |

1980

N. $1^{\circ} 05'$ W., along the E. bdy. of sec. 13.

Over broken mountain land, covered with juniper and
pinon; along general E slope.

Dependent Resurvey of a Portion of the East Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
40.14	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 13 only, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post. 28 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.</p> <p style="text-align: center;">T 19 S R 2 W R $1\frac{1}{2}$ W</p> <p style="text-align: center;">$\frac{1}{4}$ S 13 </p> <p style="text-align: center;">1980</p> <p>Continue over broken mountain land, draining E.</p>	
49.31	<p>The closing cor. of secs. 10 and 15, T. 19 S., R. $1\frac{1}{2}$ W., bears East 0.53 chs. dist., monumented with a sandstone, 10 x 8 x 8 ins., above ground, mkd. 2 notches on N and 4 notches on S edges, and CC on E face.</p>	
80.28	<p>Point for the cor. of secs. 12 and 13 only, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with cap mkd.</p> <p style="text-align: center;">T 19 S R 2 W R $1\frac{1}{2}$ W</p> <p style="text-align: center;">S 12 S 13 S 10</p> <p style="text-align: center;">1980</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	
	<p>N. $1^{\circ} 05'$ W., along the E. bdy. of sec. 12.</p> <p>Over broken mountain land, covered with juniper and pinon, draining E.</p>	
40.14	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 12 only, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.</p> <p style="text-align: center;">T 19 S R 2 W R $1\frac{1}{2}$ W</p> <p style="text-align: center;">$\frac{1}{4}$ S 12 </p> <p style="text-align: center;">1980</p> <p>Continue over mountainous land, draining E.</p>	

Dependent Resurvey of a Portion of the East Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

<p>CHAINS 80.28</p>	<p>Point for the cor. of secs. 1 and 12 only, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of cap, mkd.</p> <p style="text-align: center;">T 19 S R 2 W R 1½ W</p> <p style="text-align: center;">S 1 S 12 S 3</p> <p style="text-align: center;">1980</p>
<p>40.14</p>	<p>N. 1° 05' W., along the E. bdy. of sec. 1.</p> <p>Over broken mountain land, draining E.</p> <p>Point for the ¼ sec. cor. of sec. 1 only, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of cap, mkd.</p> <p style="text-align: center;">T 19 S R 2 W R 1½ W</p> <p style="text-align: center;">¼ S 1 </p> <p style="text-align: center;">1980</p> <p>Continue over broken mountain land, draining E.</p>
<p>80.38</p>	<p>The cor. of Tps. 18 and 19 S., R. 2 W. only, monumented with a sandstone, 12 x 12 x 8 ins., set in a mound of stone, plainly mkd. 6 notches on 3 edges, from which the original bearing trees</p> <p style="padding-left: 40px;">A pine, 12 ins. diam., bears S. 45° W., 33 lks. dist., dim scribe marks. (Record, N. 5° E., 14 lks. dist.)</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 45° W., 28 lks. dist., dim scribe marks. (Record, S. 80° E., 16 lks. dist.)</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of cap, mkd.</p> <p style="text-align: center;">T 18 S R 2 W T 18 S</p> <p style="text-align: center;">S 36 R 1½ W S 1 S 34</p> <p style="text-align: center;">T 19 S R 2 W 1980</p>

Dependent Resurvey of a Portion of the East Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Bury the mkd. stone alongside the aluminum post.

Dependent Resurvey of a Portion of the North Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

(Restoring the Survey Executed by
S.M. Richardson in 1883 and the Resurvey
Executed by H.D. Heist and E.V. Woolley in 1906)

From the cor. of Tps. 18 and 19 S., R. 2 W.

S. 89° 54' W., bet. secs. 1 and 36.

Over broken mountain land, draining E.

39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.

T 18 S R 2 W

$\frac{1}{4}$ $\frac{S\ 36}{S\ 1}$

T 19 S R 2 W
1980

Continue over broken mountain land.

59.95 Point for the W $\frac{1}{16}$ sec. cor. of secs. 1 and 36.

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.

T 18 S R 2 W

W $\frac{1}{16}$ $\frac{S\ 36}{S\ 1}$

T 19 S R 2 W
1980

79.94 The cor. of secs. 1, 2, 35, and 36, monumented with a broken sandstone, 24 x 12 x 12 ins. mkd. 1 notch on E edge and 5 notches on W edge, also old mound of stone.

At the corner point

Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of cap, mkd.

Dependent Resurvey of a Portion of the North Boundary,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

T 18 S R 2 W

S 35	S 36
S 2	S 1

T 19 S R 2 W
1980

Place the mkd. stone in mound alongside aluminum post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 19 S., R. 2 W., Salt Lake Meridian, Utah

(Restoring the Survey Executed by
H.D. Heist and E.V. Woolley in 1906)

From the cor. of secs. 13, 14, 23, and 24, monumented
with a sandstone, 20 x 12 x 8 ins., firmly set 8 ins.
in the ground, plainly mkd. 3 notches on S and 1 notch
on E edges, from which the original bearing trees

A dead pinon, 6 ins. diam., bears N. 23° E., 23
lks. dist., mkd. T19S R2W S13 BT.

A dead pinon, lying on the ground, 6 ins. diam.,
bears S. 33° E., 24 lks. dist., mkd. T19S R2W
S24 BT. (Record, S. 35° E., 23 lks. dist.)

A pinon, 12 ins. diam., bears S. 15° W., 21 lks.
dist., mkd. T19S R2W S23 BT. (Record, 22 lks.)

A dead pinon, 6 ins. diam., bears N. 72° W., 11
lks. dist., mkd. T19S R2W S14 BT.

At the corner point

Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with cap mkd.

T 19 S R 2 W

S 14	S 13
S 23	S 24

1980

Bury the mkd. stone alongside the aluminum post.

N. 0° 01' W., bet. secs. 13 and 14, along sectional
guide meridian.

Over broken and mountainous land, draining W.

40.15 The 1/4 sec. cor. of secs. 13 and 14, monumented with a
sandstone, 20 x 8 x 6 ins., firmly set 10 ins. in the
ground and plainly mkd. 1/4 on W face, from which the
original bearing trees

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

A dead pinon, 12 ins. diam., bears N. 5° 30' E.,
22 lks. dist., mkd. S13 BT. (Record, N. 9° E.,
21 lks.)

A pinon, 10 ins. diam., bears S. 65° 45' W., 54
lks. dist., mkd. S14 BT. (Record, S. 64° W.,
53 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 19 S R 2 W

½
|
S 14 | S 13
|

1980

Bury the mkd. stone alongside the iron post and raise
a mound of stone, 2 ft. high, 2 ft. base, W of cor.

N. 0° 05' W., beginning new measurement.

Continue over mountainous land.

3.80 Ridge, bears E and W; desc. over N slope.

19.50 Graded dirt road, bears E and W.

20.01 Point selected for the witness point bet. secs. 13 and
24.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, and in a collar of stone, with cap mkd.

W P
T 19 S R 2 W

S 14 | S 13

1980

Over mountainous land, draining W.

40.06 Point for the cor. of secs. 11, 12, 13, and 14, at pro-
portionate distance; there is no remaining evidence of
the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base, to top of brass cap, mkd.

T 19 S R 2 W

S 11 | S 12
S 14 | S 13

1980

Cor. is located 30 lks. E of wash.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
37.00	<p>N. 0° 05' W., bet. secs. 11 and 12, along Sectional Guide Meridian.</p> <p>Over broken and mountainous land, draining W.</p> <p>Spur, slopes E; over mountain land draining E.</p>
40.06	<p>Point for the ¼ sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.</p> <div style="text-align: center;"> <p>T 19 S R 2 W</p> <p>¼</p> <p>S 11 S 12</p> <p>1980</p> </div>
80.12	<p>Continue over mountain land, draining E.</p> <p>Point for the cor. of secs. 1, 2, 11, and 12, at proportionate distance based on the irregular boundary method; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of cap, mkd.</p> <div style="text-align: center;"> <p>T 19 S R 2 W</p> <p>S 2 S 1</p> <p>S 11 S 12</p> <p>1980</p> </div>
40.06	<p>N. 0° 05' E., bet. secs. 1 and 2, along Sectional Guide Meridian.</p> <p>Over broken mountain land, draining E.</p> <p>Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap mkd.</p> <div style="text-align: center;"> <p>T 19 S R 2 W</p> <p>¼</p> <p>S 2 S 1</p> <p>1980</p> </div> <p>Continue over mountain land.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
80.22	The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., heretofore described.
44.37	<p>From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., heretofore described.</p> <p>N. 89° 51' W., bet. secs. 13 and 24.</p> <p>Over broken mountainous land.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with cap mkd.</p> <p style="text-align: center;">T 19 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 13}{S\ 24}$</p> <p style="text-align: center;">1980</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 83° 30' E., 30 lks. dist., mkd. $\frac{1}{4}$ S13 BT.</p> <p>Continue over mountainous land.</p>
84.43	The cor. of secs. 13, 14, 23, and 24.
17.00	<p>From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., heretofore described.</p> <p>N. 89° 54' W., bet. secs. 12 and 13.</p> <p>Over broken mountainous land, draining E.</p> <p>Wide ridge, bears N and S; over land draining W.</p>
42.90	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 19 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 12}{S\ 13}$</p> <p style="text-align: center;">1980</p> <p>Set steel fence post alongside corner, which is located in small valley.</p>
82.97	The cor. of secs. 11, 12, 13, and 14.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., heretofore described.
	West, bet. secs. 1 and 12.
	Over broken mountainous land, draining E.
35.00	Ridge, bears N and S; over land draining W.
41.43	Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, at proportionate distance; there is no remaining evidence of the original corner.
	Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of cap, mkd.
	T 19 S R 2 W
	$\frac{1}{4}$ $\frac{S 1}{S 12}$
	1980
	Desc. over W slope.
53.50	Bottom of small valley, drains S; asc. over E slope.
61.50	Point for the W $\frac{1}{16}$ sec. cor. of secs. 1 and 12.
	Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, in a mound of stone, 5 ft. base, to top of cap, mkd.
	T 19 S R 2 W
	W $\frac{1}{16}$ $\frac{S 1}{S 12}$
	1980
81.57	The cor. of secs. 1, 2, 11, and 12.
Subdivision of Section 1, T. 19 S., R. 2 W., Salt Lake Meridian, Utah	
	From the $\frac{1}{4}$ sec. cor. of secs. 1 and 12.
	N. $0^{\circ} 02'$ W., on the N and S center line of sec. 1.
	Over broken and mountainous land.
40.10	Point for the center $\frac{1}{4}$ sec. cor. of sec. 1, at intersection with the E and W center line.
	Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top of cap, mkd.
	T 19 S R 2 W
	$C\frac{1}{4}$ S 1
	1980

Subdivision of Section 1,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
80.29	The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., heretofore described.	
	<p>From the $\frac{1}{4}$ sec. cor. of sec. 1 only, on the E. bdy. of the Tp., heretofore described.</p> <p>S. $89^{\circ} 57'$ W., on the E and W center line of sec. 1.</p> <p>Over broken and mountainous land.</p>	
40.70	The center $\frac{1}{4}$ sec. cor. of sec. 1.	
60.73	<p>Point for the center west 1/16 sec. cor. of sec. 1.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with cap mkd.</p> <p style="text-align: center;">T 19 S R 2 W W 1/16</p> <p style="text-align: center;">C ————— C</p> <p style="text-align: center;">S 1 1980</p>	
80.76	The $\frac{1}{4}$ sec. cor. of secs. 1 and 2.	
	<p>From the center west 1/16 sec. cor. of sec. 1.</p> <p>N. $0^{\circ} 01'$ E., on the N and S center line of the NW$\frac{1}{4}$ of sec. 1.</p>	
40.18	The W 1/16 sec. cor. of sec. 1 on the N. bdy. of the Tp., heretofore described.	
	<p>From the W 1/16 sec. cor. of secs. 1 and 12.</p> <p>N. $0^{\circ} 01'$ E., on the N and S center line of the SW$\frac{1}{4}$ of sec. 1.</p>	
40.08	The center west 1/16 sec. cor. of sec. 1.	
	<p style="text-align: center;">Subdivision of Section 12, T. 19 S., R. 2 W., Salt Lake Meridian, Utah</p> <p>From the $\frac{1}{4}$ sec. cor. of secs. 12 and 13.</p> <p>N. $0^{\circ} 02'$ W., on the N and S center line of sec. 12.</p> <p>Over brush covered land of small valley.</p> <p>40.10 Point for the center $\frac{1}{4}$ sec. cor. of sec. 12, at intersection with E and W center line.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Subdivision of Section 12,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
80.20	<p style="text-align: center;">T 19 S R 2 W C$\frac{1}{4}$ S 12 1980</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 1 and 12.</p>
42.16	<p>From the $\frac{1}{4}$ sec. cor. of sec. 12 only, on the E. bdy. of the Tp., heretofore described.</p> <p>N. 89° 57' W., on the E and W center line of sec. 12.</p> <p>Over broken mountainous land.</p>
82.27	<p>The center $\frac{1}{4}$ sec. cor. of sec. 12.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 11 and 12.</p>
<p>Subdivision of Section 13, T. 19 S., R. 2 W., Salt Lake Meridian, Utah</p>	
8.87	<p>From the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.</p> <p>N. 0° 02' W., on the N and S center line of sec. 13.</p> <p>Over broken mountain land; desc. over N slope.</p> <p>Old fence, bears N. 89° 40' E., 6.10 chs. to fence cor., and S. 89° 40' W., to hills. Enter small brush covered valley.</p>
40.14	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 13, at intersection with E and W center line.</p> <p>Set an aluminum post, 28 ins. long, 2$\frac{1}{4}$ ins. diam., 24 ins. in the ground, with cap mkd.</p>
49.84	<p style="text-align: center;">T 19 S R 2 W C$\frac{1}{4}$ S 13 1980</p> <p>Set cedar post alongside corner.</p> <p>Old fence, bears S. 81° 53' E., 6.28 chs. to approximate intersection with old N and S fence line, and N. 81° 53' W. to hills.</p>
80.24	<p>The $\frac{1}{4}$ sec. cor. of secs. 12 and 13.</p>
<p>From the $\frac{1}{4}$ sec. cor. of sec. 13 only, on the E. bdy. of the Tp., heretofore described.</p> <p>N. 89° 50' W., on the E and W center line of sec. 13.</p>	

Subdivision of Section 13,
T. 19 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	Over broken mountain land.
37.45	Old fence, bears N. 0° 08' E., 8.83 chs. dist., to intersection with old E and W fence line, and S. 0° 08' W., 31.21 chs. dist., to fence corner. Enter brush covered valley.
43.64	The center $\frac{1}{4}$ sec. cor. of sec. 13.
83.68	The $\frac{1}{4}$ sec. cor. of secs. 13 and 14.
<p>General Description</p> <p>The portion of T. 19 S., R. 2 W., covered by this survey consists of broken mountain land, covered with pinon, juniper and mahogany trees, with scattered patches of oak brush. There is a small valley extending N and S through secs. 1, 12 and 13. There is a gravel road from State Highway #63 to the SW$\frac{1}{4}$ of sec. 13, where preparations for drilling an oil well are in progress. No permanent water was noted during the survey.</p>	

CERTIFICATE OF SURVEY

(IXX), Craig P. Sylvester, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 7th day of March, 1980, and Supplemental Special Instructions dated July 2, 1980, (IXX) have dependently resurveyed a portion of the east boundary, a portion of the north boundary and a portion of the subdivisional lines, and subdivided sections 1, 12, and 13 of T. 19 S., R. 2 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (IXX) and under (my) (IXX) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

September 15, 1980 (Date)

Craig P. Sylvester (Cadastral Surveyor) Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the east boundary, a portion of the north boundary and a portion of the subdivisional lines, and the subdivision of sections 1, 12 and 13 of T. 19 S., R. 2 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

SEP 23 1980 (Date)

J. Voorhees (Chief, Cadastral Survey Examination and Approval Staff)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Cadastral Survey Examination and Approval Staff)

INDEX DIAGRAM

Township 15 S., Range 7 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15 6	14 5	13 3
19	20	21 5	22 4 5	23 3 4	24 1 3
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Sec. 22
IPP Boundary

Page 6
Page 6

Township 15 South, Range 7 West, Salt Lake Meridian, Utah

CHAINS

The east boundary was surveyed by Joseph Gorlinski in 1873 and dependently resurveyed by Alvin C. Alberga in 1940. The subdivisional lines were surveyed by Joseph Gorlinski in 1873 and dependently resurveyed by Ralph Gentry and Alvin C. Alberga in 1940.

The following field notes are those of a dependent resurvey of portions of the east boundary and subdivisional lines, and survey of the subdivision of section 22, and a portion of the IPP project through sections 22, 23, and 24 of T. 15 S., R. 7 W., Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1973, and the Special Instructions for Group No. 596, Utah, dated January 24, 1980.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Measurements were determined by electronic means along survey lines.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The geographic position for the southeast corner of sec. 24, as determined by ties to U.S.G.S. Triangulation Station "Sec. cor. 17, 18, 19, and 20, T. 15 S., R. 6 W., is as follows:

Latitude $39^{\circ}29'39.74''$ N. Longitude $112^{\circ}34'25.41''$ W.

The magnetic declination was read at a number of stations and the average of the several readings was found to be $16^{\circ}00'$ E.

Dependent Resurvey of a Portion of the East Boundary,
T. 15 S., R. 7 W., Salt Lake Meridian, Utah

(Restoring the 1940 Resurvey by Alvin C. Alberga)

Beginning at the point for the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., as determined by proportionate distance; there is no remaining evidence of the original corner. This point falls on gravel shoulder on N side of county road and cannot be monumented with regulation marker.

Drove a copperweld rod, 12 ins. below surface, with brass cap mkd.

Dependent Resurvey of a Portion of the East Boundary,
T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

T 15 S
R 7 W R 6 W

S 24	S 19
S 25	S 30

1980

from which

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° E., 181.8 lks. dist., with brass cap mkd. RM T15S R6W S19 120 FT 1980 and an arrow pointing to the corner.

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° W., 181.8 lks. dist., with brass cap mkd. RM T15S R7W S24 120 FT 1980 and an arrow pointing to the corner.

From the corner point the ¼ sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., bears S. 0° 05' W., 40.08 chs. dist., monumented with a iron post. 1 in. diam., extending 10 ins. above ground, with brass cap mkd. as described in official record of the 1940 resurvey.

N. 0° 05' E., bet. secs. 19 and 24.

Over nearly level brush covered desert land.

1.32 Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R027, RLS 3322, Power System.

40.08 The ¼ sec. cor. of secs. 19 and 24, monumented with an iron post, 1 in. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the E. bdy.

N. 0° 08' E., beginning new measurement.

Continue over brush covered desert land.

40.09 The cor. of secs. 13, 18, 19, and 24, monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the E. bdy.

From this cor. the cor. of secs. 17, 18, 19, and 20, T. 15 S., R. 6 W., bears N. 89° 51' 50" E., 80.108 chs. dist., monumented with an iron post 2 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1940 resurvey.

This cor. is identical with U.S.G.S. triangulation station, SEC COR 18/15S/6W at

Lat. 39° 30' 31.902" N. Long. 112° 33' 17.836" W.

Dependent Resurvey of a Portion of the Subdivisional
Lines of T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of the Subdivisional
Lines of T. 15 S., R. 7 W., Salt Lake Meridian, Utah

(Restoring the Survey by Joseph Gorlinski in 1873 and the
Resurvey by Ralph Gentry and Alvin C. Alberga in 1940)

From the cor. of secs. 19, 24, 25, and 30, on the E. bdy.
of the Tp., heretofore described.

S. 89° 56' W., bet. secs. 24 and 25.

Over hard surface highway.

0.84 Center line of hard surface county road, bears
N. 71° 35' W., and S. 71° 35' E.

39.92 The ¼ sec. cor. of secs. 24 and 25, monumented with an
iron post, 1 in. diam., extending 10 ins. above ground,
with brass cap mkd. as described in the official record
of the 1940 resurvey of the subdivisional lines.

S. 89° 56' W., beginning new measurement.

39.95 The cor. of secs. 23, 24, 25, and 26, monumented with an
iron post, 2 ins. diam., extending 10 ins. above ground,
with brass cap mkd. as described in the official record
of the 1940 resurvey of the subdivisional lines.

N. 0° 10' W., bet. secs. 23 and 24.

Over brush covered desert land.

26.46 Center line of hard surface county road, bears
N. 71° 35' W. and S. 71° 35' E.

28.055 Boundary marker for IPP project, monumented with an
aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey
Point No. R030, RLS 3322, Power System.

40.05 The ¼ sec. cor. of secs. 23 and 24, monumented with an
iron post, 1 in. diam., extending 10 ins. above ground,
with brass cap mkd. as described in the official record
of the 1940 resurvey of the subdivisional lines.

N. 0° 10' W., beginning new measurement.

39.99 The cor. of secs. 13, 14, 23, and 24, monumented with an
iron post, 2 ins. diam., extending 10 ins. above
ground, with brass cap, mkd. as described in the official
record of the 1940 resurvey of the subdivisional lines.

From the cor. of secs. 13, 18, 19, and 24, on the E.
bdy. of the Tp., heretofore described.

S. 89° 50' W., bet. secs. 13 and 24.

Dependent Resurvey of a Portion of the Subdivisional
Lines of T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS		
40.13	<p>Over nearly level brush covered desert land.</p> <p>The ¼ sec. cor. of secs. 13 and 24, monumented with an iron post, 1 in. diam., extending 9 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>	
40.11	<p>S. 89° 50' W., beginning new measurement.</p> <p>The cor. of secs. 13, 14, 23, and 24.</p>	
40.18	<p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>N. 89° 43' W., bet. secs. 23 and 26.</p> <p>Over nearly level desert land, covered with brush.</p> <p>The ¼ sec. cor. of secs. 23 and 26, monumented with an iron post, 1 in. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>	
40.20	<p>N. 89° 43' W., beginning new measurement.</p> <p>The cor. of secs. 22, 23, 26, and 27, monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>	
40.13	<p>N. 0° 08' E., bet. secs. 22 and 23.</p> <p>Over nearly level brush covered desert land.</p> <p>The ¼ sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., extending 9 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>	
12.63	<p>N. 0° 07' E., beginning new measurement.</p> <p>Center line of hard surface county road, bears N. 71° 35' W. and S. 71° 35' E.</p>	
14.23	<p>Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P. Survey Point No. R033, RLS 3322, Power System.</p>	
40.08	<p>The cor. of secs. 14, 15, 22, and 23, monumented with an iron post, 2 ins. diam., set in concrete, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines of T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS	
39.97	<p>From the cor. of secs. 13, 14, 23, and 24. N. 89° 37' W., bet. secs. 14 and 23. Over nearly level brush covered desert land.</p> <p>The ¼ sec. cor. of secs. 14 and 23, monumented with an iron post, 1 in. diam., set in concrete, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p> <hr/> <p>N. 89° 37' W., beginning new measurement.</p>
39.97	<p>The cor. of secs. 14, 15, 22, and 23.</p> <hr/> <p>From the cor. of secs. 22, 23, 26, and 27. S. 89° 59' W., bet. secs. 22 and 27. Over nearly level brush covered desert land.</p> <p>The ¼ sec. cor. of secs. 22 and 27, monumented with an iron post, 1 in. diam., extending 9 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p> <hr/> <p>S. 89° 59' W., beginning new measurement.</p>
40.23	<p>The cor. of secs. 21, 22, 27, and 28, monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p> <hr/> <p>N. 0° 01' E., bet. secs. 21 and 22. Over nearly level desert land.</p>
40.04	<p>The ¼ sec. cor. of secs. 21 and 22, monumented with an iron post, 1 ins. diam., extending 9 ins. above ground, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p> <hr/> <p>N. 0° 01' E., beginning new measurement.</p>
38.42	<p>Center line of hard surface county road, on curve from SE to west.</p>
39.95	<p>Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R036, RLS, 3322, Power System.</p>
40.04	<p>The cor. of secs. 15, 16, 21, and 22, monumented with an iron post, set in concrete, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p>

Dependent resurvey of a Portion of the Subdivisional Lines of T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS		
40.31	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>S. 89° 53' W., bet. secs. 15 and 22.</p> <p>Over nearly level brush covered desert land.</p> <p>The ¼ sec. cor. of secs. 15 and 22, monumented with an iron post, 1 in. diam., set in concrete, with brass cap mkd. as described in the official record of the 1940 resurvey of the subdivisional lines.</p> <hr/> <p>S. 89° 53' W., beginning new measurement.</p>	
40.29	<p>The cor. of secs. 15, 16, 21, and 22.</p>	
<p>Subdivision of Section 22, T. 15 S., R. 7 W., Salt Lake Meridian, Utah</p>		
40.08	<p>From the ¼ sec. cor. of secs. 22 and 27.</p> <p>N. 0° 03' 30" E., on the N and S center line of sec. 22.</p> <p>Point for the center ¼ sec. cor. of sec. 22, at intersection with the E and W center line.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with cap mkd.</p> <p style="text-align: center;">T 15 S R 7 W C ¼ S 22 1980</p>	
66.17	<p>Center line of hard surface county road, bears N. 71° 35' W. and S. 71° 35' E.</p>	
67.775	<p>Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R034 RSL 3322, Power System.</p>	
80.15	<p>The ¼ sec. cor. of secs. 15 and 22.</p>	
40.28	<p>From the ¼ sec. cor. of secs. 22 and 23.</p> <p>S. 89° 55' W., on the E and W center line of sec. 22.</p> <p>The center ¼ sec. cor. of sec. 22.</p>	
80.53	<p>The ¼ sec. cor. of secs. 21 and 22.</p>	
<p>Portion of the IPP Project Boundary Through Sections 22, 23, and 24, T. 15 S., R. 7 W., Salt Lake Meridian, Utah</p>		

Portion of the IPP Project Boundary
Through Sections 22, 23, and 24,
T. 15 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS	
	From IPP project marker No. R027, bet. secs. 19 and 24, on the E. bdy. of the Tp., heretofore described.
	N. 71° 35' W., through sec. 24, on the boundary of the IPP power project.
42.09	Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R028, RLS 3322, Power System.
67.16	Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R029, RLS 3322, Power System.
84.26	Boundary marker No. R030, for IPP project, bet. secs. 23 and 24, heretofore described.
	N. 71° 35' W., through sec. 23, on the boundary of the IPP Power Project.
42.28	Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R031, RLS 3322, Power System.
84.49	Boundary marker No. R033, for IPP project, bet. secs. 22 and 23, heretofore described.
	N. 71° 35' W., through sec. 22, on the boundary of the IPP Power Project.
42.44	Boundary marker No. R034, for IPP project, on the N and S center line of sec. 22, heretofore described.
70.47	Boundary marker for IPP project, monumented with an aluminum cap, set in concrete, mkd. L.A.D.W.P., Survey Point No. R035, RLS 3322, Power System.
	N. 76° 05' W., beginning new measurement.
14.08	Boundary marker No. R036, for IPP project, bet. secs. 21 and 22, heretofore described.
	General Description
	Township 15 South, Range 7 West, is located about 10 miles west of Lynndyl, Utah. The portion of the township covered by this survey consists of nearly level brush covered land, there is no timber, permanent water or habitation within the township. A hard surface county road runs diagonal across secs. 22, 23, and 24.

CERTIFICATE OF SURVEY

(I) ~~W&X~~ Craig P. Sylvester, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 24th day of January, 1980, (I) ~~W&X~~ have dependently resurveyed portions of the east boundary and subdivisional lines, and surveyed the subdivision of section 22, and the portion of the IPP project boundary through sections 22, 23, and 24, T. 15 S., R. 7 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~W&X~~ and under (my) ~~W&X~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 14, 1980 (Date) [Signature] (Cadastral Surveyor) Supervisory (Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Denver, Colorado

The foregoing field notes of the dependent resurvey of portions of the east boundary and subdivisional lines, and survey of the subdivision of section 22, and the portion of the IPP project boundary through sections 22, 23, and 24, T. 15 S., R. 17 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 17 1980 (Date) [Signature] (Chief, Cadastral Survey Examination and Approval Staff) ACTING

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) (Chief, Cadastral Survey Examination and Approval Staff)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

A600

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY
OF A PORTION OF THE EAST BOUNDARY
AND THE SUBDIVISIONAL LINES
OF
SECTIONS 25 AND 26,
WITH A SUBDIVISION
OF
SECTIONS 25 AND 26
TOWNSHIP 42 SOUTH, RANGE 7 WEST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Gary L. Kratz Supervisory Cadastral Surveyor

Under special instructions dated January 18, 1980, approved January 18, 1980,

_____, which provided for the surveys included under U.S. Survey/Group
Number 595, and assignment instructions dated January 21, 1980.

Survey commenced February 5, 1980
Survey completed February 27, 1980

INDEX DIAGRAM

Township 42 S., Range 7 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27 8	26 3	25 1
				6	2
31	32	33	34	35	36

Subdivision of Section 25
 Subdivision of Section 26

Page 10
 Page 12

Township 42 South, Range 7 West, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary and the subdivisional lines of sections 25 and 26, with a subdivision of sections 25 and 26, Township 42 South, Range 7 West, Salt Lake Meridian, Utah.

The east boundary was surveyed by A. B. Lewis in 1896. The south, west and north boundaries and the subdivisional lines were surveyed by J.H. Clark in 1907. The north boundary, the north one mile of the west boundary and the boundaries of sections 3, 4, 5, and 6, were resurveyed by A. Nelson in 1924. The east boundary was resurveyed by Craig P. Sylvester in 1977.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Special Instructions for Group No. 595, Utah, dated January 18, 1980.

The directions of the lines refer to the true meridian determined by angles from azimuths obtained by direct hour angle observations on Polaris and only true line bearings are given in these field notes.

Preliminary to this survey, the lines of the previous surveys were retraced and a diligent search was made for any evidence of original corners, monuments, bearing trees and other calls of the official field note records. When duly identified, the corner positions were remonumented and new accessories obtained.

The geographic position of the southeast corner of section 25, as scaled from the U.S. Geological Survey quadrangle map, "Kanab, Utah - Arizona", prepared in 1957, is as follows:

Latitude $37^{\circ}07.4'N$. Longitude $112^{\circ}34.4'W$.

The mean magnetic declination is $14^{\circ}E$.

Dependent Resurvey of a Portion of the East Boundary,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
A.B. Lewis in 1896 and the Resurvey Executed by
Craig P. Sylvester in 1977)

Beginning at the cor. of secs. 25, 30, 31, and 36, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set projecting 8 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of the W. bdy. of T. 42 S., R. 6 W., from which the original bearing trees

A cedar, 10 ins. diam., bears N. $44\frac{1}{2}^{\circ}E$., 70 lks.
dist., mkd. T42S R6W S30 BT.

A cedar, 16 ins. diam., bears S. $69^{\circ}E$., 51 lks.
dist., mkd. T42S R6W S31 BT.

A cedar, 12 ins. diam., bears S. $78\frac{1}{2}^{\circ}W$., 172 lks.
dist., mkd. T42S R7W S36 BT.



Dependent Resurvey of a Portion of the East Boundary,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS	
	<p>A pine, 14 ins. diam., bears N. 33° W., 86 lks. dist., mkd. T42S R7W S25 BT.</p> <p>North, bet. secs. 25 and 30.</p>
18.50	Cave Lakes Canyon, drains E.
19.75	Dirt road bears NE and SW.
20.015	Point for the S 1/16 sec. cor. of secs. 25 and 30; not monumented.
40.03	<p>The 1/4 sec. cor. of secs. 25 and 30, monumented with an iron post, 2 1/2 ins. diam., firmly set projecting 8 ins. above ground, with brass cap mkd. as described in the official record. of the 1977 resurvey of the W. Bdy. of T. 42 S., R. 6 W., from which the original bearing trees</p> <p>A cedar, 12 ins. diam., bears S. 76° 20' E., 44 lks. dist., mkd. 1/4 S BT.</p> <p>A cedar, 14 ins. diam., bears S. 65° 20' W., 37 lks. dist., mkd. 1/4 S BT.</p>
<p>Dependent Resurvey of the Subdivisional Lines of Sections 25 and 26, T. 42 S., R. 7 W., Salt Lake Meridian, Utah</p>	
<p>Reestablishment of the Survey Executed by J.H. Clark in 1907</p>	
	<p>From the cor. of secs. 25, 30, 31, and 36.</p> <p>S. 89° 36' W., bet. secs. 25 and 36.</p>
20.035	Point for the E 1/16 sec. cor. of secs. 25 and 36; not monumented.
40.07	<p>The 1/4 sec. cor. of secs. 25 and 36, monumented with a sandstone, 16 x 10 x 4 ins., firmly set 10 ins. in the ground, plainly mkd. 1/4 on the N face, alongside which is a squared wooden post, 4 x 4 x 24 ins., firmly set, 6 ins. in the ground, mkd. 1/4 S25 on the N side and S36 on the S side, from which the original bearing trees</p> <p>A juniper, 14 ins. diam., bears S. 12° E., 62 lks. dist., mkd. 1/4 S36 BT. (Record, S. 2° W.)</p> <p>A juniper, 12 ins. diam., bears N. 22° W., 41 lks. dist., mkd. 1/4 S25 BT. (Record, N. 5° W.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground to bedrock, surrounded by a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">1/4 $\frac{S\ 25}{S\ 36}$</p> <p style="text-align: center;">1980</p>

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS								
	<p>Bury the mkd. stone, replace the wooden post, and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p>							
	<p>N. 89° 48' W., beginning new measurement.</p>							
39.99	<p>The cor. of secs. 25, 26, 35, and 36, monumented with a sandstone, 24 x 12 x 4 ins., firmly set 18 ins. in the ground, mkd. 1 notch on the S and E edges, from which the remaining original bearing trees</p>							
	<p>A juniper, 16 ins. diam., bears N. 45° E., 83 lks. dist., mkd. T42S R7W S25 BT. (Record, N. 40° 25' E., 82 lks. dist.)</p>							
	<p>A juniper, 16 ins. diam., bears S. 47° E., 100 lks. dist., mkd. with chopped out blaze. (Record, 119 lks. dist.)</p>							
	<p>A juniper, 14 ins. diam., bears S. 29° W., 41 lks. dist., mkd. T42S R7W S35 BT. (Record, S. 24° 40' W., 30 lks. dist.)</p>							
	<p>A juniper, 14 ins. diam., bears N. 33½° W., 116 lks. dist., mkd. with illegible scribe marks visible on a partially healed blaze. (Record, N. 37° 05' W., 115 lks. dist.)</p>							
	<p>At the corner point</p>							
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>							
	<p>T 42 S R 7 W</p>							
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 26</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 25</td> </tr> <tr> <td style="padding: 2px;">S 35</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 36</td> </tr> </table>	S 26		S 25	S 35		S 36	
S 26		S 25						
S 35		S 36						
	<p>1980</p>							
	<p>Bury the mkd. stone and set a fence post alongside the iron post.</p>							
	<p>N. 0° 10' W., bet. secs. 25 and 26.</p>							
7.00	<p>Dirt road, bears E and W.</p>							
19.96	<p>Point for the S 1/16 sec. cor. of secs. 25 and 26.</p>							
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>							
	<p>T 42 S R 7 W</p>							
	<p>S 1/16</p>							
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 26</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 25</td> </tr> </table>	S 26		S 25				
S 26		S 25						
	<p>1980</p>							

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS		
	<p>from which</p> <p>A juniper, 12 ins. diam., bears N. 63° E., 57 lks. dist., mkd. BT.</p> <p>A juniper, 14 ins. diam., bears S. 71° W., 166 lks. dist., mkd. BT.</p> <p>Set a juniper post, 6 ft. long, 6 ins. diam., alongside the iron post.</p> <p>39.92 The ¼ sec. cor. of secs. 25 and 26, monumented with a squared wooden post, 4 x 4 x 24 ins., firmly set 6 ins. in the ground, faintly mkd. ¼ on the W side, from which the original bearing trees</p> <p>A juniper, 12 ins. diam., bears S. 78° E., 37 lks. dist., mkd. with illegible scribing visible on partially healed blaze. (Record, 43 lks. dist.)</p> <p>A juniper, 14 ins. diam., bears S. 38° W., 112 lks. dist., mkd. with illegible scribing visible on partially healed blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 7 W</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1980</p> <p>Bury the wooden post and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p> <p style="text-align: center;">_____</p> <p>N. 0° 04' E., beginning new measurement.</p>	
<p>20.015</p>	<p>Point for the N 1/16 sec. cor. of secs. 25 and 26.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 7 W N 1/16</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1980</p> <p>from which</p> <p>A juniper, 20 ins. diam., bears N. 80° E., 21½ lks. dist., mkd. BT.</p> <p>A juniper, 14 ins. diam., bears S. 23° W., 16 lks. dist., mkd. 1/16 BT.</p> <p>Set a juniper post, 6 ft. long, 6 ins. diam., alongside the iron post.</p>	

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS

40.03

The cor. of secs. 23, 24, 25, and 26, monumented with a sandstone, 24 x 10 x 4 ins., firmly set 18 ins. in the ground, plainly mkd. 2 notches on the S edge and 1 groove on the E face, from which the original bearing trees

A juniper, 14 ins. diam., bears N. 63° E., 279 lks. dist., mkd. T42S R7W S24 BT. (Record, a cedar, N. 1° 25' E., 60 lks. dist.)

A juniper, 12 ins. diam., bears S. 8° E., 47 lks. dist., mkd. T42S R7W S25 BT. (Record, S. 4° 35' E.)

A juniper, 14 ins. diam., bears S. 29° W., 38 lks. dist., mkd. T42S R7W S26 BT. (Record, S. 35° 45' W.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, surrounded by a mound of stone, 2½ ft. base, to top of brass cap, mkd.

T 42 S R 7 W

S 23		S 24
S 26		S 25

1980

Bury the mkd. stone and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.

From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1977 resurvey of the W. bdy. of T. 42 S., R. 6 W., from which the original bearing trees

A cedar, 20 ins. diam., bears N. 80° 45' E., 212 lks. dist., mkd. T42S R6W S19 BT.

A cedar, 22 ins. diam., bears S. 24° E., 266 lks. dist., mkd. T42S R6W S30 BT.

A cedar, 24 ins. diam., bears S. 35° 40' W., 198 lks. dist., mkd. T42S R7W S25 BT.

A cedar, 12 ins. diam., bears N. 55° 40' W., 153 lks. dist., mkd. T42S R7W S24 BT.

S. 89° 46' W., bet. secs. 24 and 25.

19.98

Point for the E 1/16 sec. cor. of secs. 24 and 25.

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 42 S R 7 W

E 1/16		S 24
		S 25

1980

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS		
	from which	
	A juniper, 8 ins. diam., bears West, 10½ lks. dist., mkd. BT.	
	Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.	
37.61	Barbed wire fence, bears N and S.	
39.96	The ¼ sec. cor. of secs. 24 and 25, monumented with a sandstone, 18 x 12 x 4 ins., firmly set 12 ins. in the ground, plainly mkd. ¼ on the N face, from which the original bearing trees	
	A juniper, 14 ins. diam., bears S. 63° W., 19 lks. dist., mkd. ¼ S25 BT. (Record, S. 70° W., 21 lks. dist.)	
	A juniper, 15 ins. diam., bears N. 18° W., 136 lks. dist., mkd. ¼ S24 BT. (Record, N. 32° W., 101 lks. dist.)	
	At the corner point	
	Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, surrounded by a mound of stone, 3½ ft. base, to top of brass cap, mkd.	
	<p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">¼ $\frac{S\ 24}{S\ 25}$</p> <p style="text-align: center;">1980</p>	
	Bury the mkd. stone and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.	
	From the cor., a barbed wire fence, bearing E and W, bears N, 129 lks. dist.	
40.15	<p style="text-align: center;">S. 89° 47' W., beginning new measurement.</p> <p>The cor. of secs. 23, 24, 25, and 26.</p>	
20.11	<p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>N. 89° 52' W., bet. secs. 26 and 35.</p> <p>Point for the E 1/16 sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">E 1/16 $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1980</p>	

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS	
	<p>from which</p> <p>A juniper, 8 ins. diam., bears N. 22½° E., 67½ lks. dist., mkd. E 1/16 S26 BT.</p> <p>A juniper, 12 ins. diam., bears S. 31° W., 59 lks. dist., mkd. E 1/16 S35 BT.</p> <p>Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p>
20.90	Barbed wire fence, bears NE and SW.
40.22	<p>The ¼ sec. cor. of secs. 26 and 35, determined at record distance from the original bearing trees</p> <p>A pinon, 16 ins. diam., bears N. 61½° E., 154 lks. dist., mkd. ¼ S26 BT. (Record, N. 74° E.)</p> <p>A juniper, 14 ins. diam., bears S. 80° E., 132 lks. dist., mkd. ¼ S35 BT. (Record, S. 77° E.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, surrounded by a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">¼ $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1980</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89° 51' W., beginning new measurement.</p>
12.00	Dirt road, bears NE and SW.
39.63	Center of gravelled road, 25 lks. wide, bears NE and SW.
39.94	<p>The cor. of secs. 26, 27, 34, and 35, monumented with a sandstone, 18 x 12 x 4 ins., firmly set, 12 ins. in the ground, plainly mkd. 1 notch on the S and 2 notches on the E edges, from which the original bearing trees</p> <p>A juniper, 16 ins. diam., bears S. 81° E., 107 lks. dist., with scribe marks visible on partially healed blaze. (Record, S. 18° E.)</p> <p>A juniper, 14 ins. diam., bears S. 45° W., 60 lks. dist., with scribe marks visible on partially healed blaze.</p> <p>A juniper, 16 ins. diam., bears N. 54° W., 100 lks. dist., with scribe marks visible on partially healed blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, surrounded by a mound of stone, 3 ft. base to top of brass cap, mkd.</p>

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">S 27 S 26 S 34 S 35</p> <p style="text-align: center;">1980</p> <p>Bury the mkd. stone and set a cedar post, 6 ins. diam., 6 ft. long, alongside the iron post.</p> <p>Build a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.</p>	
	<p>N. 0° 04' E., bet. secs. 26 and 27.</p>	
20.00	Dirt road, bears NE and SW.	
39.87	<p>The ¼ sec. cor. of secs. 26 and 27, monumented with a wooden post, 6 ins. diam., 4 ft. long, firmly set, 1 ft. in the ground, mkd. S26 on the E face and mkd. ¼ on W face. There is no remaining evidence of the original bearing trees</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 42 S R 7 W</p> <p style="text-align: center;">¼ S 27 S 26 </p> <p style="text-align: center;">1980</p>	
	<p>from which</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 68° E., 96 lks. dist., mkd. ¼ BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 72° W., 87 lks. dist., mkd. ¼ BT.</p> <p>Place the mkd. wooden post and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p>	
	<p>N. 0° 03' E., beginning new measurement.</p>	
40.02	<p>The cor. of secs. 22, 23, 26, and 27, determined from original bearing trees</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 48° W., 42 lks. dist., mkd. with healed blaze. (Record. S. 54° W.)</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears N. 55° W., 11 lks. dist., mkd. with healed blaze.</p> <p>At the corner point</p>	

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 42 S R 7 W

S 22	S 23
S 27	S 26

1980

Set a juniper post, alongside the iron post.

From the cor. of secs. 23, 24, 25, and 26.

S. $89^{\circ} 34'$ W., bet. secs. 23 and 26.

19.745 Point for the E $\frac{1}{16}$ sec. cor. of secs. 23 and 26.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, surrounded by a collar of stone, with brass cap mkd.

T 42 S R 7 W

E $\frac{1}{16}$	S 23
	S 26

1980

from which

A juniper, 10 ins. diam., bears S. 17° W., 39 lks. dist., mkd. E $\frac{1}{16}$ S26 BT.

Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.

25.00 Dirt road, bears NE and SW.

39.49 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a charred cedar post, loosely set, 3 x 3 x 18 ins., 6 ins. in the ground, no marks visible, from which the remaining original bearing tree

A juniper, 24 ins. diam., bears N. 50° E., 60 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 42 S R 7 W

$\frac{1}{4}$	S 23
	S 26

1980

from which a new bearing tree

A juniper, 9 ins. diam., bears S. 4° E., 62 lks. dist., mkd. $\frac{1}{4}$ BT.

Place the charred wooden post and set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.

Dependent Resurvey of the Subdivisional Lines
of Sections 25 and 36, T. 42 S., R. 7 W.,
Salt Lake Meridian, Utah

CHAINS	
	N. 89° 41' W., beginning new measurement.
3.35	Barbed wire fence, bears N and S.
40.50	The cor. of secs. 22, 23, 26, and 27.
Subdivision of Section 25, T. 42 S., R. 7 W., Salt Lake Meridian, Utah	
	From the ¼ sec. cor. of secs. 25 and 36.
	N. 0° 05' E., on the N and S center line of sec. 25.
13.00	Cave Lakes Canyon, drains E.
15.50	Dirt road, bears E and W.
20.09	Point for the center S 1/16 sec. cor. of sec. 25.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, surrounded by a mound of stone, 3 ft. base, to top of brass cap, mkd.
	C S 1/16 S 25 C
	from which
	A juniper, 7 ins. diam., bears N. 74° E., 66½ lks. dist., mkd. CS 1/16 S25 BT.
	A juniper, 8 ins. diam., bears N. 34° W., 34½ lks. dist., mkd. CS 1/16 S25 BT.
	Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.
40.18	Point for the center ¼ sec. cor. of sec. 25, at intersection with the E and W center line.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T 42 S R 7 W C ¼ S 25 1980
	from which
	A twin juniper, 8 ins. diam., bears N. 55° E., 71 lks. dist., mkd. C ¼ S25 BT.
	A juniper, 12 ins. diam., bears S. 55° W., 38½ lks. dist., mkd. C ¼ S25 BT.

Subdivision of Section 25,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS	
	Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.
80.25	The $\frac{1}{4}$ sec. cor. of secs. 24 and 25.
	From the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., heretofore described.
	S. $89^{\circ} 50'$ W., on the E and W center line of sec. 25.
19.995	Point for the center E $\frac{1}{16}$ sec. cor. of sec. 25.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	E $\frac{1}{16}$
	C ————— C
	S 25
	1980
	from which
	A juniper, 12 ins. diam., bears S. 50° W., 31 lks. dist., mkd. BT.
	A juniper, 4 ins. diam., bears N. 70° W., $12\frac{1}{2}$ lks. dist., mkd. BT.
	Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.
39.99	The center $\frac{1}{4}$ sec. cor. of sec. 25.
80.15	The $\frac{1}{4}$ sec. cor. of secs. 25 and 26.
	From the center E $\frac{1}{16}$ sec. cor. of sec. 25.
	N. $0^{\circ} 04'$ E., on the N and S center line of the NE $\frac{1}{4}$ of sec. 25.
40.10	The E $\frac{1}{16}$ sec. cor. of secs. 24 and 25.
	From the E $\frac{1}{16}$ sec. cor. of secs. 25 and 36.
	N. $0^{\circ} 02'$ E., on the N and S center line of the SE $\frac{1}{4}$ of sec. 25.
14.00	Dirt road, bears E and W, and Cave Lakes Canyon, drains E.
20.05	Point for the SE $\frac{1}{16}$ sec. cor., at intersection with the E and W center line of the SE $\frac{1}{4}$.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, surrounded by a mound of stone, $4\frac{1}{2}$ ft. base, to top of brass cap, mkd.
	T 42 S R 7 W
	SE $\frac{1}{16}$ S 25
	1980

Subdivision of Section 25,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS	
40.10	<p>from which</p> <p>A juniper, 10 ins. diam., bears West, 26 lks. dist., mkd. SE 1/16 BT.</p> <p>The center E 1/16 sec. cor. of sec. 25.</p>
20.01 40.03	<p>From the point for the S 1/16 sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89° 44' W., on the E and W center line of the SE 1/4 of sec. 25.</p> <p>The SE 1/16 sec. cor. of sec. 25.</p> <p>The center S 1/16 sec. cor. of sec. 25.</p>
<p>Subdivision of Section 26, T. 42 S., R. 7 W., Salt Lake Meridian, Utah</p>	
3.00 19.90	<p>From the 1/4 sec. cor. of secs. 26 and 35.</p> <p>N. 0° 28' E., on the N and S center line of sec. 26.</p> <p>Dirt road, bears E and W.</p> <p>Point for the center S 1/16 sec. cor. of sec. 26.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p> </p> <p>S 1/16 S 26</p> <p> </p> <p>C</p> </div> <p>from which</p> <p>A juniper, 14 ins. diam., bears N. 40° E., 12 1/2 lks. dist., mkd. CS 1/16 S26 BT.</p> <p>A juniper, 18 ins. diam., bears S. 23° W., 44 lks. dist., mkd. CS 1/16 S26 BT.</p> <p>Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p> <p>Point for the center 1/4 sec. cor. of sec. 26, at intersection with the E and W center line.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 26,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

T 42 S R 7 W

C ¼

S 26

1980

from which

A juniper, 8 ins. diam., bears S. 70° E., 113 lks.
dist., mkd. BT.

A juniper, 8 ins. diam., bears S. 80° W., 50 lks.
dist., mkd. BT.

Set a juniper post, 6 ins. diam., 6 ft. long, alongside
the iron post.

59.675 Point for the center N 1/16 sec. cor. of sec. 26.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 22 ins.
in the ground, with aluminum cap mkd.

T 42 S R 7 W

C
|
N 1/16 | S 26
|

C
1980

from which

A juniper, 12 ins. diam., bears N. 39° E., 58 lks.
dist., mkd. CN 1/16 S26 BT.

Set a juniper, 6 ins. diam., 6 ft. long, alongside
the iron post.

60.33 Barbed wire fence, bears NE and SW.

64.00 Dirt road, bears NE and SW.

79.55 The ¼ sec. cor. of secs. 23 and 26.

From the ¼ sec. cor. of secs. 25 and 26.

S. 89° 57' W., on the E and W center line of sec. 26.

19.885 Point for the center E 1/16 sec. cor., of sec. 26,
not monumented.

39.77 The center ¼ sec. cor. of sec. 26.

56.00 Dirt road, bears NE and SW.

79.99 The ¼ sec. cor. of secs. 26 and 27.

Subdivision of Section 26,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS		
<p>19.95</p>	<p>From the point for the center E 1/16 sec. cor. of sec. 26. N. 0° 16' E., on the N and S center line of the NE¼ of sec. 26.</p> <p>Point for the NE 1/16 sec. cor., at intersection with the E and W center line of the NE¼.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">NE 1/16 S26 1980</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 16 ins. diam., bears N. 48° E., 47½ lks. dist., mkd. NE 1/16 S26 BT.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 50° E., 55 lks. dist., mkd. NE 1/16 S26 BT.</p> <p>Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.</p>	
<p>39.89</p>	<p>The E 1/16 sec. cor. of secs. 23 and 26.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 25 and 26. S. 89° 46' W., on the E and W center line of the NE¼ of sec. 26.</p>	
<p>19.81</p>	<p>The NE 1/16 sec. cor. of sec. 26.</p>	
<p>39.63</p>	<p>The center N 1/16 sec. cor. of sec. 26.</p>	
<p>8.00</p> <p>19.93</p>	<p>From the E 1/16 sec. cor. of secs. 26 and 35. N. 0° 09' E., on the N and S center line of the SE¼ of sec. 26.</p> <p>Dirt road, bears NE and SW.</p> <p>Point for the SE 1/16 sec. cor., at intersection with the E and W center line of the SE¼.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S 26 1980</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 10½° W., 52½ lks. dist., mkd. SE 1/16 S26 BT.</p>	

Subdivision of Section 26,
T. 42 S., R. 7 W., Salt Lake Meridian, Utah

CHAINS

- Set a juniper post, 6 ins. diam., 6 ft. long, alongside the iron post.
- 39.86 Point for the center E 1/16 sec. cor. of sec. 26.
-
- From the S 1/16 sec. cor. of secs. 25 and 26.
- N. 89° 58' W., on the E and W center line of the SE $\frac{1}{4}$ of sec. 26.
- 19.995 The SE 1/16 sec. cor. of sec. 26.
- 40.00 The center S 1/16 sec. cor. of sec. 26.

General Description

The area surveyed lies approximately 6 miles NNW of Kanab, Utah, at a mean elevation of 5700 ft. above sea level. The terrain consists of rolling sand hills covered with a medium to dense growth of juniper trees and scattered pinons. Cave Lakes Canyon is the major topographical feature of the area, draining easterly near the south boundaries of sections 25 and 26.

U.S. Highway 89 passes about 1/2 mile east of section 25. A gravelled road passes through section 26 and provides easy access from U.S. Highway 89 at West Fork Canyon. A privately owned trail road extends up Cave Lakes Canyon to permanent dwelling in section 25. Various other unimproved roads cross the area, some of which are suited only for four wheel drive vehicles.

Most of the area is primarily used for livestock care. Other activities include post and firewood cutting and recreation.

CERTIFICATE OF SURVEY

(I) ~~XW~~, Gary L. Kratz

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 18th day of January, 1980, (I) ~~XW~~ have dependently resurveyed a portion of the east boundary and the subdivisional lines of sections 25 and 26, with a subdivision of sections 25 and 26, T. 42 S., R. 7 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~XW~~ and under (my) ~~XW~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 30, 1980
(Date)

Gary L. Kratz
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the east boundary and the subdivisional lines of sections 25 and 26, with a subdivision of sections 25 and 26, T. 42 S., R. 7 W., Salt Lake Meridian, Utah

executed by Gary L. Kratz, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

SEP 09 1980
(Date)

J. Usorke
(Chief, Cadastral Survey Examination and Approval Staff)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Cadastral Survey Examination and Approval Staff)

INDEX DIAGRAM

Township 42 South, Range 6 West

12 6 54	55 8 53	43 4 42	6 37 8 36	30 2 30	22 1 5 21
11 7 52	53 8 51	41 9 40	35 10 35	29 11 28	20 12 5 19
10 18 49	50 17	16	34 15 34	27 14 27	18 13 4 18
9 19 48	48 20 48	21	22 33	26 23 25	16 24 3 16
8 30 46	47 29 45	39 28 38	32 27 32	24 26 23	15 25 2 14
7 31	44 32	37 33	31 34	22 35	13 36 2

Township 42 South, Range 6 West, Salt Lake Meridian, Utah

CHAINS

The east boundary (Panguitch and Kanab Guide Meridian) was surveyed by T. C. Bailey in 1877, and resurveyed by A. B. Lewis in 1897, and the N. 1 mile retraced by J. C. Thoma and J. C. Clark in 1915. The south boundary was surveyed by A. B. Lewis in 1897 and resurveyed by J. C. Clark and J. C. Thoma in 1914-15. The west boundary was surveyed by A. B. Lewis in 1897. The north boundary was surveyed by A. B. Lewis in 1897 and resurveyed by G. D. Voorhees in 1959. The subdivisional lines were surveyed by A. B. Lewis in 1897 and a portion of the subdivisional lines resurveyed by Craig P. Sylvester in 1977. A portion of the subdivision of sec. 21 was surveyed by Craig P. Sylvester in 1977.

The following field notes are those of a dependent resurvey of the east boundary, Panguitch and Kanab Guide Meridian, the west boundary, the west one half mile of the north boundary of sec. 3, and a portion of the subdivisional lines of Township 42 South, Range 6 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and Supplemental Special Instructions for Group 570, Utah, dated September 8, 1977.

The directions of the lines of this survey were determined by references to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Measurements were determined by electronic means along survey lines where accessible.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the southeast corner of the township, as scaled from U.S. Geological Survey quadrangle map, "JOHNSON, UTAH-ARIZONA," as prepared in 1957, is as follows:

Latitude $37^{\circ} 06.5'$ N. Longitude $112^{\circ} 27.8'$ W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 15'$ E.

Dependent Resurvey, Panguitch and Kanab Guide Meridian, along the E. Bdy. of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

Dependent Resurvey, Panguitch and Kanab Guide Meridian, along the E. Bdy. of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
	<p>(Restoring the 1877 Survey Executed by T. C. Bailey and the 1897 Resurvey Executed by A. B. Lewis)</p> <hr/> <p>Beginning at the cor. of Tps. 42 and 43 S., R. 6 W., monumented with an iron post, 3 ins. diam., extending 12 ins. above ground with brass cap mkd. as described in the official record of the 1915 resurvey of the Panguitch and Kanab Guide Meridian through T. 43 S.</p> <p>N. 0° 05' W., along the E. bdy. of sec. 36.</p> <p>Over rolling sandy land, through juniper and pinon trees.</p>
2.53	<p>The closing cor. of Tps. 42 and 43 S., R. 5 W., monumented with an iron post, 3 ins. diam., extending 12 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the S. bdy. of T. 42 S., R. 5 W.</p>
39.78	<p>Fence, bears N. 37° 15' E. and S. 37° 15' W., also trail road parallels N side of fence.</p>
40.07	<p>Point for the ¼ sec. cor. of sec. 36, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 42 S R 6 W R 5 W</p> <p>¼ </p> <p>S 36 </p> <p>1977</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Continue over sandy, rolling land, covered with sagebrush, through scattered juniper and pinon.</p>
80.14	<p>The cor. of secs. 25 and 36 only, monumented with an iron post, 3 ins. diam., extending 12 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.</p>
	<p>N. 0° 08' W., along the E. bdy. of sec. 25.</p> <p>Over rolling, sandy land, through juniper and pinon; asc. gentle S slope.</p>
2.24	<p>The closing cor. of secs. 30 and 31, bears West, 0.02 chs. dist., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.</p>
40.08	<p>The ¼ sec. cor. of sec. 25 only, monumented with an old squared cedar post, 3 ft. long, firmly set 2 ft. in the ground, with dim scribe marks.</p>

Dependent Resurvey, Panguitch and Kanab Guide
Meridian, along the E. Bdy. of T. 42 S., R. 6 W.,
Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S
R 6 W R 5 W

¼ |
|
S 25 |

1977

Set the original stake and cedar post, 6 ins. diam., 5 ft.
high, alongside the iron post.

N. 0° 06' W., beginning new measurement.

Continue over brush flat.

- 40.02 The cor. of secs. 24 and 25 only, monumented with an iron
post, 3 ins. diam., extending 10 ins. above ground, mkd.
as described in the official record of the 1915 survey of
the subdivision of T. 42 S., R. 5 W.

N. 0° 08' W., along the E. bdy. of sec. 24.

Over rolling, sandy land, covered with sagebrush; asc.
gentle SE slope.

- 2.22 The closing cor. of secs. 19 and 30, monumented with an
iron post, 2 ins. diam., extending 12 ins. above ground
with brass cap mkd. as described in the official record
of the 1915 survey of the subdivision of T. 42 S.,
R. 5 W.

- 40.06 The ¼ sec. cor. of sec. 24 only, monumented with a cedar
stake, extending 18 ins. above ground, with dim scribe
marks, from which the original bearing trees

A cedar, 12 ins. diam., bears N. 35° E., 36 lks.
dist., mkd. ¼ S BT.

A cedar, 10 ins. diam., bears N. 54° W., 127 lks.
dist., marks grown over.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S
R 6 W R 5 W

¼ |
|
S 24 |

1977

Dependent Resurvey, Panguitch and Kanab Guide Meridian, along the E. Bdy. of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. 0° 03' W., beginning new measurement.

Over mountain bench top, through dense pinon and juniper.

40.01 The cor. of secs. 13 and 24 only, monumented with an iron post, 3 ins. diam., extending 12 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.

N. 0° 19' W., along the E. bdy. of sec. 13.

Over rolling, sandy bench, through dense pinon and juniper; asc. gentle SW slope.

2.16 The closing cor. of secs. 18 and 19, T. 42 S., R. 5 W., bears West, 0.03 chs. dist., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.

32.00 John R. Canyon, drains W irregularly; asc. over S slope and small ledges facing S.

39.90 The 1/4 sec. cor. of sec. 13 only, monumented with an old cedar stake, firmly set, no legible marks, from which an original bearing tree

A cedar, 18 ins. diam., bears N. 70° E., 25 lks. dist., marks grown over.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 6 W R 5 W

1/4 |
|
S 13 |

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. 0° 13' E., beginning new measurement.

Asc. over S slope.

39.95 The cor. of secs. 12 and 13 only, monumented with an iron post, 3 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.

Dependent Resurvey, Panguitch and Kanab Guide
Meridian, along the E. Bdy. of T. 42 S., R. 6 W.,
Salt Lake Meridian, Utah

CHAINS	
	<p>N. 0° 01' W., along the E. bdy. of sec. 12.</p> <p>Over sandy land, through dense juniper and pinon; asc. gentle SW slope.</p>
2.31	<p>The closing cor. of secs. 7 and 18, T. 42 S., R. 5 W., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.</p>
40.00	<p>The ¼ sec. cor. of sec. 12 only, monumented with an old cedar stake, firmly set, blazed on one side with illegible scribe marks on blaze, from which the original bearing trees</p> <p>A cedar, 20 ins. diam., bears N. 87° E., 43 lks. dist., marks grown over.</p> <p>A cedar, 16 ins. diam., bears S. 33° W., 27 lks. dist., marks grown over.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 42 S</p> <p>R 6 W R 5 W</p> <p>¼ </p> <p>S 12 </p> <p>1977</p> </div> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.</p> <hr/> <p>N. 0° 07' W., beginning new measurement.</p> <p>Asc. steep sandy slope.</p>
39.99	<p>The cor. of secs. 1 and 12 only, monumented with an iron post, 3 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W. Corner is located in E and W fence line.</p>
2.23	<p>(Restoring the 1877 Survey Executed by T. C. Bailey, the 1897 Resurvey Executed by A. B. Lewis and the 1915 Retracement Executed by J. C. Thoma and J. C. Clark)</p> <hr/> <p>N. 0° 15' W., along the E. bdy. of sec. 1.</p> <p>Over rolling, sandy land, covered with tall sagebrush; along gentle W slope.</p> <p>The closing cor. of secs. 6 and 7, T. 42 S., R. 5 W., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1915 survey of the subdivision of T. 42 S., R. 5 W.</p>

Dependent Resurvey, Panguitch and Kanab Guide
Meridian, along the E. Bdy. of T. 42 S., R. 6 W.,
Salt Lake Meridian, Utah

CHAINS

40.02 The $\frac{1}{4}$ sec. cor. of sec. 1 only, monumented with an old cedar stake, broken off and lying on ground, stump of stake in ground, marks weathered away.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 6 W R 5 W

$\frac{1}{4}$ |
S 1 |

1977

Set the remains of original stake, and a cedar post, 5 ins. diam., 4 ft. high, alongside the iron post.

N. $0^{\circ} 18'$ W., beginning new measurement.

Asc. gentle W slope.

20.38 Point for the N $\frac{1}{16}$ sec. cor. of sec. 1 only.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 6 W R 5 W

N $\frac{1}{16}$ |
S 1 |

1977

Set cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

37.65 The closing cor. of Tps. 42 S., Rs. 5 and 6 W., monumented with an iron post, extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.

Dependent Resurvey of a Portion of the N. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

From the $\frac{1}{4}$ sec. cor. of sec. 3 only, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.

N. $89^{\circ} 59'$ W., along the N. bdy. of sec. 3.

Dependent Resurvey of a Portion of the N. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

39.13

The cor. of secs. 3 and 4, T. 42 S., R. 6 W., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.

This 1/2 mile was resurveyed because of the misclosure in sec. 3.

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

(Restoring the 1897 Survey Executed by A. B. Lewis)

From the cor. of Tps. 42 and 43 S., Rs. 6 and 7 W., monumented with an iron post, 3 ins. diam., extending 12 ins. above ground with brass cap mkd. as described in the official record of the 1914 resurvey of the N. bdy. of T. 43 S., R. 6 W.

North, bet. secs. 31 and 36.

Over rolling, sandy land, through juniper and pinon trees; asc. over gentle S slope.

40.07

The ¼ sec. cor. of secs. 31 and 36, monumented with a cedar stake, firmly set, mkd. with illegible scribe marks, from which the original bearing trees

A cedar, 20 ins. diam., bears S. 25¼° E., 192 lks.
dist., mkd. ¼ S BT.

A cedar, 14 ins. diam., bears N. 68° W., 181 lks.
dist., mkd. ¼ S BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W

¼
|
S 36 | S 31
|

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. 0° 02' W., beginning new measurement.

Desc. over N slope.

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

40.04

The cor. of secs. 25, 30, 31, and 36, monumented with a cedar stake, firmly set, with illegible scribe marks, from which the original bearing trees

A cedar, 10 ins. diam., bears N. $44\frac{1}{2}^{\circ}$ E., 70 lks. dist., mkd. T42S R6W S30 BT.

A cedar, 16 ins. diam., bears S. 69° E., 51 lks. dist., mkd. T42S R6W S31 BT.

A cedar, 12 ins. diam., bears S. $78\frac{1}{2}^{\circ}$ W., 172 lks. dist., mkd. T42S R7W S36 BT.

A pine, 14 ins. diam., bears N. 33° W., 86 lks. dist., mkd. T42S R7W S25 BT. (Record, a cedar, 77 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 42 S
R 7 W R 6 W

S 25 | S 30
S 36 | S 31

1977

Set original stake alongside the iron post.

North, bet. secs. 25 and 30.

Over rolling, sandy land on high bench, through dense juniper and pinon trees.

10.10 S rim of Cave Lakes Canyon, bears N. 80° E. and S. 80° W.; desc. over N slope and ledges facing N.

19.90 Dirt road in bottom, of E draining canyon, bears E and W, also base of ascent; asc. ledges facing S.

25.80 N rim of Cave Lakes Canyon, bears E and S. 80° W.; asc. over gentle S slope of bench.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 25 and 30, determined at record course and distances from the original bearing trees

A cedar, 12 ins. diam., bears S. $76^{\circ} 20'$ E., 44 lks. dist., mkd. $\frac{1}{4}$ S BT.

A cedar, 14 ins. diam., bears S. $65^{\circ} 20'$ W., 37 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 42 S
R 7 W R 6 W

$\frac{1}{4}$
S 25 | S 30

1977

Set cedar post, 6 ins. diam., 5 ft., high, alongside the iron post.

N. 0° 02' E., beginning new measurement.

Continue over rolling bench, through dense pinon and juniper.

40.12 The cor. of secs. 19, 24, 25, and 30, monumented with a squared cedar stake, firmly set, and mkd. with illegible scribe marks, from which the original bearing trees

A cedar, 20 ins. diam., bears N. 80° 45' E., 212 lks. dist., mkd. T42S R6W S19 BT.

A cedar, 22 ins. diam., bears S. 24° E., 266 lks. dist., mkd. T42S R6W S30 BT.

A cedar, 24 ins. diam., bears S. 35° 40' W., 198 lks. dist., mkd. T42S R7W S25 BT.

A cedar, 12 ins. diam., bears N. 55° 40' W., 153 lks. dist., mkd. T42S R7W S24 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 42 S
R 7 W R 6 W

S 24 | S 19
S 25 | S 30

1977

Set original stake along the iron post.

N. 0° 03' W., bet. secs. 19 and 24.

Over rolling sandy, land, through dense juniper and pinon.

40.08 The ¼ sec. cor. of secs. 19 and 24, determined from an original bearing tree

A cedar, 15 ins. diam., bears S. 62° E., 34 lks. dist., mkd. with illegible scribe marks.


At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 42 S
R 7 W R 6 W



1977

Cor. is located at cor. of fences, bearing E and S.

N. 0° 02' E., beginning new measurement.

Desc. gentle NE slope.

- 0.80 Gravel road, bears E and W.
- 11.20 Small draw, drains E, also old road in draw; asc. gentle SE slope.
- 40.09 The cor. of secs. 13, 18, 19, and 24, determined at record course and distance from the original bearing trees

A cedar, 20 ins. diam., bears N. 67° 20' E., 63 lks. dist., mkd. T42S R6W S18 BT.

A cedar, 20 ins. diam., bears S. 41° 30' E., 240 lks. dist., mkd. T42S R6W S19 BT.


A cedar, 12 ins. diam., bears S. 10° 20' W., 132 lks. dist., mkd. T42S R7W S24 BT.

A cedar, 20 ins. diam., bears N. 26° W., 208 lks. dist., mkd. T42S R7W S13 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W



1977

Set a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.

N. 0° 03' W., bet. secs. 13 and 18.

Over rolling sandy land, through dense juniper and pinon; asc. gentle SE slope.

- 12.80 U. S. Highway No. 89, bears N. 43° W. and S. 43° E.
- 21.50 Old abandoned highway, bears N. 29° 30' W. and S. 29° 30' E.
- 40.10 The ¼ sec. cor. of secs. 13 and 18, monumented with a sandstone, 14 x 8 x 6 ins., mkd. ¼, lying loose on solid sandstone, and at record course and distance from original bearing trees

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

A cedar, 12 ins. diam., bears S. 34° E., 47 lks.
dist., mkd. $\frac{1}{4}$ S BT.

A pine, 10 ins. diam., bears S. 32° W., 36 lks.
dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., on solid
sandstone, over a cross (X), in a mound of stone, 4 ft.
base, to top of brass cap, mkd.

T 42 S
R 7 W R 6 W

$\frac{1}{4}$
|
S 13 | S 18
|

1977

Place mkd. stone in mound alongside iron post.

N. 0° 03' E., beginning new measurement.

Asc. S slope of ridge.

39.72 The cor. of secs. 7, 12, 13, and 18, monumented with a
squared cedar post, firmly set and plainly scribed, 2
notches on N edge and 4 notches on S edge, from which the
original bearing trees

A cedar, 20 ins. diam., bears S. 60° 30' W., 254
lks. dist., mkd. T42S R7W S13 BT.

A cedar, 16 ins. diam., bears N. 50° W., 141 lks.
dist., mkd. T42S R7W S12 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W

S 12 | S 7
S 13 | S 18

1977

Set the original stake and a cedar post, 8 ins. diam.,
5 ft. high, alongside the iron post.

N. 0° 07' W., bet. secs. 7 and 12.

Over rolling land, draining E; over sand dunes.

40.19 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a
blazed cedar stake, firmly set with illegible scribe
marks on blaze.


Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W



1977

Set the original stake and a cedar post, 5 ins. diam., 4 ft. high, alongside the iron post.

N. 0° 03' W., beginning new measurement.

Continue over rolling sand dunes.

40.13 The cor. of secs. 1, 6, 7, and 12, determined at record course and distance from the original bearing trees

A cedar, 15 ins. diam., bears N. 15° E., 52 lks. dist., mkd. T42S R6W S6 BT.

A cedar, 20 ins. diam., bears S. 43° E., 238 lks. dist., mkd. T42S R6W S7 BT.


A cedar, 18 ins. diam., bears S. 19° 30' W., 274 lks. dist., mkd. T42S R7W S12 BT.

A cedar, 18 ins. diam., bears N. 44° 30' W., 238 lks. dist., mkd. T42S R7W S1 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W



1977

Set a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. 0° 05' W., bet. secs. 1 and 6.

Over rolling sandy land, through juniper and pinon trees.

15.00 Red Canyon, drains S. 78° E.

40.05 The ¼ sec. cor. of secs. 1 and 6, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on W face, from which the original bearing trees

Dependent Resurvey of the W. Bdy.,
T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

A pine, 18 ins. diam., bears S. $53^{\circ} 30'$ E., 122 lks. dist., mkd. $\frac{1}{4}$ S BT.

A cedar, 14 ins. diam., bears N. $9^{\circ} 30'$ W., 58 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S
R 7 W R 6 W

$\frac{1}{4}$
|
S 1 | S 6
|

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

N. $0^{\circ} 20'$ W., beginning new measurement.

Asc. over SW slope.

34.20 Trail road, bears E and W.

37.15 The cor. of Tps. 41 and 42 S., Rs. 6 and 7 W., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

(Restoring the 1897 Survey by A. B. Lewis)

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1914 resurvey of the N. bdy. of T. 43 S., R. 6 W.

N. $0^{\circ} 05'$ W., bet. secs. 35 and 36.

Over rolling sandy land, through juniper and pinon; desc. gentle NW slope.

39.98 The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a blazed cedar stake, firmly set, scribe marks weathered away.

At the corner point

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

½
|
S 35 | S 36
|

1977

from which

A cedar, 6 ins. diam., bears S. 5° W., 26 lks. dist., mkd. BT.

Set the original stake and a cedar post, 6 ins. diam., 4 ft. high, alongside the iron post.

N. 0° 17' E., beginning new measurement.

Over rolling bench.

39.80 Wash in bottom of North Fork Hog Canyon, drains W.

40.11 Point for the cor. of secs. 25, 26, 35, and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 26 | S 25
S 35 | S 36

1977

from which

A cedar, 6 ins. diam., bears N. 43° W., 83 lks. dist., mkd. BT.

A cedar, 6 ins. diam., bears N. 79° W., 35 lks. dist., mkd. BT.

No other suitable bearing trees available.

Set a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp. heretofore described.

S. 89° 40' W., bet. secs. 25 and 36.

Over rolling sandy land, through medium growth of pinon and juniper trees.

40.20 The ¼ sec. cor. of secs. 25 and 36, monumented with a blazed cedar stake, firmly set, dim scribe marks on blaze.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
<p>25.30</p> <p>39.76</p>	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S\ 25}{S\ 36}$</p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 8 ins. diam., 5 ft. high, alongside the iron post.</p> <p style="text-align: center;">_____</p> <p>N. 89° 19' W., beginning new measurement.</p> <p>Desc. gentle W slope.</p> <p>Wash in North Fork Hog Canyon, drains W from SE.</p> <p>The cor. of secs. 25, 26, 35, and 36.</p>
<p>40.11</p> <p>80.22</p>	<p>N. 0° 05' E., bet. secs. 25 and 26.</p> <p>Over rolling, sandy land, through medium growth of pinon and juniper trees; asc. S slope.</p> <p>Point for the ¼ sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ S 26 S 25 </p> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 57° E., 69 lks. dist., mkd. BT.</p> <p style="padding-left: 40px;">A cedar, 6 ins. diam., bears S. 11° 45' W., 36 lks. dist., mkd. BT.</p> <p>Set cedar post, 5 ins. diam., 4 ft. high, alongside the iron post.</p> <p>Asc. over SE slope.</p> <p>The cor. of secs. 23, 24, 25, and 26, monumented with a squared cedar stake, firmly set, mkd. with dim scribe marks, from which the only original bearing tree identified</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

A cedar, 10 ins. diam., bears N. 34° W., 29 lks. dist., mkd. T42S R6W S24 BT. (Record, N. 32° E., 25 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 23	S 24
S 26	S 25

1977

from which

A cedar, 18 ins. diam., bears S. 18° E., 25 lks. dist., mkd. BT.

A cedar, 12 ins. diam., bears S. 57° W., 65 lks. dist., mkd. BT.

Set the original stake alongside the iron post.

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., heretofore described.

N. 89° 46' W., bet. secs. 24 and 25.

Over rolling sandy land, covered with sagebrush, through widely scattered juniper trees; asc. along gentle S slope.

39.86 Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼	S 24
	S 25

1977

from which

A lone cedar, 12 ins. diam., bears S. 50° W., 118 lks. dist., mkd. BT.

Set a cedar post, 6 ins. diam., 6 ft. high, alongside the iron post.

Continue over flat.

79.72 The cor. of secs. 23, 24, 25, and 26.

N. 0° 02' W., bet. secs. 23 and 24.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Over sandy rolling bench land, through dense juniper and pinon trees.

39.59 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
|
S 23 | S 24

1977

from which

A cedar, 14 ins. diam., bears S. 28° E., 57 lks. dist., mkd. BT.

A cedar, 12 ins. diam., bears S. 85° W., 59 lks. dist., mkd. BT.

Set a cedar post, 8 ins. diam., 6 ft. high, alongside the iron post.

Desc. over gentle N slope.

79.18 The cor. of secs. 13, 14, 23, and 24, determined at record course and distance from the original bearing trees

A cedar, 10 ins. diam., bears N. $58^{\circ} 20'$ E., 23 lks. dist., marks grown over, remarked BT.

A cedar, 16 ins. diam., bears S. $14^{\circ} 40'$ E., 89 lks. dist., mkd. T42S R6W S24 BT.

A burned stump, level with ground, bears S. $47^{\circ} 40'$ W., 89 lks. dist.

A cedar, 12 ins. diam., bears N. $36^{\circ} 20'$ W., 95 lks. dist., marks grown over, remarked BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 14 | S 13
S 23 | S 24

1977

Set cedar post, 5 ins. diam., 4 ft. high, alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
39.83	<p>From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89° 35' W., bet. secs. 13 and 24.</p> <p>Over rolling sandy land, through heavy growth pinon and juniper trees, along E and W fence line.</p> <p>Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S\ 13}{S\ 24}$</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 6 ins. diam., 5 ft. long, alongside the iron post, which is located 17 lks. S of E and W fence line.</p> <p>Desc. over NE slope.</p>	
79.66	<p>The cor. of secs. 13, 14, 23, and 24.</p>	
30.00	<p>N. 0° 02' E., bet. secs. 13 and 14.</p> <p>Over sandy land, through dense juniper and pinon; desc. NW slope.</p> <p>Wash in John R. Canyon, drains S. 80° W.; asc. over S slope.</p>	
40.17	<p>The ¼ sec. cor. of secs. 13 and 14, determined from the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 29° 30' E., 27 lks. dist., mkd. ¼ S BT. (Record, N. 16° W.)</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 3° E., 43 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼</p> <p style="text-align: center;">S 14 S 13</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 6 ft. diam., 6 ft. high, alongside the iron post.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

N. 0° 44' W., beginning new measurement.

Asc. over S slope.

39.95 The cor. of secs. 11, 12, 13, and 14, monumented with a squared cedar post, firmly set, scribe marks illegible, from which the original bearing trees

A cedar, 10 ins. diam., bears N. 10° E., 253 lks. dist., mkd. T42S R6W S12 BT. (Record, 258 lks.)

A cedar, 12 ins. diam., bears N. 71° W., 144 lks. dist., mkd. T42S R6W S11 BT. (Record, 135 lks.)

No other bearing trees identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 11		S 12
S 14		S 13

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp. heretofore described.

N. 89° 51' W., bet. secs. 12 and 13.

Over rolling land, through dense juniper and pinon; desc. W slope.

40.08 The ¼ sec. cor. of secs. 12 and 13, monumented with a squared cedar post, firmly set, with illegible scribe marks, from which the original bearing trees

A cedar, 20 ins. diam., bears N. 72° E., 127 lks. dist., mkd. ¼ S BT.

A cedar, 16 ins. diam., bears south 4 lks. dist., this tree is fallen and dead, mkd. ¼ S BT

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼		S 12
		S 13

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
40.01	<p>S. 89° 25' W., beginning new measurement.</p> <p>Desc. over gentle W slope.</p> <p>The cor. of secs. 11, 12, 13, and 14.</p>	
40.15	<p>N. 0° 06' E., bet. secs. 11 and 12.</p> <p>Over sandy rolling land, through dense juniper and pinon; asc. over gentle S slope.</p> <p>The ¼ sec. cor. of secs. 11 and 12, determined from the original bearing trees</p> <p style="padding-left: 40px;">A pine, 15 ins. diam., bears S. 21° E., 30 lks. dist., mkd. ¼ S BT. (Record, S. 24° E.)</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 81° W., 20 lks. dist., mkd. ¼ S BT. (Record, S. 76½° W.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>T 42 S R 6 W</p> <p>¼</p> <p> </p> <p>S 11 S 12</p> <p> </p> <p>1977</p> </div>	
39.76	<p>N. 0° 02' E., beginning new measurement.</p> <p>Desc. over NW slope, through juniper and pinon.</p> <p>The cor. of secs. 1, 2, 11, and 12, monumented with a squared cedar stake, firmly set, and plainly mkd. 5 notches on S and 1 notch on E edge, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 57° 20' E., 93 lks. dist., mkd. T42S R6W S1 BT.</p> <p style="padding-left: 40px;">A pine, 12 ins. diam., bears S. 33° 20' E., 174 lks. dist., mkd. T42S R6W S12 BT.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 18° 40' W., 20 lks. dist., mkd. T42S R6W S11 BT.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 17° 15' W., 63 lks. dist., mkd. T42S R6W S2 BT.</p> <p>At the corner point.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS						
	<p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 11</td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Set the original stake and acedar post, 6 ins. diam., 6 ft. high alongside the iron post.</p>	S 2	S 1	S 11	S 12	
S 2	S 1					
S 11	S 12					
40.11	<p>From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89° 46' W., bet. secs. 1 and 12.</p> <p>Over rolling land, covered with sagebrush, along E and W fence line; desc. gentle NW slope.</p> <p>The ¼ sec. cor. of secs. 1 and 12, monumented with a blazed cedar stake, firmly set, illegible scribe marks on blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
	<p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 5 ins. diam., 4 ft. high alongside the iron post.</p> <p>Cor. located in E and W fence line.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 44' W., beginning new measurement.</p> <p>Continue over rolling land, along E and W fence line; along gentle N slope.</p>	¼	S 1		S 12	
¼	S 1					
	S 12					
19.92	<p>Point for the W 1/16 sec. cor. of secs. 1 and 12.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">W 1/16</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p style="text-align: center;">1977</p> <p>from which</p> <p style="margin-left: 40px;">A pine, 12 ins. diam., bears S. 55° W., 32 lks. dist., tree being used as fence cor., fences bear E and N.</p>	W 1/16	S 1		S 12	
W 1/16	S 1					
	S 12					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
39.84	<p>Set a cedar post, 5 ins. diam., 5 ft. high, alongside the iron post.</p> <p>The cor. of secs. 1, 2, 11, and 12.</p>	
20.265	<p>N. 0° 13' W., bet. secs. 1 and 2.</p> <p>Over broken hills, through dense juniper and pinon; desc. along W slope.</p> <p>Point for the S 1/16 sec. cor. of secs. 1 and 2.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W S 1/16 S 2 S 1 1977</p> <p>from which</p> <p style="text-align: center;">A cedar, 12 ins. diam., bears S. 60° E., 17 lks. dist., mkd. BT.</p>	
28.20	<p>Wash in Brown Canyon, 10 ft. deep, 20 lks. wide, drains S. 50° W.</p>	
40.53	<p>Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W ¼ S 2 S 1 1977</p>	
45.70	<p>Set a cedar post, 8 ins. diam., 6 ft. high, alongside the iron post.</p> <p>Old road, bears NE and SW; asc. SE slope.</p>	
78.12	<p>The cor. of secs. 1 and 2, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.</p> <p>From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., extending 6 ins. above ground, with brass cap mkd. as described in the official record of the 1914 resurvey of the N. bdy. of T. 43 S., R. 6 W.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
	<p>N. 0° 07' W., bet. secs. 34 and 35.</p> <p>Over rolling, sandy land, through dense juniper and pinon; desc. gentle N slope.</p> <p>34.00 Wash in bottom of North Fork Hog Canyon, drains SW; asc. steep and ledgy SE slope.</p> <p>40.04 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, at pro- portionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 34 S 35 </p> <p style="text-align: center;">1977</p> <p>Asc. steep and ledgy SE slope.</p>
80.08	<p>The cor. of secs. 26, 27, 34, and 35, monumented with a squared cedar stake, firmly set, and plainly mkd. 1 notch on S and 2 notches on E edges, from which the original bearing trees</p> <p>A cedar, 14 ins. diam., bears S. 35° E., 152 lks. dist., mkd. T42S R6W S35 BT. (Record, S. 19° E., 169 lks. dist.)</p> <p>A cedar, 16 ins. diam., bears N. 86° W., 231 lks. dist., mkd. T42S R6W S27 BT. (Record, N. 87$\frac{1}{2}$° W., 240 lks. dist.)</p> <p>No other bearing trees identified.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;"> S 27 S 26 S 34 S 35 </p> <p style="text-align: center;">1977</p> <p>Set the original stake alongside the iron post.</p>
10.50	<p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>S. 89° 46' W., bet. secs. 26 and 35.</p> <p>Over broken hills; desc. along N bank of wash in bottom of North Fork Hog Canyon.</p> <p>Same wash, drains N. 25° W., from E; asc. sandy NE slope, enter heavy growth of trees.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
39.89	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.</p>
68.70	Same wash, drains S from NE; asc. E slope.
79.78	The cor. of secs. 26, 27, 34, and 35.
40.14	<p>N. $0^{\circ} 09'$ W., bet. secs. 26 and 27.</p> <p>Over rolling, sandy bench land, through juniper and pinon; asc. gentle S slope.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a blazed cedar stake, firmly set, illegible scribe marks on blaze, bearing trees not identified.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ S 27 S 26</p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p>
40.00	<p>N. $0^{\circ} 27'$ W., beginning new measurement.</p> <p>Over rolling sandy land.</p> <p>The cor. of secs. 22, 23, 26, and 27, monumented with a squared cedar stake, firmly set, and plainly mkd. 2 notches on S and E edges. No original bearing trees identified.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS								
	<p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">S 23</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 27</td> <td style="padding: 0 5px;">S 26</td> </tr> </table> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 18 ins. diam., bears N. 50° E., 59 lks. dist., mkd. BT.</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears S. 70° W., 102 lks. dist., mkd. BT.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 63° W., 101 lks. dist., mkd. BT.</p> <p>Set the original stake alongside the iron post.</p>	S 22	S 23	S 27	S 26			
S 22	S 23							
S 27	S 26							
<p>39.45</p>	<p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>N. 89° 54' W., bet. secs. 23 and 26.</p> <p>Over rolling, sandy land, through juniper and pinon trees; desc. over general W slope.</p> <p>The ¼ sec. cor. of secs. 23 and 26, monumented with a blazed cedar stake, firmly set, mkd. with dim scribe marks on blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 5px;">¼</td> <td style="border-right: 1px solid black; padding: 0 5px;">S 23</td> <td style="padding: 0 5px;">S 26</td> </tr> <tr> <td></td> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td></td> </tr> </table> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears north, 27 lks. dist., mkd. BT.</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears south, 136 lks. dist., mkd. BT.</p> <p>Set the original cedar stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>S. 89° 20' W., beginning new measurement.</p> <p>Desc. along gentle N slope.</p> <p>40.80 The cor. of secs. 22, 23, 26, and 27.</p>	¼	S 23	S 26				
¼	S 23	S 26						

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
	<p>N. 0° 17' E., bet. secs. 22 and 23.</p> <p>Over sandy hills, through juniper and pinon trees; asc. gentle S slope.</p> <p>40.01 The ¼ sec. cor. of secs. 22 and 23, monumented with a blazed cedar stake, mkd. with dim scribe marks on blaze, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears N. 18° 30' E., 132 lks. dist., mkd. ¼ S BT. (Record, 135 lks. dist.)</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 58° W., 66 lks. dist., mkd. ¼ S BT. (Record, 64 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 22 \quad \quad \text{S } 23 \\ \end{array}$ </div> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <p>Cor. is located 2.00 chs. W of N and S drift fence.</p>	
<p>38.86</p>	<p>N. 0° 04' E., beginning new measurement.</p> <p>Desc. over gentle N slope.</p> <p>The cor. of secs. 14, 15, 22, and 23, monumented with a squared cedar stake, firmly set, and plainly mkd. 3 notches on S and 2 notches on E edges, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 5° E., 107 lks. dist., mkd. T42S R6W S14 BT.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 86° E., 79 lks. dist., mkd. T42S R6W S23 BT. (Record, 78 lks.)</p> <p style="padding-left: 40px;">A cedar limb, bears S. 35° 30' W., 44 lks. dist., mkd. T42S R6W S22 BT.</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 72° W., 63 lks. dist., mkd. T42S R6W S15 BT. (Record, 62 lks.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS					
	<p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 15</td> <td style="padding: 0 5px;">S 14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">S 23</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Set the original stake and a steel fence post alongside the iron post.</p> <p>Cor. is located 36 lks. W of cor. of drift fence, fences bear N, S, and E.</p>	S 15	S 14	S 22	S 23
S 15	S 14				
S 22	S 23				
40.13	<p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>S. 89° 13' W., bet. secs. 14 and 23.</p> <p>Over sandy hills, through juniper and pinon trees; desc. over NW slope.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, determined at record bearing and distance from the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 61° 30' W., 126 lks. dist., mkd. $\frac{1}{4}$ S BT.</p> <p style="padding-left: 40px;">A fallen and partly burned cedar, 14 ins. diam., bears N. 65° 20' W., 88 lks. dist., mkd. $\frac{1}{4}$ S BT.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>				
39.76	<p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">$\frac{1}{4}$</td> <td style="padding: 0 5px;">S 14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 23</td> </tr> </table> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 20° W., 44 lks. dist., mkd. BT.</p> <p>Set a cedar post, 4 ins. diam., 4 ft. high, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 45' W., beginning new measurement.</p> <p>Asc. NE slope of spur, along E and W drift fence.</p> <p>The cor. of secs. 14, 15, 22, and 23.</p>	$\frac{1}{4}$	S 14		S 23
$\frac{1}{4}$	S 14				
	S 23				
	<p>N. 0° 11' W., bet. secs. 14 and 15.</p> <p>Over sandy hills, through juniper and pinon; desc. over N slope.</p>				

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

27.50 Wash in John R. Canyon, drains W irregularly; asc. S slope.

39.88 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a decayed cedar stake, firmly set in ground, from which unrecorded bearing trees

A cedar, 18 ins. diam., bears N. 10° E., 142 lks. dist.; mkd. with faint scribe marks.

A cedar, 16 ins. diam., bears S. 5° W., 120 lks. dist.; mkd. with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
 |
 S 15 | S 14

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.

N. $0^{\circ} 29'$ W., beginning new measurement.

Asc. over SE slope.

40.56 The cor. of secs. 10, 11, 14, and 15, monumented with a squared cedar stake, firmly set, and plainly mkd. 4 notches on S and 2 notches on E edges.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 10 | S 11
 S 15 | S 14

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high, alongside the iron post.

From the cor. of secs. 11, 12, 13, and 14.

S. $89^{\circ} 44'$ W., bet. secs. 11 and 14.

Over sandy land, through juniper and pinon trees; desc. over gentle W slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
39.90	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 11}{S 14}$</p> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears S. 25° W., 45 lks. dist., mkd. BT.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 67° W., 10 lks. dist., mkd. BT.</p> <p>Set a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <p>Asc. along S slope.</p>
79.80	<p>The cor. of secs. 10, 11, 14, and 15.</p>
39.94	<p>N. $0^\circ 08'$ W., bet. secs. 10 and 11.</p> <p>Over broken sandy hills, covered with juniper and pinon; desc. over N slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ S 10 S 11 </p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 8 ins. diam., 6 ft. high alongside the iron post.</p>
57.00	<p>Brown Canyon Wash, 15 ft. deep, 40 lks. wide, drains SW.</p>
58.00	<p>Trail road, bears NE and SW.</p>
79.88	<p>The cor. of secs. 2, 3, 10, and 11, monumented with a decayed cedar stake, still set in ground, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 24 ins. diam., bears S. 39° W., 67 lks. dist., mkd. T42S R6W S10 BT. (Record, S. $35\frac{1}{2}^\circ$ W.)</p> <p style="padding-left: 40px;">A burned cedar stump, bears N. 40° W., 139 lks. dist., marks burned away.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS						
	<p>No other bearing trees recorded.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 3</td> <td style="padding: 0 5px;">S 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 10</td> <td style="padding: 0 5px;">S 11</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 7 ins. diam., 5 ft. high alongside the iron post.</p>	S 3	S 2	S 10	S 11	
S 3	S 2					
S 10	S 11					
<p>37.50</p> <p>39.98</p>	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>S. 89° 39' W., bet. secs. 2 and 11.</p> <p>Over broken sandy hills, through juniper and pinon; desc. over NW slope.</p> <p>Wash in Brown Canyon, 15 ft. deep, 40 lks. wide, drains S. 52° W.</p> <p>The ¼ sec. cor. of secs. 2 and 11, monumented with a blazed cedar stake, firmly set, dim scribe marks on blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 11</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Set the original stake alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 47' W., beginning new measurement.</p> <p>Continue over flat.</p>	¼	S 2		S 11	
¼	S 2					
	S 11					
<p>3.90</p> <p>40.04</p>	<p>Trail road, bears NE and SW.</p> <p>The cor. of secs. 2, 3, 10, and 11.</p>					
<p>40.22</p>	<p>N. 0° 06' E., bet. secs. 2 and 3.</p> <p>Over sandy hills, through juniper and pinon trees; asc. SE slope.</p> <p>The ¼ sec. cor. of secs. 2 and 3, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on W face, from which the original bearing trees</p>					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

A cedar, 16 ins. diam., bears N. 23° E., 16 lks.
dist., mkd. $\frac{1}{4}$ S BT.

A cedar, 18 ins. diam., bears N. 80° W., 13 lks.
dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 39° W.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
 |
 S 3 | S 2
 |

1977

Set the original stake alongside the iron post.

N. 1° 00' W., beginning new measurement.

Asc. sandy S slope.

38.28 The cor. of secs. 2 and 3, on the N. bdy. of the Tp.,
monumented with an iron post, 2½ ins. diam., extending
10 ins. above ground, with cedar post alongside with
brass cap mkd. as described in the official record of
the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.

From the cor. of secs. 3, 4, 33, and 34, on the S. bdy.
of the Tp., monumented with an iron post, 3 ins. diam.,
extending 10 ins. above ground with brass cap mkd. as
described in the official resurvey of the 1914 resurvey
of the N. bdy. of T. 43 S., R. 6 W.

N. 0° 06' W., bet. secs. 33 and 34.

Over rolling, sandy land, on John R. Flat, through pinon
and juniper trees; desc. gentle N slope.

40.08 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34, at propor-
tionate dist.; there is no remaining evidence of the
original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
 |
 S 33 | S 34
 |

1977

Set a steel fence post alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

80.16

The cor. of secs. 27, 28, 33, and 34, monumented with a squared cedar post, firmly set, and mkd. 1 notch on S and 3 notches on E edges, from which the original bearing trees

A dead cedar, 12 ins. diam., bears N. 70° E., 86 lks. dist., mkd. with faint scribe marks. (Record, N. 41° E., 114 lks. dist.)

A cedar, 15 ins. diam., bears N. 85° W., 79 lks. dist., mkd. T42S R6W S28 BT. (Record, N. 43° W., 16 lks. dist.)

No other bearing trees identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 28	S 27
S 33	S 34

1977

Set the original stake alongside the iron post.

From the cor. of secs. 26, 27, 34, and 35.

S. 89° 59' W., bet. secs. 27 and 34.

Over rolling sandy land, through juniper and pinon trees; desc. over general W slope.

40.05

Point for the ¼ sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼	S 27	S 34
	S 34	

1977

from which

A cedar, 16 ins. diam., bears S. 30° E., 2 lks. dist., mkd. BT.

80.10

The cor. of secs. 27, 28, 33, and 34.

N. 0° 04' E., bet. secs. 27 and 28.

Over rolling sandy bench land, covered with dense pinon and juniper trees; asc. over gentle S slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

39.97 The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, determined from the original bearing trees (the old original stake was found lying loose 2 ft. from this point)

A cedar, 14 ins. diam., bears N. 41° E., 157 lks. dist., marks grown over.

A cedar, 12 ins. diam., bears N. $8^\circ 30'$ W., 153 lks. dist., mkd. $\frac{1}{4}$ S BT.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$
 |
 S 28 | S 27
 |

1977

Set the original stake alongside the iron post.

N. $0^\circ 10'$ W., beginning new measurement.

Desc. over gentle NW slope.

40.11 The cor. of secs. 21, 22, 27, and 28, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines of T. 42 S., R. 6 W.

From the cor. of secs. 22, 23, 26, and 27.

West, bet. secs. 22 and 27.

Over rolling sandy hills, covered with juniper and pinon; asc. over sandy SE slope.

39.68 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a blazed cedar stake, firmly set, mkd. $\frac{1}{4}$ S on N face, from which the original bearing trees

A cedar, 24 ins. diam., bears N. 70° E., 86 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 63° E., 53 lks. dist.)

A cedar, 12 ins. diam., bears S. 10° W., 56 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, 53 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

$\frac{1}{4}$ $\frac{S 22}{S 27}$

1977

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

from which

A cedar, 14 ins. diam., bears south, 38 lks. dist., mkd. BT.

Set the original stake alongside the iron post.

S. 89° 53' W., beginning new measurement.

Desc. over gentle W slope.

40.04 The cor. of secs. 21, 22, 27, and 28.

From the cor. of secs. 14, 15, 22, and 23.

N. 88° 34' W., bet. secs. 15 and 22.

Over sandy hills, covered with juniper and pinon; desc. along N slope.

40.16 The 1/4 sec. cor. of secs. 15 and 22, monumented with an iron post, 2 1/2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.

From the 1/4 sec. cor. of secs. 15 and 16, monumented with an iron post, 2 1/2 ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.

N. 0° 04' W., bet. secs. 15 and 16.

Over rolling sandy land, through dense juniper and pinon; asc. over gentle SE slope.

40.12 The cor. of secs. 9, 10, 15, and 16, determined at record course and distance from an original bearing tree

A cedar, 20 ins. diam., bears S. 40° E., 123 lks. dist., with illegible scribe marks.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 9		S 10
S 16		S 15

1977

Set a cedar post, 8 ins. diam., 4 ft. high alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
40.74	<p>From the cor. of secs. 10, 11, 14, and 15. S. 89° 42' W., bet. secs. 10 and 15. Over broken sandy hills, through juniper and pinon trees; asc. over W slope.</p> <p>The ¼ sec. cor. of secs. 10 and 15, monumented with a blazed cedar stake, firmly set, dim scribe marks on blaze.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S 10}{S 15}$</p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 10 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89° 48' W., beginning new measurement.</p> <p>Continue over brushy flat.</p>
7.00	<p>Wash, in Brown Canyon, 10 ft. deep, 30 lks. wide, drains S; asc. over gentle E slope; enter timber.</p>
38.98	<p>The cor. of secs. 9, 10, 15, and 16.</p>
40.06	<p>N. 0° 25' W., bet. secs. 9 and 10.</p> <p>Over rolling sandy land, draining E, through juniper and pinon trees.</p> <p>Point for the ¼ sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ S 9 S 10 </p> <p style="text-align: center;">1977</p>
74.00	<p>Set a cedar post, 6 ins. diam., 4 ft. high alongside the iron post.</p> <p>Trail road, bears E and W.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

80.12

The cor. of secs. 3, 4, 9, and 10, monumented with a squared cedar stake, firmly set, and plainly mkd. 5 notches on S and 3 notches on E edges, from which original bearing trees

A cedar, 30 ins. long, bears S. 25° W., 52 lks. dist., dim scribe marks visible. (Record, S. 68° W., 75 lks. dist.)

A cedar, 14 ins. diam., bears N. 18° W., 20 lks. dist., dim scribe marks visible. (Record, N. 15° W., 98 lks. dist.)

No other bearing trees identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 4	S 3
S 9	S 10

1977

Set the original stake and a cedar post, 6 ins. diam., 4 ft. high alongside the iron post.

41.08

From the cor. of secs. 2, 3, 10, and 11.

S. 89° 52' W., bet. secs. 3 and 10.

Over rolling sandy hills, through juniper and pinon trees; asc. gentle SE slope.

The ¼ sec. cor. of secs. 3 and 10, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on N face, from which the original bearing trees

A cedar, 12 ins. diam., bears N. 17° E., 99 lks. dist., mkd. ¼ S BT. (Record, N. 31° E., 98 lks. dist.)

A cedar, 14 ins. diam., bears S. 27° E., 17 lks. dist., mkd. ¼ S BT. (Record, S. 17° W., 18 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼	S 3
	S 10

1977

Set the original stake and a cedar post, 5 ins. diam., 5 ft. high alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
39.04	<p>West, beginning new measurement.</p> <p>Continue over rolling sandy land.</p> <p>The cor. of secs. 3, 4, 9, and 10.</p>	
40.14	<p>N. 0° 44' W., bet. secs. 3 and 4.</p> <p>Over rolling, sand hills, through juniper and pinon; asc. over gentle S slope.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a blazed cedar stake, firmly set, mkd. $\frac{1}{4}$ S on W face. This cor. falls in small brush flat; there is no remaining evidence of the original bearing trees.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 4 S 3 </p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 1° 06' E., beginning new measurement.</p> <p>Asc. over gentle S slope, through juniper trees.</p> <p>The cor. of secs. 3 and 4, on the N. bdy. of the Tp., heretofore described.</p>	
40.05	<p>From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., extending 12 ins. above ground, with brass cap mkd. as described in the official record of the 1914 resurvey of the N. bdy. of T. 43 S., R. 6 W.</p> <p>N. 0° 10' E., bet. secs. 32 and 33.</p> <p>Over broken land, through dense juniper and pinon; desc. over NE slope.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented with a sandstone, 24 x 12 x 4 ins., plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees</p> <p style="padding-left: 40px;">A fallen pine, 12 ins. diam., bears N. 71° E., 12 lks. dist., mkd. $\frac{1}{4}$ S BT.</p> <p style="padding-left: 40px;">A cedar, 20 ins. diam., bears S. 43° W., 33 lks. dist., mkd. $\frac{1}{4}$ S BT.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 32		S 33
1/4		

1977

Bury mkd. stone, upside down, alongside corner.

N. 0° 41' W., beginning new measurement.

Desc. over N slope.

40.05 The cor. of secs. 28, 29, 32, and 33, monumented with a
sandstone, 32 x 12 x 4 ins., set in a mound of stone, mkd.
1 notch on S and 4 notches on E edges, from which an
original bearing tree

A pine, 18 ins. diam., bears South, 5 lks. dist.,
illegible scribe marks visible.

No other bearing trees recorded.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, in a mound of stone, 5 ft.
base, to top of brass cap, mkd.

T 42 S R 6 W

S 29		S 28
S 32		S 33

1977

Place mkd. stone in mound alongside the iron post.

From the cor. of secs. 27, 28, 33, and 34.

S. 89° 57' W., bet. secs. 28 and 33.

Over rolling sandy land, through juniper and pinon; along
gentle N slope.

40.06 The ¼ sec. cor. of secs. 28 and 33, determined at record
course and distance from the original bearing trees

A cedar, 14 ins. diam., bears S. 27° E., 119 lks.
dist., mkd. ¼ S BT.

A cedar, 24 ins. diam., bears N. 62° 30' W., 63 lks.
dist., mkd. ¼ S BT.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.


Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4} \frac{S 28}{S 33}$</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 52' W., beginning new measurement.</p> <p>Continue along gentle N slope of sandy rise.</p> <p>20.00 Point for the W 1/16 sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">W 1/16 $\frac{S 28}{S 33}$</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 5 ins. diam., 4 ft. high alongside the iron post.</p> <p>40.00 The cor. of secs. 28, 29, 32, and 33.</p>	
	<p>N. 0° 03' W., bet. secs. 28 and 29.</p> <p>Over broken land, along E wall of Kanab Canyon; desc. NW slope.</p> <p>19.98 Point for the S 1/16 sec. cor. of secs. 28 and 29.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">S 1/16</p> <p style="text-align: center;">S 29 S 28</p> <p style="text-align: center;">1977</p> <p>Set a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <p>39.96 Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 42 S R 6 W



1977

Set a cedar post, 5 ins. diam., 5 ft. high alongside the iron post.

Continue along broken W slope.

46.95 The witness point of secs. 28 and 29, monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines of T. 42 S., R. 6 W.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 56' W., bet. secs. 9 and 16.

Over rolling, sandy hills, covered with juniper and pinon; asc. gentle E slope.

40.75 The ¼ sec. cor. of secs. 9 and 16, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on N face, from which an original bearing tree


A cedar, 18 ins. diam., bears N. 69° E., 180 lks. dist., mkd. ¼ S BT.

Other bearing tree not identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W



1977

from which

A cedar, 14 ins. diam., bears South, 16 lks. dist., mkd. BT.

Set the original stake and a cedar post, 6 ins. diam., 6 ft. high alongside the iron post.

N. 88° 12' W., beginning new measurement.

Desc. over gentle W slope.

20.17 Point for the W 1/16 sec. cor. of secs. 9 and 16.

Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
	<p>T 42 S R 6 W</p> <p>W 1/16 $\frac{S 9}{S 16}$</p> <p>1977</p>	
	<p>Desc. broken W slope.</p>	
33.70	Kanab Creek, flows S.	
34.60	Trail road in canyon, bears N and S.	
40.34	The cor. of secs. 8, 9, 16, and 17, monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines of T. 42 S., R. 6 W.	
	<p>N. 1° 44' E., bet. secs. 8 and 9.</p> <p>Over broken land; asc. SE slope of bank on W side of Kanab Canyon.</p>	
39.55	<p>The ¼ sec. cor. of secs. 8 and 9, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on W face, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 26 ins. diam., bears N. 75° E., 51 lks. dist., marks grown over.</p> <p style="padding-left: 40px;">A cedar, 18 ins. diam., bears S. 10° 30' E., 121 lks. dist., marks grown over.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ \\ S 8 \quad \quad S 9 \\ \end{array}$ </div> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 07' E., beginning new measurement.</p> <p>Continue over rolling, sandy bench.</p>	
22.00	Red Canyon Wash, in small ravine, drains E; thence over brush covered small bench.	
40.13	The cor. of secs. 4, 5, 8, and 9, monumented with a squared cedar stake, stake has been bent over but one end is still in ground, plainly mkd. 5 notches on S and 4 notches on E edges.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 5	S 4
S 8	S 9

1977

Set the original stake and a cedar post, 6 ins. diam.,
5 ft. high alongside the iron post.

Cor. is located on E edge of small bench in Kanab Creek
Canyon.

From the cor. of secs. 3, 4, 9, and 10.

S. 89° 49' W., bet. secs. 4 and 9.

Over rolling, sandy land, through juniper and pinon
trees; desc. gentle W slope.

19.00 Trail road, bears NW and SE.

30.20 Same road, bears NE and SW.

39.94 Point for the ¼ sec. cor. of secs. 4 and 9, determined
at record course and distance from original bearing trees

A cedar, 12 ins. diam., bears N. 12° E., 78 lks.
dist., mkd. ¼ S BT.

A cedar, 16 ins. diam., bears N. 60° W., 20 lks.
dist., mkd. ¼ S BT.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

¼	S 4
	S 9

1977

Set a cedar post, 6 ins. diam., 5 ft. high alongside the
iron post.

N. 88° 39' W., beginning new measurement.

Asc. over SE slope.

19.605 Point for the W 1/16 sec. cor. of secs. 4 and 9.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 42 S R 6 W

W 1/16 $\frac{S\ 4}{S\ 9}$

1977

from which

A cedar, 10 ins. diam., bears N. 16° 30' E., 30 lks. dist., mkd. BT.

Set a cedar post, 6 ins. diam., 4 ft. high alongside the iron post.

23.50 Trail road, bears N and S.

33.60 Trail road, bears N and S.

35.00 Kanab Creek, small stream of water, flows S.

39.21 The cor. of secs. 4, 5, 8, and 9.

N. 0° 03' W., bet. secs. 4 and 5.

Over small brushy bench, on W side of Kanab Creek.

20.50 Kanab Creek, small trickle of water, flows SE; asc. along W slope in canyon, enter timber.

40.25 The ¼ sec. cor. of secs. 4 and 5, monumented with a blazed cedar stake, firmly set, mkd. ¼ S on W face, no bearing trees identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼
S 5 | S 4

1977

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.

N. 0° 20' E., beginning new measurement.

Continue along gentle W slope in canyon.

20.50 Kanab Creek, dry at this point, flows S. 20° W.; asc. gentle SE slope, through dense timber.

37.60 The cor. of secs. 4 and 5, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W. in 1959.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
19.64	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., extending 10 ins. above ground with brass cap mkd. as described in the official record of the 1914 resurvey of the N. bdy. of T. 43 S., R. 6 W.</p> <p>N. 0° 01' W., bet. secs. 31 and 32.</p> <p>Over sandy hills, covered with scattered juniper and pinon; asc. gentle S slope.</p> <p>Point for the S 1/16 sec. cor. of secs. 31 and 32.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 42 S R 6 W S 1/16 S 31 S 32 1977</p>
32.40	<p>Desc. steep and ledgy N slope.</p> <p>U.S. Highway No. 89, bears N. 77° 45' W. and S. 77° 45' E.</p>
34.20	<p>Wash in Three Lakes Canyon, drains S. 80° E.; steep and ledgy S slope.</p>
39.28	<p>True point for the ¼ sec. cor. of secs. 31 and 32, at proportionate dist., falls on inaccessible ledges and cannot be monumented.</p>
41.93	<p>The original witness cor. to the ¼ sec. cor. of secs. 31 and 32, monumented with a sandstone, 20 x 14 x 4 ins., mkd. ¼ WC on W face, with mound of stone W of cor.</p> <p>At the witness corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">W C T 42 S R 6 W ¼ S 31 S 32 1977</p>
17.785	<p>N. 0° 01' W., beginning new measurement.</p> <p>Asc. steep and broken S slope, enter timber.</p> <p>Point for the N 1/16 sec. cor. of secs. 31 and 32.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W
N 1/16

S 31 | S 32

1977

from which

A cedar, 6 ins. diam., bears S. 45° E., 19 lks. dist., mkd. BT.

Set a cedar post, 6 ins. diam., 4 ft. high alongside the iron post.

38.22 The cor. of secs. 29, 30, 31, and 32, monumented with a squared cedar stake, firmly set, plainly mkd. 1 notch on S and 5 notches on E edges.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

S 30 | S 29
S 31 | S 32

1977

Set the original stake alongside the iron post.

From the cor. of secs. 28, 29, 32, and 33.

N. 89° 53' W., bet. secs. 29 and 32.

Over broken land of E breaks of Kanab Canyon; desc. steep NW slope and ledges facing NW.

17.50 Kanab Creek, small stream of water, flows S; asc. E slope in canyon.

33.40 Graded dirt road, bears N and S; thence over small bench in canyon.

39.57 Point for the ¼ sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T 42 S R 6 W

¼ S 29
S 32

1977

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
49.47	<p>from which</p> <p>A sandstone boulder, 3 x 6 ft. above ground, bears south, 3 lks. dist., mkd. BO X.</p> <p>Asc. steep and ledgy NE slope.</p> <p>The original witness point of secs. 29 and 32, determined at record course and distance from the original bearing tree.</p> <p>A cedar, 18 ins. diam., bears N. 30° W., 136 lks. dist., mkd. WP.</p> <p>This point will now function as an angle point.</p> <p>At the angle point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">A P T 42 S R 6 W</p> <p style="text-align: center;"><u>S 29</u> S 32</p> <p style="text-align: center;">1977</p> <hr/> <p>S. 89° 56' W., beginning new measurement.</p> <p>Asc. gentle E slope on sandy bench, enter timber.</p>
30.10	<p>The cor. of secs. 29, 30, 31, and 32.</p>
20.055	<p>S. 89° 59' W., bet. secs. 30 and 31.</p> <p>Over rolling, sandy bench, through medium growth of juniper and pinon; asc. gentle E slope.</p> <p>Point for the E 1/16 sec. cor. of secs. 30 and 31.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">E 1/16 <u>S 30</u> S 31</p> <p style="text-align: center;">1977</p>
32.40	<p>Set a cedar post, 5 ins. diam., 5 ft. high alongside the iron post.</p> <p>Wash in Three Lakes Canyon, drains S; thence over canyon bottom.</p>
34.20	<p>U.S. Highway No. 89, bears N. 17° 30' W. and S. 17° 30' E.</p>
40.11	<p>Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original corner.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T 42 S R 6 W

¼ $\frac{S\ 30}{S\ 31}$

1977

Asc. steep E slope, through oak brush.

78.52 The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., heretofore described.

From the cor. of secs. 29, 30, 31, and 32.

N. 0° 03' W., bet. secs. 29 and 30.

Over rolling sandy bench, draining SE, through juniper and pinon trees.

40.13 The ¼ sec. cor. of secs. 29 and 30, monumented with a blazed cedar stake, firmly set, mkd. with dim scribe marks on blaze, no original bearing trees identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 42 S R 6 W

¼
|
S 30 | S 29
|

1977

from which

A cedar, 14 ins. diam., bears N. 76° E., 76 lks. dist., mkd. BT.

Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.

N. 0° 08' W., beginning new measurement.

Continue over rolling, sandy bench.

40.01 The cor. of secs. 19, 20, 29, and 30, monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
	<p>From the cor. of secs. 20, 21, 28, and 29, monumented with a squared cedar post, mkd. 2 notches on the S and 4 notches on the E edges, from which its witness cor., bears S. 89° 48' E., 1.00 ch. dist., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground with a cedar post alongside with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.</p>
	<p>N. 89° 55' W., bet. secs. 20 and 29.</p>
39.90	<p>The ¼ sec. cor. of secs. 20 and 29, monumented with an iron post, extending 6 ins. above ground, with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.</p>
	<p>N. 89° 55' W., beginning new measurement.</p>
39.90	<p>The cor. of secs. 19, 20, 29, and 30.</p> <p>This mile was resurveyed because of the misclosure in secs. 20 and 29.</p>
	<p>N. 89° 59' W., bet. secs. 19 and 30.</p>
	<p>Over rolling, sandy bench land, through juniper and pinon; desc. gentle W slope.</p>
39.97	<p>Point for the ¼ sec. cor. of secs. 19 and 30, at proportionate distance, falls on E edge of highway; there is no remaining evidence of the original cor.</p> <p>Set a nail in road from which</p> <p>An iron post, 12 ins. long, 1 in. diam., drilled 7 ins. in sandstone, for a reference monument, bears N. 32° 56' E., 55.5 lks. dist., with brass cap mkd. ¼ S19 RM T42S R6W 36.6 FT and an arrow pointing to the corner point.</p> <p>An iron post, 12 ins. long, 1 in. diam., drilled 7 ins. in sandstone, for a reference monument, bears S. 60° 19' E., 44 lks. dist., with brass cap mkd. ¼ S30 RM T42S R6W 29 FT and an arrow pointing to the corner point.</p>
40.30	<p>U.S. Highway No. 89, bears N. 24° 40' W. and S. 24° 40' E.</p>
44.00	<p>Creek in Three Lakes Canyon, drains S, also W edge of small lake against ledges; asc. ledges and steep E slope.</p>
78.34	<p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., heretofore described.</p>
	<p>From the cor. of secs. 19, 20, 29, and 30.</p>
	<p>N. 0° 23' E., bet. secs. 19 and 20.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

- Over rolling, sandy bench land, through dense juniper and pinon.
- 40.16 The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, monumented with a blazed cedar stake, firmly set, faint scribe marks on blaze, old survey lath and stakes around corner.
- At the corner point
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 42 S R 6 W
- $\frac{1}{4}$
 |
 S 19 | S 20
 |
- 1977
- Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.
- Cor. is located in small brush flat.
-
- N. $0^{\circ} 29'$ W., beginning new measurement.
- Across small brush flat.
- 6.50 Graded dirt road, bears E and W.
- 36.00 Dirt road, bears E and SW.
- 39.92 The cor. of secs. 17, 18, 19, and 20, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground with brass cap mkd. as described in the official record of the 1977 resurvey of a portion of the subdivisional lines.
-
- N. $89^{\circ} 52'$ W., bet. secs. 18 and 19.
- Over rolling land, through juniper and pinon.
- 20.05 Point for the E $\frac{1}{16}$ sec. cor. of secs. 18 and 19.
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
- T 42 S R 6 W
- E $\frac{1}{16}$ $\frac{S 18}{S 19}$
- 1977
- Cor. is located on low spur, which slopes SE; thence along S slope.
- 40.10 The $\frac{1}{4}$ sec. cor. of secs. 18 and 19, determined at record course and distance from original bearing trees

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
	<p>A cedar, 10 ins. diam., bears S. 21° 30' E., 83 lks. dist., mkd. ¼ S BT.</p> <p>A cedar, 14 ins. diam., bears N. 36° W., 67 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S\ 18}{S\ 19}$</p> <p style="text-align: center;">1977</p> <hr/> <p>N. 89° 58' W., beginning new measurement.</p> <p>Desc. along gentle S slope.</p>
26.40	Old abandoned highway, bears N. 29° 30' W. and S. 29° 30' E.
30.50	U.S. Highway No. 89, bears N. 38° 10' W. and S. 38° 10' E.
38.16	The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., heretofore described.
40.17	<p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0° 08' W., bet. secs. 17 and 18.</p> <p>Over rolling, sandy land, through juniper and pinon; desc. gentle N slope.</p> <p>The ¼ sec. cor. of secs. 17 and 18, monumented with a blazed cedar stake, firmly set, scribe marks have weathered away, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 70° 30' E., 250 lks. dist., marks grown over.</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 3° 30' E., 175 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S\ 18}{S\ 17}$</p> <p style="text-align: center;">1977</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

from which

A cedar, 14 ins. diam., bears N. 82° E., 40 lks.
dist., mkd. BT.

A cedar, 12 ins. diam., bears N. 85° 45' W., 85
lks. dist., mkd. BT.

Set the original stake and a cedar post, 6 ins. diam., 5
ft. high, alongside the iron post.

N. 0° 08' W., beginning new measurement.

Desc. sandy NE slope.

39.82

The cor. of secs. 7, 8, 17, and 18, monumented with a
squared cedar stake, bent over with one end still in
ground, scribe marks and notches weathered away.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

S 7	S 8
S 18	S 17

1977

from which

A ponderosa pine, 30 ins. diam., bears N. 35° E.,
368 lks. dist., mkd. BT.

A cedar, 14 ins. diam., bears East, 121 lks.
dist., mkd. BT.

Set the original stake and a cedar post, 6 ins. diam., 5
ft. high alongside the iron post.

From the cor. of secs. 8, 9, 16, and 17.

S. 89° 22' W., bet. secs. 8 and 17.

Over broken land, on W side of Kanab Canyon; asc. steep
and sandy SE slope.

19.195

Point for the E 1/16 sec. cor. of secs. 8 and 17.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 42 S R 6 W

E 1/16	S 8
	S 17

1977

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
38.39	<p>Set a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, determined at record course and distance from the original bearing trees</p> <p style="padding-left: 40px;">A burned cedar stump, bears N. 84° E., 20 lks. dist., marks burned away.</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 55° E., 42 lks. dist., mkd. $\frac{1}{4}$ S BT.</p> <p>The original cedar stake was found lying loose on the ground.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 8}{S 17}$</p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p>
40.18	<p>N. $89^{\circ} 32'$ W., beginning new measurement.</p> <p>Asc. general E slope, over rolling sand hills, covered with scattered juniper.</p> <p>The cor. of secs. 7, 8, 17, and 18.</p>
40.02	<p>S. $89^{\circ} 57'$ W., bet. secs. 7 and 18.</p> <p>Over rolling, sand hills; asc. general SE slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 7}{S 18}$</p> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 6 ins. diam., bears S. 70° E., 56 lks. dist., mkd. BT.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
78.05	<p>Set a cedar post, 8 ins. diam., 6 ft. high alongside the iron post, located on stop of small sand dune.</p> <p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., heretofore described.</p>
40.04	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0° 04' W., bet. secs. 7 and 8.</p> <p>Over rolling sand hills; along general E slope.</p> <p>Point for the ¼ sec. cor. of secs. 7 and 8, at proportionate dist. The original cedar stake was found lying loose on the ground.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 42 S R 6 W</p> <p>¼</p> <p>S 7 S 8</p> <p>1977</p> </div> <p>Set the original stake and a cedar post, 5 ins. diam., 4 ft. high alongside the iron post.</p> <p>Continue along sandy E slope.</p>
67.00	<p>Wash in Red Canyon, drains S. 75° E.; asc. over S slope.</p>
80.08	<p>The cor. of secs. 5, 6, 7, and 8, monumented with a squared cedar stake, firmly set, mkd. 5 notches on E and S edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 42 S R 6 W</p> <p>S 6 S 5</p> <p>S 7 S 8</p> <p>1977</p> </div> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p>
40.03	<p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>N. 89° 49' W., bet. secs. 5 and 8.</p> <p>Over desert land on W side of Kanab Canyon, across small brush covered bench.</p> <p>The ¼ sec. cor. of secs. 5 and 8, monumented with a stump of old cedar stake, firmly set in the ground.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
39.95	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S 5}{S 8}$</p> <p style="text-align: center;">1977</p> <p>from which</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 12° E., 95 lks. dist., mkd. BT.</p> <p>Set the original stake and a cedar post, 5 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 43' W., beginning new measurement.</p> <p>Asc. general SE slope, across rolling sand hills.</p> <p>The cor. of secs. 5, 6, 7, and 8.</p>
32.00	<p>N. 89° 45' W., bet. secs. 6 and 7.</p> <p>Over rolling sand hills, through medium growth of pinon and juniper trees; asc. E slope of sand hill.</p> <p>Wash in Red Canyon, drains S. 75° E.</p>
41.15	<p>The ¼ sec. cor. of secs. 6 and 7, determined at record course and distance from the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 71° E., 72 lks. dist., marks grown over.</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears S. 13° 20' E., 90 lks. dist., mkd. ¼ S BT.</p> <p>The original cedar stake was found lying loose on the ground.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <p style="text-align: center;">¼ $\frac{S 6}{S 7}$</p> <p style="text-align: center;">1977</p> <p>Set the original stake and a cedar post, 6 ins. diam., 5 ft. high alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 42 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
36.86	<p>N. 89° 59' W., beginning new measurement.</p> <p>Asc. along N slope, on S side of Red Canyon.</p> <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., heretofore described.</p>
40.12	<p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0° 08' W., bet. secs. 5 and 6.</p> <p>Over rolling, sandy hills, draining E, through medium growth of juniper and pinon.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 42 S R 6 W</p> <div style="text-align: center;"> $\frac{1}{4}$ S 6 S 5 </div> <p style="text-align: center;">1977</p>
77.45	<p>Asc. gentle SE slope, through dense timber.</p> <p>The cor. of secs. 5 and 6, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1959 resurvey of the S. bdy. of T. 41 S., R. 6 W.</p>
	<p style="text-align: center;">General Description</p> <p>Township 42 South, Range 6 West, consists mainly of high bench land covered with rolling sand hills. There are several canyons in the township, the main ones being Kanab and Three Lakes Canyons. The bench land is covered with medium to dense growth of pinon and juniper trees. The only permanent water is Kanab Creek, draining S in Kanab Canyon, and a small stream and several small lakes in Three Lakes Canyon. The main roads are a gravel road in Kanab Canyon and U.S. Highway No. 89, which enters the township on the S. bdy. of sec. 32, bears NW through Three Lakes Canyon, and leaves the township on the E. bdy. of sec. 18. There are numerous trail roads within the township, used for livestock care, post cutting, and hunting. Four wheel drive vehicles are needed to travel most of the trail roads. The only permanent habitation is a guest ranch located in sec. 29. The elevation varies from about 5,000 to 6,000 ft. above sea level.</p>

CERTIFICATE OF SURVEY

~~(XX)~~We), Craig P. Sylvester, Ferrel D. Reynolds and Gail E. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 8th day

of September, 19 77, ~~(XX)~~(We) have dependently resurveyed the east boundary Panguitch and Kanab Guide Meridian, the west boundary, the west one half mile of the north boundary of section 3, and a portion of the subdivisional lines of T. 42 S., R. 6 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by ~~(XX)~~ (us) and under ~~(XX)~~ (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 8, 1980
(Date)

Craig P. Sylvester
(Cadastral Surveyor)

January 8, 1980

Ferrel D. Reynolds
(Cadastral Surveyor)

January 8, 1980
(Date)

Gail E. Reynolds
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the east boundary Panguitch and Kanab Guide Meridian, the west boundary, the west one half mile of the north boundary of section 3, and a portion of the subdivisional lines of T. 42 S., R. 6 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Ferrel D. Reynolds and Gail E. Reynolds having been critically examined and found correct, are hereby approved.

SEP 04 1980

(Date)

Allan Arnold
ACTING Chief, Cadastral Survey Examination and Approval Staff

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Cadastral Survey Examination and Approval Staff)~~

INDEX DIAGRAM

Township 37 S., Range 2 W.

7	6	5	4			
6	58 8	45 4	36 3	27 2	17 1	
57	57	44	36	26	16	
7	56 8	44 9	35 10	25 11	15 12	
55	54	43	34	24	15	
18	53 17	42 16	33 15	23 14	13 13	
53	52	41	32	22	13	
19	51 20	41 21	31 22	21 23	12 24	
50	49	40	30	21	11	
30	48 29	39 28	29 27	20 26	9 25	
47	47	38	28	19	9	
31	46 32	37 33	27 34	18 35	7 36	
				3	2	

Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

T. 37 S., R. 2 W.

History of Surveys

<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
--------------------	-------------------------------

NORTH BOUNDARY

All	Alfred B. Lewis	1897	
E. 2 miles		R. C. Yundt	1950

SOUTH BOUNDARY

All	Alfred B. Lewis	1897	
W. 4 miles		W. H. Sylvester	1960

EAST BOUNDARY

All	Alfred B. Lewis	1897	
All		Vern E. Lane	1958

WEST BOUNDARY

All	Alfred B. Lewis	1897	
N. 1 mile		J. H. Clark	1904

SUBDIVISION

All	Alfred B. Lewis	1897	
-----	-----------------	------	--

The following field notes are those of a dependent resurvey of a portion of the south boundary, a portion of the north boundary and the subdivisional lines in Township 37 South, Range 2 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 29, 1976.

The directions of the lines of this survey were determined by reference to the true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

The distances along surveyed lines were determined by electronic measurement. The distances to topography on lines run by traverse due to rough terrain, timber and private property are approximately as scaled from U.S.G.S. topographic sheets.

Before restoring lost corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The geographic position for the southeast corner of the township, as determined from a tie made to U.S.G.S. triangulation station "Cannonville, 1959", located in sec. 21, T. 37 S., R. 2 W., Salt Lake Meridian, is:

Latitude 37° 32' 09.08" N. Longitude 111° 56' 48.10" W.

Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15\frac{1}{2}^{\circ}$ East.

Dependent Resurvey of a Portion of the South Boundary, Township 37 South, Range 2 West, Salt Lake Meridian, Utah

(Restoring the 1897 survey by Alfred B. Lewis)

Beginning at the true point for the cor. of Tps. 37 and 38 S., Rs. 1 and 2 W., from which its witness cor. bears East, 30 lks. dist., an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground and mkd.

	T 37 S	
	R 2 W	R 1 W
W	S 36	S 31
C	S 1	S 6

T 38 S
1958

S. $89^{\circ} 39'$ W., bet. secs. 1 and 36.

Over rolling land, through scattered pinon and juniper growth.

- 1.00 Wash, course S. 10° W.
- 22.00 Base of hill, bears N and S; asc. E slope.
- 35.50 Rim of bench, bears N and S; over rolling land.
- 38.66 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a sandstone, 18 x 12 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees
 - A cedar, 16 ins. diam., bears N. 46° E., 95 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, 98 lks. dist.)
 - A pinon, 12 ins. diam., bears S. 70° E., 33 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, 36 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

$\frac{1}{4}$	S 36
	S 1

T 38 S R 2 W
1976

Deposit the mkd. stone alongside the iron post.

Set a cedar post, 6 ft. long, alongside the cor.

Dependent Resurvey of a Portion of the South Boundary,
Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

S. $89^{\circ} 48'$ W., beginning new measurement.

40.18 The cor. of secs. 1, 2, 35, and 36, monumented with a sandstone, 30 x 12 x 6 ins., firmly set and plainly mkd. 5 notches on the W and 1 notch on E edges, from which the original bearing trees

A pinon, 24 ins. diam., bears S. 57° W., 49 lks. dist., mkd. T38S R2W S2 BT. (Dead).

A pinon, 16 ins. diam., bears N. 44° W., 81 lks. dist., mkd. T37S R2W S35 BT. (Dead).

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 2 W

S 35	S 36
S 2	S 1

T 38 S R 2 W
1976

Deposit the mkd. stone alongside the iron post.

West, bet. secs. 2 and 35.

Over rolling bench land, through pinon and juniper growth.

39.94 The $\frac{1}{4}$ sec. cor. of secs. 2 and 35, monumented with a sandstone, 14 x 12 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which an original bearing tree

A pinon, 12 ins. diam., bears N. $32^{\circ} 40'$ W., 34 lks. dist., with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T 37 S R 2 W

$\frac{1}{4}$ S 35	
S 2	

T 38 S R 2 W
1976

Deposit the mkd. stone in mound alongside the iron post.

Cor. is located on rim of canyon, bears N. 30° W. and S. 30° E.

Dependent Resurvey of a Portion of the South Boundary,
Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS					
	N. 89° 59' W., beginning new measurement. Desc. SW slope.				
6.00	Wash in canyon, course N; asc. E slope.				
14.00	Spur, projects N. 30° W.; desc. W slope.				
22.00	Wash in canyon, course N; asc. NE slope.				
39.68	The cor. of secs. 2, 3, 34, and 35, monumented with an iron post, 2½ ins. diam., set in a mound of stone and mkd.				
	T 37 S R 2 W <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 34</td> <td style="padding: 0 5px;">S 35</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 3</td> <td style="padding: 0 5px;">S 2</td> </tr> </table> T 38 S 1960	S 34	S 35	S 3	S 2
S 34	S 35				
S 3	S 2				
Dependent Resurvey of a Portion of the North Boundary, Township 37 South, Range 2 West, Salt Lake Meridian, Utah					
(Restoring the 1897 survey by Alfred B. Lewis)					
	From the cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., protruding 8 ins. above ground, with brass cap mkd. as described in the 1950 resurvey.				
	S. 89° 56' W., bet. secs. 3 and 34.				
	Over mountainous land through lightly scattered pinon and juniper growth; asc. E slope.				
18.00	Top of spur, projects S; desc. SW slope.				
24.50	Wash in canyon, course S. 10° E.; asc. W slope.				
28.50	Rim of bench, bears N and S; over rolling land, railed and reseeded.				
39.74	Point for the ¼ sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				
	T 36 S R 2 W <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 34</td> <td style="padding: 0 5px;">S 3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 3</td> <td style="padding: 0 5px;">S 3</td> </tr> </table> T 37 S 1976	¼ S 34	S 3	¼ S 3	S 3
¼ S 34	S 3				
¼ S 3	S 3				

Dependent Resurvey of a Portion of the North Boundary,
Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS							
	Set a cedar post, 7 ft. long, alongside the cor.						
60.00	Desc. NW slope, through pinon and juniper growth.						
79.48	The cor. of secs. 3, 4, 33, and 34, monumented with a limestone, 18 x 10 x 6 ins., firmly set and plainly mkd. 3 notches on E and W edges.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 36 S R 2 W						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">S 33</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 34</td> </tr> <tr> <td style="padding: 0 5px;">S 4</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 3</td> </tr> </table>	S 33		S 34	S 4		S 3
S 33		S 34					
S 4		S 3					
	T 37 S						
	1976						
	Deposit the mkd. stone alongside the iron post.						
	Set a steel fence post, 6 ft. long, alongside the cor.						
	N. 89° 50' W., bet. secs. 4 and 33. Over mountainous land, through scattered pinon and juniper growth.						
20.60	Spur, slopes SW; desc. W slope.						
27.00	Base of hill, bears NE and SW; over rolling land.						
39.96	The ¼ sec. cor. of secs. 4 and 33, monumented with a limestone, 16 x 12 x 6 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees						
	A pinon, 12 ins. diam., bears N. 4° E., 43 lks. dist., mkd. ¼ S BT.						
	A pinon, 12 ins. diam., bears S. 23° E., 43 lks. dist., mkd. ¼ S BT.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.						
	T 36 S R 2 W						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">¼</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 33</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 4</td> </tr> </table>	¼		S 33			S 4
¼		S 33					
		S 4					
	T 37 S						
	1976						
	Deposit the mkd. stone alongside the iron post.						
	Set a steel fence post, 6 ft. long, alongside the cor.						
	N. 89° 04' W., beginning new measurement.						

Dependent Resurvey of a Portion of the North Boundary,
Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS						
3.00	Rim of bench, bears NE and SW; desc. NW slope.					
9.17	Power line, bears N. 67° 13' W. and S. 67° 13' E., also base of steep desc.; over rolling land.					
39.67	<p>The cor. of secs. 4, 5, 32, and 33, monumented with a limestone, 14 x 10 x 6 ins., firmly set and plainly mkd. 4 notches on E and 2 notches on the W edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 32</td> <td style="padding: 0 5px;">S 33</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 5</td> <td style="padding: 0 5px;">S 4</td> </tr> </table> <p style="text-align: center;">T 37 S 1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located 53 lks. North of cor. of fence, bearing N and W.</p>	S 32	S 33	S 5	S 4	
S 32	S 33					
S 5	S 4					
40.10	<p>S. 89° 23' W., bet. secs. 5 and 32.</p> <p>Over rolling land, through sagebrush and shadscale.</p> <p>The ¼ sec. cor. of secs. 5 and 32, monumented with a cedar post, 4 ft. long, scribed ¼ S on N side.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 32</td> <td style="padding: 0 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 5</td> <td style="padding: 0 5px;"></td> </tr> </table> <p style="text-align: center;">T 37 S 1976</p> <p>Set the mkd. cedar post alongside the iron post.</p> <p>Cor. is located 32 lks. North of E - W fence line.</p>	¼ S 32		S 5		
¼ S 32						
S 5						
40.02	<p>N. 89° 55' W., beginning new measurement.</p> <p>The cor. of secs. 5, 6, 31, and 32, monumented with a sandstone, 11 x 10 x 10 ins., firmly set and plainly mkd. 5 notches on E and 1 notch on the W edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p>					

Dependent Resurvey of a Portion of the North Boundary,
Township 37 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

T 36 S R 2 W

S 31	S 32
S 6	S 5

T 37 S
1976

Deposit the mkd. stone alongside the iron post.

Cor. is located 3 lks. W and 6 lks. S of cor. of fence, bearing E, W, and S.

N. 89° 54' W., bet. secs. 6 and 31.

Over nearly level land, through sagebrush and shadscale.

6.50 Wash, course SW.

16.25 Dirt road, bears N. 89° 54' W. and NE, on turn.

39.93 Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, at proportionate distance, falls in center of dirt road; there is no remaining evidence of the original corner.

Deposit broken glass, $1\frac{1}{2}$ ft. below surface of road, from which

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 31° 20' E., 38 lks. dist., mkd. T36S R 2 W $\frac{1}{4}$ S 31 RM 25 FT, 1976 and an arrow pointing to the cor.

An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 32° E., 38 lks. dist., mkd. T37S R2W $\frac{1}{4}$ S6 RM 25 FT 1976 and an arrow pointing to the cor.

Both cors. located in E - W fence line.

69.40 North Creek, 10 lks. wide, 3 ins. deep, course SW; leave dirt road, curves NW.

77.64 The cor. of Tps. 36 and 37 S., Rs. 2 and 3 W., as described in the field notes of T. 37 S., R. 3 W., executed concurrently under this same group.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

(Restoring the 1897 survey by Alfred B. Lewis)

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., heretofore described.

N. 0° 07' E., bet. secs. 35 and 36.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
	Over mountainous land, through pinon and juniper growth.	
16.50	Wash, course N. 80° W.	
26.50	Wash, course S. 80° W.; asc. S slope.	
39.95	The ¼ sec. cor. of secs. 35 and 36, monumented with a sandstone, 26 x 11 x 4 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing trees	
	<p>A pinon, 12 ins. diam., bears N. 74° E., 20 lks. dist., mkd. ¼ S BT.</p> <p>A dead pinon, 12 ins. diam., bears S. 2° E., 28 lks. dist., mkd. ¼ S BT. (Record, S. 1½° E.)</p>	
	At the corner point	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p>T 37 S R 2 W</p> <p>¼</p> <p>S 35 S 36</p> <p>1976</p>	
	Deposit the mkd. stone alongside the iron post.	
	<hr style="width: 20%; margin: auto;"/>	
	N. 0° 03' E., beginning new measurement.	
2.00	Top of low ridge, bears E and W; over rolling land.	
10.00	Desc. NE slope.	
39.00	Small spur, projects NE; desc. NW slope.	
39.90	The cor. of secs. 25, 26, 35, and 36, monumented with a sandstone, 14 x 12 x 3 ins., firmly set and plainly mkd. 1 notch on the S and E edges, from which the original bearing trees	
	<p>A pinon, 12 ins. diam., bears S. 30° E., 60 lks. dist., mkd. T37S R2W S36 BT. (Record, S. 49° E., 62 lks. dist.).</p> <p>A pinon, 12 ins. diam., bears S. 65° W., 45 lks. dist., mkd. T37S R2W S35 BT. (Record, S. 63½° W., 46 lks. dist.)</p> <p>A pinon, 12 ins. diam., bears N. 20° W., 24 lks. dist., mkd. T37S R2W S26 BT. (Record, N. 18° W.)</p>	
	At the corner point	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

T 37 S R 2 W

S 26	S 25
S 35	S 36

1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, NW of cor.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 6 ins. above ground, with brass cap mkd. as described in the 1958 resurvey.

West, bet. secs. 25 and 36.

Over mountainous land, through pinon and juniper growth; desc. NW slope.

34.00 Wash in canyon, course S. 58° W.; asc. SE slope.

39.55 Point for the ¼ sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 2 W

¼	S 25
	S 36

1976

42.50 Slope change; desc. SW slope.

68.00 Wash in canyon, course NW; asc. NE slope.

78.30 Small spur, slopes NE; desc. NW slope.

79.10 The cor. of secs. 25, 26, 35, and 36.

N. 0° 10' E., bet. secs. 25 and 26.

Over mountainous land, through pinon and juniper growth; desc. NW slope.

3.00 Small draw, drains NE.

9.00 Wash in canyon, course N. 15° W.; along W slope.

21.00 Wash in canyon, course W.; asc. S slope.

34.00 Top of point on ridge, bears E and W; desc. N slope.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
40.69	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, at proportionate distance (previous corner witnessed).</p>	
	<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>	
	<p>T 37 S R 2 W</p> <p>$\frac{1}{4}$</p> <p>S 26 S 25</p> <p>1976</p>	
50.07	<p>The witness $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 12 x 6 x 3 ins., firmly set and plainly mkd. WC $\frac{1}{4}$ on W face, from which an original bearing tree</p>	
	<p>A pinon, 12 ins. diam., bears S. 55° W., 47 lks. dist., mkd. $\frac{1}{4}$ S BT.</p>	
	<p>This witness cor. now becomes an angle point.</p>	
	<p>At the corner point</p>	
	<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>	
	<p>AP</p> <p>T 37 S R 2 W</p> <p>S 26 S 25</p> <p>1976</p>	
	<p>Deposit the mkd. stone alongside the iron post.</p>	
	<p>Cor. is located at base of hill, bears E and W.</p>	
	<p>N. $0^{\circ} 27'$ E., beginning new measurement.</p>	
	<p>Over rolling land in bottom of wide draw.</p>	
8.00	<p>Creek in draw, 20 lks. wide, 1 in. deep, flows W.</p>	
10.93	<p>There is no remaining evidence of the original witness cor.</p>	
12.00	<p>Base of hill, bears E and W; asc. SW slope.</p>	
24.00	<p>Spur, slopes SW; desc. NW slope.</p>	
28.50	<p>Small draw, drains SW; asc. S slope.</p>	
30.64	<p>Point for the cor. of secs. 23, 24, 25, and 26, at proportionate distance (previous corner witnessed).</p>	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 2 W

S 23	S 24
S 26	S 25

1976

Cor. is located on S slope of clay spur.

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground, with brass cap mkd.

T 37 S
R 2 W R 1 W

S 24	S 30
S 25	

1958

N. 88° 53' W., bet. secs. 24 and 25.

Over mountainous land, through scattered pinon and juniper growth; asc. SE slope.

12.50 Spur, projects S; desc. along S slope.

35.00 Slope changes; desc. along NW slope.

39.82 Point for the ¼ sec. cor. of secs. 24 and 25, as determined at record bearing and distance from its original witness cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T 37 S R 2 W

¼	S 24
	S 25

1976

Cor. is located on steep NW slope of clay spur.

From this cor., the original witness ¼ sec. cor. of secs. 24 and 25, bears South, 12.78 chs. dist., a sandstone, 16 x 12 x 3 ins., firmly set and plainly mkd. ¼ WC on N face, from which the original bearing object

A sandstone boulder, 20 x 10 x 8 ft. above ground, bears S. 4° W., 18 lks. dist., mkd W X O.

This witness cor. now becomes a reference monument; add the letters R M to cor.

N. 89° 45' W., beginning new measurement.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
9.00	Wash in side canyon, drains SW; asc. SE slope.
32.50	Spur, projects SW; desc. NW slope.
38.50	Small draw, drains SW; along S slope.
39.64	The cor. of secs. 23, 24, 25, and 26.
N. 0° 33' W., bet. secs. 23 and 24.	
Over mountainous land, through scattered pinon and juniper growth; asc. S slope.	
3.00	Spur, slopes S. 80° W.; along W slope.
20.00	Spur. projects NW; desc. NW slope.
33.00	Draw, drains NW; asc. SW slope.
35.00	Top of small gravel spur, slopes NW; desc. NE slope.
36.81	Point selected for the witness cor. to the ¼ sec. cor. of secs. 23 and 24.
Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.	
<p style="text-align: center;">W C T 37 S R 2 W</p>	
<p style="text-align: center;"> $\frac{1}{4}$ ↑ S 23 S 24 </p>	
1976	
Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.	
Cor. is located at base of hill, bears NW and E.	
39.81	Point for the ¼ sec. cor. of secs. 23 and 24, at proportionate distance, falls in flood area and is unsuitable for monumentation.
40.81	Point for the original witness cor. to the ¼ sec. cor. of secs. 23 and 24, at proportionate distance, falls in Henrieville Creek, 6 ins. deep, 2 chs. wide, flows SW; there is no remaining evidence of the original cor.
61.00	Base of hill, bears E and W; asc. S slope.
73.50	Spur, slopes SE; desc. NE slope.
78.50	Wash in draw, 10 lks. wide, 5 ft. deep, drains SE; asc. SW slope.
79.62	Point for the cor. of secs. 13, 14, 23, and 24, at proportionate distance; there is no remaining evidence of the original corner.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{S\ 14}{S\ 23} \mid \frac{S\ 13}{S\ 24}$ </p> <p style="text-align: center;">1976</p> <p>Cor. is located on small clay point.</p>
	<p>From the true point for the cor. of secs. 13 and 24, on the E. bdy. of the Tp., from which its witness cor., bears N. 0° 21' W., 3.00 chs. dist., an iron post, 2½ ins. diam., in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;"> T 37 S R 2 W R 1 W </p> <p style="text-align: center;"> $\frac{S\ 13}{S\ 24} \mid S\ 19$ ↓ WC 1958 </p> <p>N. 89° 42' W., bet. secs. 13 and 24.</p> <p>Over mountainous land, through scattered pinon and juniper growth; desc. NW slope over series of small spurs and draws.</p>
39.90	<p>Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4} \frac{S\ 13}{S\ 24}$ </p> <p style="text-align: center;">1976</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of cor.</p> <p>Cor. is located at base of hill, bears NE and SW; over rolling bottom land.</p>
45.00	<p>Henrieville Creek, 4 ins. deep, 2.00 chs. wide, flows SW.</p>
60.00	<p>Asc. SE slope.</p>
77.70	<p>Small spur, slopes S; desc. W slope.</p>
79.80	<p>The cor. of secs. 13, 14, 23, and 24.</p>
	<p>N. 1° 06' E., bet. secs. 13 and 14.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
	Over mountainous land, through scattered pinon and juniper growth; asc. steep SE slope.				
22.50	Rim of bench, bears NE and SW; over rolling land.				
27.00	Wash in small canyon, drains SW.				
39.82	The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a limestone, 15 x 12 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees A cedar, 12 ins. diam., bears S. 40° E., 33 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 39° E., 35 lks. dist.). A pinon, 16 ins. diam., (dead) bears N. 35° W., 65 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 36 $\frac{1}{2}$ ° W., 66 lks. dist.) At the corner point Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 37 S R 2 W <div style="text-align: center;"> $\frac{1}{4}$ S 14 S 13 1976 </div> Deposit the mkd. stone alongside the iron post. <hr style="width: 20%; margin: auto;"/> N. 2° 58' W., beginning new measurement. 4.00 Wash in small canyon, drains S. 75° W. 18.50 Rim of bench, bears NE and SW; desc. NW slope. 35.50 Clay spur, projects NW; desc. NE slope. 40.10 The cor. of secs. 11, 12, 13, and 14, monumented with a sandstone, 20 x 16 x 8 ins., firmly set and plainly mkd. 4 notches on the S and 1 notch on E edges. At the corner point Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd. T 37 S R 2 W <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td>S 11</td> <td>S 12</td> </tr> <tr> <td>S 14</td> <td>S 13</td> </tr> </table> 1976 </div> Deposit the mkd. stone alongside the iron post. Cor. is located on NE slope of clay spur.	S 11	S 12	S 14	S 13
S 11	S 12				
S 14	S 13				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set 8 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 37 S
R 2 W R 1 W

S 12 |
S 13 | S 18

1958

N. 89° 56' W., bet. secs. 12 and 13.

Over gentle rolling land, through sagebrush and shadscale.

- 6.24 Power line, bears N. 43° 51' W. and S. 43° 51' E.
- 15.00 Begin gradual ascent.
- 34.00 Spur, projects N; desc. W slope.
- 40.33 Point for the ¼ sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T 37 S R 2 W
- ¼ $\frac{S 12}{S 13}$
- 1976
- 40.98 Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor. Wash, 10 lks. wide, 3 ft. deep, drains N. 10° W.; along N slope, over series of small spurs and washes.
- 79.15 Small wash, 10 lks wide, 2 ft. deep, drains N. 10° W.; asc. NE slope.
- 80.66 The cor. of secs. 11, 12, 13, and 14.

N. 0° 15' E., bet. secs. 11 and 12.

Over rolling land, through sagebrush and shadscale.

- 35.25 Top of small knoll; desc. gentle N slope.
- 39.95 Point for the ¼ sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 11 S 12 </p> <p style="text-align: center;">1976</p> <p>Cor. is located on gentle W slope of clay spur.</p> <p>49.77 Utah Highway No. 54, bears E and W on curve.</p> <p>56.88 Power line, bears S. 62° 30' E. and N. 62° 30' W.; over nearly level land.</p> <p>77.10 Power line, bears S. 43° 51' E. and N. 43° 51' W.</p> <p>79.90 The cor. of secs. 1, 2, 11, and 12, monumented with a sandstone, 14 x 10 x 4 ins., firmly set and plainly mkd. 5 notches on S and 1 notch on E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> S 2 S 1 S 11 S 12 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located at the cor. of 4 strand fence, bearing N and E.</p> <hr/> <p>From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground and mkd.</p> <p style="text-align: center;">T 37 S R 2 W R 1 W</p> <p style="text-align: center;"> S 1 S 12 S 7 </p> <p style="text-align: center;">1958</p> <p>N. 89° 53' W., bet. secs. 1 and 12.</p> <p>Over gentle rolling land, covered with sagebrush and shadscale.</p> <p>40.07 Point for the ¼ sec. cor. of secs. 1 and 12, at proportionate distance; there is no remainig evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>T 37 S R 2 W</p> <p>$\frac{1}{4}$ $\frac{S 1}{S 12}$</p> <p>1976</p>
69.65	Cor. of fence, bears S and W.
80.14	The cor. of secs. 1, 2, 11, and 12.
	<p>N. 0° 30' E., bet. secs. 1 and 2.</p> <p>Over gentle rolling land, covered with sagebrush and shadscale.</p>
1.35	Wash, drains SW.
39.56	<p>The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented with a sandstone, 16 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 2 S 1</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located 2 lks. W of fence line, bears N and S.</p> <p style="text-align: center;">_____</p> <p>N. 0° 10' E., beginning new measurement.</p> <p>Asc. gradual SE slope.</p>
30.74	Top of clay spur, slopes E; desc. NE slope.
40.12	<p>The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 2 W</p> <p style="text-align: center;">$\frac{S 35}{S 2}$ $\frac{S 36}{S 1}$</p> <p style="text-align: center;">T 37 S</p> <p style="text-align: center;">1950</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., heretofore described.

N. 0° 04' E., bet. secs. 34 and 35.


Over mountainous land, through pinon and juniper growth; desc. NE slope.

17.00 Wash in canyon, drains NW; asc. SW slope.

39.94 Point for the ¼ sec. cor. of secs. 34 and 35, as determined from record bearing and distance, from its original witness cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 37 S R 2 W



1976

Cor. is located on steep SW slope of hill.

From this cor., the original witness ¼ sec. cor. of secs. 34 and 35, bears East, 1.60 chs. dist., a sandstone boulder, 20 x 10 x 8 ins., above ground, mkd. ¼ WC on top.

This witness cor. now functions as a reference monument, add the letters R M to cor.

N. 0° 09' W., beginning new measurement.

3.50 Rim of bench, bears NW and SE; over rolling land.


30.00 Rim of bench, bears E and W; desc. N slope.

39.00 Wash in canyon, course N. 70° W.; asc. SW slope.

39.88 Point for the cor. of secs. 26, 27, 34, and 35, as determined at record bearing and distance, from its original witness cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 2 W



1976

From this cor., the original witness cor. of secs. 26, 27, 34, and 35, bears East, 8.75 chs. dist.

Cor. is located on steep SW slope of clay spur.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>S. 89° 56' W., bet. secs. 26 and 35.</p> <p>Over mountainous land, through pinon and juniper growth; along N slope.</p>
12.50	Small draw, course NE.
25.00	Divide, bears NE and SW; desc. gentle NW slope.
39.91	<p>The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with a limestone, 12 x 10 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which an original bearing tree</p> <p>A cedar, 8 ins. diam., bears N. 55° 30' W., 31 lks. dist., mkd. $\frac{1}{4}$ S BT (record, N. 55$\frac{1}{2}$° E.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>West, beginning new measurement.</p>
2.00	Along S slope.
31.17	<p>The witness cor., to the cor. of secs. 26, 27, 34, and 35, monumented with a limestone, 14 x 12 x 6 ins., firmly set and plainly mkd. 2 notches on the E and 1 notch on S edges, from which the original bearing trees</p> <p>A pinon, 12 ins. diam., bears N. 48° 30' E., 48 lks. dist., with faint scribe marks.</p> <p>A pinon, 18 ins. diam., bears S. 80° E., 82 lks. dist., with faint scribe marks.</p> <p>A pinon, 12 ins. diam., bears S. 63° W., 9 lks. dist., with faint scribe marks.</p> <p>A pinon stump, N. 15° W., 61 lks. dist., no marks.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">A P</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1976</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
8.75	<p>Deposit the mkd. stone alongside the iron post. Cor. is located on rim of bench, bears NW and SE. This cor. now functions as an angle point.</p> <hr/> <p>West, beginning new measurement. Desc. SW slope.</p> <p>The cor. of secs. 26, 27, 34, and 35.</p>
11.00 24.00 40.07	<p>N. 0° 16' E., bet. secs. 26 and 27. Over mountainous land, through pinon and juniper growth; asc. SW slope.</p> <p>Ridge, bears E and W; desc. N slope.</p> <p>Base of hill, bears NE and SW; over rolling land.</p> <p>Point for the ¼ sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>¼</p> <p>S 27 S 26</p> <p>1976</p> </div>
43.00	<p>Raise a mound of stone, 2 ft. base, 1 ft. high, W of cor.</p> <p>Henrieville Creek, 1.00 ch. wide, 8 ft. deep, drains SW.</p>
46.00	<p>Trail road, at base of hill, bears E and W; asc. steep S slope.</p>
63.50	<p>Rim of bench, bears NE and SW; over rolling land.</p>
79.00	<p>Rim of bench, bears NE and SW; desc. NW slope.</p>
80.14	<p>Point for the cor. of secs. 22, 23, 26, and 27, at proportionate distance; there is no remaining evidence of the original witness cor. to secs. 22, 23, 26, and 27.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>S 22 S 23</p> <p>S 27 S 26</p> <p>1976</p> </div>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah


CHAINS	
	<p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>S. 89° 39' W., bet. secs. 23 and 26.</p> <p>Over mountainous land, through lightly scattered pinon and juniper growth; desc. SW slope.</p>
10.00	Wash in draw, course NW; asc. NE slope.
21.00	Spur, slopes N; desc NW slope.
30.00	Base of hill, bears NE and SW; over rolling land.
39.64	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a limestone, 14 x 12 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 23}{S\ 26}$</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a cedar post, 6 ft. long, alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 33' W., beginning new measurement.</p>
5.00	Henrieville Creek, 20 lks. wide, 5 ins. deep, flows SW.
14.00	Base of hill, bears NE and SW; asc. SE slope.
24.00	Rim of bench, bears NE and SW; asc. gentle SE slope.
38.90	Ridge, bears NE and SW; desc. gentle NW slope.
39.50	Rim of bench, bears NE and SW; desc. steep NW slope.
40.19	The cor. of secs. 22, 23, 26, and 27.
	<p>N. 2° 32' W., bet. secs. 22 and 23.</p> <p>Over mountainous land, through scattered pinon and juniper growth; desc. NW slope.</p>
16.00	Spur, slopes W; desc. N slope.
25.00	Base of hill, bears E and W; over rolling land.
32.00	Wash, course W; asc. gentle SW slope.
40.11	Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, as determined at record bearing and distance from its original witness cor.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 37 S R 2 W



1976

Raise a mound of stone, 3½ ft. base, 2 ft. high, W of cor.

Cor. is located on steep W slope of draw, drains S.

From this cor., the original witness ¼ sec. cor. of secs. 22 and 23, bears West, 11.10 chs. dist., an old mound of stone, from which an original bearing tree

A cedar, 18 ins. diam., bears N. 45° E., 56 lks. dist., mkd. WC ¼ S BT.

N. 1° 51' E., beginning new measurement.

2.50 Spur, slopes W; desc. NW slope, also leave cedar and pinon growth; through sagebrush and shadscale.


9.00 Base of hill, bears E and W; over rolling land.

37.00 Asc. SE slope of spur.

40.00 Point for the cor. of secs. 14, 15, 22, and 23, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W



1976

Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.

Cor. is located on NW slope of small draw, drains SW.

From the cor. of secs. 13, 14, 23, and 24.

N. 89° 35' W., bet. secs. 14 and 23.

Over mountainous land, through pinon and juniper growth; asc. SE slope.

21.75 Rim of bench, bears NE and SW; over rolling land.

23.94 The witness cor. to the ¼ sec. cor. of secs. 14 and 23, monumented with a sandstone, 15 x 11 x 5 ins., firmly set and plainly mkd. ¼ WC on N face.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">A P T 37 S R 2 W</p> <p style="text-align: center;">$\frac{S\ 14}{S\ 23}$</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>This cor. now functions as an angle point only.</p> <p style="text-align: center;">—————</p> <p>S. 89° 41' W., beginning new measurement.</p>
0.50	Rim of bench, bears NE and SW; desc. NW slope.
15.89	Point for the ¼ sec. cor. of secs. 14 and 23, at proportionate distance.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4} \frac{S\ 14}{S\ 23}$</p> <p style="text-align: center;">1976</p> <p>Cor. is located on steep NW slope of clay hill.</p>
21.00	Wash in canyon, course S. 60° W.; along broken S slope.
55.61	The cor. of secs. 14, 15, 22, and 23.
	<p>N. 1° 15' W., bet. secs. 14 and 15.</p> <p>Over rolling land, through sagebrush and shadscale; asc. SW slope.</p>
2.50	Small spur, slopes W; desc. NW slope.
8.50	Base of spur, bears NE and SW; over gentle rolling land.
31.75	State Highway No. 54, bears N. 16° 12' E. and S. 16° 12' W.
40.00	Point for the ¼ sec. cor. of secs. 14 and 15, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 15 S 14 1976 </p>
50.00	Dry Creek, course S. 16° W.
80.00	<p>The cor. of secs. 10, 11, 14, and 15, monumented with a sandstone, 16 x 14 x 4 ins., firmly set and plainly mkd. 4 notches on S and 2 notches on the E edges, from which the original bearing trees</p> <p>A pinon, 14 ins. diam., bears N. 28° 30' E., 38 lks. dist., mkd. T37S R2W S11 BT. (Record, 30 lks. dist.)</p> <p>A pinon, 8 ins. diam., bears S. 13° 30' E., 41 lks. dist., mkd. T37S R2W S14 BT. (Record, 43 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{S\ 10}{S\ 15}$ $\frac{S\ 11}{S\ 14}$ 1976 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located at base of hill, bears NE and SW.</p>
	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>S. 89° 54' W., bet. secs. 11 and 14.</p> <p>Over mountainous land, through lightly scattered pinon and juniper growth; asc. NE slope.</p>
1.50	Top of spur, slopes N. 20° W.; over series of small spurs and washes along NW slope.
40.38	<p>The ¼ sec. cor. of secs. 11 and 14, monumented with a broken sandstone with illegible markings and a small mound of stone.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S\ 11}{S\ 14}$ 1976 </p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Deposit the mkd. stone alongside the iron post. Cor. is located on W slope of low clay hills.</p> <hr/> <p>N. 89° 56' W., beginning new measurement.</p>
24.50	State Highway No. 54, bears N. 16° 12' E. and S. 16° 12' W.
31.00	Dry Creek, course S. 16° W.; beginning gradual asc. of SE slope.
39.61	The cor. of secs. 10, 11, 14, and 15.
	<p>N. 0° 01' W., bet. secs. 10 and 11.</p> <p>Over mountainous land, through scattered pinon and juniper growth; asc. SE slope.</p>
10.50	Spur, slopes E; over series of spurs and draws along NE slope.
39.69	<p>The ¼ sec. cor. of secs. 10 and 11, monumented with a sandstone, 16 x 10 x 7 ins., firmly set and plainly mkd. ¼ on W face, from which unrecorded bearing trees</p> <p>A pinon, 12 ins. diam., bears S. 25° E., 27 lks. dist., with faint scribe marks.</p> <p>A pinon stump, bears S. 55° W., 11 lks. dist., with old blaze marks.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>¼</p> <p>S 10 S 11</p> <p>1976</p> </div>
	<p>Deposit the mkd. stone alongside the iron post. Cor. is located on NE slope of spur.</p> <hr/> <p>N. 0° 29' E., beginning new measurement.</p>
5.00	Wash, drains E; asc. S slope.
10.00	Spur, slopes E; desc. NE slope.
25.50	Wash, drains E; asc. SW slope.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
40.30	<p>The cor. of secs. 2, 3, 10, and 11, monumented with a sandstone, 20 x 12 x 6 ins., firmly set and plainly mkd. 5 notches on the S and 2 notches on the E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 3</td> <td style="padding: 0 5px;">S 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 10</td> <td style="padding: 0 5px;">S 11</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	S 3	S 2	S 10	S 11
S 3	S 2				
S 10	S 11				
	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>N. 89° 57' W., bet. secs. 2 and 11.</p> <p>Over gentle rolling land, through sagebrush and shadscale.</p>				
1.00	Wash, drains SW.				
2.66	Power line, bears N. 43° 51' W. and S. 43° 51' E.				
30.00	Dry Creek, drains S.				
39.91	<p>The ¼ sec. cor. of secs. 2 and 11, monumented with a limestone, 14 x 10 x 6 ins., firmly set and plainly mkd. ¼ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 11</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a cedar post, 5 ft. long, alongside the cor.</p>	¼	S 2		S 11
¼	S 2				
	S 11				
	<p>N. 89° 55' W., beginning new measurement.</p>				
4.60	Power line, bears N. 62° 30' W. and S. 62° 30' E.				
17.50	Trail road, bears NW and SE.				
32.00	Asc. SE slope, through lightly scattered pinon and juniper growth.				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
40.02	The cor. of secs. 2, 3, 10, and 11.
	N. 0° 24' E., bet. secs. 2 and 3.
	Over mountainous land; asc. gentle S slope.
2.50	Top of low spur, slopes E; desc. N slope.
4.00	Trail road, bears E and W, leave cedar and pinon growth; over rolling land.
18.36	Power line, bears N. 62° 30' W. and S. 62° 30' E.
40.14	The ¼ sec. cor. of secs. 2 and 3, monumented with a limestone, 12 x 10 x 3 ins., firmly set and plainly mkd. ¼ on W face.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 3 S 2 </p> <p style="text-align: center;">1976</p>
	Deposit the mkd. stone alongside the iron post.
	N. 0° 08' E., beginning new measurement.
20.00	Asc. SE slope over series of clay spurs and washes.
32.50	Small spur, slopes E; desc. NE slope.
39.40	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., heretofore described.
	From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set in a mound of stone and mkd.
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> <u>S 33 S 34</u> S 4 S 3 </p> <p style="text-align: center;">T 38 S 1960</p>
	N. 0° 16' E., bet. secs. 33 and 34.
	Over mountainous land, through scattered pinon and juniper growth; over rolling bench top.
12.00	Rim of bench, bears NW and SE; desc. NE slope.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- 25.00 Base of hill, bears NW and SE; over rolling land.
- 39.90 The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a sandstone, 12 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which an original bearing tree
- A pinon, 12 ins. diam., bears S. 53° E., 35 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. 63° 20' E., 37 lks.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 2 W

$\frac{1}{4}$
 |
 S 33 | S 34
 |

1976

Deposit the mkd. stone alongside the iron post.

N. 0° 02' E., beginning new measurement.

- 5.00 Leave cedar and pinon growth; through sagebrush and shadscale.
- 40.07 The cor. of secs. 27, 28, 33, and 34, perpetuated by persons unknown with a steel fence post, set at the intersection of the projection of fences from the N, S, and E. This position is harmoniously related to existing original cors. has long been recognized as the cor. by adjacent landowners, and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

S 28 | S 27
 S 33 | S 34

1976

Set the steel fence post alongside the cor.

From the cor. of secs. 26, 27, 34, and 35.

N. 89° 49' W., bet. secs. 27 and 34.


Over mountainous land, through scattered pinon and juniper growth; desc. SW slope.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
1.75	Wash in canyon, course N. 70° W.; along broken N slope.
30.00	Small side canyon, course N; asc. NE slope.
36.65	Rim of small bench, bears N. 15° W. and S. 15° E.; over rolling land.
39.28	Point for the ¼ sec. cor. of secs. 27 and 34, at proportionate distance; no previous cor. set here.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 37 S R 2 W
	$\frac{1}{4} \quad \frac{S \ 27}{S \ 34}$
	1976
	Set a cedar limb, 5 ins. diam., 4 ft. long, alongside the cor.
45.20	Rim of bench, bears N and SE; desc. W slope.
58.92	The original witness cor. to the ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone, 20 x 12 x 6 ins., firmly set and plainly mkd. ¼ WC on N face. This point will now function as an angle point.
	At the angle point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	A P
	T 37 S R 2 W
	$\frac{S \ 27}{S \ 34}$
	1976
	Deposit the mkd. stone alongside the iron post.
	Cor. is located in old E - W fence line.

	S. 89° 51' W., beginning new measurement.
	Over gentle rolling land, no timber.
20.75	New fence line, bears N and S.
20.87	The cor. of secs. 27, 28, 33, and 34.
	N. 0° 09' E., bet. secs. 27 and 28.
	Over rolling land; asc. S slope of knoll.
2.00	Dirt road, bears E and W.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
10.50	Top of round knoll; desc. N slope.
18.00	Over gentle rolling land.
37.50	Henrieville Creek, drains W.
40.04	The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a limestone, 12 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
	T 37 S R 2 W
	
	1976
	Deposit the mkd. stone alongside the iron post.
	Cor. is located 86 lks. S of E - W fence line and 124 lks. W of N - S fence line.
	N. $0^{\circ} 18' W.$, beginning new measurement.
18.50	Dry Creek, drains SW.
28.30	State Highway No. 54, bears E and W; over cultivated land.
39.65	Fence line, bears E and W.
40.00	Point for the cor. of secs. 21, 22, 27, and 28, at proportionate distance, falls in cultivated field and cannot be perpetuated; there is no remaining evidence of the original cor., from which
	An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. $20^{\circ} E.$, 38 lks. dist., mkd. RM T37S R2W S27 25FT. 1976 and an arrow pointing to the cor.
	An iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. $20^{\circ} W.$, 36 lks. dist., mkd. RM T37S R2W S28 24FT. 1976 and an arrow pointing to the cor.
	Both cors. located near E - W fence line.
	From the cor. of secs. 22, 23, 26, and 27.
	S. $89^{\circ} 59' W.$, bet. secs. 22 and 27.
	Over mountainous land, through scattered pinon and juniper growth; desc. NW slope.
14.25	Spur, slopes NW; desc. W slope.

205

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
20.00	Base of hill, bears E and W; over rolling land, through sagebrush and shadscale.
33.50	State Highway No. 54, bears N. 16° 12' E. and S. 16° 12' W. into the town of Henrieville.
40.19	The ¼ sec. cor. of secs. 22 and 27, monumented with a sandstone, 18 x 12 x 8 ins., firmly set and plainly mkd. ¼ on N face. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T 37 S R 2 W ¼ S 22 S 27 1976 Deposit the mkd. stone alongside the iron post. Cor. is located in rock and netwire fence line, bears N and S. 50 lks. E of gravel road, bears N and S, in Henrieville, Utah. S. 89° 59' W., beginning new measurement.
23.00	Dry Creek, course SW; leave housing area, over cultivated land.
40.07	The cor. of secs. 21, 22, 27, and 28.
	N. 0° 09' E., bet. secs. 21 and 22. Over gentle rolling cultivated land.
20.00	Leave cultivated land, through sagebrush and shadscale.
38.40	Small clay spur, slopes E.
40.00	The ¼ sec. cor. of secs. 21 and 22, monumented with a sandstone, 16 x 12 x 6 ins., firmly set and plainly mkd. ¼ on W face, from which an original bearing tree A cedar, 14 ins. diam., bears S. 58° W., 61 lks. dist., mkd. ¼ S BT. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd. T 37 S R 2 W ¼ S 21 S 22 1976

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
40.04	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located at the cor. of old fence line, bears E and S. 70° W.</p> <hr/> <p>N. 0° 03' W., beginning new measurement.</p> <p>Through sagebrush and shadscale.</p> <p>The cor. of secs. 15, 16, 21, and 22, perpetuated by persons unknow with a cedar post. This position is harmoniously related to existing original cors., has long been recognized as the cor. by adjacent landowners, and is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <table border="1" style="margin: auto;"> <tr> <td>S 16</td> <td>S 15</td> </tr> <tr> <td>S 21</td> <td>S 22</td> </tr> </table> <p>1976</p> </div> <p>Set the cedar post alongside the iron post.</p> <p>Cor. is located on gentle S slope.</p>	S 16	S 15	S 21	S 22
S 16	S 15				
S 21	S 22				
7.00 9.00 23.50 36.74	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>S. 89° 55' W., bet. secs. 15 and 22.</p> <p>Over rolling land, through sagebrush and shadscale, along S slope.</p> <p>Base of small hill, bears N and S; over gentle rolling land.</p> <p>State Highway No. 54, bears N. 16° 12' E. and S. 16° 12' W.</p> <p>Dry Creek, course S. 16° W.</p> <p>The witness ¼ sec. cor. of secs. 15 and 22, monumented with a sandstone, 14 x 8 x 6 ins., firmly set and plainly mkd. WC ¼ on N fece, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon, 12 ins. diam., bears N. 57° E., 35 lks. dist., mkd. WC ¼ S BT.</p> <p style="padding-left: 40px;">A pinon, 12 ins. diam., bears S. 23° W., 66 lks. dist., mkd. WC ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

W C
T 37 S R 2 W

$\frac{1}{4}$ ← $\frac{S 15}{S 22}$

1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Cor. is located at the base of steep hill, bears N and S.

N. $89^{\circ} 59'$ W., beginning new measurement.

- 3.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, at proportionate distance, falls on steep E slope and is unsuitable for monumentation.
- 10.00 Spur, projects S; desc. SW slope.
- 19.00 Base of hill, bears NW and SE; over rolling land.
- 34.00 Small spur, slopes S.
- 42.95 The cor. of secs. 15, 16, 21, and 22.

N. $0^{\circ} 05'$ W., bet. secs. 15 and 16.

Over mountainous land, through scattered pinon and juniper growth, along broken W slope.

- 35.03 The witness $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a sandstone, 18 x 8 x 6 ins., firmly set and plainly mkd. W $\frac{1}{4}$ C on W face, from which the original bearing trees

A cedar, 14 ins. diam., bears S. 88° E., 85 lks. dist., mkd. WC $\frac{1}{4}$ S BT.

A cedar, 12 ins. diam., bears N. 60° W., 37 lks. dist., mkd. WC $\frac{1}{4}$ S BT. (Record, 48 lks.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
T 37 S R 2 W

$\frac{1}{4}$
↑
S 16 | S 15
|

1976

Deposit the mkd. stone alongside the iron post.

N. $1^{\circ} 15'$ W., beginning new measurement.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS							
	Along broken W slope.						
5.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, at proportionate distance, falls in bottom of small wash, drains SW, and cannot be monumented.						
18.00	Wash in canyon, course S. 15° W.; asc. SE slope.						
37.00	Rim of bench, bears NE and SW; over rolling land.						
44.98	The cor. of secs. 9, 10, 15, and 16, monumented with a limestone, 18 x 10 x 8 ins., firmly set and plainly mkd. 4 notches on the S and 3 notches on the E edges, from which an original bearing tree						
	A pinon, 12 ins. diam., bears S. $50^{\circ} 30'$ W., 24 lks. dist., mkd. T37S R2W S16 BT. (Record, 25 lks. dist.)						
	At the corner point						
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 37 S R 2 W						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 9</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 10</td> </tr> <tr> <td style="padding: 2px;">S 16</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 15</td> </tr> </table>	S 9		S 10	S 16		S 15
S 9		S 10					
S 16		S 15					
	1976						
	Deposit the mkd. stone alongside the iron post.						
	Cor. is located at S edge of railed area, bears E and W.						
24.70	From the cor. of secs. 10, 11, 14, and 15.						
	N. $89^{\circ} 59'$ W., bet. secs. 10 and 15.						
	Over mountainous land, through scattered pinon and juniper growth; asc. SE slope.						
40.06	Rim of bench, bears NE and SW; over railed area.						
	The $\frac{1}{4}$ sec. cor. of secs. 10 and 15 monumented with a cedar post, 2 ft. long, mkd. $\frac{1}{4}$ S, from which an original bearing tree						
	A cedar, 14 ins. diam., bears S. $27^{\circ} 30'$ E., 82 lks. dist., mkd. $\frac{1}{4}$ S BT.						
	At the corner point						
	Set an iron post, 28 ins. long, 2 ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 37 S R 2 W						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">$\frac{1}{4}$</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 10</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 15</td> </tr> </table>	$\frac{1}{4}$		S 10			S 15
$\frac{1}{4}$		S 10					
		S 15					
	1976						
	Set mkd. cedar post, alongside the iron post.						
	Set a steel fence post, alongside the iron post.						

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
17.00	S. 89° 59' W., beginning new measurement. Wash, course SW.
38.88	The cor. of secs. 9, 10, 15, and 16.
40.06	<p>N. 0° 01' W., bet. secs. 9 and 10.</p> <p>Over rolling bench land, railed and reseeded.</p> <p>The ¼ sec. cor. of secs. 9 and 10, marked with a squared cedar post, with faint scribe marks visible, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon, 12 ins. diam., bears N. 73° E., 149 lks. dist., mkd. ¼ S BT.</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 87° E., 79 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>¼</p> <p>S 9 S 10</p> <p>1976</p> </div> <p>Set the squared cedar post alongside the iron post.</p> <p>Set a steel fence post alongside the iron post.</p>
9.00	N. 0° 12' W., beginning new measurement. Trail road, bears E and W.
40.05	<p>The cor. of secs. 3, 4, 9, and 10, monumented with a sandstone, 12 x 10 x 10 ins., firmly set and plainly mkd. 5 notches on the S and 3 notches on the E edges, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 23° E., 100 lks. dist., mkd. T37S R2W S3 BT.</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears S. 74° E., 94 lks. dist., mkd. T37S R2W S10 BT.</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 76° W., 78 lks. dist., mkd. T37S R2W S4 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 4 & S 3 \\ \hline S 9 & S 10 \\ \hline \end{array}$ </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post. Set a steel fence post alongside the iron post.</p>	
36.00	<p>From the cor. of secs. 2, 3, 10, and 11. S. 89° 59' W., bet. secs. 3 and 10. Over mountainous land, through scattered pinon and juniper growth; asc. W slope.</p>	
39.40	<p>Rim of bench, bears N and S; over rolling land, railed and reseeded.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with a limestone, 14 x 10 x 5 ins., firmly set and dimly mkd. $\frac{1}{4}$ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>	
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{c} S 3 \\ \hline S 10 \end{array}$ </p> <p style="text-align: center;">1976</p>	
27.00	<p>Deposit the mkd. stone in mound alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 49' W., beginning new measurement.</p>	
37.00	<p>Wash, drains SW.</p>	
37.00	<p>Trail road, bears N and S.</p>	
40.04	<p>The cor. of secs. 3, 4, 9, and 10.</p>	
38.80	<p>N. 0° 43' W., bet. secs. 3 and 4. Over rolling bench land, railed and reseeded.</p>	
39.99	<p>Fence line, 4 strand, bears E and W.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a limestone, 16 x 8 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 16 ins. diam., bears N. 74° E., 68 lks. dist., mkd. $\frac{1}{4}$ S BT.</p> <p style="padding-left: 40px;">A pinon, 16 ins. diam., bears S. 9° W., 23 lks. dist., mkd. $\frac{1}{4}$ S BT.</p>	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

$\frac{1}{4}$
 |
 S 4 | S 3
 |

1976

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the iron post.

N. $1^{\circ} 15'$ E., beginning new measurement.

- 16.00 Rim of bench, bears NE and SW; desc. NW slope to lower bench, leave railed area.
- 18.50 Power line, bears N. $67^{\circ} 13'$ W. and S. $67^{\circ} 13'$ E.
- 27.00 Base of hill, bears NE and SW; over rolling land.
- 39.36 The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., heretofore described.

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground and mkd.

T 37 S R 2 W

$\frac{S 32}{S 5}$ | $\frac{S 33}{S 4}$

T 38 S
1960

N. $0^{\circ} 03'$ E., bet. secs. 32 and 33.

Over mountainous land, through scattered pinon and juniper growth; asc. gentle SE slope.

- 14.00 Ridge, bears NE and SW; desc. broken NW slope.
- 32.00 Base of hill, bears NE and SW; over rolling land.
- 39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>T 37 S R 2 W</p> <p style="margin-left: 100px;"> $\frac{1}{4}$ S 32 S 33 </p> <p>1976</p>
43.30	Point of sandstone spur, projects W.
67.00	Henrieville Creek, (dry) course W.
75.00	Leave bottomland, over cultivated land.
79.92	The cor. of secs. 28, 29, 32, and 33, monumented with a limestone, 18 x 12 x 10 ins., firmly set and plainly mkd. 4 notches on the E and 1 notch on S edges.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T 37 S R 2 W</p> <p style="margin-left: 100px;"> S 29 S 28 S 32 S 33 </p> <p>1976</p>
	Deposit the mkd. stone alongside the iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
	From the cor. of secs. 27, 28, 33, and 34.
	N. 89° 44' W., bet. secs. 28 and 33.
	Over rolling land, through sagebrush and shadscale.
6.00	Enter cultivated land.
35.00	Leave cultivated land; asc. NE slope through scattered pinon and juniper growth.
39.92	The ¼ sec. cor. of secs. 28 and 33, monumented with a limestone, 16 x 12 x 6 ins., firmly set and plainly mkd. ¼ on N face, from which an original bearing tree
	A pinon, 14 ins. diam., (dead on ground), bears S. 2° W., 24 lks. dist., mkd. ¼ S BT.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.
	<p>T 37 S R 2 W</p> <p style="margin-left: 100px;"> $\frac{1}{4}$ S 28 S 33 </p> <p>1976</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
	<p>Deposit the mkd. stone alongside the iron post.</p> <hr/> <p>S. 89° 25' W., beginning new measurement.</p>	
1.00	Spur, slopes N; desc. NW slope.	
23.00	Henrieville Creek, (dry) course S; over cultivated land.	
40.58	The cor. of secs. 28, 29, 32, and 33.	
	<p>N. 0° 02' W., bet. secs. 28 and 29.</p> <p>Over cultivated land.</p>	
39.50	Cor. of fence, bears S and W; enter road right-of-way.	
40.11	<p>The ¼ sec. cor. of secs. 28 and 29, determined by projection of fence lines from the north, south and east and the projection of center of dirt road from the west.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>¼</p> <p>S 29 S 28</p> <p>1976</p> </div> <p>Cor. is located at the S edge of dirt road, bears W and NE on curve.</p> <hr/> <p>N. 0° 13' W., beginning new measurement.</p>	
0.60	Fence cor., bears N and W; asc. gentle S slope.	
7.00	State Highway No. 54, bears N. 69° W. and E on curve	
11.00	Base of hill, bears E and W; asc. steep S slope.	
17.00	Point of bluff, bears E and W; desc. steep NW slope.	
25.00	Base of hill, bears NE and SW; along W slope.	
40.15	The cor. of secs. 20, 21, 28, and 29, monumented with a sandstone, 14 x 8 x 6 ins., firmly set and dimly mkd. 4 notches on E and 2 notches on the S edges, from which the original bearing trees	

214

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

A cedar, 14 ins. diam., bears S. $51^{\circ} 30'$ E.,
104 lks. dist., mkd. T37S R2W S28 BT.

A cedar, 16 ins. diam., bears S. 87° W., 89 lks.
dist., mkd. T37S R2W S29 BT.

A cedar, 14 ins. diam., bears N. 33° W., 85 lks.
dist., mkd. T37S R2W S20 BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T 37 S R 2 W

S 20	S 21
S 29	S 28

1976

Deposit the mkd. stone alongside the iron post.

Cor. is located on SW slope of hill.

From this cor., U.S.G.S. triangulation station "Cannon-
ville, 1959", bears N. $33^{\circ} 42'$ E., 57.275 chs. dist.,
a brass tablet, 3 ins. diam., set in concrete on solid
rock.

From the cor. of secs. 21, 22, 27, and 28.

S. $89^{\circ} 33'$ W., bet. secs. 21 and 28.

Over cultivated land.

16.75 Dirt road, bears N and S, leave farm land; asc. gentle
SE slope, through sagebrush and shadscale.

25.50 Clay spur, slopes S; over rolling land.

40.02 The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, marked by an old
mound of stone and several survey pegs. This position
is harmoniously related to existing original cors.,
has long been recognized as the cor. by adjacent land-
owners, and is accepted as the best available evidence
of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T 37 S R 2 W

$\frac{1}{4}$ S 21
S 28

1976

Set a cedar post, 6 ft. long, alongside the iron post.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
<p>3.25 27.00 32.65 40.54</p>	<p>N. 89° 33' W., beginning new measurement. Wash, drains SW. Base of hill, bears N and S; asc. steep E slope. Top of ridge, bears N and S; desc. steep W slope. The cor. of secs. 20, 21, 28, and 29.</p>
<p>7.00 27.00 40.01</p>	<p>N. 0° 01' W., bet. secs. 20 and 21. Over mountainous land, through scattered pinon and juniper growth; asc. SW slope. Spur, slopes S. 60° W.; desc. broken NW slope. Base of hill; bears NE and SW over rolling land. Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p>
<p>64.00 80.02</p>	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 20 S 21 </p> <p style="text-align: center;">1976</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor. Set a cedar post, alongside the iron post. Wash, course S. 15° W. The cor. of secs. 16, 17, 20, and 21, monumented with a sandstone, 16 x 12 x 4 ins., firmly set and plainly mkd. 4 notches on the E and 3 notches on the S edges.</p>
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> S 17 S 16 S 20 S 21 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p>
	<p>From the cor. of secs. 15, 16, 21, and 22. West, bet. secs. 16 and 21.</p>

216



Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	Over mountainous land, through light scattered pinon and juniper growth.
7.00	Base of hill, bears N and S; asc. NE slope.
27.00	N point of bench; desc. NW slope.
39.30	Small draw, drains NW.
40.33	Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T 37 S R 2 W
	$\frac{1}{4}$ $\frac{S 16}{S 21}$
	1976
52.00	Spur, slopes NW.
64.00	Base of hill, bears NE and SW; over rolling land.
68.50	Wash, course S. 30° W.
80.66	The cor. of secs. 16, 17, 20, and 21.
	N. $0^\circ 12'$ W., bet. secs. 16 and 17.
	Over mountainous land, through lightly scattered pinon and juniper growth; asc. gentle SE slope.
40.08	The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a sandstone, 14 x 10 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees
	A pinon, 12 ins. diam., bears S. 26° E., 56 lks. dist., mkd. $\frac{1}{4}$ S BT.
	A cedar, 14 ins. diam., bears N. $16^\circ 20'$ W., 72 lks. dist., mkd. $\frac{1}{4}$ S BT.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T 37 S R 2 W
	$\frac{1}{4}$
	S 17 S 16
	1976
	Deposit the mkd. stone alongside the iron post.
	Cor. is located at base of hill, bears N. 20° E. and S. 20° W.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
	<p>N. 0° 08' W., beginning new measurement.</p> <p>Asc. steep SE slope.</p>				
21.50	Rim of bench, bears N. 20° E. and S. 20° W.; over rolling land, railed and reseeded.				
39.92	<p>The cor. of secs. 8, 9, 16, and 17, monumented with a sandstone, 12 x 10 x 10 ins., firmly set and plainly mkd. 4 notches on the S and E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 8</td> <td style="padding: 0 5px;">S 9</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 17</td> <td style="padding: 0 5px;">S 16</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	S 8	S 9	S 17	S 16
S 8	S 9				
S 17	S 16				
	<p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 89° 59' W., bet. secs. 9 and 16.</p> <p>Over rolling bench land, railed and reseeded.</p>				
38.00	Left rim of ravine, bears NE and SW.				
39.93	<p>Point for the ¼ sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 9</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 16</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p>	¼	S 9		S 16
¼	S 9				
	S 16				
43.00	Wash in ravine, course SW.				
44.00	Right rim of ravine, bears NE and SW.				
51.00	Wash, course S.				
67.00	Wash, course S.				
79.86	The cor. of secs. 8, 9, 16, and 17.				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
40.09	<p>N. 0° 01' W., bet. secs. 8 and 9.</p> <p>Over rolling bench land, railed and reseeded.</p> <p>The ¼ sec. cor. of secs. 8 and 9, monumented with a sandstone, 12 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face, original bearing trees railed out.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p>
<p>T 37 S R 2 W</p>  <p>1976</p>	
<p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post, alongside the iron post.</p> <p>Cor. is located 46 lks. E of cor. of fence, bearing N. 45° E. and S. 25° W.</p>	
<hr/>	
<p>N. 0° 06' E., beginning new measurement.</p>	
3.00	Rim of bench, bears NE and SW; desc. NW slope.
20.00	Base of hill, bears NE and SW; over lower bench.
31.00	Wash, course SW.
40.00	<p>The cor. of secs. 4, 5, 8, and 9, monumented with a sandstone, 12 x 10 x 8 ins., firmly set and plainly mkd. 5 notches on S and 4 notches on the E edges, from which the 1 remaining bearing tree</p> <p>A cedar, 12 ins. diam., bears S. 64° 30' E., 22 lks. dist., mkd. T37S R2W S9 BT.</p>
<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p>	
<p>T 37 S R 2 W</p>  <p>1976</p>	
<p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the iron post.</p>	
<p>From the cor. of secs. 3, 4, 9, and 10.</p>	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
	<p>N. 89° 54' W., bet. secs. 4 and 9.</p> <p>Over rolling bench land, railed and reseeded.</p> <p>15.50 Wash, course S. 15° W.</p> <p>39.64 The ¼ sec. cor. of secs. 4 and 9, monumented with a limestone, 12 x 8 x 6 ins., firmly set and plainly mkd. ¼ on N face, original bearing trees railed out.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">¼ S 4 S 9</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on 4 strand fence line, bears N. 45° E. and S. 45° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 52' W., beginning new measurement.</p> <p>1.50 Rim of bench, bears NE and SW; desc. NW slope.</p> <p>15.00 Base of hill, bears NE and SW; over lower bench.</p> <p>39.98 The cor. of secs. 4, 5, 8, and 9.</p>	
	<p>N. 0° 02' E., bet. secs. 4 and 5.</p> <p>Over rolling bench land, railed and reseeded.</p> <p>19.00 Wash, course W.</p> <p>40.02 The ¼ sec. cor. of secs. 4 and 5, monumented with a limestone, 12 x 10 x 8 ins., firmly set and plainly mkd. ¼ on W face, from which an original bearing tree</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 41° W., 20 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">¼ S 5 S 4 </p> <p style="text-align: center;">1976</p>	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Set a steel fence post, W of cor.

N. 0° 27' E., beginning new measurement.

4.85 Rim of bench, bears E and W; desc. N slope, through scattered pinon and juniper growth.

24.35 Small clay knoll, continue descent.

40.09 The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., heretofore described.

From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set in a mound of stone to top, with brass cap mkd.

T 37 S R 2 W

S 31	S 32
S 6	S 5

T 38 S
1960

N. 0° 03' W., bet. secs. 31 and 32.

Over mountainous land, through scattered pinon and juniper growth; desc NW slope.

29.00 Henrieville Creek (dry), course W; over rolling land, through sagebrush and shadscale.

40.12 The ¼ sec. cor. of secs. 31 and 32, monumented with a squared cedar post, with old scribe marks visible and a sandstone, 12 x 6 x 2 ins., mkd. ¼ on W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

¼
S 31 S 32

1976

Deposit both corners alongside the iron post.

Set a cedar post, 6 ft. long, E of cor.

N. 0° 01' E., beginning new measurement.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
40.01	<p>The cor. of secs. 29, 30, 31, and 32, monumented with a squared cedar post, 3 ft. long, firmly set and plainly mkd. 5 notches on E and 1 notch on S edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 30</td> <td style="padding: 0 5px;">S 29</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 31</td> <td style="padding: 0 5px;">S 32</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. cedar post alongside the iron post.</p> <p>Cor. is located in N - S fence line.</p>	S 30	S 29	S 31	S 32
S 30	S 29				
S 31	S 32				
40.16	<p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 89° 54' W., bet. secs. 29 and 32.</p> <p>The ¼ sec. cor. of secs. 29 and 32, determined latitudinally by proportionate measurement and longitudinally by a fence line extending N and S.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">¼</td> <td style="border-right: 1px solid black; padding: 0 5px;">S 29</td> <td style="padding: 0 5px;">S 32</td> </tr> </table> <p style="text-align: center;">1976</p>	¼	S 29	S 32	
¼	S 29	S 32			
11.00	<p>N. 89° 54' W., beginning new measurement.</p> <p>Leave cultivated land; asc. gentle NE slope through sagebrush and shadscale.</p> <p>Point of hill, slopes N; desc. gentle W slope.</p>				
40.10	<p>The cor. of secs. 29, 30, 31, and 32.</p>				
19.00	<p>S. 89° 51' W., bet. secs. 30 and 31.</p> <p>Over rolling land.</p> <p>Paria River bottom, course S.</p>				
39.97	<p>Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate distance, falls on W edge of asphalt surfaced road, 50 lks. wide, bearing N. 20° W. and S. 20° E.</p>				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS		
	<p>At the corner point</p> <p>Drive a 6 inch spike in highway, from which</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 61° 56' E., 56 lks. dist., with brass cap mkd. RM T37S R2W S30 37 FT 1976 and an arrow pointing to the cor.</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 78° 08' E., 62 lks. dist., with brass cap mkd. RM T37S R2W S31 41 FT 1976 and an arrow pointing to the cor.</p> <p>Asc. NE slope of hill, through scattered pinon and juniper growth.</p>	
50.00	Spur, slopes SE; along S slope.	
56.50	Saddle, bears NE and SW; along N slope.	
77.00	Rim of bench, bears NW and SE; over rolling land.	
78.17	The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., set and mkd. as described in the concurrent resurvey of the E. bdy. of T. 37 S., R. 3 W.	of
	From the cor. of secs. 29, 30, 31, and 32.	
	N. 0° 09' E., bet. secs. 29 and 30.	
	Over cultivated land.	
20.00	Leave cultivated land; asc. gentle S slope, through sagebrush and shadscale.	
39.34	Graded dirt road, bears E and W.	
40.04	Point for the ¼ sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original corner.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.	
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 30 S 29 1976 </p>	
	Set a cedar post, 7 ft. long, alongside the cor.	
	Over mountainous land; asc. SE slope.	
58.00	Top of hill, bears NE and SW; desc. NW slope.	
70.00	Spur, slopes N. 20° W.; desc. NE slope.	

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

75.00 State Highway No. 54, bears N. 77° W. and S. 77° E.;
along E slope.

80.08 Point for the cor. of secs. 19, 20, 29 and 30, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 2 W

S 19	S 20
S 30	S 29

1976

Set a squared cottonwood post, alongside the cor.

Cor. is located on SE slope.

From the cor. of secs. 20, 21, 28, and 29.

S. $89^{\circ} 53'$ W., bet. secs. 20 and 29.

Over rolling land, through lightly scattered pinon and
juniper growth.

18.50 Wash, course S.

34.92 The witness $\frac{1}{4}$ sec. cor. of secs. 20 and 29, monumented
with a sandstone, 16 x 10 x 8 ins., firmly set and
plainly mkd. WC $\frac{1}{4}$ on N face, from which the original
bearing trees

A cedar, 12 ins. diam., bears S. 75° W., 82 lks.
dist., with faint scribe marks.

A cedar, 10 ins. diam., bears N. 22° W., 44 lks.
dist., with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone, with brass cap
mkd.

A P

T 37 S R 2 W

S 20
S 29

1976

Deposit the mkd. stone alongside the iron post.

Cor. is located at base of hill, bears NE and SW.

This cor. now functions as an angle point only.

N. $89^{\circ} 58'$ W., beginning new measurement.

224

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
5.00	<p>Asc. broken SE slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, at proportionate distance, no previous cor. monumented at this point.</p>
	<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 20}{S\ 29}$</p> <p style="text-align: center;">1976</p>
	<p>Cor. is located on steep SE slope.</p>
5.20	<p>Base of ledges, 10 ft. high, bearing NE and SW.</p>
8.00	<p>S point of bluff; desc. steep SW slope.</p>
17.00	<p>Base of hill. bears NW and SE; over rolling land.</p>
26.00	<p>Wash, course S; asc. gentle E slope.</p>
44.96	<p>The cor. of secs. 19, 20, 29, and 30.</p>
	<p>N. $89^{\circ} 56'$ W., bet. secs. 19 and 30.</p>
	<p>Over mountainous land, through lightly scattered pinon and juniper growth; asc. E slope.</p>
2.50	<p>Spur, slopes S.; desc. W slope.</p>
7.00	<p>Base of hill, bears N and S; over rolling land.</p>
22.00	<p>State Highway No. 54, bears N. 77° W. and S. 77° E.; over cultivated land.</p>
39.97	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, at proportionate distance, falls in cultivated field; there is no remaining evidence of the original cor.</p>
	<p>At the corner point</p>
	<p>Bury brass cap only, 24 ins. below surface of ground, mkd.</p>
	<p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 19}{S\ 30}$</p> <p style="text-align: center;">1976</p>
	<p>from which</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
<p>49.00</p> <p>78.09</p>	<p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears North, 486.1 lks. dist. with brass cap mkd. RM T37S R2W S19 320.83 FT. 1976 and an arrow pointing to the cor.</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° E., 488.5 lks. dist., with brass cap mkd. RM T37S R2W S19 322.40 FT 1976 and an arrow pointing to the cor.</p> <p>Both corners located in highway right of way fence line.</p> <p>Paria River bottom, course S; leave cultivated land.</p> <p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., set and mkd. as described in the concurrent resurvey of the E.bdy. of T. 37 S., R. 3 W.</p>
<p>40.04</p>	<p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 0° 03' W., bet. secs. 19 and 20.</p> <p>Over mountainous land, through pinon and juniper growth, along E slope.</p> <p>Point for the ¼ sec. cor. of secs. 19 and 20, determined at record bearing and distance, from its original witness cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 2 W</p> <p>¼</p> <p>S 19 S 20</p> <p>1976</p> </div> <p>Cor. is located on SE slope of clay hill.</p> <p>From this cor., the original witness ¼ sec. cor. of secs. 19 and 20, bears East 100 lks. dist., a sandstone, 12 x 8 x 6 ins., firmly set and plainly mkd. ¼ WC on W face, from which the original bearing trees</p> <p>A pinon, 10 ins. diam., bears S. 32° E., 58 lks. dist., with faint scribe marks.</p> <p>A pinon, 12 ins. diam., bears N. 3° W., 118 lks. dist., with faint scribe marks.</p> <p>This witness cor. now functions as a reference monument, add the letters R M to the cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS					
	N. 0° 10' W., beginning new measurement.				
21.00	Wash in canyon, course SE; asc. SW slope.				
40.95	The cor. of secs. 17, 18, 19, and 20, monumented with a sandstone, 18 x 10 x 6 ins., firmly set and plainly mkd. 5 notches on the E and 3 notches on the S edges, from which the original bearing trees				
	A pinon, 14 ins. diam., bears N. 60° 20' E., 26 lks. dist., with faint scribe marks.				
	A cedar, 16 ins. diam., bears S. 55° E., 75 lks. dist., with faint scribe marks.				
	A cedar, 14 ins. diam., bears S. 61° 20' W., 57 lks. dist., with faint scribe marks.				
	A pinon, 8 ins. diam., bears N. 40° 30' W., 93 lks. dist., with faint scribe marks.				
	At the corner point				
	Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.				
	T 37 S R 2 W				
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 18</td> <td style="padding: 2px;">S 17</td> </tr> <tr> <td style="padding: 2px;">S 19</td> <td style="padding: 2px;">S 20</td> </tr> </table>	S 18	S 17	S 19	S 20
S 18	S 17				
S 19	S 20				
	1976				
	Deposit the mkd. stone alongside the iron post.				
	Cor. is located on S edge of small bench.				
	From the cor. of secs. 16, 17, 20, and 21.				
	N. 89° 20' W., bet. secs. 17 and 20.				
	Over mountainous land, through pinon and juniper growth; asc. SE slope.				
28.00	Rim of bench, bears NE and SW; over rolling land, railed and reseeded.				
40.00	Point for the ¼ sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.				
	T 37 S R 2 W				
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="padding: 2px;">S 17</td> </tr> <tr> <td></td> <td style="padding: 2px;">S 20</td> </tr> </table>	¼	S 17		S 20
¼	S 17				
	S 20				
	1976				
	Set a cedar post alongside the corner.				
45.00	Wash in draw, course S.				

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
59.25	Wash in canyon, course SW.
72.10	S point of bench, enter cedar and pinon growth; desc. W slope.
80.00	The cor. of secs. 17, 18, 19, and 20.
	S. 89° 20' W., bet. secs. 18 and 19.
	Over mountainous land, through pinon and juniper growth; desc. SW slope.
11.00	Wash in canyon, course S; asc. E slope.
36.25	Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.
	Set an iron post, 28 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	W C T 37 S R 2 W
	$\frac{1}{4}$ ← $\frac{S\ 18}{S\ 19}$
	1976
	Cor. is located 10 lks. E of rim of small bench, bears N and S.
	Desc. broken NW slope.
39.92	Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, at proportionate distance, falls in ledges; there is no remaining evidence of the original cor.
50.00	Base of hill, bears NE and SW; over rolling land.
57.00	Paria River bottom, course S.
77.90	The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., set and mkd. as described in the concurrent resurvey of the E. bdy. of T. 37 S., R. 3 W.
	From the cor. of secs. 17, 18, 19, and 20.
	N. 0° 03' W., bet. secs. 17 and 18.
	Over mountainous land, through pinon and juniper growth; along broken W slope.
12.00	Spur, slopes W; desc. NW slope.
26.00	Wash in canyon, course SW; asc. SE slope.
38.28	The witness $\frac{1}{4}$ sec. cor. of secs. 17 and 18, monumented with a limestone, 12 x 12 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ WC on W face, from which the original bearing trees

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS


A cedar, 8 ins. diam., bears S. 77° 30' E., 101 lks. dist., with faint scribe marks.

A cedar, 16 ins. diam., bears S. 79° W., 23 lks. dist., with faint scribe marks.

At the witness cor. point

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

W C
T 37 S R 2 W



1976

Cor. is located 25 lks. S of wash in small draw, course SE.

N. 0° 02' E., beginning new measurement.

0.65 Point for the ¼ sec. cor. of secs. 17 and 18, at proportionate distance, falls on steep slide area and cannot be perpetuated.

2.50 Rim of bench, bears NE and SW; over rolling land.


20.00 Enter railed and reseeded area.

40.77 The cor. of secs. 7, 8, 17, and 18, monumented with a granite stone, 12 x 10 x 8 ins., firmly set and plainly mkd. 5 notches on the E and 4 notches on the S edges, original bearing trees railed out.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W



1976

Deposit the mkd. stone alongside the iron post.

From the cor. of secs. 8, 9, 16, and 17.

S. 89° 51' W., bet. secs. 8 and 17.

Over rolling bench land, railed and reseeded.

24.00 Rim of bench, bears NE and SW; desc. NW slope, through pinon and juniper growth.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

39.96 The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a limestone, 14 x 8 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees

A pinon, 12 ins. diam., bears N. 66° E., 38 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, S. $42\frac{1}{2}^{\circ}$ W., 11 lks.)

A cedar, 24 ins. diam., bears S. $42^{\circ} 30'$ W., 11 lks. dist., mkd. $\frac{1}{4}$ S BT. (Record, N. 66° E., 38 lks.)

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

$$\frac{1}{4} \frac{S 8}{S 17}$$

1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

N. $89^{\circ} 55'$ W., beginning new measurement.

13.00 Wash in hollow, course S; asc. SE slope.

21.00 Rim of bench, bears NE and SW; over rolling land, railed and reseeded.

39.78 The cor. of secs. 7, 8, 17, and 18.

S. $89^{\circ} 43'$ W., bet. secs. 7 and 18.

Over rolling land, railed and reseeded.

40.10 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18, monumented with a broken sandstone, 18 x 14 x 2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which an original bearing tree

A pinon, 30 ins. diam., bears West, 76 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 2 W

$$\frac{1}{4} \frac{S 7}{S 18}$$

1976

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	N. 89° 43' W., beginning new measurement.
14.00	Enter pinon and juniper growth.
20.50	Rim of bench, bears NE and SW; desc. NW slope.
33.00	Base of hill, bears NE and SW; over gradual W slope.
37.82	The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., set and mkd. as described in the concurrent resurvey of the E. bdy. of T. 37 S., R. 3 W.
	From the cor. of secs. 7, 8, 17, and 18.
	N. 0° 03' W., bet. secs. 7 and 8.
	Over rolling land, railed and reseeded.
34.76	Point of spur; desc. over N slope, through scattered pinon and juniper growth.
37.25	Bottom of draw, course NW; asc. over S slope.
39.50	Top of spur, slopes W; desc. along W slope.
40.18	The ¼ sec. cor. of secs. 7 and 8, monumented with a sandstone, 12 x 8 x 6 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing trees
	A pinon, 10 ins. diam., bears N. 70° E., 11 lks. dist., mkd. ¼ S BT.
	A pinon, 14 ins. diam., bears S. 5° E., 61 lks. dist., mkd. ¼ S BT.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 37 S R 2 W
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 7 \quad \quad \text{S } 8 \\ \end{array}$
	1976
	Deposit the mkd. stone alongside the iron post.
	N. 0° 02' E., beginning new measurement.
	Desc. along NW slope.
14.00	Wash in canyon, course W.
25.00	Wash in canyon, course SW; asc. SE slope.
39.67	The cor. of secs. 5, 6, 7, and 8, monumented with a sandstone, 13 x 8 x 6 ins., firmly set and plainly mkd. 5 notches on the S and E edges, from which the original bearing trees

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS							
	<p>A cedar, 12 ins. diam., bears S. 11° 30' W., 58 lks. dist., mkd. T37S R2W S7 BT.</p> <p>A cedar, 16 ins. diam., bears N. 45° W., 17 lks. dist., mkd. T37S R2W S6 BT. (Record, 11 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">S 6</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 5</td> </tr> <tr> <td style="text-align: center;">S 7</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 8</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on SE slope of hill.</p>	S 6		S 5	S 7		S 8
S 6		S 5					
S 7		S 8					
	<p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>S. 89° 49' W., bet. secs. 5 and 8.</p> <p>Over rolling land, railed and reseeded.</p>						
18.00	Wash in draw, course SW.						
39.88	Point for the ¼ sec. cor. of secs. 5 and 8, at propor- tionate distance; there is no remaining evidence of the original corner.						
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">¼</td> <td style="text-align: center;">S 5</td> </tr> <tr> <td></td> <td style="text-align: center;">S 8</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Set a cedar post, 6 ft. long, alongside the cor.</p>	¼	S 5		S 8		
¼	S 5						
	S 8						
48.00	Rim of bench, bears NE and SW; over series of spurs and washes along S slope, through scattered pinon and juniper growth.						
79.76	The cor. of secs. 5, 6, 7, and 8.						
	<p>N. 89° 47' W., bet. secs. 6 and 7.</p> <p>Over mountainous land, through scattered pinon and juniper growth; asc. SE slope.</p>						
3.00	Spur, slopes SW; over series of spurs and washes.						
29.00	Ridge, bears NE and SW; along N slope.						

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
39.68	<p>The ¼ sec. cor. of secs. 6 and 7, monumented with a limestone, 14 x 10 x 8 ins., firmly set and plainly mkd. ¼ on N face, from which an original bearing tree</p> <p>A pinon, 14 ins. diam., bears N. 0° 30' W., 58 lks. dist., mkd. ¼ S BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">¼ $\frac{S\ 6}{S\ 7}$</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on spur, projecting NW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>West, beginning new measurement.</p> <p>Desc. along NW slope.</p>
38.14	<p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., set and mkd. as described in the concurrent resurvey of the E. bdy. of T. 37 S., R. 3 W.</p> <hr/> <p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0° 07' W., bet. secs. 5 and 6.</p> <p>Over mountainous land, through scattered pinon and juniper growth; asc. SE slope.</p> <p>3.00 Rim of bench, bears NE and SW; over rolling land, railed and reseeded.</p> <p>27.00 Rim of bench, bears E and W; desc. N slope.</p> <p>39.00 Base of steep descent; bears E and W over gradual N slope.</p> <p>39.80 The ¼ sec. cor. of secs. 5 and 6, monumented with a sandstone, 14 x 12 x 4 ins., firmly set and dimly mkd. ¼ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 2 W</p> <p style="text-align: center;">¼ S 6 S 5</p> <p style="text-align: center;">1976</p>

Dependent Resurvey of the Subdivisional Lines,
T. 37 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located 1 lk. S and 11 lks. E of cor. of fence, projecting N and W.</p>
	<p>N. 0° 01' E., beginning new measurement.</p>
25.00	Wash, course SW.
40.20	The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., heretofore described.
<p>General Description</p> <p>The area resurveyed in T. 37 S., R. 2 W., is mostly mountainous throughout, with rolling benches at the higher elevations, some small valleys in and around the towns of Henrieville, located in secs. 22 and 27, and Cannonville, located in secs. 19 and 30. The elevations ranges from about 5800 to 6800 ft. above sea level. The soil varies from sandy clay loam in the valleys to very rocky at higher elevations. The vegetation consists of sagebrush, shadscale and native grasses in the valleys to juniper and pinon on the higher benches. The general drainage is to the SW, into the Paria River, which flows through secs. 18, 19, 30, and 31. Access is by State Highway No. 54, which enters the township on the W. bdy. of sec. 19 and leaves on the E. bdy. of sec. 12. The principal use is livestock grazing.</p>	

235

CERTIFICATE OF SURVEY

(I) ~~XXX~~ Ferrel D. Reynolds, HEREBY
 CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day
 of January, 1976, (I) ~~XXX~~ have dependently resurveyed a portion of
 the south boundary, a portion of the north boundary and the subdivisional
 lines of Township 37 South, Range 2 West

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by (me), ~~us~~ and under (my)
~~our~~ direction; and that said survey has been made in strict conformity with said special instruc-
 tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
 specific manner described in the foregoing field notes.

February 28, 1977
 (Date) Ferrel D. Reynolds
 (Cadastral Surveyor)

Under the Supervision of
Glenn B. Hates
 (Cadastral Surveyor)

Acting Chief, Branch of Cadastral Surveys
 CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Washington, D.C.
 Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the south
 boundary, a portion of the north boundary and the subdivisional lines of
 Township 37 South, Range 2 West, Salt Lake Meridian, Utah

executed by Ferrel D. Reynolds, Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

JUL 24 1980
 (Date) J. D. Voorhees
 (Chief, Division of Cadastral Survey)

~~Chief, Cadastral Survey Examination and Approval Staff~~

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
 _____, is a true copy of the original field notes.

 (Date) _____
 (Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE

FOURTH STANDARD PARALLEL SOUTH,

ALONG THE WEST 4½ MILES OF THE SOUTH BOUNDARY OF

TOWNSHIP 20 SOUTH, RANGE 15 EAST

AND

THE DEPENDENT RESURVEY OF

THE GREEN RIVER GUIDE MERIDIAN, WEST BOUNDARY OF

TOWNSHIP 21 SOUTH, RANGE 16 EAST,

THE EAST BOUNDARY OF

TOWNSHIP 21 SOUTH, RANGE 14 EAST,

AND

THE SOUTH BOUNDARY AND SUBDIVISIONAL LINES

OF

TOWNSHIP 21 SOUTH, RANGE 15 EAST

Of the Salt Lake

Meridian,

In the State of Utah

EXECUTED BY

Jerry L. Thomas

Supervisory Cadastral Surveyor

Under special instructions dated January 25, 1974, approved February 7, 1974,

, which provided for the surveys included under U.S. Survey/Group

Number 552, and assignment instructions dated May 13, 1974.

Survey commenced May 20, 1974

Survey completed June 14, 1974

INDEX DIAGRAM

Township 21 S., Range 15 E.

			4	4	3	2	
	80 82	82	66	56	47	38	
21	79 80	64	55	46	36	1	13
	78	77	63	54	45	36	
20	78 76	62	53	44	35	12	11
	75	74	62	53	43	34	
19	76 74	61	52	43	33	13	10
	73	72	60	51	42	32	
18	73 71	59	50	41	32	24	8
	70	69	59	50	40	31	
17	71 69	58	49	40	30	25	7
	67	67	57	48	39	30	
15	68 66	56	47	38	29	36	5
	27	26	26	25	24	23	

Township 21 South, Range 15 East, Salt Lake Meridian, Utah

CHAINS

The history of surveys of Township 21 South, Range 15 East, Salt Lake Meridian, is as follows:

The Fourth Standard Parallel South, north boundary, was surveyed by A. D. Ferron in 1880. The east and west boundaries were surveyed and the Fourth Standard Parallel South, north boundary were resurveyed by A. D. Ferron in 1881. The south boundary was surveyed by A. D. Ferron in 1882. The subdivisional lines were surveyed, and the east, west, south and Fourth Standard Parallel South, east $4\frac{1}{2}$ miles of the north boundary, were resurveyed by H. D. Heist and E. V. Woolley in 1906. A correction survey was made between sections 35 and 36, and sections 25 and 36 by H. D. Heist and E. V. Woolley in 1908. The Fourth Standard Parallel South, east $4\frac{1}{4}$ miles of the north boundary, were retraced by R. E. Clark in 1912. The Fourth Standard Parallel South, west $1\frac{3}{4}$ miles of the north boundary, were retraced and resurveyed by H. W. Miller in 1912.

The following field notes describe the dependent resurvey of the Fourth Standard Parallel South, along the west $4\frac{1}{2}$ miles of the south boundary of T. 20 S., R. 15 E., and the dependent resurvey of the Green River Guide Meridian, west boundary of T. 21 S., R. 16 E., the east boundary of T. 21 S., R. 14 E., and the south boundary and subdivisional lines of T. 21 S., R. 15 E., Salt Lake Meridian, Utah.

The east 2 miles of the Fourth Standard Parallel South in T. 20 S., R. 14 E., was retraced during the subdivision of T. 21 S., R. 15 E.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions for Group No. 552, Utah, dated January 25, 1974.

Preliminary to the resurvey the lines of the original survey were retraced and a search was made for all corners and other calls of the record. Identified corners were re-monumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of lines were determined by the solar transit method and by means of lines projected by fore- and backsights from azimuths obtained by direct solar observations or observations on Polaris.

The geographic position of the southeast corner of the township as determined by ties to the United States Coast and Geodetic Survey triangulation stations "Saleratus", "BM A-39", and "BM D-39" is as follows:

Latitude $38^{\circ}56'08.9''$ N. Longitude $110^{\circ}12'30.3''$ W.

The mean magnetic declination is $14^{\circ} 30'$ E.

Dependent Resurvey of the Fourth Standard Parallel South,
on the South Boundary of
T. 20 S., R. 15 E., Salt Lake Meridian, Utah

239

Dependent Resurvey of the Fourth Standard Parallel South,
on the South Boundary of
T. 20 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

(Reestablishment of the Survey Executed by
Robert E. Clark in 1912

The topography being essentially the same as described in the official record of the 1912 retracement, is omitted from these field notes of the S. bdy. of T. 20 S., R. 15 E.

Beginning at the standard $\frac{1}{4}$ sec. cor. of sec. 35, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.

Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.

S. $89^{\circ}59'$ W., along the Fourth Standard Parallel South on the S. bdy. of sec. 35.

17.88 The closing cor. of Tps. 21 S., Rs. 15 and 16 E., hereinafter described in the field notes of the dependent resurvey of the W. bdy. of T. 21 S., R. 16 E.

37.88 The closing cor. of secs. 34 and 35, T. 20 S., R. 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 survey of the subdivisional lines of T. 20 S., R. 15 E. Thence along the S. bdy. of sec. 34.

39.80 The standard cor. of secs. 34 and 35, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.

Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.

N. $89^{\circ}56'$ W., along the Fourth Standard Parallel South.

21.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 1 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.

40.33 The standard $\frac{1}{4}$ sec. cor. of sec. 34, identical with U.S.G.S. triangulation station SEC COR T. 20-21 S., R. 15 E., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.

Dependent Resurvey of the Fourth Standard Parallel South,
on the South Boundary of
T. 20 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p> <hr/> <p>West, beginning new measurement.</p>	
20.73	The closing cor. of secs. 1 and 2, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.	
38.15	The closing cor. of secs. 33 and 34, T. 20 S., R. 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 survey of the subdivisional lines of T. 20 S., R. 15 E. Thence along the S. bdy. of sec. 33.	
39.84	The standard cor. of secs. 33 and 34, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.	
	<p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p> <hr/> <p>N. 89°42' W., along the Fourth Standard Parallel South.</p>	
20.96	Point for the ¼ sec. cor. of sec. 2 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.	
40.22	The standard ¼ sec. cor. of sec. 33, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.	
	<p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p> <hr/> <p>N. 89°54' W., beginning new measurement.</p>	
20.81	The closing cor. of secs. 2 and 3, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.	
38.10	The closing cor. of secs. 32 and 33, T. 20 S., R. 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 survey of the subdivisional lines of T. 20 S., R. 15 E. Thence along the S. bdy. of sec. 32.	

241

Dependent Resurvey of the Fourth Standard Parallel South,
on the South Boundary of
T. 20 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
40.05	<p>The standard cor. of secs. 32 and 33, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.</p> <p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p>
	<p>N. 89°51' W., along the Fourth Standard Parallel South.</p>
20.87	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 3 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.</p>
40.09	<p>The standard $\frac{1}{4}$ sec. cor. of sec. 32, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.</p> <p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p>
	<p>S. 89°55' W., beginning new measurement.</p>
20.89	<p>The closing cor. of secs. 3 and 4, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.</p>
38.19	<p>The closing cor. of secs. 31 and 32, T. 20 S., R. 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 survey of the subdivisional lines of T. 20 S., R. 15 E. Thence along the S. bdy. of sec. 31.</p>
40.19	<p>The standard cor. of secs. 31 and 32, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.</p> <p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p>
	<p>S. 89°43' W., along the Fourth Standard Parallel South.</p>
20.78	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 4 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.</p>

Dependent Resurvey of the Fourth Standard Parallel South,
on the South Boundary of
T. 20 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS					
39.98	<p>The standard $\frac{1}{4}$ sec. cor. of sec. 31, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.</p> <p>Add the marks AP and 1974 on the brass cap. This cor. now functions as an Angle Point as in accordance with the Special Instructions.</p>				
	<p>West, beginning new measurement.</p>				
20.88	<p>The closing cor. of secs. 4 and 5, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.</p>				
43.94	<p>The standard SW cor. of T. 20 S., R. 15 E., identical with U.S.G.S. triangulation station SEC COR 31 SW/20S/15E, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the S. bdy. of T. 20 S., R. 15 E.</p>				
<p>Dependent Resurvey of the Green River Guide Meridian, W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah</p>					
<p>Reestablishment of the Survey executed by A. D. Ferron, Deputy Surveyor, in 1881 and the Resurvey executed by H. D. Heist and E. V. Woolley, Deputy Surveyors, in 1906</p>					
<p>The cor. of Tps. 21 and 22 S., Rs. 15 and 16 E., monumented with a squared red pine post, 2 ft. long, 3 ins. square, set in a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, dimly mkd. T 21 S R 15 E.</p>					
<p>At the corner point</p>					
<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
<p>T 21 S R 15 E R 16 E</p>					
<table border="1"> <tr> <td>S 36</td> <td>S 31</td> </tr> <tr> <td>S 1</td> <td>S 6</td> </tr> </table>		S 36	S 31	S 1	S 6
S 36	S 31				
S 1	S 6				
<p>T 22 S 1974</p>					
<p>Reset the pine post, inverted, alongside the iron post.</p>					
<p>N. $0^{\circ}09'$ E., on the W. bdy. of sec. 31.</p>					
<p>Over nearly level land, through scattered undergrowth.</p>					

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

17.94 Power transmission line, bears N. 88°22' W. and S. 88°22' E.


29.50 Enter low rolling hills; asc. 40 ft. over S slope.

40.00 Top of ascent, slopes E; along gentle E slope.

40.11 The ¼ sec. cor. of secs. 31 and 36, monumented with the remains of a cottonwood stake, 12 ins. long, 2 ins. square, with faint scribe marks ¼ S.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Reset the cottonwood stake, inverted, alongside the iron post.

N. 0°20' W., beginning new measurement.

Desc. over gentle NE slope.

12.20 Draw, drains E.


25.90 Wash, 20 lks. wide, 4 ft. deep, drains E.

38.70 Wash, 20 lks. wide, 4 ft. deep, drains SE.

39.70 The cor. of secs. 25 and 36, T. 21 S., R. 15 E., monumented with a sandstone, 16 x 12 x 5 ins., firmly set, projecting 5 ins. above ground and dimly mkd. 1 notch on S edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit the mkd. stone alongside the iron post.

40.67 The cor. of secs. 30 and 31, monumented with the remains of a cottonwood stake, 12 ins. long, 2 ins. square, with faint scribe marks.

At the corner point

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">S 25 S 30 S 31</p> <p style="text-align: center;">1974</p> <p>Reset the cottonwood stake, inverted, alongside the iron post.</p>
<p>25.60</p>	<p>N. 0°19' E., on the W. bdy. of sec. 30.</p> <p>Asc. 15 ft. over gentle S slope, through scattering undergrowth.</p> <p>Improved dirt road, bears N. 70°34' E. and S. 70°34' W.</p>
<p>39.16</p>	<p>Point for the ¼ sec. cor. of sec. 25 only, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">¼ S 25 </p> <p style="text-align: center;">1974</p>
<p>40.38</p>	<p>Point for the ¼ sec. cor. of sec. 30, at proportionate bearing and distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;"> ¼ S 30</p> <p style="text-align: center;">1974</p>
<p>1.13</p> <p>21.30</p> <p>29.30</p> <p>34.00</p>	<p>N. 0°07' E., beginning new measurement.</p> <p>Improved dirt road, bears N. 65°42' W. and S. 65°42' E.</p> <p>Base of hills, bears E and W; asc. 40 ft. over S slope.</p> <p>Slope changes; asc. 40 ft. over SW slope.</p> <p>Top of ridge, bears E and W; desc. over gentle NW slope.</p>

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS	
38.87	<p>Point for the cor. of secs. 24 and 25, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">S 24 S 30 S 25 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 4 ft. above ground, alongside the iron post.</p>
40.38	<p>Point for the cor. of secs. 19 and 30, at proportionate bearing and distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">S 24 S 19 S 30 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 4 ft. above ground, alongside the iron post.</p>
14.00	<p>N. 0°36' E., on the W. bdy. of sec. 19.</p> <p>Desc. 25 ft. over gentle N slope, through scattering undergrowth.</p> <p>Draw, drains W; desc. 86 ft. over broken N slope.</p>
38.58	<p>Point for the ¼ sec. cor. of sec. 24 only, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">¼ S 24 </p> <p style="text-align: center;">1974</p>
40.35	<p>The ¼ sec. cor. of sec. 19, monumented with the remains of a cottonwood stake, 18 ins. long, 2 ins. square, with faint scribe marks. ¼ S.</p> <p>At the corner point</p>

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

¼
|
S 19

1974

Reset the cottonwood stake, inverted, alongside the iron post.

N. 0°24' E., beginning new measurement.

Desc. 40 ft. over gradual N slope.

20.48 Power line, bears N. 47°35' E. and S. 47°35' W.

31.00 Enter bottom of wide draw.

33.85 Saleratus Wash, 5 ft. deep, 2 chs. wide, drains E.

38.41 Point for the cor. of secs. 13 and 24, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

S 13 |
S 24 | S 19

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside iron post.

40.00 Leave draw, enter thick greasewood.

40.34 Point for the cor. of secs. 18 and 19, at proportionate bearing and distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

S 13 | S 18
| S 19

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS	
	N. 0°24' E., on the W. bdy. of sec. 18. Over nearly level land, through thick greasewood.
2.80	Wash, 10 ft. deep, 20 lks. wide, drains SE; leave thick greasewood.
36.02	Right of way fence, parallels highway.
38.26	Point for the ¼ sec. cor. of sec. 13, only, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E R 16 E ¼ S 13 1974
39.19	Center line of E. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. 76°09' E. and S. 76°09' W.
40.34	Point for the ¼ sec. cor. of sec. 18, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T 21 S R 15 E R 16 E ¼ S 18 1974
40.51	Power transmission line, bears N. 78°12' W. and S. 78°12' E.
40.76	Center line of W. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. 76°09' E. and S. 76°09' W.
43.96	Right of way fence, parallels highway.
74.05	Wash, 10 ft. deep, 30 lks. wide, drains SE.
78.45	The cor. of secs. 12 and 13, T. 21 S., R. 15 E., monumented with a redwood stake, 24 ins. long, firmly set, projecting 12 ins. above ground and mkd. S12 on NW face. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS	
80.65	<p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">S 12 S 13 </p> <p style="text-align: center;">1974</p> <p>Reset the redwood stake, inverted, alongside the iron post.</p> <p>Set a steel pipe, 3 ins. diam., 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>The cor. of secs. 7 and 18, marked by a rotted wooden stake has been used by private surveyors and is accepted as the best available evidence of the position of the original cor.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T 21 S R 15 E R 16 E</p> <p style="text-align: center;">S 12 S 7 S 18</p> <p style="text-align: center;">1974</p> <p>Deposit rotted stake alongside the iron post.</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
<p>0.72</p> <p>4.67</p> <p>7.05</p> <p>7.75</p> <p>19.75</p> <p>32.60</p> <p>33.95</p> <p>37.52</p>	<p>N. 0°13' E., on the W. bdy. of sec. 7.</p> <p>Over gentle rolling land, through scattering undergrowth.</p> <p>Telephone line, bears N. 80°04' W. and S. 80°04' E.</p> <p>Center line of old U.S. Highway No. 50-6, bears N. 78°39' W. and S. 78°39' E.</p> <p>Denver and Rio Grande Western railroad, bears N. 78°39' W. and S. 78°39' E.</p> <p>Telegraph line, parallels railroad.</p> <p>Wash, 3 ft. deep, 30 lks. wide, drains S. 75° E.</p> <p>Unimproved dirt road, bears E and W.</p> <p>Power line, bears N. 77°06' W. and S. 77°06' E.</p> <p>Point for the ¼ sec. cor. of sec. 12 only, T. 21 S., R. 15 E., at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

249

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

T 21 S
R 15 E R 16 E

$\frac{1}{4}$ |
S 12 |

1974

39.97 The $\frac{1}{4}$ sec. cor. of sec. 7, monumented with a limestone, 12 x 6 x 6 ins., firmly set, projecting 6 ins. above ground and mkd. $\frac{1}{4}$ on E face.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

| $\frac{1}{4}$
|
| S 7

1974

Deposit the mkd. stone alongside the iron post.

N. $0^{\circ}18'$ E., beginning new measurement.

Over nearly level land.

38.18 The cor. of secs. 1 and 12, T. 21 S., R. 15 E., monumented with a redwood stake, 36 ins. long, firmly set, projecting 14 ins. above ground with faint scribe marks on W face.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

S 1 |
S 12 | S 7

1974

Reset the redwood stake, inverted, alongside the iron post.

40.23 The cor. of secs. 6 and 7, monumented with a sandstone, 16 x 10 x 8 ins., firmly set, projecting 6 ins. above ground and mkd. 1 notch on N and 5 notches on S edges.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

T 21 S
R 15 E R 16 E

S 1 | S 6
 | S 7

1974

Deposit the mkd. stone alongside the iron post.

N. 0°12' E., on the W. bdy. of sec. 6.

Asc. 40 ft. over gentle SW slope.

30.00 Top of ascent, bears E and W; desc. 10 ft. over gentle N slope.

38.03 The ¼ sec. cor. of sec. 1 only, T. 21 S., R. 15 E., monumented with a redwood stake, 36 ins. long, 3 ins. square, firmly set, projecting 12 ins. above ground and mkd. ¼ on W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

¼ |
S 1 |

1974

Reset the redwood stake, inverted, alongside the iron post.

40.18 The ¼ sec. cor. of sec. 6, monumented with a sandstone, 14 x 8 x 4 ins., firmly set, projecting 6 ins. above ground and mkd. ¼ on E face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E R 16 E

¼ |
S 6 |

1974

Deposit the mkd. stone alongside the iron post.

N. 0°09' E., beginning new measurement.

251

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

Over nearly level land.

10.00 Wash, 3 ft. deep, 20 lks. wide, drains SE.

38.09 Point for the 80 1/16 sec. cor. of sec. 1 only, T. 21 S.,
R. 15 E., at proportionate distance.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 21 S
R 15 E
| 1/16 |
| S 1 |
| 80 |

1974

Set a steel fence post, 5 ft. long, projecting 3 ft.
above ground, alongside iron post.

40.36 The 80 1/16 sec. cor. of sec. 6, monumented with a
sandstone, 18 x 8 x 4 ins., firmly set, projecting 8 ins.
above ground and mkd. 6 notches on S edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 21 S
R 16 E
| 1/16 |
| S 6 |
| 80 |

1974

Deposit the mkd. stone alongside the iron post.

N. 0°07' E., beginning new measurement.

Over gentle rolling land.

18.80 Wash, 4 ft. deep, 15 lks. wide, drains SE.

35.90 Wash, 5 ft. deep, 30 lks. wide, drains E.

37.47 Point for the 120 1/16 sec. cor. of sec. 1 only, T. 21 S.,
R. 15 E., at proportionate distance.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 21 S
R 15 E
| 1/16 |
| S 1 |
| 120 |

1974

Set a steel fence post, 5 ft. long, projecting 3 ft.
above ground, alongside the iron post.

Dependent Resurvey of the Green River Guide Meridian,
W. Bdy. of T. 21 S., R. 16 E., Salt Lake Meridian, Utah

CHAINS

39.57

Point for the 120 1/16 sec. cor. of sec. 6, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 16 E
| 1/16
| S 6
| 120

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

45.70

Unimproved dirt road, bears E and W.

45.94

The closing cor. of Tps. 21 S., Rs. 15 and 16 E., monumented with a sandstone, 20 x 14 x 8 ins., firmly set, projecting 10 ins. above ground and mkd. 6 notches on E, W, and S edges, with CC on S face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 20 S R 15 E

S 35

S 1 | S 6
C | C
R 15 E R 16 E
T 21 S
1974

Deposit the mkd. stone alongside and raise a mound of stone, 2½ ft. base, 1½ ft. high, S of iron post.

From this point the standard ¼ sec. cor. of sec. 35, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears N. 89°59' E., 17.88 chs. dist.

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

(Restoring the Survey executed by A. D. Ferron in 1881 and the Resurvey executed by Harvey D. Heist and Earl V. Woolley in 1906)

The cor. of Tps. 21 and 22 S., R. 14 E., monumented with a limestone, 10 x 8 x 6 ins., firmly set, projecting 6 ins. above ground and mkd. 6 notches on the N, S, and W. edges.

At the corner point

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">S 36 S 31 S 1 </p> <p style="text-align: center;">T 22 S R 14 E 1974</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>N. 0°18' E., on the E. bdy. of sec. 36.</p> <p>Desc. 12 ft. over gentle NE slope, through scattering undergrowth.</p>
6.00	Slope changes; desc. 10 ft. over gentle NW slope.
12.40	Wash, 18 ins. deep, 5 lks. wide, drains NE; desc. 10 ft. over gradual NE slope.
25.80	Gully, drains N. 80° E.
36.29	Point for the ¼ sec. cor. of sec. 31 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
39.25	Point for the ¼ sec. cor. of sec. 36, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">¼ S 36 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
39.30	Small wash, 8 ins. deep, 4 lks. wide, drains E.
58.12	Cor. of right-of-way fence, bearing N. 54°14' E. and N, bears East, 28 lks. dist.
59.69	Same fence, bears S. 54°14' W. and N. 54°14' E., 37 lks. to fence cor.
61.54	Center line of E. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. 54°14' E. and S. 54°14' W.
66.22	Center line of W. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. 54°14' E. and S. 54°14' W.

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
68.06	Right-of-way fence, bears S. 54°14' W. and N. 54°14' E., 43 lks. to fence cor.
70.11	Cor. of right-of-way fences, bearing N. 54°14' E. and S, bears East, 34½ lks. dist.
76.45	The closing cor. of secs. 30 and 31, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivision of T. 21 S., R. 15 E.
78.71	Point for the cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 14 E R 15 E S 25 S 36 S 30
	1974
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
37.39	N. 0°18' E., on the E. bdy. of sec. 25.
	Over nearly level land, through scattering undergrowth.
	Point for the ¼ sec. cor. of sec. 25, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 14 E R 15 E ¼ S 25
	1974
37.80	Point for the ¼ sec. cor. of sec. 30 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
59.85	Top of small clay spur, slopes W; thence over nearly level land.
77.85	Point for the closing cor. of secs. 19 and 30, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivision of T. 21 S., R. 15 E.
80.22	Point for the cor. of secs. 24 and 25, at proportionate bearing and distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">S 24 S 19 S 25 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
	<p>N. 0°54' E., on the E. bdy. of sec. 24.</p> <p>Over nearly level land, through scattering undergrowth.</p>
10.55	Wash, 2 ft. deep, 15 lks. wide, drains N. 80° E.
23.95	Wash, 6 ft. deep, 30 lks. wide, drains S. 80° E.
37.73	Point for the ¼ sec. cor. of sec. 19 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
40.56	Point for the ¼ sec. cor. of sec. 24, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">¼ S 24 </p> <p style="text-align: center;">1974</p> <p>Set a sandstone boulder, 36 x 24 x 12 ins., W of iron post.</p>
45.00	Top of low ridge, bears E and W.
57.20	Improved gravel road, bears N. 80°20' W. and S. 80°20' E.
77.83	Point for the closing cor. of secs. 18 and 19, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
81.17	Point for the cor. of secs. 13 and 24, at proportionate bearing and distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">S 13 S 18 S 24 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
	<p>N. 0°17' E., on the E. bdy. of sec. 13.</p> <p>Over nearly level land, through scattering undergrowth.</p>
10.25	Bulldozed road, bears N. 80° E. and S. 80° W.
32.05	Improved gravel road, curves N. 45° E. and S. 30° W.
33.40	Wash, 4 ft. deep, 20 lks. wide, drains N. 75° E.
36.76	Point for the ¼ sec. cor. of secs. 18 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
40.41	Point for the ¼ sec. cor. of sec. 13, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">¼ S 13 </p> <p style="text-align: center;">1974</p> <p>Set a cottonwood stake, 3 ft. long, projecting 1 ft. above ground, alongside the iron post.</p>
47.90	Enter rolling land; thence along W clay slope.
54.00	Leave rolling land; thence over nearly level land.
76.86	The closing cor. of secs. 7 and 18, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
77.10	Wash, 8 ft. deep, 20 lks. wide, drains NE.
80.80	The cor. of secs. 12 and 13, monumented with a sandstone, 16 x 12 x 8 ins., firmly set, projecting 10 ins. above ground and mkd. 4 notches on S and 2 notches on N edges.
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 21 S R 14 E R 15 E</p> <p>S 12 S 7 S 13 </p> <p>1974</p> <p>Deposit the mkd. stone alongside the iron post.</p>
	<p>N. 0°34' E., on the E. bdy. of sec. 12.</p> <p>Over nearly level land, through scattering undergrowth.</p>
12.80	Wash, 1 ft. deep, 5 lks. wide, drains E.
22.20	Wash, 10 ft. deep, 150 lks. wide, drains S. 75° E.
24.40	Base of rolling hills, bears N. 80° W. and S. 80° E.; asc. 25 ft. over SW slope.
32.82	Power transmission line, bears N. 50°34' W. and S. 50°34' E.
36.13	Point for the ¼ sec. cor. of sec. 7 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
38.75	Top of ridge and trail road, bears N. 75° W. and S. 75° E.; desc. over N slope.
40.31	The ¼ sec. cor. of sec. 12, monumented with a sandstone, 18 x 12 x 4 ins., firmly set, projecting 6 ins. above ground and mkd. ¼ on E face.
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T 21 S R 14 E R 15 E ¼ S 12 1974 </p> <p>Deposit the mkd. stone alongside and raise a mound of stone, 2½ ft. base, 1½ ft. high, W of iron post.</p>
	<p>N. 0°22' E., beginning new measurement.</p> <p>Desc. 22 ft. over steep N slope.</p>
3.90	Base of hills, bears W and NE; desc. 45 ft. over gradual N slope.
22.70	Cottonwood wash, 5 ft. deep, 2.00 chs. wide, drains E.

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS	
35.89	Point for the closing cor. of secs. 6 and 7, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
39.45	<p>Point for the cor. of secs. 1 and 12, at proportionate bearing and distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">S 1 S 12 S 6</p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
18.00	<p>N. 0°19' E., on the E. bdy. of sec. 1.</p> <p>Over gentle rolling hills, through scattering undergrowth.</p> <p>Base of clay ridge, bears SE and W; asc. 20 ft. over S slope.</p>
18.90	Top of ridge, bears E and W; desc. over gentle N slope.
24.00	Enter nearly level land.
36.50	Point for the ¼ sec. cor. of sec. 6 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.
41.16	<p>The ¼ sec. cor. of sec. 1, monumented with a sandstone, 12 x 8 x 6 ins., firmly set, projecting 6 ins. above ground and mkd. ¼ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 14 E R 15 E</p> <p style="text-align: center;">¼ S 1 </p> <p style="text-align: center;">1974</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°26' E., beginning new measurement.</p> <p>Over nearly level land.</p>

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS							
5.44	Power line, bears N. 62°48' E. and S. 62°48' W.						
11.65	Improved dirt road, bears N. 55°33' E. and S. 55°33' W.						
35.40	Point for the 80 1/16 sec. cor. of sec. 6 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.						
40.34	<p>The 80 1/16 sec. cor. of sec. 1, monumented with a sandstone, 18 x 12 x 6 ins., firmly set, projecting 8 ins. above ground and mkd. 6 notches on the W and S edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 21 S</p> <p>R 14 E R 15 E</p> <table style="margin: auto;"> <tr><td>1/16</td><td> </td></tr> <tr><td>S 1</td><td> </td></tr> <tr><td>80</td><td> </td></tr> </table> <p>1974</p> </div> <p>Deposit the mkd. stone and raise a mound of stone, 2½ ft. base, 1½ ft. high, W of iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°23' E., beginning new measurement.</p> <p>Over nearly level land.</p>	1/16		S 1		80	
1/16							
S 1							
80							
19.10	Top of small spur, slopes E; thence over gentle rolling land.						
35.12	Point for the 120 1/16 sec. cor. of sec. 6 only, T. 21 S., R. 15 E., hereinafter described in the field notes of the dependent resurvey of the subdivisional lines of T. 21 S., R. 15 E.						
40.34	<p>Point for the 120 1/16 sec. cor. of sec. 1, at proportionate distance.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 21 S</p> <p>R 14 E R 15 E</p> <table style="margin: auto;"> <tr><td>1/16</td><td> </td></tr> <tr><td>S 1</td><td> </td></tr> <tr><td>120</td><td> </td></tr> </table> <p>1974</p> </div> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	1/16		S 1		120	
1/16							
S 1							
120							
45.89	The original closing cor. of Tps. 21 S., Rs. 14 and 15 E., monumented with a sandstone, 20 x 14 x 10 ins., firmly set, projecting 8 ins. above ground, mkd. 6 notches on the E, W, and S edges. Add the marks AM on the S face.						

Dependent Resurvey of the E. Bdy. of
T. 21 S., R. 14 E., Salt Lake Meridian, Utah

CHAINS

- 45.93 Intersect the Fourth Standard Parallel South, T. 20 S., R. 14 E.
- Point for the closing cor. of Tps. 21 S., Rs. 14 and 15 E.
- Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 20 S R 14 E
- S 35
- S 1 | S 6
- C|C
- R 14 E R 15 E
- T 21 S
- 1974
- Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
- From this point the standard cor. of secs. 34 and 35, T. 21 S., R. 14 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, bears N. 89°55' W., 25.16 chs. dist., with brass cap mkd. as described in the official record of the 1912 retracement and resurvey of the Fourth Standard Parallel South through R. 14 E.
- From this same point the standard ¼ sec. cor. of sec. 35, T. 20 S., R. 14 E., monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, bears S. 89°55' E., 15.02 chs. dist., with brass cap mkd. as described in the official record of the 1912 retracement and resurvey of the Fourth Standard Parallel South through R. 14 E.
- Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah
- Reestablishment of the Survey executed by
A. D. Ferron, Deputy Surveyor, in 1882 and
the Resurvey executed by H. D. Heist and
E. V. Woolley, Deputy Surveyors, in 1906
- From the cor. of Tps. 21 and 22 S., Rs. 15 and 16 E.
- S. 89°49' W., bet. secs. 1 and 36.
- Over nearly level land, through scattering undergrowth.
- 3.30 Wash, 20 ft. deep, 40 lks. wide, drains S. 60° E.
- 20.30 Top of clay knoll; thence over series of small clay spurs sloping N.
- 40.20 Point for the ¼ sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4} \begin{array}{r} \text{S } 36 \\ \text{S } 1 \end{array}$
	T 22 S R 15 E 1974
	Asc. over gradual E slope.
50.00	Top of small clay knoll; thence over nearly level land.
80.40	The cor. of secs. 1, 2, 35, and 36, monumented with a cottonwood stake, loosely set, 24 ins. long, 3 ins. square, with faint scribe marks.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\begin{array}{r l} \text{S } 35 & \text{S } 36 \\ \text{S } 2 & \text{S } 1 \end{array}$
	T 22 S R 15 E 1974
	Reset the cottonwood stake, inverted, alongside the iron post.
	S. 89°50' W., bet. secs. 2 and 35.
	Over series of small clay spurs sloping N.
36.00	Begin ascent over gentle NE slope.
40.13	The ¼ sec. cor. of secs. 2 and 35, monumented with a cottonwood stake, loosely set, 24 ins. long, 3 ins. square, with faint scribe marks.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4} \begin{array}{r} \text{S } 35 \\ \text{S } 2 \end{array}$
	T 22 S R 15 E 1974
	Reset the cottonwood stake, inverted, alongside the iron post.
	S. 89°56' W., beginning new measurement.

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

- Asc. over gentle NE slope.
- 28.30 Rim of escarpment, bears NW and SE; thence along gentle S slope.
- 40.13 The cor. of secs. 2, 3, 34, and 35, monumented with a cottonwood stake, 18 ins. long, 3 ins. square, loosely set with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

S 34		S 35
S 3		S 2

T 22 S R 15 E
1974

Reset the cottonwood stake, inverted, alongside the iron post.

S. 89°52' W., bet. secs. 3 and 34.

Along gentle S slope.

- 40.08 The ¼ sec. cor. of secs. 3 and 34, monumented with a charred cedar stake, 24 ins. long, 3 ins. square, loosely set, projecting 18 ins. above ground and mkd. ¼ S34 on N face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

¼ S 34
S 3

T 22 S R 15 E
1974

Reset the cedar stake, inverted, alongside the iron post.

S. 89°56' W., beginning new measurement.

Asc. over gentle SE slope.

- 7.90 Unimproved dirt road, bears NE and SW.
- 40.10 The cor. of secs. 3, 4, 33, and 34, monumented with a charred redwood stake, 24 ins. long, 4 ins. square, projecting 18 ins. above ground, mkd. 3 notches on the E and W edges.

At the corner point

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

- 31.38 Telephone line, bears N. 40°13' E. and S. 40°13' W.
- 35.88 Power line, bears N. 40°13' E. and S. 40°13' W.
- 38.05 Old State Highway No. 24, bears N. 40°13' E. and S. 40°13' W.
- 40.12 The ¼ sec. cor. of secs. 5 and 32, monumented with a broken quartzite stone with the lower portion firmly set in the ground and the upper portion mkd. ¼ on one face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

¼	S 32
	S 5

T 22 S R 15 E
1974

Deposit the mkd. stone and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

S. 89°51' W., beginning new measurement.

Asc. 55 ft. over gradual SE slope.

- 34.65 Top of clay spur, slopes N. 80° E.; desc. 10 ft. along N slope.

- 40.12 The cor. of secs. 5, 6, 31, and 32, monumented with a broken quartzite stone with the lower portion firmly set in the ground and the upper portion mkd. 5 notches and 1 notch on the edge.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

S 31	S 32
S 6	S 5

T 22 S R 15 E
1974

Deposit the pieces of the mkd. stone alongside the iron post.

S. 89°53' W., bet. secs. 6 and 31.

Asc. 23 ft. over gradual E slope, through scattered undergrowth.

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
29.35	Wash, 18 ins. deep, 5 lks. wide, drains NE; asc. 18 ft. over gentle E slope.
40.13	The $\frac{1}{4}$ sec. cor. of secs. 6 and 31, monumented with a shale stone, 12 x 12 x 3 ins., firmly set, projecting 6 ins. above ground and mkd. $\frac{1}{4}$ on N face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ $\frac{S\ 31}{S\ 6}$
	T 22 S R 15 E 1974
	Deposit the mkd. stone alongside and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N of iron post.

	S. $89^{\circ}53'$ W., beginning new measurement.
	Asc. 32 ft. over gentle NE slope.
32.00	Wash, 4 ft. deep, 10 lks. wide, drains NE; asc. 46 ft. over gentle E slope.
42.73	Intersect the E. bdy. of sec. 1, T. 22 S., R. 14 E.
	The closing cor. of Tps. 21 and 22 S., R. 15 E., monumented with a limestone, 12 x 8 x 2 ins., firmly set, projecting 6 ins. above ground and mkd. 6 notches on the N, S, and E edges.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 14 E R 15 E
	S 1 $\frac{S\ 31\ C}{S\ 6\ C}$
	T 22 S 1974
	Deposit the mkd. stone alongside the iron post.
	From this point the cor. of Tps. 21 and 22 S., R. 14 E., heretofore described, bears N. $0^{\circ}21'$ E., 3.88 chs. dist.
	From the same point the $\frac{1}{4}$ sec. cor. of sec. 1, T. 22 S., R. 14 E., marked by a shale deposit with shallow pits N and S, bears S. $0^{\circ}21'$ W., 36.22 chs. dist.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the S. Bdy. of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

T 22 S
R 14 E

$\frac{1}{4}$ |
S 1 |

1974

Dependent Resurvey of the Subdivisional Lines
of T. 21 S., R. 15 E., Salt Lake Meridian, Utah

Reestablishment of the Survey executed by
H. D. Heist and E. V. Woolley,
Deputy Surveyors, in 1906

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy.
of the Tp., heretofore described.

N. 0°03' W., bet. secs. 35 and 36.

Desc. 10 ft. over gentle N slope through scattering
undergrowth.

20.50 Power transmission line, bears N. 88°22' W. and
S. 88°22' E.

39.96 The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a
redwood stake, 24 ins. long, 3 ins. square, firmly set,
projecting 12 ins. above ground and mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 21 S R 15 E

$\frac{1}{4}$
|
S 35 | S 36
|

1974

Reset the redwood stake, inverted, alongside the
iron post.

Reestablishment of the Survey executed by
H. D. Heist and E. V. Woolley, Deputy Surveyors, in 1906
and the correction Survey executed by
H. D. Heist and E. V. Woolley, Deputy Surveyors, in 1908

N. 0°02' W., beginning new measurement.

Over nearly level land.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS					
15.30	Wash, 3 ft. deep, 15 lks. wide, drains E.				
20.50	Wash, 5 ft. deep, 30 lks. wide, drains SE.				
39.90	Unimproved dirt road, bears N. 67° E. and S. 67° W.				
40.08	<p>Point for the cor. of secs. 25, 26, 35, and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 26</td> <td style="padding: 0 5px;">S 25</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	S 26	S 25	S 35	S 36
S 26	S 25				
S 35	S 36				
2.30	<p>From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89°59' W., bet. secs. 25 and 36.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Wash, 4 ft. deep, 50 lks. wide, drains S. 45° E.</p>				
40.26	<p>Point for the ¼ sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 25</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 36</td> </tr> </table> <p style="text-align: center;">1974</p>	¼	S 25		S 36
¼	S 25				
	S 36				
80.27	Unimproved dirt road, bears N. 67° E. and S. 67° W.				
80.34	The cor. of secs. 25, 26, 35, and 36.				
40.08	<p style="text-align: center;">Reestablishment of the Survey executed by H. D. Heist and E. V. Woolley, Deputy Surveyors, in 1906</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°02' W., bet. secs. 25 and 26.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the original cor.</p>				

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 26 S 25 </p> <p style="text-align: center;">1974</p> <p>Set a wood post, 3½ ft. long, projecting 1½ ft. above ground, alongside the iron post.</p>	
73.75	Improved dirt road, bears N. 75°50' W. and S. 75°50' E.	
74.93	Power line, bears N. 75°50' W. and S. 75°50' E.	
80.16	Point for the cor. of secs. 23, 24, 25, and 26, at proportionate distance; there is no remaining evidence of the original cor.	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 23 S 24 S 26 S 25 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	
	<p>From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89°56' W., bet. secs. 24 and 25.</p> <p>Over gentle rolling land, through scattering undergrowth.</p>	
16.00	Desc. 20 ft. over NW slope.	
40.66	Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original cor.	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S 24}{S 25}$ </p> <p style="text-align: center;">1974</p>	
67.85	Power line, bears N. 47°35' E. and S. 47°35' W.	
80.76	The cor. of secs. 23, 24, 25, and 26.	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	N. 0°02' W., bet. secs. 23 and 24.
	Over nearly level land.
6.80	Bottom of draw, drains E.
19.80	Enter gentle rolling land.
35.20	Desc. 40 ft. over N slope.
40.08	Point for the ¼ sec. cor. of secs. 23 and 24, at proportionate distance there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 23 S 24 1974 </p>
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.
46.30	Wash, 6 ft. deep, 10 lks. wide, drains NE.
54.60	Saleratus Wash, 12 ins. deep, 2.00 chs. wide, drains E; enter thick greasewood.
70.00	Leave greasewood.
75.50	Top of small knoll; desc. 17 ft. over gentle N slope.
77.11	Right of way fence, bears N. 66° E. and S. 66° W.
80.16	Point for the cor. of secs. 13, 14, 23, and 24, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> S 14 S 13 S 23 S 24 1974 </p>
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
	From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., heretofore described.
	S. 89°55' W., bet. secs. 13 and 24.
	Over nearly level land, through thick greasewood.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
8.00	Leave greasewood.
41.42	Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ $\frac{S\ 13}{S\ 24}$
	1974
	Continue over nearly level land.
74.63	Right of way fence, bears N. 66° E. and S. 66° W.
81.51	The cor. of secs. 13, 14, 23, and 24.
	N. $0^\circ 02'$ W., bet. secs. 13 and 14.
	Over nearly level land.
2.42	Center line of E. bound lane of U.S. Highway No. 50-6, at Green River Interchange, curves NE and SW.
19.73	Center line of E. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. $76^\circ 09'$ E. and S. $76^\circ 09'$ W.
21.25	Center line of W. bound lane of Interstate 70, asphalt surfaced, 58 lks. wide, bears N. $76^\circ 09'$ E. and S. $76^\circ 09'$ W.
22.47	Center line of W. bound lane of U.S. Highway No. 50-6, at Green River Interchange, bears N. $76^\circ 25'$ E. and S. $76^\circ 25'$ W.
25.82	Right of way fence, bears northeasterly and southwesterly.
40.08	The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 24 ins. above ground, mkd. $\frac{1}{4}$ S13 on W face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ S 14 S 13
	1974
	Reset the pine stake, inverted, alongside the iron post.

271

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS							
	N. 0°08' E., beginning new measurement.						
21.66	Power transmission line, bears N. 51°40' W. and S. 51°40' E.						
29.10	Top of small clay knob.						
38.70	Wash, 10 ft. deep, 20 lks. wide, drains N. 80° E.						
40.28	The cor. of secs. 11, 12, 13, and 14, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 24 ins. above ground and mkd. 4 notches on S and 1 notch on E edge.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 21 S R 15 E						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">S 11</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 12</td> </tr> <tr> <td style="padding: 0 5px;">S 14</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 13</td> </tr> </table>	S 11		S 12	S 14		S 13
S 11		S 12					
S 14		S 13					
	1974						
	Reset the pine stake, inverted, alongside the iron post.						
	From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., heretofore described.						
	S. 89°52' W., bet. secs. 12 and 13.						
	Over gentle rolling land, through scattering undergrowth.						
10.50	Wash, 3 ft. deep, 20 lks. wide, in bottom of draw, drains S. 80° E.						
15.00	Same wash, drains N. 80° E.						
17.90	Same wash, drains SE.						
41.72	The ¼ sec. cor. of secs. 12 and 13, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 18 ins. above ground and mkd. ¼ S12 on N and S13 on S face.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 21 S R 15 E						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">¼</td> <td style="padding: 0 5px;">—</td> <td style="padding: 0 5px;">S 12</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">—</td> <td style="padding: 0 5px;">S 13</td> </tr> </table>	¼	—	S 12		—	S 13
¼	—	S 12					
	—	S 13					
	1974						
	Reset the pine stake, inverted, alongside the iron post.						

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89°55' W., beginning new measurement.
34.00	Wash, 10 ft. deep, 20 lks. wide, drains N. 75° E.
40.18	The cor. of secs. 11, 12, 13, and 14.
	North, bet. secs. 11 and 12.
	Over nearly level land.
0.27	Telephone line, bears N. 77°10' E. and S. 77°10' W.
2.20	Wash, 8 ft. deep, 20 lks. wide, drains S. 80° E.
12.90	Abandoned U.S. Highway No. 50-6, bears N. 78°21' E. and S. 78°21' W.
15.96	Denver and Rio Grande Western Railroad, bears N. 78°21' E. and S. 78°21' W.
16.68	Telegraph line, parallels railroad.
20.30	Wash, 5 ft. deep, 20 lks. wide, drains E.
35.20	Wash, 10 ft. deep, 3.00 chs. wide, drains E.
40.06	The $\frac{1}{4}$ sec. cor. of secs. 11 and 12, monumented with a pine stake, 26 ins. long, 2 ins. square, projecting 18 ins. above ground and mkd. $\frac{1}{4}$ on W face.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. daim., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ S 11 S 12
	1974
	Reset the pine stake, inverted, alongside the iron post.
	N. 0°28' W., beginning new measurement.
15.07	Power line, bears N. 77°05' W. and S. 77°05' E.
40.22	The cor. of secs. 1, 2, 11, and 12, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. 5 notches on the S and 1 notch on E edge.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

273

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS					
	<p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 11</td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, alongside the iron post.</p>	S 2	S 1	S 11	S 12
S 2	S 1				
S 11	S 12				
	<p>From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89°52' W., bet. secs. 1 and 12.</p> <p>Over gentle rolling land, through scattering undergrowth.</p>				
0.90	Wash, 2 ft. deep, 15 lks. wide, drains S.				
21.20	Wash, 2 ft. deep, 10 lks. wide, drains S.				
30.00	Wash, 5 ft. deep, 20 lks. wide, drains SE.				
35.40	Wash, 3 ft. deep, 15 lks. wide, drains SE.				
42.42	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				
	<p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">$\frac{1}{4}$</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	$\frac{1}{4}$	S 1		S 12
$\frac{1}{4}$	S 1				
	S 12				
43.60	Wash, 5 ft. deep, 20 lks. wide, drains SE.				
49.70	Wash, 10 ft. deep, 200 lks. wide, drains SE.				
63.30	Wash, 3 ft. deep, 15 lks. wide, drains SE.				
82.54	The cor. of secs. 1, 2, 11, and 12.				
	<p>N. 0°01' W., bet. secs. 1 and 2.</p> <p>Over nearly level land, through scattering undergrowth.</p>				
30.50	Wash, 10 ft. deep, 2.00 chs. wide, drains SE.				
40.08	<p>The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented with a sandstone, 18 x 12 x 6 ins., firmly set, projecting 8 ins. above ground and mkd. $\frac{1}{2}$ on W face.</p> <p>At the corner point</p>				

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 2 S 1 1974 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°05' W., beginning new measurement.</p>
24.00	Wash, 10 ft. deep, 1.50 chs. wide, drains S. 25° W.
40.07	Point for the 80 1/16 sec. cor. of secs. 1 and 2, at proportionate distance.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E 1/16</p> <p style="text-align: center;">S 2 S 1</p> <p style="text-align: center;">80 1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
40.15	Wash, 3 ft. deep, 10 lks. wide, drains SE.
41.40	Wash, 10 ft. deep, 50 lks. wide, drains SE.
50.55	Same wash, drains S. 20° W.
59.85	Wash, 4 ft. deep, 10 lks. wide, drains SE.
72.60	Wash, 6 ft. deep, 50 lks. wide, drains SE.
80.14	Point for the 120 1/16 sec. cor. of secs. 1 and 2, at proportionate distance.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E 1/16</p> <p style="text-align: center;">S 2 S 1</p> <p style="text-align: center;">120 1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
88.43	Intersect the Fourth Standard Parallel South, S. bdy. of sec. 34, T. 20 S., R. 15 E.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

Point for the closing cor. of secs. 1 and 2.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 20 S R 15 E

S 34

S 2 | S 1
C | C
T 21 S R 15 E
1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From this point the original closing cor. of secs. 1 and 2 bears N. 0°05' W., 0.11 chs. dist., monumented with a pine stake, 4 ins. square, firmly set, projecting 24 ins. above ground and mkd CC and 5 grooves on S and 1 groove on E face. Add the marks AM on S face.

From the same point the standard ¼ sec. cor. of sec. 34, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears East, 20.73 chs. dist.

The point for the ¼ sec. cor. of sec. 1 only, on the N. bdy. of the Tp., at proportionate distance, based on the original plat.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 20 S

¼ S 1

T 21 S R 15 E
1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From this point the standard cor. of secs. 34 and 35, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears S. 89°56' E., 21.00 chs. dist.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., heretofore described.

N. 0°05' W., bet. secs. 34 and 35.

Over gentle rolling land, through scattering undergrowth. Asc. 5 ft. over gradual S slope.

4.30 Top of rise, bears E and W; desc. 20 ft. over NE slope.

22.95 Power transmission line, bears N. 88°22' W and S. 88°22' E.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
36.25	Unimproved dirt road, curves NE and SW.
40.11	Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E $\frac{1}{4}$ S 34 S 35 1974
80.22	Continue over gentle rolling land. The cor. of secs. 26, 27, 34, and 35, monumented with a redwood stake, 24 ins. long, 4 ins. square, projecting 12 ins. above ground and dimly mkd. S35 on E and S34 on W face. At the corner point Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E $\frac{S\ 27}{S\ 34}$ $\frac{S\ 26}{S\ 35}$ 1974
7.10	Reset redwood stake, inverted, alongside the iron post. From the cor. of secs. 25, 26, 35, and 36. S. $89^{\circ}57'$ W., bet. secs. 26 and 35. Over nearly level land, through scattering undergrowth.
15.50	Wash, 4 ft. deep, 15 lks. wide, drains SW.
15.50	Wash, 7 ft. deep, 100 lks. wide, drains SE.
40.10	The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with a redwood post, 18 ins. long, 4 ins. square, projecting 6 ins. above ground with faint scribe marks. At the corner point Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E $\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$ 1974

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Reset the redwood post, inverted, alongside the iron post.</p> <p style="text-align: center;">_____</p> <p>N. 89°57' W., beginning new measurement.</p> <p>40.20 The cor. of secs. 26, 27, 34, and 35.</p>	
<p>35.60</p> <p>40.10</p>	<p>N. 0°05' W., bet. secs. 26 and 27.</p> <p>Over gentle rolling land, through scattering undergrowth; asc. 20 ft. over gentle S slope.</p> <p>Top of clay spur, slopes W; desc. over gradual N slope.</p> <p>Point for the ¼ sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> ¼ S 27 S 26 </p> <p style="text-align: center;">1974</p> <p>Thence over nearly level land.</p>	
<p>54.50</p> <p>70.60</p> <p>80.20</p>	<p>Wash, 5 ft. deep, 10 lks. wide, drains S. 70° E.</p> <p>Enter gentle rolling land.</p> <p>The cor. of secs. 22, 23, 26, and 27, monumented with a sandstone, 15 x 12 x 10 ins., firmly set, projecting 7 ins. above ground and mkd. 2 notches on S and E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> S 22 S 23 S 27 S 26 </p> <p style="text-align: center;">1974</p> <p>Deposit the mkd. stone alongside the iron post.</p>	
<p>21.30</p>	<p>From the cor. of secs. 23, 24, 25, and 26.</p> <p>West, bet. secs. 23 and 26.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Power line, bears N. 75°50' W. and S. 75°50' E.</p>	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
26.60	Improved dirt road, parallels power line.
40.15	Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E $\frac{1}{4}$ $\frac{S 23}{S 26}$ 1974
80.30	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post. Continue over nearly level land. The cor. of secs. 22, 23, 26 and 27.
7.95	N. $0^{\circ}05'$ E., bet. secs. 22 and 23. Over gentle rolling land, through scattering undergrowth. Improved dirt road, bears N. 80° E. and S. 80° W.
13.10	Power line, bears N. $80^{\circ}50'$ W. and S. $80^{\circ}50'$ E.
15.90	Top of rise, bears E and W, desc. 35 ft. over gradual N slope.
23.50	Spur, slopes E; desc over gentle NE slope.
31.60	Wash, 4 ft. deep, 24 lks. wide, drains E; asc. 30 ft. over gradual S slope.
34.30	Top of clay spur, slopes E; thence along E slope.
37.45	Top of clay spur, slopes E; desc. 30 ft. over E slope.
39.92	The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 14 x 10 x 6 ins., firmly set, projecting 6 ins. above ground and mkd. $\frac{1}{4}$ on W face. At the corner point Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 21 S R 15 E $\frac{1}{4}$ S 22 S 23 1974
	Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS								
	N. 0°02' W., beginning new measurement.							
20.91	Intersect Right of way marker No. 3695 + 63, with fence bearing S. 64°35' W. and N. 73°23' E.							
24.29	Center line of E bound lane of Interstate 70, bears N. 64°35' E. and S. 64°35' W.							
27.26	Center line of W bound lane of Interstate 70, bears N. 64°35' E. and S. 64°35' W.							
31.69	Intersect Right of way marker No. 3698 + 68.52, with fence bearing S. 64°35' W. and N. 66°08' E.							
40.19	The cor. of secs. 14, 15, 22, and 23, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 24 ins. above ground, mkd. 3 notches on the S and 2 notches on the E edges.							
	At the corner point							
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.							
	T 21 S R 15 E							
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 15</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 14</td> </tr> <tr> <td style="padding: 2px;">S 22</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 23</td> </tr> </table>	S 15		S 14	S 22		S 23	
S 15		S 14						
S 22		S 23						
	1974							
	Reset the pine stake, inverted, alongside the iron post.							
	From the cor. of secs. 13, 14, 23, and 24.							
	N. 89°58' W., bet. secs. 14 and 23.							
	Over nearly level land.							
40.11	Point for the ¼ sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original cor.							
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.							
	T 21 S R 15 E							
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="padding: 2px;">—</td> <td style="padding: 2px;">S 14</td> </tr> <tr> <td></td> <td style="padding: 2px;">—</td> <td style="padding: 2px;">S 23</td> </tr> </table>	¼	—	S 14		—	S 23	
¼	—	S 14						
	—	S 23						
	1974							
46.90	Center line of E bound lane of Interstate 70, bears N. 64°35' E. and S. 64°35' W.							
51.10	Center line of W bound lane of Interstate 70, bears N. 66°08' E. and S. 66°08' W.							
58.90	Right of way fence, bears N. 66°08' E. and S. 66°08' W.							
70.05	Saleratus Wash, 10 ft. deep, 3.00 chs. wide, drains S.							

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
80.22	The cor. of secs. 14, 15, 22, and 23.
11.20	<p>N. 0°04' E., bet. secs. 14 and 15.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Saleratus Wash, 10 ft. deep, 2.50 chs. wide, drains SE.</p>
28.32	Telephone line, bears N. 24°15' E. and S. 24°15' W.
32.92	Old State Highway No. 24, bears N. 24°15' E. and S. 24°15' W.
40.15	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 15 S 14 1974 </p> <p>Asc. 8 ft. over gentle SW slope.</p>
46.10	Top of low clay ridge, bears N. 80° W. and S. 80° E.; thence over gentle rolling ridge top.
54.02	Right of way fence, parallels highway.
56.81	U.S. Highway No. 50-6, bears N. 56°30' W. and S. 56°30' E.
61.34	Right of way fence, parallels highway.
80.30	<p>The cor. of secs. 10, 11, 14, and 15, monumented with a redwood stake, 36 ins. long, 3 ins. square, firmly set, projecting 2 ft. above ground and mkd. 4 notches on the S and 2 notches on the E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> S 10 S 11 S 15 S 14 1974 </p> <p>Reset the redwood stake, inverted, alongside the iron post.</p>
	From the cor. of secs. 11, 12, 13, and 14.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89°58' W., bet. secs. 11 and 14.
	Over gentle rolling land, through scattering undergrowth.
1.14	Telephone line, bears N. 77°10' E. and S. 77°10' W.
23.56	Power transmission line, bears N. 51°40' W. and S. 51°40' E.
40.11	The ¼ sec. cor. of secs. 11 and 14, monumented with a rotted pine stake, 8 ins. long, 2 ins. square, projecting 2 ins. above ground with no legible markings.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4} \begin{array}{r} S 11 \\ S 14 \end{array}$
	1974
	Reset the pine stake alongside the iron post.
	S. 89°59' W., beginning new measurement.
21.09	Old State Highway No. 24, bears N and S.
31.02	Telephone line, bears N. 68°55' W. and S. 68°55' E.
40.15	The cor. of secs. 10, 11, 14, and 15.
	North, bet. secs. 10 and 11.
	Over nearly level land.
3.51	Telephone line, bears N. 68°55' W. and S. 68°55' E.
14.28	Old U.S. Highway No. 50-6, bears N. 70°20' W. and S. 70°20' E.
17.52	Denver and Rio Grande Western Railroad, bears N. 70°20' W. and S. 70°20' E.
18.28	Telegraph line, parallels railroad.
40.25	The ¼ sec. cor. of secs. 10 and 11, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. ¼ on W face.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 10 S 11 </p> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°15' W., beginning new measurement.</p> <p>2.15 Wash, 5 ft. deep, 20 lks. wide, drains E.</p> <p>4.65 Power transmission line, bears N. 51°40' W and S. 51°40' E.</p> <p>33.41 Power line, bears N. 77°05' W. and S. 77°05' E.</p> <p>39.93 The cor. of secs. 2, 3, 10, and 11, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. 5 notches on the S and 2 notches on the E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{S\ 3}{S\ 10}$ $\frac{S\ 2}{S\ 11}$ </p> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, alongside the iron post.</p>
<p>40.04</p>	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>S. 89°54' W., bet. secs. 2 and 11.</p> <p>Over gentle rolling land, through scattering undergrowth.</p> <p>The ¼ sec. cor. of secs. 2 and 11, monumented with a pine post, 36 ins. long, 3 ins. square, projecting 18 ins. above ground and mkd. ¼ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S\ 2}{S\ 11}$ </p> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, alongside the iron post.</p>

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	S. 89°52' W., beginning new measurement.	
16.30	Wash, 8 ft. deep, 20 lks. wide, drains S.	
28.25	Wash, 8 ft. deep, 40 lks. wide, drains SE.	
40.08	The cor. of secs. 2, 3, 10, and 11.	
	N. 0°06' W., bet. secs. 2 and 3.	
	Over nearly level land, through scattering undergrowth.	
12.90	Wash, 5 ft. deep, 20 lks. wide, drains S. 75° E.	
19.60	Wash, 4 ft. deep, 25 lks. wide, drains E.	
26.40	Wash, 5 ft. deep, 25 lks. wide, drains S. 15° E.	
40.00	The ¼ sec. cor. of secs. 2 and 3, monumented with a pine post, 36 ins. long, 3 ins. square, projecting 18 ins. above ground and mkd. ¼ S3 on the W face.	
	At the corner point	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p>T 21 S R 15 E</p> <p>¼</p> <p>S 3 S 2</p> <p>1974</p>	
	Reset the pine stake, inverted, alongside the iron post.	
	N. 0°04' W., beginning new measurement.	
	Continue over nearly level land.	
40.14	Point for the 80 1/16 sec. cor. of secs. 2 and 3, at proportionate distance.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p>T 21 S R 15 E</p> <p>1/16</p> <p>S 3 S 2</p> <p>80</p> <p>1974</p>	
80.28	Point for the 120 1/16 sec. cor. of secs. 2 and 3, at porportionate distance.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah


CHAINS		
88.74	<p style="text-align: center;">T 21 S R 15 E 1/16</p> <p style="text-align: center;">S 3 S 2 120 1974</p> <p>Intersect the Fourth Standard Parallel South, T. 20 S., R. 15 E., at the closing cor. of secs. 2 and 3, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 18 ins. above ground and mkd. CC T21S R15E on S face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 20 S R 15 E</p> <p style="text-align: center;">S 33 ----- S 3 S 2 C C T 21 S R 15 E</p> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>From this point the standard ¼ sec. cor. of sec. 33, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears S. 89°54' E., 20.81 chs. dist.</p>	
	<p>The point for the ¼ sec. cor. of sec. 2 only, T. 21 S., R. 15 E., is at midpoint on the N. bdy. of sec. 2.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">¼ S 2 ----- T 21 S R 15 E 1974</p> <p>From this point the standard cor. of secs. 33 and 34, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears S. 89°42' E., 20.96 chs. dist.</p>	
40.07	<p>From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., heretofore described.</p> <p>N. 0°18' W., bet. secs. 33 and 34.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>The ¼ sec. cor. of secs. 33 and 34, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. ¼ on W face.</p> <p>At the corner point</p>	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E



1974

Reset pine stake, inverted, alongside the iron post.

N. 0°01' W., beginning new measurement.


Continue over nearly level land.

40.15 The cor. of secs. 27, 28, 33, and 34, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. 3 notches on the E and 1 notch on the S edges.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E



1974

Reset the pine stake, inverted, alongside the iron post

From the cor. of secs. 26, 27, 34, and 35.


S. 89°55' W., bet. secs. 27 and 34.

Over nearly level land, through scattering undergrowth.

40.17 Point for the ¼ sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E



1974

54.21 Power transmission line, bears N. 34°15' W. and S. 34°15' E.

80.34 The cor. of secs. 27, 28, 33, and 34.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS							
	N. 0°06' W., bet. secs. 27 and 28.						
	Asc. 10 ft. over gentle SW slope, through scattering undergrowth.						
2.40	Top of low ridge, bears E and W; desc. 23 ft. over gentle N slope.						
38.46	Power transmission line, bears N. 34°15' W. and S. 34°15' E.						
40.06	The ¼ sec. cor. of secs. 27 and 28, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. ¼ on the W face.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	<p style="text-align: center;">T 21 S R 15 E</p> <div style="text-align: center;"> <table border="0"> <tr> <td></td> <td style="text-align: center;">¼</td> <td></td> </tr> <tr> <td style="text-align: center;">S 28</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 27</td> </tr> </table> </div> <p style="text-align: center;">1974</p>		¼		S 28		S 27
	¼						
S 28		S 27					
	Reset the pine stake, inverted, alongside the iron post.						
	N. 0°03' W., beginning new measurement.						
11.04	Telephone line, bears N. 40°20' E. and S. 40°20' W.						
15.92	Power line, bears N. 40°20' E. and S. 40°20' W.						
18.52	Old State Highway No. 24, parallels power line.						
26.90	Wash, 5 ft. deep, 10 lks. wide, drains E.						
32.00	Base of rolling hills, bears E and W; asc. 23 ft. over S slope.						
40.11	The cor. of secs. 21, 22, 27, and 28, monumented with a sandstone, 20 x 12 x 8 ins., firmly set, projecting 8 ins. above ground and mkd. 3 notches on the E and 2 notches on the S edges.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	<p style="text-align: center;">T 21 S R 15 E</p> <div style="text-align: center;"> <table border="0"> <tr> <td style="text-align: center;">S 21</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 22</td> </tr> <tr> <td style="text-align: center;">S 28</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 27</td> </tr> </table> </div> <p style="text-align: center;">1974</p>	S 21		S 22	S 28		S 27
S 21		S 22					
S 28		S 27					
	Deposit the mkd. stone and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.						

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	From the cor. of secs. 22, 23, 26, and 27.
	S. 89°47' W., bet. secs. 22 and 27.
	Over nearly level land, through scattering undergrowth.
26.15	Wash, 3 ft. deep, 15 lks. wide, drains SE.
40.05	The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, 20 x 12 x 10 ins., firmly set, projecting 8 ins. above ground and mkd. $\frac{1}{4}$ on the N face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ $\frac{S\ 22}{S\ 27}$
	1974
	Deposit the mkd. stone alongside the iron post.

	S. 89°57' W., beginning new measurement.
15.48	Telephone line, bears N. 40°20' E. and S. 40°20' W.
19.54	Power line, bears N. 40°20' E. and S. 40°20' W.
21.72	Old State Highway No. 24, parallels power line.
40.10	The cor. of secs. 21, 22, 27, and 28.
	North, bet. secs. 21 and 22.
	Over gentle rolling land, through scattering undergrowth; asc. 17 ft. over gentle SE slope.
2.20	S rim of low mesa, bears E and W; thence over nearly level land.
22.88	Right of way fence, parallels highway.
26.14	Center line of E bound lane of Interstate 70, bears N. 64°35' E. and S. 64°35' W.
30.46	Center line of W. bound lane of Interstate 70, bears N. 64°35' E. and S. 64°35' W.
33.66	Right of way fence, parallels highway.
34.57	Improved dirt road, bears N. 64°33' E. and S. 64°33' W.
40.07	The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a partially deteriorated pine stake, 10 ins. long, projecting 3 ins. above small mound of stone, faintly mkd. $\frac{1}{4}$ on W face.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

$\frac{1}{4}$
 |
 S 21 | S 22
 |

1974

Reset remains of the pine stake, alongside the iron post.

N. 0°09' W., beginning new measurement.

14.60 Wash, 3 ft. deep, 15 lks. wide, drains N. 80° E.

40.09 The cor. of secs. 15, 16, 21, and 22, monumented with a sandstone, 12 x 10 x 4 ins., firmly set, projecting 6 ins. above ground and mkd. NE S21 and a pine stake, 6 ft. long, projecting 4 ft. above ground with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

S 16 | S 15
 S 21 | S 22

1974

Deposit the mkd. stone and reset the pine stake alongside the iron post.

From the cor. of secs. 14, 15, 22, and 23.

S. 89°57' W., bet. secs. 15 and 22.

Over nearly level land, through scattering undergrowth.

12.71 Telephone line, bears N. 24°15' E. and S. 24°15' W.

15.86 Old State Highway No. 24, bears N. 24°15' E. and S. 24°15' W.

40.12 Point for the ¼ sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>T 21 S R 15 W</p> <p>$\frac{1}{4}$ $\frac{S 15}{S 22}$</p> <p>1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>Continue over nearly level land.</p>	
80.24	The cor. of secs. 15, 16, 21, and 22.	
	<p>N. 0°01' E., bet. secs. 15 and 16.</p> <p>Asc. 13 ft. over gentle S slope, through scattering undergrowth.</p>	
7.70	N rim of mesa, bears E and W; desc. 45 ft. over N slope.	
13.00	Base of descent, bears NW and SE; over nearly level land.	
35.20	Unimproved dirt road, bears NW and SE.	
40.11	Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.	
	<p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p>T 21 S R 15 E</p> <p>$\frac{1}{4}$</p> <p>S 16 S 15</p> <p>1974</p>	
49.70	Saleratus Wash, 5 ft. deep, 30 lks. wide, drains E.	
70.70	Wash, 2 ft. deep, 15 lks. wide, drains SE.	
80.22	The cor. of secs. 9, 10, 15, and 16, monumented with a sandstone, 28 x 12 x 4 ins., firmly set, projecting 12 ins. above ground and mkd. 4 notches on the S and 3 notches on the E edges.	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p>T 21 S R 15 E</p> <p>S 9 S 10</p> <p>S 16 S 15</p> <p>1974</p>	
	Deposit the mkd. stone alongside the iron post.	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	From the cor. of secs. 10, 11, 14, and 15.
	S. 89°55' W., bet. secs. 10 and 15.
	Over nearly level land, through scattering undergrowth.
28.73	Right of way fence, parallels highway.
35.53	U.S. Highway No. 50-6, bears N. 56°30' W. and S. 56°30' E.
39.62	Right of way fence, parallels highway.
40.12	The ¼ sec. cor. of secs. 10 and 15, monumented with a sandstone, 18 x 12 x 3 ins., firmly set, projecting 8 ins. above ground and mkd. ¼ on the N face.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4} \begin{array}{r} S 10 \\ S 15 \end{array}$
	1974
	Deposit the mkd. stone alongside the iron post.
	S. 89°50' W., beginning new measurement.
	Continue over nearly level land.
40.15	The cor. of secs. 9, 10, 15, and 16.
	N. 0°05' W., bet. secs. 9 and 10.
	Over gentle rolling, land, through scattering undergrowth.
26.88	Right of way fence, parallels highway.
29.56	Center line of U.S. Highway No. 50-6, bears N. 56°40' W. and S. 56°40' E.
34.06	Right of way fence, parallels highway.
34.69	Telephone line, bears N. 68°55' W. and S. 68°55' E.
40.09	Point for the ¼ sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 21 S R 15 E</p> <p style="margin-left: 100px;">¼ S 9 S 10 </p> <p>1974</p>
43.22	Old U.S. Highway No. 50-6, bears N. 70°20' W. and S. 70°20' E.
46.49	Denver and Rio Grande Western railroad, bears N. 70°20' W. and S. 70°20' E.
47.22	Telegraph line, parallels railroad.
80.18	<p>The cor. of secs. 3, 4, 9, and 10, monumented with a pine stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. 5 notches on the S and 3 notches on the E edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="margin-left: 100px;">S 4 S 3 S 9 S 10</p> <p>1974</p> <p>Reset the pine stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
28.19	<p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>S. 89°52' W., bet. secs. 3 and 10.</p> <p>Over gentle rolling land, through scattering undergrowth.</p> <p>Power line, bears N. 77°05' W. and S. 77°05' E.</p>
40.09	<p>The ¼ sec. cor. of secs. 3 and 10, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 24 ins. above ground and mkd. ¼ S3 on N and S10 on S face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="margin-left: 100px;">¼ ——— S 3 S 10</p> <p>1974</p> <p>Reset the pine stake, inverted, alongside the iron post.</p>

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89°55' W., beginning new measurement.
	Asc. 13 ft. over gentle NE slope.
4.07	Power transmission line, bears N. 51°40' W. and S. 51°40' E.
10.20	Top of low clay ridge, bears NW and SE; desc. 23 ft. over SW slope.
20.50	Enter nearly level land.
27.60	Wash, 1 ft. deep, 20 lks. wide, drains S.
40.09	The cor. of secs. 3, 4, 9, and 10.
	N. 0°09' W., bet. secs. 3 and 4.
	Over nearly level land, through scattering undergrowth.
24.73	Power transmission line, bears N. 57°07' W. and S. 57°07' E.
26.53	Power line, bears N. 57°07' W. and S. 57°07' E.
32.10	Wash, 2 ft. deep, 5 lks. wide, drains SE.
40.11	Point for the ¼ sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 4 \quad \quad \text{S } 3 \\ \end{array}$
	1974
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
48.00	Begin ascent over S slope, 17 ft.
53.90	Top of small knoll; desc. 18 ft. over gentle N slope.
80.22	Point for the 80 1/16 sec. cor. of secs. 3 and 4, at proportionate distance.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	1/16
	$\begin{array}{c} \text{S } 4 \quad \quad \text{S } 3 \\ \\ 80 \\ 1974 \end{array}$
	Over nearly level land.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

112.10 Wash, 2 ft. deep, 5 lks. wide, drains S. 60° E.

120.33 Point for the 120 1/16 sec. cor. of secs. 3 and 4, at proportionate distance.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E
1/16

S 4 | S 3

120
1974

128.81 Intersect the Fourth Standard Parallel South, T. 20 S., R. 15 E., at the closing cor. of secs. 3 and 4, monumented with a sandstone, 20 x 8 x 6 ins., firmly set, projecting 8 ins. above ground and mkd. 3 notches on E and W edges.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 20 S R 15 E

S 32

S 4 | S 3

C | C

T 21 S R 15 E
1974

Deposit the mkd. stone and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From this point, the standard ¼ sec. cor. of sec. 32, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears N. 89°55' E., 20.89 chs. dist.

The point for the ¼ sec. cor. of sec. 3 only, T. 21 S., R. 15 E., is at midpoint on the N. bdy. of sec. 3.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

¼ S 3
T 21 S R 15 E
1974

From this point the standard cor. of secs. 32 and 33, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears S. 89°51' E., 20.87 chs. dist.

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., heretofore described.

N. 0°07' W., bet. secs. 32 and 33.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	Over gentle rolling land, through scattering undergrowth.
26.50	Fivemile Wash, drains S. 70° E.
36.93	Telephone line, bears N. 40°13' E. and S. 40°13' W.
40.11	Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 32 \quad \quad \text{S } 33 \end{array}$
	1974
42.13	Power line, bears N. 40°13' E. and S. 40°13' W.
44.70	Old State Highway No. 24, parallels power line.
80.22	The cor. of secs. 28, 29, 32, and 33, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 18 ins. above ground and mkd. S32 on the W and S33 on the E face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\begin{array}{c} \text{S } 29 \quad \quad \text{S } 28 \\ \text{S } 32 \quad \quad \text{S } 33 \end{array}$
	1974
	Reset the pine stake, inverted, alongside the iron post.
	From the cor. of secs. 27, 28, 33, and 34.
	S. 89°52' W., bet. secs. 28 and 33.
	Over nearly level land, through scattering undergrowth.
39.86	The $\frac{1}{4}$ sec. cor. of secs. 28 and 33, monumented with a pine stake, 18 ins. long, 3 ins. square, projecting 10 ins. above the ground and faintly mkd. $\frac{1}{4}$ on W face.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4} \quad \frac{\text{S } 28}{\text{S } 33}$
	1974

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Reset the pine stake, inverted, alongside the iron post.</p> <hr/> <p>S. 89°58' W., beginning new measurement.</p>	
3.55	Telephone line, bears N. 40°13' E. and S. 40°13' W.	
7.90	Power line, parallels telephone line.	
10.00	Old State Highway No. 24, parallels telephone line.	
40.30	The cor. of secs. 28, 29, 32, and 33.	
	<p>N. 0°01' W., bet. secs. 28 and 29.</p> <p>Over gentle rolling land, through scattering undergrowth.</p>	
40.12	<p>The ¼ sec. cor. of secs. 28 and 29, monumented with a badly rotted redwood stake, 18 ins. long, projecting 8 ins. above ground and no legible marks.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 21 S R 15 E</p> <p>¼</p> <p>S 29 S 28</p> <p>1974</p> </div>	
	<p>Reset the remains of the redwood stake alongside the iron post.</p> <hr/> <p>N. 0°14' W., beginning new measurement.</p>	
24.97	Right of way fence, parallels highway.	
28.27	Center line of E. bound lane of Interstate 70, bears N. 64°32' E. and S. 64°32' W.	
32.49	Center line of W bound lane of Interstate 70, bears N. 64°32' E. and S. 64°32' W.	
35.73	Right of way fence, parallels highway.	
40.10	<p>Point for the cor. of secs. 20, 21, 28, and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	


Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS					
	<p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 29</td> <td style="padding: 0 5px;">S 28</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	S 20	S 21	S 29	S 28
S 20	S 21				
S 29	S 28				
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 89°56' W., bet. secs. 21 and 28.</p> <p>Over nearly level land, through scattering undergrowth.</p>				
28.41	Power line, bears N. 34°15' W. and S. 34°15' E.				
40.11	Point for the ¼ sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor.				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				
	<p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 28</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	¼	S 21		S 28
¼	S 21				
	S 28				
48.25	Right of way fence, parallels highway.				
55.32	Center line of E bound lane of Interstate 70, bears N. 64°32' E. and S. 64°32' W.				
64.12	Center line of W bound lane of Interstate 70, bears N. 64°32' E. and S. 64°32' W.				
71.00	Right of way fence, parallels highway.				
80.22	The cor. of secs. 20, 21, 28, and 29.				
	<p>N. 0°05' W., bet. secs. 20 and 21.</p> <p>Asc. 20 ft. over gentle S slope, through scattering undergrowth.</p>				
31.92	Gravel road, bears N. 80° W. and S. 80° E.				
40.10	Point for the ¼ sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

T 21 S R 15 E




1974

- 60.75 Wash, 2 ft. deep, 10 lks. wide, drains NE.
- 64.00 Power transmission line, bears N. 50°23' W. and S. 50°23' E.
- 78.25 Bottom of draw, drains E.
- 80.20 The cor. of secs. 16, 17, 20, and 21, monumented with a sandstone, 15 x 15 x 8 ins., firmly set, projecting 6 ins. above ground and mkd. 4 notches on the E and 3 notches on the S edges.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E



1974

Deposit the mkd. stone and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.


From the cor. of secs. 15, 16, 21, and 22.

S. 89°58' W., bet. secs. 16 and 21.

Over nearly level land, through scattering undergrowth.

- 36.65 Begin descent over W slope, 30 ft.
 - 39.55 Small draw, drains N; thence over nearly level land.
 - 39.95 The ¼ sec. cor. of secs. 16 and 21, monumented with a granite stone, 20 x 10 x 5 ins., firmly set, projecting 10 ins. above ground and mkd. ¼ on N face.
- At the corner point
- Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E



1974

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	Deposit the mkd. stone alongside the iron post.

	S. 89°54' W., beginning new measurement.
	Asc. 25 ft. over E slope.
1.35	Top of spur, slopes N; desc. 20 ft. over W slope.
25.93	Unimproved dirt road, bears N and S.
40.20	The cor. of secs. 16, 17, 20, and 21.
	N. 0°09' W., bet. secs. 16 and 17.
	Over gentle rolling land, through scattering undergrowth.
2.75	S rim of draw, bears E and W; desc. 30 ft. over N slope.
6.75	Bottom of draw, drains E; asc. 24 ft. over S slope.
13.50	N rim of draw, bears E and W; thence over nearly level land.
19.20	Begin descent over N slope, 50 ft.
29.00	Base of descent, bears NW and SE; over nearly level land.
38.40	Saleratus Wash, 4 ft. deep, 30 lks. wide, drains NE.
40.09	Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, at proportionate distance, falls near edge of wash and is unsafe to establish a permanent monument; there is no remaining evidence of the original cor.
40.54	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 16 and 17.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	W C T 21 S R 15 E ↓ S 17 ↓ S 16 ↓ 1974
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
62.10	Wash, 1 ft. deep, 2.50 chs. wide, drains SW.
80.18	Point for the cor. of secs. 8, 9, 16, and 17, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 8 & S 9 \\ \hline S 17 & S 16 \\ \hline \end{array}$ </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	
	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>S. 89°52' W., bet. secs. 9 and 16.</p> <p>Over gentle rolling land, through scattering undergrowth.</p> <p>26.00 Wash, 6 ft. deep, 25 lks. wide, drains S. 30° E.</p> <p>33.00 Wash, 20 ft. deep, 1.50 chs. wide, drains S.</p> <p>40.19 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4} \frac{S 9}{S 16}$ </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>Asc. 10 ft. over SE slope.</p> <p>41.45 Top of clay spur, slopes S; desc. 25 ft. over gradual W slope.</p> <p>80.38 The cor. of secs. 8, 9, 16, and 17.</p>	
	<p>North, bet. secs. 8 and 9.</p> <p>Asc. 40 ft. over gradual S slope, through scattering undergrowth.</p> <p>8.00 Enter nearly level land.</p> <p>40.09 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 8 S 9 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>50.00 Wash, 20 ft. deep, 25 lks. wide, drains SE.</p> <p>80.18 The cor. of secs. 4, 5, 8, and 9, monumented with a pine stake, 36 ins. long, 3 ins. square, projecting 8 ins. above ground and faintly mkd.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> S 5 S 4 S 8 S 9 </p> <p style="text-align: center;">1974</p> <p>Reset the pine stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>
	<p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>S. 89°51' W., bet. secs. 4 and 9.</p> <p>Over gentle rolling land, through scattering undergrowth.</p> <p>9.70 Begin descent over SW slope, 28 ft.</p> <p>11.70 Enter nearly level land.</p> <p>21.25 Wash, 2 ft. deep, 20 lks. wide, drains S.</p> <p>23.50 Wash, 3 ft. deep, 30 lks. wide, drains S. 30° E.</p> <p>40.12 Point for the ¼ sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ — S 4 S 9 </p> <p style="text-align: center;">1974</p> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>


Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
52.04	Telegraph line, parallels railroad.
52.94	Denver and Rio Grande Western railroad, bears N. 42°26' W. and S. 42°26' E.
56.03	Right of way fence, parallels new highway.
58.97	Old Highway No. 50-6, parallels new highway.
61.12	Center line of U.S. Highway No. 50-6, bears N. 42°26' W. and S. 42°26' E.
64.19	Right of way fence, parallels highway.
73.47	Telephone line, bears N. 40°17' W. and S. 40°17' E.
80.24	The cor. of secs. 4, 5, 8, and 9.
N. 0°07' W., bet. secs. 4 and 5.	
Over nearly level land, through scattering undergrowth.	
7.95	Telephone line, bears N. 40°17' W. and S. 40°17' E.
17.74	Right of way fence, parallels highway.
21.11	Center line of U.S. Highway No. 50-6, bears N. 42°21' W. and S. 42°21' E.
25.74	Old Highway No. 50-6, parallels new highway.
26.75	Right of way fence, parallels highway.
29.78	Denver and Rio Grande Western railroad, bears N. 42°21' W. and S. 42°21' E.
30.15	Main line of Denver and Rio Grande Western railroad, bears N. 42°21' W. and S. 42°21' E.
31.13	Telegraph line, parallels railroad.
40.02	Point for the ¼ sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
T 21 S R 15 E	
$\begin{array}{c} \frac{1}{4} \\ \\ S\ 5 \quad \quad S\ 4 \\ \end{array}$	
1974	
From this point USC&GS BM A-39, bears S. 22°50' W., 8.40 chs. dist., a brass tablet, 3 ins. diam., seated in a concrete monument, 12 ins. square, projecting 4 ins. above ground, mkd. BM A-39+.	
Asc. 27 ft. over S slope.	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS


- 44.50 Top of low clay spur, projects SE; desc. 12 ft. over gradual N slope.
- 80.04 Point for the 80 1/16 sec. cor. of secs. 4 and 5, at proportionate distance, falls in the bottom of a wash, 6 ins. deep, 15 lks. wide, draining SE, and is unsafe to monument.
- 81.04 Point slected for the witness 80 1/16 sec. cor. of secs. 4 and 5.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

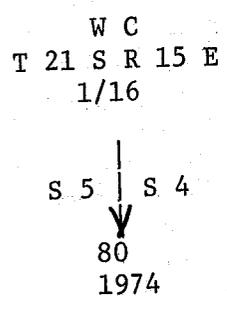

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

Asc. 23 ft. over SW slope.

- 83.00 Top of spur, slopes W; desc. 10 ft. over NW slope.
- 85.70 Same wash, drains SW.
- 88.10 Same wash, drains SE.
- 88.28 Power transmission line, bears N. 39°51' W. and S. 39°51' E.
- 90.66 Power line, bears N. 39°51' W. and S. 39°51' E.
- 120.06 Point for the 120 1/16 sec. cor. of secs. 4 and 5, at proportionate distance.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

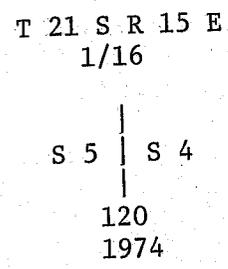

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

- 128.63 Intersect the Fourth Standard Parallel South, T. 20 S., R. 15 E., at the closing cor. of secs. 4 and 5, monumented with a sandstone, 20 x 8 x 8 ins., firmly set, projecting 10 ins. above ground and mkd. 4 notches on the E and 2 notches on the W edges.
At the corner point
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

T 20 S R 15 E

S 31

S 5 | S 4

C | C

T 21 S R 15 E

1974

Deposit the mkd. stone and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From this point the standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 20 S., R. 15 E. which now functions as an Angle Point heretofore described, bears East, 20.88 chs. dist.

The point for the $\frac{1}{4}$ sec. cor. of sec. 4 only, T. 21 S., R. 15 E., is at midpoint on the N. bdy. of sec. 4.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S 4
T 21 S R 15 E
1974

From this point the standard cor. of secs. 31 and 32, T. 20 S., R. 15 E., which now functions as an Angle Point heretofore described, bears N. $89^{\circ}43'$ E., 20.78 chs. dist.

From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., heretofore described.

N. $0^{\circ}05'$ W., bet. secs. 31 and 32.

Over nearly level land, through scattering undergrowth.

12.60 Wash, 8 ft. deep, 30 lks. wide, drains E.

40.19 The $\frac{1}{4}$ sec. cor. of secs. 31 and 32, monumented with a redwood stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. $\frac{1}{4}$ on the W face.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

$\frac{1}{4}$
S 31 | S 32

1974

Reset the redwood stake, inverted, alongside the iron post.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS					
	N. 0°11' W., beginning new measurement.				
14.65	Fivemile Wash, 4 ft. deep, 30 lks. wide, drains E.				
40.08	<p>The cor. of secs. 29, 30, 31, and 32, monumented with a redwood stake, 36 ins. long, 3 ins. square, projecting 24 ins. above ground and mkd. 5 notches on the E and 1 notch on the S edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 30</td> <td style="padding: 0 5px;">S 29</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 31</td> <td style="padding: 0 5px;">S 32</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Reset the redwood stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p>	S 30	S 29	S 31	S 32
S 30	S 29				
S 31	S 32				
40.11	<p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>S. 89°55' W., bet. secs. 29 and 32.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 29</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 32</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Continue over nearly level land.</p>	¼	S 29		S 32
¼	S 29				
	S 32				
80.22	<p>The cor. of secs. 29, 30, 31, and 32.</p> <p>S. 89°54' W., bet. secs. 30 and 31.</p> <p>Over nearly level land, through scattering undergrowth.</p>				
40.05	<p>Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
	<p>T 21 S R 15 E</p> <p>$\frac{1}{4}$ $\frac{S 30}{S 31}$</p> <p>1974</p>	
	Continue over nearly level land.	
54.30	Right of way fence, parallels highway.	
59.89	Center line of E bound lane of Interstate 70, bears N. 59°18' E. and curves SW.	
67.09	Center line of W bound lane of Interstate 70, bears N. 59°18' E. and curves SW.	
72.89	Right of way fence, parallels highway.	
82.32	Intersect the east boundary of sec. 36, T. 21 S., R. 14 E., at the closing cor. of secs. 30 and 31, monumented with a charred redwood stake, 24 ins. long, 3 ins. square, projecting 12 ins. above ground and mkd. S 30 on E face.	
	At the corner point	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p>T 21 S</p> <p>R 14 E R 15 E</p> <p> </p> <p>S 36 $\frac{S 30}{S 31}$ C</p> <p>1974</p>	
	Reset the redwood stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.	
	From this point the cor. of secs. 25 and 36, T. 21 S., R. 14 E., heretofore described, bears N. 0°18' E., 2.26 chs. dist.	
	The point for the ¼ sec. cor. of sec. 31 only, T. 21 S., R. 15 E., is at midpoint on the W. bdy. of sec. 31.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p> T 21 S</p> <p> R 15 E</p> <p> $\frac{1}{4}$</p> <p> S 31</p> <p>1974</p>	
	From this point the ¼ sec. cor. of sec. 36 only, T. 21 S., R. 14 E., heretofore described, bears N. 0°18' E., 2.96 chs. dist.	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah


CHAINS	
	From the cor. of secs. 29, 30, 31, and 32.
	N. 0°06' W., bet. secs. 29 and 30.
	Over nearly level land, through scattering undergrowth.
27.11	Right of way fence, parallels highway.
30.34	Center line of E bound lane of Interstate 70, bears N. 64°30' E. and S. 64°30' W.
34.56	Center line of W bound lane of Interstate 70, bears N. 64°30' E. and S. 64°30' W.
37.89	Right of way fence, parallels highway.
40.06	Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 30 S 29 1974 </p>
	Continue over nearly level land.
80.12	Point for the cor. of secs. 19, 20, 29, and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;"> <u>S 19 S 20</u> <u>S 30 S 29</u> 1974 </p>
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
	From the cor. of secs. 20, 21, 28, and 29.
	S. 89°43' W., bet. secs. 20 and 29.
	Over nearly level land, through scattering undergrowth.
16.70	Wash, 4 ft. deep, 20 lks. wide, drains SE.
29.60	Wash, 5 ft. deep, 70 lks. wide, drains SE.
40.13	The $\frac{1}{4}$ sec. cor. of secs. 20 and 29, monumented with a cottonwood stake, 18 ins. long, 3 ins. square, projecting 10 ins. above ground, and mkd. $\frac{1}{4}$ on W face.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS		
40.04	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;">¼ $\frac{S\ 20}{S\ 29}$</p> <p style="text-align: center;">1974</p> <p>Reset the cottonwood stake, inverted, alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°57' W., beginning new measurement.</p> <p>Continue over nearly level land.</p> <p>The cor. of secs. 19, 20, 29, and 30.</p>	
20.00	<p>N. 89°49' W., bet. secs. 19 and 30.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>Wash, 7 ft. deep, 1.00 ch. wide, drains NE.</p>	
40.02	<p>The ¼ sec. cor. of secs. 19 and 30, monumented with a cottonwood stake, 24 ins. long, 3 ins. square, projecting 10 ins. above ground and faintly mkd. ¼ on the N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <p style="text-align: center;">¼ $\frac{S\ 19}{S\ 30}$</p> <p style="text-align: center;">1974</p> <p>Reset the cottonwood stake, inverted, alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°34' W., beginning new measurement.</p> <p>Continue over nearly level land.</p>	
41.77	<p>Intersect the E. bdy. of sec. 25, T. 21 S., R. 14 E.</p> <p>Point for the closing cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

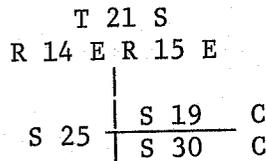


1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From this point the cor. of secs. 24 and 25, T. 21 S., R. 14 E., heretofore described, bears N. 0°18' E., 2.37 chs. dist.

The point for the ¼ sec. cor. of sec. 30 only, T. 21 S., R. 15 E., is at midpoint on the W. bdy. of sec. 30.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



1974

From this point the ¼ sec. cor. of sec. 25 only, T. 21 S., R. 14 E., heretofore described, bears S. 0°18' W., 0.41 chs. dist.

From the cor. of secs. 19, 20, 29, and 30.

N. 0°02' W., bet. secs. 19 and 20.


Over nearly level land, through scattering undergrowth.

12.50 Wash, 10 ft. deep, 50 lks. wide, drains E.

40.06 The ¼ sec. cor. of secs. 19 and 20, monumented with a redwood stake, 30 ins. long, 3 ins. square, projecting 10 ins. above ground and faintly mkd. ¼ on the W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



1974

Reset the redwood stake, inverted, alongside the iron post.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS						
	<p>N. 0°10' W., beginning new measurement.</p> <p>Continue over nearly level land.</p> <p>5.55 Gravel road, bears N. 75° W. and S. 75° E.</p> <p>40.23 The cor. of secs. 17, 18, 19, and 20, monumented with a redwood stake, 48 ins. long, 3 ins. square, projecting 24 ins. above ground, with faint scribe marks.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 18</td> <td style="padding: 0 5px;">S 17</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 19</td> <td style="padding: 0 5px;">S 20</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Reset the redwood stake, inverted, alongside the iron post.</p>	S 18	S 17	S 19	S 20	
S 18	S 17					
S 19	S 20					
	<p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>S. 89°56' W., bet. secs. 17 and 20.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>19.31 Power transmission line, bears N. 50°34' W. and S. 50°34' E.</p> <p>40.02 The ¼ sec. cor. of secs. 17 and 20, monumented with a redwood stake, 18 ins. long, 3 ins. square, projecting 10 ins. above ground with faint scribe marks.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 21 S R 15 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 17</td> <td style="padding: 0 5px;">S 20</td> </tr> </table> <p style="text-align: center;">1974</p> <p>Reset the redwood stake, inverted, alongside the iron post.</p> <p style="text-align: center;">_____</p> <p>S. 89°56' W., beginning new measurement.</p> <p>Continue over nearly level land.</p> <p>40.15 The cor. of secs. 17, 18, 19, and 20.</p>	¼ S 17	S 20			
¼ S 17	S 20					

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

S. 89°51' W., bet. secs. 18 and 19.

Over nearly level land, through scattering undergrowth.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 18 and 19, monumented with a cottonwood stake, 18 ins. long, 3 ins. square, projecting 8 ins. above ground with faint scribe marks.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

$\frac{1}{4}$ $\frac{S 18}{S 19}$

1974

Reset the cottonwood stake, inverted, alongside the iron post.

S. 89°56' W., beginning new measurement.

Continue over nearly level land.

40.37 Intersect the E. bdy. of sec. 24, T. 21 S., R. 14 E.

Point for the closing cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 14 E R 15 E
S 24 $\frac{S 18}{S 19}$ C

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.


From this point the cor. of secs. 13 and 24, T. 21 S., R. 14 E., heretofore described, bears N. 0°54' E., 3.34 chs. dist.

The point for the $\frac{1}{4}$ sec. cor. of sec. 19 only, T. 21 S., R. 15 E., is at midpoint on the W. bdy. of sec. 19.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS



From this point the 1/4 sec. cor. of sec. 24, T. 21 S., R. 14 E., heretofore described, bears N. 0°54' E., 2.83 chs. dist.

From the cor. of secs. 17, 18, 19, and 20.


N. 0°11' W., bet. secs. 17 and 18.

Over nearly level land, through scattering undergrowth.

40.05

Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

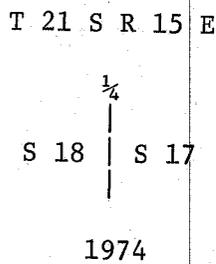

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

50.29

Power transmission line, bears N. 50°34' W. and S. 50°34' E.

63.65

Wash, 6 ft. deep, 50 lks. wide, drains E.


73.50

Unimproved dirt road, bears E and W.

80.10

Point for the cor. of secs. 7, 8, 17, and 18, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Set a steel fence post, 5 ft. long, projecting 3 ft. above the ground, alongside the iron post.

From the cor. of secs. 8, 9, 16, and 17.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
	N. 89°50' W., bet. secs. 8 and 17.
	Over nearly level land, through scattering undergrowth.
9.50	Saleratus Wash, 12 ins. deep, 25 lks. wide, in bottom of draw, drains S.
40.17	The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a rotted pine stake, 18 ins. long, 3 ins. square, projecting 8 ins. above ground with faint scribe marks.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ $\frac{S 8}{S 17}$
	1974
	Reset the pine stake, inverted, alongside the iron post.
	S. 89°41' W., beginning new measurement.
	Continue over nearly level land.
40.02	The cor. of secs. 7, 8, 17, and 18.
	S. 89°59' W., bet. secs. 7 and 18.
	Over gentle rolling land, through scattering undergrowth.
6.50	Base of hills, bears NW and SE; asc. 50 ft. over steep NE slope.
7.80	Top of spur, slopes N; along broken N slope.
35.05	Unimproved dirt road, bears N and S.
36.01	Power transmission line, bears N. 50°34' W. and S. 50°34' E.
39.60	Unimproved dirt road, bears NW and SW.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	$\frac{1}{4}$ $\frac{S 7}{S 18}$
	1974

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
46.15	Wash, 8 ft. deep, 20 lks. wide, drains SE.
79.72	<p>Intersect the east boundary of sec. 13, T. 21 S., R. 14 E., at the closing cor. of secs. 7 and 18, monumented with a sandstone, 14 x 12 x 6 ins., firmly set, projecting 6 ins. above ground and mkd. 4 notches on the S and 2 notches on the N edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 21 S R 14 E R 15 E S 13 S 7 C S 18 C</p> <p>1974</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p> <p>From this point the cor. of secs. 12 and 13, T. 21 S., R. 14 E., heretofore described, bears N. 0°17' E., 3.94 chs. dist.</p>
	<p>The point for the ¼ sec. cor. of sec. 18 only, T. 21 S., R. 15 E., is at midpoint on the W. bdy. of sec. 18.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 21 S R 15 E ¼ S 18</p> <p>1974</p> </div> <p>Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.</p> <p>From this point the ¼ sec. cor. of sec. 13 only, T. 21 S., R. 14 E., heretofore described, bears N. 0°17' E., 3.65 chs. dist.</p>
	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>North, bet. secs. 7 and 8.</p> <p>Over nearly level land, through scattering undergrowth.</p>
14.70	Saleratus Wash, 6 ft. deep, 1.00 ch. wide, drains E.
40.05	<p>Point for the ¼ sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

T 21 S R 15 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 7 \quad | \quad \text{S } 8 \\ | \end{array}$$

1974

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of iron post.

47.00 Wash, 4 ft. deep, 15 lks. wide, drains E.

74.20 Middle of wide, shallow wash, drains SE.

80.10 Point for the cor. of secs. 5, 6, 7, and 8, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

$$\begin{array}{c} \text{S } 6 \quad | \quad \text{S } 5 \\ \text{S } 7 \quad | \quad \text{S } 8 \end{array}$$

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From the cor. of secs. 4, 5, 8, and 9.

S. 89°51' W., bet. secs. 5 and 8.

Over nearly level land, through scattering undergrowth.

14.95 Wash, 10 ft. deep, 20 lks. wide, drains SE.

36.00 Wash, 4 ft. deep, 20 lks. wide, drains SE.

40.07 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S R 15 E

$$\frac{1}{4} \frac{\text{S } 5}{\text{S } 8}$$

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above the ground, alongside the iron post.

48.10 Begin ascent over E slope, 25 ft.

54.60 Rim of wide hollow, bears NW and SE; desc. 45 ft. over SW slope.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
73.60	Wash, 6 ft. deep, 30 lks. wide, drains S. 20° W.
80.14	The cor. of secs. 5, 6, 7, and 8.
	West, bet. secs. 6 and 7.
8.00	Over nearly level land, through scattering undergrowth. Leave undergrowth.
16.00	Wash, 4 ft. deep, 25 lks. wide, drains SE.
40.04	Point for the ¼ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S R 15 E
	¼ $\frac{S 6}{S 7}$
	1974
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
53.55	Wash, 4 ft. deep, 20 lks. wide, drains NE; asc. 42 ft. over NE slope.
57.55	W rim of hollow, bears NW and SE; thence over gentle rolling land.
79.08	Intersect the E. bdy. of sec. 12, T. 21 S., R. 14 E.
	Point for the closing cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 21 S
	R 14 E R 15 E
	S 12 $\frac{S 6}{S 7}$ C
	1974
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
	From this point the cor. of secs. 1 and 12, T. 21 S., R. 14 E., heretofore described, bears N. 0°22' E., 3.56 chs. dist.
	The point for the ¼ sec. cor. of sec. 7 only, T. 21 S., R. 15 E., is at midpoint on the W. bdy. of sec. 7.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E
|
| $\frac{1}{4}$
|
| S 7
|
1974

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, E of cor.

From this point the $\frac{1}{4}$ sec. cor. of sec. 12 only, T. 21 S., R. 14 E., heretofore described, bears N. $0^{\circ}34'$ E., 4.18 chs. dist.

From this same point USC&GS BM D39 bears S. $61^{\circ}45'$ E., 22.41 chs. dist., a brass tablet, 3 ins. diam., seated in a concrete monument, 12 ins. square, projecting 6 ins. above ground, mkd. BM D-39+.

The point for the $\frac{1}{4}$ sec. cor. of sec. 6 only, T. 21 S., R. 15 E., is at proportionate distance on the W. bdy. of sec. 6.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 21 S
R 15 E
|
| $\frac{1}{4}$
|
| S 6
|
1974

Set a pine post, 24 ins. long, 4 in. square, projecting 12 ins. above ground, alongside the iron post.

From this point the $\frac{1}{4}$ sec. cor. of sec. 1 only, T. 21 S., R. 14 E., heretofore described, bears N. $0^{\circ}19'$ E., 4.66 chs. dist.

The point for the $80 \frac{1}{16}$ sec. cor. of sec. 6 only, T. 21 S., R. 15 E., is at proportionate distance on the W. bdy. of sec. 6.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

| T 21 S
| R 15 E
| 1/16
| S 6
| 80

1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

From this point the 80 1/16 sec. cor. of sec. 1,
T. 21 S., R. 14 E., heretofore described, bears
N. 0°26' E., 4.94 chs. dist.

The point for the 120 1/16 sec. cor. of sec. 6 only,
T. 21 S., R. 15 E., is at proportionate distance on the
W bdy. of sec. 6.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 21 S
|
R 15 E
|
1/16
|
S 6
|
120
1974

Set a steel fence post, 5 ft. long, projecting 3 ft.
above ground, alongside the iron post.

From this point the 120 1/16 sec. cor. of sec. 1,
T. 21 S., R. 14 E., heretofore described, bears
N. 0°23' E. 5.22 chs. dist.

From the cor. of secs. 5, 6, 7, and 8.

N. 0°03' E., bet. secs. 5 and 6.

Over nearly level land, through scattering undergrowth.

11.55 Lost Spring Wash, 7 ft. deep, 60 lks. wide, drains SE.

31.30 Same wash, drains SW.

40.05 Point for the ¼ sec. cor. of secs. 5 and 6, at propor-
tionate distance, falls near edge of wash and is unsafe
to establish a permanent monument; there is no remaining
evidence of the original cor.

40.65 Lost Spring Wash, 6 ft. deep, 1.00 ch. wide, drains SE.

41.46 Point selected for the witness ¼ sec. cor. of secs. 5
and 6.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

W C
T 21 S R 15 E

¼
|
S 6 | S 5
↓

1974

Set a steel fence post, 5 ft. long, projecting 3 ft.
above ground, alongside the iron post.

48.20 Begin ascent, over steep SW slope, 62 ft.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS	
53.00	Rim of ascent, bears NW and SE; over nearly level land.
79.70	Improved dirt road, bears NE and SW.
80.10	Point for the 80 1/16 sec. cor. of secs. 5 and 6, at proportionate distance.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E 1/16</p> <p style="text-align: center;">S 6 S 5 80 1974</p>
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
90.40	Power line, bears N. 62°48' E. and S. 62°48' W.
102.37	Telephone line, bears N. 40°17' W. and S. 40°17' E.
110.66	Right of way fence parallels highway.
114.91	Center line of U.S. Highway No. 50-6, on a curves bears N. 28° W. and S. 32° E.
116.46	Right of way fence parallels highway.
120.15	Point for the 120 1/16 sec. cor. of secs. 5 and 6.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 21 S R 15 E 1/16</p> <p style="text-align: center;">S 6 S 5 120 1974</p>
	Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.
122.05	Denver and Rio Grande Western railroad, bears N. 25°22' W. and S. 25°22' E.
123.46	Telegraph line, bears N. 25°22' W. and S. 25°22' E.
130.90	Intersect the Fourth Standard Parallel South, T. 20 S., R. 14 E., at the closing cor. of secs. 5 and 6, T. 21 S., R. 15 E., monumented with a pine post, 18 ins. long, 3 ins. square, projecting 6 ins. above ground and dimly mkd. CC on S face.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

T 20 S R 14 E

S 36

S 6 | S 5
C | C
T 21 S R 15 E
1974

Reset the pine stake, inverted, and set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.


From this point the standard cor. of secs. 35 and 36, T. 20 S., R. 14 E., monumented with an iron post, 3 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the South Boundary of T. 20 S., R. 14 E., bears N. 89°55' W., 23.35 chs. dist.

From this same point the standard ¼ sec. cor. of sec. 36, T. 20 S., R. 14 E., monumented with an iron post, 1 in. diam., projecting 16 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement of the Fourth Standard Parallel South on the South Boundary of T. 20 S., R. 14 E., bears S. 89°55' E., 16.74 chs. dist.

True point for the ¼ sec. cor. of sec. 5 only, T. 21 S., R. 15 E., is at midpoint on the N. bdy. of sec. 5, falls in the bottom of a wash, 12 ins. deep, 10 lks. wide, draining N. 75° W. from NE, and is unsafe to monument.

Point selected for the witness cor. to the ¼ sec. cor. of sec. 5, is West, 0.24 chs. dist. from true point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



T 21 S R 15 E
1974

Set a steel fence post, 5 ft. long, projecting 3 ft. above ground, alongside the iron post.

From the true cor. point the standard ¼ sec. cor. of sec. 36, T. 20 S., R. 14 E., heretofore described, bears West, 23.14 chs. dist.

From this same point the standard SE cor. of T. 20 S., R. 14 E., identical with U.S.G.S. triangulation station SEC COR 36/20S/14E, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1912 retracement and resurvey of the Fourth Standard Parallel South, through R. 14 E., bears East, 16.82 chs. dist.

The point for the ¼ sec. cor. of sec. 6 only, T. 21 S., R. 15 E., is at proportionate distance on the N. bdy. of sec. 6.

Dependent Resurvey of the Subdivisional Lines of
T. 21 S., R. 15 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S 6
 T 21 S R 15 E
 1974

From this point the standard cor. of secs. 35 and 36, T. 20 S., R. 14 E., heretofore described, bears S. 89°53' E., 16.67 chs. dist.

From this same point, the standard $\frac{1}{4}$ sec. cor. of sec. 35, T. 20 S., R. 14 E., heretofore described, bears N. 89°53' W., 23.29 chs. dist.

From this same point USC&GS "Saleratus", bears N. 79°13' E., 26.13 chs. dist., a brass tablet, 3 ins. diam., seated in a concrete monument, 12 ins. square, projecting 6 ins. above ground.

General Description

The land encompassed in this survey is located about three miles west of the town of Green River. The township is drained by Saleratus Wash, the drainage being to the east through the center of the township, with some smaller washes draining in a southeasterly direction. Elevation ranges from about 4,200 feet above sea level to about 4,400 feet above sea level in the northern portion of the township.

Access is by way of Interstate 70 which crosses the township in a southwesterly direction and U.S. Highway No. 50-6 which enters the township on the north boundary of section 6 and bears southeasterly to the interchange of Interstate 70 in section 14. There are some unimproved or lightly gravelled roads serving other portions of the township. The Denver and Rio Grande Western railroad parallels old U.S. Highway No. 50-6 and leaves the township through the east boundary of section 12.

The undergrowth consists of scattered shadscale and sparsely scattered sagebrush with some cottonwoods and tamarack along the bottom of Saleratus Wash.

The only improvements noted was the construction of Interstate 70.

The mean of a number of observations of the magnetic declination throughout the township is 14°30' E.

321

321

84

CHAINS

323

CERTIFICATE OF SURVEY

(I) (W)X Jerry L. Thomas, Supervisory Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of January, 1974, (I) (W)X have dependently resurveyed the Fourth Standard Parallel South, along the west 4 1/2 miles of the South Boundary of T. 20 S., R. 15 E., and dependently resurveyed the Green River Guide Meridian, west boundary of T. 21 S., R. 16 E., the east boundary of T. 21 S., R. 14 E., and the south boundary and subdivisional lines of T. 21 S., R. 15 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (W)X and under (my) (W)X direction, and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 4, 1978

(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.
Denver, Colorado

The foregoing field notes of the dependent resurvey of the Fourth Standard Parallel South, along the west 4 1/2 miles of the South Boundary of T. 20 S., R. 15 E., and the dependent resurvey of the Green River Guide Meridian, west boundary of T. 21 S., R. 16 E., the east boundary of T. 21 S., R. 14 E., and the south boundary and subdivisional lines of T. 21 S., R. 15 E., of the Salt Lake Meridian, in the state of Utah,

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAY 28 1980

(Date)

Allen Arnold
(Chief, Division of Cadastral Survey)

Acting Chief, Cadastral Survey Examination and Approval Staff

~~CERTIFICATE OF TRANSCRIPT~~

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

RETRACEMENT OF THE UTAH-WYOMING STATE

BOUNDARY BETWEEN MILE POSTS 38 AND 45

AND THE DEPENDENT RESURVEY OF

THE NORTH AND SOUTH BOUNDARIES AND

THE SUBDIVISIONAL LINES OF

TOWNSHIP 10 NORTH, RANGE 8 EAST

Multiple horizontal lines for notes, currently blank.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Milton R. Workman Supervisory Cadastral Surveyor

Under special instructions dated June 10, 19 70, which provided for the surveys
included under Group Number 523, approved June 11, 1970,
and assignment instructions dated July 17, 19 70.

Survey commenced August 14, 19 70

Survey completed July 25, 19 71

INDEX DIAGRAM

Township 10 North, Range 8 East
 6 7 8

6 18	19 5	31 44M	3	2	1
7 16	29 17 8	30 4 28 43M	10	11	12
18 15	27 15 17	28 4 26 16 42M	15	14	13
19 13	25 14 20	26 3 24 21 41M	22	23	24
30 11	23 12 29	23 3 22 28 40M	27	26	25
31 8	20 10 32	21 2 19 33 39M 10 1	34	35	36

Township 10 North, Range 8 East

CHAINS.

T. 10 N., R. 8 E.History of SurveysSurveyed by Retr. or Resurveyed byNORTH BOUNDARY

A. P. Hanson 1896

SOUTH BOUNDARY

A. P. Hanson 1896

EAST BOUNDARY - Utah-Wyoming State Boundary

Mile Posts

38 to 45

A. V. Richards 1874

A. P. Hanson 1896

WEST BOUNDARY

A. P. Hanson 1896

SUBDIVISION

A. P. Hanson 1896

The following field notes are those of the retracement of the Utah-Wyoming State boundary between mile posts 38 and 45, and the dependent resurvey of the north boundary, the south boundary and the subdivisional lines of Township 10 North, Range 8 East. The resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group 523, Utah, dated June 10, 1970.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey. The distances were determined by chaining where possible; otherwise by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the township is at Latitude $41^{\circ} 33' 17''$ N. and Longitude $111^{\circ} 02' 42''$ W., as determined through section line ties from U.S.G.S. triangulation station "1-58X", (Unadj.), which is at Latitude $41^{\circ} 36' 39.5''$ N. and Longitude $111^{\circ} 04' 16.1''$ W., located N. $0^{\circ} 17' E.$; 27.79 chs. dist. from the $\frac{1}{2}$ sec. cor. of secs. 17 and 18, T. 10 N., R. 8 E.

The magnetic declination was read at a number of stations throughout the survey and the average of these readings was found to be $16^{\circ} 30' E.$

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

Note: Temporary unmarked wooden posts are set at pro-

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

CHAINS	<p>portionate distance for those mile posts missing, for the purpose of determining the terminus of lines surveyed against the State boundary, in accordance with the special instructions.</p> <hr/> <p>Reestablishment of the Retracement Executed by A. P. Hanson in 1896</p> <hr/> <p>The 38 mile post, monumented with a small mound of earth and stone, with the remains of the old cottonwood post in the ground under the mound of stone.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">38 M Utah Wyo 1971</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.</p> <p>From the 38 mile post.</p> <p>N. 0° 09' W., on the 39th mile.</p> <p>Over gently rolling land, through dense sagebrush.</p> <p>31.02 The closing cor. of the Wyoming survey for secs. 12 and 13, T. 18 N., R. 121 W., 6th Principal Meridian, bears West, 5½ lks. dist., monumented with an iron post, 2 ins. in diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R121W C S12 C S13 1909</p> <p>39.60 Power line, bears N. 71° 20' E. and S. 71° 20' W.</p> <p>41.25 Trail road, under power line, bears N. 71° 20' E. and S. 71° 20' W.</p> <p>74.10 Wash, drains West.</p> <p>80.02 Point for the 39th mile post, at proportionate distance; there is no remaining evidence of the original corner. Not monumented.</p> <hr/> <p>N. 0° 09' W., on the 40th mile.</p> <p>Over gently rolling land, through dense sagebrush.</p> <p>20.20 Wash, drains West.</p> <p>30.50 Trail road, bears SW. and E.</p> <p>30.82 The closing cor. of the Wyoming survey for secs. 1 and 12, T. 18 N., R. 121 W., 6th Principal Meridian, bears East, 12 lks. dist., monumented with an iron post, 2 ins.</p>
--------	---

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

CHAINS						
	diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.					
	<table border="0"> <tr><td>T18N R121W</td></tr> <tr><td>C S1</td></tr> <tr><td>C S12</td></tr> <tr><td>1909</td></tr> </table>	T18N R121W	C S1	C S12	1909	
T18N R121W						
C S1						
C S12						
1909						
45.50	Wash, drains S. 75° W.					
62.50	Wash, drains S. 70° W.					
79.98	The 40th mile post, monumented with a small mound of earth and stone, with the remains of the old juniper post in the ground under the mound of stone.					
	At the cor. point					
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.					
	<table border="0"> <tr><td>40M</td></tr> <tr><td>Utah-Wyo</td></tr> <tr><td>1971</td></tr> </table>	40M	Utah-Wyo	1971		
40M						
Utah-Wyo						
1971						
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.					
	N. 0° 05' E., on the 41st mile.					
	Over gently rolling land, through dense sagebrush.					
13.50	Wash, drains West.					
26.70	Trail road, bears N. 80° E. and S. 80° W.					
29.10	Wash, 15 lks. wide, 10 ft. deep, drains S. 80° W.					
30.92	Intersect the closing cor. of the Wyoming survey for secs. 1 and 36, Tps. 18 and 19 N., R. 121 W., 6th Principal Meridian, monumented with an iron post, 3 ins. diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.					
	<table border="0"> <tr><td>T19N</td></tr> <tr><td>C S36 R121W</td></tr> <tr><td>C S1</td></tr> <tr><td>T18N</td></tr> <tr><td>1900</td></tr> </table>	T19N	C S36 R121W	C S1	T18N	1900
T19N						
C S36 R121W						
C S1						
T18N						
1900						
62.60	Wash, drains N. 80° W.					
79.32	The 41st mile post, at proportionate distance; there is no remaining evidence of the original cor. Not monumented.					
	N. 0° 20' W., on the 42nd mile.					
	Over gently rolling land, through dense sagebrush.					
20.30	Cottonwood Creek, 10 lks. wide, 3 ft. deep, drains irregularly S. 15° W.					
31.71	The closing cor. of the Wyoming survey for secs. 25 and 36, T. 19 N., R. 121 W., 6th Principal Meridian, bears East, 26 lks. dist., monumented with an iron post, 2 ins.					

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

CHAINS	diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.
	<div style="text-align: right; border: 1px solid black; padding: 2px;"> T19N R121W C S25 C S36 1909 </div>
45.70	Trail road, bears N. 15° E. and S. 15° W.
51.70	Same trail road, bears N. 15° W. and S. 15° E.
80.04	The 42nd mile post, at proportionate distance; there is no remaining evidence of the original cor. Not monumented.
	N. 0° 20' W., on the 43rd mile. Over gently rolling land, through dense sagebrush.
10.15	Trail road, bears N. 30° E. and S. 15° W., on a curve.
24.20	Same trail road, bears S. 40° E. and N. 40° W. curving to SW.
31.79	Intersect the closing cor. of the Wyoming survey for 24 and 25, T. 19 N., R. 121 W., monumented with an iron post, 2 ins. diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.
	<div style="text-align: right; border: 1px solid black; padding: 2px;"> T19N R121W C S24 C S25 1909 </div>
36.00	Trail road, bears N. 30° W.
59.00	Wash, drains SE.
63.50	Wash, drains N. 60° E.
76.00	Wash, drains NE.
79.05	Trail road, bears E. and W.; enter rolling hills.
80.04	The 43rd mile post, monumented with a small mound of earth and stone, with the remains of the old juniper post in the mound under a mound of stone. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> 43M Utah Wyo 1971 </div>
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	N. 0° 18' W., on the 44th mile. Over rolling hills, through dense sagebrush.

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

CHAINS					
8.55	Wash, 30 lks. wide, 6 ft. deep, drains E.				
24.00	Jeep trail, bears N. 50° E. and S. 50° W.				
30.20	Trail road, on top of long spur, bears E. and W.				
31.44	The closing cor. of the Wyoming survey for secs. 13 and 24, T. 19 N., R. 121 W., bears East, 9 lks. dist., monumented with an iron post, 2 ins. diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.				
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr><td style="border-left: 1px solid black; padding-left: 5px;">T19N R121W</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">C S13</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">C S24</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">1909</td></tr> </table>	T19N R121W	C S13	C S24	1909
T19N R121W					
C S13					
C S24					
1909					
37.20	Wash, 20 lks. wide, 6 ft. deep, drains E.				
62.80	Spur, slopes E.				
70.40	Wash, drains N. 75° E.				
73.60	Wash, drains E.				
80.16	The 44th mile post, at proportionate distance; there is no remaining evidence of the original cor. Not monumented.				
	N. 0° 25' E., on the 45th mile. Over rolling hills, through dense sagebrush.				
9.85	Wash, 20 lks. wide, 3 ft. deep, drains E.				
31.50	The closing cor. of the Wyoming survey for secs. 12 and 13, T. 19 S., R. 121 W., bears West 33 lks. dist., monumented with an iron post, 2 ins. diam., firmly set and protruding 12 ins. above ground, with brass cap mkd.				
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr><td style="border-left: 1px solid black; padding-left: 5px;">T19N R121W</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">C S12</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">C S13</td></tr> <tr><td style="border-left: 1px solid black; padding-left: 5px;">1909</td></tr> </table>	T19N R121W	C S12	C S13	1909
T19N R121W					
C S12					
C S13					
1909					
34.85	Wash, 10 lks. wide, 2 ft. deep, drains N. 80° E. Enter scattered timber.				
50.65	Wash, 20 lks. wide, 3 ft. deep, drains E.				
58.50	Trail road, bears N. 55° W. curving to E.				
79.88	The 45th mile post, monumented with a juniper post, the bottom portion firmly set in the ground, the top portion lying on top of ground with illegible scribe marks.				
	At the cor. point Set an iron post; 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				

Retracement of the Utah-Wyoming State
Boundary between Mile Posts 38 and 45

CHAINS

45M
Utah|Wyo
1971

Set original cor. post alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Dependant Resurvey of the North Boundary
Township 10 North, Range 8 East

Reestablishment of the Survey Executed by
A. P. Hanson in 1896

From the cor. of Tps. 10 and 11 N., Rs. 7 and 8 E., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under this same group.

S. 89° 59' E., bet. secs. 6 and 31.

Over rolling hills, through scattered timber and dense sagebrush.

22.50 Draw, drains S. 65° E.

36.50 Trail road, bears N. and S.

40.36 The ¼ sec. cor. of secs. 6 and 31, monumented with a limestone, 18x10x8 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R8E

¼ S31
S6

T10N R8E

1971

Deposit original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

No suitable bearing trees available.

N. 89° 42' E., beginning new measurement.

23.25 Ridge, bears N. 11° E. and S. 11° W.

30.25 Draw, drains S. 7° W.

38.45 Ridge, bears N. and S.

Dependent Resurvey of the North Boundary
Township 10 North, Range 8 East

CHAINS
39.96

The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 15x8x6 ins., firmly set and plainly mkd. 1 notch on W. and 5 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R8E
S31 | S32
S6 | S5
T10N R8E

1971

Deposit the original cor. stone alongside the iron post.

No suitable bearing trees available.

N. 89° 27' E., bet. secs. 5 and 32.

Over rolling hills, through scattered timber and dense sagebrush.

16.30 Draw, drains irregularly S. 20° E.

20.00 Spur, slopes S.

40.10 The ¼ sec. cor. of secs. 5 and 32, monumented with a sandstone, 22x15x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R8E
¼ S32
S5

T10N R8E
1971

Deposit the original cor. stone alongside the iron post.

No suitable bearing trees available.

S. 89° 25' E., beginning new measurement.

40.42 The cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 18x12x6 ins., firmly set and plainly mkd. 2 notches on W. and 4 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the North Boundary
Township 10 North, Range 8 East

CHAINS

T11N R8E
S32 | S33
S5 | S4
T10N R8E
1971

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

N. 89° 56' E., bet. secs. 4 and 33.

Over rolling hills, through scattered timber and dense sagebrush.

26.98 Intersect the Utah-Wyoming State Boundary.

The closing cor. of secs. 4 and 33, monumented with a sandstone, 14x12x6 ins., firmly set and plainly mkd. CC on W. face and 6 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N |
R8E |
C S33 | Wyo
C S4 |
T10N |
1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

From the above CC, the 45th mile post, bears N. 0° 25' E., 17.32 chs. dist.

Dependent Resurvey of the South Boundary
Township 10 North, Range 8 East

From the cor. of Tps. 9 and 10 N., Rs. 7 and 8 E., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 9 N., R. 7 E., surveyed by Glen B. Hatch in 1970 under Group 519, Utah.

S. 87° 41' E., bet. secs. 6 and 31.

Dependent Resurvey of the South Boundary
Township 10 North, Range 8 East

CHAINS	
	Over gently rolling land, through dense sagebrush.
3.00	Trail road, bears N. 50° W. and S. 50° E.
6.00	Small draw, drains irregularly S.
23.20	Trail road, bears N. 30° E. and S. 30° W.
41.12	Point for the ¼ sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E $\frac{1}{4} \frac{S31}{S6}$ T9N 1970
	No accessories available.
81.00	Wash, drains S.
82.24	The cor. of secs. 5, 6, 31 and 32, monumented with a limestone, 12x7x6 ins., firmly set and plainly mkd. 5 notches on the E. and 1 notch on W. edges.
	At the cor. point
	set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E $\frac{S31 S32}{S6 S5}$ T9N 1970
	Deposit the original cor. stone alongside the iron post.
	No accessories available.
	N. 89° 19' E., bet. secs. 5 and 32.
	Over gently rolling land, through dense sagebrush.
11.40	Wash, 20 lks. wide, 2 ft. deep, drains irregularly S.
12.30	Cottonwood Creek, 30 lks. wide, 2 ft. deep, drains irregularly S.
17.75	Wash, 30 lks. wide, 5 ft. deep, drains irregularly S.
41.09	Point for the ¼ sec. cor. of secs. 5 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the South Boundary,
Township 10 North, Range 8 East

CHAINS

T10N R8E

	<u>S32</u>
1/4	S5

T9N
1970

No accessories available.

69.70 Small draw, drains S. 65° W.

82.18 The cor. of secs. 4, 5, 32 and 33, monumented with a cottonwood stake set in a mound of stone. This position is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E

<u>S32</u>	<u>S33</u>
S5	S4

T9N
1970

Set wood stake alongside the iron post.

N. 85° 44' E., bet. secs. 4 and 33.

Over gently rolling land, through dense sagebrush.

24.44 Intersect the Utah-Wyoming State boundary.

Point for the closing cor. of secs. 4 and 33, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N

R8E

C	<u>S33</u>	Wyo
C	S4	

T9N

1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

From the above closing cor., the 39th mile post, bears N. 0° 09' W., 26.74 chs. dist.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	N. 1° 37' W., bet. secs. 31 and 32.
	Over gently rolling land, through dense sagebrush.
41.79	Point for the $\frac{1}{2}$ sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R8E $\frac{1}{2}$ S31 S32 1971</p>
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
42.00	Wash, drains E.
43.00	Trail road, bears NE. and SW.
46.40	Wash, drains S. 60° E.
61.50	Wash, drains S. 40° E.
73.00	Wash, drains NE.
83.58	The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 12x10x10 ins., firmly set and plainly mkd. 1 notch on S. and 5 notches on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R8E S30 S29 S31 S32 1971</p>
	Deposit the original cor. stone alongside iron post.
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	From the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under this same group.
	N. 89° 57' E., bet. secs. 30 and 31.
	Over gently rolling land, through dense sagebrush.
27.20	Wash, 20 lks. wide, 3 ft. deep, drains S. 85° E.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
40.08	<p>The $\frac{1}{2}$ sec. cor. of secs. 30 and 31, monumented with a granite stone, 18x18x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E $\frac{1}{2}$ $\frac{S30}{S31}$ 1971</p> <p>Deposit the original cor. stone alongside iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.</p>
31.35	<p>N. $89^{\circ} 53'$ E., beginning new measurement.</p> <p>Trail road, bears N. and S.</p>
39.98	<p>The cor. of secs. 29, 30, 31 and 32.</p>
2.60	<p>N. $0^{\circ} 01'$ W., bet. secs. 29 and 30.</p>
	<p>Over nearly level land, through dense sagebrush.</p>
21.00	<p>Wash, drains S. 70° E.</p>
32.70	<p>Fork of two wash tributaries draining N. 80° E. and S. 60° E.</p>
32.90	<p>Trail road, bears E. and W.</p>
40.38	<p>Wash, draining S. 75° E.</p> <p>The $\frac{1}{2}$ sec. cor. of secs. 29 and 30, determined by a mound of stone; this position is harmoniously related to existing original corners, and is accepted as the best evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E $\frac{1}{2}$ S30 S29 1971</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS									
	N. 0° 35' E., beginning new measurement.								
3.00	Wash, drains S. 70° E.								
17.80	Wash, drains S. 75° E.								
22.20	Trail road, bears N. 10° E. and S. 10° W.								
38.00	Wash, drains S. 85° E.								
40.14	The cor. of secs. 19, 20, 29 and 30, monumented with a quartzite stone, 12x10x8 ins., firmly set and plainly mkd. 2 notches on S. and 5 notches on E. edges.								
	At the cor. point								
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T10N R8E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S19</td><td style="padding-left: 5px;">S20</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S30</td><td style="padding-left: 5px;">s29</td></tr> <tr><td colspan="2" style="text-align: center;">1971</td></tr> </table>	T10N R8E		S19	S20	S30	s29	1971	
T10N R8E									
S19	S20								
S30	s29								
1971									
	Deposit the original cor. stone alongside the iron post.								
	From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under this same group.								
	N. 89° 40' E., bet. secs. 19 and 30.								
	Over gently rolling land, through dense sagebrush.								
40.34	The ¼ sec. cor. of secs. 19 and 30, monumented with a flintstone, 14x6x6 ins., firmly set and plainly mkd. ¼ on N. face.								
	At the cor. point								
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T10N R8E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">¼ S19</td><td style="padding-left: 5px;">S30</td></tr> <tr><td colspan="2" style="text-align: center;">1971</td></tr> </table>	T10N R8E		¼ S19	S30	1971			
T10N R8E									
¼ S19	S30								
1971									
	Deposit the original cor. stone alongside the iron post.								
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.								
	Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.								
	N. 89° 54' E., beginning new measurement.								

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
8.00	Wash, drains S. 50° E.
18.25	Small wash, drains S. 45° E.
38.75	Small wash, drains S. 10° E.
40.22	The cor. of secs. 19, 20, 29 and 30.
	N. 0° 05' E., bet. secs. 19 and 20.
	Over gently rolling land, through dense sagebrush.
2.30	Trail road, bears N. 13° W. and S. 30° E.
21.90	Wash, 20 lks. wide, 2 ft. deep, drains irregularly S. 45° E.
40.22	The ½ sec. cor. of secs. 19 and 20, monumented with a quartzite stone, 18x12x10 ins., firmly set and plainly mkd. ½ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E
	½
	S19 S20
	1971
	Deposit the original cor. stone alongside the iron post.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	N. 0° 09' E., beginning new measurement.
36.60	Trail road, bears N. 31° E. and S. 31° W.
40.20	The cor. of secs. 17, 18, 19 and 20, monumented with a quartzite stone, 18x12x8 ins., firmly set and plainly mkd. 3 notches on S. and 5 notches on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E
	S18 S17
	S19 S20
	1971
	Deposit the original cor. stone alongside iron post.
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	<p>From the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under this same group.</p>
	<p>N. 89° 22' E., bet. secs. 18 and 19.</p>
31.50	<p>Jeep trail, bears S. 55° E. and N. 55° W.</p>
	<p>Over gently rolling land, through dense sagebrush.</p>
40.00	<p>Trail road, bears N. and S.</p>
40.26	<p>The ¼ sec. cor. of secs. 18 and 19, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. ¼ on N. face.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T10N R8E $\frac{1}{4} \frac{S18}{S19}$ 1971</p>
	<p>Deposit the original cor. stone alongside iron post.</p>
	<p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p>
	<p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.</p>
	<hr/> <p>East, beginning new measurement.</p>
0.50	<p>Wash, drains S. 25° E.</p>
3.95	<p>Wash, 20 lks. wide, 6 ft. deep, drains S. 10° E.</p>
13.05	<p>Spur, slopes S.</p>
20.15	<p>Wash, 20 lks. wide, 6 ft. deep, drains irregularly S.</p>
40.06	<p>The cor. of secs. 17, 18, 19 and 20.</p>
	<p>N. 0° 01' E., bet. secs. 17 and 18.</p>
	<p>Over gently rolling land, through dense sagebrush.</p>
37.00	<p>Trail road, bears N. 70° E. and S. 70° W.</p>
40.10	<p>The ¼ sec. cor. of secs. 17 and 18, monumented with a quartzite stone, 15x12x8 ins., firmly set and plainly mkd. ¼ on W. face.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS		
	<p style="text-align: center;">T10N R8E $\frac{1}{2}$ S18 S17 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <p>From the above $\frac{1}{2}$ sec. cor., U.S.G.S. triangulation station "1-58X", (Unadj.) bears N. $0^{\circ} 17'$ E., 27.79 chs. dist., monumented with a $\frac{1}{2}$ in. reinforcing bar driven into the ground, protruding 6 ins. above ground.</p> <hr/> <p>N. $0^{\circ} 07'$ E., beginning new measurement.</p>	
21.75	Trail road, bears N. 29° W. and S. 29° E.	
39.88	<p>The cor. of secs. 7, 8, 17 and 18, monumented with a granite stone, 18x9x9 ins., firmly set and plainly mkd. 4 notches on S. and 5 notches on E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E $\frac{1}{2}$ S7 S8 S18 S17 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>	
11.40	<p>From the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under this same group.</p> <p>S. $89^{\circ} 42'$ E., bet. secs. 7 and 18.</p> <p>Over gently rolling land, through dense sagebrush.</p> <p>Jeep trail, bears S. 55° E. and N. 55° W.</p>	

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
15.75	Jeep trail, bears N. 60° E. and S. 60° W.
16.25	Trail road, bears SE. on a curve to the N.
40.40	The ¼ sec. cor. of secs. 7 and 18, monumented with a granite stone, 18x12x2 ins., firmly set and plainly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E ¼ $\frac{S7}{S18}$ 1971
	Deposit the original cor. stone alongside the iron post.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
	<hr/> N. 89° 27' E., beginning new measurement.
3.50	Small wash, drains S. 45° E.
26.40	Wash, 20 lks. wide, 5 ft. deep, drains S. 15° E.
30.60	Small wash, drains SW.
39.30	Trail road, on top of ridge, bears N. and S.
39.98	The cor. of secs. 7, 8, 17 and 18.
	<hr/> N. 0° 04' E., bet. secs. 7 and 8.
	Over gently rolling land, through dense sagebrush.
7.10	Trail road, bears N. and S. 10° W.
15.40	Same trail road, bears N. 20° W. and S.
26.25	Same trail road, bears N. 45° E. and S. 45° W.
36.50	Trail road, bears N. 45° W. and S. 45° E.
40.12	The ¼ sec. cor. of secs. 7 and 8, monumented with a quartzite stone, 15x12x8 ins., firmly set and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd..

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS		
	<p style="text-align: center;">T10N R8E $\frac{1}{2}$ S7 S8 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <hr/> <p>N. $0^{\circ} 05'$ W., beginning new measurement.</p> <p>33.00 Enter scattered timber.</p> <p>40.04 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 15x10x8 ins., firmly set and plainly mkd. 5 notches on S. and 5 notches on E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E S6 S5 S7 S8 1971</p> <p>Deposit the original cor. stone alongside the iron post,</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>	
	<p>From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the field notes of T. 10 N., R. 7 E., surveyed concurrently under the same group.</p> <p>N. $89^{\circ} 35'$ E., bet. secs. 6 and 7.</p> <p>Over rolling hills, through scattered timber and sagebrush.</p> <p>38.00 Trail road, bears S. 40° E. and N. 20° W. and 3.00 chs. to Junction.</p> <p>40.30 The $\frac{1}{4}$ sec. cor. of secs. 6 and 7, monumented with a quartzite stone, 15x12x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.</p> <p>At the cor. point.</p>	

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E ½ $\frac{S6}{S7}$ 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of corner.</p>
1.80	Trail road, bears S. 60° E. and N. 60° W.
40.16	The cor. of secs. 5, 6, 7 and 8.
	<p>N. 0° 16' W., bet. secs. 5 and 6.</p> <p>Over rolling hills, through dense timber and sagebrush.</p>
0.80	Wash, drains E., 1.00 chain to Jct. with main wash, Warner Hollow.
6.60	Wash in Warner Hollow, drains S. 20° E.
23.00	Wash, drains SW. about 1.00 chain into wash in Warner Hollow.
29.50	Wash, drains SW. about 5.00 ch. into wash in Warner Hollow.
40.20	Point for the ¼ sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E ½ $\frac{S6}{S5}$ 1971</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p>
86.96	The cor. of secs. 5, 6, 31. and 32, on the N. bdy. of the Tp.
	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.</p>

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	N. 2° 47' W., bet. secs. 32 and 33. Over gently rolling land, through dense sagebrush.
18.10	Wash, drains N. 75° W.
25.00	Jct. of two washes draining SW.
41.21	Point for the ½ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R8E ½ S32 S33 1971 No accessories available.
49.60	Wash, drains N. 75° W.
58.00	Trail road, bears E. and W.
59.00	Draw, drains irregularly N. 45° W.
66.50	Small draw, drains N. 80° W.
68.80	Draw, drains NW.
78.25	Wash, drains S. 70° W.
82.42	The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 8x9x5 ins., firmly set and plainly mkd. 1 notch on S. and 4 notches on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R8E S29 S28 S32 S33 1971 Deposit the original cor. stone alongside the iron post. No accessories available.
	From the cor. of secs. 29, 30, 31 and 32. S. 89° 47' E., bet. secs. 29 and 32. Over gently rolling land, through dense sagebrush.
5.00	Wash, drains S.
11.25	Wash, 20 lks. wide, 5 ft. deep, drains irregularly S.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
23.60	Wash, drains S. 40° E.
27.25	Wash, 30 lks. wide, 4 ft. deep, drains irregularly S.
31.00	Jeep trail, bears S. 20° W. and N. 20° E.
40.23	Point for the ¼ sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R8E ¼ $\frac{S29}{S32}$ 1971</p>
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
41.10	Cottonwood Creek, drains S. 30° E.
66.20	Wash, drains S. 25° W.
69.00	Jeep trail, bears N. 30° W. and S. 30° E.
80.46	The cor. of secs. 28, 29, 32 and 33.
	S. 89° 55' E., bet. secs. 28 and 33.
	Over gently rolling land, through dense sagebrush.
7.50	Wash, drains S. 55° W.
26.74	The closing cor. of secs. 28 and 33, monumented with a limestone, 12x6x6 ins., firmly set and plainly mkd. CC on W. face, and with 1 notch on S. and 5 notches on N. edge.
	Marked the original closing cor. stone with AM, and buried in place.
28.16	Intersect the Utah-Wyoming State Boundary.
	Point for the closing cor. of secs. 28 and 33.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R8E C S28 C S33 Wyo 1971</p>
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	From the above closing cor., the 40th mile post, bears N. 0° 09' W., 26.42 chs. dist.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS

From the cor. of secs. 28, 29, 32 and 33.

N. $0^{\circ} 02' E.$, bet. secs. 28 and 29.

Over rolling land, through dense sagebrush.

40.10 The $\frac{1}{4}$ sec. cor. of secs. 28 and 29, monumented with a sandstone, $12 \times 10 \times 6$ ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E

$\frac{1}{4}$
S29 | S28

1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ} 03' E.$, beginning new measurement.

6.00 Wash, drains N. $60^{\circ} W.$

14.30 Trail road, bears E. and W.

16.40 Wash, drains NW, about 1.00 chain to junction with other wash.

17.50 Wash, drains W.

31.10 Wash, drains SW.

36.90 Draw, drains irregularly S. $45^{\circ} W.$

40.30 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, $10 \times 8 \times 7$ ins., firmly set and plainly mkd. 2 notches on S. and 4 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N R8E

S20 | S21
S29 | S28

1971

Deposit the original cor. stone alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>S. 89° 50' E., bet. secs. 20 and 29.</p> <p>Over gently rolling land, through dense sagebrush.</p>
2.45	Trail road, bears NW. and S.
7.50	Wash, drains S.
8.65	Wash, 40 lks. wide, 6 ft. deep, drains S. 10° E.
39.94	<p>The ¼ sec. cor. of secs. 20 and 29, monumented with a flintstone, 12x12x8 ins., firmly set and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E ¼ $\frac{S20}{S29}$ 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <hr/> <p>S. 89° 30' E., beginning new measurement.</p>
5.70	Small wash in swale, drains S. 10° E.
29.10	Trail road, bears NE. and SW.
29.60	Gottonwood Creek, 40 lks. wide, 6 ft. deep, drains SW.
40.20	The cor. of secs. 20, 21, 28 and 29.
	<hr/> <p>S. 89° 55' E., bet. secs. 21 and 28.</p> <p>Over gently rolling land, through dense sagebrush.</p>
2.90	Wash, 30 lks. wide, 6 ft. deep, drains S. 30° W.
6.50	Wash, drains S. 30° W.
28.10	<p>Intersect the Utah-Wyoming State boundary.</p> <p>Point for the closing cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T10N R8E C S21</p>

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS

T10N
R8E
C S21
C S28 | Wyo
1971

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

From the above closing cor., the 41st mile posts, bears N. 0° 05' E., 25.32 chs. dist.

28.40 The closing cor. of secs. 21 and 28, monumented with a sandstone, 14x6x6 ins., firmly set and plainly mkd. CC on W. face; and with 2 notches on S. and 4 notches on N. edges.

Marked the stone cor. with AM, and buried in place.

From the cor. of secs. 20, 21, 28 and 29.

N. 1° 46' E., bet. secs. 20 and 21.

Over gently rolling land, through dense sagebrush.

9.10 Cottonwood Creek, 30 lks. wide, 4 ft. deep, drains irregularly S. 40° W.

9.90 Trail road, bears N. 40° E. and S. 40° W.

32.70 Trail road, bears E. and W.

39.40 Wash, 35 lks. wide, 5 ft. deep, drains irregularly S. 60° E.

40.18 The 1/2 sec. cor. of secs. 20 and 21, monumented with a limestone, 12x8x6 ins., firmly set and plainly mkd. 1/2 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E
1/2
S20 | S21
1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

N. 0° 03' W., beginning new measurement.

22.10 Spur, projects SW.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS					
34.00	Wash, 20 lks. wide, 3 ft. deep, drains irregularly S. 25° W.				
40.20	The cor. of secs. 16, 17, 20 and 21, monumented with a limestone, 12x12x8 ins., firmly set and plainly mkd. 3 notches on S. and 4 notches on E. edges.				
	At the cor. point				
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.				
	T10N R8E <table border="1" style="margin: auto;"> <tr> <td>S17</td> <td>S16</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> </table> 1971	S17	S16	S20	S21
S17	S16				
S20	S21				
	Deposit the original cor. stone alongside the iron post.				
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.				
	From the cor. of secs. 17, 18, 19 and 20.				
	N. 89° 53' E., bet. secs. 17 and 20.				
	Over gently rolling land, through dense sagebrush.				
4.75	Trail road, bears N. 15° E. and S. 15° W.				
5.25	Spur, slope S.				
40.24	The ¼ sec. cor. of secs. 17 and 20, monumented with a mound of stone and the stamp of a rotting stake in the middle. This position is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor.				
	At the cor. point				
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.				
	T10N R8E <table border="1" style="margin: auto;"> <tr> <td>¼ S17</td> <td></td> </tr> <tr> <td>S20</td> <td></td> </tr> </table> 1971	¼ S17		S20	
¼ S17					
S20					
	No accessories available.				
	S. 89° 03' E., beginning new measurement.				
10.50	Wash, drains SE.				
20.00	Wash, drains S.				
40.90	The cor. of secs. 16, 17, 20 and 21.				

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS

S. 89° 21' E., bet. secs. 16 and 21.

Over gently rolling land, through dense sagebrush.

0.40 Wash, 30 lks. wide, 6 ft. deep, drains S. 10° W.

25.80 Trail road, bears N. and curving to S. 15° E.

26.62 Intersect the Utah-Wyoming State boundary.

The closing cor. of secs. 16 and 21, monumented with a deteriorated sandstone, firmly set in the ground, marks have been obliterated, and a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N |
R8E |
C S16 | Wyo
C S21 |
1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

From the above closing cor., the 42nd mile post, bears N. 0° 20' W., 25.32 chs. dist.

From the cor. of secs. 16, 17, 20 and 21.

N. 0° 13' E., bet. secs. 16 and 17.

Over gently rolling land, through dense sagebrush.

20.00 Wash, drains S. 40° E.

39.20 Wash, drains S. 65° E.

40.10 The ¼ sec. cor. of secs. 16 and 17, monumented with a limestone, 12x10x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E
¼
S17 | S16
1971

Deposit the original cor. stone alongside the iron post.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

N. 0° 37' W., beginning new measurement.

2.20 Jeep trail, bears N. 75° W. and S. 60° E. curving to NW.

30.50 Trail road.

40.28 The cor. of secs. 8, 9, 16 and 17, monumented with a limestone, 14x12x8 ins., firmly set and plainly mkd. 4 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E

S8	S9
S17	S16

1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

From the cor. of secs. 7, 8, 17 and 18.

S. 89° 54' E., bet. secs. 8 and 17.

Over gently rolling land, through dense sagebrush.

32.80 Trail road, bears N. 10° E. and S. 10° W.

40.10 The ¼ sec. cor. of secs. 8 and 17, monumented with a sandstone, 18x14x4 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R8E

¼	S8
	S17

1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
32.50	S. 89° 54' E., beginning new measurement.
40.70	Trail road, bears N. 15° W. and S. 15° E.
	The cor. of secs. 8, 9, 16 and 17.
26.45	S. 89° 26' E., bet. secs. 9 and 16.
	Over gently rolling land, through dense sagebrush.
	Intersect the Utah-Wyoming State boundary.
	Point for the closing cor. of secs. 9 and 16.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
	T10N R8E C S9 Wyo C S16 1971
26.75	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	From the above closing cor., the 43rd mile post, bears N. 0° 20' W., 24.96 chs. dist.
	The closing cor. of secs. 9 and 16, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 4 notches on S. and 2 notches on N. edges, and CC. on W. face.
	Marked the original closing cor. stone with AM, and buried in place.
	From the cor. of secs. 8, 9, 16 and 17.
	N. 0° 01' E., bet. secs. 8 and 9.
	Over gently rolling land, through dense sagebrush.
4.00	Wash, drains S. 55° E. curving to E.
17.50	Wash, drains E.
20.90	Trail road, bears E. and W.
34.75	Wash, drains N. 35° E. curving to E.
38.00	Wash, drains S. 80° E.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
40.00	Jeep trail, bears N. 75° E. and S. 75° W.
40.18	The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, determined by a mound of stone. This position is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E $\frac{1}{4}$ S8 S9 1971
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	N. 0° 52' W., beginning new measurement.
18.80	Ridge, bears E. and W.
19.50	Jeep trail, bears S. 70° E. and N. 70° W.
30.60	Draw, drains E.
40.16	The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 18x18x12 ins., firmly set and plainly mkd. 5 notches on the S. and 4 notches on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R8E S5 S4 S8 S9 1971
	Deposit the original cor. stone alongside the iron post.
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	From the cor. of secs. 5, 6, 7 and 8.
	S. 89° 53' E., bet. secs. 5 and 8.
	Over rolling hills, through scattered timber and dense sagebrush.
1.30	Draw, drains irregularly S.
3.00	Junction of two washes, drains S.
14.75	Ridge, bears N. and S.

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS														
25.40	Trail road, bears N. 20° W. and S. 20° E.													
40.06	The ¼ sec. cor. of secs. 5 and 8, monumented with a sandstone, 12x8x5 ins., firmly set and plainly mkd. ¼ on N. face.													
	At the cor. point													
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.													
	T10N R8E $\frac{1}{4} \frac{S5}{S8}$ 1971													
	Deposit the original cor. stone alongside the iron post.													
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.													

	S. 89° 55' E., beginning new measurement.													
40.14	The cor. of secs. 4, 5, 8 and 9.													
	S. 89° 34' E., bet. secs. 4 and 9.													
	Over rolling hills, through scattered timber and dense sagebrush.													
26.56	Intersect the Utah-Wyoming State Boundary.													
	Point for the closing cor. of secs. 4 and 9.													
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.													
	<table border="0"> <tr><td>T10N</td><td> </td><td></td></tr> <tr><td>R8E</td><td> </td><td></td></tr> <tr><td>C S4</td><td> </td><td>Wyo</td></tr> <tr><td>C S9</td><td> </td><td></td></tr> </table> 1971	T10N			R8E			C S4		Wyo	C S9			
T10N														
R8E														
C S4		Wyo												
C S9														
	Set a steel fence post, 6 ft. long; 2 ft. in the ground alongside the iron post.													
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.													
	From the above closing cor., the 44th mile post, bears N. 0° 18' W., 24.64 chs. dist.													
26.70	The closing cor. of secs. 4 and 9, monumented with a sandstone, 12x12x6 ins., firmly set and plainly mkd. 5 notches on S. and 1 notch on N. edges; and CC on W. face.													
	Marked the original closing cor. stone with AM and buried in place.													

Dependent Resurvey of the Subdivisional Lines
Township 10 North, Range 8 East

CHAINS	
	From the cor. of secs. 4, 5, 8 and 9.
	N. 0° 02' W., bet. secs. 4 and 5.
	Over rolling hills, through scattered timber and dense sagebrush.
6.35	Draw, drains E.
25.20	Draw, Drains E.
32.40	Draw, drains E. curving to the SE.
40.30	Point for the ¼ sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T10N R8E ¼ S5 S4 1971
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
52.00	Draw, drains E. irregularly.
72.60	Draw, drains S. 70° E. curving to the E.
86.96	The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.

General Description

Township 10 North, Range 8 East, is located between two mountain ranges known as the Crawford Mountains to the west and the Sessions Mountains to the east. The Sessions Mountains being a spur from the more prominent Crawford Range forms a drainage basin that is boxed in between the two ranges. This basin is known as Dry Hollow and it drains in a general south direction into the Bear River that is located to the south of the township.

There is scattered growth of pinon and juniper on higher ground in the north portion of the township. A dense growth of sagebrush in the more gentle rolling land that covers the greater portion of the township to the south.

Elevation is from approximately 6,400 ft. above sea level in the south to 7,500 ft. in the higher elevation of the north portion of the township.

The township is accessible by numerous trail roads located throughout the township. There seems to be no clear water. No permanent human habitats were noted.

CERTIFICATE OF SURVEY

(I) ~~XXXX~~ Milton R. Workman, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 10th day of June, 1970, (I) ~~XXXX~~ have retraced the Utah-Wyoming State Boundary between mile posts 38 and 45 and dependently resurveyed the north boundary, the south boundary and the subdivisional lines of Township 10 North, Range 8 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 11, 1972
(Date)

Milton R. Workman
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
~~Washington, D.C.~~
Denver, Colorado

The foregoing field notes of the retracement of the Utah-Wyoming State boundary between mile posts 38 and 45, and the dependent resurvey of the north boundary, the south boundary and the subdivisional lines of Township 10 North, Range 8 East, Salt Lake Meridian, Utah.

executed by Milton R. Workman, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

APR 16 1980
(Date)

J. Voorhees
(Chief, Division of Cadastral Survey)
Chief, Cadastral Survey Examination and Approval Staff

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY~~ That the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

EAST BOUNDARY, A PORTION OF THE NORTH AND

SOUTH BOUNDARIES AND A PORTION

OF THE

SUBDIVISIONAL LINES

OF

TOWNSHIP 37 SOUTH, RANGE 3 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under the Supervision of

Glen B. Hatch

Acting Chief, Branch of Cadastral Survey

Under special instructions dated January 29, 1976, approved January 30, 1976,

, which provided for the surveys included under U.S. Survey/Group

Number 562, and assignment instructions dated September 10, 1976.

Survey commenced November 3, 1976

Survey completed May 16, 1977

INDEX DIAGRAM

Township 37 South, Range 3 West,

		17		16	15
6	5 58	4 48	3 38	2 28	1 7
		58	48	37	27
7	8 56	9 47	10 36	11 25	12 6
		56	46	35	25
18	17 54	16 45	15 34	14 24	13 5
		54	44	33	23
19	20 53	21 43	22 32	23 22	24 4
	63	52	42	31	21
30 62	29 51	28 41	27 30	26 20	25 3
61	61	50	40	29	20
31 59	32 49	33 39	34 28	35 19	36 2
14	13	11	10	9	

Township 37 South, Range 3 West, Salt Lake Meridian, Utah

CHAINS

T. 37 S., R. 3 W.

History of Surveys

<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
--------------------	-------------------------------

NORTH BOUNDARY

All	A. B. Lewis	1897	
N. Bdy., Sec. 3		E. Bird	1933

SOUTH BOUNDARY

All	J. H. Clark for William Lewman	1904	
-----	-----------------------------------	------	--

EAST BOUNDARY

All	A. B. Lewis	1897	
N. 1 mile		J. H. Clark	1904

WEST BOUNDARY

All	J. H. Clark for William Lewman	1904	
S. 2 miles		E. Bird and A. Nelson	1944

SUBDIVISIONS

All except secs. 5, 6, 7, 8, 17 and 18	J. H. Clark for William Lewman	1904	
--	-----------------------------------	------	--

The following field notes are those of a dependent resurvey of the east boundary, a portion of the north and south boundaries, and a portion of the subdivisional lines of Township 37 South, Range 3 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 562, Utah, dated January 29, 1976.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original corners or other calls of the original field note record. Identified corners were remonumented in their original positions, lost corners were restored and monumented at proportionate positions based on the original record.

The directions of the lines of this survey were determined by reference to the true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

The distances along surveyed lines were determined by electronic measurement. The distances to topography on lines run by traverse due to rough terrain and private property are approximately as scaled from U.S.G.S. topographic sheets.

Township 37 South, Range 3 West, Salt Lake Meridian, Utah

CHAINS

The geographic position of the southeast corner of the Tp., as computed from a tie to U.S.G.S. triangulation station "Cannonville, 1959" at Latitude 37° 34' 24.33" N. and Longitude 112° 00' 43.47" W., as published by U.S.G.S., located in sec. 21, T. 37 S., R. 2 W., Salt Lake Meridian, is:

Latitude 37° 32' 09.09" N. Longitude 112° 03' 17.52" W

The mean magnetic declination is 14° 45' E.

Dependent Resurvey of the East Boundary of T. 37 S., R. 3 W., Salt Lake Meridian, Utah

Restoring the Survey Executed by A. B. Lewis in 1897

Beginning at the cor. of Tps. 37 and 38 S., Rs. 2 and 3 W., monumented with an iron post, 2½ ins. diam., firmly set and projecting 9 ins. above ground, with brass cap mkd. as described in the official record of the 1960 resurvey of the S. bdy. of T. 37 S., R. 2 W.

N. 3° 03' W., bet. secs. 31 and 36.

Over broken benches and ridges, through scattered pinon and juniper growth.

- 8.80 Draw, drains SW; asc. abruptly.
- 23.00 Spur, slopes SW; desc. abruptly.
- 27.00 Draw, drains SW; asc. abruptly.
- 33.50 South edge of bench.

39.01 The ¼ sec. cor. of secs. 31 and 36, monumented with a juniper post, 36 ins. long, 4 ins. square, mkd. ¼ on W face and projecting 20 ins. above ground, from which the original bearing trees


A juniper, 24 ins. diam., bears N. 65° E., 60 lks. dist., mkd. ¼ S BT.

A juniper, 10 ins. diam., bears N. 73° 30' W., 53.5 lks. dist., mkd. ¼ S BT. (Record, 56 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S
R 3 W R 2 W



1976

Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. juniper post alongside the iron post.

Set a steel fence post alongside the iron post.

N. 0° 06' E., beginning new measurement.

- 3.50 Draw, drains SE; asc. abruptly.
- 6.80 Spur, slopes E; desc. abruptly.
- 10.50 Draw, drains SE; asc. abruptly.
- 13.60 Spur, slopes E; desc. gradually.
- 15.10 Draw, drains SE; asc. gradually.
- 17.90 Spur, slopes SE; desc. gradually.
- 20.20 Draw, drains SE; asc. gradually over bench.
- 40.42 The cor. of secs. 25, 30, 31, and 36, monumented with a juniper post, 36 ins. long, 4 ins. square, firmly set, with faint scribe marks, from which the original bearing trees

A juniper, 12 ins. diam., bears N. 61° E., 54 lks. dist., mkd. T37S R2W S30 BT.

A juniper stump, 12 ins. diam., bears N. 6° E., 56 lks. dist., no visible marks.

A juniper, 16 ins. diam., bears S. 40° 30' E., 101 lks. dist., mkd. T37S R2W S31 BT.

A juniper stump, 20 ins. diam., bears S. 21° W., 44 lks. dist., no visible marks.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S
R 3 W R 2 W

S 25	S 30
S 36	S 31

1976

Deposit the mkd. juniper post alongside the iron post.

Set a steel fence post alongside the iron post.

N. 0° 12' E., bet. secs. 25 and 30.

Over broken mountainous land, through scattered pinon and juniper growth.

- 0.80 North edge of bench; desc. abruptly.
- 9.00 Base of hill; desc. gradually.



Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
13.00	Draw, drains NE.
31.40	Wash, 30 lks. wide, 3 ft. deep, drains NE.
36.10	Wash, 40 lks. wide, 3 ft. deep, drains E.
40.17	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, at proportionate distance; there is no remaining evidence of the original corner.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W R 2 W</p>
	<p style="text-align: center;">$\frac{1}{4}$ S 25 S 30 </p>
	1976
	Set a juniper post alongside the iron post.
68.98	Enter townsite of Cannonville.
70.28	South base of sandstone cliff, 200 ft. high.
74.68	North base of sandstone cliff.
80.34	The cor. of secs. 19, 24, 25, and 30, monumented with a juniper post, 36 ins. long, 4 ins. square, with fragmentary scribe marks, projecting 20 ins. above ground.
	At the corner point
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W R 2 W</p>
	<p style="text-align: center;">S 24 S 19 S 25 S 30</p>
	1976
	Deposit the mkd. juniper post alongside the iron post.
	Cor. is located in fence line that extends N. $1^{\circ} 15'$ W. and S. $1^{\circ} 15'$ E., and 80 lks. W of the centerline of the main street of Cannonville, Utah, which is parallel to the aforementioned fence line.
	North, bet. secs. 19 and 24.
	Over gently rolling land, alongside fence line and frontage of property lots.
29.57	State Highway No. 54, 50 lks. wide, curving from S. $59^{\circ} 30'$ E. to N. $2^{\circ} 30'$ E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 24 S 19 </p> <p style="text-align: center;">1976</p> <p>Cor. is located 18.5 lks. W of cor. of fence, bears north, south, east, and west (in E-W fence line).</p> <p>44.10 Leave townsite of Cannonville, Utah.</p> <p>53.50 Enter edge of farm reservoir.</p> <p>56.00 Leave farm reservoir.</p> <p>80.00 Point for the cor. of secs. 13, 18, 19, and 24, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Deposit brass cap only, 24 ins. below ground surface of cultivated field, mkd.</p> <p style="text-align: center;">T 37 S R 3 W R 2 W</p> <p style="text-align: center;"> S 13 S 18 S 24 S 19 </p> <p style="text-align: center;">1976</p> <p>from which</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 60° W., 228 lks. dist., with brass cap mkd. T37S R3W S24 RM 1976 150½ FT and an arrow pointing to the cor.</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 60° W., 227 lks. dist., with brass cap mkd. T37S R3W S13 RM 1976 150 FT and an arrow pointing to the cor.</p>
	<p>North, bet. secs. 13 and 18.</p> <p>Over cultivated land.</p> <p>20.00 Leave cultivated land; over bottom land, through willows, tamarack and cottonwood growth.</p> <p>39.81 Point selected for the witness cor. to the ¼ sec. cor. of secs. 13 and 18, on the right bank of Paria River.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">W C T 37 S R 3 W R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$  S 13 S 18 </p> <p style="text-align: center;">1976</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>39.90 Enter main channel of Paria River, course S. 70° E.</p> <p>40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, at proportionate distance, falls in channel of Paria River and cannot be monumented. There is no remaining evidence of the original corner.</p> <p>40.80 Left bank of Paria River; asc. gradually.</p> <p>80.00 The cor. of secs. 7, 12, 13, and 18, monumented with a sandstone, 18 x 16 x 12 ins., firmly set and plainly mkd. 4 notches on S and 2 notches on the N edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W R 2 W</p> <p style="text-align: center;"> $\frac{1}{4}$  S 12 S 7 S 13 S 18 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located 8½ lks. W of cor. of fence, projecting N, S, E, and W.</p>
	<p>N. 0° 04' E., bet. secs. 7 and 12.</p> <p>Over rolling land, through lightly scattered pinon and juniper growth.</p> <p>10.50 Wash, 20 lks. wide, 4 ft. deep, drains SW; asc. SE slope.</p> <p>19.00 Rim of bench, bears NE and SW.</p> <p>22.00 Rim of same bench, bears NE and SW; desc. NW slope.</p> <p>36.00 Base of hill; over rolling land.</p> <p>39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, at proportionate distance, bet. its witness cor. and the cor. of secs. 7, 12, 13, and 18.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T 37 S
R 3 W R 2 W

$\frac{1}{4}$
S 12 | S 7

1976

Set a cedar post alongside the iron post.

40.96 The original witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a granite stone, 14 x 8 x 6 ins., firmly set and plainly mkd. WC $\frac{1}{4}$ on W face. This cor. now functions as an angle point, mkd. AP on top of rock.

N. 0° 05' E., beginning new measurement.

7.30 Wash, 20 lks. wide, 3 ft. deep, drains W; over bottom land.

37.30 Wash, drains SW; asc. gradual S slope.

39.03 Point for the cor. of secs. 1, 6, 7, and 12, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S
R 3 W R 2 W

S 1 | S 6
S 12 | S 7

1976

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Restoring the Survey Executed by A. B. Lewis in 1897 and the Resurvey by J. H. Clark for William Lewman in 1904

N. 0° 05' E., bet. secs. 1 and 6.

Over rolling land, through sagebrush, shadscale and greasewood.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, determined by the intersection of barbed wire fences projecting E, W, and N. This position is harmoniously related to existing original corners has long been recognized by adjacent landowners as the cor., and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the East Boundary of
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T 37 S
R 3 W R 2 W

$\frac{1}{2}$
|
S 1 | S 6
|

1976

N. 0° 06' E., beginning new measurement.

- 15.00 North Creek, 70 lks. wide, 3 ft. deep, course SW.
20.00 Wash, 30 lks. wide, 8 ft. deep, drains SE.
39.96 The cor. of Tps. 36 and 37 S., Rs. 2 and 3 W., monumented with a squared cedar post, 36 ins. long mkd. 6 notches on east and west edges, firmly set 16 ins. in the ground, with rebar alongside.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T 36 S
R 3 W R 2 W

S 36 | S 31
S 1 | S 6

T 37 S
1976

Deposit the mkd. cedar post and rebar alongside the iron post.

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

Restoring the Survey Executed by J. H. Clark
for William Lewman in 1904

From the cor. of secs. 1, 2, 35, and 36, monumented with a sandstone, 16 x 6 x 3 ins., firmly set and plainly mkd. 5 notches on W and 1 notch on E edges, from which the original bearing trees

A pinon, 14 ins. diam., bears S. 89° E.,
61 lks. dist., mkd. T38S R3W S1 BT.

A juniper, 12 ins. diam., bears N. 29° W., 103.5 lks.
dist., mkd. T37S R3W S35 BT. (Record, N. 29° 06' W.,
100 lks. dist.)

At the corner point

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

S 35	S 36
S 2	S 1

T 38 S
1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor.

Cor. is located on steep NE slope.

N. 89° 50' W., bet. secs. 2 and 35.

Over rolling and broken bench land, through scattered pinon and juniper growth.

0.80 Top of bench, bears N and S; desc. gradually.

5.30 Leave timber and enter sagebrush flat.

38.00 Wash, 20 lks. wide, 15 ft. deep, drains SE; asc. NE slope, through scattered pinon and juniper growth.

40.08 The ¼ sec. cor. of secs. 2 and 35, monumented with a sandstone, 18 x 12 x 3 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees

A pinon pine, 12 ins. diam., bears N. 19° E., 18.5 lks. dist., mkd. ¼ S35 BT. (Record, N. 24° 41' E., 17.5 lks.)

A juniper, 8 ins. diam., bears S. 6° W., 24.5 lks. dist., mkd. ¼ S2 BT. (Record, S. 9° 20' W., 33 lks. dist.)

A juniper, 10 ins. diam., bears N. 40° W., 33.5 lks. dist., mkd. with fragmentary scribe marks on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

¼	S 35
	S 2

T 38 S
1976

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS							
	N. 89° 56' W., beginning new measurement.						
6.00	Spur, slopes SE; desc. gradually.						
9.00	Draw, drains SE; asc. gradually.						
14.00	Ridge, bears NW and SE; desc. gradually.						
18.00	Draw, drains SE; asc. gradually.						
28.00	Rim of bench, bears NE and S; over rolling land.						
36.00	Rim of same bench, bears NW and SE; desc. SW slope.						
40.00	The cor. of secs. 2, 3, 34, and 35, monumented with a sandstone, 24 x 17 x 4 ins., firmly set and plainly mkd. 4 notches on the W and 2 notches on the E edges, from which the original bearing trees						
	A juniper, 12 ins. diam., bears N. 77° E., 44 lks. dist., mkd. T37S R3W S35 BT. (Record, N. 70° 22' E., 41 lks.)						
	A pinon pine, 16 ins. diam., bears S. 62° E., 85 lks. dist., mkd. T38S R3W S2 BT.						
	A pinon, 16 ins. diam., bears S. 28° W., 40 lks. dist., mkd. T38S R3W S3 BT. (Record, S. 15° 15' W., 41 lks.)						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T 37 S R 3 W						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 34</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 35</td> </tr> <tr> <td style="padding: 2px;">S 3</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 2</td> </tr> </table>	S 34		S 35	S 3		S 2
S 34		S 35					
S 3		S 2					
	T 38 S 1976						
	Deposit the mkd. stone alongside the iron post.						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.						
	N. 89° 52' W., bet. secs. 3 and 34.						
	Over broken mountainous land, through scattered pinon and juniper growth; desc. SW slope.						
5.00	Base of hill, bears NW and SE; over rolling land.						
40.07	The ¼ sec. cor. of secs. 3 and 34, monumented with a broken sandstone, 18 x 10 x 3 ins., firmly set and dimly mkd. ¼ on N face, there is no remaining evidence of the original bearing trees.						
	At the corner point						
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">$\frac{1}{4} \frac{S 34}{S 3}$</p> <p style="text-align: center;">T 38 S 1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 51' W., beginning new measurement.</p> <p>2.20 Trail road, bears SW and N.</p> <p>2.80 Sheep Creek Wash, 2.00 chs. wide, 5 ft. deep, drains SE.</p> <p>19.70 Improved dirt road, bears NW and SE.</p> <p>31.80 Wash, 60 lks. wide, 8 ft. deep, drains SE.</p> <p>38.70 Wash, 60 lks. wide, 10 ft. deep, drains NE.</p> <p>40.06 The cor. of secs. 3, 4, 33, and 34, monumented with a sandstone, 20 x 8 x 6 ins., firmly set and plainly mkd. 3 notches on the E and W edges, from which an original bearing tree</p> <p style="padding-left: 40px;">A juniper, 20 ins. diam., bears S. 10° E., 57.5 lks. dist., mkd. T38S R3W S3 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">$\frac{S 33}{S 4} \mid \frac{S 34}{S 3}$</p> <p style="text-align: center;">T 38 S 1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in fence line extending N and S.</p>
	<p>N. 89° 51' W., bet. secs. 4 and 33.</p> <p>Over rolling mountainous land, through scattered pinon and juniper growth.</p> <p>2.10 Wash, 70 lks. wide, 10 ft. deep, drains SE.</p> <p>13.50 Road, unimproved, bears NE and SW; asc. E slope.</p> <p>32.00 Same road, bears NW and SE; asc. NE slope.</p> <p>36.50 Same road, bears N and S.</p> <p>40.01 The ¼ sec. cor. of secs. 4 and 33, monumented with a sandstone, 20 x 8 x 3 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees</p>

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

A juniper, 11 ins. diam., bears S. 65° W., 34 lks. dist., mkd. ¼ S4 BT.

A dead pinon pine, 8 ins. diam., bears N. 60° W., 44 lks. dist., mkd. with fragmentary scribe marks on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

¼	<u>S 33</u>
	S 4

T 38 S
1976

Deposit the mkd. stone alongside the iron post.

N. 89° 46' W., beginning new measurement.

Over rolling bench land; asc. gradually.

32.00 East edge of large wash or draw, 150 ft. deep, drains NE.

39.00 West edge of wash; continue to ascend.

39.98 The cor. of secs. 4, 5, 32, and 33, monumented with a sandstone, 18 x 6 x 4 ins., firmly set and plainly mkd. 4 notches on the E and 2 notches on the W edges, from which the original bearing trees

A pinon pine, 9 ins. diam., bears N. 47° E., 34.5 lks. dist., mkd. T37S R3W S33 BT. (Record, N. 50° 10' E.)

A dead pinon pine, 12 ins. diam., bears S. 10° 30' W., 53.5 lks. dist., mkd. T38S R3W S5 BT. (Record, S. 5° 02' W.)

A dead pinon pine, 12 ins. diam., bears N. 56° 15' W., 59 lks. dist., mkd. with fragmentary scribe marks. (Record, N. 69° W., 64 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

<u>S 32</u>		S 33
S 5		S 4

T 38 S
1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	West, bet. secs. 5 and 32.
	Over broken mountainous land, through pinon and juniper growth; asc. SE slope.
11.50	Top of hill, bears N and S; desc. W slope.
20.00	Draw, drains NW; asc. E slope.
27.00	Top of ridge, bears N and S; desc. W slope.
31.50	Draw, drains N; asc. gradually.
36.70	Top of hill; desc. NW slope.
39.79	The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, monumented with a limestone, 25 x 5 x 2 ins., firmly set in a mound of stone and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees
	<p>A pinon pine, 12 ins. diam., bears N. 31° 29' E., 20 lks. dist., mkd. $\frac{1}{4}$ S32 BT.</p> <p>A dead pinon pine, 10 ins. diam., bears S. 70° W., 24 lks. dist., mkd. $\frac{1}{4}$ S5 BT.</p>
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, over a deeply chiseled X, and in a mound of stone, 3 ft. base to top of brass cap, mkd.
	T 37 S R 3 W
	$\frac{1}{4} \frac{S 32}{S 5}$
	T 38 S 1976
	Deposit the mkd. stone in mound alongside the iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

	N. 89° 52' W., beginning new measurement.
	Desc. over series of spurs and draws, bearing NW.
17.20	Wash in draw, 50 lks. wide, 10 ft. deep, drains NE; asc. E slope.
34.00	Spur, slopes N; desc. NW slope.
38.00	Draw, drains NE; asc. E slope.
39.94	The cor. of secs. 5, 6, 31, and 32, monumented with a limestone, 17 x 6 x 6 ins., firmly set in a mound of stone and plainly mkd. 5 notches on the E and 1 notch on the S edges, from which the remaining original bearing trees

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

A pinon pine, 12 ins. diam., bears N. 4° E., 44 lks. dist., mkd. T37S R3W S32 BT. (Record, N. 15° E., 46.5 lks. dist.)

A pinon pine, 12 ins. diam., bears S. 10° E., 41 lks. dist., mkd. T38S R3W S5 BT. (Record, S. 24° E., 38.5 lks. dist.)

A pinon pine, 12 ins. diam., bears S. 26° W., 28.5 lks. dist., mkd. T38S R3W S6 BT. (Record, S. 40° W., 25 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

S 31	S 32
S 6	S 5

T 38 S
1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

N. 89° 55' W., bet. secs. 6 and 31.

Over broken mountainous land, through pinon and juniper growth.

- 1.50 Top of hill; desc. gradually.
- 5.00 Enter small flat, through sagebrush and greasewood.
- 23.00 Asc. gradually through pinon and juniper growth.
- 40.08 The ¼ sec. cor. of secs. 6 and 31, monumented with a limestone, 20 x 6 x 5 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees

A pinon pine, 12 ins. diam., bears S. 55° 26' W., 15.5 lks. dist., mkd. ¼ S6 BT.

A juniper, 18 ins. diam., bears N. 39° 20' W., 13 lks. dist., mkd. ¼ S31 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

¼	S 31	S 6
	S 6	S 6

T 38 S
1976

Dependent Resurvey of a Portion of the South Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

N. 89° 53' W., beginning new measurement.

5.50 Wash, 80 lks. wide, 20 ft. deep, drains NE; asc. NE slope.

28.00 Ridge, bears N and S; desc. gradually.

32.00 Draw, drains NW; asc. NE slope.

38.33 The cor. of Tps. 37 and 38 S., R. 3 W., on the E. bdy. of sec. 1, T. 38 S., R. 4 W., monumented with an iron post, 3 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the 1944 resurvey.

Dependent Resurvey of a Portion of the North Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

Restoring the Survey Executed by
A. B. Lewis in 1897

From the cor. of Tps. 36 and 37 S., Rs. 2 and 3 W., heretofore described.

S. 89° 53' W., bet. secs. 1 and 36.

Over rolling and broken land, through sagebrush and shadscale; asc. E slope.

5.00 Wash, 40 lks. wide, 6 ft. deep, drains SE.

6.00 Dirt road, bears N and S.

24.80 Ridge, bears N and S; desc. W slope.

39.01 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a sandstone, 20 x 12 x 6 ins., firmly set and dimly mkd. $\frac{1}{4}$ on N face, witnessed by a mound of stone, N of cor.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 36 S R 3 W

$\frac{1}{4}$ $\frac{S\ 36}{S\ 1}$

T 37 S
1977

Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a Portion of the North Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS					
	<p>N. 89° 40' W., beginning new measurement.</p> <p>Over gentle rolling land.</p>				
8.00	Wash, 30 lks. wide, 5 ft. deep, drains S.				
11.00	Paria River, 2 chs. wide, 6 ins. deep, flows S - SE; over cultivated land.				
40.37	<p>The cor. of secs. 1, 2, 35, and 36, determined at a point 10 lks. North of a steel rod in an old E - W fence line. This rod has long been recognized by adjacent landowners as a reference marker for this cor. position. This position was also verified by the original landowner, Mr. Harland Shakespear of Tropic, Utah, and is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Bury brass cap only, 24 ins. below surface of cultivated land, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 36 S R 3 W</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> </table> <p>T 37 S 1977</p> </div> <p>from which</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 15° E., 634.9 lks. dist., with brass cap mkd. RM T36S R3W S36 419 FT 1977 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 15° W., 628.8 lks. dist., with brass cap mkd. RM T36S R3W S35 415 FT 1977 and an arrow pointing to the cor.</p> <p>Both reference monuments located in E - W fence line.</p>	S 35	S 36	S 2	S 1
S 35	S 36				
S 2	S 1				
	<p>S. 89° 48' W., bet. secs. 2 and 35.</p> <p>Over nearly level land, through cultivated fields.</p>				
20.00	Enter town limits of Tropic.				
25.00	Dirt road, bears N and S.				
33.00	State Highway No. 54, bears N and S.				
40.15	<p>Point for the ¼ sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				

Dependent Resurvey of a Portion of the North Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T 36 S R 3 W

$$\frac{1}{4} \frac{S 35}{S 2}$$
T 37 S
1977

Cor. is located in E - W fence line and on the N. bank of Campbell Creek, flows SE.

- 50.50 Dirt road, bears N and S.
59.00 Dirt road, bears N and S.
67.50 Dirt road, bears N and S.
75.50 Dirt road, bears N and S.
80.30 The cor. of secs. 2, 3, 34, and 35, monumented with an iron post, 2 ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the 1933 resurvey.

From the cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the 1933 resurvey.

Cor. is located at fence cor. extending E, W, and N.

N. 89° 36' W., bet. secs. 4 and 33.

Over broken mountainous land, through pinon and juniper growth; asc. gentle E slope.

- 7.50 Wash, 2 chs. wide, 2 ft. deep, drains SE.
22.00 Asc. moderate SE slope.
34.50 Ridge, bears NE and SW; desc. NW slope.
39.75 The $\frac{1}{4}$ sec. cor. of secs. 4 and 33, monumented with a sandstone, 18 x 12 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd

T 36 S R 3 W

$$\frac{1}{4} \frac{S 33}{S 4}$$
T 37 S
1977

Deposit the mkd. stone alongside the iron post.

Cor. is located 8 lks. N of cor. of fences extending E and S.

Dependent Resurvey of a Portion of the North Boundary,
T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>S. 89° 52' W., beginning new measurement.</p>
4.50	<p>Draw, drains NE; asc. over SE slope.</p>
14.50	<p>Crest of low ridge, bears NW and SE; desc. over SW slope.</p>
21.00	<p>Wash, 30 lks. wide, 3 ft. deep, drains SE; asc. NE slope.</p>
22.09	<p>The original witness cor. for the cor. of secs. 4, 5, 32, and 33, monumented with a sandstone, 24 x 6 x 4 ins., firmly set and plainly mkd. 4 notches on the E and 2 notches on the W edges, and WC on the SW face. This point will now function as an angle point.</p> <p>At the angle point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top of brass cap, mkd.</p> <p style="text-align: center;">AP T 36 S R 3 W</p> <p style="text-align: center;">S 33 — S 4</p> <p style="text-align: center;">T 37 S 1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>West, beginning new measurement.</p> <p>Asc. steep broken NE slope.</p>
17.64	<p>Point for the cor. of secs. 4, 5, 32, and 33, established at record bearing and distance from the original witness cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 3 W</p> <p style="text-align: center;">S 32 S 33 — — S 5 S 4</p> <p style="text-align: center;">T 37 S 1977</p>
<p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah</p>	
<p>Restoring the Survey Executed by J. H. Clark for William Lewman in 1904</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp. heretofore described.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	N. 0° 05' E., bet. secs. 35 and 36.
	Over broken land, through scattered pinon and juniper growth.
4.00	Desc. over NE slope.
18.00	Draw, drains E; asc. abruptly.
21.00	Spur, slopes NE; desc. gradually.
39.95	The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a sandstone, 18 x 6 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees
	A pinon pine, 20 ins. diam., bears S. 87° E., 68 lks. dist., mkd. $\frac{1}{4}$ S36 BT.
	A pinon pine, 16 ins. diam., bears N. 45° W., 116 lks. dist., mkd. $\frac{1}{4}$ S35 BT.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 35 S 36 </p> <p style="text-align: center;">1976</p>
	Deposit the mkd. stone alongside the iron post.
	N. 0° 04' E., beginning new measurement.
	Over rolling flat, through sagebrush and greasewood.
3.00	Dirt road, bears SE and NW.
3.70	Enter Yellow Creek Wash, 10 ft. deep, drains SE.
7.00	Leave wash; over rolling land.
40.15	The cor. of secs. 25, 26, 35, and 36, monumented with a sandstone, 18 x 6 x 5 ins., firmly set and plainly mkd. 1 notch on the S and E edges.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> S 26 S 25 S 35 S 36 </p> <p style="text-align: center;">1976</p>
	Deposit the mkd. stone alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Cor. is located $\frac{1}{2}$ lk. SE of cor. of fence, extending E, W, and N.</p>
	<p>From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp. heretofore described.</p> <p>N. $89^{\circ} 42'$ W., bet. secs. 25 and 36.</p> <p>Over mountainous land, through pinon and juniper growth; asc. gradually.</p>
11.50	Top of bench, bears N and S; desc. SW slope.
17.00	Base of steep desc.; over rolling land.
39.93	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 25}{S 36}$</p> <p style="text-align: center;">1976</p>
	<p>Cor. is located 10 lks. S of E - W fence line.</p>
45.50	Wash, 50 lks. wide, 12 ft. deep, drains SW.
79.86	The cor. of secs. 25, 26, 35, and 36.
	<p>N. $0^{\circ} 06'$ E., bet. secs. 25 and 26.</p> <p>Over rolling land, through lightly scattered pinon and juniper growth.</p>
30.50	<p>The original witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 24 x 8 x 8 ins., firmly set and plainly mkd. W C on W face, from which an original bearing object</p> <p style="padding-left: 40px;">A red sandstone cliff, 30 ft. high, bears N. 45° W., 5 ft. dist., mkd. WC $\frac{1}{4}$ S26 BO.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 26 S 25</p> <p style="text-align: center;">1976</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS					
	<p>Deposit the mkd. stone alongside the iron post.</p> <p style="text-align: center;">_____</p> <p>N. 1° 03' E., beginning new measurement.</p> <p>Over very broken and hazardous sandstone ledges; asc. SW slope.</p>				
9.45	<p>Point for the ¼ sec. cor. of secs. 25 and 26, at proportionate distance, falls on steep SW slope where it is impracticable to establish a permanent monument.</p> <p>Along broken W slope.</p>				
25.00	Spur, slopes W; desc. broken NW slope.				
40.00	Spur, slopes NW; desc. abruptly.				
46.50	Draw, drains NW; asc. broken SW slope.				
49.51	<p>The cor. of secs. 23, 24, 25, and 26, determined from the remains of the original bearing object</p> <p style="padding-left: 40px;">A mound of stone, 3 ft. base, 2 ft. high, on top of large sandstone boulder, bears S. 7° W., 59 lks. dist.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> <p>T 37 S R 3 W</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 23</td> <td style="padding: 0 5px;">S 24</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 26</td> <td style="padding: 0 5px;">S 25</td> </tr> </table> <p>1976</p> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	S 23	S 24	S 26	S 25
S 23	S 24				
S 26	S 25				
	<p>From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp. heretofore described.</p> <p>N. 89° 57' W., bet. secs. 24 and 25.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p>				
16.00	Small spur, slopes N.				
26.00	Base of hill, bears NW and SE; asc. broken NE slope.				
39.56	<p>Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>T 37 S R 3 W</p> <p>$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$</p> <p>1976</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, E of cor. Cor. is located on steep E slope.</p> <p>47.50 Top of ascent; over rolling bench land.</p> <p>56.00 Trail road, bears N and S.</p> <p>71.00 Desc. broken SW slope.</p> <p>79.12 The cor. of secs. 23, 24, 25, and 26.</p>
	<p>N. 0° 14' E., bet. secs. 23 and 24.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth; asc. steep SW slope.</p> <p>5.50 Spur, slopes W; desc. N - NW slope.</p> <p>16.50 Draw, drains NW; asc. SW slope.</p> <p>21.50 Small spur, slopes W; along broken W slope.</p> <p>40.40 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, at proportionate distance, falls in draw where it is impractical to establish a permanent monument.</p> <p>Asc. broken SW slope.</p> <p>45.60 Top of steep asc.; over rolling bench land.</p> <p>45.72 The original witness cor. for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, monumented with a limestone, 18 x 10 x 3 ins., firmly set in a mound of stone and plainly mkd. W C $\frac{1}{4}$ on W face, from which an original bearing tree</p> <p style="padding-left: 40px;">A pinon pine, 15 ins. diam., bears N. 40° E., 66 lks. dist., mkd. WC $\frac{1}{4}$ S24 BT. (Record, N. 35° E., 35 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground, over a deeply chiseled X in bedrock and in a mound of stone, 4 ft. base to top of brass cap, mkd.</p> <p style="text-align: center;"> W C T 37 S R 3 W $\frac{1}{4}$ S 23 S 24 ↓ 1976 </p> <p>Deposit the mkd. stone in mound alongside the iron post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS					
	North, beginning new measurement.				
30.00	Trail road, bears NW and SE.				
34.84	The cor. of secs. 13, 14, 23, and 24, monumented with a sandstone, 20 x 7 x 4 ins., firmly set and plainly mkd. 3 notches on the S and 1 notch on the E edges.				
	At the corner point				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				
	T 37 S R 3 W <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 14</td> <td style="padding: 0 5px;">S 13</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 23</td> <td style="padding: 0 5px;">S 24</td> </tr> </table> 1976	S 14	S 13	S 23	S 24
S 14	S 13				
S 23	S 24				
	Deposit the mkd. stone alongside the iron post.				
	From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the Tp. heretofore described.				
	N. 89° 14' W., bet. secs. 13 and 24.				
	Over rolling land, through sagebrush and greasewood; asc. gentle E slope.				
3.00	State Highway No. 54, bears N. 2° 30' E. and S. 2° 30' W.				
15.00	Base of hill, bears N and S; asc. steep E slope.				
22.50	Spur, slopes SE.				
29.50	Rim of bench, bears NW and SE; over broken bench land, through pinon and juniper growth.				
38.76	The ¼ sec. cor. of secs. 13 and 24, monumented with a sandstone, 18 x 10 x 6 ins., firmly set and plainly mkd. ¼ on the N face, witnessed by an old mound of stone, N of cor.				
	At the corner point				
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.				
	T 37 S R 3 W <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 13</td> <td style="padding: 0 5px;">S 24</td> </tr> </table> 1976	¼ S 13	S 24		
¼ S 13	S 24				
	Deposit the mkd. stone alongside the iron post.				
	Rebuild original mound, 3 ft. base, 2 ft. high, N of cor.				

	N. 89° 52' W., beginning new measurement.				
	Over rolling bench land.				

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
40.18	The cor. of secs. 13, 14, 23, and 24.
	N. 0° 14' E., bet. secs. 13 and 14.
	Over rolling bench land, through scattered pinon and juniper growth.
31.00	Small draw, drains NE.
35.00	Desc. gradually.
40.07	The ¼ sec. cor. of secs. 13 and 14, monumented with a deteriorated sandstone, 8 x 7 x 4 ins., firmly set and dimly mkd. ¼ on W face, witnessed by an old mound of stone, W of cor.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 37 S R 3 W
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S 14} \quad \quad \text{S 13} \\ \end{array}$
	1976
	Deposit the mkd. stone alongside the iron post.
	Rebuild mound of stone, 3 ft. base, 2 ft. high, W of cor.
	Set a steel fence post alongside the cor.

	N. 0° 02' W., beginning new measurement.
2.00	Trail road, bears NE and SW.
4.00	Bottom of small draw, drains NE.
21.00	Trail road, bears NW and SE.
22.50	Trail road, bears E and W.
29.50	Top of knoll, bears E and W; desc. gradually.
35.00	Trail road, bears NE and SW.
39.85	Point for the cor. of secs. 11, 12, 13, and 14, established at record distance from the original witness cor. and on a line projected from the ¼ sec. cor. of secs. 11 and 12, from which the original bearing trees
	A pinon pine, 17 ins. diam., bears N. 55° E., 84 lks. dist., mkd. T37S R3W S12 BT. (Record, N. 69° 32' E., 61 lks. dist.)
	A juniper, 16 ins. diam., bears S. 77° E., 66 lks. dist., mkd. T37S R3W S13 BT. (Record, S. 50° E., 68 lks. dist.)

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

A pinon pine, 16 ins. diam., bears N. 8° 30' W.,
68 lks. dist., T37S R3W S11 BT. (Record,
N. 23° 37' W., 42 lks. dist.)

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

S 11	S 12
S 14	S 13

1976

From the cor. of secs. 7, 12, 13, and 18, on the E. bdy.
of the Tp. heretofore described

N. 89° 38' W., bet. secs. 12 and 13.

Over broken mountainous land, through scattered pinon
and juniper growth.

- 7.10 Wash, 30 lks. wide, 6 ft. deep, drains SW.
23.00 Paria River, 4 ins. deep, 2.00 chs. wide, flows SE.
28.00 State Highway No. 54, bears N and S on curve.
30.00 Base of hill, bears S and NW; asc. NE slope.
39.37 Point for the ¼ sec. cor. of secs. 12 and 13, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

¼	S 12
	S 13

1976

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

- 58.00 Rim of bench, bears NW and SE; over rolling land.
76.50 Trail road, bears NE and SW.
78.74 The cor. of secs. 11, 12, 13, and 14.

N. 0° 03' E., bet. secs. 11 and 12.

Over broken mountainous land, through scattered pinon
and juniper growth; desc. NE slope.

- 0.10 The original witness cor. for secs. 11, 12, 13, and 14,
monumented with a sandstone, 17 x 6 x 5 ins., firmly set
and plainly mkd. 4 notches on the S and 1 notch on the E
edges, and W C. on NE face. This cor. will now function
as an angle point only, mkd. A P.


Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
15.00	Bottom of Bulldog Hollow, drains E; asc. SW slope.
25.00	Top of steep asc.; over series of spurs and draw, SE.
34.00	Draw, drains SE.
40.12	<p>The $\frac{1}{4}$ sec. cor. of secs. 11 and 12, monumented with a limestone, 14 x 8 x 5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees</p> <p>A pinon pine, 14 ins. diam., bears N. 45° E., 66 lks. dist., mkd. $\frac{1}{4}$ S12 BT. (Record, N. 15° E., 46 lks. dist.)</p> <p>A pinon pine, 10 ins. diam., bears S. 16° 15' W., 37 lks. dist., mkd. $\frac{1}{4}$ S11 BT. (Record, 50 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 37 S R 3 W</p> <p>$\frac{1}{4}$</p> <p>S 11 S 12</p> <p>1977</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 01' W., beginning new measurement.</p>
0.50	Small wash, 10 lks. wide, 1 ft. deep, drains SE.
5.00	Wash in draw, 15 lks. wide, 2 ft. deep, drains SE.
32.00	Wash, 20 lks. wide, 2 ft. deep, drains SE.
39.91	<p>The cor. of secs. 1, 2, 11, and 12, monumented with a sandstone, 16 x 13 x 5 ins., firmly set and plainly mkd. 5 notches on the S and 1 notch on the E edges, from which the original bearing trees</p> <p>A pinon pine, 14 ins. diam., bears N. 50° E., 74 lks. dist., mkd. T37S R3W S1 BT. (Record, N. 68° E., 64 lks. dist.)</p> <p>A pinon pine, 12 ins. diam., bears N. 10° W., 56 lks. dist., mkd. T37S R3W S2 BT. (Record, N. 30° W., 34 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS						
	<p>T 37 S R 3 W</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 11</td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p>1977</p>	S 2	S 1	S 11	S 12	
S 2	S 1					
S 11	S 12					
	<p>Deposit the mkd. stone and broken glass alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>					
	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp. heretofore described.</p> <p>N. 89° 43' W., bet. secs. 1 and 12.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p>					
12.00	Paria River, 2 chs. wide, 4 ins. deep, flows SE.					
21.00	State Highway No. 54, bears NW and S on curve; asc. E slope.					
38.85	<p>The ¼ sec. cor. of secs. 1 and 12, monumented with a sandstone, 17 x 10 x 5 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 12 ins. diam., bears S. 30° E., 26 lks. dist., mkd. ¼ S12 BT. (Record, cedar, South, 2 lks. dist.)</p> <p style="padding-left: 40px;">A pinon pine, 10 ins. diam., bears N. 30° W., 24 lks. dist., mkd. ¼ S1 BT. (Record, N. 25° W., 82 lks. dist.)</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
	<p>T 37 S R 3 W</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 1</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 12</td> </tr> </table> <p>1977</p>	¼	S 1		S 12	
¼	S 1					
	S 12					
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on gentle NE slope.</p>					
	<p>N. 89° 34' W., beginning new measurement.</p>					
4.30	Ridge, bears NW and SE; desc. SW slope.					
14.00	Wash in draw, 20 lks. wide, 2 ft. deep, drains SE; asc. NE slope.					
23.00	Top of low ridge, bears NW and SE; over rolling land.					
39.99	The cor. of secs. 1, 2, 11, and 12.					

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	N. 0° 19' W., bet. secs. 1 and 2. Over broken mountainous land, through scattered pinon and juniper growth.
0.06	Barbed wire fence, bears E and W., 70 lks. dist. to end.
11.00	Desc. N - NE slope.
14.00	Wash in draw, 20 lks. wide, 3 ft. deep, drains SE; asc. S slope.
17.10	Spur, slopes SE; desc. NE slope.
33.00	State Highway No. 54, bears N. 76° W. and S. 76° E., over gentle rolling land, no timber.
37.00	Bryce Creek, (dry) 2 chs. wide, 10 ft. deep, drains SE.
40.11	Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner. Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, flush with the surface of driveway, with brass cap mkd.
	<p>T 37 S R 3 W</p>  <p>1977</p>
	Cor. is located 6 lks. W of gate in N - S fence line. Over cultivated land.
46.50	Dirt road, bears E and W.
79.58	The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp. heretofore described.
	From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp. heretofore described.
	N. 0° 02' E., bet. secs. 34 and 35. Over broken mountainous land, through scattered pinon and juniper growth; asc. SW slope.
2.00	Top of steep asc.; over rolling land, railed.
7.75	Low ridge, bears NW and SE.
31.00	Jim Hollow, drains SE.
40.01	The ¼ sec. cor. of secs. 34 and 35, monumented with a sandstone, 20 x 8 x 4 ins., firmly set and plainly mkd. ¼ on W face, original bearing trees railed out.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

¼
|
S 34 | S 35

1976

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Cor. is located on S slope of small draw, drains SE.

N. 0° 01' E., beginning new measurement.

- 11.00 Rim of bench, bears NW and SE; desc. NE slope of canyon, through pinon and juniper growth.
- 30.00 Wash in canyon, 50 lks. wide, 15 ft. deep, drains SE.; asc. gradually.
- 39.73 Point for the cor. of secs. 26, 27, 34, and 35, established at record distance from the original witness cor. and on a line projected from the ¼ sec. cor. of secs. 26 and 27.
- Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

S 27 | S 26
S 34 | S 35

1976

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Cor. is located at head of draw, drains S., with ledges to the E, W, and N.

From the cor. of secs. 25, 26, 35, and 36.

N. 89° 51' W., bet. secs. 26 and 35.

Over mountainous land, through scattered pinon and juniper growth; along E - W fence line.

- 19.50 Wash, 30 lks. wide, 5 ft. deep, drains SE.
- 36.00 Trail road, bears N and S.
- 38.75 Yellow Creek, 50 lks. wide, 3 ins. deep, flows SE.
- 40.06 The ¼ sec. cor. of secs. 26 and 35, monumented with a sandstone, 18 x 6 x 5 ins., firmly set and plainly mkd. ¼ on N face, from which an original bearing tree

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
	<p>A pinon pine, 16 ins. diam., bears N. 32° W., 18 lks. dist., mkd. ¼ S26 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">¼ $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in E - W fence line.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 32' W., beginning new measurement.</p>	
25.00	Base of broken ledges, bears N and S; asc. E slope.	
30.50	Spur, slopes S; along S slope.	
36.00	Spur, slopes SW; desc. steep W slope.	
40.12	The cor. of secs. 26, 27, 34, and 35.	
	<p>N. 0° 02' W., bet. secs. 26 and 27.</p> <p>Over broken mountainous land, through pinon and juniper growth; asc. S slope over broken ledges.</p>	
3.905	<p>The original witness cor. to secs. 26, 27, 34, and 35, monumented with a sandstone, 19 x 6 x 5 ins., firmly set in a mound of stone and plainly mkd. 2 notches on the E and 1 notch on the S edges, and W C on S face. This point will now function as an angle point only.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., on solid sandstone, over an X chiseled at cor. point and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">A P</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">S 27 S 26</p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone in mound alongside the iron post.</p>	
7.50	Rim of mesa, bears E and W.; over rolling land.	
14.50	Rim of mesa, bears NW and SE; desc. abruptly over NE slope.	
25.00	Base of hill, bears NW and SE; over rolling land.	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
40.20	<p>The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone, 24 x 8 x 3 ins., firmly set and plainly mkd. ¼ on W face, from which an original bearing tree</p> <p>A pinon pine, 15 ins. diam., bears N. 29° E., 77 lks. dist., mkd. T37S R3W ¼ S26 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 27 S 26 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on nearly level land and in thick stand of pinon and juniper growth.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 03' E., beginning new measurement.</p>
15.00	<p>Yellow Creek, (dry), 1 ch. wide, 3 ft. deep, flows SE; asc. gradually.</p>
40.06	<p>The cor. of secs. 22, 23, 26, and 27, monumented with a sandstone, 20 x 10 x 3 ins., firmly set and plainly mkd. 2 notches on the S and E edges, from which the original bearing objects</p> <p>A boulder, 8 x 6 x 5 ft. above ground, bears N. 50° E., 136 lks. dist., mkd. S23 B O.</p> <p>A boulder, 8 x 6 x 4 ft. above ground, bears N. 25° W., 81 lks. dist., dimly mkd. S22 B O.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> S 22 S 23 S 27 S 26 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a juniper post, 6 ft. long, alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>
	<p>From the cor. of secs. 23, 24, 25, and 26.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>N. 89° 59' W., bet. secs. 23 and 26.</p> <p>Over broken mountainous land, through pinon and juniper growth; desc. SW slope.</p>
3.00	Base of hill, bears NW and SE; over rolling land.
14.00	Wash, 50 lks. wide, 15 ft. deep, drains S.
18.00	Wash, 60 lks. wide, 15 ft. deep, drains S.
40.17	<p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 23 and 26.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>W C</p> <p>T 37 S R 3 W</p> <p>$\frac{1}{4}$ ← $\frac{S\ 23}{S\ 26}$</p> <p>1976</p> </div>
40.57	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, N of cor.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at proportionate distance, falls in wash, 10 lks. wide, 1 ft. deep, drains SE and therefore is impractical to establish a permanent monument; there is no remaining evidence of the original corner.</p>
42.00	Asc. steep E slope of hill.
52.00	E rim of bench, bears N and S; over rolling land.
64.00	W rim of bench, bears NW and SE; desc. steep SW slope.
78.00	Base of steep desc.; bears NW and SE, over rolling land.
81.14	The cor. of secs. 22, 23, 26, and 27.
	<p>N. 0° 01' W., bet. secs. 22 and 23.</p> <p>Over broken mountainous land, through pinon and juniper growth.</p>
3.00	Asc. steep broken SW slope.
23.00	Rim of bench, bears NW and SE; over rolling land, railed.
40.51	<p>The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a cedar post, 30 x 4 x 4 ins., firmly set and dimly mkd. $\frac{1}{4}$ S22 on W face, from which an original bearing tree</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears N. 42° W., 122 lks. dist., mkd. $\frac{1}{4}$ S22 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T 37 S R 3 W

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 22 \quad | \quad \text{S } 23 \\ | \end{array}$$

1977

Set the mkd. cedar post alongside the iron post.

Set a steel fence post alongside the cor.

N. 0° 01' W., beginning new measurement.

Over rolling land.

40.12 The cor. of secs. 14, 15, 22, and 23, monumented with a sandstone, 14 x 8 x 6 ins., firmly set and plainly mkd. 3 notches on the S and 2 notches on the E edges, from which the original bearing trees

A pinon pine, 14 ins. diam., bears N. 64° E., 68 lks. dist., mkd. T37S R3W S14 BT. (Dead on ground)

A pinon pine, 14 ins. diam., bears S. 51° 30' E., 62.5 lks. dist., mkd. T37S R3W S23 BT.

A cedar, 15 ins. diam., bears S. 15° 32' W., 41.5 lks. dist., mkd. T37S R3W S22 BT.

A pinon pine, 12 ins. diam., bears N. 22° W., 75.5 lks. dist., mkd. T37S R3S S15 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

$$\begin{array}{c} \text{S } 15 \quad | \quad \text{S } 14 \\ \text{S } 22 \quad | \quad \text{S } 23 \end{array}$$

1977

Deposit the mkd. stone alongside the iron post.

Set a steel fence post alongside the cor.

From the cor. of secs. 13, 14, 23, and 24.

N. 89° 46' W., bet. secs. 14 and 23.

Over rolling bench land, through scattered pinon and juniper growth; asc. NE slope.

2.50 Trail road, bears N and S.

13.50 Top of low hill, bears N and S; over rolling land, railed.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
25.00	Trail road, bears NW and SE.	
39.00	Wash, 15 lks. wide, 2 ft. deep, drains SE.	
41.20	<p>The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, monumented with a sandstone, 28 x 6 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 15 ins. diam., bears S. 11° 50' E., 139 lks. dist., mkd. $\frac{1}{4}$ S23 BT.</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 88° 20' W., 62 lks. dist., mkd. $\frac{1}{4}$ S14 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 14}{S 23}$</p> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 56' W., beginning new measurement.</p>	
26.00	Top of small knoll, bears N and S.	
32.00	Shallow draw, drains SE.	
40.10	The cor. of secs. 14, 15, 22, and 23.	
	N. 0° 02' W., bet. secs. 14 and 15.	
	Over rolling bench land, railed.	
31.00	Shallow draw, drains SE.	
36.00	Trail road, bears NW and SE.	
40.13	<p>The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a limestone, 12 x 12 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 20 ins. diam., bears S. 7° 45' E., 37 lks. dist., mkd. T37S R3W $\frac{1}{4}$ S14 BT.</p> <p style="padding-left: 40px;">A pinon pine, 14 ins. diam., bears S. 6° W., 53 lks. dist., mkd. T37S R3W $\frac{1}{4}$ S15 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{3}{4}$ S 15 S 14 1977 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the corner.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>North, beginning new measurement.</p> <p>15.00 Rim of bench, bears E and W; desc. steep NE slope, through scattered pinon and juniper growth, over series of draws and spurs, NE.</p> <p>38.50 Small draw, drains NE; asc. SE slope of spur.</p> <p>39.91 The cor. of secs. 10, 11, 14, and 15, monumented with a sandstone, 18 x 9 x 6 ins., firmly set and plainly mkd. 4 notches on the S and 2 notches on the E edges, from which the original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears S. 74° 09' W., 78 lks. dist., mkd. T37S R3W S15 BT.</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 62° 25' W., 97.5 lks. dist., mkd. T37S R3W S10 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> S 10 S 11 S 15 S 14 1977 </p> <p>Deposit the mkd. stone alongside the iron post.</p>	
	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. 88° 51' W., bet. secs. 11 and 14.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p> <p>32.00 Wash, 30 lks. wide, 5 ft. deep, drains NE.</p> <p>41.78 The ¼ sec. cor. of secs. 11 and 14, established at record bearing and distance from its original bearing tree</p> <p style="padding-left: 40px;">A cedar, 14 ins. diam., bears S. 46° W., 256 lks. dist., mkd. ¼ S14 BT.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">¼ $\frac{S\ 11}{S\ 14}$</p> <p style="text-align: center;">1977</p> <p>Set a pine post, 7 ft. long, alongside the cor.</p> <p>Cor. is located inside old cedar post corral.</p> <p>From this cor., a sandstone, 14 x 10 x 6 ins., lying loose on the ground and dimly mkd. ¼, bears S. 69° 56' E., 205 lks. dist. Appears the original cor. was moved when old cedar post corral was built.</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p style="text-align: center;">—————</p> <p>S. 89° 06' W., beginning new measurement.</p> <p>Over series of spurs and draws; asc. NE slope.</p> <p>2.50 Trail road, bears NW and SE.</p> <p>8.00 Wash, 30 lks. wide, 2 ft. deep, drains NE.</p> <p>25.00 Wash, 40 lks. wide, 3 ft. deep, drains NE.</p> <p>35.00 Small wash, drains NE; asc. SE slope of clay spur.</p> <p>39.66 The cor. of secs. 10, 11, 14, and 15.</p>
	<p>N. 0° 01' W., bet. secs. 10 and 11.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p> <p>0.50 Top of small clay spur, slopes NE; over series of spurs and draws, NE.</p> <p>4.50 Wash in draw, drains NE.</p> <p>20.00 Bulldog Hollow, 50 lks. wide, 3 ft. deep, drains SE; asc. SW slope.</p> <p>32.50 Ridge, bears NW and SE; desc. NE slope.</p> <p>36.00 Trail road, bears NW and SE.</p> <p>40.08 The ¼ sec. cor. of secs. 10 and 11, monumented with a sandstone, 14 x 6 x 4 ins., firmly set and plainly mkd. ¼ on W face; there is no remaining evidence of the original bearing trees.</p> <p>At the corner point</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T 37 S R 3 W

¼
|
S 10 | S 11
|

1977

Deposit the mkd. stone alongside the iron post.

N. 0° 03' W., beginning new measurement.

- 0.70 Small wash, 10 lks. wide, 1 ft. deep, drains E; asc. SE slope.
- 3.00 Point of spur, slopes E; desc. NE slope.
- 6.50 Wash, 30 lks. wide, 5 ft. deep, drains SE; asc. SW slope.
- 16.00 Asc. gradually; over railed area.
- 39.80 Enter pinon and juniper growth, bears E and W, 50 lks. dist., thence N.
- 40.04 The cor. of secs. 2, 3, 10 and 11, monumented with a cedar post, 30 x 4 x 4 ins., firmly set and dimly mkd. 5 notches on the S and 2 notches on the E edges, from which the original bearing trees

A pinon pine, 14 ins. diam., bears N. 26° 11' E.,
46 lks. dist., mkd. T37S R3W S2 BT.

A pinon pine, 12 ins. diam., bears S. 12° 10' E.,
18 lks. dist., mkd. T37S R3W S11 BT.

A pinon pine, 10 ins. diam., bears S. 45° 20' W.,
28 lks. dist., mkd. T37S R3W S10 BT.

A cedar, 10 ins. diam., bears N. 35° W., 85 lks.
dist., mkd. T37S R3W S3 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

S 3 | S 2
S 10 | S 11

1977

Set the mkd. cedar post alongside the iron post.

From the cor. of secs. 1, 2, 11, and 12.

N. 89° 29' W., bet. secs. 2 and 11.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
	Over mountainous land, through pinon and juniper growth; asc. gentle SE slope.	
30.00	Wash in draw, 15 lks. wide, 2 ft. deep, drains SE.	
41.30	The $\frac{1}{4}$ sec. cor. of secs. 2 and 11, monumented with a limestone, 18 x 8 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face, from which the original bearing trees A cedar, 12 ins. diam., bears S. 68° W., 33 lks. dist., mkd. $\frac{1}{4}$ S11 BT. A pinon pine, 12 ins. diam., bears N. 66° 18' W., 60 lks. dist., mkd. $\frac{1}{4}$ S2 BT. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd. T 37 S R 3 W $\frac{1}{4}$ $\frac{S 2}{S 11}$ 1977 Deposit the mkd. stone alongside the iron post. Cor. is located on rolling land, with railed area to S. _____ West, beginning new measurement. Along N edge of railed area.	
40.13	The cor. of secs. 2, 3, 10, and 11.	
	N. 0° 20' E., bet. secs. 2 and 3. Over mountainous land, through pinon and juniper growth; railed to West.	
20.50	Trail road, bears E and W.	
26.00	N rim of bench, bears E and W; desc. steep N slope.	
37.75	Bryce Creek (dry), 2 chs. wide, 3 ft. deep, drains E.; over rolling land.	
39.97	The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, established at record bearing and distance from the one remaining bearing tree that is still standing A pinon pine, 15 ins. diam., bears N. 26° E., 71 lks. dist., mkd. $\frac{1}{4}$ S2 BT. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>T 37 S R 3 W</p> <p style="margin-left: 100px;"> $\frac{1}{4}$ S 3 S 2 </p> <p>1977</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>From this cor., a sandstone, 20 x 8 x 6 ins., lying loose on the ground and mkd. $\frac{1}{4}$, bears N. 5° 19' E., 192 lks. dist., also from this cor., a pinon pine, 20 ins. diam., dead on ground, bears S. 45° W., 127 lks. dist., mkd. $\frac{1}{4}$ S3 BT. Both of these appear to have been moved during the railing of this area. Deposit the mkd. stone alongside the iron post.</p>
	<p>_____</p>
	<p>N. 0° 39' E., beginning new measurement.</p>
10.00	Base of hill, bears E and W; asc. S slope through pinon and juniper growth.
21.50	Narrow ridge, bears E and W; desc. N slope.
28.00	Base of hill, bears E and W; over nearly level land.
36.00	Dirt road, bears E and W.
39.00	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp. heretofore described.
	<p>From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp. heretofore described.</p> <p>N. 0° 04' E., bet. secs. 33 and 34.</p> <p>Over rolling land, through lightly scattered pinon and juniper growth.</p>
6.00	Dirt road, bears NW and SE.
10.00	Sheep Creek (dry), 1 ch. wide, 15 ft. deep, drains SE; asc. gradually.
21.00	Trail road, bears NW and SE.
30.00	Wash, 50 lks. wide, 10 ft. deep, drains SE.
40.08	The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a sandstone, 16 x 6 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 33 S 34 </p> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post, alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 04' E., beginning new measurement.</p> <p>18.00 Wash, 30 lks. wide, 10 ft. deep, drains SE.</p> <p>40.13 Point for the cor. of secs. 27, 28, 33, and 34, determined at the intersection of fences extending E, W, and S. This position is harmoniously related to existing original corners, has long been recognized as the cor. by adjacent landowners and is accepted as the best available evidence of the original cor. position.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> S 28 S 27 S 33 S 34 </p> <p style="text-align: center;">1976</p>	
	<p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>N. 89° 08' W., bet. secs. 27 and 34.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p> <p>2.00 Point of ledges, projecting S.</p> <p>10.00 Wash in canyon, 50 lks. wide, 10 ft. deep, drains SE; asc. NE slope.</p> <p>26.50 Rim of bench, bears NW and SE; over rolling land, railed.</p> <p>40.02 The ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone, 16 x 12 x 6 ins., firmly set and plainly mkd. ¼ on N face, the original bearing trees railed out.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS		
	<p>T 37 S R 3 W</p> <p>$\frac{1}{4}$ $\frac{S 27}{S 34}$</p> <p>1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 53' W., beginning new measurement.</p>	
8.00	Jim Hollow, drains SE; asc. gentle NE slope.	
13.00	Trail road, bears NW and SE.	
16.00	Low ridge, bears NW and SE; desc. SW slope.	
36.00	Small wash, 10 lks. wide, 5 ft. deep, drains S; over rolling land.	
40.03	The cor. of secs. 27, 28, 33, and 34.	
	<p>N. 0° 01' W., bet. secs. 27 and 28.</p> <p>Over rolling mountainous land, railed; asc. gentle S slope.</p>	
18.00	Wash, 10 lks. wide, 5 ft. deep, drains SE; asc. SW slope.	
33.00	Ridge, bears NW and SE; desc. gentle NE slope.	
36.00	Trail road, bears NW and SE.	
40.00	The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a limestone, 20 x 9 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, original bearing trees railed out.	
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p>T 37 S R 3 W</p> <p>$\frac{1}{4}$</p> <p>S 28 S 27</p> <p>1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 05' E., beginning new measurement.</p>	
2.50	Jim Hollow drains SE; asc. SW slope.	
25.00	Enter pinon and juniper growth.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS							
39.98	<p>The cor. of secs. 21, 22, 27, and 28, monumented with a sandstone, 16 x 8 x 6 ins., firmly set and plainly mkd. 3 notches on the E and 2 notches on the S edges, from which the two remaining bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 10 ins. diam., bears S. 40° E., 29 lks. dist., mkd. T37S R3W S27 BT.</p> <p style="padding-left: 40px;">A pinon pine, 10 ins. diam., bears N. 35° W., 67 lks. dist., mkd. T37S R3W S21 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 21</td> <td style="padding: 0 5px;">S 22</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 28</td> <td style="padding: 0 5px;">S 27</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on SW slope of hill.</p>	S 21	S 22	S 28	S 27		
S 21	S 22						
S 28	S 27						
16.50	<p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>N. 89° 42' W., bet. secs. 22 and 27.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth; desc. gentle SW slope.</p>						
30.00	<p>Yellow Creek (dry), 2 chs. wide, 4 ft. deep, drains S; asc. gentle SE slope.</p> <p>Base of hill, bears NE and SW; asc. steep SE slope of clay hill.</p>						
39.98	<p>Point for the ¼ sec. cor. of secs. 22 and 27, at proportionate distance, falls on steep SE slope where it is impractical to establish a permanent monument; there is no remaining evidence of the original corner.</p>						
40.68	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 22 and 27.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">¼</td> <td style="border-right: 1px solid black; padding: 0 5px;">S 22</td> <td style="padding: 0 5px;">→</td> </tr> <tr> <td></td> <td style="border-right: 1px solid black; padding: 0 5px;">S 27</td> <td></td> </tr> </table> <p style="text-align: center;">1976</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p>	¼	S 22	→		S 27	
¼	S 22	→					
	S 27						
42.00	<p>Head of small draw, drains SE; asc. NE slope.</p>						

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
53.00	Spur, slopes NE; desc. NW slope.
57.00	Wash in draw, 15 lks. wide, 3 ft. deep, drains NE; asc. NE slope.
79.00	Top of hill, bears NW and SE; desc. SW slope.
79.96	The cor. of secs. 21, 22, 27, and 28.
N. 0° 03' E., bet. secs. 21 and 22.	
Over broken mountainous land, through scattered pinon and juniper growth; asc. SW slope.	
2.50	Top of hill, bears NW and SE; desc. gentle rolling NE slope.
18.00	Small draw, drains E; over rolling land.
31.75	Rim of bench, bears NW and SE; desc. steep NE slope.
34.50	Small draw, drains NE.
35.50	Spur, slopes E.
37.50	Enter small sagebrush flat.
39.96	The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 18 x 10 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which an original bearing tree
	A cedar, 14 ins. diam., bears S. 70° W., 97 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone, with brass cap mkd.
	T 37 S R 3 W
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S 21} \quad \quad \text{S 22} \\ \end{array}$
	1977
	Deposit the mkd. stone alongside the iron post.
	N. 0° 02' E., beginning new measurement.
6.00	Leave flat; desc. NE slope.
14.00	Yellow Creek, 50 lks. wide, 2 ins. deep, flows E; asc. S slope.
30.00	Spur, slopes SE.
32.50	Draw, drains SE; asc. SE slope.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS							
36.00	Rim of bench, bears NE and SW; over rolling land.						
39.80	<p>The cor. of secs. 15, 16, 21, and 22, monumented with a granite stone, 14 x 6 x 6 ins., firmly set and plainly mkd. 3 notches on the E and S edges, from which the original bearing trees</p> <p>A pinon pine, 14 ins. diam., bears N. 3° 35' E., 61 lks. dist., mkd. T37S R3W S15 BT.</p> <p>A pinon pine, 12 ins. diam., bears S. 12° 40' E., 37 lks. dist., mkd. T37S R3W S22 BT.</p> <p>A pinon pine, 10 ins. diam., bears S. 45° W., 70 lks. dist., mkd. T37S R3W S21 BT.</p> <p>A pinon pine, 12 ins. diam., bears N. 8° 10' W., 72 lks. dist., mkd. T37S R3W S16 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">S 16</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 15</td> </tr> <tr> <td style="text-align: center;">S 21</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 22</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p>	S 16		S 15	S 21		S 22
S 16		S 15					
S 21		S 22					
7.00	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>S. 89° 17' W., bet. secs. 15 and 22.</p> <p>Over rolling bench land, railed.</p> <p>Rim of bench, bears NW and SE; desc. steep SW slope, through scattered pinon and juniper growth.</p>						
37.00	Merrill Hollow, drains SE; asc. steep NE slope.						
40.12	<p>The ¼ sec. cor. of secs. 15 and 22, monumented with a sandstone, 16 x 10 x 4 ins., firmly set and plainly mkd. ¼ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top of brass cap, mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">¼</td> <td style="text-align: center;">S 15</td> </tr> <tr> <td></td> <td style="text-align: center;">S 22</td> </tr> </table> <p style="text-align: center;">1977</p>	¼	S 15		S 22		
¼	S 15						
	S 22						

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Deposit the mkd. stone alongside the iron post.</p> <hr/> <p>N. 89° 58' W., beginning new measurement.</p>
26.00	Top of ridge, bears NW and SE; desc. SW slope.
30.00	Draw, drains SE; asc. NE slope.
37.75	Rim of bench, bears NE and SW; over rolling bench land.
39.76	The cor. of secs. 15, 16, 21, and 22.
	<p>N. 0° 16' W., bet. secs. 15 and 16.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth.</p>
14.00	Draw, drains SE.
21.00	Rim of bench, bears E and W; desc. N slope.
33.00	Wash in Death Hollow, 30 lks. wide, 5 ft. deep, drains E; asc. SW slope.
39.42	<p>The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a limestone, 24 x 12 x 10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <div style="text-align: center;"> $\frac{1}{4}$ S 16 S 15 1977 </div>
	<p>Deposit the mkd. stone alongside the iron post.</p> <hr/> <p>N. 0° 20' E., beginning new measurement.</p>
5.00	Clay spur, slopes SE; desc. NE slope.
20.00	Merrill Hollow, 30 lks. wide, 5 ft. deep, drains SE; asc. SW slope.
40.00	Small spur, slopes W; desc. NW slope.
40.44	<p>The cor. of secs. 9, 10, 15, and 16, monumented with a limestone, 20 x 8 x 6 ins., firmly set and plainly mkd. 4 notches on the S and 3 notches on the E edges, from which the original bearing trees</p> <p style="margin-left: 40px;">A pinon, 14 ins. diam., bears S. 10° E., 18 lks. dist., mkd. T37S R3W S15 BT.</p> <p style="margin-left: 40px;">A cedar, 16 ins. diam., bears S. 80° W., 40$\frac{1}{2}$ lks. dist., mkd. T37S R3W S16 BT.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS						
	<p>A pinon pine, 16 ins. diam., bears N. 30° W., 36 lks. dist., mkd. T37S R3W S9 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 9</td> <td style="padding: 0 5px;">S 10</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 16</td> <td style="padding: 0 5px;">S 15</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	S 9	S 10	S 16	S 15	
S 9	S 10					
S 16	S 15					
	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>S. 88° 56' W., bet. secs. 10 and 15.</p> <p>Over broken mountainous land, through pinon and juniper growth; asc. NE slope.</p>					
10.00	Draw, drains NE.					
39.00	Rim of bench, bears NW and SE; over rolling bench land.					
39.93	<p>The ¼ sec. cor. of secs. 10 and 15, monumented with a limestone, 14 x 8 x 6 ins., firmly set and plainly mkd. ¼ on N face, from which the remaining original bearing tree</p> <p style="text-align: center;">A pinon pine, 12 ins. diam., bears S. 70° E., 24 lks. dist., mkd. ¼ S15 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 10</td> <td style="padding: 0 5px;">S 15</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the cor.</p>	¼ S 10	S 15			
¼ S 10	S 15					
	<p style="text-align: center;">_____</p> <p>N. 89° 53' W., beginning new measurement.</p> <p>Over rolling bench land, railed.</p>					
4.00	Trail road, bears NW and SE.					
24.00	Draw, drains SE.					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
28.00	Rim of bench, bears NW and SE; desc. SW slope, through pinon and juniper growth.
39.40	Spur, slopes SW; desc. NW slope.
39.86	The cor. of secs. 9, 10, 15, and 16.
N. 0° 03' E., bet. secs. 9 and 10.	
Over broken mountainous land, through scattered pinon and juniper growth; asc. SW slope.	
14.50	Rim of bench, bears NW and SE; over rolling bench land, railed.
24.00	Trail road, bears NW and SE.
31.00	Rim of bench, bears E and W; desc. N slope, through pinon and juniper growth.
39.81	The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a limestone, 20 x 8 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which an original bearing tree
A pinon pine, 14 ins. diam., bears N. 25° E., 157 lks. dist., mkd. $\frac{1}{4}$ S10 BT.	
At the corner point	
Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.	
T 37 S R 3 W	
$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 9 \quad \quad \text{S } 10 \\ \end{array}$	
1977	
Deposit the mkd. stone alongside the iron post.	
Set a small cedar post alongside the cor.	
Cor. is located on small spur, slopes NE.	
N. 0° 02' E., beginning new measurement.	
25.00	Draw, drains SE; asc. SW slope.
29.00	Rim of bench, bears NW and SE; over rolling bench land, railed.
39.94	The cor. of secs. 3, 4, 9, and 10, monumented with a sandstone, 16 x 12 x 6 ins., firmly set and plainly mkd. 5 notches on the S and 3 notches on the E edges, from which the 1 remaining bearing tree
A dead pinon pine, 14 ins. diam., bears S. 45° W., 33 lks. dist., mkd. T37S R3W S9 BT.	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS						
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 4</td> <td style="padding: 0 5px;">S 3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 9</td> <td style="padding: 0 5px;">S 10</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a steel fence post alongside the cor.</p>	S 4	S 3	S 9	S 10	
S 4	S 3					
S 9	S 10					
<p>39.57</p>	<p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>S. 88° 23' W., bet. secs. 3 and 10.</p> <p>Over mountainous land, railed and reseeded; gently rolling.</p> <p>The ¼ sec. cor. of secs. 3 and 10, monumented with a granite stone, 15 x 8 x 6 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing tree</p> <p style="padding-left: 40px;">A pinon pine, 10 ins. diam., bears N. 80° E., 48 lks. dist., mkd. T37S R3W ¼ S3 BT.</p> <p>and an unrecorded bearing tree</p> <p style="padding-left: 40px;">A cedar, 15 ins. diam., bears S. 45° W., 28 lks. dist., mkd. T37S R3W ¼ S10 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">¼</td> <td style="border-right: 1px solid black; padding: 0 5px;">S 3</td> <td style="padding: 0 5px;">S 10</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 54' W., beginning new measurement.</p> <p>Over rolling bench land, railed.</p>	¼	S 3	S 10		
¼	S 3	S 10				
<p>23.00</p> <p>40.10</p>	<p>Trail road, bears N and S.</p> <p>The cor. of secs. 3, 4, 9, and 10.</p>					
<p>0.50</p>	<p>N. 0° 24' E., bet. secs. 3 and 4.</p> <p>Over rolling bench land, railed.</p> <p>Trail road, bears SW and NE.</p>					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
10.50	Rim of bench, bears E and W; desc. N slope, through scattered pinon and juniper growth.
20.00	Base of hill, bears E and W; over rolling land.
24.00	Dirt road, bears SW and NE on curve.
29.00	Bryce Creek (dry), 20 lks. wide, 4 ft. deep, drains NE.
40.04	The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a sandstone, 18 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees
	A dead pinon pine, 12 ins. diam., bears S. 25° E., 170 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
	A cedar, 14 ins. diam., bears S. 50° W., 135 lks. dist., mkd. $\frac{1}{4}$ S4 BT.
	At the corner point
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 4 S 3 1977 </p>
	Deposit the mkd. stone alongside the iron post.
	Cor. is located at cor. of old fence, bears E, W, and S to road, thence W.
	N. 0° 07' E., beginning new measurement.
22.00	Wash, 2 chs. wide, 3 ft. deep, drains SE.
29.00	Trail road, bears NW and SE.
39.72	The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., heretofore described.
	From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp. heretofore described.
	N. 0° 01' E., bet. secs. 32 and 33.
	Over mountainous land, through scattered pinon and juniper growth; desc. NE slope.
23.00	Base of hill, bears E and W; over gentle rolling land.
32.00	Sheep Creek (dry), 50 lks. wide, 6 ft. deep, drains E.
35.00	Dirt road, bears NW and SE.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
40.11	<p>The ¼ sec. cor. of secs. 32 and 33, monumented with a sandstone, 18 x 8 x 5 ins., firmly set and plainly mkd. ¼ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 32 S 33 1976 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in old N - S fence line, no wire.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 03' E., beginning new measurement.</p>
39.50	<p>Wash, 10 lks. wide, 15 ft. deep, drains E.</p>
40.00	<p>The cor. of secs. 28, 29, 32, and 33, monumented with a sandstone, 14 x 8 x 5 ins., firmly set and plainly mkd. 4 notches on the E and 1 notch on the S edges.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> S 29 S 28 S 32 S 33 1976 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in fence line extending E and W.</p>
	<p>From the cor. of secs. 27, 28, 33, and 34.</p> <p>N. 89° 55' W., bet. secs. 28 and 33.</p> <p>Over gentle rolling land, railed and reseeded; along fence.</p>
14.50	<p>Wash, 20 lks. wide, 6 ft. deep, drains S.</p>
39.50	<p>Wash, 30 lks. wide, 5 ft. deep, drains SE.</p>
40.13	<p>The ¼ sec. cor. of secs. 28 and 33, monumented with a sandstone, 18 x 10 x 5 ins., firmly set and plainly mkd. ¼ on N face.</p> <p>At the corner point</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

¼ $\frac{S\ 28}{S\ 33}$

1976

Deposit the mkd. stone alongside the iron post.

Cor. is located 3 lks. N of fence line extending E and W.

N. 89° 54' W., beginning new measurement.

37.00 Wash, 50 lks. wide, 12 ft. deep, drains SE.

39.89 The cor. of secs. 28, 29, 32, and 33.

North, bet. secs. 28 and 29.

Over gentle rolling land, railed and reseeded.

2.00 Wash, 50 lks. wide, 12 ft. deep, drains SE.

34.00 Wash, 50 lks. wide, 15 ft. deep, drains SE; asc. gentle
SW slope, through scattered pinon and juniper growth.

40.11 The ¼ sec. cor. of secs. 28 and 29, monumented with a
sandstone, 14 x 8 x 5 ins., firmly set and plainly mkd.
¼ on W face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

¼
|
S 29 | S 28
|

1976

Deposit the mkd. stone alongside the iron post.

Set a cedar post, 8 ft. long, 30 ins. in the ground,
3 lks. dist., S of the cor.

N. 0° 02' E., beginning new measurement.

8.00 Base of hill, bears NW and SE; asc. steep SW slope.

12.75 Spur, slopes SE; desc. NE slope.

21.00 Draw, drains SE; asc. SW slope.

36.00 Rim of bench, bears NW and SE; over rolling bench land,
railed to the E.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS						
39.69	<p>The cor. of secs. 20, 21, 28, and 29, monumented with a sandstone, 18 x 8 x 6 ins., firmly set and plainly mkd. 4 notches on the E and 2 notches on the S edges, from which the remaining original bearing trees</p> <p>A juniper, 20 ins. diam., bears N. 50° E., 75 lks. dist., mkd. T37S R3W S21 BT.</p> <p>A juniper, 8 ins. diam., bears S. 79° E., 41 lks. dist., mkd. T37S R3W S28 BT.</p> <p>A juniper, 10 ins. diam., bears N. 40° W., 36 lks. dist., mkd. T37S R3W S20 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 29</td> <td style="padding: 0 5px;">S 28</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, NW of cor.</p> <p>Cor. is located at the cor. of barbed wire fence line, extending N and W.</p>	S 20	S 21	S 29	S 28	
S 20	S 21					
S 29	S 28					
7.00	<p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>S. 89° 59' W., bet. secs. 21 and 28.</p> <p>Over mountainous land, through scattered pinon and juniper growth; desc. gentle SW slope.</p>					
20.50	<p>Enter railed area; over gentle rolling land.</p>					
32.00	<p>Trail road, bears N and S.</p>					
40.02	<p>Top of low rise, bears NW and SE.</p> <p>The ¼ sec. cor. of secs. 21 and 28, monumented with a sandstone, 16 x 8 x 4 ins., firmly set and plainly mkd. ¼ on N face, original bearing trees railed out.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 28</td> </tr> </table> <p style="text-align: center;">1976</p> <p>Deposit the mkd. stone alongside the iron post.</p>	¼	S 21		S 28	
¼	S 21					
	S 28					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	Set a juniper post alongside the cor.
	S. 89° 58' W., beginning new measurement.
37.00	Trail road, bears NW and SE.
40.02	The cor. of secs. 20, 21, 28, and 29.
	N. 0° 04' E., bet. secs. 20 and 21.
38.00	Over mountainous bench land, railed to E; along barbed wire fence.
40.00	Rim of bench, bears E and W; desc. steep N slope.
40.00	The ¼ sec. cor. of secs. 20 and 21, monumented with a sandstone, 18 x 10 x 6 ins., firmly set and plainly mkd. ¼ on W face, from which the original bearing tree
	A cedar, 8 ins. diam., bears S. 35° W., 70 lks. dist., mkd. T37S R3W ¼ S20 BT. (Record, S. 30° W.)
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;"> $\frac{1}{4}$ S 20 S 21 </p> <p style="text-align: center;">1977</p>
	Deposit the mkd. stone alongside the iron post.
	Cor. is located in barbed wire fence line, extending N and S.
	N. 0° 11' W., beginning new measurement.
9.00	Yellow Creek (dry), 50 lks. wide, 2 ins. deep, course E; asc. S slope.
16.00	Spur, slopes SE; desc. gentle NE slope.
30.00	Draw, 15 lks. wide, 5 ft. deep, drains SE; asc. SW slope.
39.77	The cor. of secs. 16, 17, 20, and 21, monumented with a limestone, 24 x 8 x 6 ins., firmly set and plainly mkd. ¼ notches on the E and 3 notches on the S edges.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

414

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS					
	<p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 17</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located 2 lks. E of barbed wire fence line, extending N and S.</p>	S 17	S 16	S 20	S 21
S 17	S 16				
S 20	S 21				
	<p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>West, bet. secs. 16 and 21.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth; over rolling land.</p>				
5.50	Draw, drains SE.				
19.00	Rim of bench, bears NW and SE; desc. steep SW slope.				
29.00	Wash in draw, 25 lks. wide, 6 ft. deep, drains SE; asc. NE slope of clay hill.				
40.07	Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.				
	<p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top of brass cap, mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">$\frac{1}{4}$</td> <td style="border-right: 1px solid black; padding: 0 5px;">S 16</td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Cor. is located on E slope of clay hill.</p>	$\frac{1}{4}$	S 16	S 21	
$\frac{1}{4}$	S 16	S 21			
43.00	Small spur, slopes SE; along S slope of hill.				
61.00	Spur, slopes SE; continue along S slope.				
77.50	Slope changes; desc. SW slope.				
80.14	The cor. of secs. 16, 17, 20, and 21.				
	<p>N. $0^{\circ} 04'$ E., bet. secs. 16 and 17.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth; asc. SW slope.</p>				
12.00	Rim of bench, bears NE and W; over rolling bench land.				
24.00	Rim of bench, bears E and W; desc. NW slope.				

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 39.80 True point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, at proportionate distance, falls in large wash, drains NE and is impractical to establish a permanent monument.
- 42.02 The original witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a limestone, 14 x 12 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ W C on W face.
- At the corner point
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- W C
T 37 S R 3 W

$\frac{1}{4}$

S 17 | S 16

↓

1977
- Deposit the mkd. stone alongside the iron post.
- Cor. is located on clay spur, slopes NE.
-
- N. $0^{\circ} 11'$ E., beginning new measurement.
- 2.00 Death Hollow, drains E; asc. SW slope.
- 11.00 Rim of bench, bears NW and SE; over rolling land.
- 32.00 Desc. gentle NW slope.
- 34.50 Wash, 40 lks. wide, 8 ft. deep, drains NE; asc. gentle SE slope.
- 37.00 The cor. of secs. 8, 9, 16, and 17, monumented with a sandstone, 24 x 6 x 4 ins., firmly set and plainly mkd. 4 notches on the S and E edges, from which the original bearing trees
- A cedar, 14 ins. diam., bears N. 84° E., 43 lks. dist., mkd. T37S R3W S9 BT.
 - A pinon pine, 5 ins. diam., bears S. 40° E., 165 lks. dist., mkd. T37S R3W S16 BT.
 - A pinon pine, 13 ins. diam., bears S. 85° W., 18 lks. dist., mkd. T37S R3W S17 BT.
 - A cedar, 12 ins. diam., bears N. 8° W., 54 lks. dist., mkd. T37S R3W S8 BT.
- At the corner point
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 37 S R 3 W

S 8 | S 9

S 17 | S 16

1977

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.</p>
	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>S. 89° 14' W., bet. secs. 9 and 16.</p> <p>Over broken mountainous land, through scattered pinon and juniper growth; desc. W slope over series of spurs and draws.</p>
32.50	Merrill Hollow, drains SE; asc. gentle NE slope.
40.44	<p>The ¼ sec. cor. of secs. 9 and 16, monumented with a sandstone, 16 x 10 x 5 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 12 ins. diam., bears S. 20° W., 41 lks. dist., mkd. ¼ S16 BT.</p> <p style="padding-left: 40px;">A pinon pine, 12 ins. diam., bears N. 25° W., 50 lks. dist., mkd. ¼ S9 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <p style="text-align: center;">¼ $\frac{S 9}{S 16}$</p> <p style="text-align: center;">1977</p>
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p> <p style="text-align: center;">_____</p> <p>S. 89° 29' W., beginning new measurement.</p>
0.35	Small draw, drains SE; asc. SE slope.
15.00	Spur, slopes NE; along N slope.
33.00	Spur, slopes N; desc. NW slope.
39.63	The cor. of secs. 8, 9, 16, and 17.
	<p>N. 0° 01' E., bet. secs. 8 and 9.</p> <p>Over broken mountainous land, through pinon and juniper growth.</p>
3.00	Leave Merrill Hollow; asc. SW slope.
11.00	Small rise, bears E and W; over rolling land,

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 33.50 Trail road, bears E and W.
- 39.80 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a sandstone, 22 x 10 x 8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face, from which the original bearing trees
- A yellow pine stump, 44 ins. diam., bears N. 40° E., 160 lks. dist., no visible scribe marks.
- A yellow pine, 44 ins. diam., bears S. 10° W., 103 lks. dist., mkd. $\frac{1}{4}$ S8 BT.
- At the corner point
- Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 37 S R 3 W
- $\frac{1}{4}$
 |
 S 8 | S 9
 |
- 1977
- from which a new bearing tree
- A juniper, 10 ins. diam., bears N. 45° E., 20 lks. dist., mkd. $\frac{1}{4}$ BT.
- Deposit the mkd. stone alongside the iron post.
- Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
-
- N. 0° 01' E., beginning new measurement.
- 20.00 Top of ascent; desc. over N slope.
- 25.00 Draw, drains E; asc. S slope.
- 30.00 Top of rolling hill, bears E and W; desc. NW slope.
- 39.74 The cor. of secs. 4, 5, 8, and 9, monumented with a sandstone, 24 x 6 x 6 ins., firmly set and plainly mkd. 5 notches on the S and 4 notches on the E edges, from which the original bearing trees
- A pinon pine, 8 ins. diam., bears N. 4° E., 37 lks. dist., mkd T37S R3W S4 BT.
- A pinon pine, 12 ins. diam., bears S. 89° E., 26 lks. dist., mkd. T37S R3W S9 BT.
- A pinon pine, 12 ins. diam., bears S. 87° W., 30 lks. dist., mkd. T37S R3W S8 BT.
- A pinon pine, 10 ins. diam., bears N. 85° W., 46 lks. dist., mkd. T37S R3W S5 BT.
- At the corner point
- Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS						
	<p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 5</td> <td style="padding: 0 5px;">S 4</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 8</td> <td style="padding: 0 5px;">S 9</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Set a cedar post, alongside the cor.</p> <p>Cor. is located on steep W slope, 100 lks. E of wash in draw, drains NE.</p>	S 5	S 4	S 8	S 9	
S 5	S 4					
S 8	S 9					
	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 89° 01' W., bet. secs. 4 and 9.</p> <p>Over rolling bench land, railed and reseeded.</p>					
3.50	Trail road, bears NE and SW; asc. gradually.					
32.00	Top of ascent, bears NW and SE; desc. gradually through scattered pinon and juniper growth.					
40.15	<p>The ¼ sec. cor. of secs. 4 and 9, monumented with a sandstone, 16 x 12 x 4 ins., firmly set and plainly mkd. ¼ on N face, from which the original bearing trees</p> <p style="padding-left: 40px;">A dead pinon pine, 14 ins. diam., bears North, 78 lks. dist., mkd. ¼ S4 BT.</p> <p style="padding-left: 40px;">A pinon pine, 14 ins. diam., bears S. 70° W., 40 lks. dist., mkd. ¼ S9 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					
	<p style="text-align: center;">T 37 S R 3 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 4</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 9</td> </tr> </table> <p style="text-align: center;">1977</p> <p>Deposit the mkd. stone alongside the iron post.</p>	¼	S 4		S 9	
¼	S 4					
	S 9					
	<p>S. 89° 26' W., beginning new measurement.</p> <p>Asc. gradual SE slope.</p>					
33.00	Top of ridge, bears NE and SW; desc. steep NW slope.					
39.96	The cor. of secs. 4, 5, 8 and 9.					
	<p>N. 0° 03' W., bet. secs. 4 and 5.</p> <p>Over broken mountainous land, through pinon, yellow pine, juniper and oak brush; desc. NW slope.</p>					

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
3.00	Wash, 35 lks. wide, 3 ft. deep, drains NE; over rolling land.
20.00	Dirt road, bears NW and SE.
28.00	Bryce Creek, 15 lks. wide, 3 ins. deep, course SE.
40.15	The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a sandstone, 16 x 8 x 6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W face.
	<p>At the corner point</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 37 S R 3 W</p> <div style="text-align: center;"> $\frac{1}{4}$ S 5 S 4 1977 </div>
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in barbed wire fence line, extending E and W.</p> <p style="text-align: center;">_____</p> <p>N. $1^{\circ} 24'$ E., beginning new measurement.</p> <p>Asc. SW slope.</p>
14.00	Spur, slopes SE; along E slope.
26.00	Spur, slopes E; desc. NE slope.
33.00	Draw, drains SE; asc. SW slope.
38.00	Spur, slopes SE; desc. NE slope.
40.94	The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., heretofore described.
	<p>From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp. heretofore described.</p> <p>N. $0^{\circ} 02'$ W., bet. secs. 31 and 32.</p> <p>Over mountainous land, through scattered pinon and juniper growth.</p>
8.00	Descend NE slope.
24.00	Sheep Creek (Dry), 50 lks. wide, 3 ft. deep, course E; over rolling land.
26.00	Dirt road, bears E and W.
39.87	The $\frac{1}{4}$ sec. cor. of secs. 31 and 32, established at record bearing and distance from the remaining original bearing tree

420

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

A pinon pine, 12 ins. diam., bears S. 65° W., 29
lks. dist., mkd. T37S R3W ¼ S31 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

¼
|
S 31 | S 32
|

1976

from which

A juniper, 18 ins. diam., bears N. 77° E.,
23 lks. dist., mkd. ¼ BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

Cor. is located at base of hill, bears E and W.

N. 0° 03' W., beginning new measurement.

Asc. S slope.

- 5.00 Ridge, bears NW and SE; desc. NE slope.
- 12.50 Wash in draw, 40 lks. wide, 4 ft. deep, drains SE;
asc. gradually.
- 22.00 Ridge, bears NW and SE; desc. gradually.
- 32.00 Wash, 30 lks. wide, 6 ft. deep, drains SE; asc. S slope.
- 36.00 Spur, slopes SE; over rolling land.
- 40.10 The cor. of secs. 29, 30, 31, and 32, monumented with a
sandstone, 20 x 5 x 2 ins., firmly set and plainly mkd.
5 notches on the E and 1 notch on the S edges.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 37 S R 3 W

S 30 | S 29
S 31 | S 32

1976

Deposit the mkd. stone alongside the iron post.

Cor. is located at the cor. of fence, extending N, E,
and W.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 28, 29, 32, and 33.

N. 89° 52' W., bet. secs. 29 and 32.

Over mountainous land, through lightly scattered pinon and juniper growth; gentle rolling.

40.20 The ¼ sec. cor. of secs. 29 and 32, monumented with a sandstone, 18 x 12 x 6 ins., firmly set and plainly mkd. ¼ on N face.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 37 S R 3 W

¼ $\frac{S\ 29}{S\ 32}$

1976

Deposit the mkd. stone alongside the iron post.

Cor. is located in fence line, extending E and W.

S. 89° 48' W., beginning new measurement.

15.00 Wash, 30 lks. wide, 10 ft. deep, drains SE; asc. gradually

30.00 Low ridge, bears NW and SE; desc. gradually.

39.00 Large wash, 50 lks. wide, 20 ft. deep, drains SE.

39.62 The cor. of secs. 29, 30, 31, and 32.

N. 89° 55' W., bet. secs. 30 and 31.

Over mountainous land, through scattered pinon and juniper growth; asc. gentle NE slope.

15.00 Area railed to the N; continue to ascent gradually.

39.97 The ¼ sec. cor. of secs. 30 and 31, monumented with a sandstone, 14 x 10 x 6 ins., firmly set and plainly mkd. ¼ on N face, from which an original bearing tree

A pinon pine, 14 ins. diam., bears S. 40° E.,
51.5 lks. dist., mkd. ¼ S31 BT. (Record,
S. 70° E., 51 lks. dist.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T 37 S R 3 W

¼ $\frac{S\ 30}{S\ 31}$

1976

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located 3 lks. S of fence line, extending E and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 49' W., beginning new measurement.</p>
6.00	Top of ridge, bears NW and SE; leave railed area and desc. SW slope.
19.00	Spur, slopes S; continue to descend SW slope.
24.00	Trail road in bottom of draw, bears N and S; asc. E slope.
38.34	The cor. of secs. 30 and 31, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and projecting 9 ins. above ground, with brass cap mkd. as described in the 1944 resurvey.
	<p>From the cor. of secs. 29, 30, 31, and 32.</p> <p>North, bet. secs. 29 and 30.</p> <p>Over mountainous land, through scattered pinon and juniper growth; along fence line.</p>
0.60	Large wash, 50 lks. wide, 20 ft. deep, drains SE; asc. gentle SW slope.
11.50	Top of small hill, bears NW and SE; desc. gentle NE slope.
24.00	Wide draw, drains E; asc. gentle S slope.
33.00	Top of hill, bears NW and SE; over rolling land.
40.05	The ¼ sec. cor. of secs. 29 and 30, monumented with a sandstone, 20 x 8 x 4 ins., firmly set and dimly mkd. ¼ on W face, from which the remaining original bearing tree
	<p style="padding-left: 40px;">A pinon pine, 14 ins. diam., bears East, 40 lks. dist., mkd. ¼ S29 BT.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T 37 S R 3 W</p> <p>¼</p> <p> </p> <p>S 30 S 29</p> <p> </p> <p>1977</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post.
Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
Cor. is located in fence line, extending N and S.

N. 0° 01' W., beginning new measurement.

Desc. NE slope.

- 8.00 Wash in draw, 20 lks. wide, 5 ft. deep, drains SE; asc. SW slope.
- 12.00 Small ridge, bears NW and SE; desc. NE slope.
- 17.00 Wash in draw, 15 lks. wide, 5 ft. deep, drains SE; asc. S slope.
- 40.05 The cor. of secs. 19, 20, 29, and 30, monumented with a sandstone, 18 x 8 x 5 ins., firmly set and plainly mkd. 5 notches on the E and 2 notches on the S edges, from which the original bearing trees

A pinon pine, 12 ins. diam., bears N. 50° E., 73 lks. dist., mkd. T37S R3W S20 BT.

A pinon pine, 14 ins. diam., bears S. 50° E., 76 lks. dist., mkd. T37S R3W S29 BT.

A cedar, 14 ins. diam., bears S. 55° W., 39 lks. dist., mkd. T37S R3W S30 BT.

A pinon pine, 10 ins. diam., bears N. 70° W., 17 lks. dist., mkd. T37S R3W S19 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top of brass cap, mkd.

T 37 S R 3 W

S 19	S 20
S 30	S 29

1977

Deposit the mkd. stone in mound alongside the iron post.
Cor. is located at the cor. of fences, extending S, E, and W.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 42' W., bet. secs. 20 and 29.

Over mountainous land, through scattered pinon and juniper growth; along fence line.

- 3.50 Small draw, drains S.
- 8.00 Rim of bench, bears NW and SE; desc. SW slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 20.00 Base of hill, bears NW and SE; over rolling land, through sagebrush and greasewood.
- 39.77 The $\frac{1}{4}$ sec. cor. of secs. 20 and 29, monumented with a sandstone, 14 x 12 x 4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N face.
- At the corner point
- Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. dian., 24 ins. in the ground, with brass cap mkd.
- T 37 S R 3 W
- $\frac{1}{4}$ $\frac{S\ 20}{S\ 29}$
- 1977
- Deposit the mkd. stone alongside the iron post.
- Cor. is located in fence line, extending E and W.
-
- N. 89° 55' W., beginning new measurement.
- 27.00 Base of hill, bears N and S; asc. E slope.
- 37.00 Top of hill, bears N and S; over rolling land.
- 40.08 The cor. of secs. 19, 20, 29 and 30.

General Description

The land encompassed in this survey is located adjacent to a portion of the East and South boundaries of Bryce Canyon National Park. The North boundary of section 2 borders the town of Tropic. The East boundary of sections 24 and 25 borders the town of Cannonville.

Drainage is generally to the southeast by Sheep Creek and Yellow Creek which runs into the Paria River southeast of the township. The elevations varies from 5794 ft. at the southeast corner of the township to 6972 ft. in section 9.

Access is by way of State Highway No. 54, which crosses through sections 2, 1, 12, 13, and 24. Campbell light duty road provides access to the north portion of the township. Georgetown light duty road provides access to the south portion of the township. There are numerous unimproved roads along with some jeep trails.

There are scattering stands of timber including juniper and pinon pine. The remainder of the township is naturally open or has been cleared. The undergrowth consists of sagebrush. There is a good cover of native and reseeded grasses in uncultivated areas.

The principal use of the area is livestock grazing, fire wood for home use and recreation for hikers.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

The improvements noted were homes in sections 2, 3, and 24; ranch site in section 31; water tank in section 3.

The only mineral noted was in section 13, which had abandoned mine site.

The mean of a considerable number of observations of the magnetic declination throughout the township is $14^{\circ} 45' E.$

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Craig P. Sylvester	Supervisory Land Surveyor
Jerry L. Thomas	Supervisory Land Surveyor
Gail E. Reynolds	Supervisory Land Surveyor
Daniel T. Mates	Surveying Technician
Frank C. Profazer	Surveying Technician
Stewart T. Burt	Surveying Technician
Donald A. Buhler	Surveying Technician
Dan S. Johnson	Surveying Aid

JUL 24 1969

Chief, General Survey Section and Approval Staff

427

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ferrel D. Reynolds, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day of January, 1976, (I) ~~(We)~~ have independently resurveyed the east boundary, a portion of the north and south boundaries and a portion of the subdivisional lines of T. 37 S., R. 3 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 27, 1979 (Date) *Ferrel D. Reynolds* (Cadastral Surveyor)

Under the Supervision of April 27, 1979 (Date) *Glen B. Hester* (Cadastral Surveyor)

Acting Chief, Branch of Cadastral Survey
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.
Denver, Colorado

The foregoing field notes of the dependent resurvey of the east boundary, a portion of the north and south boundaries and a portion of the subdivision lines of T. 37 S., R. 3 W., Salt Lake Meridian, Utah

executed by Ferrel D. Reynolds, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUL 24 1980 (Date) *J. Usborne* (Chief, Division of Cadastral Survey)

Chief, Cadastral Survey Examination and Approval Staff
CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey)

INDEX DIAGRAM

Township 43 S., Range 6 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15 7	14	13
19	20	21 6	22 3 6	23	24
30	29	28 4	27 1 4	26	25
31	32	33	34	35	36

Subdivision of Section 22
 Subdivision of Section 27

- Page 7
 - Page 9

Township 43 South, Range 6 West, Salt Lake Meridian, Utah

CHAINS

The boundaries of sec. 27 were surveyed by T. C. Bailey and J. G. Burrill in 1877, and the east boundary retraced and the north boundary resurveyed by J. C. Thoma and J. C. Clark in 1914. The south $\frac{1}{2}$ mile of the west boundary of sec. 22 was surveyed by T. C. Bailey and J. G. Burrill in 1877, and retraced by J. C. Clark and J. C. Thoma in 1914. The north $\frac{1}{2}$ mile of the west boundary, and the north and east boundaries of sec. 22 were surveyed by J. C. Thoma and J. C. Clark in 1914.

The following field notes are those of a dependent resurvey of the section boundaries and the survey of the subdivision of secs. 22 and 27, Township 43 South, Range 6 West, Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group 576, Utah, dated February 6, 1978.

The directions of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Measurements were determined by electronic means along survey lines where accessible.

The geographic position for the southeast corner of sec. 27, as scaled from U.S.G.S. Geological Topographic sheet "Kanab SE Utah-Arizona" is as follows:

Latitude $37^{\circ} 02.2' N.$ Longitude $112^{\circ} 30.1' W.$

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 30' E.$

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

(Restoring the Survey by T. C. Bailey and J. G. Burrill in 1877 and the Retracement by J. C. Clark and J. C. Thoma in 1914)

The cor. of secs. 26, 27, 34, and 35, determined by extension of fences from the N, S, E, and W, falls in U.S. Highway No. 89, bears N. $56^{\circ} 05' W.$ and S. $56^{\circ} 05' E.$ This position is accepted as the best available evidence of the original cor. position.

At the corner point

Drive a spike, 4 ins. long, flush with highway surface, from which,

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
	<p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 15° 15' E., 182.9 lks. dist., with brass cap mkd. T43S R6W RM 120.7 FT 1978 and an arrow pointing to the cor.</p>
	<p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 28° 40' W., 120.6 lks. dist., with brass cap mkd. T43S R6W RM 79.6 FT 1978 and an arrow pointing to the cor.</p>
	<p>N. 0° 31' E., bet. secs. 26 and 27.</p>
	<p>Over valley land, covered with shadscale; asc. over gentle SW slope.</p>
<p>1.10</p>	<p>Fence cor., fences, bear N. 56° 05' W., S. 56° 05' E., and N. 17° 00' E.</p>
<p>39.87</p>	<p>The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone, 14 x 10 x 4 ins., firmly set 6 ins. in the ground, and plainly mkd. ¼ on W face.</p>
	<p>At the corner point</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T 43 S R 6 W</p>
	<p style="text-align: center;"> ¼ S 27 S 26 </p>
	<p style="text-align: center;">1978</p>
	<p>Bury mkd. stone alongside the iron post and set cedar post, 5 ins. diam., 5 ft. high, E of cor.</p>
	<p>N. 0° 20' E., beginning new measurement.</p>
	<p>Asc. over gentle SW slope.</p>
<p>5.00</p>	<p>Wash, 2 ft. deep, 15 lks. wide, drains SW.</p>
<p>20.07</p>	<p>Point for the N 1/16 sec. cor. of secs. 26 and 27.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T 43 S R 6 W</p>
	<p style="text-align: center;">N 1/16</p>
	<p style="text-align: center;">S 27 S 26</p>
	<p style="text-align: center;">1978</p>
	<p>Set cedar post, 5 ins. diam., 4 ft. high, alongside cor.</p>
<p>20.165</p>	<p>A concrete hub with brass cap in middle, mkd, X.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

25.01 The original witness cor. of secs. 22, 23, 26, and 27, monumented with a sandstone, 12 x 10 x 8 ins., above ground, mkd. 2 notches on S and E edges and WC on N face. This cor. now functions as an angle point. Add marks AP to stone.

N. 0° 08' E., beginning new measurement.

Asc. SE slope of small spur.

15.13 The cor. of secs. 22, 23, 26, and 27, monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd. as described in the official record of the 1914 resurvey.

Rebuild the original mound of stone, W of cor.

(Restoring the Survey by J. C. Clark and
J. C. Thoma in 1914)

N. 0° 03' E., bet. secs. 22 and 23.

Over broken and ledgy mountain land, covered with juniper and pinon; asc. along W slope of spur.

39.98 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., set in a large mound of stone, with brass cap mkd. as described in the official record of the 1914 survey.

N. 0° 03' E., beginning new measurement.

Desc. over steep and ledgy NW slope.

26.00 Toms Canyon, drains S. 70° W.

40.17 The cor. of secs. 22 and 23, monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd. as described in the official record of the 1914 survey.

from which the 1914 bearing trees

A cedar, 14 ins. diam., bears S. 67° E., 14 lks. dist., mkd. T43S R6W S23 BT.

A cedar, 14 ins. diam., bears S. 35° 30' W., 82 lks. dist., mkd. T43S R6W S22 BT.

(Restoring the Survey Executed by
T. C. Bailey and J. G. Burrill in 1877)

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 26, 27, 34, and 35.

N. 89° 59' W., bet. secs. 27 and 34.

Over valley land, across highway.

2.15 Fence cor., fences bear N. 56° 05' W., S. 56° 05' E. and west; thence along old fence line.

19.10 Old highway, bears S. 25° 30' E. and N. 25° 30' W.

39.81 The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, determined at fence cor., also mound of stone, no marks identified, this point is recognized as the cor. by local land owners and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 43 S R 6 W

$\frac{1}{4}$ $\frac{S 27}{S 34}$

1978

N. 89° 40' W., beginning new measurement.

Desc. over W slope of small rise.

5.00 Field road, bears NE and SW; thence over fields.

39.71 The cor. of secs. 27, 28, 33, and 34, monumented with a sandstone, 12 x 12 x 10 ins., firmly set 8 ins. in the ground, and plainly mkd. 1 notch on S and 3 notches on E edges.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 43 S R 6 W

$\frac{S 28}{S 33} \mid \frac{S 27}{S 34}$

1978

Bury mkd. stone alongside the iron post.

N. 0° 13' E., bet. secs. 27 and 28.

Over farm land, along N and S fence line, since much of this land is now being used for homes and business in the city of Kanab, the bearing and distance of this line was determined generally by traverse.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

- 35.50 U.S. Highway No. 89, bears E and W.
- 40.00 The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with an iron post, 2 ins. diam., set in small block of concrete. This marker is used by the residents of Kanab City and is accepted as a careful and faithful perpetuation of the position of the original corner.
- At the corner point
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 43 S R 6 W
- $\frac{1}{4}$
 S 28 | S 27
- 1978
- Place concrete block upside down alongside the iron post.
- _____
- N. $0^{\circ} 11'$ E., beginning new measurement.
- Along W side of small wash, used for city flood control.
- 19.91 Point for the N $1/16$ sec. cor. of secs. 27 and 28.
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T 43 S R 6 W
N 1/16
- S 28 | S 27
- 1978
- 39.82 The cor. of secs. 21, 22, 27, and 28, monumented with a steel fence post set in the center of a mound of stone. This cor. is being used by the adjacent property owners and is accepted as the best available evidence of the original cor. position.
- At the corner point
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
- T 43 S R 6 W
- $\frac{S 21 | S 22}{S 28 | S 27}$
- 1978
- Set steel fence post alongside the iron post.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
	<p>(Restoring the 1877 Survey by T. C. Bailey and J. G. Burrill and the 1914 Resurvey by J. C. Clark and J. C. Thoma)</p> <hr/> <p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>N. 89° 51' W., bet. secs. 22 and 27.</p> <p>Over broken and ledgy land, covered with scattered juniper and pinon; desc. over W slope.</p> <p>39.97 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, determined by a mound of stone recorded in the 1914 survey. The iron post has been pulled out of this mound and was found lying loose about 3.00 chs. down the mountain side. This mound is harmoniously related to the existing original cors. and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Reset the original marker, an iron post, 1 in. diam., 36 ins. long, 12 ins. in the ground, in a mound of stone to top of brass cap, mkd.</p> <div style="text-align: center;"> $\begin{array}{r} \frac{1}{4} \\ \hline S\ 22 \\ S\ 27 \end{array}$ <p>1914</p> </div> <hr/> <p>S. 89° 54' W., beginning new measurement.</p> <p>Asc. over SE slope.</p>	
	<p>19.90 Point for the W 1/16 sec. cor. of secs. 22 and 27.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 43 S R 6 W</p> $W\ 1/16\ \begin{array}{r} \hline S\ 22 \\ S\ 27 \end{array}$ <p>1978</p> </div> <p>Desc. along broken N slope.</p>	
	<p>39.80 The cor. of secs. 21, 22, 27, and 28.</p> <hr/> <p>N. 0° 28' E., bet. secs. 21 and 22.</p> <p>Over rolling land, covered with shadscale, along old N and S fence line.</p> <p>19.935 Point for the S 1/16 sec. cor. of secs. 21 and 22, not monumented.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
19.98	<p>The original witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 14 x 12 x 2 ins., above ground, plainly mkd. $\frac{1}{4}$ WC on W face. This cor. will now function as an angle point. Add marks AP to stone.</p>	
	<p>N. $0^{\circ} 10'$ E., beginning new measurement.</p>	
	<p>Asc. over SE slope.</p>	
19.89	<p>The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1914 resurvey.</p>	
	<p>(Restoring the Survey Executed by J. C. Clark and J. C. Thoma in 1914)</p>	
	<p>N. $0^{\circ} 11'$ E., beginning new measurement.</p>	
	<p>Asc. over ledgy SE slope.</p>	
40.20	<p>The cor. of secs. 21 and 22, monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd. as described in the official record of the 1914 survey.</p>	
	<p>From the cor. of secs. 22 and 23.</p>	
	<p>S. $89^{\circ} 59'$ W., along the N. bdy. of sec. 22.</p>	
	<p>Over broken mountain land, covered with juniper and pinon; asc. over SE slope on top of ridge.</p>	
39.88	<p>The $\frac{1}{4}$ sec. cor. of sec. 22 only, monumented with an iron post, 1 in. diam., set on solid rock and in a mound of stone, with brass cap mkd. as described in the official record of the 1914 survey.</p>	
	<p>S. $89^{\circ} 59'$ W., beginning new measurement.</p>	
	<p>Asc. over ledgy E slope.</p>	
39.62	<p>The cor. of secs. 21 and 22.</p>	
	<p>Subdivision of Section 22, T. 43 S., R. 6 W., Salt Lake Meridian, Utah</p>	
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 22 and 27.</p>	
	<p>N. $0^{\circ} 19'$ E., on the N and S center line of sec. 22, on a line parallel with the mean bearing of the S $\frac{1}{2}$ mile bet. secs. 21 and 22, in accordance with the special instructions.</p>	

Subdivision of Section 22,
T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
<p>19.935</p>	<p>Over broken mountain land; asc. over ledgy SE slope.</p> <p>Point for the center south 1/16 sec. cor. of sec. 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground in a mound of stone, 3 ft. base, to top of brass cap mkd.</p> <p style="text-align: center;">T 43 S R 6 W</p> <p style="text-align: center;">C S 1/16 S 22 C</p> <p style="text-align: center;">1978</p>	
<p>39.87</p>	<p>Point for the center ¼ sec. cor. of sec. 22, at intersection with a line extended from the ¼ sec. cor. of secs. 21 and 22, parallel with the W ½ mile of the south boundary of sec. 22, in accordance with the special instructions.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 43 S R 6 W</p> <p style="text-align: center;">C ¼ S 22</p> <p style="text-align: center;">1978</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 05' W., beginning new measurement.</p> <p>Over valley land.</p>	
<p>40.15</p>	<p>The N ¼ sec. cor. of sec. 22.</p>	
<p>39.79</p>	<p>From the ¼ sec. cor. of secs. 22 and 23.</p> <p>West, on the E and W center line of sec. 22.</p> <p>Over broken and ledgy mountains; desc. along N slope.</p> <p>The center ¼ sec. cor. of sec. 22.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 54' W., beginning new measurement.</p> <p>Over small valley.</p>	
<p>19.90</p>	<p>Point for the center west 1/16 sec. cor. of sec. 22.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap mkd.</p>	

Subdivision of Section 22,
T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS

T 43 S R 6 W

W 1/16

C ——— S 22 ——— C

1978

Continue along broken and ledgy general N slope.

39.80 The ¼ sec. cor. of secs. 21 and 22.

From the W 1/16 sec. cor. of secs. 22 and 27.

N. 0° 19' E., on the N and S center line of the SW¼
of sec. 22.

Over broken land; desc. over steep N slope.

19.935 Point for the south west 1/16 sec. cor. of sec. 22, at
intersection with the E and W center line of the SW¼ of
sec. 22.Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 43 S R 6 W

SW 1/16 S 22

1978

Set cedar post alongside the corner.

39.87 The center west 1/16 sec. cor. of sec. 22.

From the center south 1/16 sec. cor. of sec. 22.

S. 89° 54' W., on the E and W center line of the SW¼
of sec. 22.

Over broken mountain land; desc. over steep W slope.

19.90 The south west 1/16 sec. cor. of sec. 22.

39.75 Point for the S 1/16 sec. cor. of secs. 21 and 22.

Subdivision of Section 27,
T. 43 S., R. 6 W., Salt Lake Meridian, Utah

From the ¼ sec. cor. of secs. 27 and 34.

N. 0° 16' E., on the N and S center line of sec. 27.

Over valley land, across private property.

23.00 Old highway, bears N. 56° W. and S. 56° E.

Subdivision of Section 27,
T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS		
26.50	U.S. Highway No. 89, bears N. 56° 05' W. and S. 56° 05' E.	
40.04	Point for the center ¼ sec. cor. of sec. 27, at intersection with E and W center line, not monumented.	
60.07	Point for the center north 1/16 sec. cor. of sec. 27. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
80.10	<p>T 43 S R 6 W</p> <p style="margin-left: 100px;">C</p> <p style="margin-left: 80px;">N 1/16 S 27</p> <p style="margin-left: 100px;">C</p> <p>1978</p>	
	Asc. over S slope, enter public land.	
39.98	From the ¼ sec. cor. of secs. 26 and 27.	
	N. 89° 44' W., on the E and W center line of sec. 27.	
	Over valley land, cross private property.	
	Point for the center ¼ sec. cor. of sec. 27.	
59.85	Point for the center west 1/16 sec. cor. of sec. 27, not monumented.	
79.72	The ¼ sec. cor. of secs. 27 and 28.	
40.00	From the N 1/16 sec. cor. of secs. 26 and 27.	
	N. 89° 47' W., on the E and W center line of the NE¼ of sec. 27. Over valley land; along S slope, between public and private land.	
19.97	From the point for the center west 1/16 sec. cor. of sec. 27. N. 0° 13' E., on the N and S center line of the NW¼ of sec. 27.	
	Point for the north west 1/16 sec. cor. of sec. 27, at intersection with the E and W center line of the NW¼ of sec. 27. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.	

Subdivision of Section 27,
T. 43 S., R. 6 W., Salt Lake Meridian, Utah

CHAINS	
39.94	<p style="text-align: center;">T 43 S R 6 W</p> <p style="text-align: center;">NW 1/16 S 27</p> <p style="text-align: center;">1978</p> <p>The W 1/16 sec. cor. of secs. 22 and 27.</p>
19.885	<p>From the center north 1/16 sec. cor. of sec. 27.</p> <p>N. 89° 55' W., on the E and W center line of the NW¹/₄ of sec. 27.</p> <p>Over broken land; along S slope.</p> <p>The north west 1/16 sec. cor. of sec. 27.</p>
39.77	<p>The N 1/16 sec. cor. of secs. 27 and 28.</p>
	<p style="text-align: center;">General Description</p> <p>The portion of T. 43 S., R. 6 W., covered by this survey is located on the east side of Kanab City. The land in sec. 27 is mostly valley land, while the land in sec. 22 is mostly ledgy mountain land with a small valley on the W portion. Except for the farm land the vegetation is shadscale with scattered juniper and pinon on the higher elevations. There are several homes, farms and businesses located in sec. 27.</p>

CERTIFICATE OF SURVEY

(I) ~~WE~~ Craig P. Sylvester, Supervisory Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 6th day

of February, 1977, (I) ~~WE~~ have independently resurveyed the section boundaries and surveyed the subdivision of sections 22 and 27, T. 43 S., R. 6 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~WE~~ and under (my) ~~OWN~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 12, 1979
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the section boundaries and the survey of the subdivision of sections 22 and 27, T. 43 S., R. 6 W., Salt Lake Meridian in the State of Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 16 1980
(Date)

Gary S. Speight
ACTING (Chief, Cadastral Survey Examination and Approval Staff)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in T. 43 S., R. 6 W., Salt Lake Meridian, Utah is a true copy of the original field notes.

(Date) (Chief, Cadastral Survey Examination and Approval Staff)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE NORTH BOUNDARY AND

A PORTION OF THE EAST BOUNDARY AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 9 NORTH, RANGE 7 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated May 8, 19 70, which provided for the surveys

included under Group Number 519, approved May 11, 1970,

and assignment instructions dated June 29, 19 70.

Survey commenced July 1, 19 70

Survey completed August 13, 19 70

INDEX DIAGRAM

Township 9 North, Range 7 East

9	8	6	5	4	3
6	23 5	17 4	13 3	2	12 1 2
22	21	16			11
7	20 8	15 9	10	11	12
19	18				
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 9 North, Range 7 East

CHAINS

The South boundary (Second Standard Parallel North) and the West boundary (Guide Meridian East) were surveyed by Julian Bausman in 1869. The East boundary, portions of the North boundary and subdivisional lines were surveyed by Ferdinand Dickert in 1870. Portions of the North boundary and subdivisional lines were surveyed, and a portion of the subdivisional lines retraced or resurveyed by T. C. Bailey and John G. Burrill in 1875. Portions of the North boundary and subdivisional lines were surveyed and the North 2 miles of the East boundary and a portion of the subdivisional lines retraced or resurveyed by Andrew P. Hanson in 1896. The North 4 miles of the West boundary (Guide Meridian East) were concurrently resurveyed by Glen B. Hatch under this same Group. The following field notes are those of the dependent resurvey of the North boundary and a portion of the East boundary and the subdivisional lines of Township 9 North, Range 7 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 8, 1970.

Before restoring the corners, the lines of the original survey, and prior resurveys were retraced and a diligent search made for any evidence of prior survey corners, bearing trees or other calls of the field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. The details of such traverses or triangulations have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position for the southeast corner of section 8 is at Latitude $41^{\circ} 31' 28''$ N. and Longitude $111^{\circ} 10' 08''$ W., as computed from section line ties to U.S.G.S. triangulation station "Sec. Cor. 36/10 N/6E" Latitude $41^{\circ} 33' 10.214''$ N. and Longitude $111^{\circ} 12' 26.258''$

The mean magnetic declination was found to be $16^{\circ} 30'$ East.

Dependent Resurvey of a Portion of the East Boundary, Township 9 North, Range 7 East

Reestablishment of the Survey Executed by Ferdinand Dickert in 1870, and the Resurvey Executed by Andrew P. Hanson in 1896.

Dependent Resurvey of a Portion of the East Boundary,
Township 9 North, Range 7 East

CHAINS	
	<p>Beginning at the cor. of secs. 1, 6, 7 and 12, determined by intersection of old fences, bearing S., E. and W., and is harmoniously related with existing found corners and is accepted as the best available evidence of the position of the original cor. point</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R7E R8E S1 S6 S12 S7 1970</p> <p>N. 0° 26' E., bet. secs. 1 and 6.</p> <p>Over gently rolling land through sagebrush undergrowth. Desc. 15 ft. over gentle NW. slope.</p>
0.40	Junction of trail roads, bears S. 50° W., N. 30° E. and E.
2.27	Six cable power line, bears N. 71° E. and S. 71° W.
3.89	Six cable power line, bears N. 71° E. and S. 71° W.
8.75	Wash, 20 lks. wide, 1 ft. deep, drains S. 35° W.; asc. 30 ft. over gently rolling SE. slope.
30.35	Wash, 10 lks. wide, 2 ft. deep, drains S. 80° E.
40.73	Point for the ½ sec. cor. of secs. 1 and 6 at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9N R7E R8E ½ S1 S6 1970</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Asc. 20 ft. over gently rolling land.</p>
54.45	Wash, 15 lks. wide, 4 ft. deep, drains S. 30° E.
68.95	Wash, 20 lks. wide, 4 ft. deep, drains S. 70° W.; asc. 45 ft. over SE. slope.
81.66	<p>The cor. of Tps. 9 and 10 N., Rs. 7 and 8 E., monumented with a sandstone 17x6x3 ins., firmly set and plainly mkd. 6 notches on N., S., E. and W. edges, and witnessed by a mound of stone to S.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary,
Township 9 North, Range 7 East

CHAINS

T10N
R7E R8E

S36 | S31
S1 | S6

T9N R8E
R7E R8E

1970

Bury stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high,
S. of cor.

Land, gently rolling.
Soil, sandy clay.
No timber.
Undergrowth, sagebrush.

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East.

Reestablishment of the Survey Executed by
Ferdinand Dickert in 1870.

From the cor. of Tps. 9 and 10, Rs. 7 and 8 E.

N. 89° 39' W., bet. secs. 1 and 36.

Over gently rolling land through dense sagebrush. Asc.
20 ft. over SE. slope.

10.70 Spur, slopes S.; desc. 25 ft. over SW. slope.

17.10 Wash, 10 lks. wide, 1 ft. deep, drains S. 15° E.; asc.
25 ft. over NE. slope.

23.60 Spur, slopes S. 45° E.; desc. 10 ft. over SW. slope.

26.10 Wash, drains S. 50° E.; asc. 40 ft. over NE. slope.

33.23 Fence, bears N. 4° 06' E. and S. 4° 06' W.

33.90 Trail road, parallel to fence line.

40.30 Point for the ¼ sec. cor. of secs. 1 and 36 at pro-
portionate distance; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins
in the ground, with brass cap mkd.

T10N R7E

¼ S36
S1

T9N R7E

1970

Dependant Resurvey of the North Boundary,
Township 9 North, Range 7 East.

CHAINS	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <p>Asc. 30 ft. over gently rolling SE. slope.</p>
45.20	Trail road, bears N. and S.
52.60	Wash, drains S. 75° E.; asc. 375 ft. over steep NE. slope. Enter scattered juniper timber.
79.60	Trail road, on curve, bears N. 20° W. and S. 40° E. Slope changes to SE.
80.60	The cor. of secs. 1, 2, 35 and 36, monumented with a gray limestone, 18x12x5 ins., firmly set in a small mound of stone, and plainly mkd. 1 notch on E. and 5 on W. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T10N R7E
	S35 S36 S2 S1
	T9N R7E
	1970
	Bury stone cor. in mound of stone alongside iron post.
	Land, gently rolling E. portion; broken and mountainous W. portion.
	Soil, sandy clay E. portion; rocky W. portion.
	Timber, scattered scrub juniper W. portion.
	Undergrowth, sagebrush.
	Reestablishment of the Survey Executed by Andrew P. Hanson in 1896.
	S. 88° 21' W., bet. secs. 2 and 35.
	Over mountainous land through scattered juniper timber. Asc. 75 ft. over E. slope.
5.00	Top of Crawford Mountain, bears N. and S.; desc. 700 ft. over broken and steep W. slope.
33.75	Base of steep descend, wash, drains S. 10° W.; asc. 15 ft. over SE. slope.
36.75	Point of spur, slopes S. 15° W.; desc. 40 ft. over W. slope.

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East.

CHAINS

41.03 Point for the 1/4 sec. cor. of secs. 2 and 35 at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

1/4 S35
S2

T9N R7E

1970

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Reestablishment of the Survey Executed by
Ferdinand Dickert in 1870.

S. 89° 15' W., beginning new measurement.

Over gently rolling land through sagebrush undergrowth, by triangulation; desc. about 30 ft. over W. slope.

1.00 Trail road, bears N. and S.

1.70 Canal, 20 lks. wide, 4 ft. deep, flows N. curving N. 20° W. Enter meadow land.

3.53 Power line, bears N. 5° W. and S. 5° E.

28.00 Crawford-Thompson Canal, flows nearly north.

40.26 Point for the cor. of secs. 2, 3, 34 and 35 at proportionate distance, falls on private meadow land and is not monumented. There is no remaining evidence of the original cor. End triangulation.

Land, gently rolling meadow.

Soil, clay loam.

No timber.

Undergrowth, sagebrush E. portion; meadow grass W. portion.

S. 89° 15' W., bet. secs. 3 and 34.

Over nearly level meadow land.

35.90 Right bank of Bear River, 6 ft. high, bears N. 55° W. and curves S. Water, 15 lks. wide, 3 ft. deep, flows N. 55° W.

37.30 Left bank of Bear River, 4 ft. high, bears N. 55° W. curving W. and S. 55° E. curving S. Enter dense willows.

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East.

CHAINS		
40.26	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34 at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T10N R7E</p> <p style="text-align: center;">$\frac{1}{2} \frac{834}{83}$</p> <p style="text-align: center;">T9N R7E</p> <p style="text-align: center;">1970</p>	
	<p>Thence by triangulation, continue over nearly level meadow land through dense patches of willows.</p>	
70.00	<p>Ditch, flows irregularly N. 25° W. Leave willows.</p>	
80.52	<p>The cor. of secs. 3, 4, 33 and 34, monumented with a sandstone 12x6x4 ins., firmly set in small mound of stone, and plainly mkd. 3 notches on E. and W. edges, and 6 notches on N. and S. edges. (record--limestone 22x10x9 ins.)</p>	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T10N R7E</p> <p style="text-align: center;">$\frac{533}{34} \frac{834}{83}$</p> <p style="text-align: center;">T9N R7E</p> <p style="text-align: center;">1970</p>	
	<p>Bury stone cor. alongside iron post.</p> <p>Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <p>Land, meadow. Soil, clay loam. No timber. Undergrowth, dense patches of willows.</p>	
	<p>S. 89° 50' W., bet. secs. 4 and 33.</p>	
	<p>Over nearly level land through sagebrush undergrowth.</p>	
2.00	<p>Fence, bears S. 29° E. and N. 29° W. about 50 lks. to E. and W. fence line. Leave meadow.</p>	
2.30	<p>Dirt road, bears S. 29° E. and S. 88° W.; thence along road.</p>	

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East

CHAINS		
2.52	Cor. of fence, bears South 10 lks. dist., with fence bearing S. 29° E. and S. 88° 15' W.	
20.55	Cor. of fence, bears South, 53 lks. dist., with fence bearing S. 13° 45' E. and N. 88° 15' E., and cor. of fence, bears N. 18 lks. dist., with fence bearing N. 13° 45' W. and N. 88° 15' E.	
22.51	State Highway No. 16, on slight curve, bears N. 13° 47' W. and S. 7° 30' E. Leave dirt road; asc. 30 ft. over E. slope.	
23.28	Right of way fence, parallel to highway. Enter sagebrush.	
24.10	Telephone line, bears N. 2° 40' E. and S. 2° 40' W	
27.30	Spur, slopes N. from S. 60° W.; desc. 20 ft. over NW. slope.	
38.30	Wash, 10 lks. wide, 3 ft. deep, drains N. 60° E.; asc. 15 ft. over SE. slope. Enter reseeded area.	
40.52	The ½ sec. cor. of secs. 4 and 33, monumented with a quartzite stone, 12x4x4 ins., firmly set and plainly mkd. ½ on N. face.	
	At the cor. point	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins in the ground, with brass cap mkd.	
	T10N R7E	
	½ $\frac{S33}{S4}$	
	T9N R7E	
	1970	
	Bury stone cor. alongside iron post.	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.	
	N. 89° 14' W., beginning new measurement.	
	Asc. 110 ft. over gently rolling SE. slope.	
34.45	Trail road, bears S. 80° W. and N. 80° E. curving NW.	
41.21	The cor. of secs. 4, 5, 32 and 33, monumented with a quartzite stone 12x10x6 ins., at cor. of fences bearing N. and W., and plainly mkd. 4 notches on E., 2 notches on W. and 6 notches on S. edges.	
	At the cor. point	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins, in the ground and in a collar of stone, with brass cap mkd.	

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East

CHAINS

T10N R7E

S32 | S33

S5 | S4

T9N R7E

1970

Bury stone cor. alongside iron post.

Land, gently rolling.

Soil, gravelly.

No timber.

Undergrowth, sagebrush and grass.

N. 89° 53' W., bet. secs. 5 and 32.

Over rolling land through sagebrush undergrowth. Asc. 30 ft. over SE. slope, along fence line.

8.90 Ridge, bears N. 40° E. and S.; desc. 125 ft. over W. slope.

24.30 Wash, 30 lks. wide, 8 ft. deep, drains N. 10° W.; thence over gently rolling land.

25.47 Fence, turns S. 62° 35' W.; leave fence line.

27.10 Sage Hollow, 20 lks. wide, 3 ft. deep, drains N. from W.

28.20 Same wash, drains S. from W.

36.50 Same wash, drains N. 80° E.; asc. 10 ft. over SE. slope.

38.60 Trail road, bears N. and S. about 8.00 chs. to fence line; thence S. 62° W. along fence line.

41.10 The ½ sec. cor. of secs. 5 and 32, monumented with a broken sandstone, 10x9x6 ins., dimly mkd. ½.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

½ S32

S5

T9N R7E

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

N. 89° 32' W., beginning new measurement.

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East

CHAINS

- Asc. 10 ft. over gentle SE. slope.
 - 11.80 Improved dirt road, on low ridge, bears N. 55° E. and S. 55° W.; desc. 20 ft. over gentle NW. slope.
 - 22.70 Wash, 10 lks. wide, 1 ft. deep, drains N. 55° E. asc. 20 ft. over SE. slope.
 - 39.50 Small wash, drains S. 75° E.
 - 40.78 The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 18x8x8 ins., firmly set and plainly mkd. 5 notches on E. and 1 notch on W., and 6 notches on N. and S. edges, and witnessed by a mound of stone to W.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T10N R7E
- | | |
|-----|-----|
| S31 | S32 |
| S6 | S5 |
- T9N R7E
1970
- Bury stone cor. alongside iron post.
- Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
- Land, rolling.
Soil, clay loam.
No timber.
Undergrowth, sagebrush.
-
- Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875.
- _____
- S. 84° 00' W., bet. secs. 6 and 31.
- Over rolling land through dense sagebrush. Asc. 80 ft. over NE. slope.
- 11.55 Trail road, bears N. 50° W. and S. 50° E.
 - 17.70 Point of spur, slopes S. 45° E.; desc. 50 ft. over SW. slope.
 - 25.70 Wash, 10 lks. wide, 1 ft. deep, drains S.; asc. 10 ft. over SE. slope.
 - 31.50 Point of small spur, slopes S.; desc. 10 ft. over SW. slope.
 - 34.20 Wash, 10 lks. wide, 1 ft. deep, drains S.; asc. 40 ft. over SE. slope.
 - 39.98 The ¼ sec. cor. of secs. 6 and 31, monumented with a sandstone, 15x12x4 ins., firmly set and plainly mkd. ¼ on N. face.

Dependent Resurvey of the North Boundary,
Township 9 North, Range 7 East

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

S31
S6

T9N R7E

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

S. 84° 13' W., beginning new measurement.

0.30 Spur, slopes S. 30° E.; desc. 30 ft. over SW. slope.

14.15 Wash, 10 lks. wide, 6 ft. deep, drains S. 10° E.; asc. 20 ft. over E. slope along N. side of small draw.

21.75 Head of wash, 10 lks. wide, 2 ft. deep, drains S. 70° E.; asc. 105 ft. over E. slope.

35.40 Spur, slopes S. 30° E.; desc. 5 ft. over gentle NW. slope.

37.40 The cor. of Tps. 9 and 10 N., Rs. 6 and 7 E., monumented with an iron post, 2½ ins. diam., set in mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd.

T10N
R6E R7E

S36 | S31
S1 | S6

T9N

1964

Land, rolling.
Soil, gravelly clay.
No timber.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East.

Reestablishment of the Survey Executed by Ferdinand
Dickert in 1870.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

- From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.
- S. 89° 44' W., bet. secs. 1 and 12.
- Over gently rolling land through sagebrush undergrowth. Desc. 20 ft. over NW. slope along fence line.
- 0.25 Trail road, bears S. 50° W. and N. 30° E.
- 6.60 Wash, 10 lks. wide, 3 ft. deep, drains S. 40° W., also, six cable power line, bears N. 71° E. and S. 71° W., asc. 15 ft. over SE. slope.
- 11.50 Six cable power line, bears N. 71° E. and S. 71° W., thence over gently rolling land.
- 16.00 Wash, drains S.
- 32.30 Wash, drains S. 45° W. from N.
- 38.79 Fence, bears N. 4° 30' E., continue along fence line.
- 39.00 Trail road, bears N. 4° 30' E. and West along N. side of fence line.
- 39.94 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12 at proportionate distance longitudinally, and on fence line latitudinally. A limestone, 12x10x8 ins., bears N. 83° W., 33.50 chs. dist., lying loose on the ground on N. side of trail road, plainly mkd. $\frac{1}{4}$. (Cor. stone apparently moved from original position when line was cleared for fence line.)
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T9N R7E
- $\frac{1}{4}$ $\frac{S1}{S12}$
- 1970
- Bury stone cor. alongside iron post.
- Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- From this cor., Rees Well, bears N. 2° 10' E., 10.35 chs. dist.
-
- Reestablishment of the Survey Executed by Andrew P. Hanson in 1896.
-
- S. 89° 43' W., beginning new measurement.

Dependant Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS	
	Continue along fence over gently rolling land.
11.73	Fence, bears N.; continue along fence line.
21.80	Fence, turns S. 57° W.; leave fence line.
22.00	Junction of trail roads from E., S. 61° W. and N. 70° E.
24.50	Trail road, bears N. 35° E. and S. 35° W.; asc. 70 ft. over SE. slope.
40.06	The cor. of secs. 1, 2, 11 and 12, monumented with a limestone, 18x12x7 ins., firmly set and plainly mkd. 1 notch on E. and 5 on S. edges, and witnessed by a mound of stone to W. from which the remains of the original bearing tree A juniper stump, bears S. 79° 30' W., 125 lks. dist. At the cor. point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R7E S2 S1 S11 S12 1970 Bury stone cor. alongside iron post. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling. Soil, rocky clay loam. Timber, scattered scrub juniper extreme W. portion. Undergrowth, sagebrush.
	N. 0° 01' E., bet. secs. 1 and 2. Over mountainous land through scattered scrub to juniper timber. Asc. 165 ft. over SE. slope.
9.00	Spur, slopes E.; desc. 45 ft. over NE. slope.
23.70	Draw, drains S. 45° E.; asc. 250 ft. over SW. slope.
34.50	Spur, slopes E. and S. 25° E., from W.; thence along E. slope.
39.04	The 1/2 sec. cor. of secs. 1 and 2, monumented with a limestone, 18x10x7 ins., firmly set and plainly mkd. 1/2 on W. face, and witnessed by a small mound of stone to W. from which the remains of the original bearing tree A juniper stump, bears N. 30° E., 49 lks. dist. At the cor. point

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9N R7E
¼
S2|S1
1970

Bury stone cor. in mound of stone alongside iron post.

N. 0° 01' E., beginning new measurement.

Asc. 60 ft. along E. slope.

8.95 Trail road, bears irregularly N. 53° W. and S. 53° E.

12.11 Fence, bears irregularly N. 65° E. and S. 65° W.

20.65 Spur, slopes N. from S. 20° W.; desc. 150 ft. over N. slope.

30.00 Draw, drains E.; asc. 200 ft. over SE. slope.

43.48 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Land, mountainous.
Soil, rocky clay.
Timber, scattered scrub juniper.
Undergrowth, dense sagebrush.

Reestablishment of the Survey Executed by Ferdinand Dickert in 1870.

From the cor. of secs. 3, 4, 9 and 10, determined by property line fences bearing E. and W. and S. These fences were built on the original section lines according to a statement by Meriner Brown, long time resident and adjacent land owner, and is accepted as the best existing evidence for the position of the original cor. position.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R7E
S4|S3
S9|S10
1970

N. 0° 07' E., bet. secs. 3 and 4.

Over nearly level farm land.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS	
0.32	Gravel road, bears E. and W.
0.62	Fence, bears E. and W., enter cultivated land.
41.05	Point for the 1/4 sec. cor. of secs. 3 and 4 at proportionate distance falls on private cultivated land and is not monumented. There is no remaining evidence of the original corner.
44.66	Point selected for the witness 1/4 sec. cor. of secs. 3 and 4 on fence line, bears E. and W.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R7E 1/4 S4 S3 W C 1970
	Continue over cultivated land.
61.38	Fence, bears E. and W.
77.57	Fence, bears N. 29° W. and S. 29° E. Leave cultivated land.
78.10	Improved dirt road, bears N. 29° W. and S. 29° E.
78.60	Fence, bears N. 29° W. and S. 29° E. Enter meadow land.
82.20	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.
	Land, nearly level farm and meadow. Soil, clay loam. No timber. Undergrowth, grass and sagebrush.
The cor. of secs. 8, 9, 16 and 17 was determined longitudinally by the center of a road bearing N. and S., and substantiated by topography calls of the original field note record to the East, and latitudinally by proportionate measurement bet. E. and W. property line fences 41.03 chs. of Northing and 41.03 chs. of Southing, and substantiated by topography calls of the original field note record.	
	Set an iron post, 12 ins. long, 1 in. diam., 6 ins. below surface of the road, with brass cap mkd.
	T9N R7E S8 S9 S17 S16 1970

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

from which

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, in fence line, for a reference monument, bears N. 45° E., 35.7 lks. dist., with brass cap mkd. T9N R7E S9 RM.23.6 FT 1970, and an arrow pointing to the true cor.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, in fence line, bears S. 45° W., 36.7 lks. dist., with brass cap mkd. T9N R7E S17 RM 24.2 FT 1970, and an arrow pointing to the true cor.

N. 0° 04' E., bet. secs. 8 and 9.

Over nearly level farm land, along gravel road.

1.11 New fence line, bears W.

6.43 Power line, bears S. 88° 57' E. along fence line, and N. 88° 57' W., 42 lks. to N. and S. power line.

36.18 Gravel road, bears W. about 8.00 chs. to Woodruff Cemetery, asc. 30 ft. over S. slope of low bench.

41.03 Point for the ¼ sec. cor. of secs. 8 and 9, in center of road, bearing N, and S., and in line with property fence to E., and is accepted as best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 10 ins. long, 1 in. diam., 12 ins. below surface of the road, with brass cap mkd.

T9N R7E

¼

S8|S9

1970

from which

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, in fence line, bears East 33.3 lks. dist., with brass cap mkd. T9N R7E S9 RM 22 FT 1970, and an arrow pointing to the true cor.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, in fence line, bears N. 45° W., 43.9 lks. dist., with brass cap mkd. T9N R7E S8 RM 29 FT 1970, and an arrow pointing to the true cor.

N. 0° 21' E., beginning new measurement.

Continue along gravel road.

0.30 Fence, bears N. 88° W.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

40.97

The cor. of secs. 4, 5, 8 and 9, monumented with a quartzite stone, firmly set in fence line, bears E. and W., and at end of gravel road to S., and plainly mkd. 4 notches on E. and 5 on S. edges, and witnessed by a small mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R7E

$\frac{45}{88} \frac{S4}{S9}$

1970

Bury stone cor. alongside iron post.

Rebuild mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, nearly level farm land S. portion; low bench land N. portion.

Soil, clay loam.

No timber.

Undergrowth, grass and sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 39' W., bet. secs. 4 and 9.

Over level farm land, along fence line on S. side of county road.

40.52

The ½ sec. cor. of secs. 4 and 9, determined by property fences, from E., W. and S., and is accepted as the best existing evidence of the original cor. position.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R7E

$\frac{1}{2} \frac{S4}{S9}$

1970

N. 89° 37' W., beginning new measurement.

Continue along fence line, along S. side of road.

2.30

Right of way fence, bears S. 32° 30' W. Leave fence line.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North Range 7 East

CHAINS	
3.11	State Highway No. 16, bears N. 32° 30' E. and S. 32° 30' W., asc. 75 ft. over gently rolling E. slope. Leave farm land.
4.02	Right of way fence bears N. 32° E.
4.23	Right of way fence, bears S. 32° 30' W. and fence bears N. 89° 37' W., thence along fence line.
30.00	Top of ascent, bears N. and S., desc. 40 ft. over W. slope.
31.50	Draw, drains S.; asc. 10 ft. over gentle SE. slope.
41.19	The cor. of secs. 4, 5, 8 and 9. Land, level farm land E. portion; gently rolling bench land W. portion. Soil, clay loam. No timber. Undergrowth, sagebrush W. portion.
	N. 0° 04' E., bet. secs. 4 and 5. Over gently rolling bench and through reseeded area. Along old trail road bearing north.
0.30	Trail road, bears N. 46° W., continue along old trail road; asc. 100 ft. over gentle SE. slope.
35.00	Trail road bears to NE.
40.86	Point for the ¼ sec. cor. of secs. 4 and 5 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post 30 ins. long 2½ ins. diam. 24 ins. in the ground, with brass cap mkd.
49.80	Ridge, bears E. and W.; desc. 50 ft. over gentle N. slope.
53.35	Trail road, bears N. 50° W. and curves S. 10° E.
70.30	Draw, drains S. 80° E.; asc. 50 ft. over SE. slope.
77.00	Trail road, bears N. 15° E. curving N. 80° E., from S. 15° W.

T9N R7E

¼

S5|S4

1970

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Asc. 20 ft. over S. slope.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East.

CHAINS	
81.94	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp. hereinbefore described.</p> <p>Land, gently rolling. Soil, gravelly clay. No timber. Undergrowth, sagebrush and grass.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17. N. 89° 41' W., bet. secs. 8 and 17. By triangulation, over level farm land.</p>
0.27	Fence line and power line, bears N. and S.
32.50	Farm lane bears N. and S. about 1.00 ch. to farm house.
41.29	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17 at proportionate distance falls on private meadow land, and is not monumented. There is no remaining evidence of the original cor.</p>
	<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875.</p>
	<p>On same bearing over meadow land by triangulation, with continuous measurement.</p>
47.00	Ditch, 15 lks. wide, 3 ft. deep, drains S. 15° W. from N.
55.20	Ditch, 10 lks. wide, 2 ft. deep, drains S. 39° W.
55.43	Fence, bears N. 3° W. and S. 3° E. End triangulation. Leave meadow land, enter sagebrush.
67.54	Fence, bears N. 80° E. and S. 80° W. 1.25 chs. dist., thence S. 35° W.
71.80	Trail road, bears N. 17° E. and S. 30° W.
74.00	Draw, drains S.; asc. 45 ft. over NE. slope.
82.58	<p>The cor. of secs. 7, 8, 17 and 18, monumented with a limestone, 18x5x4 ins., firmly set and plainly mkd. 5 notches on E. and 4 on S. edges.</p>
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R7E
	S7 S8
	S18 S17
	1970

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

Bury stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

Land, meadow and farm land E. portion; gently rolling
W. portion.
Soil, clay loam.
No timber.
Undergrowth, sagebrush W. portion.

S. 86° 01' W., bet. secs. 7 and 18.

Over gently rolling land through sagebrush undergrowth.
Asc. 30 ft. over gentle NE. slope.

- 3.10 Trail road, bears N. 60° W. and S. 85° E.
- 9.10 Trail road, bears N. 15° W. and S. 15° E.
- 12.60 Spur, slopes S. 15° E.; desc. 20 ft. over W. slope.
- 14.00 Wash, in small draw, drains S. 30° E.; asc. 45 ft. over
NE. slope.
- 22.70 Trail road, bears N. 25° W. and S. 35° E.
- 24.00 Spur, slopes S.; desc. 20 ft. over W. slope.
- 30.40 Draw, drains S. 35° W.; asc. 16 ft. over SE. slope.
- 32.90 Spur, slopes S.; desc. 40 ft. over SW. slope.
- 37.00 Wash, drains S. 30° E.; asc. 40 ft. over E. slope.
- 40.27 Point for the ¼ sec. cor. of secs. 7 and 18, in property
line fence, bearing N. and S., and on line between
found cors. to the E. and W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T9N R7E

¼ S7
S18

1970

Raise a mound of stone, 3 ft. base, 1½ ft. high,
N. of cor.

S. 86° 01' W., beginning new measurement.

Asc. 115 ft. over E. slope.

- 16.00 Ridge, bears N. and S.; desc. 100 ft. over NW. slope.
- 31.00 Wash, drains S. 15° E.; asc. 10 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS	
35.76	<p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., protruding 6 ins. above ground, with brass cap mkd.</p>
	<p>T9N R6E R7E <u>S12 S7</u> <u>S13 S18</u> 1970</p>
	<p>Land, rolling. Soil, clay loam. No timber. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 7, 8, 17 and 18.</p>
	<p>N. 0° 49' E., bet. secs. 7 and 8.</p>
	<p>Asc. 20 ft. over gently rolling general E. slope through sagebrush undergrowth.</p>
9.80	<p>Wash, 10 lks. wide, 1 ft. deep, drains S. 60° E.</p>
30.25	<p>Wash, 10 lks. wide, 5 ft. deep, drains S. 70° E.</p>
38.50	<p>Top of ascent, slopes E.; desc. gentle NE. slope.</p>
41.43	<p>Point for the ½ sec. cor. of secs. 7 and 8, determined by property line fence bearing N. 89° 37' W. and S. 89° 37' E., and on line with found cor. to the N. and S. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T9N R7E <u>S7 S8</u> 1970</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p>
	<p>N. 0° 49' E., beginning new measurement.</p>
	<p>Desc. 30 ft. over NE. slope.</p>
3.60	<p>Trail road, bears N. 40° W. and S. 40° NE.</p>
12.75	<p>Wash, in small draw, drains E.; asc. 20 ft. over S. slope.</p>
16.25	<p>Low spur, slopes E.; desc. 35 ft. over N. slope.</p>
28.65	<p>Wash, in small draw, drains S. 80° E.; asc. 20 ft. over SE. slope.</p>

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

33.00 Low spur, slopes E., from N. 70° W.; desc. 30 ft. over NE. slope.

41.26 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 20x9x5 ins., firmly set and plainly mkd. 5 notches on E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R7E

S6	S5
S7	S8

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.

Soil, clay loam.

No timber.

Undergrowth, sagebrush.

Reestablishment of the Survey Executed by Ferdinand Dickert in 1870.

From the cor. of secs. 4, 5, 8 and 9.

N. 89° 32' W., bet. secs. 5 and 8.

Over gently rolling land through sagebrush undergrowth, and along fence line.

0.30 Fence, bears S. and N. about 25 lks. thence N. 34° 15' W.; continue along fence line.

34.15 Wash, drains S. 35° E. from nearly W.

37.15 Same wash, drains N. 30° E., from S. 60° W.

40.23 The point for the ½ sec. cor. of secs. 5 and 8, determined by E. and W. fence line, and old abandoned fence line to N. It is accepted as the best existing evidence for the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS	
	<p>T9N R7E</p> <p>185 488</p> <p>1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p> <hr/> <p>N. 88° 42' W., beginning new measurement.</p> <p>Along N. side of fence line. Asc. 100 ft. over SE. slope.</p> <p>18.43 Fence cor. bears South, 30 lks. dist., from which fences bear South and N. 89° 53' E.</p> <p>18.70 Trail road, bears N. 15° E. and S. 15° W.</p> <p>20.55 Spur, slopes S. 40° E.; desc. 50 ft. over SW. slope.</p> <p>31.40 Trail road, bears N. 59° W. and S. 59° E.</p> <p>37.15 Wash, 40 lks. wide, 8 ft. deep, drains S. 60° E.; asc. 10 ft. over gentle NE. slope.</p> <p>41.57 The cor. of secs. 5, 6, 7 and 8.</p> <p>Land, gently rolling. Soil, clay loam. No timber. Undergrowth, sagebrush.</p>
	<p>Reestablishment of the Survey Executed by T. C. Bailey and John G. Burrill in 1875.</p> <hr/> <p>S. 84° 02' W., bet. secs. 6 and 7.</p> <p>Over gently rolling land through sagebrush undergrowth. Asc. 65 ft. over NE. slope.</p> <p>13.45 Trail road, bears N. 24° W. and S. 24° E.</p> <p>22.75 Point of spur, slopes N.; desc. 15 ft. over NW. slope.</p> <p>26.95 Small draw, drains N. 20° E.; asc. 25 ft. over NE. slope.</p> <p>35.00 Small spur, slopes N. 30° E.; desc. 15 ft. over NW. slope.</p> <p>39.93 The ¼ sec. cor. of secs. 6 and 7, monumented with a sandstone, 15x9x4 ins., firmly set and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p>

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R7E

1/4 S6
S7

1970

Bury stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

S. 84° 55' W., beginning new measurement.

Desc. 10 ft. over gentle NW. slope.

7.50 Wash, 15 lks. wide, 3 ft. deep, drains N. 15° E., 1.00 chs., thence N. 60° E.; asc. 40 ft. over SE. slope.

11.30 Trail road, bears N. 41° E., curving N. 80° E. and S. 41° W., curving W.

24.30 Top of ascend, slopes S.; desc. 10 ft. over SW. slope.

26.00 Wash, drains S.; asc. 25 ft. over SE. slope.

29.90 Small spur, slopes S.; desc. 10 ft. over gentle SW. slope.

37.28 The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., monumented with an iron post, protruding 6 ins. above the ground, with brass cap mkd.

T9N
R6E R7E

S1|S6
S12|S7

1970

Land, rolling.
Soil, clay loam.
No timber.
Undergrowth, sagebrush.

Reestablishment of the Survey Executed by Ferdinand Dickert in 1870 and the Resurvey Executed by T. C. Bailey and John G. Burrill in 1875.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 01' E., bet. secs. 5 and 6.

Over gently rolling land through sagebrush undergrowth. Desc. 10 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS	
2.50	Wash, 15 lks. wide, 3 ft. deep, drains S. 60° E.; asc. 145 ft. over SW. slope.
6.70	Trail road, bears N. 55° W. and S. 55° E.
23.90	W. point of hill, slopes W.; desc. 70 ft. over NW. slope.
38.50	Small draw, drains W.; thence along W. slope.
40.20	Small draw, drains W.; asc. 5 ft. over SW. slope.
40.40	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R7E $\frac{1}{4}$ S6 S5 1970
	Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Asc. 15 ft. over SW. slope.
41.85	W. point of hill, slopes W.; desc. 20 ft. over gentle N. slope.
52.05	Spur, slopes N. 75° E. from S.; desc. 140 ft. over NW. slope.
61.65	Fence, bears N. 74° 12' E. and S. 74° 12' W.
65.85	Wash, 80 lks. wide, 10 ft. deep, in Sage Hollow, drains N. 65° E.; asc. 40 ft. over gentle SE. slope.
66.75	Trail road, bears N. 38° E. and S. 38° W.
70.45	Improved dirt road, bears N. 74° E. and S. 74° W.
76.45	Trail road, bears N. 70° W. and S. 45° E., on low spur, slopes E.; desc. 5 ft. over gentle NE. slope.
81.06	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.
	Land, rolling. Soil, clay loam. No timber. Undergrowth, sagebrush.
	<u>General Description</u> The northwest portion of Township 9 North, Range 7 East, is rolling land covered with dense sagebrush and no

Dependent Resurvey of a Portion of the Subdivision,
Township 9 North, Range 7 East

CHAINS

timber. The area is drained in a southeasterly direction by numerous washes. Soil is clay loam. There are numerous trail roads throughout the northwest portion of the township. The elevation is about 6,500 ft. above sea level. The town of Woodruff is located mostly in section 16, and State Highway No. 39, bears westerly through the township, and State Highway No. 16, bears northerly through sections 9 and 4. Section 1 is located on the eastern slope of the Crawford Mountains, and is broken and mountainous land covered with scattered scrub juniper timber and dense sagebrush undergrowth. Soil is rocky clay. This area is drained in an easterly direction. The southeast corner of section one is 6,350 ft. above sea level, and the northwest corner is 7,000 ft. above sea level. The only water noted was in the Bear River and several canals flowing north through the central portion of the township.

CERTIFICATE OF SURVEY

471

(I) (W&X) Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 8th day of May, 1970, (I) (W&X) have dependently resurveyed the North boundary, the north 1 mile of the East boundary, and a portion of the subdivisional lines of Township 9 North, Range 7 East.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (W&X) and under (my) (W&X) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 15, 1971 (Date)

Glen B. Hatch (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Washington, D.C. Denver, Colorado

The foregoing field notes of the dependent resurvey of the North boundary, the north 1 mile of the East boundary, and a portion of the subdivisional lines of Township 9 North, Range 7 East.

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

APR 16 1980 (Date)

J. Voorhes

Chief, Cadastral Survey Examination and Approval Staff

CERTIFICATE OF TRANSCRIPT

~~I Certify That the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

R600

472

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

THE EAST 3 MILES OF THE NORTH BOUNDARY,

THE EAST BOUNDARY AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 10 NORTH, RANGE 7 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Milton R. Workman

Supervisory Cadastral Surveyor

Under special instructions dated June 10, 19 70, which provided for the surveys included under Group Number 523, approved June 11, 1970, and assignment instructions dated July 17, 19 70.

Survey commenced August 18, 19 70

Survey completed June 30, 19 71

INDEX DIAGRAM

Township 10 North, Range 7 East

			11	10	9	
6	5	4	39 8	34 2 33	23 1	7
55		39	38	32	22	
7	54 8	9	37 10	31 11 33	20 12	6
53			36	30	19	
18	51 17	16	15	29 14 31	18 13	5
51	50	5		28	18	
19	49 20	43 21	22	27 28 29	16 24	4
48	47			26	16	
30	46 28	42 28	27	25 26	14 25	3
45	44	41	35	24	13	
31	44 32	40 33	35 34	24 35	13 36	2

Dependent Resurvey of a Portion of
Township 10 North, Range 7 East

CHAINS

The west boundary of Township 10 North, Range 7 East was surveyed by Julien Bausman in 1869. The north boundary of secs. 3, 4 and 5, the east 1/2 mile of the north boundary of sec. 6, the south boundary of secs. 32, 33, 34 and 36, the west 1/2 mile of the south boundary of sec. 35, and a portion of the subdivision were surveyed by F. Dickert in 1870. The west 1/2 mile of the north boundary of sec. 6 was surveyed by T. C. Bailey in 1875. The south boundary of sec. 31 and a portion of the subdivision were surveyed and a portion of the subdivision was resurveyed by J. G. Burrill in 1875. The east two miles of the north boundary, the east boundary, the east 1/2 mile of the south boundary of sec. 35, a portion of the subdivision were surveyed, the north boundary of secs. 3, 4 and 5, the east 1/2 mile of the north boundary of sec. 6, and a portion of the subdivision were retraced by A. P. Hanson in 1896. The west boundary was resurveyed in 1964 and the south boundary was resurveyed in 1970 by Glen B. Hatch.

The following field notes are those of the dependent resurvey of the east 3 miles of the north boundary, the east boundary and a portion of the subdivision of Township 10 North, Range 7 East. The resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group No. 523, Utah, dated June 10, 1970.

The direction of the lines of this survey were determined by the solar transit method. The lines were carried forward by sustained angulation being supplemented by numerous altitude observations on Polaris taken throughout the progress of the survey.

The lengths of all lines were determined by chaining where possible; otherwise by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the Tp. is at Latitude 41° 33' 18" N. and Longitude 111° 05' 26" W. as determined through section line ties from U.S.G.S. triangulation station "1-298A", (Unadj.) located N. 89° 55' W., 45.42 chs. dist. from the W. 1/4 sec. cor. of sec. 1, T. 10 N., R. 7 E., at Latitude 41° 38' 05.754" N. and Longitude 111° 07' 15.486" W. and the cor. of Tps. 9 and 10 N., Rs. 6 and 7 E., determined by the U.S.G.S. to be at Latitude 41° 33' 10.214" N. and Longitude 111° 12' 26.258" W.

The magnetic declination was read at a number of stations throughout the survey and the average of these readings was found to be 16° 30' E.

Dependent Resurvey of the East Boundary,
Township 10 North, Range 7 East

Reestablishment of the Survey Executed by A. P.
Hanson in 1896

From the cor. of Tps. 9 and 10 N., Rs. 7 and 8 E., monumented with an iron post, 2 1/2 ins. diam., firmly set and

Dependent Resurvey of the East Boundary,
Township 10 North, Range 7 East

CHAINS		
	<p>protruding 6 ins. above ground, with brass cap mkd. and witnessed as described in the field notes of T. 9 N., R. 7 E., surveyed in 1970 by Glen B. Hatch, Supervisory Cadastral Surveyor, under Group No. 519, Utah.</p> <p>North, between secs. 31 and 36.</p> <p>Over gently rolling hills, through sagebrush.</p> <p>Asc. 45 ft. over gentle S. slope.</p>	
2.50	Trail road, bears N. 50° W. and S. 50° E.	
38.70	Wash, 10 lks. wide, 2 ft. deep, drains irregularly E.	
40.07	<p>The ½ sec. cor. of secs. 31 and 36, monumented with the original limestone, 16x16x6 ins., firmly set and plainly mkd. ½ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E R8E ½ S36 S31 1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Deposit the original cor. stone alongside the iron post.</p> <hr/> <p>N. 0° 20' W., beginning new measurement.</p> <p>Asc. 15 ft. over gentle S. slope.</p>	
3.10	Small ridge, slopes E.; desc. 20 ft. over gentle N. slope.	
6.80	Draw, drains irregularly E.	
22.50	Draw, drains irregularly E.	
40.07	<p>The cor. of secs. 25, 30, 31 and 36, monumented with the original limestone, 18x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 notches on N. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E R8E S25 S30 S36 S31 1970</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Deposit the original cor. stone alongside the iron post.</p>	

Dependent Resurvey, of the East Boundary,
Township 10 North, Range 7 East

CHAINS	
	<p>Land, gently rolling. Soil, rocky clay. No timber. Undergrowth, sagebrush.</p>
	<p>N. 0° 05' E., bet. secs. 25 and 30. Over gently rolling hills, through sagebrush. Asc. 30 ft. over gentle S. slope.</p>
4.40	Draw, drains irregularly E.
14.50	Draw, drains E.
24.90	Draw, drains irregularly E.
40.17	<p>The 1/4 sec. cor. of secs. 25 and 30, monumented with the original limestone, 18x12x5 ins., firmly set and plainly mkd. 1/2 on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E R8E 1/4 S25 S30 1970</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>Deposit the original cor. stone alongside the iron post.</p>
	<p>N. 0° 15' W., beginning new measurement. Desc. 75 ft. over N. slope.</p>
9.30	Small draw, drains irregularly E.
21.80	Draw, drains N. 70° E.
35.50	Bottom of wide draw, drains irregularly E.; asc. 5 ft. over gentle S. slope.
38.60	Small draw, drains irregularly E.
40.17	<p>The cor. of secs. 19, 24, 25 and 30, monumented with the original limestone, 16x12x8 ins., firmly set and plainly mkd. 2 notches on S. and 4 notches on N. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary
Township 10 North, Range 7 East

CHAINS

T10N
R7E R8E

S24 | S19
S25 | S30

1970

Raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the
ground alongside the iron post.

Deposit the original cor. stone alongside the iron
post.

Land, gently rolling.
Soil, rocky clay.
No timber.
Undergrowth, sagebrush.

N. 0° 22' E., bet. secs. 19 and 24.

Over gently rolling hills, through sagebrush.

Asc. 40 ft. over S. slope.

6.50 Spur, slopes E.; desc. 45 ft. over gentle N. slope.

11.60 Draw, drains E.

17.60 Draw, drains irregularly E.

31.40 Draw, drains irregularly E.

40.17 The ½ sec. cor. of secs. 19 and 24, monumented with the
original limestone, 12x8x6 ins., firmly set and plainly
mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10N
R7E R8E

½
S24 | S19

1970

Raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Deposit the original cor. stone alongside the iron
post.

N. 0° 16' E., beginning new measurement.

Desc. 30 ft. over gentle N. slope.

7.00 Draw, drains irregularly NE.

11.75 Spur, slopes E.

Dependent Resurvey of the East Boundary
Township 10 North, Range 7 East

CHAINS	
16.50	Draw, drains irregularly E.
24.20	Draw, drains S. 70° E.
40.15	<p>The cor. of secs. 13, 18, 19 and 24, monumented with the original limestone, 14x12x8 ins., firmly set and plainly mkd. 3 notches on the N. and S. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10N R7E R8E S13 S18 S24 S19 1970</p> </div> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Land, gently rolling. Soil, rocky clay. Timber, none. Undergrowth, sagebrush.</p>
	<p>N. 0° 05' W., bet. secs. 13 and 18.</p> <p>Over gently rolling hills, through sagebrush.</p> <p>Desc. 20 ft. over gentle N. slope.</p>
1.20	Small draw, drains irregularly E.
16.40	Trail road, bears E. and W.
21.50	Draw, drains irregularly E.; asc. 35 ft. over S. slope.
37.80	Draw, drains S. 30° E. curving S.
40.13	<p>The ¼ sec. cor. of secs. 13 and 18, monumented with the original limestone, 18x8x6 ins., firmly set and plainly mkd. ¼ on W. face.</p> <p>At the cor. point.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10N R7E R8E ¼ S13 S18 1970</p> </div> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p>

Dependent Resurvey of the East Boundary
Township 10 North, Range 7 East

CHAINS

Deposit the original cor. stone alongside the iron post.

N. 0° 08' E., beginning new measurement.

Asc. 215 ft. over S. slope.

3.85 Trail road, bears N. 30° E. and S. 30° W.

8.00 Enter mountainous land and scattered timber.

40.18 The cor. of secs. 7, 12, 13 and 18, monumented with the original limestone, 16x8x8 ins., firmly set and plainly mkd. 2 notches on N. and 4 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R7E R8E
S12|S7
S13|S18

1970

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Deposit the original cor. stone alongside the iron post.

Land, rolling hills.
Soil, rocky clay.
Timber, scattered juniper, N. ½ mile.
Undergrowth, sagebrush.

N. 0° 11' W., bet. secs. 7 and 12.

Over mountainous land, through sagebrush and scattered timber; asc. 160 ft. over S. slope.

7.90 Draw, drains W.

27.85 Trail road, bears N. 45° W. and S. 45° E.

34.90 Draw, drains irregularly E.

40.29 The ½ sec. cor. of secs. 7 and 12, monumented with the original limestone, 18x8x6 ins., firmly set and dimly mkd. ½ on W. face.

from which

A dead juniper, 6 ins. diam., bears S. 21° E., 56 lks. dist., mkd. ½ S BT.

A juniper, 6 ins. in diam., bears S. 13° W., 53 lks dist., mkd. ½ S BT.

At the cor. point

Dependent Resurvey of the East Boundary
Township 10 North, Range 7 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N
R7E R8E
 $\frac{1}{2}$
S12|S7
1970

Deposit the original cor. stone alongside the iron post.

N. $0^{\circ} 12'$ E., beginning new measurement.

Asc. 210 ft. over S. slope.

23.00 Draw, drains irregularly S. 45° E.

34.00 High ridge, bears SW. and NE.; leave timber; desc. 80 ft. over N. slope.

40.19 The cor. of secs. 1, 6, 7 and 12, monumented with the original limestone $20 \times 10 \times 6$ ins., firmly set and plainly mkd. 1 notch on N. and 5 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R7E R8E
S1|S6
S12|S7
1970

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Deposit the original cor. stone alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, sagebrush.

N. $0^{\circ} 04'$ W., bet. secs. 1 and 6.

Over mountainous land, through sagebrush.

Desc. 110 ft. over N. slope.

9.00 Bottom of wide draw, drains E.; asc. 30 ft. over S. slope

Dependent Resurvey of the East Boundary,
Township 10 North, Range 7 East

CHAINS	
14.00	Spur, slopes E.; desc. 65 ft. over N. slope.
21.85	Draw, drains irregularly E.; asc. 100 ft. over S. slope, Jeep trail in bottom of draw, bears E. and W.
24.80	Draw, drains S. 15° E.
40.16	The ¼ sec. cor. of secs. 1 and 6, monumented with the original limestone, 14x8x6 ins., firmly set and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E R8E ¼ S1 S6 1970</p>
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	Deposit the original cor. stone alongside the iron post.
	<hr/> N. 0° 14' W., beginning new measurement.
	Asc. 60 ft. over S. slope.
8.50	Trail road on top of ridge, bears E. and W.; desc. 85 ft. over N. slope.
18.00	Draw, drains irregularly E.; asc. 200 ft. over S. slope.
40.00	Top of ridge, bears E. and W.; desc. 65 ft. over N. slope.
46.54	The cor. of Tps. 10 and 11 N., Rs. 7 and 8 E., monumented with the original limestone, 16x10x8 ins., firmly set and plainly mkd. 6 notches on all 4 edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T11N R7E R8E S36 S31 S1 S6 T10N R7E R8E 1970</p>
	Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Dependent Resurvey of the East Boundary
Township 10 North, Range 7 East

CHAINS	
	<p>Deposit the original cor. stone alongside the iron post.</p> <p>Land, mountainous. Soil, rocky clay. No timber. Undergrowth, sagebrush.</p>
	<p>Dependent Resurvey of the North Boundary Township 10 North, Range 7 East</p>
	<p>Reestablishment of the Survey Executed by A. P. Hanson in 1896</p>
	<p>S. 89° 51' W., bet. secs. 1 and 36.</p> <p>Over mountainous land, through sagebrush.</p> <p>Asc. 85 ft. over E. slope.</p>
16.00	Spur, slopes S.; desc. 70 ft. over W. slope.
24.25	Draw, drains irregularly SE.; asc. 195 ft. over E. slope.
40.14	The 1/4 sec. cor. of secs. 1 and 36, monumented with the original limestone, 15x12x5 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T11N R7E</p> <p>1/4 $\frac{S36}{S1}$</p> <p>T10N R7E 1970</p>
	<p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>Deposit the original cor. stone alongside the iron post.</p>
	<p>S. 89° 58' W., beginning new measurement.</p> <p>Asc. 100 ft. over E. slope.</p>
15.00	Top of high ridge, bears N. and S.; desc. 205 ft. over W. slope.
29.85	Draw, drains irregularly N.; asc. 90 ft. over E. slope.
37.00	Enter aspen grove, bears N. and S.
39.00	Leave aspen grove, bears N. and S.
39.80 =	Top of ridge, bears N. and S.; desc. 5 ft. over W. slope to cor.

Dependent Resurvey of the North Boundary
Township 10 North, Range 7 East

CHAINS

40.30

The cor. of secs. 1, 2, 35 and 36, monumented with the original limestone, 16x12x6 ins., firmly set and plainly mkd. 1 notch on E. and 5 notches on W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11N R7E
S35 | S36
S2 | S1

T10N
1970

Deposit the original cor. stone alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, small aspen grove.
Undergrowth, sagebrush.

N. 89° 30' W., bet. secs. 2 and 35.

Over mountainous land, through sagebrush:

Desc. 40 ft. over W. slope.

8.00 Draw, drains N.; asc. 40 ft. over E. slope.

15.00 Spur, slopes N.; enter scattered timber; desc. 60 ft. over W. slope.

22.50 Draw, drains S.; asc. 55 ft. over E. slope.

28.50 Top of high mountain, bears N. and S.; desc. 455 ft. over steep and broken W. slope.

39.29 Point for the ¼ sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R7E
¼ S35
S2

T10N
1970

from which

A pinon, 12 ins. in diam., bears N. 29° E., 40 lks. dist., mkd. ¼ S35 BT.

A fir, 6 ins. in diam., bears S. 5° E., 94 lks. dist., mkd. ¼ S2 BT.

Dependent Resurvey of the North Boundary
Township 10 North, Range 7 East

CHAINS	
	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p> <p>Desc. about 880 ft. over steep and broken W. slope.</p>
54.00	Draw, drains irregularly N. changing to the N. 45° W.
62.00	Ridge, bears N. and S.; leave timber.
75.00	Base of mountain, beginning old fence line, bearing W.
78.13	<p>The cor. of secs. 2, 3, 34 and 35, monumented with the original limestone, 10x8x8 ins., firmly set and plainly mkd. 2 notches on E. and 4 notches on W. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T11N R7E S34 S35 S3 S2 T10N 1970</p> </div> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Cor. is located in E-W fence line.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p style="text-align: center;">Reestablishment of the Retracement Executed by A. P. Hanson in 1896</p> <hr/> <p>N. 89° 48' W., bet. secs. 3 and 34.</p> <p>Over gently rolling land, through sagebrush, along fence.</p> <p>Desc. 90 ft. over S. slope.</p>
5.74	Trail road, bears N. 20° E. and S. 20° W.
6.45	Canal, drains N.; enter meadow.
7.30	Crawford Thompson Canal, drains N.
9.27	Power line, bears N. 19° 48' E. and S. 19° 48' W.
41.13	The ¼ sec. cor. of secs. 3 and 34, monumented with the original limestone, 18x10x6 ins., firmly set and plainly mkd. ¼ on N. face.

Dependent Resurvey of the North Boundary
Township 10 North, Range 7 East

CHAINS	
<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T11N R7E ¼ $\frac{S34}{S3}$ T10N 1970</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Cor. is located at cor. of fences, bearing N., S., E. and W.</p> <hr/> <p>N. 89° 33' W., beginning new measurement.</p> <p>Over level farm land, along fence line.</p> <p>7.70 Canal, drains N. 10° W.</p> <p>16.35 Trail road, bears N. and S.</p> <p>27.45 Bear River, drains N. 45° W.</p> <p>34.85 Bear River, drains S. 60° W.</p> <p>41.13 The cor. of secs. 3, 4, 33 and 34, monumented with the original limestone, 14x7x5 ins., firmly set and plainly mkd. 3 notches on the E. and W. edges.</p>	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T11N R7E $\frac{S33}{S4} \frac{S34}{S3}$ T10N 1970</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Cor. is located in E-W fence line.</p> <p>Land, meadow. Soil, clay. No timber. Undergrowth, sagebrush and meadow grass.</p>
	<p style="text-align: center;">Dependent Resurvey of a Portion of the Subdivision Township 10 North, Range 7 East</p>
	<p style="text-align: center;">Reestablishment of the Survey Executed by A. P. Hanson in 1896</p>

Dependent Resurvey of the North Boundary
Township 10 North, Range 7 East

CHAINS	
	<p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., firmly set and protruding 12 ins. above ground, with brass cap marked and witnessed as described in the field notes of T. 9 N., R. 7 E., surveyed by Glen B. Hatch in 1970, under Group No. 519, Utah.</p>
	<p>N. 0° 58' E., bet. secs. 35 and 36.</p>
	<p>Over mountainous land, through sagebrush and scattered timber.</p>
	<p>Asc. 120 ft. along E. slope.</p>
39.95	<p>Point for the ¼ sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T10N R7E ½ S35 S36 1970</p>
	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p>
	<p>Desc. 125 ft. along E. slope.</p>
45.00	<p>Draw, drains irregularly E.</p>
49.50	<p>Spur, slopes E.</p>
61.00	<p>Deep canyon, drains irregularly E.; asc. 105 ft. along E. slope.</p>
79.90	<p>Point for the cor. of secs. 25, 26, 35 and 36, at proportionate distance; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T10N R7E S26 S25 S35 S36 1970</p>
	<p>Land, mountainous. Soil, clay. No timber. Undergrowth, sagebrush and meadow grass.</p>
	<p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.</p>
	<p>N. 89° 40' W., bet. secs. 25 and 36.</p>

Dependant Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS		
	Over rolling land, through dense undergrowth. Asc. 130 ft. over E. slope.	
31.75	Fence, bears N. 12° W. and S. 12° E.	
35.70	Trail road, bears N. 10° E. and S. 10° W.; enter scattered timber.	
38.98	The ½ sec. cor. of secs. 25 and 36, monumented with a limestone, 20x8x6 ins., firmly set and plainly mkd. ½ on N. face. from which A juniper, 6 ins. diam., bears S. 73° 45' E., 8 lks. dist., mkd. ½ S BT. A juniper, 8 ins. diam., bears S. 19° W., 35 lks. dist., mkd. ½ S BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R7E ½ $\frac{S25}{S36}$ 1970 Deposit the original cor. stone alongside the iron post. Raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.	
	N. 89° 52' W., beginning new measurement. Asc. 405 ft. over E. slope.	
11.75	Wash, 15 lks. wide, 4 ft. deep, drains S. 10° E.	
14.95	Trail road, bears N. 15° W. and S. 2° E.	
17.00	Enter dense timber; begin steep ascent.	
40.07	The cor. of secs. 25, 26, 35 and 36. Land, rolling. Soil, rocky clay. Timber, scattered to dense juniper and pinon. Undergrowth, dense sagebrush.	
	N. 0° 07' W., along the W. bdy. of sec. 25. Over rolling mountain land, through scattered timber and undergrowth. Asc. 25 ft. along E. slope.	

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
6.85	Draw, drains E.
12.00	Spur, slopes E.; desc. 15 ft. along E. slope.
15.50	Draw, drains E.; asc. 40 ft. over SE. slope.
23.70	Spur, slopes E.; desc. 210 ft. over N. slope.
38.75	Draw, drains E.; asc. 70 ft. over S. slope.
39.95	Point for the $\frac{1}{4}$ sec. cor. of sec. 25, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E $\frac{1}{2}$ S25 1970</p>
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
	Asc. 35 ft. over S. slope.
46.65	Spur, slopes E.; desc. 135 ft. over N. slope.
57.30	Draw, drains E.; asc. 135 ft. over S. slope.
65.80	Fence, bears N. 83° W. and S. 83° E.
77.80	Top of ascent; desc. 15 ft. over NE. slope.
79.90	The cor. of secs. 24 and 25, monumented with a limestone, $14 \times 12 \times 10$ ins., firmly set and plainly mkd. 1 notch on E. and 2 notches on S. edges.
	from which
	A juniper, 6 ins. diam., bears N. $50\frac{1}{2}^\circ$ E. 355 lks. dist., mkd. T10N R7E S24 BT.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E S26 S24 S25 1970</p>
	Deposit the original cor. stone alongside the iron post.
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
	No other bearing trees available.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp.</p>
	<p>S. 89° 42' W., bet. secs. 24 and 25.</p>
	<p>Over rolling land, through dense undergrowth.</p>
	<p>Asc. 150 ft. over E. slope.</p>
15.00	Enter scattered timber.
20.00	Small spur, slopes S.
30.00	Small draw, drains irregularly S. 70° E.
38.77	<p>The 1/2 sec. cor. of secs. 24 and 25, monumented with a limestone, 18x10x6 ins., firmly set and plainly mkd. 1/2 on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E S24 1/2 S25</p> <p style="text-align: center;">1970</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>No suitable bearing trees available.</p>
	<p>N. 89° 57' W., beginning new measurement.</p>
	<p>Asc. 370 ft. over E. slope.</p>
1.65	Trail road, bears N. and S.
4.80	Draw, drains irregularly N. 70° E.
40.30	<p>The cor. of secs. 24 and 25.</p> <p>Land, rolling. Soil, rocky clay. Timber, scattered to dense juniper and pinon. Undergrowth, dense sagebrush.</p>
	<p>N. 0° 29' W., along the W. bdy. of sec. 24.</p> <p>Over rolling mountain land, through scattered timber and undergrowth.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	Desc. 150 ft. over N. slope.
6.85	Draw, drains N. 60° E.; asc. 30 ft. over S. slope.
21.30	Ridge, bears NE. and SW.; desc. 80 ft. over N. slope.
21.50	Trail road, bears N. 25° E. and S. 25° W.
31.00	Draw, drains N. 40° E.; asc. 25 ft. over S. slope.
34.50	Trail road, bears N. 20° W. and S. 20° E.
40.19	The $\frac{1}{4}$ sec. cor. of sec. 24, monumented with a limestone, 16x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face. from which A juniper, 8 ins. in diam., bears N. 14° 15' E., 19 lks. dist., mkd. $\frac{1}{4}$ S BT. A juniper, 6 ins. in diam., bears S. 78° E., 22 lks. dist., mkd. $\frac{1}{4}$ S BT. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R7E $\frac{1}{4}$ S24 1970 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Deposit the original cor. stone alongside the iron post. N. 0° 21' W., beginning new measurement. Asc. 80 ft. over S. slope.
32.00	Ridge, slopes E.; desc. 65 ft. over N. slope.
40.22	The cor. of secs. 13 and 24, monumented with a limestone, 16x12x6 ins., firmly set and plainly mkd. 1 notch on E. and 3 notches on S. edges. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd. T10N R7E S23 S13 S24 1970 Deposit the original cor. stone alongside the iron post. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>No suitable bearing trees available.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.</p> <p>S. 89° 57' W., bet. secs. 13 and 24.</p> <p>Over rolling land, through dense undergrowth.</p> <p>Asc. 100 ft. over gentle E. slope.</p>
25.30	Trail road, bears N. 37° E. and S. 37° W.
30.00	Small grove of junipers on S. slope.
37.30	Draw, drains irregularly S. 45° E.
40.03	Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{2}$ $\frac{S13}{S24}$ 1970</p>
	<p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Asc. 315 ft. over E. slope.</p>
42.00	Enter scattered timber.
51.40	Trail road, bears N. and S.
80.06	The cor. of secs. 13 and 24.
	<p>Land, rolling and mountainous. Soil, rocky clay. Timber, scattered juniper and pinon W. $\frac{1}{2}$ mile. Undergrowth, sagebrush.</p>
	<p>N. 0° 10' W., along the W. bdy. of sec. 13.</p> <p>Over rolling mountain land, through scattered timber and undergrowth.</p> <p>Asc. 85 ft. over S. slope.</p>
3.00	Wide draw, drains W.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
14.00	Draw, drains irregularly S. 45° E.
23.00	Spur, slopes E.; desc. 140 ft. over N. slope.
40.08	The 1/4 sec. cor. of secs. 13, monumented with a limestone, 20x8x8 ins., firmly set and plainly mkd. 1/2 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.
	T10N R7E 1/2 S13 1970
	Deposit the original cor. stone alongside the iron post.
	No suitable bearing trees available.
	Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
	N. 0° 22' W., beginning new measurement.
	Desc. 200 ft. over NW. slope.
12.00	Bottom of canyon, drains W.; asc. 165 ft. over S. slope.
25.75	Ridge, bears NE. and SW.; desc. 130 ft. over N. slope.
36.65	Canyon, drains irregularly W.; asc. 130 ft. over S. slope.
40.16	Point for the cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T10N R7E S14 S12 S13 1970
	No suitable bearing trees available.
	Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.
	N. 89° 49' W., bet. secs. 12 and 13.
	Over rolling mountain land, through dense undergrowth.
	Desc. 110 ft. over W. slope.

Dependent Resurvey of a Portion
of the Subdivision,
Township 10 North, Range 7 East

CHAINS	
7.40	Draw, drains irregularly S. 50° W.; asc. 310 ft. over E. slope.
25.00	Spur, slopes S.; desc. 95 ft. over W. slope. Enter scattered timber.
38.50	Small draw, drains irregularly S.
38.81	The ¼ sec. cor. of secs. 12 and 13, monumented with a limestone, 14x7x6 ins., firmly set and plainly mkd. ¼ on N. face.
	At the cor. point:
	Set an iron post, 60 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E
	¼ $\frac{S12}{S13}$
	1970
	No suitable bearing trees available.
	Deposit the original cor. stone alongside the iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	S. 89° 46' W., beginning new measurement.
	Asc. 5 ft. over E. slope.
1.10	Spur, slopes S.; desc. 75 ft. over W. slope.
3.50	Draw, drains S.
5.70	Spur, slopes S.
10.00	Main draw, drains irregularly S. 45° E.; asc. 95 ft. over E. slope.
16.00	Top of high divide, bears N. and S.; desc. 150 ft. over W. slope.
34.35	Main draw, drains irregularly S. 45° W.; asc. 65 ft. over E. slope.
41.46	The cor. of secs. 12 and 13.
	Land, mountainous.
	Soil, rocky clay.
	Timber, scattered juniper and pinon.
	Undergrowth, sagebrush.
	N. 0° 22' W., along the W. bdy. of sec. 12.
	Over rolling mountainland, through scattered timber and undergrowth.
	Asc. 375 ft. over S. slope.
28.00	Draw, drains E.

Dependent Resurvey of a Portion
of the Subdivision,
Township 10 North, Range 7 East

CHAINS

40.16 The 1/4 sec. cor. of sec. 12, monumented with a limestone, 16x10x8 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Deposit the original cor. stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep SE. slope.

N. 0° 07' E., beginning new measurement.

Asc. 275 ft. over SE. slope.

3.17 Intersect line 1-4 of Fork I Lode, Mineral Survey No. 6214. Corner No. 1 of Fork I Lode, a 4x4 cedar post, 2 ft. showing above ground and in a mound of stone, marked F-1, 1-6214, bears N. 33° 25' E., 13.45 chs. distance. Corner No. 4 of Fork I Lode, a 4"x4" cedar post, 2 ft. showing above ground and in a mound of stone, marked F-1, 4-6214, bears S. 33° 25' W., 9.28 chs. distance.

11.00 Ridge, bears NE. and SW.; leave timber.

16.40 Intersect line 1-2 of Fork I Lode, Mineral Survey No. 6214. Cor. No. 1 of Fork I Lode, previously described, bears S. 74° 50' E., 7.63 chs. distance. Cor No. 2 of Fork I Lode, a 4"x4" cedar post, 2 ft. showing above ground and in a mound of stone marked F-1, 2-6214, bears N. 74° 50' W., 1.46 chs. distance.

18.75 Cor. No. 2 of Fork Lode, Mineral Survey No. 6214, a 4"x4" cedar post, 2 ft. showing above ground and in a mound of stone, marked F, 2-6214, bears East, 17 lks. dist.

24.45 Spur, slopes E.; desc. 80 ft. over N. slope.

29.55 Trail road, bears E. and W.

33.00 Draw, drains irregularly E.; asc. 25 ft. over S. slope.

40.14 The cor. of secs. 1 and 12, monumented with a limestone, 14x12x10 ins., firmly set and plainly mkd. 1 notch on E. and 5 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

T10N R7E

$$S11 \frac{S1}{S12}$$

1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.

S. 89° 42' W., bet. secs. 1 and 12.

Over rolling mountain land, through scattered timber and undergrowth.

Asc. 145 ft. over E. slope.

2.00 Draw, drains irregularly N.

40.10 Intersect line 1-4 of Pass Lode, Mineral Survey No. 6214. Cor. No. 1 of Pass Lode, monumented with a mound of stone bears N. 37° W., 3.25 chs. dist. Cor. No. 4 of Pass Lode, a 4"x4" cedar post, 2 ft. showing above ground and in a mound of stone, marked P, 4-6214, bears S. 37° E., 5.84 chs. dist.

40.18 The ½ sec. cor. of secs. 1 and 12, monumented with a quartzite stone, 13x7x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

$$\frac{1}{2} \frac{S1}{S12}$$

1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

No suitable bearing trees available.

S. 89° 50' W., beginning new measurement.

Asc. 230 ft. over E. slope.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
4.70	Trail road, bears N. and S.
5.18	Intersect line 1-2 of Pass Lode, Mineral Survey No. 6214. Cor. No. 1 of Pass Lode, previously described, bears N. 51° 33' E., 4.20 chs. distance.
40.27	<p>The cor. of secs. 1 and 12.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
13.90	<p>N. 0° 18' W., along the W. bdy. of sec. 1.</p> <p>Over rolling mountain land, through scattered timber and undergrowth.</p> <p>Asc. 160 ft. over SE. slope.</p> <p>Ridge, bears NE. and SW.; desc. 130 ft. over NW. slope.</p>
40.12	<p>The 1/2 sec. cor. of sec. 1, monumented with a limestone, 20x12x8 ins., firmly set and plainly mkd. 1/2 on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E 1/2 S1 1970</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>No suitable bearing trees available.</p> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>From the above 1/2 sec. cor., U.S.G.S. Triangulation Station "1-298A" (Unadj.) bears N. 89° 55' W., 45.42 chs. dist., monumented with a 3/4 in. drill steel driven into the rock outcrop protruding 6 ins. above ground.</p>
28.00	<p>N. 0° 12' W., beginning new measurement.</p> <p>Asc. 145 ft. over SW. slope.</p> <p>Leave timber.</p>
30.50	High ridge, bears N. 45° W. and S. 45° E.; desc. 230 ft. over N. slope.
46.69	<p>The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>The true point for the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., at a point S. 89° 15' W., 40.26 chs. dist. from the ½ sec. cor. of secs. 2 and 35, Tps. 9 and 10 N., R. 7 E., was determined by Glen B. Hatch, Cadastral Surveyor, in 1970, in the survey of T. 9 N., R. 7 E., under Group No. 519, Utah, falls in private meadow and was not monumented.</p> <p>From the true point for the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.</p> <p>N. 1° 19' E., bet. secs. 34 and 35.</p> <p>Over level meadow land.</p>
6.00	Fence, bears N. 80° E. and S. 80° W.
39.24	<p>Point for the ½ sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E S34 S35 1970</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Cor. is located 20 lks. W. of canal that drains N.</p>
50.00	Canal, drains N. 5° W.
78.48	<p>Point for the cor. of secs. 26, 27, 34 and 35, at proportionate distance; falls in meadow; there is no remaining evidence of the original cor. The witness cor. bears N. 89° 29' W., 0.90 chs. dist., hereinafter described.</p> <p>Land, level meadow. Soil, clay. No timber. Undergrowth, grass.</p>
	<p>N. 87° 34' E., bet. secs. 26 and 35.</p> <p>Over level meadow land.</p>
17.15	Leave meadow; asc. 280 ft. over W. slope.
24.10	Side hill ditch, drains S. 6° 40' E.
24.95	Trail road, bears N. 6° 40' W. and S. 6° 40' E.
25.23	Power line, bears N. 6° 40' W. and S. 6° 40' E.
32.15	Base of mountain, begin steep asc. of W. slope. Enter scattered timber.
40.04	<p>Point for the ½ sec. cor. of secs. 26 and 35, at proportionate bearing and distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., over a</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	cross (X) chiseled in solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T10N R7E $\frac{1}{4}$ $\frac{S26}{S35}$ 1970</p> <p>No suitable bearing trees available.</p> <p>Cor. is located on steep W. slope of mountain.</p> <hr/> <p>N. 87° 54' E., beginning new measurement.</p> <p>Asc. 780 ft. over steep W. slope.</p>
25.61	Top of ridge, slopes S.; desc. 190 ft. over steep E. slope.
40.53	<p>The cor. of secs. 25, 26, 35 and 36.</p> <p>Land, level meadow W. $\frac{1}{2}$; mountainous E. $\frac{1}{2}$. Soil, clay. Timber, scattered juniper and pinon. Undergrowth, meadow grass and sagebrush.</p> <hr/> <p>From the true point for the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 2° 13' E., bet. secs. 26 and 27.</p> <p>Over level meadow land.</p>
39.75	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, determined by cor. of fences, bearing W. and N. This position is harmoniously related to existing cors., has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ $\frac{S27}{S26}$ 1970</p> <hr/> <p>N. 0° 11' W., beginning new measurement.</p> <p>Continue over level meadow land.</p>
41.04	<p>The cor. of secs. 22, 23, 26 and 27, determined by cor. of fences, bearing S. and E. This position is harmoniously related to existing cors., has long been recognized as the cor. by the adjacent land owners and is accepted as the best existing evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS		
	<p>T10N R7E S22 S23 S27 S26 1970</p> <p>Land, level meadow. Soil, clay. No timber. Undergrowth, meadow grass.</p>	
	<p>N. 87° 12' E., bet. secs. 23 and 26.</p> <p>Over level meadow land along fence line. Asc. 455 ft. over W. slope.</p> <p>7.30 Trail road, bears S. 30° E. and curves to N. Leave meadow.</p> <p>14.25 Power line, bears N. 8° W. and S. 8° E.</p> <p>39.53 Point for the ½ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>	
	<p>T10N R7E ½ S23 ½ S26 1971</p> <p>No accessories available.</p>	
	<p>Asc. 435 ft. over W. slope.</p> <p>65.75 Top of mountain, bears N. and S.; desc. 100 ft. over E. slope. Enter scattered timber.</p> <p>79.27 Intersect the W. bdy. of sec. 24.</p> <p>Point for the closing cor. of secs. 23 and 26, at proportionate distance bet. the cor. of secs. 24 and 25, and the ½ sec. cor. of sec. 24; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p>T10N R7E S23 C S24 S26 C 1970</p>	
	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>No suitable bearing trees available.</p> <p>From the above closing cor., the cor. of secs. 24 and 25, bears S. 0° 29' E., 1.60 chs. dist.</p> <p>Land, level meadow, W. ½; mountainous E. ½. Soil, clay. Timber, scattered juniper and pinon E. ½ mile. Undergrowth, meadow grass and sagebrush.</p>	

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

884

CHAINS	
	<p>Point for the E. $\frac{1}{4}$ sec. cor. of sec. 26, at midpoint bet. the cor. of secs. 25, 26, 35 and 36, and the closing cor. of secs. 23 and 26.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S26 1970</p> <p>No accessories available.</p> <p>From the above $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 25, bears S. $0^{\circ} 07' E.$, 80 lks. dist.</p>
	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. $0^{\circ} 25' W.$, bet. secs. 22 and 23.</p> <p>Over level meadow land.</p>
0.40	Crawford Thompson Canal, drains E. curving irregularly to N.
42.20	<p>The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, determined latitudinally by an old fence bearing E. and W., this fence is recognized by adjacent land owners as the property line and is accepted as the best existing evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S22 S23 1970</p>
	N. $0^{\circ} 25' W.$, beginning new measurement.
38.20	Crawford Thompson Canal, drains N. $30^{\circ} W.$
39.50	Fence, bears W.
39.80	Improved dirt road, bears W. and E.
40.00	<p>The cor. of secs. 14, 15, 22 and 23, determined by cor. of fences which bear N., S., E. and W. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E S15 S14 S22 S23 1970</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	Land, level meadow. Soil, clay. No timber. Undergrowth, meadow grass.						
	N. 87° 48' E., bet. secs. 14 and 23. Over nearly level land along fence line.						
2.25	Trail road, bears N. 38° E. and S. on a curve.						
5.40	Power line, bears N. 6° 40' W. and S. 6° 40' E.						
6.55	Trail road, bears N. and S.						
20.00	End of fence, at base of mountain, enter scattered timber. Asc. 280 ft. over W. slope.						
25.00	Ridge, bears N. and S.						
39.61	Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> <p>T10N R7E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">1/4</td> <td style="border-left: 1px solid black; padding-left: 5px;">S14</td> <td></td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 5px;">S23</td> <td></td> </tr> </table> <p>1970</p> </div> <p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. No suitable bearing trees available. Asc. 615 ft. over steep W. slope.</p>	1/4	S14			S23	
1/4	S14						
	S23						
54.30	Draw, drains irregularly N. 60° W.						
67.20	Draw, drains irregularly S. 85° W.						
77.30	Top of mountain, bears N. and S.; desc. 20 ft. over E. slope.						
79.12	Intersect the W. bdy. of sec. 13. Point for the closing cor. of secs. 14 and 23, at proportionate distance bet. the cor. of secs. 13 and 24, and the 1/4 sec. cor. of sec. 13; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> <p>T10N R7E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">C S14</td> <td rowspan="2" style="padding-left: 5px;">S13</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">C S23</td> </tr> </table> <p>1970</p> </div> <p>No accessories available. From the above closing cor., the cor. of secs. 13 and 24, bears S. 0° 10' E., 2.64 chs. dist.</p>	C S14	S13	C S23			
C S14	S13						
C S23							

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, meadow grass and sagebrush.</p> <hr/> <p>Point for the E. $\frac{1}{4}$ sec. cor. of sec. 23, at midpoint bet. the closing cor. of secs. 23 and 26, and the closing cor. of secs. 14 and 23.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S23 1970</p> <p>Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <p>From the above $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 24, bears S. $0^{\circ} 21' E.$, 2.13 chs. dist.</p>
<p>27.05</p> <p>40.56</p> <p>24.00</p> <p>39.87</p>	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. $1^{\circ} 04' W.$, bet. secs. 14 and 15.</p> <p>Over nearly level land, through sagebrush, along fence line.</p> <p>Power line, bears N. $29^{\circ} 30' W.$ and S. $29^{\circ} 30' E.$</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, determined latitudinally by proportionate measurement and longitudinally by an old fence bearing N. and S.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S15 S14 1970</p> <p>No accessories available.</p> <hr/> <p>N. $1^{\circ} 23' W.$, beginning new measurement.</p> <p>Asc. 490 ft. over S. slope, continue along fence line.</p> <p>End of fence at base of mountain. Enter scattered timber, begin steep ascent of S. slope.</p> <p>Point for the cor. of secs. 10, 11, 14 and 15, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (X) chiseled in solid rock and in a mound of stone, 10 ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	<p style="text-align: center;">T10N R7E S10 S11 S15 S14 1970</p> <p>No suitable bearing trees available.</p> <p>Land, mountainous. Soil, clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>N. 87° 05' E., bet. secs. 11 and 14.</p> <p>Over broken mountain land, through scattered timber and undergrowth.</p> <p>Asc. 150 ft. over W. slope.</p> <p>3.19 Rocky point, projects S.</p> <p>10.15 Spur, slopes S.</p> <p>14.75 Canyon, drains irregularly S.</p> <p>19.40 Spur, slopes S.</p> <p>28.00 Canyon, drains irregularly S.</p> <p>35.00 Spur, slopes S.</p> <p>39.60 Canyon, drains irregularly S.</p> <p>40.27 Point for the 1/2 sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., over a cross (X) chiseled in solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T10N R7E 1/2 S11 S14 1970</p> <p>No accessories available.</p> <p>Asc. 285 ft. over W. slope.</p> <p>49.70 Ridge, bears N. and S. Desc. 110 ft. over E. slope.</p> <p>55.45 Draw, drains irregularly S. 45° E. Asc. 205 ft. over W. slope.</p> <p>66.70 Spur, slopes S.</p> <p>68.75 Canyon, drains S.</p> <p>74.55 Spur, slopes S. Desc. 65 ft. over E. slope.</p> <p>80.54 Intersect the W. bdy. of sec. 12.</p> <p>Point for the closing cor. of secs. 11 and 14, at proportionate distance bet. the cor. of secs. 12 and 13, and the 1/2 sec. cor. of sec. 12; there is no remaining</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E C S11 S12 C S14 1970</p> <p>No accessories available.</p> <p>From the above closing cor., the cor. of secs. 12 and 13, bears S. 0° 22' E., 3.80 chs. dist.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>Point for the E. ¼ sec. cor. of sec. 14, at midpoint bet. the closing cor. of secs. 14 and 23, and the closing cor. of secs. 11 and 14.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E ¼ S14 1970</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>From the above ¼ sec. cor., the ¼ sec. cor. of sec. 13, bears S. 0° 22' E., 3.26 chs. dist.</p> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 0° 52' W., bet. secs. 10 and 11.</p> <p>Over steep and broken mountain land, through scattered timber and undergrowth.</p> <p>Asc. 410 ft. over steep S. slope.</p> <p>10.00 Draw, drains irregularly S. 5° W. from N. 60° E.</p> <p>15.00 Steep rocky spur, slopes SW.; desc. 195 ft. along steep W. slope.</p> <p>22.50 Small draw, drains irregularly W.</p> <p>39.86 Point for the ¼ sec. cor. of secs. 10 and 11, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>T10N R7E $\frac{1}{4}$ S10 S11 1970</p> <p>No suitable bearing trees available.</p> <p>Desc. along steep W. slope.</p> <p>49.00 Draw, drains irregularly W.</p> <p>77.75 Top of vertical cliff.</p> <p>78.00 Base of cliff.</p> <p>81.44 The cor. of secs. 2, 3, 10 and 11; monumented with a limestone, 20x8x6 ins., firmly set and dimly mkd. 5 notches on S. and 2 notches on E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p>T10N R7E S3 S2 S10 S11 1970</p> <p>No accessories available.</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>N. 86° 43' E., bet. secs. 2 and 11.</p> <p>Over broken mountain land, through scattered timber and undergrowth.</p> <p>Asc. 565 ft. over steep W. slope.</p> <p>22.25 Spur, slopes N.</p> <p>40.88 Point for the ¼ sec. cor. of secs. 2 and 11, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p>T10N R7E $\frac{1}{4}$ S2 S11 1970</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

Cor. is located on steep N. slope 2.00 chs. S. of
bottom of canyon, drains W.

Asc. 410 ft. over steep W. slope.

63.75 Leave timber.

67.75 Top of mountain, bears N. and S.; desc. 135 ft. over
E. slope.

81.76 Intersect the W. bdy. of sec. 1.

Point for the closing cor. of secs. 2 and 11, at propor-
tionate distance bet. the cor. of secs. 1 and 12, and
the $\frac{1}{4}$ sec. cor. of sec. 1; there is no remaining
evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins.
in the ground to solid rock and in a mound of stone,
4 ft. base to top, with brass cap mkd.

TION R7E

C	S2		S1
C	S11		S1

1970

No accessories available.

From the above closing cor., the cor. of secs. 1 and
12, bears S. $0^{\circ} 18' E.$, 5.46 chs. dist.

Land, mountainous.

Soil, rocky clay.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 11, at proportion-
ate distance bet. the closing cor. of secs. 11 and 14,
and the closing cor. of secs. 2 and 11.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to solid rock and in a mound of stone,
3 ft. base to top, with brass cap mkd.

TION R7E

$\frac{1}{4}$		S11
---------------	--	-----

1971

No accessories available.

From the above $\frac{1}{4}$ sec. cor., the W. $\frac{1}{4}$ sec. cor. of sec.
12, bears S. $0^{\circ} 07' W.$, 3.79 chs. dist.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 2, at proportion-
ate distance bet. the closing cor. of secs. 2 and 11,
and the cor. of secs. 1, 2, 35 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p style="text-align: center;">T10N R7E $\frac{1}{4}$ S2 1971</p> <p>Raise a mound of stone, 4 ft. base, 2½ ft. high, W. of cor.</p> <p>From the above ¼ sec. cor., the W. ¼ sec. cor. of sec. 1, bears S. 0° 12' E., 5.55 chs. dist.</p>
	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>N. 2° 06' E., bet. secs. 2 and 3.</p> <p>Over broken mountain land, through scattered timber and undergrowth.</p> <p>Desc. about 100 ft. over N. slope.</p>
5.00	Bottom of canyon, drains W.; asc. about 200 ft. over S. slope.
14.85	Spur, projects W.; desc. 290 ft. over NW. slope.
42.70	Point for the ¼ sec. cor. of sec. 2, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S2 1970</p> <p>Cor. is located on steep W. slope, 34 lks. S. of ledge overhang.</p>
43.28	Point for the ¼ sec. cor. of sec. 3, at proportionate distance; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) chiseled in solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S3 1970</p> <p>Cor. is located on steep W. slope.</p> <p>Desc. 560 ft. along steep W. slope.</p>
86.56	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp.
	<p>Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, marked and witnessed as described in the field notes of T. 9 N., R. 7 E., surveyed by Glen B. Hatch in 1970 under Group No. 519, Utah.

N. 0° 29' E., bet. secs. 33 and 34.

Over level meadow land.

0.87 Fence, bears E. and W.

15.25 Canal, drains N. 50° W.

40.31 The ¼ sec. cor. of secs. 33 and 34, determined by cor. of fences which bear N. and W. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

¼

S33 | S34

1970

No accessories available.

N. 0° 22' E., beginning new measurement.

Over meadow land, along fence line.

11.05 Fence, bears W.

19.20 Fence, bears S. 81° W.

40.01 The cor. of secs. 27, 28, 33 and 34, determined by cor. of fences, which bear N., S. and E. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

S28 | S27

S33 | S34

1970

No accessories available.

Land, level meadow.

Soil, clay.

No timber.

Undergrowth, meadow grass.

From the true cor. point for secs. 26, 27, 34 and 35.

N. 89° 29' W., bet. secs. 27 and 34.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
0.90	<p>Over level meadow land.</p> <p>Point selected for the witness cor. of secs. 26, 27, 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E S27 S26 W S34 S35 C 1970</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Witness cor. is located 20 lks. E. of canal that drains N.</p>
1.10	Canal, drains N.
17.15	Fence, bears N. 45° E. and S. 45° W.
40.12	<p>The ½ sec. cor. of secs. 27 and 34, determined longitudinally by an old fence bearing N. and S. and latitudinally by proportionate measurement.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E ½ S27 S34 1970</p> <p>No accessories available.</p> <hr/> <p>N. 89° 29' W., beginning new measurement.</p> <p>Continue over level meadow land.</p>
3.00	Enter the Bear River, drains irregularly W. from the S.
9.90	Leave the Bear River, drains irregularly S. 45° W. from the E.
27.90	Bear River, drains irregularly N. beginning of fence, along fence.
41.56	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>Land, level meadow. Soil, clay. No timber. Undergrowth, meadow grass.</p>
	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 86° 223' W., bet. secs. 10 and 15.</p> <p>Over broken mountain land, through scattered timber and undergrowth.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	Desc. 50 ft. over W. slope.
1.50	Canyon, drains S.; asc. 110 ft. over steep E. slope.
4.90	Ridge, bears N. and S. leave timber; desc. 745 ft. over steep W. slope.
20.00	Fences, bears W. and N. 65° E.; thence along fence line.
26.53	Power line, bears N. 16° 50' W. and S. 16° 50' E.
30.85	Trail road, base of mountain, bears N. and S.
32.75	Crawford Thompson Canal, drains N.; enter meadows.
40.30	The ¼ sec. cor. of secs. 10 and 15, determined by cor. of fences which bear S., E. and W. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best available evidence of the position of the original cor.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E $\frac{1}{4}$ $\frac{S10}{S15}$ 1970</p>
	No accessories available.
	<hr/>
N	N. 89° 58' W., beginning new measurement.
	Continue over level meadow land, along fence line.
18.00	Bear River, drains irregularly N.
32.50	Canal, drains N. 45° W.
41.19	The cor. of secs. 9, 10, 15 and 16, determined by cor. of fences, which bears S., E. and W. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best available evidence of the position of the original cor.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E $\frac{S9}{S16}$ $\frac{S10}{S15}$ 1970</p>
	No accessories available.
	Land, mountainous E. ½ mile; meadows W. ½ mile.
	Soil, rocky clay.
	Timber, scattered juniper and pinon E. ½ mile.
	Undergrowth, sagebrush and meadow grass.
	N. 0° 50' E., bet. secs. 9 and 10.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	Over meadows and swamp land.
5.00	Canal, drains N. 45° W.
15.15	Bear River, drains irregularly S. 45° W., meandering to N.
26.50	Bear River, drains irregularly S. 45° E., meandering to NE.
41.42	Point for the 1/2 sec. cor. of secs. 9 and 10, at proportionate distance falls in swamp land where a corner cannot be perpetuated; there is no remaining evidence of the original cor. Point not monumented.
75.00	Canal, drains N. from S. 20° W.
82.84	The cor. of secs. 3, 4, 9 and 10, determined longitudinally by proportionate measurement and latitudinally by an old fence bearing E. and W. Cor. point falls in canal where a cor. cannot be perpetuated.
	Land, meadows and swamps. Soil, clay. No timber. Undergrowth, meadow grass.
	From the cor. of secs. 2, 3, 10 and 11. N. 84° 20' W., bet. secs. 3 and 10. Over broken mountain land, through scattered timber and undergrowth. Desc. 720 ft. over steep W. slope.
30.00	Leave timber.
32.95	Power line, base of mountain, bears N. 3° 30' E. and S. 3° 30' W.
38.10	Trail road, bears N. and S.
38.80	The 1/2 sec. cor. of secs. 3 and 10, determined by cor. of fences which bear N., E. and W. This position has long been recognized as the cors. by adjacent land owners and is accepted as the best available evidence of the orig. cor. At the cor. point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R7E 1/2 $\frac{S3}{S10}$ 1970 No accessories available.
	N. 89° 42' W., beginning new measurement.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS							
0.75	Crawford Thompson Canal, drains N.; enter meadow land.						
22.50	Bear River, drains irregularly N. Meandering to W., thence N.						
40.43	<p>Point for the cor. of secs. 3, 4, 9 and 10.</p> <p>Land, mountainous E. $\frac{1}{2}$ mile; leave meadow land W. $\frac{1}{2}$. Soil, rocky clay. Timber, scattered juniper and pinon E. $\frac{1}{2}$ mile. Undergrowth, sagebrush and meadow grass.</p>						
1.00	<p>N. 89° 37' W., bet. secs. 4 and 9, for control purposes.</p> <p>Over level meadow land, along fence line.</p> <p>Point selected for the witness cor. of secs. 3, 4, 9 and 10.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10N R7E</p> <table border="1" style="margin: auto;"> <tr> <td>S4</td> <td>S3</td> <td>W</td> </tr> <tr> <td>S9</td> <td>S10</td> <td>C</td> </tr> </table> <p>1970</p> </div> <p>No accessories available.</p>	S4	S3	W	S9	S10	C
S4	S3	W					
S9	S10	C					
40.13	<p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 4 and 9.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10N R7E</p> <table border="1" style="margin: auto;"> <tr> <td>W</td> <td>S4</td> </tr> <tr> <td>$\frac{1}{4}$</td> <td>C S9</td> </tr> </table> <p>1971</p> </div> <p>No accessories available.</p>	W	S4	$\frac{1}{4}$	C S9		
W	S4						
$\frac{1}{4}$	C S9						
40.53	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, determined by cor. of fences which bear N., E. and W., falls in a swamp where a cor. cannot be perpetuated. This position is harmoniously related to existing cors. and has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.</p>						
12.00	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 0° 02' E., bet. secs. 3 and 4.</p> <p>Over meadow and swamp land.</p>						
41.42	<p>Canal, drains N. 28° W. from the S.</p>						
41.42	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4, at proportionate distance falls in swamp land where a cor. cannot be perpetuated; there is no remaining evidence of the original cor. Point not monumented.</p>						

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
46.00	Bear River, drains irregularly meandering to N., from E.
68.00	Bear River, drains irregularly N. 70° E., from the S.
76.00	Bear River, drains irregularly S. 50° W.
83.00	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp.
	Land, meadows and swamps. Soil, clay. No timber. Undergrowth, meadow grass.
	From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, at the cor. of fences, which bear N. and W., mkd. and witnessed as described in the official record of the 1970 resurvey by Glen B. Hatch, under Group No. 519, Utah.
	N. 0° 43' E., bet. secs. 32 and 33.
	Over gently rolling hills, through dense sagebrush.
	Asc. 25 ft. over gentle S. slope, along fence.
7.00	Top of ascent; desc. 160 ft. over gentle N. slope.
34.00	Wash, 30 lks. wide, 10 ft. deep, drains irregularly E.
39.90	Fence cor., bears W. 102 lks. dist., fences bear N., S. and E.
40.16	Unimproved dirt road, bears E. and W.
40.40	Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E
	¼
	S32 S33
	1970
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Continue over nearly level land.
47.85	Wash, 10 lks. wide, 2 ft. deep, drains irregularly E.
54.25	Wash, 15 lks. wide, 3 ft. deep, drains irregularly E.
73.20	Wash, drains N. 75° E.
76.45	Wash, 20 lks. wide, 8 ft. deep, drains irregularly E.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
80.80	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{S29}{S32} \frac{S28}{S33}$</p> <p style="text-align: center;">1970</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Land, gently rolling to nearly level. Soil, clay. No timber. Undergrowth, sagebrush.</p>
20.25	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>N. 89° 15' W.; bet. secs. 28 and 33.</p> <p>Over level meadow land.</p> <p>Cor. of fences, which bears N., S. and W., thence along fence line. Enter sagebrush flats.</p>
24.00	<p>Canal, drains N.</p>
40.19	<p>The ¼ sec. cor. of secs. 28 and 33; monumented with a quartzite stone, 14x6x4 ins., firmly set in E-W fence and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4} \frac{S28}{S33}$</p> <p style="text-align: center;">1970</p> <p>Deposit the original cor. stone alongside the iron post.</p>
5.30	<p>N. 89° 36' W., beginning new measurement.</p> <p>Continue over sagebrush flat.</p> <p>Cor. of fences, which bears N. 17° 20' W., S. 17° 20' E. and E.</p>
6.00	<p>Paved State Highway No. 16, bears N. 17° 20' W. to Randolph and S. 17° 20' E. to Woodruff.</p>
6.50	<p>Cor. of fences which bears N. 17° 20' W., S. 17° 20' E. and W.</p>

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
15.60	Wash, drains N. 45° E.
20.60	Cor. of fences, which bears S. and E.
22.00	Enter gentle rolling foothills.
41.10	The cor. of secs. 28, 29, 32 and 33.
	Land, level. Soil, clay. No timber. Undergrowth, meadow grass and sagebrush.
	N. 1° 31' W., bet. secs. 28 and 29.
	Over nearly level land, through sagebrush, along E. side of fence.
40.42	The ¼ sec. cor. of secs. 28 and 29, monumented with a gray limestone, 14x10x4 ins., firmly set in N-S fence line and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E
	S29 S28
	1970
	Bury the original cor. stone alongside the iron post.
	N. 0° 49' E., beginning new measurement.
0.35	Wash, 5 lks. wide, 2 ft. deep, drains irregularly E.
20.10	Power line, bears N. 19° W. and S. along fence line.
39.90	Power line, bears E. and W.
40.00	Trail road, bears E. and W.
40.38	The cor. of secs. 20, 21, 28 and 29, determined by cor. of fences which bear N., S. and W. This position has long been recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	T10N R7E
	S20 S21 S29 S28
	1970
	Land, nearly level. Soil, clay. No timber. Undergrowth, sagebrush.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	North, bet. secs. 20 and 21.
	Over level sagebrush flat.
11.00	Wash, 30 lks. wide, 3 ft. deep, drains irregularly E.
17.90	Power line, bears N. 22° 40' W. and S. 22° 40' E.
18.20	Fence, bears N. 22° 40' W. and S. 22° 40' E.
20.15	Paved State Highway No. 16, bears N. 22° 40' W. to Randolph and S. 22° 40' E. to Woodruff.
22.20	Fence, bears N. 22° 40' W. and S. 22° 40' E.
40.18	Point selected for the $\frac{1}{4}$ witness sec. cor. of secs. 20 and 21.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T10N R7E $\frac{1}{4}$ WAC S20 S21 1971</p>
	Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.
41.18	Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at proportionate distance, falls in private meadow land; there is no remaining evidence of the original cor.
46.20	Canal, drains N. 50° W.
82.36	The true point for the cor. of secs. 16, 17, 20 and 21, determined by the center of a road, bearing E. and W. and at a point due North, from the cor. of secs. 20, 21, 28 and 29.
	This position was shown to me by Milton J. Hatch and Eral Stuark, the adjacent land owners and is accepted as the best existing evidence of the position of the orig. cor.
	At the cor. point
	Set a spike in road.
	From which
	An iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, bears S. 46° 45' E., 60.6 lks. dist., with brass cap mkd. T10N R7E S21 RM 40 FT 1970 with an arrow pointing to true cor. point.
	An iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, bears S. 50° 20' W., 60.6 lks. dist., with brass cap mkd. T10N R7E S20 RM 40 FT 1970 with an arrow pointing to true cor. point.
	Land, level. Soil, clay. No timber. Undergrowth, meadow grass and sagebrush.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the official record of the 1970 resurvey by Glen B. Hatch, under Group No. 519, Utah.

N. 0° 42' E., bet. secs. 31 and 32.

Over gently rolling hills, through dense sagebrush.

16.00 Wash, drains S. 85° E.

41.03 Point for the ¼ sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

¼
S31|S32

1971

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

49.00 Wide spur, slopes E.

56.00 Draw, drains E.

59.50 Spur, slopes E.

82.06 The cor. of secs. 29, 30, 31 and 32, monumented with a gray sandstone, 16x9x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

S30|S29
S31|S32

1970

Deposit the original cor. stone alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, sagebrush.

From the cor. of secs. 28, 29, 32 and 33.

N. 88° 33' W., bet. secs. 29 and 32.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	Over gently rolling hills, through dense sagebrush.
1.40	Fence under power line, bears N. and S.
22.50	Draw, drains S. 65° E.
41.00	The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with a gray sandstone, 14x4x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E
	$\frac{1}{4}$ $\frac{S29}{S32}$
	1970
	Deposit the original cor. stone alongside the iron post.
	No accessories available.
	N. 89° 18' W., beginning new measurement.
25.70	Trail road, bears N. 45° W. and S. 45° E.
40.99	The cor. of secs. 29, 30, 31 and 32.
	Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.
	S. 82° 56' W., bet. secs. 30 and 31.
	Over gently rolling hills, through dense sagebrush.
	Asc. 95 ft. over gentle E. slope.
16.00	Wash, 10 lks. wide, 3 ft. deep, drains irregularly N, 60° E.
40.05	The $\frac{1}{4}$ sec. cor. of secs. 30 and 31, monumented with a sandstone, 12x10x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground; with brass cap mkd.
	T10N R7E
	$\frac{1}{4}$ $\frac{S30}{S31}$
	1970

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Deposit the original cor. stone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <hr/> <p>S. 84° 06' W., beginning new measurement.</p> <p>Asc. 100 ft. over gentle SE. slope.</p>
27.00	Draw, drains irregularly S.
39.72	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the official record of the 1964 resurvey by Glen B. Hatch.</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 0° 20' W., bet. secs. 29 and 30.</p> <p>Over gently rolling hills, through dense sagebrush.</p> <p>Asc. 130 ft. over gentle S. slope.</p>
3.80	Draw, drains irregularly E.
8.90	Trail road, bears N. 64° W. and S. 64° E.
14.00	Wash, drains easterly.
33.55	Trail road, bears N. 70° E. and S. 70° W.
39.55	Wash, 10 ft. deep, 30 lks. wide, drains N. 70° E.
39.74	<p>Point for the ¼ sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E ½ S30 S29 1971</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.</p> <p>Asc. 100 ft. over S. slope.</p>
43.50	Top of low hill, continue over nearly level land.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

- 62.75 Wash, 10 lks. wide, 3 ft. deep, drains S. 85° E.
64.55 Wash, 30 lks. wide, 10 ft. deep, drains S. 50° E.
79.48 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 18x9x7 ins., firmly set and plainly mkd. 2 notches on S. and 5 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E	
S19	S20
S30	S29

1971

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 56' W., bet. secs. 20 and 29.

Over gently rolling land, through dense sagebrush along fence line.

Desc. 35 ft. over gentle W. slope.

- 7.60 Power line, bears N. 19° W. and S. 19° E.
10.70 Wash, 60 lks. wide, 8 ft. deep, drains irregularly N. 60° E.; asc. 25 ft. over gentle E. slope.
41.00 The ¼ sec. cor. of secs. 20 and 29, monumented with a sandstone, 12x5x4 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E	
¼	S20
	S29

1971

Deposit the original cor. stone alongside the iron post.

Cor. is located in E-W fence line.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	N. 89° 41' W., beginning new measurement. Asc. 140 ft. over gentle E. slope along fence line.
20.00	Cor. of fences, which bears N. 8° W., E. and W.
37.85	Cor. of fences, which bears E. and N. 20° W. Top of ascent; desc. 45 ft. over gentle W. slope.
41.00	The cor. of secs. 19, 20, 29 and 30. Land, gently rolling. No timber. Soil, clay. Undergrowth, sagebrush.
	S. 83° 42' W., bet. secs. 19 and 30. Over gentle rolling land, through dense sagebrush. Desc. 85 ft. over gentle W. slope.
11.15	Wash, 20 lks. wide, 4 ft. deep, drains irregularly S.
13.10	Wash, drains S. 45° E.
33.95	Trail road, bears N. 40° W. and S. 40° E.; asc. 70 ft. over gentle E. slope.
40.09	The $\frac{1}{4}$ sec. cor. of secs. 19 and 30, monumented with a sandstone, 15x8x3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T I O N R 7 E $\frac{1}{4}$ $\frac{\$19}{\$30}$ 1971 Deposit the original cor. stone alongside the iron post. Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	S. 86° 34' W., beginning new measurement. Asc. 80 ft. over gentle E. slope.
14.20	Top of ascent; desc. 50 ft. over gentle W. slope.
28.40	Wash, 10 lks. wide, 2 ft. deep, drains irregularly S.
38.92	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., firmly set and protruding 18 ins. above ground, mkd. and witnessed as described in the official record of the 1964 resurvey by Glen B. Hatch.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 19, 20, 29 and 30. N. 0° 14' E., bet. secs. 19 and 20. Over gently rolling land, through dense sagebrush. Asc. 80 ft. over gentle SW. slope.</p>
8.25	Fence, bears N. 20° W. and S. 20° E.
13.65	Top of ascent; desc. 75 ft. over gentle NE. slope.
25.85	Bottom of descent; asc. 40 ft. over gentle SE. slope.
28.95	Fence, bears N. 82° E. and S. 82° W.
35.30	Top of ascent; desc. 15 ft. over gentle NE. slope.
41.00	<p>The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, monumented with a sandstone, 12x7x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ S19 S20 1971</p> <p>Deposit the original cor. stone alongside the iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.</p>
	<p>N. 0° 17' E., beginning new measurement. Desc. 190 ft. over N. slope.</p>
1.25	Fence, bears S. 77° W. and N. 77° E.
9.05	Draw, drains N. 7° W.
31.15	Trail road, bears N. 45° E. and S. 45° W.
32.70	Wash, 30 lks. wide, 10 ft. deep, drains N. 45° E.
34.40	Wash, 20 lks. wide, 5 ft. deep, drains N. 75° E.
41.50	The cor. of secs. 17, 18, 19 and 20, monumented with a gray sandstone, 14x8x6 ins., firmly set and plainly mkd. 5 notches on E. and 3 notches on S. edges.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

S18 | S17

S19 | S20

1970

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, sagebrush.

From the true point for the cor. of secs. 16, 17, 20 and 21, previously described.

N. 89° 48' W., bet. secs. 17 and 20.

Over level land, down the center of gravel road.

10.00 Canal, drains N.

22.75 Center of paved State Highway No. 16, bears N. 15° 03' W. to Randolph and S. 15° 03' E. to Woodruff. End gravel road from E.

23.55 Fence and power line, bears N. 15° 03' W. and S. 15° 03' E., enter cultivated land. Fence, bears W., thence along fence.

34.00 Trail road, bears N. 45° W. and S. 75° E.

36.30 Power line, bears N. 19° W. and S. 19° E. Leave cultivated land.

40.50 The ¼ sec. cor. of secs. 17 and 20, monumented with a red sandstone, 12x8x6 ins., firmly set in old fence line bearing E. and W., and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R7E

¼ S17

S20

1970

Deposit the original cor. stone alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS					
<p>20.00</p> <p>21.65</p> <p>26.50</p> <p>41.19</p>	<p>N. 89° 48' W., beginning new measurement.</p> <p>Continue over gentle rolling hills, through sagebrush, along fence.</p> <p>Trail road, bears N. 70° E. and S. 70° W.</p> <p>Cor. of fences which bear N., S. 50 lks.; thence S. 42° W. and E.</p> <p>Wash, 40 lks. wide, 8 ft. deep, drains irregularly N. 70° E.</p> <p>The cor. of secs. 17, 18, 19 and 20.</p> <p>Land, gently rolling. Soil, clay. No timber.. Undergrowth, sagebrush.</p>				
<p>38.81</p> <p>59.30</p> <p>79.17</p>	<p>S. 83° 04' W., bet. secs. 18 and 19.</p> <p>Over gently rolling hills, through dense sagebrush.</p> <p>Asc. 60 ft. over gentle E. slope.</p> <p>Point for the ¼ sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10N R7E</p> <table border="0"> <tr> <td>¼</td> <td><u>S18</u></td> </tr> <tr> <td></td> <td>S19</td> </tr> </table> <p>1970</p> </div> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <p>Asc. 150 ft. over gentle E. slope.</p> <p>Trail road, bears N. and S.</p> <p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the official record of the 1964 resurvey by Glen B. Hatch, Supervisory Cadastral Surveyor.</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.</p>	¼	<u>S18</u>		S19
¼	<u>S18</u>				
	S19				
	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 0° 37' E., bet. secs. 17 and 18.</p>				

Dependent Resurvey of a Portion of the
Subdivision, Township 10 North, Range 7 East

CHAINS	
	Over gently rolling hills; through dense sagebrush.
	Asc. 175 ft. over S. slope.
3.60	Wash, 10 lks. wide, 3 ft. deep, drains S. 70° E.
23.00	Fence, bears N. 80° W. and S. 80° E.
40.00	Top of knoll.
42.13	The $\frac{1}{4}$ sec. cor. of secs. 17 and 18, monumented with a sandstone, 8x3x2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E $\frac{1}{4}$ S18 S17 1971
	Deposit the original cor. stone alongside the iron post.
	No accessories available.

	N. 0° 51' W., beginning new measurement.
	Desc. 220 ft. over NW. slope.
17.20	Cor. of fences, which bears N. and E., thence along fence.
21.65	Wash, 40 lks. wide, 7 ft. deep, drains N. 60° E.
40.70	Cor. of fences, which bear S. and E.
41.03	The cor. of secs. 7, 8, 17 and 18, monumented with a boulder, 12x12x5 ins., firmly set and plainly mkd. 4 notches on the S. and 5 notches on the E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R7E S7 S8 S18 S17 1971
	Deposit the original cor. stone alongside the iron post.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	<p>Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.</p>
	<p>S. 80° 29' W., bet. secs. 7 and 18. Over gently rolling hills, across reseeded area. Asc. 150 ft. over E. slope.</p>
20.85	Ridge, bears N. and S.; desc. 35 ft. over W. slope.
23.10	Draw, drains S.; asc. 90 ft. over E. slope.
27.95	Ridge, bears N. and S.; desc. 130 ft. over W. slope.
38.68	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E $\frac{1}{4}$ $\frac{S7}{S18}$ 1971</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.</p> <p>From the above $\frac{1}{4}$ sec. cor., U.S.F.S. "Ant", (Unadj.) Triangulation Station, bears N. 29° 53' E., 13.15 chs. dist., monumented with a $\frac{3}{4}$ in. drill steel driven into the rock outcrop protruding 6 ins. above ground.</p> <p>Desc. 10 ft. over gentle SW. slope.</p>
43.50	Draw, drains S.; asc. 125 ft. over E. slope.
59.50	Ridge, bears N. and S.; desc. 85 ft. over W. slope.
67.90	Trail road, bears N. 20° W. and S. 20° E.
73.95	Trail road, bears N. 40° E. and S. 40° W.
78.10	Draw, drains NE.
79.11	<p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the official record of the 1964 resurvey by Glen B. Hatch.</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, sagebrush.</p>
	From the cor. of secs. 7, 8, 17 and 18.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS	
	N. 0° 06' E., bet. secs. 7 and 8. Over gently rolling hills across reseeded area.
0.80	Cor. of fences which bears N. 3° W. and E. Asc. 25 ft. over S. slope, along E. side of fence.
7.70	Spur, slopes E.; desc. 55 ft. over N. slope.
21.30	Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.; asc. 15 ft. over S. slope.
35.60	Spur, slopes E.; desc. 25 ft. over N. slope.
39.15	Unimproved dirt road, bears N. 88° E. and S. 88° W.
40.55	Wash, 15 lks. wide, 4 ft. deep, drains N. 87° E.
41.16	Point for the 1/2 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R7E 1/2 S7 S8 1971 No accessories available. Asc. 30 ft. over S. slope, along E. side of fence.
42:00	Fence cor., bears W., 1.40 chs., fences bear S., E., S. 70° W., and N. 15° E., 1.50 chs. thence N. Continue along fence line.
47.20	Top of ascent; desc. 110 ft. over N. slope.
58.65	Pump irrigation ditch, drains W.
62.25	Kennedy Irrigation ditch, drains S. 85° W.
81.85	Cor. of fences which bear E., S. 78° 59' W. and S., on S. side of road.
82.32	Point for the cor. of secs. 5, 6, 7 and 8, in center of a gravel road bearing E. and S. 78° 59' W. From fence cor. on N. side of road, fences bear N., E. and S. 78° 59' W. This position is recognized as the cor. by adjacent land owners and is accepted as the best existing evidence of the position of the original cor. At the cor. point Set a spike in center of road. from which An iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears North, 48.5 lks. dist., with brass cap mkd. T10N R7E RM S6-32 FT 1971 with an arrow pointing to the true cor. point.

Dependent Resurvey of a Portion
of the Subdivision^o
Township 10 North, Range 7 East

CHAINS	
	<p>An iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, bears South, 48.5 lks. dist., with brass cap mkd. T10N R7E RM S8 32FT 1971 with an arrow pointing to the true cor. point</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, grass and sagebrush.</p>
	<p>S. 78° 59' W., bet. secs. 6 and 7.</p> <p>Over level land down center of road.</p>
18.90	Kennedy Irrigation ditch, drains N.
20.80	Cattle guard.
21.00	Gravel road, bears S. 62° W. and E., enter reseeded area, asc. 90 ft. over E. slope.
28.40	Same gravel road, bears N. 45° W. and S. 45° E.
29.40	Pump irrigation ditch, drains N.
38.61	<p>Point for the ¼ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T10N R7E ¼ $\frac{S6}{S7}$ 1971</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p> <p>Asc. 25 ft. over E. slope.</p>
50.50	Top of ascent; desc. 75 ft. over W. slope.
68.15	Unimproved dirt road, bears N. 20° E. and S. 20° W.
70.95	Unimproved dirt road, bears N. 70° W. and S. 70° E.
73.45	Wash, 25 lks. wide, 5 ft. deep, drains N. 65° W.
75.60	Gravel road, bears N. 55° E. and S. 55° W. curving W.
79.14	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and protruding 6 ins. above ground, mkd. and witnessed as described in the official record of the 1964 resurvey by Glen B. Hatch, Supervisory Cadastral Surveyor.

Dependent Resurvey of a Portion
of the Subdivision
Township 10 North, Range 7 East

CHAINS

Land, level to gently rolling.
Soil, clay.
No timber.
Undergrowth, grass and sagebrush.

General Description

A variety of land and soil are found in Township 10 North Range 7 East. The general elevation of the township ranges from about 7,800 ft. above sea level to about 6,300 ft. above sea level along the Bear River. The west portion of the township is mostly level to gently rolling. The Crawford Mountains are located in the eastern portion of the township. The soil is rocky clay along the Crawford Mountains and a sandy clay along the Bear River. There is a scattered growth of juniper and apinon along the Crawford Mountains. The undergrowth is sagebrush and meadow grass. The township is accessible by paved Highway No. 16, and by numerous trail roads located throughout the township. The east portion of the township drains in a southeasterly direction. The west portion drains in a northeasterly direction. The Bear River enters the township through sec. 34 and leaves through sec. 3. There are a number of year round farms throughout the township.

CERTIFICATE OF SURVEY

(I) ~~KWA~~, Milton R. Workman, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 10th day of June 19 70, (I) ~~KWA~~ have dependently resurveyed the east 3 miles of the north boundary, the east boundary and a portion of the subdivision of Township 10 North, Range 7 East.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~KWA~~ and under (my) ~~KWA~~ direction, and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 31, 1972 (Date) Milton R. Workman (Cadastral Surveyor) Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Washington, D.C. Denver, Colorado

The foregoing field notes of the dependent resurvey of the east 3 miles of the north boundary, the east boundary and a portion of the subdivision of Township 10 North, Range 7 East, Salt Lake Meridian, Utah.

executed by Milton R. Workman, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

APR 16 1980 (Date) [Signature] Chief, Cadastral Survey Examination and Approval Staff

CERTIFICATE OF TRANSCRIPT

~~I Certify That the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes.~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE SEVENTH STANDARD PARALLEL SOUTH,

A PORTION OF THE SUBDIVISIONAL LINES

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

AND

THE PARTIAL SUBDIVISION OF

SECTIONS 33 AND 34,

OF

TOWNSHIP 35 SOUTH, RANGE 11 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Frank C. Profaizer, Jr. Supervisory Cadastral Surveyor

Under special instructions dated October 30, 1979, approved October 30, 1979,

, which provided for the surveys included under U.S. Survey/Group
Number 598, and assignment instructions dated November 2, 1979.

Survey commenced November 6, 19 79

Survey completed December 18, 19 79

INDEX DIAGRAM

Township 35 S., Range 11 E.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
		5	5	4	
31	32	33 3	34 4	35	36
		2	1		

Subdivision of Section 33
 Subdivision of Section 34

Page 6
 Page 8

Township 35 South, Range 11 East, Salt Lake Meridian, Utah

CHAINS

The history of the surveys of Township 35 South, Range 11 East, Salt Lake Meridian, is as follows:

The south boundary (Seventh Standard Parallel South) and a portion of the subdivisional lines were surveyed by Fred R. Chappell and Robert K. Burgess in 1955.

The following field notes described the dependent resurvey of a portion of the Seventh Standard Parallel South, a portion of the subdivisional lines, the survey of a portion of the subdivisional lines and a partial subdivision of secs. 33 and 34 of T. 35 S., R. 11 E., Salt Lake Meridian.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 598, Utah, dated October 30, 1979.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for all corners and other calls of record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on original record. The retracement data were thoroughly verified and only the true line field notes are given herein. The direction of lines were determined by direct solar observations.

The geographic position of the southwest corner of sec. 34, as scaled from the U.S. Geological Survey quadrangle map "Mt. Ellsworth, Utah, 1953", is as follows:

Latitude $37^{\circ} 42.9' N.$ Longitude $110^{\circ} 40.5' W.$

The mean magnetic declination is $14^{\circ} E.$

Dependent Resurvey of a Portion of the South Boundary (Seventh Standard Parallel South), T. 35 S., R. 11 E., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by Fred R. Chappell and Robert K. Burgess in 1955)

Beginning at the standard cor. of secs. 34 and 35, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 6 ins. above ground with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.

N. $89^{\circ} 58' W.$, along the south boundary of sec. 34.

Over broken desert land, through scattered undergrowth.

40.00

The standard $\frac{1}{4}$ sec. cor. of sec. 34, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 10 ins. above ground with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.

Dependent Resurvey of a Portion of the South Boundary
(Seventh Standard Parallel South), T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
	N. 89° 58' W., beginning new measurement.
10.00	Point for the standard east west 1/64 sec. cor. of sec. 34.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
	in the ground, encircled by a collar of stone, with brass
	cap mkd.
	S 34
	E - W 1/64
	1979
	Cor. is located on NW slope.
20.00	Point for the standard west 1/16 sec. cor. of sec. 34.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins.
	in the ground, encircled by a collar of stone, with brass
	cap mkd.
	S C
	T 35 S R 11 E
	W 1/16 S 34
	1979
	Cor. is located in construction area for millsite.
40.00	The standard cor. of secs. 33 and 34, monumented with an
	iron post, 2½ ins. diam., projecting 7 ins. above ground,
	with a mound of stone, 2 x 1 ft. north of cor. with brass
	cap mkd. as described in the official record of the 1955
	survey of the Seventh Standard Parallel South in Range
	11 East.
	N. 89° 58' W., along the south boundary of sec. 33.
	Over broken desert land through scattered undergrowth.
20.06	Point for the standard east 1/16 sec. cor. of sec. 33.
	Set an iron post, 28 ins. long, 2½ ins. diam., on top of
	cross (X) chiseled in sandstone, encircled by a mound of
	stone, 6 ft. base, to top of brass cap, mkd.
	SC
	T 35 S R 11 E
	E 1/16 S 33
	1979
	Cor. is located in small draw that drains east.
40.12	The standard ¼ sec. cor. of sec. 33, monumented with an
	iron post, 2½ ins. diam., projecting 10 ins. above ground,
	with brass cap mkd. as described in the official record
	of the 1955 survey of the Seventh Standard Parallel
	South in Range 11 East.

Dependent Resurvey of a Portion of the South Boundary
(Seventh Standard Parallel South), T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
	N. 89° 58' W., beginning new measurement.
27.00	Shitamaring Creek, drains S.
28.50	Dirt road, bears N and S.
40.00	The standard cor. of secs. 32 and 33, monumented with an iron post, 2½ ins. diam., projecting 10 ins. above a collar of stone, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.
<p>Dependent Resurvey of a Portion of the Subdivisional Lines of T. 35 S., R. 11 E., Salt Lake Meridian, Utah</p>	
<p>(Reestablishment of the Survey Executed by Fred R. Chappell and Robert K. Burgess in 1955)</p>	
	<p>From the standard cor. of secs. 33 and 34, heretofore described.</p> <p>N. 0° 02' W., bet. secs. 33 and 34.</p> <p>Over broken desert land through scattered undergrowth.</p>
20.00	<p>Point for the south 1/16 sec. cor. of secs. 33 and 34.</p> <p>Set an iron post, 20 ins. long, 1 in. diam., 10 ins. in drill hole in sandstone, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 1/16</p> <p style="text-align: center;">S 33 S 34</p> <p style="text-align: center;">1979</p> <p>Cor. is located on west slope of sandstone ridge.</p>
40.00	<p>The ¼ sec. cor. of secs. 33 and 34, monumented with an iron post, 2½ ins. diam., projecting 7 ins. above the ground, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.</p>
	<p>N. 0° 05' W., beginning new measurement.</p> <p>Over broken desert lands and through scattered undergrowth.</p>
2.00	Dirt road, bears E and W.
6.00	Lost Spring Wash, drains W.
39.93	The cor. of secs. 27, 28, 33, and 34, monumented with an iron post, 2½ ins. diam., projecting 5 ins. above a mound of stone, 4 ft. base and 1½ ft. high, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.

Survey of a Portion of the Subdivisional Lines
of T. 35 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS	Survey of a Portion of the Subdivisional Lines of T. 35 S., R. 11 E., Salt Lake Meridian, Utah
<p>40.00</p> <p>76.00</p> <p>80.00</p>	<p>From the standard cor. of secs. 34 and 35, heretofore described.</p> <p>N. 0° 01' W., bet. secs. 34 and 35.</p> <p>Over broken desert land, through scattered undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 34 and 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 35 S R 11 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 34 S 35 1979 </p> <p>Cor. is located ½ ch. west from bottom of gulch on east slope.</p> <p>Lost Spring Wash, drains SW.</p> <p>Point for the cor. of secs. 26, 27, 34, and 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap. mkd.</p> <p style="text-align: center;">T 35 S R 11 E</p> <p style="text-align: center;"> S 27 S 26 S 34 S 35 1979 </p> <p>Cor. is located in bottom of gulch and 1 ch. east of dirt road.</p>
<p>39.99</p>	<p>From the cor. of secs. 25, 26, 35, and 36, monumented with an iron post, 2½ ins. diam., projecting 3 ins. above a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd. as described in the official record of the 1955 survey.</p> <p>N. 89° 58' W., bet. secs. 26 and 35.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines
of T. 35 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS		
	<p>T 35 S R 11 E</p> <p>$\frac{1}{4} \frac{S 26}{S 35}$</p> <p>1979</p> <p>Cor. is located 2 chs. east of State Highway No. 276, bears N and S.</p>	
75.00	Lost Spring Wash, drains SW.	
79.98	The cor. of secs. 26, 27, 34, and 35.	
	<p>S. 89° 58' W., bet. secs. 27 and 34.</p> <p>Over broken desert land, through scattered undergrowth.</p>	
40.02	Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.	
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.	
	<p>T 35 S R 11 E</p> <p>$\frac{1}{4} \frac{S 27}{S 34}$</p> <p>1979</p> <p>Cor. is located on steep east slope, 3 chs. east from base of cliffs.</p>	
80.04	The cor. of secs. 27, 28, 33, and 34.	
	<p>N. 89° 58' W., bet. secs. 28 and 33.</p> <p>Over broken desert land through scattered undergrowth.</p>	
40.02	Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.	
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 7 ft. base to top of brass cap, mkd.	
	<p>T 35 S R 11 E</p> <p>$\frac{1}{4} \frac{S 28}{S 33}$</p> <p>1979</p> <p>Cor. is located on steep NW slope.</p>	
55.00	Dirt road, bears N and S.	
57.00	Shitamaring Creek, drains S.	
80.04	The cor. of secs. 28, 29, 32, and 33, monumented with an iron post, $2\frac{1}{2}$ ins. diam., encircled by a mound of stone, 4 ft. base to top of brass cap mkd. as described in the official record of the 1955 survey.	

Subdivision of Section 33, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	Subdivision of Section 33, T. 35 S., R. 11 E., Salt Lake Meridian, Utah
10.00	<p>From the standard $\frac{1}{4}$ sec. cor. of sec. 33, heretofore described.</p> <p>North, along the N and S center line of sec. 33.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>Point for the center south south $\frac{1}{64}$ sec. cor. of sec. 33.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 6 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">S 33 C-S-S $\frac{1}{64}$ 1979</p> <p>Cor. is located on steep SW slope.</p>
20.00	<p>Point for the center south $\frac{1}{16}$ sec. cor. of sec. 33.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C S $\frac{1}{16}$ S 33 C 1979</p> <p>Cor. is located on steep west slope.</p>
40.00	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 33, at intersection of the E and W center line of sec. 33.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 35 S R 11 E C $\frac{1}{4}$ S 33 1979</p> <p>Cor. is located on steep SW slope, 1 ch. north of dirt road, bears E and W.</p>
41.00	<p>Lost Spring Wash, drains W.</p>
79.93	<p>The $\frac{1}{4}$ sec. cor. of secs. 28 and 33.</p>

Subdivision of Section 33, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS

From the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.

N. $89^{\circ} 58'$ W., along the E and W center line of sec. 33.

Over broken desert land through scattered undergrowth.

- 2.00 Dirt road, bears N and S.
10.00 Lost Spring Wash, drains SW.
20.04 Point for the center east $1/16$ sec. cor. of sec. 33.
Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

E $1/16$

C ——— C

S 33

1979

- 38.00 Lost Spring Wash, drains NW.
40.08 The center $\frac{1}{4}$ sec. cor. of sec. 33.
42.00 Lost Spring Wash, drains S - SW.
61.00 Shitamaring Creek, drains SW.
63.50 Dirt road, bears NE and SW.
80.15 The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 18 ins. above ground and in a mound of stone, with brass cap mkd. as described in the official record of the 1955 survey.

From the standard east $1/16$ sec. cor. of sec. 33.

N. $0^{\circ} 01'$ W., along the N and S center line of the SE $\frac{1}{4}$ of sec. 33.

Over broken desert land through scattered undergrowth.

- 7.00 Point selected for the witness cor. to the center south southeast $1/64$ sec. cor. of sec. 33.
Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

W C



S 33

C-S-SE

$1/64$

1979

Cor. is located on steep SE slope 1 ch. east of cliffs.

Subdivision of Section 33, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
10.00	True point for the center south southeast 1/64 sec. cor. of sec. 33 falls on the east face of cliffs making it impractical to set a corner.
20.00	Point for the south east 1/16 sec. cor. of sec. 33, at intersection of the E and W center line of the SE $\frac{1}{4}$ of sec. 33. Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.
	SE 1/16 S 33 1979
	Cor. is located at base of 4 ft. ledge and 50 lks. north from base of 50 ft. cliff.
37.50	Dirt road, bears E and W.
38.70	Lost Spring Wash, drains W.
39.99	The center east 1/16 sec. cor. of sec. 33.
	From the south 1/16 sec. cor. of secs. 33 and 34. N. 89° 58' W., along the E and W center line of the SE $\frac{1}{4}$ of sec. 33. Over broken desert land through scattered undergrowth.
20.05	The south east 1/16 sec. cor. of sec. 33.
40.10	The center south 1/16 sec. cor. of sec. 33.
	From the true point for the center south southeast 1/64 sec. cor. of sec. 33. N. 89° 58' W., along the E and W center line of the SW $\frac{1}{4}$ of the SE $\frac{1}{4}$ of sec. 33. Over broken desert land through scattered undergrowth.
20.06	The center south south 1/64 sec. cor. of sec. 33.
	Subdivision of Section 34, T. 35 S., R. 11 E., Salt Lake Meridian, Utah
	From the standard $\frac{1}{4}$ sec. cor. of sec. 34, heretofore described. N. 0° 02' W., along the N and S center line of sec. 34. Over broken desert land through scattered undergrowth.
20.00	Point for the center south 1/16 sec. cor. of sec. 34.

Subdivision of Section 34, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C</p> <p style="text-align: center;">S 1/16 S 34</p> <p style="text-align: center;">C</p> <p style="text-align: center;">1979</p> <p>Cor. is located on south bank of dry wash.</p>
40.00	<p>Point for the center ¼ sec. cor. of sec. 34, at intersection of the E and W center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, encircled by a mound of stone, 5 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 35 S R 11 E</p> <p style="text-align: center;">C ¼ S 34</p> <p style="text-align: center;">1979</p> <p>Cor. is located on steep west slope.</p>
57.00	Dirt road, bears NE and SW.
60.00	Lost Spring Wash, drains SW.
79.96	The ¼ sec. cor. of secs. 27 and 34.
40.01	<p>From the ¼ sec. cor. of secs. 34 and 35.</p> <p>N. 89° 59' W., along the E and W center line of sec. 34.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>The center ¼ sec. cor. of sec. 34.</p>
60.00	<p>Point for the center west 1/16 sec. cor. of sec. 34.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">W 1/16</p> <p style="text-align: center;">C ——— C</p> <p style="text-align: center;">S 34</p> <p style="text-align: center;">1979</p> <p>Cor. is located in sand dunes, 2 chs. south of road.</p>
79.99	The ¼ sec. cor. of secs. 33 and 34.

Subdivision of Section 34, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS		
20.00	<p>From the standard west 1/16 sec. cor. of sec. 34, heretofore described.</p> <p>N. 0° 02' W., along the N and S center line of the SW$\frac{1}{4}$ of sec. 34.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>Point for the southwest 1/16 sec. cor. of sec. 34, at intersection of the E and W center line of the SW$\frac{1}{4}$ of sec. 34.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S W 1/16 S 34 1979</p> <p>Cor. is located in sand dunes.</p>	
39.99	<p>The center west 1/16 sec. cor. of sec. 34.</p>	
10.00	<p>From the center south 1/16 sec. cor. of sec. 34.</p> <p>N. 89° 58' W., along the E and W center line of the SW$\frac{1}{4}$ of sec. 34.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>Point for the center east southwest 1/64 sec. cor. of sec. 34.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 34 C-E-SW 1/64 1979</p> <p>Cor. is located in sand dunes.</p>	
20.00	<p>The south west 1/16 sec. cor. of sec. 34.</p>	
39.99	<p>The south 1/16 sec. cor. of secs. 33 and 34.</p>	
20.00	<p>From the standard east west 1/64 sec. cor. of sec. 34, heretofore described.</p> <p>N. 0° 02' W., along the N and S center line of the SE$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 34.</p> <p>Over broken desert land through scattered undergrowth.</p> <p>The center east southwest 1/64 sec. cor. of sec. 34.</p>	

Subdivision of Section 34, T. 35 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS

General Description

Sections 33, 34, and 35 of Township 35 South, Range 11 East are situated about 13 miles north of Bullfrog Resort and Marina, Utah. The elevation varies from approximately 4400 ft. to 5013 ft. above sea level. The soil is principally a shallow residual sandy silt with sandstone outcroppings mostly in sections 33 and 34.

Shitamaring Creek crosses the north boundary of section 33 approximately 23 chains east of the northwest corner of section 33 and drains south and slightly west and exits the section approximately 13 chains east of the southwest corner of section 33. Lost Spring enters section 35 approximately 5 chains east of the northwest corner of section 35 and flows southwest through the NE $\frac{1}{4}$ of section 34 then west along the E and W center line of sections 33 and 34 until it flows into Shitamaring Creek.

There is a millsite under construction in the southern half of section 34. There is and has been considerable prospecting for uranium and related minerals but there were no patented claims noted during the survey.

Utah State Highway 276 enters section 35, 2 chains west of the $\frac{1}{4}$ section corner of sections 26 and 35 and heads south and exits approximately 8 chains east of the standard $\frac{1}{4}$ section corner of section 35. There are no other paved roads. There are several secondary dirt roads in and around the millsite which provides access to all three sections.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Frank C. Profaizer, Jr., HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 30th day of October, 1979, (I) ~~(We)~~ have dependently resurveyed a portion of the Seventh Standard Parallel South, a portion of the subdivisional lines, surveyed a portion of the subdivisional lines and partially subdivided sections 33 and 34 of T. 35 S., R. 11 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(We)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 26, 1980
(Date)

*Frank C. Profaizer*⁹¹
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the Seventh Standard Parallel South, a portion of the subdivisional lines, the survey of a portion of the subdivisional lines, and the partial subdivision of sections 33 and 34 of T. 35 S., R. 11 E., Salt Lake Meridian, Utah

executed by Frank C. Profaizer, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

SEP 03 1980
(Date)

Allen Arnold
ACTING (Chief, Cadastral Survey Examination and Approval Staff)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Cadastral Survey Examination and Approval Staff)~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE SUBDIVISIONAL LINES,

A SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

AND

THE PARTIAL SUBDIVISION OF SECTIONS 3 AND 4

OF

TOWNSHIP 36 SOUTH, RANGE 11 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Frank C. Profaizer, Jr. Supervisory Cadastral Surveyor

Under special instructions dated October 30, 19 79, approved October 30, 1979,

_____, which provided for the surveys included under U.S. Survey/Group
Number 598, and assignment instructions dated November 2, 19 79.

Survey commenced November 6, 19 79

Survey completed December 18, 19 79

INDEX DIAGRAM

Township 36 S., Range 11 E.

		6 7	7 6		
6	5 4	4 2	8	2	1
		4	3		
7	8 3	9 1	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of Section 3 Page 8
 Subdivision of Section 4 Page 10

Township 36 South, Range 11 East, Salt Lake Meridian, Utah

CHAINS

The history of the surveys of T. 36 S., R. 11 E., Salt Lake Meridian, Utah, is as follows:

A portion of the subdivisional lines were surveyed by Vern E. Lane and Craig P. Sylvester in 1957.

The following field notes are those of the dependent re-survey of portions of the subdivisional lines, the survey of a portion of the subdivisional lines, and the partial subdivision of sections 3 and 4 of T. 36 S., R. 11 E.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 598, Utah, dated October 30, 1979.

The direction of lines were determined by means of lines projected by fore-and backsights from azimuths obtained by observations on Polaris.

Preliminary to the resurvey, the lines of original survey were retraced and a diligent search was made for all corners and other calls of record. Identified corners were remonumented in their original positions, lost corners were restored and monumented at proportionate positions based on original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the southeast corner of section 3, as scaled from U.S. Geological Survey quadrangle map "Mt. Ellsworth, Utah, 1953" is as follows:

Latitude 37° 42.0' N. Longitude 110° 40.4' W.

The mean magnetic declination is 14° E.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 36 S., R. 11 E., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by Vern E. Lane and Craig P. Sylvester in 1957)

Beginning at the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., projecting 12 ins. above ground with brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.

Cor. is located in sand dunes among scattered black brush, bitter brush, mountain rush, and cacti.

N. 0° 01' W., bet. secs. 9 and 10.

15.00 Dirt road, bears NE and SW.

38.22 The witness cor. of secs. 3, 4, 9, and 10, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., projecting 4 ins. above a mound of stone, 3 $\frac{1}{2}$ ft. base and 2 ft. high, with brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Note: The distance from the true cor. point to the witness cor. has been determined to be 1.80 chs. instead of 2.80 chs. as given in the official record of the 1957 survey.</p>
40.02	<p>True point for the sec. cor. of secs. 3, 4, 9, and 10, falls on broken NW facing ledge, where it is impractical to set the monument.</p>
	<p>N. 0° 01' W., bet. secs. 3 and 4. Over broken desert land through scattered undergrowth.</p>
39.94	<p>The ¼ sec. cor. of secs. 3 and 4, monumented with an iron post, 2½ ins. diam., encircled by a mound of stone, 4 ft. base to top of brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.</p>
	<p>N. 0° 02' W., beginning new measurement. Over broken desert land through scattered undergrowth.</p>
10.00	<p>Point for the south north 1/64 sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to solid sandstone rock, encircled by a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
	<p style="text-align: center;">S - N 1/64 S 4 S 3 1979</p> <p>Cor. is located 1½ chs. from the top of bench on west slope.</p>
20.00	<p>Point for the north 1/16 sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground encircled by a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">N 1/16 S 4 S 3 1979</p> <p>Cor. is located 2 chs. from top of bench on south slope.</p>
37.39	<p>Intersect the Seventh Standard Parallel South. The closing cor. of secs. 3 and 4, monumented with an iron post, 2½ ins. diam., projecting 12 ins. above ground, encircled by a collar of stone with brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS	
	<p>From this point the standard west 1/16 sec. cor. of sec. 34 bears S. 89° 58' E., 11.36 chs. dist., monumented with an iron post, set and mkd. as described in the concurrent survey of T. 35 S., R. 11 E.</p>
	<p>From this same point the standard cor. of secs. 33 and 34, T. 35 S., R. 11 E., bears N. 89° 58' W., 8.64 chs. dist., monumented with an iron post, 2½ ins. diam., projecting 7 ins. above the ground with a mound of stone, 2 ft. by 1 ft., north of the cor., with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.</p>
	<p>Survey of a Portion of the Subdivisional Lines, T. 36 S., R. 11 E., Salt Lake Meridian, Utah</p>
	<p>From the cor. of secs. 2, 3, 10, and 11, monumented with an iron post, 2½ ins. diam., projecting 8 ins. above a collar of stone with brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.</p>
	<p>Cor. is located on gradual east slope in sandy silt. N. 89° 55' W., bet. secs. 3 and 10.</p>
39.97	<p>Point for the ¼ sec. cor. of secs. 3 and 10. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T 36 S R 11 E</p> <p style="text-align: center;">¼ $\frac{S 3}{S 10}$</p> <p style="text-align: center;">1979</p>
79.94	<p>True point for the cor. of secs. 3, 4, 9, and 10.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2½ ins. diam., projecting 6 ins. above a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd. as described in the official record of the 1957 survey of the subdivisional lines of T. 36 S., R. 11 E.</p> <p>Cor. is located on south side of gulch that drains S. 80° W. and at base of cliff that faces west. N. 0° 03' W., bet. secs. 8 and 9.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 8 and 9. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional lines,
T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 36 S R 11 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 8 S 9 </p> <p style="text-align: center;">1979</p> <p>Cor. is located in sand dunes.</p>
42.00	Dirt road, bears E and W.
78.00	Shitamaring Creek, drains SW.
80.00	Point for the cor. of secs. 4, 5, 8, and 9.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 11 E</p> <p style="text-align: center;"> S 5 S 4 S 8 S 9 </p> <p style="text-align: center;">1979</p> <p>Cor. is located 2 chs. west of wash.</p>
	<p>From true point for the cor. of secs. 3, 4, 9, and 10.</p> <p>West, bet. secs. 4 and 9.</p>
40.10	Point for the ¼ sec. cor. of secs. 4 and 9.
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 36 S R 11 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S 4}{S 9}$ </p> <p style="text-align: center;">1979</p> <p>Cor. is located in sand dunes.</p>
78.20	Shitamaring Creek, drains S.
80.20	The cor. of secs. 4, 5, 8, and 9.
	<p>N. 0° 03' W., bet. secs. 4 and 5.</p>
12.00	Shitamaring Creek, drains SE.
34.00	Dirt road, bears N. 14° E. and S. 14° W.
40.00	Point for the ¼ sec. cor. of secs. 4 and 5.

Survey of a Portion of the Subdivisional Lines,
T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

T 36 S R 11 E

½
|
S 5 | S 4
|

1979

Cor. is located east, 1.70 chs. from stream bed that drains S. 28° W. and west, 1.40 chs. from dirt road that bears N. 14° W. and S. 14° E.

- 51.00 Dirt road, bears NW and SE.
68.50 Dirt road, bears N. 20° E. and S. 20° W.
71.00 Shitamaring Creek, drains SW.
77.38 Intersect the Seventh Standard Parallel South.

Point for the closing cor. of secs. 4 and 5.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

T 35 S R 11 E

S 33

S 5 | S 4
|

T 36 S R 11 E

C C
1979

Cor. is located on SE slope on north side of a small draw that drains SE.

From this cor., the standard ¼ sec. cor. of sec. 33, T. 35 S., R. 11 E., bears S. 89° 58' E., 31.48 chs. dist., monumented with an iron post, 2½ ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 E.

From this same cor., the standard cor. of secs. 32 and 33, T. 35 S., R. 11 E., bears N. 89° 58' W., 8.52 chs. dist., monumented with an iron post, 2½ ins. diam., projecting 10 ins. above ground, encircled by a collar of stone, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 E.

554

Survey of a Portion of the Subdivisional Lines,
T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS

The point for the $\frac{1}{4}$ sec. cor. of sec. 3, on the north boundary of the township is on the Seventh Standard Parallel South and mid point bet. the closing cor. of secs. 2 and 3 and the closing cor. of secs. 3 and 4.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

T 35 S R 11 E

$\frac{1}{4}$ S 3

T 36 S R 11 E

1979

Cor. is located on SE slope $\frac{1}{2}$ ch. from top of bench.

From this cor., the standard cor. of secs. 34 and 35, T. 35 S., R. 11 E., bears S. $89^{\circ} 58' E.$, 31.38 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.

From this same cor., the standard $\frac{1}{4}$ sec. cor. of sec. 34, T. 35 S., R. 11 E., bears N. $89^{\circ} 58' W.$, 8.62 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel in Range 11 East.

The true point for the $\frac{1}{4}$ sec. cor. of sec. 4, on the N. bdy. of the township is on the Seventh Standard Parallel South and midpoint bet. the closing cor. of secs. 3 and 4, and the closing cor. of secs. 4 and 5, falls on the west face of cliffs and is impractical to set corner.

Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of sec. 4, bears S. $89^{\circ} 58' E.$, 2.00 chs. dist.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 5 ft. base, to top of brass cap, mkd.

W C

T 35 S R 11 E



$\frac{1}{4}$ S 4

T 36 S R 11 E

1979

Cor. is located on top of bench, 38 lks. from west edge.

From the true cor. point, the standard east $1/16$ sec. cor. of sec. 33, T. 35 S., R. 11 E., bears S. $89^{\circ} 58' E.$, 11.42 chs. dist., monumented with an iron post, set and mkd. as described in the concurrent survey of T. 35 S., R. 11 E.

Survey of a Portion of the Subdivisional Lines,
T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS

From this same true point, the standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 35 S., R. 11 E., bears N. $89^{\circ} 58'$ W., 8.64 chs dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.

The point for the west $\frac{1}{16}$ sec. cor. of sec. 3, on the N. bdy. of the township is on the Seventh Standard Parallel South and midpoint bet. the $\frac{1}{4}$ sec. cor. of sec. 3, and the closing cor. of secs. 3 and 4.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

T 35 S R 11 E

W $\frac{1}{16}$ S 3

T 36 S R 11 E

1979

Cor. is located on NW slope.

From this cor., the standard east west $\frac{1}{64}$ sec. cor. of sec. 34, T. 35 S., R. 11 E., bears S. $89^{\circ} 58'$ E., 1.37 chs. dist., monumented with an iron post, set and mkd. as described in the concurrent survey of T. 35 S., R. 11 E.

From this same cor., the standard west $\frac{1}{16}$ sec. cor. of sec. 34, T. 35 S., R. 11 E., bears N. $89^{\circ} 58'$ W., 8.63 chs. dist., monumented with an iron post, set and mkd. as described in the concurrent survey of T. 35 S., R. 11 E.

The point for the east $\frac{1}{16}$ sec. cor. of sec. 4, on the N. bdy. of the township is on the Seventh Standard Parallel South and midpoint bet. the closing cor. of secs. 3 and 4, and the $\frac{1}{4}$ sec. cor. of sec. 4.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.

T 35 S R 11 E

E $\frac{1}{16}$ S 4

T 36 S R 11 E

1979

Cor. is located on east side of small sandstone ridge that bears north and south and on the west side of gulch.

Survey of a Portion of the Subdivisional Lines,
T. 36 S., R. 11 E., Salt Lake Meridian, Utah

CHAINS		
	<p>From this cor., the standard cor. of secs. 33 and 34, T. 35 S., R. 11 E., bears S. 89° 58' E., 11.42 chs. dist., monumented with an iron post, 2½ ins. diam., projecting 7 ins. above ground, with a mound of stone, 2 x 1 ft. north of the cor. with brass cap mkd. as described in the official record of the 1955 survey of the Seventh Standard Parallel South in Range 11 East.</p> <p>From this same cor., the standard east 1/16 sec. cor. of sec. 33, T. 35 S., R. 11 E., bears N. 89° 58' W., 8.64 chs. dist., monumented with an iron post, set and mkd. as described in the concurrent survey of T. 35 S., R. 11 E.</p>	
	<p>Subdivision of Section 3, T. 36 S., R. 11 E., Salt Lake Meridian, Utah</p>	
<p>39.98</p>	<p>From the ¼ sec. cor. of secs. 3 and 10. N. 0° 01' W., on the N and S center line of sec. 3. Over broken desert land through scattered undergrowth.</p> <p>Point for the center ¼ sec. cor. of sec. 3, at intersection with the E and W center line of sec. 3.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, encircled by a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 36 S R 11 E C 1/4 S 3 1979</p>	
<p>59.98</p>	<p>Point for the center north 1/16 sec. cor. of sec. 3.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap, mkd.</p> <p style="text-align: center;">C N 1/16 S 3 C 1979</p>	
<p>77.37</p>	<p>The ¼ sec. cor. of sec. 3, on the N. bdy. of the Tp., heretofore described.</p> <p>From the ¼ sec. cor. of secs. 2 and 3. N. 89° 58' W., on the E and W center line of sec. 3. Over broken desert land through scattered undergrowth.</p>	

Subdivision of Section 3, T. 36 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS		
39.98	The center $\frac{1}{4}$ sec. cor. of sec. 3.	
59.97	True point for the center west $\frac{1}{16}$ sec. cor. of sec. 3, falls on the NW facing cliffs where it is impractical to set the monument.	
79.96	The $\frac{1}{4}$ sec. cor. of secs. 3 and 4.	
1.00	From the true point for the center west $\frac{1}{16}$ sec. cor. of sec. 3. N. $0^{\circ} 01'$ W., on the N and S center line of the NW $\frac{1}{4}$ of sec. 3. Over broken desert land through scattered undergrowth.	
1.00	Point selected for the witness cor. to the center west $\frac{1}{16}$ sec. cor. of sec. 3. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 3 ft. base, to top of brass cap, mkd.	
20.00	<div style="text-align: center;"> <p>W C W $\frac{1}{16}$ ↓ C ————— C S 3 1979</p> </div> <p>Cor. is located 1.00 ch. north of sandstone cliffs on west slope of small drainage.</p>	
20.00	Point for the north west $\frac{1}{16}$ sec. cor. of sec. 3, at intersection with the E and W center line of the NW $\frac{1}{4}$ of sec. 3. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, encircled by a collar of stone, with brass cap mkd.	
37.39	<div style="text-align: center;"> <p>N W $\frac{1}{16}$ S 3 1979</p> </div> <p>The west $\frac{1}{16}$ sec. cor. of sec. 3, on the N. bdy. of the Tp., heretofore described.</p>	
19.99	From the center north $\frac{1}{16}$ sec. cor. of sec. 3. N. $89^{\circ} 58'$ W., along the E and W center line of the NW $\frac{1}{4}$ of sec. 3. Over broken desert land through scattered undergrowth.	
39.98	The north west $\frac{1}{16}$ sec. cor. of sec. 3.	
39.98	The north $\frac{1}{16}$ sec. cor. of secs. 3 and 4.	

558

Subdivision of Section 4, T. 36 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	Subdivision of Section 4, T. 36 S., R. 11 E., Salt Lake Meridian, Utah
39.97	<p>From the $\frac{1}{4}$ sec. cor. of secs. 4 and 9. N. $0^{\circ} 02' W.$, on the N and S center line of sec. 4. Over broken desert land through scattered undergrowth. Point for the center $\frac{1}{4}$ sec. cor. of sec. 4, at inter- section with the E and W center line of sec. 4. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, encircled by a mound of stone, 6 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 36 S R 11 E C $\frac{1}{4}$ S 4 1979</p> <p>Cor. is located on steep NE slope.</p>
49.97	<p>True point for the center south north $1/64$ sec. cor. falls on the face of east facing cliffs, making it impractical to set monument.</p>
59.97	<p>Point for the center north $1/16$ sec. cor. of sec. 4. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">C N $1/16$ S 4 C 1979</p> <p>Cor. is located on top of east facing cliffs.</p>
77.36	<p>The $\frac{1}{4}$ sec. cor. of sec. 4, on the N. bdy. of the Tp., heretofore described.</p>
20.05	<p>From the $\frac{1}{4}$ sec. cor. of secs. 3 and 4. N. $89^{\circ} 58' W.$, on the E and W center line of sec. 4. Over broken desert land through scattered undergrowth. Point for the center east $1/16$ sec. cor. of sec. 4. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p>

Subdivision of Section 4, T. 36 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">E 1/16 S 4 C ————— C 1979</p>
40.10	The center 1/4 sec. cor. of sec. 4.
80.20	The 1/4 sec. cor. of secs. 4 and 5.
10.00	<p>From the center east 1/16 sec. cor. of sec. 4. N. 0° 02' W., on the N and S center line of the NE 1/4 of sec. 4. Over broken desert land, through scattered undergrowth. Point for the center south northeast 1/64 sec. cor. of sec. 4. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p>
20.00	<p style="text-align: center;">S 4 C - S - NE 1/64 1979</p> <p>Point for the north east 1/16 sec. cor. of sec. 4, at the intersection with the E and W center line of the NE 1/4 of sec. 4. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a collar of stone, with brass cap mkd.</p>
37.39	<p style="text-align: center;">NE 1/16 S 4 1979</p> <p>Cor. is located 15 lks. east of dirt road. The east 1/16 sec. cor. of sec. 4, on the N. bdy. of the Tp., heretofore described.</p>
20.05	From the north 1/16 sec. cor. of secs. 3 and 4. N. 89° 58' W., along the E and W center line of the NE 1/4 of sec. 4. Over broken desert land through scattered undergrowth. The north east 1/16 sec. cor. of sec. 4.
40.10	The center north 1/16 sec. cor. of sec. 4.

Subdivision of Section 4, T. 36 S., R. 11 E.,
Salt Lake Meridian, Utah

CHAINS	
20.05	<p>From the south north 1/64 sec. cor. of secs. 3 and 4. N. 89° 58' W., along the E and W center line of the SE¼ of the NE¼ of sec. 4. Over broken desert land through scattered undergrowth. The center south northeast 1/64 sec. cor. of sec. 4.</p>
19.05	<p>N. 89° 58' W., along the E and W center line of the SW¼ of the NE¼ of sec. 4. Over broken desert land through scattered undergrowth. Point selected for the witness cor. to the center south north 1/64 sec. cor. of sec. 4. Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, encircled by a mound of stone, 5 ft. base, to top of brass cap, mkd.</p>
20.05	<p style="text-align: center;">W C S 4 ← C - S - N 1/64 1979</p> <p>Cor. is located at base of east facing cliffs. True point for the center south north 1/64 sec. cor. of sec. 4.</p>
	<p style="text-align: center;">General Description</p> <p>Sections 3, 4, and 9, of Township 36 South, Range 11 East are situated about 12 miles north of Bullfrog Resort and Marina. The elevation varies from approximately 4300 ft. to 4947 ft. above sea level. The soil is principally a shallow residual sandy silt with sandstone outcropping mostly in sections 3 and 4.</p> <p>Shitamaring Creek crosses the north boundary of section 4 approximately 4.50 chs. east of the northwest closing corner of section 4 and drains south along the west boundary of section 4.</p> <p>There is a mill site under construction in section 3. There is and has been considerable prospecting for uranium and related minerals but there were no patented claims noted during the survey.</p> <p>There are no paved roads through these three sections. There are several secondary dirt roads in and around the mill site which provides access to all three sections.</p>

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Michael Fitzgerald	Cadastral Surveyor
Richard Zaninovich	Surveying Technician
Scott McMullin	Surveying Technician
Mark T. Ferguson	Survey Aid
Gary Gogos	Survey Aid
Thomas McShane	Survey Aid

562

CERTIFICATE OF SURVEY

(I) ~~(WA)~~, Frank C. Profaizer, Jr., HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 30th day of October, 1979, (I) ~~(WA)~~ have dependently resurveyed a portion of the subdivisional lines, surveyed a portion of the subdivisional lines and partially subdivided sections 3 and 4 of T. 36 S., R. 11 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(US)~~ and under (my) ~~(XXX)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 28, 1980 (Date) Frank C. Profaizer (Cadastral Surveyor) Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, a survey of a portion of the subdivisional lines and the partial subdivision of sections 3 and 4 of T. 36 S., R. 11 E., Salt Lake Meridian, Utah,

executed by Frank C. Profaizer, Jr., Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

SEP 03 1980 (Date) ACTING (Chief, Cadastral Survey Examination and Approval Staff)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) (Chief, Cadastral Survey Examination and Approval Staff)

2000\field_notes\rectangular_notes\0600\0600-0000.tif -> out\0600\0600-0000.tif