

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R604

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE WEST BOUNDARY

OF

TOWNSHIP 13 SOUTH, RANGE 19 EAST,

THE SURVEY OF THE EASTERLY BOUNDARY

OF THE

UINTAH AND OURAY INDIAN RESERVATION,

THE SURVEY OF THE SOUTH, WEST AND NORTH BOUNDARIES,

THE SUBDIVISIONAL LINES AND THE MEANDER LINES

OF

TOWNSHIP 13 SOUTH, RANGE 18 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ray Harpin Supervisory Cadastral Surveyor

Milton R. Workman Cadastral Surveyor

Under special instructions dated May 1, 1969, approved May 7, 1969

and Supplemental Special Instructions dated March 13, 1981 and

approved March 13, 1981, which provided for the surveys included under U.S. Survey/Group

Number 520, and assignment instructions dated May 19, 1969

and March 13, 1981

Survey commenced June 30, 1969

Survey completed May 21, 1981

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R604

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE WEST BOUNDARY

OF

TOWNSHIP 13 SOUTH, RANGE 19 EAST,

THE SURVEY OF THE EASTERLY BOUNDARY

OF THE

UINTAH AND OURAY INDIAN RESERVATION,

THE SURVEY OF THE SOUTH, WEST AND NORTH BOUNDARIES,

THE SUBDIVISIONAL LINES AND THE MEANDER LINES

OF

TOWNSHIP 13 SOUTH, RANGE 18 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ray Harpin Supervisory Cadastral Surveyor

Milton R. Workman Cadastral Surveyor

Under special instructions dated May 1, 1969, approved May 7, 1969,

and Supplemental Special Instructions dated March 13, 1981 and

approved March 13, 1981, which provided for the surveys included under U.S. Survey/Group

Number 520, and assignment instructions dated May 19, 1969,

and March 13, 1981

Survey commenced June 30, 1969

Survey completed May 21, 1981

INDEX DIAGRAM

Township 13 South, Range 18 East,

40	39	38	37	36	35	
34 6 91	5 78	4 68	3 59	2 50	1	22
90	89	77	67	58	50	
33 7 88	8 76	9 67	10 57	11 49	12	20
87	86	76	66	57	48	
33 18 85	17 74	16 64	15 56	14 47	13	19
85	84	73	63	55	46	
32 19 83	20 72	21 63	22 54	23 45	24	17
83	82	71	62	53	45	
31 30 81	29 70	28 61	27 52	26 43	25	16
80	80	70	60	52	42	
30 31 79	32 69	33 59	34 51	35 41	36	15
29	28	27	26	25	23	

Indian Boundary
Meanders

Page 1 - 14
Page 92

Township 13 South, Range 18 East, Salt Lake Meridian, Utah

CHAINS

The east boundary was surveyed by S.P. and J.R. Stewart, U.S. Deputy Surveyors in 1901.

The following field notes describe the dependent resurvey of the west boundary of T. 13 S., R. 19 E., the survey of the easterly boundary of the Uintah and Ouray Indian Reservation, the survey of the south, west and north boundaries, the subdivisional lines, and the meander lines of T. 13 S., R. 18 E., of the Salt Lake Meridian, Utah.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, the Special Instructions dated May 1, 1969, and the Supplemental Special Instructions dated March 13, 1981, for Group No. 520, Utah.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The direction of all lines were determined from a true meridian established by direct altitude observations on the sun by -fore and backsights and angular deflections.

The geographic position of the southeast corner of the township as computed through section line ties to U.S.G.S. triangulation station "FLAT", located in section 27, is as follows:

Latitude 39° 38' 09.5" N. Longitude 109° 50' 28.5" W.

The mean magnetic declination is 16° E.

Survey of the Easterly Boundary of the Uintah and Ouray Indian Reservation through T. 13 S., R. 18 E., Salt Lake Meridian, Utah


8th Mile

Beginning at the witness cor. to the 7th mile post, set and mkd. as described in the concurrent survey of T. 12 S., R. 18 E.

Thence, S. 30° 55' W., along rim of canyon.

3.60 Point for angle point No. 15.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.




Thence, S. 23° 36' E.

13.47 Point for angle point No. 16.

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 5° 38' W.


20.96 Point for the 7½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.



26.34 Point for angle point No. 17.


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 52° 49' W.

34.62 Point for the 8th mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.




9th Mile

Thence, S. 52° 49' W., along rim of canyon.

25.05 Point for angle point No. 18.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 0° 03' W.

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS

14.95 Point for the 8½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

UOIR		T13S
8½ M		R18E
		S 7

1981

22.73 Point for angle point No. 19.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

UOIR		
AP-19		S 7

1981

Thence, S. 60° 22' E.

24.83 Point for angle point No. 20.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

UOIR		
AP-20		S 7

1981

Thence, S. 6° 17' W.

6.70 Point for angle point No. 21.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

UOIR		
AP-21		S 7

1981

Thence, S. 14° 51' E.

0.69 Point for the 9th mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., over a cross (X) chiseled in sandstone, in a mound of stone, 6 ft. base, to top of aluminum cap, mkd.

UOIR		T13S
9 M		R18E
		S 7

1981

10th Mile

Thence, S. 14° 51' E., along rim of canyon.


Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS	
16.48	<p>Point for angle point No. 22.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div data-bbox="768 532 1008 693" style="text-align: center;"> </div> <p>Thence, N. 80° 03' E.</p>
18.56	<p>Point for angle point No. 23.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div data-bbox="776 935 987 1096" style="text-align: center;"> </div> <p>Thence, S. 46° 43' E.</p>
4.96	<p>Point for the 9½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <div data-bbox="808 1365 1008 1526" style="text-align: center;"> </div>
39.96	<p>Point for angle point No. 24.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div data-bbox="784 1728 1008 1889" style="text-align: center;"> </div> <p>Thence, S. 37° 55' W.</p>
5.00	<p>Point for the 10th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div data-bbox="792 2145 1008 2306" style="text-align: center;"> </div>
<p>11th Mile</p> <p>Thence, S. 37° 55' W., across Big Canyon Flat.</p>	

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah


CHAINS

- 20.51 Point for angle point No. 25, on rim of canyon.
Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.




Thence, S. 78° 45' E., along rim of canyon.

- 19.49 Point for the 10½ mile post.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

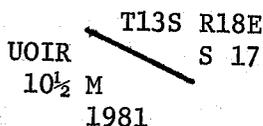


- 42.89 Point for angle point No. 26.
Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 50° 45' E.


- 16.60 Point for the 11th mile post.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.



12th Mile

Thence, S. 50° 45' E., across Big Canyon Flat.

- 40.00 Point for the 11½ mile post.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

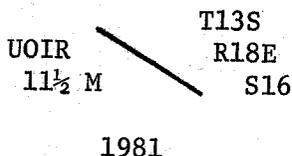


- 43.19 Point for angle point No. 27, on rim of canyon.

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 22° 55' W., along rim of canyon.

36.81 Point for the 12th mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.




13th Mile

Thence, S. 22° 55' W.

13.10 Point for angle point No. 28.


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 45° 53' E.


26.90 Point for the 12½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.



37.38 Point for angle point No. 29.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 67° 27' E.

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS

11.75 Point for angle point No. 30

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

S 21
UOIR
AP-30
1981

Thence, S. 81° 55' E.

7.54 Point for angle point No. 31.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

S 21
UOIR AP-31
1981

Thence, N. 1° 58' E.

10.23 Point for the 13th mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T13S / UOIR
R18E /
S 21 / 13 M
1981

14th Mile

Thence, N. 1° 58' E., along rim of canyon.

35.31 Point for angle point No. 32.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

S 21 UOIR
AP-32
1981

Thence, N. 19° 44' E.

4.69 Point for the 13½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of aluminum cap, mkd.

T13S / UOIR
R18E /
S 21 / 13½ M
1981




Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS	
38.35	<p>Point for angle point No. 33.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;"> </div> <p>Thence, N. 39° 21' E.</p>
6.34	<p>Point for the 14th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> </div>
	15th Mile
12.81	<p>Thence, N. 39° 21' E., along rim of canyon.</p> <p>Point for angle point No. 34.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;"> </div> <p>Thence, S. 17° 39' E.</p>
27.19	<p>Point for the 14½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> </div>
39.95	<p>Point for angle point No. 35.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;"> </div> <p>Thence, S. 18° 01' W.</p>

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS							
27.24	<p>Point for the 15th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <table style="border: none;"> <tr> <td style="padding-right: 10px;">UOIR</td> <td style="border-left: 1px solid black; padding-left: 10px;">T13S</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 10px;">R18E</td> </tr> <tr> <td style="padding-right: 10px;">15 M</td> <td style="border-left: 1px solid black; padding-left: 10px;">S 22</td> </tr> </table> <p>1981</p> </div>	UOIR	T13S		R18E	15 M	S 22
UOIR	T13S						
	R18E						
15 M	S 22						
	<p>16th Mile</p> <p>Thence, S. 18° 01' W., along rim of canyon.</p>						
36.66	<p>Point for angle point No. 36, identical with the cor. of secs. 21, 22, 27, and 28, hereinafter described.</p> <p>Thence, S. 84° 51' E.</p>						
3.34	<p>Point for the 15½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <table style="border: none;"> <tr> <td style="padding-right: 10px;">T13S</td> <td style="padding-right: 10px;">R19E</td> </tr> <tr> <td style="padding-right: 10px;">S 27</td> <td></td> </tr> </table> <hr style="width: 50%; margin: 0 auto;"/> <table style="border: none;"> <tr> <td style="padding-right: 10px;">UOIR</td> <td style="padding-right: 10px;">15½ M</td> </tr> </table> <p>1981</p> </div>	T13S	R19E	S 27		UOIR	15½ M
T13S	R19E						
S 27							
UOIR	15½ M						
43.34	<p>Point for the 16th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <table style="border: none;"> <tr> <td style="padding-right: 10px;">T13S</td> <td style="padding-right: 10px;">R18E</td> </tr> <tr> <td style="padding-right: 10px;">S 27</td> <td></td> </tr> </table> <hr style="width: 50%; margin: 0 auto;"/> <table style="border: none;"> <tr> <td style="padding-right: 10px;">UOIR</td> <td style="padding-right: 10px;">16 M</td> </tr> </table> <p>1981</p> </div>	T13S	R18E	S 27		UOIR	16 M
T13S	R18E						
S 27							
UOIR	16 M						
	<p>17th Mile</p> <p>Thence, S. 84° 51' E.</p>						
5.69	<p>Point for angle point No. 37.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;"> <table style="border: none;"> <tr> <td style="padding-right: 10px;">S 27</td> <td style="border-left: 1px solid black; padding-left: 10px;"></td> </tr> <tr> <td style="padding-right: 10px;">UOIR</td> <td style="border-left: 1px solid black; padding-left: 10px;">AP-37</td> </tr> </table> <p>1981</p> </div>	S 27		UOIR	AP-37		
S 27							
UOIR	AP-37						
14.62	<p>Point for angle point No. 38.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>						


Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

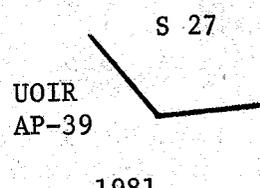CHAINS	
	 <p>UOIR AP-38 1981</p> <p>Thence, S. 53° 23' E.</p>
15.80	<p>Point for angle point No. 39.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>  <p>UOIR AP-39 1981</p> <p>Thence, N. 81° 30' E.</p>
3.89	<p>Point for the 16½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T13S R18E S 27 ----- UOIR 16½ M 1981</p>
25.14	<p>Point for angle point No. 40.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>  <p>UOIR AP-40 1981</p> <p>Thence, S. 14° 35' E.</p>
18.75	<p>Point for the 17th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">UOIR T13S 17 M R18E S 26 1981</p>
1.32	<p style="text-align: center;">17th Mile</p> <p>Thence, S. 14° 35' E.</p> <p>Point for angle point No. 41.</p>

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 28° 47' E.

17.23 Point for angle point No. 42.


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 69° 07' E.

19.52 Point for angle point No. 43.


Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 86° 34' E.


1.93 Point for the 17½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.



31.90 Point for angle point No. 44.

Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.







Thence, S. 64° 43' E.






10.03 Point for the 18th mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.




Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS	<p style="text-align: center;">T13S R18E S 26</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">UOIR 18 M</p> <p style="text-align: center;">1981</p>
<p>10.75</p>	<p>Thence, S. 64° 43' E.</p> <p>Point for angle point No. 45.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1981</p>
<p>17.77</p>	<p>Thence, S. 21° 42' W.</p> <p>Point for angle point No. 46.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1981</p>
<p>10.43</p>	<p>Thence, S. 8° 25' E.</p> <p>Point for angle point No. 47.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1981</p>
<p>1.05</p>	<p>Thence, S. 26° 47' E.</p> <p>Point for the 18½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1981</p>
<p>5.74</p>	<p>Point for angle point No. 48.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

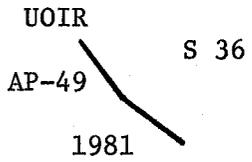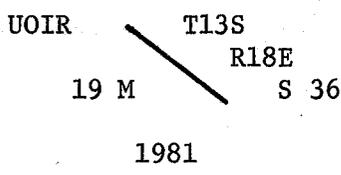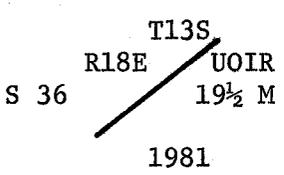CHAINS	
	 <p>UOIR S 36 AP-48 1981</p>
26.10	<p>Thence, S. 28° 12' E.</p> <p>Point for angle point No. 49.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>
	 <p>UOIR S 36 AP-49 1981</p>
9.21	<p>Thence, S. 56° 45' E.</p> <p>Point for the 19th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p>
	 <p>UOIR T13S R18E S 36 19 M 1981</p>
	<p>20th Mile</p>
5.51	<p>Thence, S. 56° 45' E.</p> <p>Point for angle point No. 50.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>
	 <p>S 36 UOIR AP-50 1981</p>
34.49	<p>Thence, N. 54° 12' E.</p> <p>Point for the 19½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	 <p>T13S R18E UOIR S 36 19½ M 1981</p>
35.20	<p>Point for angle point No. 51.</p> <p>Set a Bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p>

Survey of the Easterly Boundary of the Uintah and Ouray
Indian Reservation through T. 13 S., R. 18 E.,
Salt Lake Meridian, Utah

CHAINS		
39.29	<p>Point for the 20th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>  <p>Thence, N. 21° 42' E.</p> 	
3.06	<p>Point for angle point No. 52.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>  <p>Thence, N. 21° 42' E.</p> <p>Thence, N. 89° 55' E.</p>	
7.32	<p>The cor. of secs. 25 and 36, on the E. bdy. of the Tp., hereinafter described.</p>	
<p>Dependent Resurvey of the West Boundary of T. 13 S., R. 19 E., Salt Lake Meridian, Utah</p>		
<p>(Reestablishment of the Survey Executed by Scott P. Stewart and J.R. Stewart, U.S. Deputy Surveyors in 1901)</p> <p>Beginning at the cor. of Tps. 13 and 14 S., Rs. 18 and 19 E., which is monumented with a sandstone, 20 x 10 x 5 ins., (record, 24 x 10 x 6 ins.) firmly set 12 ins. in the ground, with 6 notches on N, S and E.</p> <p>from which</p> <p>A juniper, 8 ins. diam., bears N. 35° 30' W., 14 lks. dist., mkd. T13S R18E S36 BT. (Record, a cedar 4 ins. diam., bears N. 59° W., 120 lks.)</p> <p>At the corner point.</p>		

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">T 13 S R 18 E R 19 E</p>	
	<p style="text-align: center;">S 36 S 31 S 1 S 6</p>	
	<p style="text-align: center;">T 14 S 1969</p>	
	<p>Deposit the mkd. stone alongside the iron post at base of the mound of stone.</p>	
	<p>from which</p>	
	<p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 45° 45' E., 27 lks. dist., mkd. T13S R19E S31 BT.</p>	
	<p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 68° 30' E., 34 lks. dist., mkd. T14S R19E S6 BT.</p>	
	<p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 59° 00' W., 11 lks. dist., mkd. T14S R18E S1 BT.</p>	
	<p>N. 0° 32' W., on the W. bdy. of sec. 31.</p>	
	<p>Desc. over NW slope, through scattering pinon and juniper.</p>	
5.00	<p>Dry wash, drains E; asc. over S slope.</p>	
11.90	<p>Top of ascent, thence over nearly level land through sagebrush.</p>	
39.55	<p>Point for the ¼ sec. cor. of sec. 31, at proportionate distance; the original stone, 17 x 8 x 6 ins., mkd. ¼ was lying loose upon the ground and had been removed from chaining operation of the sagebrush; there is no remaining evidence of the original corner position.</p>	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;"> T 13 S ¼ S 31 R19 E</p>	
	<p style="text-align: center;">1969</p>	
	<p>Deposit the mkd. stone alongside the iron post.</p>	
40.00	<p>Point for the ¼ sec. cor. of sec. 36, T. 13 S., R. 18 E.</p>	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 13 S ¼ S 36 R 18 E </p>	
	<p style="text-align: center;">1969</p>	
	<p>No accessories available.</p>	

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS													
79.10	<p>The cor. of secs. 30 and 31, monumented with a sandstone, 18 x 10 x 3 ins., firmly set 10 ins. in the ground, mkd. 5 notches on N and illegible markings on the S.</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T 13 S</td> <td> </td> <td>T 13 S</td> </tr> <tr> <td></td> <td> </td> <td>S 30</td> </tr> <tr> <td>S 36</td> <td> </td> <td>S 31</td> </tr> <tr> <td>R 18 E</td> <td> </td> <td>R 19 E</td> </tr> </table> <p style="text-align: center;">1981</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located in an E and W fence line.</p>	T 13 S		T 13 S			S 30	S 36		S 31	R 18 E		R 19 E
T 13 S		T 13 S											
		S 30											
S 36		S 31											
R 18 E		R 19 E											
0.90	<p>N. 0° 17' E., on the W. bdy. of sec. 30.</p> <p>Over nearly level land, through dense sagebrush.</p> <p>Point for the cor. of secs. 25 and 36, T. 13 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td></td> <td>T 13 S</td> </tr> <tr> <td>R 18 E</td> <td> </td> <td>R 19 E</td> </tr> <tr> <td>S 25</td> <td> </td> <td>S 30</td> </tr> <tr> <td>S 36</td> <td> </td> <td></td> </tr> </table> <p style="text-align: center;">1969</p> <p>No accessories available.</p>			T 13 S	R 18 E		R 19 E	S 25		S 30	S 36		
		T 13 S											
R 18 E		R 19 E											
S 25		S 30											
S 36													
35.00	Enter scattering juniper.												
36.20	Dry wash, drains W.												
37.30	Enter sagebrush.												
40.14	<p>The ¼ sec. cor. of sec. 30, monumented with a sandstone, 24 x 6 x 5 ins., firmly set 10 ins. in the ground, mkd. ¼ on W face.</p> <p>from which</p> <p style="margin-left: 40px;">A juniper, 8 ins. diam., bears S. 8° E., 316 lks. dist., mkd. ¼ S30 BT. (Record, cedar, 5 ins. diam., bears S. 10° E., 300 lks. dist.)</p> <p style="margin-left: 40px;">A juniper, 10 ins. diam., bears S. 31° W., 252 lks. dist., mkd. ¼ S25 BT. (Record, cedar, 5 ins. diam., bears S. 29° W., 200 lks. dist.).</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>												

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS														
	<table style="margin-left: auto; margin-right: auto;"> <tr><td> </td><td>T 13 S</td></tr> <tr><td> </td><td>¼</td></tr> <tr><td> </td><td>S 30</td></tr> <tr><td> </td><td>R 19 E</td></tr> </table> <p style="text-align: center;">1969</p> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 05' W., beginning new measurement.</p>		T 13 S		¼		S 30		R 19 E					
	T 13 S													
	¼													
	S 30													
	R 19 E													
0.76	<p>Point for the ¼ sec. cor. of sec. 25, T. 13 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td></tr> <tr><td>¼</td><td> </td></tr> <tr><td>S 25</td><td> </td></tr> <tr><td>R 18 E</td><td> </td></tr> </table> <p style="text-align: center;">1969</p> <p>No accessories available.</p>	T 13 S		¼		S 25		R 18 E						
T 13 S														
¼														
S 25														
R 18 E														
15.00	Enter scattering pinon and juniper.													
21.30	Enter sagebrush.													
40.28	<p>The cor. of secs. 19 and 30, monumented with a sandstone, 20 x 8 x 4 ins., (record, limestone, 26 x 7 x 5 ins.,) firmly set and mkd. 4 notches on the N and 2 notches on S edges.</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td><td>T 13 S</td></tr> <tr><td>S 25</td><td> </td><td>S 19</td></tr> <tr><td>R 18 E</td><td> </td><td>S 30</td></tr> <tr><td></td><td> </td><td>R 19 E</td></tr> </table> <p style="text-align: center;">1969</p> <p>Deposit the mkd. stone in a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.</p>	T 13 S		T 13 S	S 25		S 19	R 18 E		S 30			R 19 E	
T 13 S		T 13 S												
S 25		S 19												
R 18 E		S 30												
		R 19 E												
0.48	<p>N. 0° 17' W., on the W. bdy. of sec. 19.</p> <p>Over nearly level land, through sagebrush.</p> <p>Point for the cor. of secs. 24 and 25, T. 13 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td></tr> <tr><td>R 18 E</td><td> </td><td>R 19 E</td></tr> <tr><td>S 24</td><td> </td><td>S 19</td></tr> <tr><td>S 25</td><td> </td><td></td></tr> </table> <p style="text-align: center;">1969</p>	T 13 S		R 18 E		R 19 E	S 24		S 19	S 25				
T 13 S														
R 18 E		R 19 E												
S 24		S 19												
S 25														

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS									
24.90	Mesa rim, bears E and W; desc. over N slope.								
38.10	Dry wash, drains W; asc. over steep SW slope.								
39.09	Point for the $\frac{1}{4}$ sec. cor. of sec. 19, at proportionate distance; there is no remaining evidence of the original corner.								
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T 13 S</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">$\frac{1}{4}$</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 19</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R 19 E</td></tr> </table>	T 13 S	$\frac{1}{4}$	S 19	R 19 E				
T 13 S									
$\frac{1}{4}$									
S 19									
R 19 E									
	1969								
	Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.								
40.48	Point for the $\frac{1}{4}$ sec. cor. of sec. 24, T. 13 S., R. 18 E.								
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T 13 S</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">$\frac{1}{4}$</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 24</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R 18 E</td></tr> </table>	T 13 S	$\frac{1}{4}$	S 24	R 18 E				
T 13 S									
$\frac{1}{4}$									
S 24									
R 18 E									
	1969								
	Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.								
47.50	Desc. over NW slope, through widely scattered juniper.								
57.40	Enter wash, drains N.								
59.20	Leave wash, asc. over SW slope.								
75.80	Desc. over NW slope.								
78.18	The cor. of secs. 18 and 19, monumented with a sandstone, 35 x 10 x 2 ins., (record, 18 x 10 x 7 ins.,) firmly set 23 ins. in the ground, mkd. 3 notches on N and S edges.								
	from which								
	<p style="margin-left: 40px;">A juniper, 10 ins. diam., bears N. $36^{\circ} 45'$ E., 66 lks. dist., mkd. T13S R19E S18 BT. (Record, cedar, 6 ins. diam., bears N. 40° E., 43 lks. dist.)</p>								
	<p style="margin-left: 40px;">A juniper, 10 ins. diam., bears N. $63^{\circ} 15'$ W., 126 lks. dist., blazed with no marks visible. (Record, cedar, 8 ins. diam., bears N. 50° W., 90 lks. dist.)</p>								
	At the corner point								
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T 13 S</td><td style="border-right: 1px solid black; padding-right: 5px;">T 13 S</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 24</td><td style="border-right: 1px solid black; padding-right: 5px;">S 18</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;"></td><td style="border-right: 1px solid black; padding-right: 5px;">S 19</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R 18 E</td><td style="border-right: 1px solid black; padding-right: 5px;">R 19 E</td></tr> </table>	T 13 S	T 13 S	S 24	S 18		S 19	R 18 E	R 19 E
T 13 S	T 13 S								
S 24	S 18								
	S 19								
R 18 E	R 19 E								
	1969								

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

from which

A juniper, 18 ins. diam., bears S. $11^{\circ} 30'$ E.,
37 lks. dist., mkd. T13S R19E S19 BT.

Deposit the mkd. stone alongside the iron post.

N. $0^{\circ} 05'$ W., on the W. bdy. of sec. 18.

Over rolling NW slopes, through widely scattered juniper.

2.30 Point for the cor. of secs. 13 and 24, T. 13 S., R. 18 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

	T 13 S	
R 18 E		R 19 E
S 13		S 18
S 24		

1969

from which

A juniper, 6 ins. diam., bears S. 30° W., 35 lks.
dist., mkd. T13S R18E S24 BT.

A juniper, 10 ins. diam., bears N. 71° W., 69 lks.
dist., mkd. T13S R18E S13 BT.

2.70 Dry wash, drains NW; asc. over SW slope.

16.00 Spur, slopes NW; desc. over NW slope.

28.30 Thence, along spur, slopes N.

39.97 The $\frac{1}{4}$ sec. cor. of sec. 18, monumented with a sandstone,
24 x 9 x 5 ins., (record, limestone, 20 x 8 x 5 ins.)
firmly set 6 ins. in the ground, mkd. $\frac{1}{4}$ on W face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins.
in the ground, with brass cap mkd.

		T 13 S
		$\frac{1}{4}$
		S 18
		R 19 E

1969

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Deposit the mkd. stone alongside the iron post.

N. $0^{\circ} 41'$ W., beginning new measurement.

Along W side of spur, slopes N, through widely
scattered juniper.

2.33 Point for the $\frac{1}{4}$ sec. cor. of sec. 13, T. 13 S., R. 18 E.

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS													
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>												
	<p style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td><td></td></tr> <tr><td> ¼</td><td> </td><td></td></tr> <tr><td> S 13</td><td> </td><td></td></tr> <tr><td> R 18 E</td><td> </td><td></td></tr> </table> </p>	T 13 S			¼			S 13			R 18 E		
T 13 S													
¼													
S 13													
R 18 E													
	<p style="text-align: center;">1969</p>												
7.30	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor. Desc. over NW slope.</p>												
29.10	<p>Dry wash in Pine Canyon, drains NE; Asc. over steep ledges.</p>												
38.10	<p>Mesa rim, bears E and W; thence over nearly level grassland.</p>												
39.49	<p>The cor. of secs. 7 and 18, monumented with a sandstone, 26 x 8 x 4 ins., (record, 24 x 8 x 7 ins.,) firmly set 6 ins. in the ground, mkd. 4 notches on S and 2 notches on E with a mound of stone, 2 ft. base, 1 ft. high, W of cor.</p>												
	<p>At the corner point</p>												
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>												
	<p style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td><td>T 13 S</td></tr> <tr><td> S 13</td><td> </td><td> S 7</td></tr> <tr><td> R 18 E</td><td> </td><td> S 18</td></tr> <tr><td></td><td> </td><td> R 19 E</td></tr> </table> </p>	T 13 S		T 13 S	S 13		S 7	R 18 E		S 18			R 19 E
T 13 S		T 13 S											
S 13		S 7											
R 18 E		S 18											
		R 19 E											
	<p style="text-align: center;">1969</p>												
	<p>Deposit the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>												
	<p>N. 0° 34' W., on the W. bdy. of sec. 7.</p>												
	<p>Asc. over SE slope over grassland.</p>												
2.84	<p>Point for the cor. of secs. 12 and 13, T. 13 S., R. 18 E.</p>												
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>												
	<p style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td></td><td></td></tr> <tr><td>R 18 E</td><td> </td><td>R 19 E</td></tr> <tr><td> S 12</td><td> </td><td> S 7</td></tr> <tr><td> S 13</td><td> </td><td></td></tr> </table> </p>	T 13 S			R 18 E		R 19 E	S 12		S 7	S 13		
T 13 S													
R 18 E		R 19 E											
S 12		S 7											
S 13													
	<p style="text-align: center;">1969</p>												
	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.</p>												
17.10	<p>Ridge, bears NE and SW; desc. over NW slope through scattered juniper.</p>												

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS										
26.60	Dry wash, drains NE; asc. over SE slope.									
39.51	Point for the $\frac{1}{4}$ sec. cor. of sec. 7, determined by record distances from the original bearing trees.									
	A juniper, 10 ins. diam., bears S. $67^{\circ} 15'$ E., 75 lks. dist., mkd. $\frac{1}{4}$ S7 BT. (Record, S. $79^{\circ} 00'$ E., 75 lks. dist.)									
	A juniper, 10 ins. diam., bears S. $63^{\circ} 15'$ W., 130 lks. dist., mkd. $\frac{1}{4}$ S12 BT. (Record, S. $80^{\circ} 00'$ W., 130 lks. dist.)									
	At the corner point									
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.									
	<table style="margin-left: auto; margin-right: auto;"> <tr><td> </td><td>T 13 S</td></tr> <tr><td> </td><td>$\frac{1}{4}$</td></tr> <tr><td> </td><td>S 7</td></tr> <tr><td> </td><td>R 19 E</td></tr> </table>		T 13 S		$\frac{1}{4}$		S 7		R 19 E	
	T 13 S									
	$\frac{1}{4}$									
	S 7									
	R 19 E									
	1969									
	N. $0^{\circ} 23'$ E., beginning new measurement.									
	Along W slope over grassland.									
3.33	Point for the $\frac{1}{4}$ sec. cor. of sec. 12, T. 13 S., R. 18 E.									
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.									
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T 13 S</td><td> </td></tr> <tr><td>$\frac{1}{4}$</td><td> </td></tr> <tr><td>S 12</td><td> </td></tr> <tr><td>R 18 E</td><td> </td></tr> </table>	T 13 S		$\frac{1}{4}$		S 12		R 18 E		
T 13 S										
$\frac{1}{4}$										
S 12										
R 18 E										
	1969									
	from which									
	A juniper, 8 ins. diam., bears N. $63^{\circ} 45'$ E., 77 lks. dist., mkd. X BT.									
	A juniper, 10 ins. diam., bears N. $57^{\circ} 45'$ W., 32 lks. dist., mkd. $\frac{1}{4}$ S12 BT.									
9.40	Desc. over NW slope.									
31.50	Slope changes; desc. over N slope.									
39.90	The cor. of secs. 6 and 7, monumented with a sandstone, 40 x 8 x 8 ins., (record, 50 x 10 x 8 ins.), firmly set 10 ins. in the ground, mkd. 5 notches on S and 1 notch on N edges.									
	from which									
	A juniper, 10 ins. diam., bears N. $83^{\circ} 00'$ E., 79 lks. dist., scribing illegible. (Record, N. 83° E., 67 lks. dist.)									

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

A juniper, 10 ins. diam., bears S. 10° 30' E.,
117 lks. dist., mkd. T13S R19E S7 BT. (Record,
S. 20° E., 100 lks. dist.)

A mound of stone, 2½ ft. base, 1½ ft. high, W of
cor., on a boulder (stone-in-place) 40 x 40 x 18
ins., above the ground.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 13 S		T 13 S
S 12		S 6
R 18 E		R 19 E

1969

Deposit the mkd. stone in mound alongside the iron post.

N. 0° 09' W., on the W. bdy. of sec. 6.

2.00 Dry wash, drains NE; asc. over steep SE slope through
sparse sagebrush.

3.43 Point for the cor. of secs. 1 and 12, T. 13 S., R. 18 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 S		R 19 E
R 18 E		S 6
S 1		
S 12		

1969

Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.

Cor. is located on steep S slope.

26.40 Thence, along E slope.

28.50 Spur, slopes NE; desc. over steep N slope.

39.97 The ¼ sec. cor. of sec. 6, monumented with a sandstone,
22 x 10 x 4 ins., firmly set 8 ins. in the ground, mkd.
¼ on W face, with a mound of stone, 3 ft. base, 1 ft.
high, W of cor.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T 13 S
¼
S 6
R 19 E

1969

Dependent Resurvey of the West Boundary of
T. 13 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

Deposit the mkd. stone alongside the iron post, and rebuild the mound of stone, 3 ft. base, 1½ ft. high, W of cor.

N. 0° 24' W., beginning new measurement.

Desc. over NE slope, through sagebrush and grasses.

3.46 Point for the ¼ sec. cor. of sec. 1, T. 13 S., R. 18 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S	
¼	
S 1	
R 18 E	

1969

Raise a mound of stone, 4 ft. base, 4 ft. high, W of cor.

19.00 Dry wash, drains E; asc. over SE slope.

28.20 Thence, along rolling E slope.

42.10 The cor. of Tps. 12 and 13 S., R. 19 E., secs. 6 and 31, monumented with a sandstone, 28 x 8 x 4 ins., set in a mound of stone, 2 ft. base, 1 ft. high, mkd. 6 notches on N, S, E and W edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 13 S		T 12 S
		R 19 E
		S 31
S 1		S 6
R 18 E		T 13 S

1969

Deposit the mkd. stone alongside the iron post.

From this township cor., the cor. of Tps. 12 and 13 S., R. 18 E., bears N. 0° 13' E., 1.36 chs. dist., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the concurrent resurvey of the W. bdy. of T. 12 S., R. 19 E.

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of Tps. 13 and 14 S., Rs. 18 and 19 E., hereinbefore described.

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	West, bet. secs. 1 and 36.
	Asc. over NE slope, through dense pinon and juniper.
23.30	Mesa rim, bears NE and SW; thence, over gently rolling Big Canyon Flat.
26.00	Enter sagebrush and grassland.
35.70	Trail road, 15 lks. wide, bears NE and SW.
38.38	Trail road, 15 lks. wide, bears N and S.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E
	$\frac{1}{4}$ $\frac{S\ 36}{S\ 1}$
	T 14 S 1969
	from which
	A juniper, 4 ins. diam., bears S. $7^{\circ} 30'$ W., 49 lks. dist., mkd. $\frac{1}{4}$ S1 BT.
	A juniper, 2 ins. diam., bears N. $58^{\circ} 00'$ W., 95 lks. dist., mkd. $\frac{1}{4}$ S36 BT.
47.40	Trail road, 15 lks. wide, bears SE and NW.
59.86	From this point on line, a windmill bears North, 4.65 chs. dist.
73.30	Enter dense juniper.
77.00	Enter grassland.
80.00	Point for the cor. of secs. 1, 2, 35, and 36.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E
	$\frac{S\ 35}{S\ 2} \quad \frac{S\ 36}{S\ 1}$
	T 14 S 1969
	from which
	A gnarled juniper, 12 ins. diam., bears N. $40^{\circ} 45'$ E., 27 lks. dist., mkd. T13S R18E S36 BT.

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- A pinon, 10 ins. diam., bears S. 55° 45' E.,
252 lks. dist., mkd. T14S R18E S1 BT.
- A pinon, 12 ins. diam., bears N. 64° 30' W.,
275 lks. dist., mkd. T13S R18E S35 BT.
- Land, broken to nearly level.
Soil, sandy and clay loam with marl stone.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.
-
- West, bet. secs. 2 and 35.
- Over gently rolling mesa through scattered pinon and
juniper, through dense sagebrush and grasses.
- 30.80 Big Canyon rim, bears N and S; desc. over steep W slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 35.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins.
in the ground, with brass cap mkd.
- T 13 S R 18 E
- | | |
|---------------|----------------------|
| $\frac{1}{4}$ | $\frac{S\ 35}{S\ 2}$ |
|---------------|----------------------|
- T 14 S
1969
- Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, S of cor.
from which
- A juniper, 4 ins. diam., bear N. 41° 30' E.,
56 lks. dist., mkd. $\frac{1}{4}$ S35 BT.
- A juniper, 6 ins. diam., bears S. 86° 30' E.,
66 lks. dist., mkd. $\frac{1}{4}$ S2 BT.
- 40.75 Dry wash, drains SW; thence over rolling S slopes through
widely scattered pinon, juniper and sparse sagebrush
in Big Canyon.
- 61.10 Dry wash within Big Canyon, drains W; thence over
rolling N slopes.
- 80.00 Point for the cor. of secs. 2, 3, 34, and 35.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.
- T 13 S R 18 E
- | | |
|------|------|
| S 34 | S 35 |
| S 3 | S 2 |
- T 14 S
1969

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>from which</p> <p>A pinon, 5 ins. diam., bears N. 37° 00' E., 70 lks. dist., mkd. T13S R18E S35 BT.</p> <p>A juniper, 9 ins. diam., bears S. 29° 30' E., 52 lks. dist., mkd. T14S R18E S2 BT.</p> <p>A juniper, 10 ins. diam., bears S. 16° 00' W., 99 lks. dist., mkd. T14S R18E S3 BT.</p> <p>A juniper, 12 ins. diam., bears N. 42° 00' W., 73 lks. dist., mkd. T13S R18E S34 BT.</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, S of cor.</p> <p>Land, broken to nearly level. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>West, bet. secs. 3 and 34.</p> <p>Asc. over steep E slope, through dense juniper and pinon.</p>
6.80	Rim of Big Canyon, bears N and S; thence over nearly level land through dense juniper and pinon.
12.40	Mesa rim; desc. over W slope.
28.20	Over rolling N slope, through scattered pinon, juniper and sagebrush.
33.60	Dry wash, drains N; asc. over E slope.
40.00	Point for the ¼ sec. cor. of secs. 3 and 34.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 34}{S\ 3}$</p> <p style="text-align: center;">T 14 S 1969</p>
	<p>from which</p> <p>A pinon, 8 ins. diam., bears S. 55° 30' W., 64 lks. dist., mkd. ¼ S3 BT.</p> <p>A pinon, 10 ins. diam., bears N. 20° 00' W., 67 lks. dist., mkd. ¼ S34 BT.</p> <p>Cor. is located on spur, slopes N.</p>
53.30	East rim of spur, slopes N.
53.70	West rim of spur, slopes N; desc. over steep W slope in Bishop Canyon.
71.80	Dry wash, in bottom of Bishop Canyon, drains N; asc. over steep E slope through scattered juniper and pinon.

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS					
80.00	<p>Point for the cor. of secs. 3, 4, 33, and 34.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 33</td> <td style="padding: 0 5px;">S 34</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 4</td> <td style="padding: 0 5px;">S 3</td> </tr> </table> <p style="text-align: center;">T 14 S 1969</p> <p>from which</p> <p style="margin-left: 40px;">A juniper, 3 ins. diam., bears N. 44° 30' E., 79 lks. dist., mkd. X BT.</p> <p style="margin-left: 40px;">A juniper, 6 ins. diam., bears S. 69° 30' E., 17 lks. dist., mkd. T14S R18E S3 BT.</p> <p style="margin-left: 40px;">A juniper, 4 ins. diam., bears S. 71° 30' W., 21 lks. dist., mkd. X BT.</p> <p style="margin-left: 40px;">A juniper, 7 ins. diam., bears N. 63° 00' W., 55 lks. dist., mkd. T13S R18E S33 BT.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.</p> <p>Land, broken canyons and mesa. Soil, sand clay loam and marl stone. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p> <hr/> <p>West, bet. secs. 4 and 33.</p> <p>Asc. over steep E slope through dense pinon and juniper.</p>	S 33	S 34	S 4	S 3
S 33	S 34				
S 4	S 3				
12.40	<p>East rim of spur, slopes N; thence over rolling mesa through dense juniper and pinon.</p>				
15.10	<p>West rim of spur; desc. over steep SW slope through scattered pinon and juniper.</p>				
40.00	<p>Point for the ¼ sec. cor. of secs. 4 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 33</td> <td style="padding: 0 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 4</td> <td style="padding: 0 5px;"></td> </tr> </table> <p style="text-align: center;">T 14 S 1969</p> <p>from which</p> <p style="margin-left: 40px;">A juniper, 5 ins. diam., bears S. 56° 00' W., 26 lks. dist., mkd. ¼ S4 BT.</p> <p style="margin-left: 40px;">A pinon, 6 ins. diam., bears N. 25° 00' W., 53 lks. dist., mkd. ¼ S33 BT.</p>	¼ S 33		S 4	
¼ S 33					
S 4					

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Cor. is located within a rock outcrop, 26 lks. W of dry wash.

Asc. over steep E slope through scattered pinon and juniper.

53.60 East rim of spur, slopes NE.

54.80 West rim of spur; thence over broken canyon.

71.60 West rim of canyon; thence over gently rolling mesa through dense juniper and pinon.

80.00 Point for the cor. of secs. 4, 5, 32, and 33.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 32		S 33
S 5		S 4

T 14 S
1969

from which

A pinon, 4 ins. diam., bears N. 71° 15' E.,
43 lks. dist., mkd. T13S R19E S33 BT.

A pinon, 10 ins. diam., bears S. 63° 00' E.,
61 lks. dist., mkd. T14S R18E S4 BT.

A pinon, 9 ins. diam., bears S. 16° 30' W.,
14 lks. dist., mkd. T14S R18E S5 BT.

A pinon, 5 ins. diam., bears N. 25° 30' W.,
44 lks. dist., mkd. T13S R18E S32 BT.

Land, broken canyon and mesa.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

West, bet. secs. 5 and 32.

Over nearly level mesa through dense juniper and pinon.

0.80 East rim of canyon; thence across canyon.

23.80 West rim of canyon; thence over gently rolling mesa through dense pinon and juniper.

32.80 Enter widely scattered pinon and juniper.

40.00 Point for the ¼ sec. cor. of secs. 5 and 32.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

¼	S 32
	S 5

T 14 S
1969

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

from which

A pinon, 5 ins. diam., bears N. 45° 30' E.,
15 lks. dist., mkd. ¼ S32 BT.

A pinon, 12 ins. diam., bears S. 29° 00' W.,
79 lks. dist., mkd. ¼ S5 BT.

80.00 Point for the cor. of secs. 5, 6, 31, and 32.

Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

S 31 | S 32
S 6 | S 5

T 14 S
1969

from which

A pinon, 12 ins. diam., bears N. 20° 30' E.,
44 lks. dist., mkd. T13S R18E S32 BT.

A pinon, 12 ins. diam., bears S. 60° 00' E.,
45 lks. dist., mkd. T14S R18E S5 BT.

A pinon, 14 ins. diam., bears S. 14° 45' W.,
72 lks. dist., mkd. T14S R18E S6 BT.

A juniper, 6 ins. diam., bears N. 66° 30' W.,
30 lks. dist., mkd. T13S R18E S31 BT.

Land, broken canyon and gently rolling mesa.

Soil, sandy and clay loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grasses.

West, bet. secs. 6 and 31.

Over gently rolling mesa through dense pinon and juniper.

9.47 At this point on line, I chiseled a cross (X) on bedrock.

9.94 Rim of Firewater Canyon, bears Southeast and Northwest.
I erected a cairn of stone, 4 ft. base, 3 ft. high.

Desc. steep SW slope into Firewater Canyon.

30.38 Point selected for the witness cor. to the ¼ sec. cor.
of secs. 6 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

W C ¼ ← S 31
S 6

T 14 S
1972

Survey of the South Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.
Cor. is located near the end of a prominent spur, slopes
W.

40.00 True point for the 1/4 sec. cor. of secs. 6 and 31, located
on a very steep slope. An unsafe location for monument.

80.00 Point for the cor. of Tp. 13 S., R. 18 E.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 2 1/2 ft.
base, to top of brass cap, mkd.

T 13 S
R 18 E
S 31

1972

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
from which

A juniper, 11 ins. diam., bears S. 31° 45' W.,
113 lks. dist., mkd. T14S R17E S1 BT.

Cor. is located on a very prominent spur, slopes NE
above and W of the bottom of Firewater Canyon.

Land, broken steep canyon.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of T. 13 S., R. 18 E., hereinbefore
described.

North, along the W. bdy. of sec. 31.


Over steep slopes of Firewater Canyon.

40.00 True point for the 1/4 sec. cor. of sec. 31, on a steep
S slope. An unsafe location for monument.

49.33 Point selected for the witness cor. to the 1/4 sec. cor.
of sec. 31.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 21 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T 13 S
R 17 E R 18 E



Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	Cor. is located on prominent spur, slopes W.
67.80	Prominent spur, slopes W.
80.00	Point for the cor. of secs. 30 and 31.
	Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) chiseled on bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	T 13 S R 17 E R 18 E S 30 S 31 1972
	Land, broken steep canyon. Soil, sandy, clay loam and rocky. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	North, along the W. bdy. of sec. 30.
	Asc. over vertical ledges of Firewater Canyon.
1.90	Canyon rim, bears SE and NW.
	Asc. over steep SW slope through scattered pinon and juniper.
26.80	Prominent spur, slopes W.
40.00	True point for the ¼ sec. cor. of sec. 30, on a steep S slope. An unsafe location for monument.
44.85	Point selected for the witness cor. to the ¼ sec. cor. of sec. 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T 13 S R 17 E R 18 E ¼ ↓ S 30 ↓ W C 1972
	Raise a mound of stone, 2½ ft. base, 2 ft. high, W of cor.
	Cor. is located on prominent spur, slopes W.
79.70	Prominent rim, bears SE and NW.
80.00	Point for the cor. of secs. 19 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of brass cap, mkd.

Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S
R 17 E R 18 E

| S 19
| S 30

1972

from which

A juniper, 7 ins. diam., bears N. 82° 00' E.,
24 lks. dist., mkd. T13S R18E S19 BT.

A pinon, 10 ins. diam., bears S. 32° 15' W.,
4 lks. dist., mkd. T13S R17E BT.

Land, broken canyons.
Soil, sandy, clay loam and rock outcrops.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

North, along the W. bdy. of sec. 19.

Asc. over gentle S slope through dense to scattered
pinon and juniper.

22.54 The South rim of Big Canyon, bears SE and NW.

Point selected for the witness point.

Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins.
in the ground, with brass cap mkd.

W P
T 13 S
R 17 E R 18 E

| S 19

1972

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

From this witness point, a point selected for an elec-
tronic traverse station, bears N. 45° 50' 45" E., 112.93
chs. dist., located on a prominent spur on the SW slope of
Gray Knoll. I set an iron post, 30 ins. long, 2½ ins.
diam., 6 ins. in the ground to bedrock, and in a mound of
stone, 2 ft. base, to top of brass cap, mkd. T13S R18E
ET1 1972.

40.00 Point for the ¼ sec. cor. of sec. 19. This cor. is
located in an inaccessible area; not monumented.

80.00 Point for the cor. of sec. 18 and 19. This cor. is
located in an inaccessible area; not monumented.

Land, nearly level to inaccessible broken canyon.
Soil, rocky and ledges.
Timber, pinon and juniper.
Undergrowth, none.

Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>North, along the W. bdy. of sec. 18.</p> <p>Continue in inaccessible Big Canyon.</p>
40.00	Point for the $\frac{1}{4}$ sec. cor. of sec. 18. This cor. is located in an inaccessible area; not monumented.
80.00	Point for the cor. of secs. 7 and 18. This cor. is located in an inaccessible area; not monumented.
	<p>Land, inaccessible.</p> <p>Soil, rocky and sandy.</p> <p>Timber, pinon and juniper.</p> <p>Undergrowth, none.</p>
	<p>North, along the W. bdy. of sec. 7.</p> <p>Continue in inaccessible Big Canyon.</p>
24.55	<p>North rim of Big Canyon, bears NE and SW.</p> <p>Point selected for the witness point.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, $2\frac{1}{2}$ ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">W P T 13 S R 17 E R 18 E</p> <p style="text-align: center;"> S 7</p> <p style="text-align: center;">1972</p> <p>From this witness point, electronic traverse station No. 1, hereinbefore described, bears S. $44^{\circ} 11' 30''$ E., 116.25 chs. dist.</p> <p>Asc. over gentle SE slope through scattered juniper, pinon and sagebrush.</p>
32.00	Prominent spur, slopes SW; desc. over gentle NW slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of sec. 7.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 17 E R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ S 7</p> <p style="text-align: center;">1972</p> <p>from which</p> <p style="text-align: center;">A juniper, 8 ins. diam., bears S. $37^{\circ} 15'$ E., 17 lks. dist., mkd. $\frac{1}{4}$ S7 BT.</p>

Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

A pinon, 12 ins. diam., bears S. 46° 15' W.,
90 lks. dist., mkd. ¼ BT.

From this cor., U.S. Geological Survey triangulation
station "PETERS 1953", bears N. 32° 55' E., 35.58 chs.
dist., monumented with a brass tablet seated in bedrock
near ground level.

Over rolling land through dense to scattered pinon,
juniper and sagebrush.

74.70 Desc. over N slope through pinon and juniper.

79.45 Point selected for the witness cor. to the cor. of
secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

W C
T 13 S
R 17 E R 18 E

↑ S 6
| S 7

1972

from which

A pinon, 6 ins. diam., bears S. 59° 30' E.,
47 lks. dist., mkd. X BT.

A juniper, 4 ins. diam., bears S. 26° 15' W.,
18 lks. dist., mkd. X BT.

This monument is located on a high rim of an unaccessible
slope.

80.00 True point for the cor. of secs. 6 and 7, located
on an inaccessible slope of Desolation Canyon.

Land, broken inaccessible canyon to rolling.
Soil, sandy, clay loam and marl stone.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush and grass.

North, along the W. bdy. of sec. 6.

Desc. over steep inaccessible N slope of Green River
in Desolation Canyon.

40.00 Point for the ¼ sec. cor. of sec. 6, located in an
unsafe location; not monumented.


63.02 Point selected for the witness cor. to the meander cor.
of sec. 6, on the left bank of the Green River.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with aluminum cap mkd.

Survey of the West Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

W C
T 13 S
R 17 E R 18 E
M C



- 63.39 Left bank of the Green River; true point for the meander cor. of secs. 1 and 6, falls on unstable river bank.
- 70.17 Right bank of the Green River; true point for the meander cor. of secs. 1 and 6, falls on unstable river bank.
- 73.98 Point selected for the witness cor. to the cor. of T. 13 S., R. 18 E., sec. 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

W C
T 12 S R 17 E



S 6
R 17 E | R 18 E
T 13 S
1972

from which

A boulder in place, 3 x 3 x 3 ft., bears S. 24° 24' E., 148.4 lks. dist., mkd. B+O on the West.

This monument will also function as the witness cor. to the meander cor. of sec. 6, on the right bank of the Green River.

This monument is set at the base of vertical ledge.

Asc. over vertical ledge.

- 80.00 True point for the cor. of T. 13 S., R. 18 E., sec. 6, falls on an inaccessible ledge.

Land, broken Desolation Canyon and river bottom land.
Soil, alluvial silt to sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, french tamarisk and willows.

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of Tps. 12 and 13 S., R. 18 E., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the field notes of the concurrent resurvey of T. 12 S., R. 18 E.

N. 89° 56' W., bet. Tps. 12 and 13 S., through R. 18 E., bet. secs. 1 and 36.

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS					
	Asc. over steep E slope through scattered sagebrush.				
3.90	Spur, slopes NE; desc. over steep NW slope.				
10.50	Dry wash, 20 lks. wide, drains NE.				
11.80	Canyon trail, 24 lks. wide, bears generally NE and SW; asc. over steep SE slope.				
20.80	Canyon rim, bears NE and SW; thence over gently rolling mesa, through sagebrush and scattered juniper.				
37.87	Point for the ¼ sec. cor. of secs. 1 and 36.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.				
	T 13 S R 18 E				
	<table border="0"> <tr> <td style="padding-right: 10px;">¼</td> <td style="border-left: 1px solid black; padding-left: 5px;">S 36</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 5px;">S 1</td> </tr> </table>	¼	S 36		S 1
¼	S 36				
	S 1				
	T 13 S 1972				
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.				
43.00	Trail road, 24 lks. wide, bears S and N.				
48.10	Rim of Tabyago Canyon, bears N and S; desc. over steep W slope through scattered sagebrush.				
60.00	Over rolling land through scattered sagebrush.				
77.50	Dry wash, 20 lks. wide, drains N.				
77.87	Point for the cor. of secs. 1, 2, 35, and 36, at the intersection with the Sectional Guide Meridian.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.				
	T 12 S R 18 E				
	<table border="0"> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">S 35</td> <td style="padding-left: 5px;">S 36</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">S 2</td> <td style="padding-left: 5px;">S 1</td> </tr> </table>	S 35	S 36	S 2	S 1
S 35	S 36				
S 2	S 1				
	T 13 S 1972				
	Raise a mound of stone, 3 ft. base, 2½ ft. high, N of cor.				
	Land, broken to rolling. Soil, sandy and clay loam. Timber, scattered juniper. Undergrowth, sagebrush and grasses.				
	N. 89° 56' W., bet. secs. 2 and 35.				
2.50	Dry wash, drains NW.				
	Over rolling grassland through sagebrush.				

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
26.20	Prominent spur, slopes N.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 35. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd. T 12 S R 18 E $\frac{1}{4} \frac{S 35}{S 2}$ T 13 S 1972
58.30	Dry wash, drains N.
80.00	Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd. T 12 S R 18 E $\frac{S 34}{S 3} \mid \frac{S 35}{S 2}$ T 13 S 1972 Land, broken to rolling. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grass.
	N. $89^{\circ} 56'$ W., bet. secs. 3 and 34. Over rolling grassland through sagebrush.
20.00	West Tabyago Canyon.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 34. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 12 S R 18 E $\frac{1}{4} \frac{S 34}{S 3}$ T 13 S 1972 Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N of cor. Cor. is located on gentle N slope.
64.40	Prominent spur, slopes N.
80.00	Point for the cor. of secs. 3, 4, 33, and 34. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS					
	<p style="text-align: center;">T 12 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 33</td> <td style="padding: 0 5px;">S 34</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 4</td> <td style="padding: 0 5px;">S 3</td> </tr> </table> <p style="text-align: center;">T 13 S 1972</p> <p>Raise a mound of stone, 2½ ft. base, 2½ ft. high, N of cor.</p> <p>Land, gently rolling to broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grass.</p>	S 33	S 34	S 4	S 3
S 33	S 34				
S 4	S 3				
<p>29.50</p> <p>37.80</p> <p>40.00</p>	<p>N. 89° 56' W., bet. secs. 4 and 33.</p> <p>Over rolling grassland through scattered sagebrush.</p> <p>Rim, bears SE and NW; desc. over steep SW slope.</p> <p>Dry wash, 30 lks. wide, drains NW.</p> <p>Point for the ¼ sec. cor. of secs. 4 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>				
<p>40.80</p> <p>80.00</p>	<p style="text-align: center;">T 12 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 33</td> <td style="padding: 0 5px;">S 4</td> </tr> </table> <p style="text-align: center;">T 13 S 1972</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N of cor.</p> <p>Short prominent spur, slopes N.</p> <p>Point for the cor. of secs. 4, 5, 32, and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	¼ S 33	S 4		
¼ S 33	S 4				
	<p style="text-align: center;">T 12 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 32</td> <td style="padding: 0 5px;">S 33</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 5</td> <td style="padding: 0 5px;">S 4</td> </tr> </table> <p style="text-align: center;">T 13 S 1972</p> <p>Cor. is located on gentle NW slope.</p> <p>Land, rolling to broken. Soil, sandy loam to marl stone. No timber. Undergrowth, sagebrush and grasses.</p>	S 32	S 33	S 5	S 4
S 32	S 33				
S 5	S 4				

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	N. 89° 56' W., bet. secs. 5 and 32. Over rolling grassland through scattered sagebrush.
4.30	Dry wash, in bottom of Little Rock House Canyon, drains SW.
19.70	Dry wash, in bottom of Little Rock House Canyon, drains NW.
28.50	Dry wash, in bottom of Little Rock House Canyon, drains SE.
39.20	Dry wash, 60 lks. wide, in bottom of Little Rock House Canyon, drains NW.
40.00	Point for the ¼ sec. cor. of secs. 5 and 32. Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd. T 12 S R 18 E ¼ $\frac{S\ 32}{S\ 5}$ T 13 S 1972
54.85	Intersect the Uintah and Ouray Indian Reservation boundary; true point for the closing cor. of secs. 5 and 32, falls on steep slope where a cor. cannot be perpetuated. From this point, the witness cor. to the 7 mile post, bears S. 30° 55' W., 15.64 chs. dist., hereinbefore described. From this same point, the 6½ mile post bears N. 30° 55' E., 26.33 chs. dist., as described in the concurrent survey of T. 12 S., R. 18 E.
55.60	Point selected for the witness cor. to the closing cor. of secs. 5 and 32. Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd. W C T 12 S R 18 E UOIR $\frac{C\ S\ 32}{C\ S\ 5}$ → T 13 S 1981
67.80	Prominent spur, slopes N; desc. over steep W slope.
80.00	Point for the cor. of secs. 5, 6, 31, and 32.

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) chiseled on bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 12 S R 18 E

S 31	S 32
S 6	S 5

T 13 S
1972

from which

A pinon, 10 ins. diam., bears S. 14° 00' E.,
36 lks. dist., mkd. T13S R19E S5 BT.

A pinon, 12 ins. diam., bears S. 40° 00' W.,
95 lks. dist., mkd. T13S R19E S6 BT.

Cor. is located on steep SW slope.

Land, rolling to broken.
Soil, sandy loam and marl stone.
No timber.
Undergrowth, sagebrush and grasses.

N. 89° 56' W., bet. secs. 6 and 31.

Over broken slopes.

23.09 Point selected for the witness point.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

W P
T 12 S R 18 E

S 31	
S 6	

T 13 S
1972

Desc. over steep, broken W slope of Green River.

40.00 Point for the ¼ sec. cor. of secs. 6 and 31, located on an inaccessible slope; not monumented.

49.26 Left bank of the Green River; point for the meander cor. of secs. 6 and 31.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T 12 S R 18 E

MC	S 31
	S 6

T 13 S
1981

Survey of the North Boundary of
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

56.87 Right bank of the Green River; true point for the meander cor. of secs. 6 and 31, falls on unstable river bank.

58.22 Point selected for the witness cor. to the meander cor. of secs. 6 and 31, on the right bank of the Green River.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
T 12 S R 18 E

S 31 /
S 6 / MC

T 13 S
1972

Raise a mound of stone, 2½ ft. base, 2 ft. high, N of cor.

65.35 Point for the cor. of Tps. 12 S., Rs. 17 and 18 E., as described in the field notes of T. 12 S., R. 18 E., surveyed concurrently under this Group.

79.43 The cor. of T. 13 S., R. 18 E., hereinbefore described.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp.

North, on the Sectional Guide Meridian, and bet. secs. 35 and 36.

Over nearly level land through scattered juniper and pinon.

20.15 Trail, 12 lks. wide, bears SE and NW.

40.00 Point for the ¼ sec. cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

¼
|
S 35 | S 36

1969

from which

A juniper, 6 ins. diam., bears N. 1° 30' E.,
395 lks. dist., mkd. ¼ S36 BT.

A juniper, 8 ins. diam., bears S. 16° 30' E.,
314 lks. dist., mkd. ¼ S36 BT.

51.40 Road, 15 lks. wide, bears SE and NW.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

59.61 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 35 and 36.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T 13 S R 18 E

S 35 | S 36
C | C

UOIR
1981

From this closing cor., angle point No. 46, bears N. 8° 25' W., 7.19 chs. dist., hereinbefore described.

69.36 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 35 and 36.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

UOIR

C | C
S 35 | S 36

T 13 S R 18 E
1981

From this closing cor., angle point No. 46, bears S. 21° 42' W., 2.84 chs. dist., hereinbefore described.

80.00 Point for the cor. of secs. 25, 26, 35, and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 26 | S 25
S 35 | S 36

1969

Cor. is located near the E edge of a trail road, 15 lks. wide, bears NE and SW.

Land, nearly level.
Soil, sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., hereinbefore described.

S. 89° 55' W., bet. secs. 25 and 36.

Over broken canyon land.

7.32 Angle point No. 52, on the Uintah and Ouray Indian Reservation boundary, hereinbefore described.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
15.60	East rim of canyon, bears N and S.
28.40	West rim of canyon, bears N and S.
37.30	Small wash, drains N.
39.30	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E
	$\frac{1}{4} \begin{array}{l} S 25 \\ S 36 \end{array}$
	1969
	from which
	A juniper, 14 ins. diam., bears S. $89^{\circ} 45'$ W., 174 lks. dist., mkd. $\frac{1}{4}$ S36 BT.
	A pinon, 8 ins. diam., bears N. $75^{\circ} 30'$ W., 181 lks. dist., mkd. $\frac{1}{4}$ S25 BT.
46.40	West rim of canyon, bears N and S.
57.30	East rim of canyon, bears NE and SW.
69.10	Canyon rim, bears NE and SW.
75.06	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 25 and 36.
	Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
	T 13 S R 18 E
	$\begin{array}{c} U \\ O / C S 25 \\ I / C S 36 \\ R \end{array}$
	1981
	From this closing cor., angle point No. 45, bears N. $21^{\circ} 42'$ E., 3.47 chs. dist., hereinbefore described.
79.30	The cor. of secs. 25, 26, 35, and 36.
	Land, nearly level to broken canyon. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	North, bet. secs. 25 and 26.
	Over nearly level land through sagebrush and grasses.
5.66	From this point on line, a 1-inch iron pipe, firmly set, projecting 12 ins. above the surface of the ground, with aluminum cap, mkd. USDI BLM PROJ NO U8R 230 HILL CREEK BDRY T13S R18E NOT A SUR COR 1968, bears East, 42 lks. dist.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS
5.85

Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 25 and 26.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

T 13 S R 18 E

S 26	S 25
C	C



UOIR
1981

From this closing cor., the 18th mile post, bears N. 64° 43' W., 4.63 chs. dist., hereinbefore described.

6.20 Enter scattered juniper and pinon.

40.00 Point for the ¼ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 13 S R 18 E

S 26	S 25
¼	¼

1969

from which

A pinon, 12 ins. diam., bears N. 86° 00' E.,
69 lks. dist., mkd. ¼ S25 BT.

A pinon, 10 ins. diam., bears S. 32° 00' W.,
99 lks. dist., mkd. ¼ S26 BT.

80.00 Point for the cor. of secs. 23, 24, 25, and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 23	S 24
S 26	S 25

1969

from which

A pinon, 10 ins. diam., bears N. 36° 45' E.,
62 lks. dist., mkd. T13S R18E S24 BT.

A pinon, 4 ins. diam., bears S. 84° 00' E.,
48 lks. dist., mkd. T13S R18E S25 BT.

A pinon, 6 ins. diam., bears S. 50° 00' W.,
93 lks. dist., mkd. T13S R18E S26 BT.

A pinon, 6 ins. diam., bears N. 47° 15' W.,
46 lks. dist., mkd. T13S R18E S23 BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, nearly level. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., hereinbefore described.</p> <p>S. 89° 56' W., bet. secs. 24 and 25.</p> <p>Over nearly level land through scattered pinon and juniper.</p>
15.25	Canyon rim, bears N and S.
39.43	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 17° 15' E., 89 lks. dist., mkd. $\frac{1}{4}$ S24 BT.</p> <p style="padding-left: 40px;">A pinon, 9 ins., diam., bears S. 0° 30' W., 23 lks. dist., mkd. $\frac{1}{4}$ S25 BT.</p>
44.25	Dry wash, drains N.
72.65	Rim of canyon, bears N and S.
75.75	Trail road, 18 lks. wide, bears generally N and S.
79.43	<p>The cor. of secs. 23, 24, 25, and 26.</p> <p>Land, nearly level to broken. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>North, bet. secs. 23 and 24.</p> <p>Over gently rolling mesa through dense pinon and juniper.</p>
11.60	Canyon rim, bears E and W.
17.50	North canyon rim, bears E and W.
19.80	Enter sagebrush and grasses.
30.00	Enter dense juniper and pinon.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{2}$ S 23 S 24 </p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A juniper, 6 ins. diam., bears S. 48° 30' E., 34 lks. dist., mkd. $\frac{1}{4}$ S24 BT.</p> <p>A pinon, 5 ins. diam., bears S. 44° 00' W., 53 lks. dist., mkd. $\frac{1}{4}$ S23 BT.</p> <p>65.10 Mesa rim, bears NE and SW; desc. over NW slope.</p> <p>80.00 Point for the cor. of secs. 13, 14, 23, and 24.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> S 14 S 13 S 23 S 24 </p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A juniper, 8 ins. diam., bears N. 21° 30' E., 83 lks. dist., mkd. T13S R18E S13 BT.</p> <p>A juniper, 10 ins. diam., bears S. 43° 00' W., 24 lks. dist., mkd. T13S R18E S23 BT.</p> <p>A juniper, 8 ins. diam., bears N. 6° 00' W., 130 lks. dist., mkd. T13S R18E S14 BT.</p> <p>Land, nearly level to broken. Soil, sandy, clay loam, and marl stone. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p> <hr/> <p>From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., hereinbefore described.</p> <p>S. 89° 56' W., bet. secs. 13 and 24.</p> <p>Over broken canyon land.</p> <p>19.70 The bottom of Pine Canyon, drains N.</p> <p>39.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 13 S R 18 E</p> <p>$\frac{1}{4}$ $\frac{S 13}{S 24}$</p> <p>1969</p>
	<p>from which</p> <p>A juniper, 6 ins. diam., bears S. 68° 30' E., 10 lks. dist., mkd. $\frac{1}{4}$ S24 BT.</p> <p>A juniper, 4 ins. diam., bears N. 7° 30' W., 70 lks. dist., mkd. $\frac{1}{4}$ S13 BT.</p>
48.30	Canyon rim, bears N and S.
50.10	Trail road, 15 lks. wide, bears N and S.
53.40	Trail road, 15 lks. wide, bears N and S.
56.30	Rim, bears N and S.
77.00	Spur, slopes N.
79.02	The cor. of secs. 13, 14, 23, and 24.
	<p>Land, gently rolling to broken canyons. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>North, bet. secs. 13 and 14.</p> <p>Desc. over NW slope, through widely scattered pinon and juniper through sagebrush and grasses.</p>
31.20	Desc. over steep N slope.
37.30	Dry wash, drains NW. Leave timber and asc. over broken W slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T 13 S R 18 E</p> <p>$\frac{1}{4}$</p> <p>S 14 S 13</p> <p>1969</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on a gentle W slope, 1.10 ch. East of deep dry wash.</p> <p>Over rolling W to SW slope through sagebrush and grasses.</p>
62.60	Rim, bears SE and NW; thence over rolling land.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
80.00	<p>Point for the cor. of secs. 11, 12, 13, and 14.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline \text{S 11} & \text{S 12} \\ \hline \text{S 14} & \text{S 13} \\ \hline \end{array}$ </p> <p style="text-align: center;">1969</p> <p>Cor. is located on gentle W slope.</p> <p>Land, broken to rolling. Soil, sandy and clay loam. Timber, pinon and juniper, south half mile. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., hereinbefore described.</p> <p>S. 89° 56' W., bet. secs. 12 and 13.</p> <p>Over W rolling and broken land, through widely scattered juniper and pinon, through sagebrush and grasses.</p>
16.90	East rim of mesa.
18.30	West rim of mesa, bears N and S.
38.50	<p>Point for the ¼ sec. cor. of secs. 12 and 13.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{c} \text{S 12} \\ \hline \text{S 13} \end{array}$ </p> <p style="text-align: center;">1969</p>
38.75	Broken vertical ledge, 10 ft. high.
42.10	Mesa rim, bears NE and SW.
61.40	Trail road, 18 lks. wide, bears N and S.
66.00	Mesa rim, bears SE and NW.
78.50	<p>The cor. of secs. 11, 12, 13, and 14.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

North, bet. secs. 11 and 12.

Over rolling W slopes through scattered pinon, juniper, sagebrush and grasses.

11.00 Leave timber; thence over E slope with broken small canyons through grassland.

15.40 South rim of deep canyon.


21.00 North rim of deep canyon.

27.40 South rim of deep canyon, bears SE and NW.

40.00 Point for the 1/4 sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E



1969

Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.

Cor. is located on SW slope.

41.20 North rim of canyon, bears SE and NW.


64.40 South rim of deep canyon, bears E and W.

71.80 North rim of canyon, bears E and W.

80.00 Point for the cor. of secs. 1, 2, 11, and 12.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E



1969

from which

A juniper, 6 ins. diam., bears N. 76° 00' E., 55 lks. dist., mkd. T13S R18E S1 BT.

A juniper, 6 ins. diam., bears S. 48° 30' E., 48 lks. dist., mkd. T13S R18E S12 BT.

A juniper, 8 ins. diam., bears S. 25° 00' W. 103 lks. dist., mkd. T13S R18E S11 BT.

A juniper, 6 ins. diam., bears N. 64° 45' W., 76 lks. dist., mkd. T13S R18E S2 BT.

Cor. is located on N slope.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, rolling to broken canyons. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., hereinbefore described. West, bet. secs. 1 and 12. Over rolling and broken land, through widely scattered juniper, pinon and grasses.</p>
37.35	Spur, slopes NW.
38.33	Point for the ¼ sec. cor. of secs. 1 and 12.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, in a mound of stone, 2 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S 1}{S 12}$</p> <p style="text-align: center;">1969</p>
	<p>Raise a mound of stone, 3 ft. base, 3 ft. high, S of cor. Cor. is located on steep NW slope.</p>
61.85	Trail road, 18 lks. wide, bears N and S.
63.45	Canyon rim, bears N and S; desc. over steep N slope.
78.33	The cor. of secs. 1, 2, 11, and 12.
	<p>Land, rolling to broken. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>North, bet. secs. 1 and 2. Asc. over SW slope through widely scattered juniper and pinon.</p>
18.80	Spur, slopes NW.
30.30	Spur, slopes NE; desc. over NW slope.
40.00	Point for the ¼ sec. cor. of secs. 1 and 2.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ S 2 S 1</p> <p style="text-align: center;">1969</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

from which

A juniper, 6 ins. diam., bears N. 23° 30' E.,
10 lks. dist., mkd. $\frac{1}{4}$ S1 BT.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W of
cor.

80.06 The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of
the Tp., hereinbefore described.

Land, rolling.
Soil, sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy.
of the Tp., hereinbefore described.

N. 0° 01' W., bet. secs. 34 and 35.

Over rolling E slope through dense pinon and juniper
with sparse grass.

18.00 Big canyon, drains NW.

35.60 Spur, slopes W; desc. over NW slope through scattered
pinon, juniper, sagebrush, and grasses.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

$\frac{1}{4}$
|
S 34 | S 35
|

1969

from which

A pinon, 12 ins. diam., bears S. 69° 00' E.,
56 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

A pinon, 12 ins. diam., bears N. 69° 00' W.,
11 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

55.90 Rim, bears E and W; thence over gently rolling mesa
through dense pinon, juniper, and sparse sagebrush with
grasses.

80.00 Point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

S 27 | S 26
S 34 | S 35

1969

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>from which</p> <p>A pinon, 6 ins. diam., bears N. 12° 30' E., 73 lks. dist., mkd. T13S R18E S26 BT.</p> <p>A juniper, 6 ins. diam., bears S. 63° 45' E., 14 lks. dist., mkd. T13S R18E S35 BT.</p> <p>A pinon, 6 ins. diam., bears S. 8° 30' W., 32 lks. dist., mkd. T13S R18E S34 BT.</p> <p>A pinon, 10 lks. diam., bears N. 31° 00' W., 41 lks. dist., mkd. T13S R18E S27 BT.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>S. 89° 59' W., bet. secs. 26 and 35.</p> <p>Over gently rolling grassland through widely scattered pinon and juniper and sagebrush.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S 26}{S 35}$</p> <p style="text-align: center;">1969</p>
46.68	<p>Raise a mound of stone, 3 ft. base, 1 ft. high, S of cor.</p> <p>Trail road, 18 lks. wide, bears SE and NW.</p>
71.00	<p>Enter dense pinon and juniper.</p>
80.00	<p>The cor. of secs. 26, 27, 34, and 35.</p> <p>Land, gently rolling. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>N. 0° 01' W., bet. secs. 26 and 27.</p> <p>Over gently rolling mesa through dense pinon and juniper.</p>
19.70	<p>Enter widely scattered pinon and juniper, sagebrush and grasses.</p>
33.93	<p>Trail road, 15 lks. wide, bears SE and NW.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 26 and 27.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 27 \quad | \quad \text{S } 26 \\ | \end{array}$$

1969

from which

A juniper, 4 ins. diam., bears S. 33° 30' E., 105 lks. dist., mkd. X BT.

A juniper, 6 ins. diam., bears S. 3° 30' W., 43 lks. dist., mkd. ¼ S27 BT.

55.08 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 26 and 27.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T 13 S R 18 E

$$\begin{array}{c} \text{S } 27 \quad | \quad \text{S } 26 \\ \text{C} \quad | \quad \text{C} \\ \hline \end{array}$$

UOIR
1981

From this closing cor., angle point No. 40, bears N. 81° 30' E., 3.36 chs. dist., hereinbefore described.

80.00 Point for the cor. of secs. 22, 23, 26, and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

$$\begin{array}{c} \text{S } 22 \quad | \quad \text{S } 23 \\ \text{S } 27 \quad | \quad \text{S } 26 \end{array}$$

1969

Land, gently rolling.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 23, 24, 25, and 26.

S. 89° 59' W., bet. secs. 23 and 26.

Over gently rolling land.

1.60 Canyon rim, bears SE and NW; desc. into canyon.

40.04 Point for the ¼ sec. cor. of secs. 23 and 26.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p>T 13 S R 18 E</p>	
	<p>¼ $\frac{S\ 23}{S\ 26}$</p>	
	<p>1969</p>	
	<p>from which</p>	
	<p>A juniper, 7 ins. diam., bears N. 6° 15' E., 36 lks. dist., mkd. ¼ S23 BT.</p>	
	<p>A pinon, 6 ins. diam., bears S. 47° 30' E., 40 lks. dist., mkd. ¼ S26 BT.</p>	
44.70	<p>Dry wash, drains NE; asc. over steep SE slope through scattered pinon and juniper.</p>	
68.10	<p>Canyon rim, bears N and S; thence over nearly level mesa through scattered pinon, juniper, sagebrush, and grasses.</p>	
71.80	<p>Enter open grassland.</p>	
75.67	<p>Trail road, 15 lks. wide, bears N and S.</p>	
80.08	<p>The cor. of secs. 22, 23, 26, and 27.</p>	
	<p>Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>	
	<p>N. 0° 01' W., bet. secs. 22 and 23.</p>	
	<p>Over gently rolling mesa through sagebrush and grasses.</p>	
25.00	<p>Canyon rim, bears SE and NW; thence over canyon.</p>	
38.00	<p>Canyon rim, bears SE and NW; thence over nearly level mesa through dense juniper, pinon and sparse sagebrush and grass.</p>	
40.00	<p>Point for the ¼ sec. cor. of secs. 22 and 23.</p>	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>	
	<p>T 13 S R 18 E</p>	
	<p>¼ S 22 S 23</p>	
	<p>1969</p>	
	<p>from which</p>	
	<p>A pinon, 8 ins. diam., bears N. 58° 30' E., 95 lks. dist., mkd. ¼ S23 BT.</p>	

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS								
	<p>A pinon, 16 ins. diam., bears N. 29° 30' W., 13 lks. dist., mkd. ¼ S22 BT.</p>							
50.00	<p>Canyon rim, bears SE and NW; desc. over steep NW slope through scattered pinon and juniper.</p>							
80.00	<p>Point for the cor. of secs. 14, 15, 22, and 23.</p>							
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.</p>							
	<p style="text-align: center;">T 13 S R 18 E</p>							
	<p style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 15</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 14</td> </tr> <tr> <td style="padding: 2px;">S 22</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 23</td> </tr> </table> </p>	S 15		S 14	S 22		S 23	
S 15		S 14						
S 22		S 23						
	<p style="text-align: center;">1969</p>							
	<p>from which</p>							
	<p>A pinon, 4 ins. diam., bears N. 83° 30' E., 26 lks. dist., mkd. X BT.</p>							
	<p>A juniper, 8 ins. diam., bears S. 33° 15' E., 13 lks. dist., mkd. T13S R18E S23 BT.</p>							
	<p>A pinon, 10 ins. diam., bears S. 83° 30' W., 33 lks. dist., mkd. T13S R18E S22 BT.</p>							
	<p>A pinon, 6 ins. diam., bears N. 13° 30' W., 77 lks. dist., mkd. T13S R18E S15 BT.</p>							
	<p>Land, gently rolling to broken.</p>							
	<p>Soil, sandy and clay loam.</p>							
	<p>Timber, pinon and juniper.</p>							
	<p>Undergrowth, sagebrush and grasses.</p>							
	<hr/>							
	<p>From the cor. of secs. 13, 14, 23, and 24.</p>							
	<p>S. 89° 58' W., bet. secs. 14 and 23.</p>							
	<p>Over canyon through scattered pinon and juniper.</p>							
30.00	<p>Bottom of canyon, drains NE.</p>							
40.03	<p>Point for the ¼ sec. cor. of secs. 14 and 23.</p>							
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>							
	<p style="text-align: center;">T 13 S R 18 E</p>							
	<p style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 14</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="padding: 2px;">S 23</td> </tr> </table> </p>	¼		S 14			S 23	
¼		S 14						
		S 23						
	<p style="text-align: center;">1969</p>							
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.</p>							
	<p>Cor. is located on steep SE slope.</p>							
	<p>Asc. over steep SE slope.</p>							
48.00	<p>Canyon rim, bears N and S; thence through dense juniper and pinon, over rolling mesa through sagebrush and grasses</p>							

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
53.30	Trail road, 15 lks. wide, bears N and S.
60.20	East rim of canyon, bears N and S; thence desc. over steep W slope through dense pinon and juniper.
64.50	Slope changes to desc. over steep NW slope.
80.06	The cor. of secs. 14, 15, 22, and 23. Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	N. 0° 01' W., bet. secs. 14 and 15. Desc. over NW slope through scattered pinon and juniper with sparse grass.
3.60	Dry wash in West Tabyago Canyon, drains NE; asc. over steep SE slope.
11.40	Along rolling E slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E $\frac{1}{4}$ S 15 S 14 1969
	from which A juniper, 4 ins. diam., bears N. 23° 30' E., 47 lks. dist., mkd. $\frac{1}{4}$ S14 BT. A juniper, 6 ins. diam., bears West, 15 lks. dist., mkd. $\frac{1}{4}$ S15 BT.
55.00	West Tabyago Canyon, drains NW.
80.00	Point for the cor. of secs. 10, 11, 14, and 15. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E S 10 S 11 S 15 S 14 1969
	Raise a mound of stone, $2\frac{1}{2}$ ft. base, 3 ft. high, W of cor.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Land, rolling and broken. Soil, sandy clay loam and marl stone. Timber, scattered juniper and pinon. Undergrowth, grasses.</p>
	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>West, bet. secs. 11 and 14.</p> <p>Over broken canyon.</p>
16.00	Dry wash, drains N; asc. over E slope.
39.00	Rim of canyon, bears N and S; thence over rolling mesa through scattered pinon and juniper.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 7 ins. in the ground to bedrock in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 11}{S\ 14}$</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pinon, 13 ins. diam., bears S. $36^{\circ} 00'$ E., 47 lks. dist., mkd. $\frac{1}{4}$ S14 BT.</p> <p style="padding-left: 40px;">A pinon, 5 ins. diam., bears N. $9^{\circ} 30'$ W., 102 lks. dist., mkd. $\frac{1}{4}$ S11 BT.</p>
50.00	East rim of canyon, bears NE and SW; thence over canyon.
59.30	Canyon rim, bears NE and SW; thence over rolling mesa through dense pinon and juniper.
62.00	Canyon rim, bears NE and SW; desc. over steep NW slope through scattered pinon and juniper.
80.00	The cor. of secs. 10, 11, 14, and 15.
	<p>Land, gently rolling to broken canyons. Soil, sandy, clay loam and marl stone. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>N. $0^{\circ} 01'$ W., bet. secs. 10 and 11.</p> <p>Along W slope of Tabyago Canyon through widely scattered juniper.</p>
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 10 S 11 1972 </p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 82° 15' W., 52 lks. dist., mkd. $\frac{1}{4}$ S10 BT.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>	
60.90	Rim, bears SE and NW; thence over level mesa through scattered juniper and pinon.	
73.00	Rim, bears NE and SW; desc. over steep NW slope through sparse grass.	
80.00	Point for the cor. of secs. 2, 3, 10, and 11.	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;"> $\frac{S\ 3}{S\ 10}$ $\frac{S\ 2}{S\ 11}$ 1972 </p> <p>from which</p> <p style="padding-left: 40px;">A rock ledge, bears N. 0° 01' W., 78 lks. dist., mkd. B X O.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Land, nearly level to broken canyon. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>	
19.00	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>N. 89° 58' W., bet. secs. 2 and 11.</p> <p>Dry wash, drains N.</p> <p>Over broken slopes of canyon, through sagebrush and grasses.</p>	
40.02	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 13 S R 18 E</p> <p>$\frac{1}{4}$ $\frac{S 2}{S 11}$</p> <p>1972</p> <p>Cor. is located on steep NW slope.</p>
72.20	Spur, slopes NE; desc. over steep NW slope.
80.04	The cor. of secs. 2, 3, 10, and 11.
	<p>Land, broken canyons. Soil, sandy and clay loams. No timber. Undergrowth, sagebrush and grasses.</p>
	<p>N. 0° 03' W., bet. secs. 2 and 3.</p> <p>Asc. over steep SW slope through sparse sagebrush and grasses.</p>
30.10	Rim, bears SE and NW; thence over level barren mesa.
36.40	Rim, bears NE and SW; desc. over steep NW slope through sparse sagebrush.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
	<p>T 13 S R 18 E</p> <p>$\frac{1}{4}$</p> <p>S 3 S 2</p> <p>1972</p>
79.97	The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., hereinbefore described.
	<p>Land, steep and broken. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>
	<p>From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0° 02' W., bet. secs. 33 and 34.</p> <p>Over rolling E slope, through scattered pinon and juniper, sparse sagebrush and grasses.</p>
32.00	Wash in bottom of Big Canyon, drains NW.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 33 \quad | \quad \text{S } 34 \\ | \end{array}$$

1969

from which

A pinon, 14 ins. diam., bears N. $35^{\circ} 00'$ E.,
72 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

A juniper, 10 ins. diam., bears N. $67^{\circ} 30'$ W.,
57 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

63.30 Rim of Big Canyon, bears E and W; thence over gently
rolling mesa through dense pinon, juniper and sparse grass.

80.00 Point for the cor. of secs. 27, 28, 33, and 34.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 13 S R 18 E

$$\begin{array}{c} \text{S } 28 \quad | \quad \text{S } 27 \\ \text{S } 33 \quad | \quad \text{S } 34 \end{array}$$

1969

from which

A pinon, 12 ins. diam., bears N. $60^{\circ} 00'$ E.,
42 lks. dist., mkd. T13S R18E S27 BT.

A pinon, 6 ins. diam., bears S. $37^{\circ} 30'$ E.,
49 lks. dist., mkd. T13S R18E S34 BT.

A pinon, 10 ins. diam., bears S. $62^{\circ} 30'$ W.,
5 lks. dist., mkd. T13S R18E S33 BT.

Land, broken canyon to rolling.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 26, 27, 34, and 35.

S. $89^{\circ} 57'$ W., bet. secs. 27 and 34.

Over gently rolling mesa through dense pinon, juniper
and sparse grass.

39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S R 18 E

$\frac{1}{4}$ $\frac{S 27}{S 34}$

1969

from which

A pinon, 12 ins. diam., bears S. 77° 00' E.,
61 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

A pinon, 10 ins. diam., bears N. 35° 00' W.,
25 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

79.96 The cor. of secs. 27, 28, 33, and 34.

Land, gently rolling.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, grasses.

N. 0° 02' W., bet. secs. 27 and 28.

Over gently rolling mesa through dense pinon and juniper
with sparse grasses.

8.80 Rim of deep canyon, bears NE and SW; thence across canyon.

21.90 North rim of canyon, bears NE and SW.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 13 S R 18 E

$\frac{1}{4}$
S 28 | S 27

1969

from which

A pinon, 8 ins. diam., bears N. 68° 00' E.,
8 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

A pinon, 9 ins. diam., bears S. 56° 00' W.,
12 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

From this cor., the U.S. Geological Survey triangulation
station "FLAT 1953" bears N. 85° 15' E., 17.67 chs. dist.,
monumented with a standard tablet, mkd. "FLAT 1953",
cemented in solid rock.

78.67 Trail road, 15 lks. wide, generally bears SE and NW.

80.00 Point for the cor. of secs. 21, 22, 27, and 28, identical
with angle point No. 36, on the Uintah and Ouray Indian
Reservation boundary.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 21	S 22
S 28	S 27

1969

from which

A juniper, 10 ins. diam., bears N. 80° 00' E.,
98 lks. dist., mkd. T13S R18E S22 BT.

A juniper, 4 ins. diam., bears S. 54° 30' W.,
90 lks. dist., mkd. T13S R18E S28 BT.

A juniper, 7 ins. diam., bears N. 13° 00' W.,
50 lks. dist., mkd. T13S R18E S21 BT.

Land, rolling to broken.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, grasses.

From the cor. of secs. 22, 23, 26, and 27.

West, bet. secs. 22 and 27.

Over nearly level land, through sagebrush and grasses.

7.50 Enter dense pinon and juniper, through sparse sagebrush
and grasses.

14.00 East rim of deep canyon; thence across canyon.

22.00 West Tabyago Canyon, drains N.

27.00 West rim of canyon, bears N and S.

39.97 Point for the ¼ sec. cor. of secs. 22 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

¼	S 22	S 27

1969

from which

A juniper, 4 ins. diam., bears S. 48° 00' W.,
178 lks. dist., mkd. X BT.

A juniper, 7 ins. diam., bears N. 49° 30' W.,
63 lks. dist., mkd. ¼ S22 BT.

79.94 The cor. of secs. 21, 22, 27, and 28.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>	
	<p>N. 0° 02' W., bet. secs. 21 and 22.</p>	
	<p>Over gently rolling mesa through dense pinon and juniper through sparse grasses.</p>	
21.50	<p>Leave timber, enter sagebrush and grassland.</p>	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.</p>	
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 13 S R 18 E</p>	
	<p style="text-align: center;"> $\frac{1}{4}$ S 21 S 22 </p>	
	<p style="text-align: center;">1969</p>	
80.00	<p>Point for the cor. of secs. 15, 16, 21, and 22.</p>	
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 13 S R 18 E</p>	
	<p style="text-align: center;"> S 16 S 15 S 21 S 22 </p>	
	<p style="text-align: center;">1969</p>	
	<p>from which</p>	
	<p>A juniper, 12 ins. diam., bears N. 44° 00' E., 102 lks. dist., mkd. T13S R18E S15 BT.</p>	
	<p>A juniper, 12 ins. diam., bears S. 21° 30' W., 74 lks. dist., mkd. T13S R18E S21 BT.</p>	
	<p>A juniper, 10 ins. diam., bears N. 65° 15' W., 142 lks. dist., mkd. T13S R18E S16 BT.</p>	
	<p>Land, gently rolling. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>	
	<p>From the cor. of secs. 14, 15, 22, and 23.</p>	
	<p>N. 89° 57' W., bet. secs. 15 and 22.</p>	
	<p>Desc. over W slope.</p>	
1.70	<p>Dry wash in bottom of West Tabyago Canyon, drains NE; asc. over steep E slope through scattered pinon and juniper.</p>	

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah


CHAINS	
18.50	Canyon rim, bears NE and SW; thence over rolling mesa through scattered juniper, pinon, sagebrush and grasses.
27.50	Enter dense pinon and juniper.
32.80	Rim, bears N and S; thence desc. into canyon.
40.01	Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T 13 S R 18 E $\frac{1}{4}$ $\frac{S 15}{S 22}$ 1969 from which A pinon, 5 ins. diam., bears N. $2^{\circ} 30'$ E., 17 lks. dist., mkd. $\frac{1}{4}$ S15 BT. A juniper, 10 ins. diam., bears S. $48^{\circ} 00'$ E., 55 lks. dist., mkd. $\frac{1}{4}$ S22 BT. A huge boulder, 11 x 8 x $2\frac{1}{2}$ ft. above the surface of the ground, bears West, 3 lks. dist.
47.10	Dry wash in bottom of canyon, drains NW; asc. over steep NE slope.
64.50	Canyon rim, bears SE and NW; thence over nearly level mesa through scattered pinon, juniper, sagebrush and grasses.
66.18	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 15 and 22. Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd. U T13S O R18E I C S15 R C S22 1981 From this closing cor., the $14\frac{1}{2}$ mile post, bears S. $17^{\circ} 39'$ E., 7.39 chs. dist., hereinbefore described.
80.02	The cor. of secs. 15, 16, 21, and 22. Land, nearly level to broken canyons. Soil, sandy, clay loam and marl stone. Timber, pinon and juniper. Undergrowth, sagebrush and grasses. N. $0^{\circ} 02'$ W., bet. secs. 15 and 16. Over nearly level land through scattered pinon and juniper through sagebrush and grasses.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

9.30 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 15 and 16.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

T 13 S R 18 E



UOIR
1981

From this closing cor., the 14 mile post, bears S. 39° 21' W., 0.42 chs. dist., hereinbefore described.


10.30 Rim, bears NE and W; desc. over steep NW slope.

33.75 Bottom of canyon, drains NE.

40.00 Point for the ¼ sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) chiseled on bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 13 S R 18 E



1972

from which

A juniper, 5 ins. diam., bears N. 9° 00' E.,
74 lks. dist., mkd. ¼ S15 BT.

A juniper, 6 ins. diam., bears N. 21° 00' W.,
176 lks. dist., mkd. ¼ S16 BT.

Cor. is located on the SE cor. of a prominent spur at break of a steep E slope above canyon bottom.


41.10 Asc. over gentle to steep SE slope through scattered pinon and juniper.

75.90 Prominent spur, slopes E; thence along E slope.

80.00 Point for the cor. of secs. 9, 10, 15, and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E



1972

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>from which</p> <p>A pinon, 3 ins. diam., bears N. 36° 15' E., 19 lks. dist., mkd. X BT.</p> <p>A juniper, 10 ins. diam., bears S. 14° 45' E., 14 lks. dist., mkd. T13S R18E S15 BT.</p> <p>The Northeast cor. of a boulder, 10 x 10 x 4 ft., above the surface of the ground, bears N. 50° 00' W., 13 lks. dist.</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.</p> <p>Cor. is located on steep E slope.</p> <p>Land, gently rolling to broken. Soil, sandy, clay loam and rocky. Timber, scattered juniper and pinon. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>N. 89° 58' W., bet. secs. 10 and 15.</p> <p>Desc. over W slope of canyon.</p>
10.00	West Tabyago Canyon, drains N.
27.40	Rim, bears N and S; thence over gently rolling mesa through dense to scattered pinon and juniper.
40.02	Point for the ¼ sec. cor. of secs. 10 and 15.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 10}{S\ 15}$</p> <p style="text-align: center;">1972</p>
	<p>from which</p> <p>A juniper, 6 ins. diam., bears N. 41° 00' E., 71 lks. dist., mkd. ¼ S10 BT.</p> <p>A pinon, 10 ins. diam., bears S. 31° 00' E., 34 lks. dist., mkd. ¼ S15 BT.</p>
42.00	Rim, bears N and S; thence across canyon.
60.00	Bottom of canyon, drains N.
80.04	The cor. of secs. 9, 10, 15, and 16.
	<p>Land, gently rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

N. 0° 02' W., bet. secs. 9 and 10.

Along rolling NE slope, through scattered juniper and pinon, through sagebrush and grasses.

32.90 Rim, bears NE and SW; thence over gently rolling land through dense to scattered pinon and juniper.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 13 S R 18 E

$\frac{1}{4}$
 |
 S 9 | S 10
 |

1972

from which

A pinon, 3 ins. diam., bears N. 33° 45' E.,
56 lks. dist., mkd. X BT.

A pinon, 9 ins. diam., bears S. 8° 00' W.,
61 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

80.00 Point for the cor. of secs. 3, 4, 9, and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 21 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 4	S 3
S 9	S 10

1972

from which

A pinon, 10 ins. diam., bears N. 10° 45' E.,
66 lks. dist., mkd. T13S R18E S3 BT.

A juniper, 10 ins. diam., bears S. 56° 00' E.,
43 lks. dist., mkd. T13S R18E S10 BT.

A pinon, 12 ins. diam., bears S. 63° 15' W.,
142 lks. dist., mkd. T13S R18E S9 BT.

A pinon, 3 ins. diam., bears N. 35° 00' W.,
112 lks. dist., mkd. X BT.

Cor. is located in a trail road, 15 lks. wide, bears generally NE and SW.

Land, rolling and broken.

Soil, sandy and clay loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grasses.

From the cor. of secs. 2, 3, 10, and 11.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	N. 89° 59' W., bet. secs. 3 and 10. In broken and rolling canyon.
25.00	West Tabyago Canyon, drains N.
40.03	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E $\frac{1}{4} \frac{S 3}{S 10}$ 1972
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor. Cor. is located on prominent spur, slopes SE.
56.30	Canyon rim, bears NE and SW; thence over rolling land through scattered pinon and juniper.
64.00	Rim, bears NE and SW.
71.50	Rim, bears NE and SW.
80.06	The cor. of secs. 3, 4, 9, and 10. Land, rolling to deep canyons. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	N. 0° 02' E., bet. secs. 3 and 4. Over nearly level land through dense to scattered pinon and juniper.
9.80	Rim, bears NE and SW; desc. over steep NW slope through scattered pinon and juniper.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (X) chiseled on solid rock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	T 13 S R 18 E $\frac{1}{4}$ S 4 S 3 1972
	from which A juniper, 10 ins. diam., bears N. 82° 15' E., 57 lks. dist., mkd. $\frac{1}{4}$ S3 BT. A juniper, 6 ins. diam., bears N. 41° 15' W., 36 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

80.03 The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., hereinbefore described.

Land, rolling to broken.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 02' W., bet. secs. 32 and 33.

Over nearly level mesa through scattered pinon and juniper.

1.07 Rim, bears NE and SW; desc. over steep NW slope through scattered pinon and juniper.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 13 S R 18 E

$\frac{1}{4}$
 |
 S 32 | S 33
 |

1972

from which

A juniper, 6 ins. diam., bears S. 25° 15' E.,
26 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A pinon, 20 ins. diam., bears S. 43° 45' W.,
12 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

52.00 Big canyon, drains NW.

80.00 Point for the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 21 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 29 | S 28
 S 32 | S 33

1972

from which

A pinon, 13 ins. diam., bears N. 81° 15' E.,
63 lks. dist., mkd. T13S R18E S28 BT.

A pinon, 8 ins. diam., bears S. 64° 30' E.,
77 lks. dist., mkd. T13S R18E S33 BT.

A pinon, 5 ins. diam., bears S. 34° 45' W.,
49 lks. dist., mkd. X BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>A pinon, 8 ins. diam., bears S. 86° 45' W., 101 lks. dist., mkd. T13S R18E S32 BT.</p> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 27, 28, 33, and 34.</p> <p>S. 89° 59' W., bet. secs. 28 and 33.</p> <p>Over nearly level land through pinon and juniper.</p>
0.15	Canyon rim, bears N and S; desc. into canyon.
34.50	Canyon rim, bears N and S; thence over gently rolling mesa through dense to scattered pinon and juniper.
40.00	Point for the ¼ sec. cor. of secs. 28 and 33.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 28}{S\ 33}$</p> <p style="text-align: center;">1972</p>
	<p>from which</p> <p>A pinon, 10 ins. diam., bears N. 42° 15' E., 41 lks. dist., mkd. ¼ S28 BT.</p> <p>A pinon, 7 ins. diam., bears S. 25° 15' E., 25 lks. dist., mkd. ¼ S33 BT.</p>
51.00	Rim, bears NE and SW; thence across canyon.
70.50	Rim, bears NE and SW; thence over mesa.
73.50	Rim, bears SE and NW; desc. over gentle SW slope.
80.00	The cor. of secs. 28, 29, 32, and 33.
	<p>Land, rolling mesa to broken canyons. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>N. 0° 02' W., bet. secs. 28 and 29.</p> <p>Asc. over SW slope through scattered pinon and juniper.</p>
2.20	Rim, bears SE and NW; thence over gently rolling mesa through dense to scattered pinon and juniper.
40.00	Point for the ¼ sec. cor. of secs. 28 and 29.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 13 S R 18 E

½
|
S 29 | S 28
|

1972

from which

A pinon, 8 ins. diam., bears N. 33° 30' E.,
17 lks. dist., mkd. ¼ S28 BT.

A pinon, 8 ins. diam., bears S. 87° 30' W.,
39 lks. dist., mkd. ¼ S29 BT.

44.80 Canyon rim, bears NE and SW; thence into canyon.

66.00 Bottom of canyon, drains NW

80.00 Point for the cor. of secs. 20, 21, 28, and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 20 | S 21
S 29 | S 28

1972

from which

A pinon, 12 ins. diam., bears S. 81° 15' E.,
48 lks. dist., mkd. T13S R18E S28 BT.

A pinon, 9 ins. diam., bears South, 32 lks.
dist., mkd. T13S R18E S29 BT.

A juniper, 5 ins. diam., bears N. 16° 45' W.,
28 lks. dist., mkd. T13S R18E S20 BT.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.

Cor. is located on the N side of dry wash, drains SW.

Land, rolling to broken canyons.

Soil, sandy and clay loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grasses.

From the cor. of secs. 21, 22, 27, and 28.

N. 89° 58' W., bet. secs. 21 and 28.

Over rolling grassland through widely scattered pinon
and juniper.

1.95 Fence, bears S. 81° 15' E. and N. 8° 15' W.

74

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
25.70	Enter dense to scattered pinon and juniper.
40.05	Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, $2\frac{1}{2}$ ft. base, to top of brass cap, mkd. T 13 S R 18 E $\frac{1}{4}$ $\frac{S 21}{S 28}$ 1972 from which A pinon, 7 ins. diam., bears N. $52^{\circ} 15'$ E., 37 lks. dist., mkd. $\frac{1}{4}$ S21 BT. A pinon, 14 ins. diam., bears S. $2^{\circ} 15'$ E., 23 lks. dist., mkd. $\frac{1}{4}$ S28 BT.
80.10	The cor. of secs. 20, 21, 28, and 29. Land, rolling. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	N. $0^{\circ} 02'$ W., bet. secs. 20 and 21. Asc. over S slope of canyon through scattered pinon and juniper.
9.70	Canyon rim, bears NE and SW; thence over nearly level mesa.
11.40	Canyon rim, bears NE and SW; thence over canyon.
34.30	Canyon rim, bears E and W; thence over gently rolling Big Canyon Flat through scattered pinon and juniper.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd. T 13 S R 18 E $\frac{1}{4}$ S 20 S 21 1972 from which A pinon, 8 ins. diam., bears N. $31^{\circ} 30'$ W., 137 lks. dist., mkd. $\frac{1}{4}$ S20 BT.
77.30	Rim, bears NE and SW; desc. over steep NW slope.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

80.00

Point for the cor. of secs. 16, 17, 20, and 21.

A cross (X) chiseled at the true point on a boulder,
8 x 4 x 4 ft. above the surface of the ground.

from which

A pinon, 8 ins. diam., bears North, 21 lks.
dist., mkd. X BT.

A pinon, 13 ins. diam., bears N. 42° 00' E.,
51 lks. dist., mkd. T13S R18E S16 BT.

An iron post, 30 ins. long, 2½ ins. diam., set on
line between secs. 16 and 21, over a cross (X)
chiseled on bedrock for a reference monument,
bears S. 89° 57' E., 133 lks. dist., with brass
cap mkd. RM T13S R18E S16 S21 88 FT 1972, and an
arrow pointing to the cor.

A pinon, 9 ins. diam., bears S. 83° 45' W.,
42 lks. dist., mkd. T13S R18E S20 BT.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, on a
boulder, South of the corner point.

Land, rolling and broken canyons.

Soil, sandy and clay loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grasses.

From the cor. of secs. 15, 16, 21, and 22.

N. 89° 57' W., bet. secs. 16 and 21.

Over nearly level mesa through scattered pinon, juniper
and sagebrush.

5.77

Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 16 and 21.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of aluminum cap, mkd.

T13S R18E, U
S16 C / O
S21 C / I
R
1981

From this closing cor., angle point No. 33, bears
N. 19° 44' E., 4.33 chs. dist., hereinbefore described.

10.20

Rim, bears NE and SW; desc. into canyon.

32.00

Bottom of canyon, drains NE; asc. over SE slope.

39.98

Point for the ¼ sec. cor. of secs. 16 and 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	T 13 S R 18 E $\frac{1}{4}$ $\frac{S\ 16}{S\ 21}$ 1972	
	from which The SE cor. of a boulder, 9 x 6 x 5 ft. above the surface of the ground, bears West, 4 lks. dist. Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.	
44.50	Rim, bears NE and SW; thence over gently rolling Big Canyon Flat through scattered pinon and juniper.	
44.58	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 16 and 21. Set an aluminum post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.	
	T13S R18E U / C S16 O / C S21 I R 1981	
	From this closing cor., angle point No. 27, bears N. 22° 55' E., 0.03 chs. dist., hereinbefore described.	
56.30	Fence, bears N. 18° 45' E. and s. 18° 45' W.	
58.53	Trail road, 24 lks. wide, bears NE and SW.	
78.63	Rim, bears NE and SW.	
79.96	The cor. of secs. 16, 17, 20, and 21. Land, rolling to broken canyons. Soil, sandy, clay loam and marl stone. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.	
	N. 0° 02' W., bet. secs. 16 and 17. Across canyon.	
28.80	Rim, bears NW and SW; thence over gently rolling land through scattered pinon and juniper.	
29.00	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 16 and 17, falls on vertical ledge. From this point, the 11th mile post, bears S. 50° 45' E., 2.57 chs. dist., hereinbefore described.	
29.67	Point selected for the witness cor. to the closing cor. of secs. 16 and 17.	

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Set an aluminum post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

W C
T 13 S R 18 E
S 17 | S 16
C | C
↓
UOIR
1981

37.70 Trail road, 24 lks. wide, generally bears SE and NW.

40.00 Point for the ¼ sec. cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

¼
S 17 | S 16

1972

from which

A juniper, 20 ins. diam., bears N. 43° 15' E.,
149 lks. dist., mkd. ¼ S16 BT.

A pinon, 14 ins. diam., bears N. 18° 00' W.,
80 lks. dist., mkd. ¼ S17 BT.

61.54 Fence, bears N. 60° 15' E. and S. 60° 15' W.

69.20 Rim, bears NE and SW; desc. over steep NW slope through scattered juniper and pinon.

80.00 Point for the cor. of secs. 8, 9, 16, and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 8 | S 9
S 17 | S 16

1972

from which

A pinon, 12 ins. diam., bears N. 21° 30' E.,
66 lks. dist., mkd. T13S R18E S9 BT.

A pinon, 8 ins. diam., bears S. 5° 00' W.,
45 lks. dist., mkd. T13S R18E S17 BT.

A pinon, 8 ins. diam., bears N. 67° 30' W.,
66 lks. dist., mkd. T13S R18E S8 BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
<p>1.90</p> <p>13.30</p> <p>32.00</p> <p>39.94</p> <p>45.80</p> <p>79.88</p>	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>N. 89° 55' W., bet. secs. 9 and 16.</p> <p>Asc. over steep E slope through scattered pinon and juniper.</p> <p>Rim, bears SE and NW; thence over gently rolling land through dense to scattered pinon and juniper.</p> <p>Enter open sagebrush and grasses.</p> <p>Trail road, 18 lks wide, bears NE and SW.</p> <p>Point for the ¼ sec. cor. of secs. 9 and 16.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S 9}{S 16}$</p> <p style="text-align: center;">1972</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 77° 45' E., 79 lks. dist., mkd. ¼ S16 BT.</p> <p style="padding-left: 40px;">A juniper, 4 ins. diam., bears S. 88° 45' W., 22 lks. dist., mkd. X BT.</p> <p>Rim, bears N and S; desc. over steep W slope through scattered juniper and grasses.</p> <p>The cor. of secs. 8, 9, 16, and 16.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
<p>31.70</p> <p>40.00</p>	<p>N. 0° 02' W., bet. secs. 8 and 9.</p> <p>Over gently rolling slope through scattered pinon and juniper in Little Rock House Canyon.</p> <p>Prominent spur, slopes E; desc. over gentle NE slope through scattered juniper.</p> <p>Point for the ¼ sec. cor. of secs. 8 and 9.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 8 \quad | \quad \text{S } 9 \\ | \end{array}$$

1972

from which

A pinon, 10 ins. diam., bears S. $49^{\circ} 00'$ E.,
92 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

A pinon, 9 ins. diam., bears S. $50^{\circ} 00'$ W.,
58 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

Over rolling canyon.

61.70 Rim, bears SE and NW.

68.00 Little Rock House Canyon, drains NW.

78.40 Prominent spur, slopes W; desc. over NW slope through scattered juniper.

80.00 Point for the cor. of secs. 4, 5, 8, and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

$$\begin{array}{c} \text{S } 5 \quad | \quad \text{S } 4 \\ \text{S } 8 \quad | \quad \text{S } 9 \end{array}$$

1972

from which

A juniper, 10 ins. diam., bears N. $28^{\circ} 30'$ E.,
8 lks. dist., mkd. T13S R18E S4 BT.

A cross (X) chiseled on a vertical ledge, 6 ft.
high, bears S. $20^{\circ} 18'$ E., 26 lks. dist., mkd.
B X O.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

Cor. is located on steep NW slope.

Land, broken to rolling slopes.

Soil, sandy and clay loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grasses.

From the cor. of secs. 3, 4, 9, and 10.

N. $89^{\circ} 52'$ W., bet. secs. 4 and 9.

Over rolling land through dense to scattered pinon and juniper.

7.90 Rim, bears NE and SW; thence over canyon.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
14.60	Rim, bears NE and SW; thence over rolling land.
20.00	Rim, bears NE and SW.
36.10	Rim, bears SE and NW.
39.96	Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 21 ins. in the ground, with brass cap mkd. T 13 S R 18 E $\frac{1}{4} \begin{array}{c} S 4 \\ S 9 \end{array}$ 1972 from which A pinon, 10 ins. diam., bears S. $51^{\circ} 15'$ E., 91 lks. dist., mkd. $\frac{1}{4}$ S9 BT. A pinon, 3 ins. diam., bears N. $30^{\circ} 45'$ W., 24 lks. dist., mkd. X BT.
56.30	Desc. over steep SW slope.
79.92	The cor. of secs. 4, 5, 8, and 9. Land, rolling to broken canyons. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	N. $0^{\circ} 03'$ W., bet. secs. 4 and 5. Along W and SW slope, through widely scattered pinon and juniper.
22.20	Rim, bears SE and NW; thence over rolling W slope.
38.50	Rim, bears NE and SW; desc. over steep NW slope through widely scattered pinon and juniper.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd. T 13 S R 18 E $\frac{1}{4}$ S 5 S 4 1972
79.88	The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., hereinbefore described. Land, broken canyons. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 03' W., bet. secs. 31 and 32.

Over gently rolling land through dense to scattered pinon and juniper.

20.90 Desc. over steep NW slope.

23.30 Thence, along rolling E slope through dense pinon and juniper.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 13 S R 18 E

$\frac{1}{4}$
 |
 S 31 | S 32
 |

1972

from which

A juniper, 10 ins. diam., bears N. 10° 45' E.,
50 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

A pinon, 11 ins. diam., bears S. 84° 15' W.,
43 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

42.20 Rim, bears NE and SW; thence over gently rolling mesa through dense to scattered pinon and juniper.

56.70 Desc. over NE slope.

80.00 Point for the cor. of secs. 29, 30, 31, and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

S 30 | S 29
 S 31 | S 32

1972

from which

A pinon, 14 ins. diam., bears North, 59 lks.
dist., mkd. T13S R18E S29 BT.

A pinon, 8 ins. diam., bears S. 30° 15' E.,
34 lks. dist., mkd. T13S R18E S32 BT.

A pinon, 10 ins. diam., bears N. 33° 45' W.,
69 lks. dist., mkd. T13S R18E S30 BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Land, rolling to broken.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 28, 29, 32, and 33.

S. 89° 55' W., bet. secs. 29 and 32.

Asc. over steep SE slope.

2.90 Rim, bears NE and SW; thence over nearly level mesa through dense to scattered pinon and juniper.

11.10 Rim, bears SE and NW; desc. over SW slope of Big Canyon.

40.01 Point for the ¼ sec. cor. of secs. 29 and 32.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T 13 S R 18 E

¼ $\frac{S\ 29}{S\ 32}$

1972

from which

A pinon, 7 ins. diam., bears N. 67° 45' E.,
71 lks. dist., mkd. ¼ S29 BT.

Raise a mound of stone, 2½ ft. base, 2 ft. high, N of cor.

Cor. is located on gentle W slope.

46.40 Bottom of Big Canyon and dry wash, 30 lks. wide, drains NW.

Asc. over NE slope.

80.02 The cor. of secs. 29, 30, 31, and 32.

Land, broken canyon.
Soil, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

S. 89° 56' W., bet. secs. 30 and 31.

Asc. over steep NE slope through dense to scattered pinon and juniper.

7.90 Rim, bears N and S; thence over rolling land through dense to scattered pinon and juniper.

25.80 Canyon rim, bears NE and SW; thence over canyon.

29.40 Canyon rim, bears SE and NW.

40.00 Point for the ¼ sec. cor. of secs. 30 and 31.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 30}{S\ 31}$</p> <p style="text-align: center;">1972</p> <p>from which</p> <p style="padding-left: 40px;">A pinon, 10 ins. diam., bears N. 44° 15' E., 46 lks. dist., mkd. ¼ S30 BT.</p> <p style="padding-left: 40px;">A pinon, 6 ins. diam., bears S. 39° 30' E., 11 lks. dist., mkd. ¼ S31 BT.</p>
49.00	Rim, bears SE and NW; desc. over NW slope through pinon and juniper.
79.92	The cor. of secs. 30 and 31, on the W. bdy. of the Tp., hereinbefore described.
	<p>Land, rolling to broken canyons. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 29, 30, 31, and 32.</p> <p>N. 0° 03' W., bet. secs. 29 and 30.</p> <p>Asc. over rolling E and SW slope.</p>
10.20	Rim, bears E and W; thence over gently rolling land through dense to scattered pinon and juniper.
18.40	Rim, bears E and W; desc. into canyon.
39.00	Dry wash, drains E; asc. over steep S slope.
40.00	<p>Point for the ¼ sec. cor. of secs. 29 and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 30}{S\ 29}$</p> <p style="text-align: center;">1972</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 74° 15' E., 24 lks. dist., mkd. ¼ S29 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 9° 15' W., 8 lks. dist., mkd. ¼ S30 BT.</p>

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		WARD				
	<p>Cor. is located on steep S slope.</p>					
57.00	Big canyon, drains NW.					
78.60	Prominent spur, slopes NW; desc. over steep NW slope.					
80.00	Point for the cor. of secs. 19, 20, 29, and 30.					
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 19</td> <td style="padding: 0 5px;">S 20</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 30</td> <td style="padding: 0 5px;">S 29</td> </tr> </table> <p style="text-align: center;">1972</p> <p>from which</p> <p style="margin-left: 40px;">A pinon, 6 ins. diam., bears N. 51° 30' E., 21 lks. dist., mkd. T13S R18E S20 BT.</p> <p style="margin-left: 40px;">A pinon, 14 ins. diam., bears S. 53° 15' E., 35 lks. dist., mkd. T13S R18E S29 BT.</p> <p style="margin-left: 40px;">A pinon, 15 ins. diam., bears S. 27° 15' W., 16 lks. dist., mkd. T13S R18E S30 BT.</p> <p style="margin-left: 40px;">A juniper, 4 ins. diam., bears N. 52° 30' W., 10 lks. dist., mkd. X BT.</p> <p>Land, rolling to steep and broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.</p>	S 19	S 20	S 30	S 29	
S 19	S 20					
S 30	S 29					
	<p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>S. 89° 59' W., bet. secs. 20 and 29.</p> <p>Desc. over gentle SW slope of canyon through scattered pinon and juniper.</p>					
8.20	Prominent spur, slopes S.					
36.70	Rim, bears SE and NW; desc. over steep SW slope through scattered pinon and juniper.					
39.99	Point for the ¼ sec. cor. of secs. 20 and 29.					
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 20</td> <td style="padding: 0 5px;">S 29</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 20</td> <td style="padding: 0 5px;">S 29</td> </tr> </table> <p style="text-align: center;">1972</p> <p>from which</p> <p style="margin-left: 40px;">A pinon, 10 ins. diam., bears S. 34° 00' E., 119 lks. dist., mkd. ¼ S29 BT.</p>	¼ S 20	S 29	¼ S 20	S 29	
¼ S 20	S 29					
¼ S 20	S 29					

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- A pinon, 8 ins. diam., bears N. 37° 30' W.,
7 lks. dist., mkd. $\frac{1}{4}$ S20 BT.
- Cor. is located on steep W slope.
- Over rugged canyons.
- 72.00 Canyon, drains NW.
- 79.98 The cor. of secs. 19, 20, 29, and 30.
- Land, rugged and broken canyons.
Soil, sandy, rocky and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.
-
- N. 89° 58' W., bet. secs. 19 and 30.
- Over Big Canyon; asc. over NE slope through scattered
pinon and juniper.
- 13.00 Big Canyon, drains NW.
- 39.00 Prominent gentle spur, slopes N.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.
- Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins.
in the ground, with brass cap mkd.
- T 13 S R 18 E
- $\frac{1}{4}$ $\frac{S 19}{S 30}$
- 1972
- from which
- A juniper, 8 ins. diam., bears N. 20° 00' E.,
21 lks. dist., mkd. $\frac{1}{4}$ S19 BT.
- A juniper, 4 ins. diam., bears S. 60° 00' W.,
14 lks. dist., mkd. $\frac{1}{4}$ S30 BT.
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of
cor.
- Cor. is located on gentle NW slope.
- 66.00 Rim, bears N and S; thence over gently rolling mesa
through scattered pinon and juniper.
- 79.84 The cor. of secs. 19 and 30, on the W. bdy. of the Tp.,
hereinbefore described.
- Land, rolling to broken rugged canyons.
Soil, rocky, sandy and clay loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.
-
- From the cor. of secs. 19, 20, 29, and 30.
- N. 0° 03' W., bet. secs. 19 and 20.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	Over broken Big Canyon through scattered pinon and juniper.
6.50	Canyon, drains NW.
40.00	Point for the 1/4 sec. cor. of secs. 19 and 20.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	T 13 S R 18 E
	$\frac{1}{4}$ S 19 S 20 1972
	from which
	A pinon, 8 ins. diam., bears S. 53° 30' E., 16 lks. dist., mkd. 1/4 S20 BT.
	A pinon, 8 ins. diam., bears N. 55° 00' W., 16 lks. dist., mkd. 1/4 S19 BT.
	Cor. is located on steep NW slope.
52.10	Prominent spur, slopes W.
80.00	Point for the cor. of secs. 17, 18, 19, and 20.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	T 13 S R 18 E
	S 18 S 17 S 19 S 20
	1972
	from which
	A pinon, 12 ins. diam., bears N. 65° 30' E., 27 lks. dist., mkd. T13S R18E S17 BT.
	A pinon, 8 ins. diam., bears S. 57° 30' E., 62 lks. dist., mkd. T13S R18E S20 BT.
	A juniper, 4 ins. diam., bears S. 33° 15' W., 32 lks. dist., mkd. X BT.
	Land, broken canyons. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	From the cor. of secs. 16, 17, 20, and 21.
	N. 89° 56' W., bet. secs. 17 and 20.
	Desc. into canyon through scattered pinon and juniper.
38.60	Prominent spur, slopes N.


Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
39.30	Desc. over steep NW slope.
39.95	Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (X) chiseled on bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd. T 13 S R 18 E $\frac{1}{4}$ $\frac{S 17}{S 20}$ 1972 from which A juniper, 8 ins. diam., bears N. $24^{\circ} 45'$ E., 13 lks. dist., mkd. $\frac{1}{4}$ S17 BT. A pinon, 8 ins. diam., bears S. $66^{\circ} 15'$ E., 18 lks. dist., mkd. $\frac{1}{4}$ S20 BT.
54.90	Prominent spur, slopes N.
74.80	Prominent spur, slopes S.
79.90	The cor. of secs. 17, 18, 19, and 20. Land, broken canyons. Soil, rocky, sandy and clay loam with marl stone. Timber, scattered pinon and juniper. Undergrowth, none.
	N. $89^{\circ} 58'$ W., bet. secs. 18 and 19. Over broken canyons.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, located in an inaccessible location; point not monumented.
65.00	Big Canyon, drains NW.
79.77	Point for the cor. of secs. 18 and 19, on the W. bdy. of the Tp., hereinbefore described. Land, broken canyons. Soil, rocky, sandy, and clay loam with marl stone. Timber, scattered pinon and juniper. Undergrowth, none.
	From the cor. of secs. 17, 18, 19, and 20. N. $0^{\circ} 03'$ W., bet. secs. 17 and 18. Asc. over steep S slope of Gray Knoll.
19.50	Gray Knoll; desc. over steep NW slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S R 18 E



1972

from which

A pinon, 8 ins. diam., bears N. 49° 00' E.,
59 lks. dist., mkd. 1/4 S17 BT.

A juniper, 6 ins. diam., bears N. 42° 15' W.,
15 lks. dist., mkd. 1/4 S18 BT.


From this cor., Electronic Tape Station No. 1, bears
S. 3° 57' E., 18.85 chs. dist.

72.70 Rim, bears NE and SW; thence over gently rolling mesa
through dense to scattered pinon and juniper.

80.00 Point for the cor. of secs. 7, 8, 17, and 18.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., over a
cross (X) chiseled on bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 13 S R 18 E



1972

from which

A pinon, 12 ins. diam., bears N. 39° 00' E.,
50 lks. dist., mkd. T13S R18E S8 BT.

A pinon, 8 ins. diam., bears S. 61° 45' E.,
82 lks. dist., mkd. T13S R18E S17 BT.

A pinon, 4 ins. diam., bears S. 58° 45' W.,
72 lks. dist., mkd. X BT.

A pinon, 10 ins. diam., bears N. 44° 45' W.,
69 lks. dist., mkd. T13S R18E S7 BT.

Land, broken to rolling.
Soil, sandy, rocky, clay loam with marl stone.
Timber, pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 8, 9, 16, and 17.

N. 89° 59' W., bet. secs. 8 and 17.

Asc. over steep NE slope through scattered pinon and
juniper.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
16.30	Rim, bears SE and NW; thence over rolling land through dense to scattered pinon and juniper.
39.99	Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd. <div style="text-align: center;"> T 13 S R 18 E $\frac{1}{4} \frac{S 8}{S 17}$ 1972 </div> from which <div style="margin-left: 40px;"> A pinon, 10 ins. diam., bears S. $21^{\circ} 15'$ W., 56 lks. dist., mkd. $\frac{1}{4}$ S17 BT. A pinon, 8 ins. diam., bears N. $86^{\circ} 30'$ W., 50 lks. dist., m kd. $\frac{1}{4}$ S8 BT. Cor. is located on steep E slope. </div>
41.40	Rim, bears SE and NW.
51.68	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 8 and 17. Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd. <div style="text-align: center;"> T 13 S R 18 E $\text{UOIR} \begin{array}{l} \diagdown C S 8 \\ \diagup C S 17 \end{array}$ 1981 </div> From this closing cor., the $9\frac{1}{2}$ mile post, bears N. $46^{\circ} 43'$ W., 15.13 chs. dist., hereinbefore described.
53.50	Trail road, 15 lks. wide, generally bears SE and NW.
79.98	The cor. of secs. 7, 8, 17, and 18. Land, rolling to broken. Soil, sandy and clay loam. Timber, pinon and juniper. Undergrowth, sagebrush and grasses.
	West, bet. secs. 7 and 18. Over nearly level land through scattered pinon and juniper.
19.30	Rim, bears NE and SW; desc. over steep NW slope into canyon.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18. This cor. is located in rugged, inaccessible canyon; an unsafe location for monument.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- 57.74 Point selected for a witness point on line bet. secs. 7 and 18.
Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.
- W P
T 13 S R 18 E
- S 7
—
S 18
- 1972
- from which
- A pinon, 6 ins. diam., bears N. 11° 45' E.,
50 lks. dist., mkd. X BT.
- A pinon, 8 ins. diam., bears S. 74° 15' E.,
59 lks. dist., mkd. X BT.
- 79.72 Point for the cor. of secs. 7 and 18, on the W. bdy. of the Tp., hereinbefore described.
Land, rolling to broken.
Soil, sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, none.
-
- From the cor. of secs. 7, 8, 17, and 18.
N. 0° 03' W., bet. secs. 7 and 8.
Over gently rolling land through dense to scattered pinon and juniper.
- 10.25 Trail road, 22 lks. wide, generally bears E and W.
- 11.37 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 7 and 8.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
- T 13 S R 18 E
- S 7 | S 8
C | C
—|—
- UOIR
1981
- From this closing cor., angle point No. 22, bears S. 80° 03' W., 4.66 chs. dist., hereinbefore described.
- 16.50 Desc. over steep NE slope into canyon.
- 40.00 Point for the ¼ sec. cor. of secs. 7 and 8.
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 13 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 7 \quad | \quad \text{S } 8 \end{array}$$

1972

- 44.50 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.
Prominent spur, slopes E.
- 80.00 Point for the cor. of secs. 5, 6, 7, and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 13 S R 18 E

$$\begin{array}{c} \text{S } 6 \quad | \quad \text{S } 5 \\ \text{S } 7 \quad | \quad \text{S } 8 \end{array}$$

1972

Land, rolling to broken.
Soil, sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush and grasses.

From the cor. of secs. 4, 5, 8, and 9.

N. 89° 56' W., bet. secs. 5 and 8.

Over canyon.

- 6.00 Little Rock House Canyon, drains N.
- 16.30 Rim, bears NE and SW; thence over rolling land through
scattered pinon and juniper.
- 38.90 Rim, bears NE and SW; desc. over steep NW slope.
- 39.20 Canyon bottom and dry wash, 30 lks. wide, drains N; asc.
over steep E slope through scattered pinon and juniper.
- 39.94 Point for the ¼ sec. cor. of secs. 5 and 8.
- Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T 13 S R 18 E

$$\frac{1}{4} \begin{array}{c} \text{S } 5 \\ \text{S } 8 \end{array}$$

1972

from which

A juniper, 10 ins. diam., bears N. 22° 15' E.,
47 lks. dist., mkd. ¼ S5 BT.

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS									
79.88	<p>A pinon, 14 ins. diam., bears S. 35° 45' E., 45 lks. dist., mkd. ¼ S8 BT.</p> <p>The cor. of secs. 5, 6, 7, and 8.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>								
15.04	<p>N. 89° 55' W., bet. secs. 6 and 7.</p> <p>Asc. over steep SW slope through scattered pinon and juniper.</p> <p>Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 6 and 7.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">UOIR</td> <td style="padding: 0 5px;">C</td> <td style="padding: 0 5px;">S</td> <td style="padding: 0 5px;">6</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="border-top: 1px solid black; padding: 0 5px;">C</td> <td style="border-top: 1px solid black; padding: 0 5px;">S</td> <td style="border-top: 1px solid black; padding: 0 5px;">7</td> </tr> </table> <p style="text-align: center;">1981</p>	UOIR	C	S	6		C	S	7
UOIR	C	S	6						
	C	S	7						
18.30	<p>From this closing cor., the 8th mile post, bears N. 52° 49' E., 6.56 chs. dist., hereinbefore described.</p> <p>Rim, bears NE and SW.</p>								
20.10	<p>Rim, bears NE and SW; thence across canyon.</p>								
40.00	<p>Point for the ¼ sec. cor. of secs. 6 and 7.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 13 S R 18 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">¼</td> <td style="border-top: 1px solid black; padding: 0 5px;">S</td> <td style="padding: 0 5px;">6</td> </tr> <tr> <td style="padding: 0 5px;"></td> <td style="border-top: 1px solid black; padding: 0 5px;">S</td> <td style="border-top: 1px solid black; padding: 0 5px;">7</td> </tr> </table> <p style="text-align: center;">1972</p>	¼	S	6		S	7		
¼	S	6							
	S	7							
53.60	<p>Cor. is located on a prominent spur, slopes North.</p> <p>Rim, bears N and SE; thence over rolling ridge through dense to scattered pinon and juniper.</p>								
58.00	<p>Rim, bears NE and SW; desc. over steep NW slope.</p>								
79.70	<p>True point for the cor. of secs. 6 and 7, on the W. bdy. of the Tp., hereinbefore described.</p> <p>Land, rolling to broken canyons. Soil, sandy and clay loam. Timber, scattered pinon and juniper. Undergrowth, sagebrush and grasses.</p>								

Survey of the Subdivisional Lines,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- From the cor. of secs. 5, 6, 7, and 8.
N. 0° 12' W., bet. secs. 5 and 6.
Along broken canyon through scattered pinon and juniper.
- 11.38 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 5 and 6.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with aluminum cap mkd.
- T 13 S R 18 E
UOIR
C | C
S 6 | S 5
1981
- From this closing cor., the 8th mile post, bears S. 52° 49' W., 12.26 chs. dist., hereinbefore described.
- 13.10 Prominent spur, slopes E.
- 40.00 Point for the ¼ sec. cor. of secs. 5 and 6.
Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.
- T 13 S R 18 E
¼
S 6 | S 5
1972
- from which
A juniper, 6 ins. diam., bears S. 43° 30' E., 33 lks. dist., mkd. ¼ S5 BT.
- Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.
- 40.20 Dry wash, 10 lks. wide, drains NE; asc. over SE slope through sparse juniper and pinon.
- 45.15 Prominent spur, slopes E.
- 52.00 Dry wash, 10 lks. wide, drains NW.
- 73.00 Prominent spur, slopes W; desc. over steep NW slope through scattered pinon and juniper.
- 80.01 The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., hereinbefore described.
Land, broken.
Soil, rocky, sandy and clay loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush and grasses.

Meanders of the Left Bank of the Green River,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Meanders of the Left Bank of the Green River,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the meander cor. of secs. 6 and 31, on the
N. bdy. of the Tp., hereinbefore described.

Thence with the meanders through sec. 6.

S. 13° 59' W., 4.87 chs.

S. 34° 17' W., 18.38 chs.

S. 79° 30' W., 13.47 chs.

N. 42° 58' W., 7.93 chs.

True point for the meander cor.
of secs. 1 and 6, on the W.
bdy. of the Tp., hereinbefore
described.

Meanders of the Right Bank of the Green River,
T. 13 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for the meander cor. of secs.
6 and 31, on the N. bdy. of the Tp., hereinbefore
described.

Thence with the meanders through sec. 6.

S. 14° 43' W., 8.07 chs.

S. 42° 32' W., 6.22 chs.

S. 62° 52' W., 5.26 chs.

N. 88° 47' W., 4.78 chs.

N. 54° 33' W., 8.42 chs.

True point for the meander cor.
of secs. 1 and 6, on the W.
bdy. of the Tp., hereinbefore
described.

General Description

A variety of land and soils are found in T. 13 S.,
R. 18 E., of the Salt Lake Meridian, Utah. The elevation
of the township varies from about 4600 ft. above sea level
to 7000 ft. above sea level. The western and northern
portions are rough land with deep, broken canyons with the
remaining portions being nearly level flats to broken
canyons. The soil of bottom lands of the canyon is
alluvial silt with sand and clay loams. The rolling high
portions are a sandy loam. There is a heavy stand of
pinon and juniper timber in the southern and western por-
tions to scattered juniper and pinon over the public flats.
Sagebrush and native grass are predominant over much of
the area. The exposed rocks are mainly sandstone, shale
and marl stone.

T. 13 S., R. 18 E., Salt Lake Meidian, Utah

CHAINS

The Green River flows through the northwest cor. of section 6 of the township. Firewater, Big, and Tabyago Canyons are the major water courses and drain northwesterly into the Green River. This area is arid and no springs are noted in the township but several springs are located on adjacent lands.

The major improvements and developments at the present time consist of a windmill in sec. 36, a fence traverses from the eastern portion northwesterly in the western regions and numerous trails provide limited access to certain portions of the area. A bush airstrip is adjacent to the south boundary of the township.

There are no inhabitants in the area and at present the predominant interest is in stock grazing.

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Julian J. Cordova	Survey Aid
Roy J. Vincent	Survey Aid
Barry B. Babbitt	Survey Aid
Everett E. Gorgen	Survey Aid
Victor E. Templeton	Survey Aid
Caleb C. Costin	Survey Aid
Richard P. Godesiabois	Survey Aid
Donald R. Duran	Survey Aid
Scott McMullin	Supervisory Cadastral Surveyor
Richard Zaninovich	Supervisory Cadastral Surveyor
John H. Mavor	Survey Aid
Rex Smith	Survey Aid
Terry Christensen	Survey Aid

CERTIFICATE OF SURVEY

~~XXX~~(We), Ray Harpin and Milton R. Workman, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st day of May, 1969, ~~XX~~ (We) have dependently resurveyed the west boundary of T. 13 S., R. 19 E.; surveyed the easterly boundary of the Uintah and Ouray Indian Reservation; surveyed the south, west, and north boundaries; the subdivisional lines, and the meander lines of T. 13 S., R. 18 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by ~~XXX~~, (us) and under ~~XXX~~ (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 16, 1982
(Date)

Ray Harpin
(Cadastral Surveyor)
Supervisory

July 16, 1982
(Date)

Milton R. Workman
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the west boundary of T. 13 S., R. 19 E.; the survey of the easterly boundary of the Uintah and Ouray Indian Reservation; the survey of the south, west, and north boundaries; the subdivisional lines, and the meander lines of T. 13 S., R. 18 E., Salt Lake Meridian, Utah

executed by Ray Harpin, Supervisory Cadastral Surveyor
Milton R. Workman, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

August 17, 1982
(Date)

Glen B. Hates
(Chief Cadastral Survey Examiner and Approval Staff)
Chief Cadastral Surveyor for Utah

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.

(Date)

~~(Chief Cadastral Survey Examiner and Approval Staff)~~
Chief Cadastral Surveyor for Utah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R 604

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE NORTH, SOUTH AND EAST BOUNDARIES,

AND

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SURVEY OF A PORTION OF THE SUBDIVISIONS

OF CERTAIN SECTIONS AND PARCELS

OF

TOWNSHIP 7 SOUTH, RANGE 3 EAST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Glen B. Hatch, Supervisory Cadastral Surveyor

Gail E. Reynolds, Supervisory Cadastral Surveyor

Under special instructions dated April 2, 19 79, approved April 10, 1979,
and Supplemental Special Instructions dated December 12, 1979, and approved

December 13, 1979, which provided for the surveys included under U.S. Survey/Group
Number 591, and assignment instructions dated April 11, 19 79.

Survey commenced April 11, 19 79

Survey completed June 24, 19 82

INDEX DIAGRAM

Township 7 South, Range 3 East,

6	10 5 40 41	9 4 30 39	7 3 21 29	7 2	6 1
7	8 37 41	9 28 36	10 21 28	11 20	12
18	17 35	16 27 34	15 19 27	14 19	13
19	20 33	21 26 31	22 18 25	23 14 18	24 13
30	29	28 24	27 17 22	26 12 16	25 5 12
31	32	33	34 15	35 11 3	36 4 2

- Subdivision of Section 5 - Page 42
- Subdivision of Section 8 - Page 44
- Subdivision of Section 9 - Page 46
- Subdivision of Section 10 - Page 52
- Subdivision of Section 17 - Page 53
- Subdivision of Section 21 - Page 54
- Subdivision of Section 27 - Page 57
- Subdivision of Section 28 - Page 59
- Subdivision of Section 34 - Page 61
- Subdivision of Section 35 - Page 63

- Survey of a Parcel in Sec. 17 - Page 67
- Survey of a Parcel in Sec. 28 - Page 69
- Survey of a Parcel in Sec. 34 - Page 71
- Survey of a Parcel in Sec. 35 - Page 73

- Ironton Subdivision - Page 76

Township 7 South, Range 3 East, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the north, south and east boundaries, a portion of the subdivisional lines, and the survey of a portion of the subdivisions of certain sections and parcels of T. 7 S., R. 3 E., Salt Lake Meridian, Utah.

The resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and Special Instructions for Group No. 591, Utah, dated April 2, 1979, and Supplemental Special Instructions, dated December 12, 1979.

A portion of the north boundary, a portion of the south boundary, a portion of the west boundary and the southwest portion of the subdivisional lines were surveyed by C.L. Craig in 1856. A portion of the north boundary and a portion of the subdivisional lines were resurveyed, and a portion of the north boundary and a portion of the subdivisional lines was surveyed by A.J. Stewart, Sr., in 1872. A portion of the subdivisional lines were resurveyed and completion survey of sec. 17 by Ernest Buettner in 1879. A portion of the south boundary and a portion of the subdivisional lines were resurveyed, and the completion survey of sec. 34, surveyed by A.D. Ferron in 1881. A portion of the north boundary resurveyed by A.J. Stewart Jr., in 1881. A portion of the south boundary surveyed by John Brecken in 1891. A portion of the south boundary was resurveyed by Henry and Nicholas Fitzhugh in 1895. The completion survey of the south boundary, north boundary, the east boundary and the subdivisional lines were conducted by Henry and Nicholas Fitzhugh in 1895. The corner of secs. 19, 24, 25, and 30, on the east boundary was remonumented by Gail E. Reynolds in 1975, under the remonumentation cooperative agreement between the U.S. Forest Service and the BLM.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record and a search of Utah County Court House records for information on the positions of corners in the survey.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for control of each particular corner.

The direction of the lines of this survey were determined by reference to the true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Distances were determined by electronic measurement where possible. Distances to topography on lines run by traverse due to rough terrain, timber and private property are approximately as scaled from U.S.G.S. topographic sheets.

The geographic position of the southeast corner of the township as computed by traverse and section line ties to U.S. Coast and Geodetic Survey Triangulation Station "Heaven", located in the NW portion of sec. 31, T. 7 S., R. 4 E., is as follows:

Latitude $40^{\circ} 09' 34.6''$ N. Longitude $111^{\circ} 32' 27.5''$ W.

Township 7 South, Range 3 East, Salt Lake Meridian, Utah

CHAINS					
	<p>The mean magnetic declination is 15° E.</p>				
	<p>Dependent Resurvey of a Portion of the South Boundary of T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>				
	<p>(Reestablishment of the Survey Executed by John Brecken, Deputy Surveyor in 1891, and the Resurvey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>				
	<p>Beginning at the cor. of Tps. 7 and 8 S., Rs. 3 and 4 E., monumented with a mound of stone and an old survey lath. This position is accepted as the best available evidence of the original corner.</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;"> T 7 S R 3 E R 4 E <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 36</td> <td style="padding: 0 5px;">S 31</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 1</td> <td style="padding: 0 5px;">S 6</td> </tr> </table> T 8 S 1979 </p> <p>Cor. is located on steep S slope in native grasses and scattered patches of scrub oak and maple.</p> <p>S. 89° 35' W., bet. secs. 1 and 36.</p> <p>Over mountainous land, along S slope, through patches of scrub oak and maple.</p>	S 36	S 31	S 1	S 6
S 36	S 31				
S 1	S 6				
<p>39.48</p>	<p>Point for the ¼ sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;"> T 7 S R 3 E <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 36</td> <td style="padding: 0 5px;">S 1</td> </tr> </table> T 8 S R 3 E 1979 </p> <p>Cor. is located 30 lks. E of spur, projects S.</p> <p>Along broken S slope, through oak and maple.</p>	¼ S 36	S 1		
¼ S 36	S 1				
<p>78.96</p>	<p>Point for the cor. of secs. 1, 2, 35, and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>				

Dependent Resurvey of a Portion of the South Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 35 & S 36 \\ \hline S 2 & S 1 \\ \hline \end{array}$ </p> <p style="text-align: center;">T 8 S R 3 E 1979</p> <p>Cor. is located on steep S slope in native grasses and scattered oak and maple.</p>
	<p style="text-align: center;">(Reestablishment of the Survey Executed by E. Buettner, Deputy Surveyor in 1879, and the Resurveys Executed by A.D. Ferron, Deputy Surveyor in 1881, and Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>
	<p>S. 89° 35' W., bet. secs. 2 and 35.</p> <p>Over mountainous land, through scattered oak and maple; desc. over broken SSW slope.</p>
19.74	<p>Point for the E 1/16 sec. cor. of secs. 2 and 35.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $E \frac{1}{16} \frac{S 35}{S 2}$ </p> <p style="text-align: center;">T 8 S R 3 E 1979</p> <p>Cor. is located on steep S slope in native grasses and scattered patches of scrub oak.</p>
39.48	<p>The ¼ sec. cor. of secs. 2 and 35, monumented with an iron pipe, 2½ ins. diam., firmly set in concrete, extending 5 ins. out of the ground, with Utah County brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{S 35}{S 2}$ </p> <p style="text-align: center;">1961 T 8 S R 3 E</p> <p>This position has long been recognized as the cor. by adjacent landowners, and is accepted as the best available evidence of the original cor. position.</p> <p>Cor. is located on grassy SW slope.</p> <p style="text-align: center;">_____</p> <p style="text-align: center;">(Reestablishment of the Survey Executed by C.L. Craig, Deputy Surveyor in 1856, and the Resurveys Executed by E. Buettner, Deputy Surveyor in 1879, and A.D. Ferron, Deputy Surveyor in 1881, and Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p> <p style="text-align: center;">_____</p>

Dependent Resurvey of a Portion of the South Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>N. 89° 51' W., beginning new measurement.</p>
	<p>Desc. SW slope, through scattered scrub oak.</p>
20.37	<p>True point for the W 1/16 sec. cor. of secs. 2 and 35, falls in concrete storage shed and is impracticable to establish a permanent monument.</p>
22.17	<p>Point selected for the witness W 1/16 sec. cor. of secs. 2 and 35.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">W C T 7 S R 3 E</p>
	<p style="text-align: center;">W 1/16 $\frac{S\ 35}{S\ 2}$</p>
	<p style="text-align: center;">T 8 S R 3 E 1979</p>
	<p>Cor. is located in a 4 strand fence line bearing NE and SW, along W side of driveway bearing N and S.</p>
	<p>Thence over nearly level farmland and orchards.</p>
40.74	<p>The cor. of secs. 2, 3, 34, and 35, monumented with an iron pipe, 2½ ins. diam., firmly set flush with the ground in an alfalfa field, with Utah County brass cap mkd.</p>
	<p style="text-align: center;">T 7 S R 3 E</p>
	<p style="text-align: center;">$\frac{S\ 34}{S\ 3} \mid \frac{S\ 35}{S\ 2}$</p>
	<p style="text-align: center;">T 8 S R 3 E</p>
	<p>No date on brass cap.</p>
	<p>New ties made February 17, 1976, and this cor. recorded in the Utah County Court House October 6, 1978, and is recognized as the cor. by adjacent landowners and is accepted as the best available evidence of the original cor. position.</p>
<p>Dependent Resurvey of a Portion of the East Boundary of T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
<p>(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>	
	<p>From the cor. of Tps. 7 and 8 S., Rs. 3 and 4 E., hereinbefore described.</p>
	<p>N. 0° 09' E., bet. secs. 31 and 36.</p>
	<p>Over mountainous land, through scrub oak and maple; asc. steep S slope.</p>
33.90	<p>Ridge, bears NE and SW, along broken W slope.</p>

Dependent Resurvey of a Portion of the East Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
39.46	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E R 4 E</p> <p>$\frac{1}{4}$</p> <p>S 36 S 31</p> <p>1979</p> </div> <p>Cor. is located on W slope in scrub oak and dense underbrush.</p>
78.92	<p>Point for the cor. of secs. 25, 30, 31, and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E R 4 E</p> <p>S 25 S 30 S 36 S 31</p> <p>1979</p> </div> <p>Cor. is located on SSE slope in dense maple and oak brush.</p>
	<p>N. $0^{\circ} 09'$ E., bet. secs. 25 and 30.</p> <p>Over mountainous land, through oak, maple, aspen and scattered pine.</p>
39.46	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E R 4 E</p> <p>$\frac{1}{4}$</p> <p>S 25 S 30</p> <p>1979</p> </div> <p>from which</p> <p>A maple, 4 ins. diam., bears S. 69° E., 22 lks. dist., mkd. $\frac{1}{4}$ S30 BT.</p>

Dependent Resurvey of a Portion of the East Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>A maple, 6 ins. diam., bears S. 53° W., 16 lks. dist., mkd. ¼ S25 BT.</p> <p>The cor. is located on N slope in oak, maple and scattered aspen.</p>
47.00	Improved graveled road, bears E and W.
64.00	Improved graveled road, bears NNE and SSW.
68.50	Improved graveled road, bears ESE and WNW.
78.92	The cor. of secs. 19, 24, 25, and 30, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the 1975 remonumentation notes of the west boundary of T. 7 S., R. 4 E.
<p>Dependent Resurvey of a Portion of the North Boundary of T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
<p>(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>	
<p>From the ¼ sec. cor. of secs. 1 and 36, Tps. 6 and 7 S., R. 3 E., which is determined at record bearing and distance from the remains of an original bearing tree.</p> <p>A dead standing pine, 16 ins. diam., bears N. 50° E., 70 lks. dist., with illegible scribe marks visible on an open blaze on the SW face of the tree.</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a mound of stone, 4 ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S\ 36}{S\ 1}$</p> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>from which new bearing trees</p> <p>A pine, 20 ins. diam., bears N. 45 ¾° E., 74 lks. dist., mkd. ¼ S36 BT.</p> <p>A pine, 8 ins. diam., bears N. 10 ¾° W., 127 lks. dist., mkd. "X" at breast height and BT at the base.</p> <p>S. 89° 26' W., bet. secs. 1 and 36.</p> <p>Over mountainous land, through scattered timber, precipitous ledges and dense undergrowth.</p>	
40.29	Point for the cor. of secs. 1, 2, 35, and 36, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey of a Portion of the North Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS						
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with an aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 35</td> <td style="padding: 0 5px;">S 36</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;">S 1</td> </tr> </table> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor. Cor. is located on steep E slope.</p>	S 35	S 36	S 2	S 1	
S 35	S 36					
S 2	S 1					
40.29	<p>S. 89° 26' W., bet. secs. 2 and 35.</p> <p>Over mountainous land, through scattered timber and dense undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 35</td> <td style="padding: 0 5px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 2</td> <td style="padding: 0 5px;"></td> </tr> </table> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>Cor. is located on E slope.</p>	¼ S 35		S 2		
¼ S 35						
S 2						
66.50	Improved graveled road, bears N and S.					
80.58	<p>Point for the cor. of secs. 2, 3, 34, and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top of brass cap, mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 34</td> <td style="padding: 0 5px;">S 35</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 3</td> <td style="padding: 0 5px;">S 2</td> </tr> </table> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>from which</p> <p style="margin-left: 40px;">A pine, 17 ins. diam., bears S. 33¼° E., 139 lks. dist., mkd. T7S R3E S2 BT.</p>	S 34	S 35	S 3	S 2	
S 34	S 35					
S 3	S 2					
	<p>S. 89° 26' E., bet. secs. 3 and 34.</p> <p>Over mountainous land, through scattered timber and dense undergrowth.</p>					

Dependent Resurvey of a Portion of the North Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
20.145	<p>Point for the E 1/16 sec. cor. of secs. 3 and 34.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <p style="text-align: center;">E 1/16 $\frac{S\ 34}{S\ 3}$</p> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>from which</p> <p style="padding-left: 40px;">An aspen, 8 ins. diam., bears N. 45° E., 7 lks. dist., mkd. E 1/16 S34 BT.</p> <p style="padding-left: 40px;">A pine, 10 ins. diam., bears S. 58° W., 11 lks. dist., mkd. E 1/16 S3 BT.</p>	
40.29	<p>Point for the ¼ sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top of brass cap, mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S\ 34}{S\ 3}$</p> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. diam., bears N. 42 3/4° E., 51 lks. dist., mkd. ¼ S34 BT.</p> <p style="padding-left: 40px;">A pine, 12 ins. diam., bears S. 59 1/4° E., 47 lks. dist., mkd. ¼ S3 BT.</p>	
60.435	<p>Point for the W 1/16 sec. cor. of secs. 3 and 34.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 6 S R 3 E</p> <p style="text-align: center;">W 1/16 $\frac{S\ 34}{S\ 3}$</p> <p style="text-align: center;">T 7 S R 3 E 1979</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 30 ins. diam., bears N. 41° W., 168 lks. dist., mkd. W 1/16 S34 BT.</p> <p style="padding-left: 40px;">An improved spring with 2 ins. diam. pipe, bears S. 19° 09' E., 3.31 chs. dist.</p>	

Dependent Resurvey of a Portion of the North Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

80.58 Point for the cor. of secs. 3, 4, 33, and 34, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

T 6 S R 3 E

S 33	S 34
S 4	S 3

T 7 S R 3 E
1979

from which

An aspen, 12 ins. diam., bears S. 85 1/4° E.,
136 lks. dist., mkd. T7S R3E S3 BT.

A pine, 24 ins. diam., bears N. 85 1/4° W.,
43 lks. dist., mkd. T6S R3E S33 BT.

Cor. is located in a draw which drains N.

(Reestablishment of the Survey Executed
by A.J. Stewart, Jr., Deputy Surveyor in 1881)

S. 89° 26' W., bet. secs. 4 and 33.

Over mountainous land, through scattered timber and dense undergrowth.

20.145 Point for the E 1/16 sec. cor. of secs. 4 and 33.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top of aluminum cap, mkd.

T 6 S R 3 E

E 1/16	S 33	
	S 4	

T 7 S R 3 E
1979

from which

A pine, 18 ins. diam., bears N. 80° E., 4 lks. dist.,
mkd. E 1/16 S33 BT.

40.29 Point for the ¼ sec. cor. of secs. 4 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T 6 S R 3 E

¼	S 33	
	S 4	

T 7 S R 3 E
1979

Dependent Resurvey of a Portion of the North Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

from which

A (X) BO chisled 4 ft. above ground on SE face of rock outcrop, 30 ft. high, 20 ft. wide, and 100 ft. long, bears N. 40° 58' W., 101 lks. dist.

Raise a mound of stone, 3½ ft. base, 2½ ft. high, N of cor.

80.58 Point for the cor. of secs. 4, 5, 32, and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, in a mound of stone, 5 ft. base to top of aluminum cap, mkd.

T 6 S R 3 E

S 32		S 33
S 5		S 4

T 7 S R 3 E
1979

Cor. is located on steep W slope.

(Reestablishment of the Survey Executed by C.L. Craig, Deputy Surveyor in 1856 and the Survey and Resurvey by A.J. Stewart, Deputy Surveyor in 1881)

S. 89° 26' W., bet. secs. 5 and 32.

Over mountainous land covered with oak brush; desc. into foothills.

20.145 Point for the E 1/16 sec. cor. of secs. 5 and 32.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top of aluminum cap, mkd.

T 6 S R 3 E

E 1/16	—	S 32
	—	S 5

T 7 S R 3 E
1979

Cor. is located on steep W slope.

40.29 The ¼ sec. cor. of secs. 5 and 32, monumented with an iron post of unknown origin, 2 ins. diam., projecting 14 ins. above ground, firmly set with a steel fence post alongside, and brass cap mkd.

S 32

T 6 S	¼
T 7 S	

S 5

Dependent Resurvey of a Portion of the North Boundary of
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

This cor. is harmoniously related to existing original cors. has long been recognized as the cor. by adjacent landowners, and is accepted as the best available evidence of the original cor. position.

S. 89° 13' W., beginning new measurement.

40.03 The cor. of secs. 5, 6, 31, and 32, monumented with a brass tablet, 3 ins. diam., firmly set in concrete, 3 ins. below surface of asphalt road, with Utah County brass cap mkd.

T 6 S R 3 E

S 31	S 32
S 6	S 5

1960

This position has long been recognized as the cor., and is accepted as the best available evidence of the original corner position.

Cor. is located on the east half of 1200 East Street and about 130 ft. north of 930 North Street, Provo, Utah.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by
Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 17' E., bet. secs. 35 and 36.

Over broken mountainous land, through oak and maple.

19.70 Point for the S 1/16 sec. cor. of secs. 35 and 36.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E
S 1/16

S 35	S 36
------	------

1979

Cor. is located on steep N slope in low scrub oak.

39.40 Point for the ¼ sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
78.80	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 35 S 36 </p> <p style="text-align: center;">1979</p> <p>Cor. is located on steep W slope in oak brush, 1.40 chs. E of trail road, bears NE and SW.</p> <p>The cor. of secs. 25, 26, 35, and 36, monumented with a limestone, 15 x 6 x 4 ins., firmly set in a mound of stone, plainly mkd. 1 notch on S edge. No other marks identified.</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> S 26 S 25 S 35 S 36 </p> <p style="text-align: center;">1979</p> <p>Deposit the mkd. stone alongside the aluminum post and raise a mound of stone, 3 ft. base, 1½ ft. high, E of cor.</p> <p>Cor. is located on steep SE slope in clearing of oak and maple.</p>
39.38	<p>From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp., heretofore described.</p> <p>S. 89° 30' W., bet. secs. 25 and 36.</p> <p>Over mountainous land, through oak, maple and fir timber.</p> <p>Point for the ¼ sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S 25}{S 36}$ </p> <p style="text-align: center;">1979</p> <p>Raise a mound of stone, 3½ ft. base, 2 ft. high, N of cor.</p> <p>Cor. is located on rolling NW slope in low scrub oak.</p>
78.76	<p>The cor. of secs. 25, 26, 35, and 36.</p> <p>N. 0° 11' W., bet. secs. 25 and 26.</p> <p>Over mountainous land, through oak, maple and scattered aspen.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

- 39.52 The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a limestone, 24 x 12 x 9 ins., firmly set 10 ins. in the ground, plainly mkd. $\frac{1}{4}$ on W face.
- At the corner point
- Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top of aluminum cap, mkd.
- T 7 S R 3 E
- $\frac{1}{4}$
 |
 S 26 | S 25
 |
- 1979
- Deposit the mkd. stone alongside the aluminum post.
- From this corner, U.S.C. & G.S. triangulation station "Heaven" at Latitude $40^{\circ} 10' 10.506''$ N. and Longitude $111^{\circ} 32' 17.12''$ W., bears S. $55^{\circ} 25' E.$, 110.30 chs. dist.
- The cor. is located on spur projecting SE; in dense oak and maple.
- _____
- N. $1^{\circ} 17' W.$, beginning new measurement.
- Over mountainous land, through dense oak and maple.
- 38.00 Improved graveled road, bears NE and SW.
- 39.44 Point for the cor. of secs. 23, 24, 25, and 26, at proportionate distance; there is no remaining evidence of the original corner.
- Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.
- T 7 S R 3 E
- S 23 | S 24
 S 26 | S 25
- 1979
- Cor. is located on N edge of cut for road.
-
- From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., heretofore described.
- S. $89^{\circ} 31' W.$, bet. secs. 24 and 25.
- Over mountainous land, through fir, oak, maple, and dense undergrowth.
- 6.50 Improved graveled road, bears NW and SE.
- 22.20 Improved graveled road, bears NNE and SSW.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
39.99	<p>Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S\ 24}{S\ 25}$</p> <p style="text-align: center;">1979</p> <p>Set an oak post, 6 ft. long, alongside the aluminum post. Cor. is located on S slope in dense oak brush.</p>	
47.50	Improved graveled road, bears N and S.	
77.50	Improved graveled road, bears NE and SW.	
79.98	The cor. of secs. 23, 24, 25, and 26.	
40.00	<p>N. 9° 38' W., bet. secs. 23 and 24.</p> <p>Over mountainous land, through oak, maple and scattered aspen growth.</p> <p>The ¼ sec. cor. of secs. 23 and 24, monumented with a limestone, 36 x 19 x 6 ins., firmly set 24 ins. in the ground, and plainly mkd. ¼ on W face.</p> <p>At the corner point</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ S 23 S 24</p> <p style="text-align: center;">1979</p> <p>Deposit the mkd. stone alongside the aluminum post. Cor. is located on E slope in scattered aspen trees.</p> <p style="text-align: center;">—————</p> <p>N. 4° 08' E., beginning new measurement.</p> <p>Over mountainous land, through maple, oak and scattered aspen.</p>	
2.50	Spur, slopes SE.	
41.06	<p>The cor. of secs. 13, 14, 23, and 24, monumented with a mound of stone with an old survey stake in the center and is accepted as the best available evidence of the original corner.</p> <p>At the corner point</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">S 14 S 13 S 23 S 24</p> <p style="text-align: center;">1979</p> <p>Cor. is located on steep SE slope in chokecherry underbrush.</p>
	<p style="text-align: center;">(Reestablishment of the Survey Executed by C.L. Craig, Deputy Surveyor in 1856, and the Resurvey Executed by A.D. Ferron, Deputy Surveyor in 1881 and the Retracement Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>
	<p>From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., heretofore described.</p> <p>N. 0° 28' W., bet. secs. 34 and 35.</p> <p>Over nearly level farm land.</p>
19.97	<p>Point for the S 1/16 sec. cor. of secs. 34 and 35.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E S 1/16</p> <p style="text-align: center;">S 34 S 35</p> <p style="text-align: center;">1979</p> <p>Cor. is located 2 lks. E of barbwire fence line, bears N and S.</p>
39.94	<p>The ¼ sec. cor. of secs. 34 and 35, monumented with an iron pipe, 2½ ins. diam., firmly set in concrete extending 5 ins. out of the ground, with Utah County brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E ¼ Cor</p> <p style="text-align: center;">S 34 S 35</p> <p style="text-align: center;">1961</p> <p>This position has been recognized as the cor. by local surveyors and adjacent landowners and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located in patch of oakbrush at cor. of old fences extending E, W and S.</p> <p style="text-align: center;">(Reestablishment of the Survey Executed by A.D. Ferron, Deputy Surveyor in 1881, and the Retracement Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>N. 1° 53' E., beginning new measurement.</p>	
	<p>Asc. over mountainous land.</p>	
8.45	<p>Point for angle point 1, parcel GR 96 at record dist., hereinafter described.</p>	
20.04	<p>Point for the N 1/16 sec. cor. of secs. 34 and 35.</p>	
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to top of aluminum cap, mkd.</p>	
	<p style="text-align: center;">T 7 S R 3 E N 1/16</p>	
	<p style="text-align: center;">S 34 S 35</p>	
	<p style="text-align: center;">1979</p>	
	<p>Cor. is located above ledges on SW slope.</p>	
40.08	<p>Point for the cor. of secs. 26, 27, 34, and 35, at proportionate distance; there is no remaining evidence of the original corner.</p>	
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	
	<p style="text-align: center;">T 7 S R 3 E</p>	
	<p style="text-align: center;">S 27 S 26 S 34 S 35</p>	
	<p style="text-align: center;">1979</p>	
	<p>Cor. is located in a patch of oak brush on steep S slope.</p>	
<p>(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)</p>		
	<p>From the cor. of secs. 25, 26, 35, and 36.</p>	
	<p>S. 89° 57' W., bet. secs. 26 and 35.</p>	
	<p>Over mountainous land, through oak and maple timber.</p>	
39.13	<p>The ¼ sec. cor. of secs. 26 and 35, monumented with a granite stone, 24 x 12 x 8 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on N face.</p>	
	<p>At the corner point</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	
	<p style="text-align: center;">T 7 S R 3 E</p>	
	<p style="text-align: center;">¼, $\frac{S\ 26}{S\ 35}$</p>	
	<p style="text-align: center;">1979</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
20.24	<p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on S slope in scattered oak brush.</p> <p style="text-align: center;">_____</p> <p>N. 88° 29' W., beginning new measurement.</p> <p>Point for the W 1/16 sec. cor. of secs. 26 and 35.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">W 1/16 S 26 S 35</p> <p style="text-align: center;">1979</p> <p>Cor. is located in clearing on brushy steep S slope.</p>	
40.48	<p>The cor. of secs. 26, 27, 34, and 35.</p> <hr/> <p>N. 1° 16' W., bet. secs. 26 and 27.</p> <p>Over mountainous land, through oak and maple.</p> <p>Point for the ¼ sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> ¼ S 27 S 26 </p> <p style="text-align: center;">1979</p> <p>Cor. is located on W slope in dense oak and maple.</p>	
80.16	<p>Point for the cor. of secs. 22, 23, 26, and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">S 22 S 23 S 27 S 26</p> <p style="text-align: center;">1979</p> <p>Cor. is located on steep NW slope in oak brush.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
29.80	<p>From the cor. of secs. 23, 24, 25, and 26. N. 88° 24' W., bet. secs. 23 and 26. Over mountainous land, through oak and maple.</p>
40.16	<p>Improved gravel road, bears N and S. Point for the ¼ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original corner. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
80.32	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S\ 23}{S\ 26}$</p> <p style="text-align: center;">1979</p> <p>Cor. is located on W slope in dense oak and maple. The cor. of secs. 22, 23, 26, and 27.</p>
40.10	<p>N. 2° 15' W., bet. secs. 22 and 23. Over broken mountainous land, through dense oak and maple. Point for the ¼ sec. cor. of secs. 22 and 23, at proportionate distance; there is no remaining evidence of the original corner. Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3½ ft. base to top of aluminum cap, mkd.</p>
80.20	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ S 22 S 23</p> <p style="text-align: center;">1979</p> <p>Cor. is located on E slope in scattered oak and maple. Point for the cor. of secs. 14, 15, 22, and 23, at proportionate distance; there is no evidence of the original corner. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">S 15 S 14 S 22 S 23</p> <p style="text-align: center;">1979</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Cor. is located at base of 4 in. white pine on steep SE slope in heavy undergrowth.</p>
<p>34.50</p> <p>39.85</p>	<p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. 88° 34' W., bet. secs. 14 and 23.</p> <p>Over mountainous land, through oak and maple.</p> <p>Improved dirt road, bears N and S.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
<p>79.70</p>	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S. 14}{S. 23}$</p> <p style="text-align: center;">1979</p> <p>Cor. is located on W slope in aspen grove, 3.00 chs. E. of meadows.</p> <p>The cor. of secs. 14, 15, 22, and 23.</p>
<p>40.08</p>	<p>N. 1° 05' W., bet. secs. 14 and 15.</p> <p>Over broken mountain land, through oak, maple, and scattered pine.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
<p>80.16</p>	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 15 S 14</p> <p style="text-align: center;">1979</p> <p>Cor. is located 1.50 chs. W of terrace area in choke-cherry and aspen growth.</p> <p>Point for the cor. of secs. 10, 11, 14, and 15, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

T 7 S R 3 E

S 10	S 11
S 15	S 14

1979

from which

An aspen, 5 ins. diam., bears N. 65° E., 33 lks.
dist., mkd. T7S R3E S11 BT.

An aspen, 6 ins. diam., bears S. 80° E., 18 lks.
dist., mkd. T7S R3E S14 BT.

An aspen, 8 ins. diam., bears S. 45° W., 14 lks.
dist., mkd. T7S R3E S15 BT.

Cor. is located on NE slope on N edge of aspen growth.

From the cor. of secs. 11, 12, 13, and 14, monumented
with a quartzite stone, 30 x 20 x 10 ins., in mound of
stone, mkd. 4 notches on S edge, no other marks could be
identified.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 7 S R 3 E

S 11	S 12
S 14	S 13

1979

from which

A fir, 30 ins. diam., bears N. 45° W., 23 lks.
dist., mkd. S11 BT.

Deposit the mkd. stone alongside the iron post.

Cor. is located on spur, slopes NE and 20 lks. E
of edge of steep narrow ravine, draining N.

S. 88° 35' W., bet. secs. 11 and 14.

Over broken mountainous land through oak, maple, aspen
and scattered fir.

33.00 Improved dirt road, bears N and S.

40.07 Point for the ¼ sec. cor. of secs. 11 and 14, at propor-
tionate distance; there is no remaining evidence of the
original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
80.14	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 11}{S 14}$</p> <p style="text-align: center;">1979</p> <p>Cor. is located on W slope in dense undergrowth and scattered aspen growth.</p> <p>The cor. of secs. 10, 11, 14, and 15.</p>	
40.07	<p>N. 0° 40' E., bet. secs. 10 and 11.</p> <p>Over mountainous land, through pine, aspen, oak and maple.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate distance; there is no evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	
80.14	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 10 S 11</p> <p style="text-align: center;">1979</p> <p>Cor. is located on NE slope in dense aspen growth.</p> <p>The cor. of secs. 2, 3, 10, and 11, monumented with an iron pipe, 2½ ins. diam., firmly set in a mound of stone, with Utah County brass cap mkd.</p>	
25.00	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">$\frac{S 3}{S 10}$ $\frac{S 2}{S 11}$</p> <p style="text-align: center;">LS 2532 1969</p> <p>This position has long been recognized as the cor. by local and Utah County surveyors and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located on NW slope in dense maple, oak and chokecherry undergrowth.</p>	
41.61	<p>N. 0° 40' W., bet. secs. 2 and 3.</p> <p>Over mountainous land, through maple, oak, pine, and dense undergrowth.</p> <p>Bottom of Slate Canyon, drains SW.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, at proportionate distance; there is no remaining evidence of the original corner.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 3 S 2 </p> <p style="text-align: center;">1979</p> <p>Raise a mound of stone, 3½ ft. base, 2 ft. high, W of cor. Cor. is located on steep S slope in scattered oak and mahogany.</p> <p>Over mountainous land, through oak, maple, aspen, and pine.</p>	
62.415	<p>Point for the N 1/16 sec. cor. of secs. 2 and 3.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E N 1/16</p> <p style="text-align: center;">S 3 S 2</p> <p style="text-align: center;">1979</p> <p>from which</p> <p style="padding-left: 40px;">An aspen, 8 ins. diam., bears N. 25° E., 39 lks. dist., mkd. N 1/16 S2 BT.</p> <p style="padding-left: 40px;">An aspen, 6 ins. diam., bears N. 30° W., 27 lks. dist., mkd. N 1/16 S3 BT.</p> <p>Cor. is located on E slope in aspen grove.</p>	
83.69	<p>The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., heretofore described.</p>	
20.39	<p style="text-align: center;">(Reestablishment of the Survey Executed by A.D. Ferron, Deputy Surveyor in 1881)</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>N. 89° 08' W., bet. secs. 27 and 34.</p> <p>Over mountainous land, through oak and maple.</p> <p>Point for the E 1/16 sec. cor. of secs. 27 and 34.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to brass cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">E 1/16 $\frac{S 27}{S 34}$</p> <p style="text-align: center;">1979</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Cor. is located on S slope in oak brush.

40.78

The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, monumented with an iron pipe, $2\frac{1}{2}$ ins. diam., firmly set in concrete extending 5 ins. out of the ground, with Utah County brass cap mkd.

T 7 S R 3 E

$$\begin{array}{r} S 27 \frac{1}{4} \\ S 34 \end{array}$$

1962

This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.

Set a steel fence post, 6 ft. high, alongside the cor.

Cor. is located on spur, slopes SW.

(Reestablishment of the Survey Executed by C.L. Craig, Deputy Surveyor in 1856, and the Resurvey Executed by A.D. Ferron, Deputy Surveyor in 1881)

S. $89^{\circ} 30'$ W., beginning new measurement.

20.39

Point for the W $\frac{1}{16}$ sec. cor. of secs. 27 and 34.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. below the ground, in a driveway, with brass cap mkd.

T 7 S R 3 E

$$W \frac{1}{16} \begin{array}{r} S 27 \\ S 34 \end{array}$$

1979

from which

SW cor. of brick home, bears N. $35^{\circ} 19'$ E., 48 lks. dist.

A metal light pole, bears S. $10^{\circ} 08'$ W., $37\frac{1}{2}$ lks. dist.

Metal base of mail box, bears N. $61^{\circ} 42'$ W., $58\frac{1}{2}$ lks. dist.

40.78

The cor. of secs. 27, 28, 33, and 34, monumented with an iron pipe, $2\frac{1}{2}$ ins. diam., firmly set in concrete, extending $1\frac{1}{2}$ ins. out of the ground, with Utah County brass cap mkd.

T 7 S R 3 E

$$\begin{array}{r|l} S 28 & S 27 \\ S 33 & S 34 \end{array}$$

1955

This position has long been recognized as the cor. and is accepted as the best available evidence of the original cor. position.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Cor. is located in pasture in 4 strand barbwire fence line, bears N and S.

(Reestablishment of th Survey Executed by C.L. Craig, Deputy Surveyor in 1856 and the Resurvey Execued by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)

N. 0° 38' W., bet. secs. 27 and 28.

Over nearly level bench land, through pasture, along E. side of fence line.

19.60 Four strand barbwire fence line, bears E and W; 4½ lks. to fence cor., from which fence bears N, S, and W; continue along E side of fence line.

20.19 Point for the S 1/16 sec. cor. of secs. 27 and 28.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

T 7 S R 3 E
S 1/16

S 28 | S 27

1979

Cor. is located on spur sloping SE, 4½ lks. E of N and S fence line.

40.38 The ¼ sec. cor. of secs. 27 and 28, monumented with an iron pipe, 1 in. diam., firmly set in concrete, extending 12 ins. out of ground, with Utah County brass cap mkd.

¼

S 28 | S 27

This cor. is recorded in the Utah County Courthouse and has long been recognized as the cor. and is accepted as the best available evidence of the original cor. position.

Cor. is located on bench in N and S four strand barbwire fence line.

(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors in 1895)

N. 0° 13' W., beginning new measurement.

Over mountainous land, through oak and maple.

9.13 Point for angle point No. 4, parcel No. 85, hereinafter described.

20.13 Point for the N 1/16 sec. cor. of secs. 27 and 28. This cor. will also function as angle point No. 3, parcel 85.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 7 S R 3 E N 1/16</p> <p style="text-align: center;">S 28 S 27 AP-3 PL85</p> <p style="text-align: center;">1979</p> <p>Cor. is located on a steep SW slope in oak brush.</p> <p>39.46 Point for the closing cor. of secs. 22 and 27, hereinafter described.</p> <p>40.26 Point for the cor. of secs. 21 and 28 only, determined at 40.00 chs. of easting from the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, and at proportionate distance latitudinally; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., over cross (X), on solid rock, in a mound of stone, 5 ft. base to aluminum cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">S 21 S 22 S 28 </p> <p style="text-align: center;">1979</p> <p>Cor. is located on steep W slope at base of ledge 8 ft. high, bearing N and S.</p>	
	<p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>S. $89^{\circ} 59'$ W., bet. secs. 22 and 27.</p> <p>Over broken mountainous land, through oak brush.</p> <p>40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, at proportionate distance; falls on perpendicular ledges and cannot be perpetuated. There is no remaining evidence of the original corner.</p> <p>Point selected for the witness $\frac{1}{4}$ sec. cor. bears N. $32^{\circ} 00'$ E., 47 lks. dist., monumented with an aluminum post, 28 ins. long, $2\frac{1}{2}$ ins. diam., set 10 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">W C T 7 S R 3 E</p> <p style="text-align: center;">$\swarrow \frac{1}{4}$ S 22 S 27</p> <p style="text-align: center;">1979</p> <p>Witness corner is located on N side of 4 x 6 ft. high boulder and at base of 200 ft. high ledges, bearing NE and SW.</p> <p>80.32 Point for the closing cor. of secs. 22 and 27, at proportionate distance; and on the E. bdy. of sec. 28; there is no remaining evidence of the original corner.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Set an aluminum post, 28 ins. long, 2½ ins. diam., over a cross (X) on solid rock, in a mound of stone, 6 ft. base to aluminum cap, mkd.

T 7 S R 3 E

S 28		S 22	C
		S 27	C

1979

From this cor., the cor. of secs. 21 and 28, bears N. 0° 13' W., 80 lks. dist.

Cor. is located on rocky W slope in scattered oak brush.

From the cor. of secs. 21 and 28.

N. 1° 46' W., along the E. bdy. of sec. 21.

Over broken mountainous land, through oak brush.

39.68 Point for the W ¼ sec. cor. of sec. 22 only, at proportionate distance and on the E. bdy. of sec. 21; falls on inaccessible ledges and not monumented.

39.75 Top of ledge, bears E and W.

40.08 Point for the E ¼ sec. cor. of sec. 21 only, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., over a cross (X) on solid rock, in a mound of stone, 4 ft. base to top of brass cap, mkd.

T 7 S R 3 E

¼	
S 21	

1979

from which

An (X) BQ 4 ft. above ground, on NW face of limestone ledge, 7½ ft. high, bears S. 80° E., 3 lks. dist.

Cor. is located on NW slope in ledges.

80.16 Point for the cor. of secs. 15, 16, 21, and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

T 7 S R 3 E

S 16		S 15
S 21		S 22

1979

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah


CHAINS	
	Cor. is located on NW slope in scattered pine.
	From the cor. of secs. 14, 15, 22, and 23.
	N. 89° 27' W., bet. secs. 15 and 22.
	Over broken mountainous land, through oak, maple, pines, and mahogany growth.
28.00	Ridge, bears N. 20° E. and S. 20° W.; desc. broken W slope.
39.84	Point for the ¼ sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original corner.
	Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S\ 15}{S\ 22}$</p> <p style="text-align: center;">1979</p>
79.68	Cor. is located in draw, draining SW, in patches of oak. The cor. of secs. 15, 16, 21, and 22.
	N. 1° 22' W., bet. secs. 15 and 16.
	Over mountainous land, through oak, maple and scattered pine.
40.08	Point for the ¼ sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original corner.
	Set an aluminum post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ S 16 S 15</p> <p style="text-align: center;">1979</p>
80.16	Cor. is located 1.50 chs. N of spur, sloping W and on the S edge of a patch of pines.
	The cor. of secs. 9, 10, 15, and 16, monumented with a quartzite stone, 18 x 12 x 4 ins., firmly set 10 ins. in the ground and plainly mkd. 3 notches on E edge and 4 notches on S edge.
	At the corner point.

127

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS					
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 9</td> <td style="padding: 0 5px;">S 10</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 16</td> <td style="padding: 0 5px;">S 15</td> </tr> </table> <p style="text-align: center;">1979</p> <p>Deposit the mkd. stone alongside the aluminum post.</p> <p>Cor. is located on steep S slope in oak brush.</p>	S 9	S 10	S 16	S 15
S 9	S 10				
S 16	S 15				
40.04	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>N. 89° 28' W., bet. secs. 10 and 15.</p> <p>Over broken mountainous land, through aspen, pine, oak, and dense undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼ S 10</td> <td style="padding: 0 5px;">S 15</td> </tr> </table> <p style="text-align: center;">1979</p> <p>from which</p> <p style="padding-left: 40px;">A balsam pine, 16 ins. diam.; bears N. 50° E., 6 lks. dist., mkd. ¼ S10 BT.</p> <p>Cor. is located on small spur, slopes steeply NNE on pine covered N slope.</p> <p>80.08 The cor. of secs. 9, 10, 15, and 16.</p>	¼ S 10	S 15		
¼ S 10	S 15				
40.53	<p>N. 0° 25' E., bet. secs. 9 and 10.</p> <p>Over broken mountain land, through oak, pine and dense undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a railroad spike, 6 ins. long, mkd. with a cross (X) on top, 6 ins. below surface of bulldozed road, bearing E and W</p>				

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS														
	<p>from which</p> <p>An aluminum post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground and in a collar of stone, for a reference monument, bears S. 45° E., 50 lks. dist., with aluminum cap mkd. RM T7S R3E ¼ S10 33 FT 1979 and an arrow pointing to the true point.</p> <p>An aluminum post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground and in a collar of stone, for a reference monument, bears S. 45° W., 50 lks. dist., with aluminum cap mkd. RM T7S R3E ¼ S9, 33 FT 1979 and an arrow pointing to the true point.</p> <p>From this same cor., Cor. No. 2, Mineral Survey No. 3 Lot 39 of the Mattie Consolidated Placer, bears N. 78° 25' W., 8.956 chs. dist., monumented with a mound of stone, from which the original bearing tree</p> <p>A mahogany, 6 ins. diam., with illegible scribing bears S. 49° W., 29.6 lks. dist.</p> <p>At the corner point</p> <p>Set a Bathey, 24 ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of cap mkd.</p> <div style="text-align: center;">  </div> <p>Cor. is located near bottom of Slate Canyon on N slope in chokecheery undergrowth.</p> <p>Over broken mountainous land, through oak, maple, pine, and dense undergrowth.</p>													
42.00	Bottom of Slate Canyon, drains W.													
81.06	<p>Point for the cor. of secs. 3, 4, 9, and 10, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="4">T 7 S R 3 E</td> </tr> <tr> <td>S 4</td> <td> </td> <td>S 3</td> <td></td> </tr> <tr> <td>S 9</td> <td> </td> <td>S 10</td> <td></td> </tr> </table> <p>1979</p> </div> <p>from which</p> <p>A pine, 15 ins. diam., bears S. 80° W., 12 lks. dist., mkd. T7S R3E S9 BT.</p> <p>Cor. is located on SW slope in pines.</p>	T 7 S R 3 E				S 4		S 3		S 9		S 10		
T 7 S R 3 E														
S 4		S 3												
S 9		S 10												
	<p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>West, bet. secs. 3 and 10.</p>													

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	Over broken mountainous land, through dense oak, maple and undergrowth.	
17.00	Bottom of Slate Canyon, drains SW.	
20.02	The E 1/16 sec. cor. of secs. 3 and 10, monumented with an iron pipe, 2½ ins. diam., firmly set and extending 8 ins. out of the ground, and is accepted as a careful and faithful determination of the position of the corner, with Utah County brass cap mkd.	
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">1/16 $\frac{S 3}{S 10}$</p> <p style="text-align: center;">LG 2532 1967</p>	
	Cor. is located near bottom of Slate Canyon, on SE slope in dense oak and maple.	
40.16	The ¼ sec. cor. of secs. 3 and 10, monumented with an iron pipe, 2½ ins. diam., firmly set in a mound of stone, with Utah County brass cap mkd.	
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ Cor. $\frac{S 3}{S 10}$</p> <p style="text-align: center;">LS 2532 1969</p>	
	This position has long been recognized as the cor. and is accepted as the best available evidence of the original cor. position.	
	Cor. is located on SE slope in oak brush and scattered pine growth.	
	N. 87° 43' W., beginning new measurement.	
	Over broken mountainous land, through oak, maple and pine.	
40.26	The cor. of secs. 3, 4, 9, and 10.	
	N. 0° 48' W., bet. secs. 3 and 4.	
	Over broken mountainous land, through pine, aspen, maple, oak and dense underbrush.	
40.54	Point for the ¼ sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original corner.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 4 S 3 1979 </p> <p>from which</p> <p>A pine, 18 ins. diam., bears N. 68° E., 42 lks. dist., mkd. $\frac{1}{4}$ S3 BT.</p> <p>A pine, 20 ins. diam., bears S. 69° W., 68 lks. dist., mkd. $\frac{1}{4}$ S4 BT.</p> <p>Cor. is located on NW slope in pines and oak, 1.00 ch. W. of ridge, bearing NNW and SSE.</p>	
60.81	<p>Point for the N 1/16 sec. cor. of secs. 3 and 4.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 2 ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E N 1/16</p> <p style="text-align: center;">S 4 S 3</p> <p style="text-align: center;">1979</p> <p>from which</p> <p>A pine, 24 ins. diam., bears S. 78½° E., 46 lks. dist., mkd. N 1/16 S3 BT.</p> <p>A pine, 20 ins. diam., bears S. 40° W., 8 lks. dist., mkd. N 1/16 S4 BT.</p> <p>Cor. is located on N slope in pine and aspen growth.</p>	
81.28	<p>The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 21 and 28 only.</p> <p>N. 89° 59' W., bet. secs. 21 and 28.</p> <p>Over broken mountainous land, through oak brush.</p> <p>20.00 Point for the E 1/16 sec. cor. of secs. 21 and 28. This cor. also functions as angle point 1, parcel 85.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> E 1/16 $\frac{S 21}{S 28}$ AP-1 PL-85 1979 </p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	Set a 2 x 12 in. board, 7 ft. high, alongside the iron post.	
	Cor. is located in old gravel pit.	
40.00	The 1/4 sec. cor. of secs. 21 and 28, monumented with an undated 1 in. iron pipe, extending 6 ins. out of the ground and in a collar of stone, with 3 in. diam. brass cap mkd.	
	T 7 S R 3 E	
	1/4 $\frac{S\ 21}{S\ 28}$	
	1979	
	Add 1979 to brass cap.	
	This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.	
	Cor. is located on rolling bench land.	
	(Reestablishment of the Survey Executed by C.L. Craig, Deputy Surveyor, in 1856)	
	S. 88° 47' W., beginning new measurement.	
	Over rolling bench land.	
13.90	U.S. Highway No. 89, bears NNW and SSE on curve.	
20.27	Point for the W 1/16 sec. cor. of secs. 21 and 28.	
	Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.	
	T 7 S R 3 E	
	W 1/16 $\frac{S\ 21}{S\ 28}$	
	1979	
	Set a steel fence post, 6 ft. long, alongside the cor.	
	Cor. is located on S side of graveled road, bearing NE and SW.	
40.54	The cor. of secs. 20, 21, 28, and 29, monumented with an iron pipe, 2 1/2 ins. diam., firmly set in concrete flush with the ground, with Utah County brass cap mkd.	
	T 7 S R 3 E	
	$\frac{S\ 20}{S\ 29} \mid \frac{S\ 21}{S\ 28}$	
	1967	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located in old Ironton Steel Mill slag dump.</p>	
	<p>N. 0° 48' W., bet. secs. 20 and 21.</p> <p>Through industrial area.</p>	
20.11	Point for the S 1/16 sec. cor. of secs. 20 and 21, falls in old Ironton Steel Mill slag dump and not monumented.	
40.22	<p>The 1/4 sec. cor. of secs. 20 and 21, monumented with a brass cap, 2 1/2 ins. diam., firmly set in concrete, flush with the ground, with Utah County brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">1/4 </p> <p style="text-align: center;">S 20 S 21</p> <p style="text-align: center;">1962</p>	
	<p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located on gentle W slope in grassy area.</p>	
	<p>N. 1° 36' W., beginning new measurement.</p> <p>Through industrial and residential area.</p>	
13.20	U.S. Highway No. 89, bears N. 34° 45' W. and S. 34° 45' E.	
19.86	Point for the N 1/16 sec. cor. of secs. 20 and 21, falls in Utah County equipment yard and cannot be perpetuated.	
23.00	Chain link fence, bears NE and SW.	
23.17	<p>Point selected for the witness N 1/16 sec. cor. of secs. 20 and 21.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">W C</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">N 1/16</p> <p style="text-align: center;">S 20 ↓ S 21</p> <p style="text-align: center;">1979</p>	
	Cor. is located on S edge of walnut grove.	
34.145	Intersect the easterly boundary of the Ironton Subdivision hereinafter described.	
39.72	Point for the closing cor. of secs. 16 and 21, hereinafter described.	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS										
40.32	<p>The cor. of secs. 17 and 20, monumented with an iron pipe, 2 ins. diam., firmly set and extending 5 ins. out of the ground, with the original limestone alongside the iron pipe, mkd. 2 notches on S edge and 4 notches on E edge, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 17</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1955</p> <p>I remarked the iron pipe to read as follows:</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 17</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 16</td> </tr> </table> <p style="text-align: center;">1955</p> <p>Cor. is located on small spur, sloping W.</p>	S 17	S 16	S 20	S 21	S 17	S 16	S 20	S 16	
S 17	S 16									
S 20	S 21									
S 17	S 16									
S 20	S 16									
	<p>(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors, in 1895)</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>S. 89° 15' W., bet. secs. 16 and 21.</p> <p>Over mountainous land, through pine, oak, maple, and dense underbrush.</p>									
39.85	<p>Point for the ¼ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., over a cross (X), on solid rock, in a mound of stone, 4½ ft. base to top of brass cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1979</p> <p>Cor. is located on a 10 x 8 ft. ledge, 100 ft. high, bearing N and S.</p>	¼	S 16		S 21					
¼	S 16									
	S 21									
59.775	<p>Point for the W 1/16 sec. cor. of secs. 16 and 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">W 1/16</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1979</p>	W 1/16	S 16		S 21					
W 1/16	S 16									
	S 21									

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor. and set an oak post, 4 ft. long, alongside the iron post.

Cor. is located on SW slope in oak brush.

79.70 Point for the closing cor. of secs. 16 and 21, at proportionate distance; and on the E. bdy. of sec. 20; there is no remaining evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 7 S R 3 E

S 20 | S 16 C
| S 21 C

1979

Raise a mound of stone, 3 ft. base, 1½ ft. high, E of cor.

From this cor., the cor. of secs. 17 and 20, bears N. 1° 36' W., 60 lks. dist., hereinbefore described.

Cor. is located on SW slope.

(Reestablishment of the Survey Executed
by E. Buettner in 1879)

From the cor. of secs. 17 and 20.

N. 1° 15' W., bet. secs. 16 and 17.

Over mountainous land, through oak brush.

40.35 The ¼ sec. cor. of secs. 16 and 17, monumented with an iron pipe, 2 ins. diam., firmly set and extending 15 ins. above ground, with brass cap not dated, mkd.

T 7 S R 3 E

¼
S 17 | S 16

This cor. will also function as angle point No. 8, parcel 52, and the markings on corner monument changed to read


T 7 S R 3 E

¼
PL-52 |
AP-8 |
S 17 | S 16


1979

This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS									
39.97	<p>Cor. is located on steep SW slope.</p> <hr/> <p>N. 1° 18' W., beginning new measurement.</p> <p>Over mountainous land, through oak brush.</p> <p>The cor. of secs. 8, 9, 16, and 17, monumented with a mound of stone with a wooden hub in center. No mkd. stone was found. This position is harmoniously related with existing original cors., and is accepted as the best available evidence of the original corner position. This cor. will also function as angle point No. 9, parcel No. 52.</p> <p>At the corner point (wooden hub)</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground over a cross (X) on solid rock, in a mound of stone, 3 ft. base to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E</p> <table border="1" style="margin: auto;"> <tr> <td>S 8</td> <td>S 9</td> </tr> <tr> <td>S 17</td> <td>S 16</td> </tr> <tr> <td>AP-9</td> <td></td> </tr> <tr> <td>PL-52</td> <td></td> </tr> </table> <p>1979</p> </div> <p>Cor. is located on W slope in scattered juniper and oak brush.</p>	S 8	S 9	S 17	S 16	AP-9		PL-52	
S 8	S 9								
S 17	S 16								
AP-9									
PL-52									
<p>(Reestablishment of the Survey Executed by Henry and Nicholas Fitzhugh, Deputy Surveyors, in 1895)</p>									
15.278	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>N. 89° 55' W., bet. secs. 9 and 16.</p> <p>Over mountainous land, through oak brush.</p> <p>Intersect line 2-3 of Mattie Consolidated Placer, Mineral Survey No. 3, Lot 39.</p> <p>from which</p> <p>Cor. No. 2, bears N. 9° 37' E., 42.843 chs. dist., hereinbefore described.</p> <p>Cor. No. 3, bears S. 9° 37' W., 0.88 chs. dist., determined record bearing and distance from Cor. No. 2. At this point set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.</p> <div style="text-align: center;">  </div> <p>Cor. is located on steep S slope in oak brush.</p>								

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
18.836	<p>Intersect line 3-4 of Mattie Consolidated Place, Mineral Survey No. 3, Lot 39.</p> <p>from which</p> <p>Cor. No. 3, bears S. 75° 39' E., 3.52 chs. dist., hereinbefore described.</p> <p>Cor. No. 4, bears N. 75° 39' W., 10.752 chs. dist., determined record bearing and distance from Cor. No. 2. At this point set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.</p> <div style="text-align: center;">  </div> <p>Cor. is located on steep SE slope in maple and oak brush.</p>
39.39	<p>The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, monumented with a limestone, 20 x 9 x 9 ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on N face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E</p> <p>$\frac{1}{4}$ $\frac{S 9}{S 16}$</p> <p>1979</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on S slope in small clearing in oak brush.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89° 39' W., beginning new measurement.</p>
20.07	<p>Point for the W 1/16 sec. cor. of secs. 9 and 16.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 7 S R 3 E</p> <p>W 1/16 $\frac{S 9}{S 16}$</p> <p>1979</p> </div> <p>Cor. is located on W slope in oak brush.</p>
40.14	<p>The cor. of secs. 8, 9, 16, and 17.</p> <hr style="width: 100%;"/> <p>N. 0° 24' W., bet. secs. 8 and 9.</p> <p>Over broken mountainous land, through oak brush.</p>
19.82	<p>Point for the S 1/16 sec. cor. of secs. 8 and 9.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., over a cross (X) on solid rock, in a mound of stone, 5½ ft. base to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 7 S R 3 E S 1/16 S 8 S 9 1979</p> <p>Cor. is located in ledges on steep W slope.</p>	
29.73	<p>Point for the N - S 1/64 sec. cor. of secs. 8 and 9.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">N S 1/64 S 8 S 9 1979</p> <p>Cor. is located on steep N slope in mountain mahogany growth.</p>	
38.50	<p>Bottom of Slate Canyon, drains NW.</p>	
39.64	<p>Point for the ¼ sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top of brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E ¼ S 8 S 9 1979</p> <p>Cor. is located on N bank of draw in oak and maple growth.</p>	
49.55	<p>Point for the S - N 1/64 sec. cor. of secs. 8 and 9.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S N 1/64 S 8 S 9 1979</p> <p>Cor. is located 1.50 chs. S of quartzite outcrop on SW slope in oak brush.</p>	
59.46	<p>Point for the N 1/16 sec. cor. of secs. 8 and 9.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Set an aluminum post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to aluminum cap, mkd.

T 7 S R 3 E
N 1/16

S 8 | S 9

1979

Cor. is located 10 ft. W of large rock slide on SW slope in oak brush.

79.28

Point for the cor. of secs. 4, 5, 8, and 9, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., over a cross (X) on solid rock, in a mound of stone, 4½ ft. base to top of aluminum cap, mkd.

T 7 S R 3 E

S 5 | S 4
S 8 | S 9

1979

Cor. is located on top of 8 ft. ledge, bearing N and S, on a general W slope in oak brush.

From the cor. of secs. 3, 4, 9, and 10.

S. 88° 37' W., bet. secs. 4 and 9.

Over broken mountainous land, through pine, oak and maple.

40.34

Point for the ¼ sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

T 7 S R 3 E

¼ S 4
S 9

1979

Cor. is located at base of cliffs on SW slope in oak brush.

59.71

Point selected for the witness cor. for the W 1/16 sec. cor. of secs. 4 and 9.

Set an iron post, 28 ins. long, 2½ ins. diam., over a cross (X), in a mound of stone, 4½ ft. base to top of brass cap, mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
60.51	<p style="text-align: center;">W C T 7 S R 3 E</p> <p style="text-align: center;">W 1/16 ← $\frac{S 4}{S 9}$</p> <p style="text-align: center;">1979</p> <p>Cor. is located on top of ledge, bearing NE and SW.</p> <p>True point for the W 1/16 sec. cor. of secs. 4 and 9, falls in inaccessible ledges and cannot be monumented.</p>
80.68	<p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/> <p>N. 2° 14' E., bet. secs. 4 and 5.</p> <p>Over broken mountainous land, through oak and maple growth.</p> <p>The ¼ sec. cor. of secs. 4 and 5, monumented with a limestone, 30 x 12 x 3 ins., extending 10 ins. above the ground and plainly mkd. ¼ on W face.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
21.16	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ S 5 S 4</p> <p style="text-align: center;">1979</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located on SW slope in clearing in oak brush.</p> <hr/> <p>N. 3° 31' W., beginning new measurement.</p> <p>Over broken mountainous land, through pine, oak and maple.</p> <p>Point for the N 1/16 sec. cor. of secs. 4 and 5.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T 7 S R 3 E N 1/16</p> <p style="text-align: center;">S 5 S 4</p> <p style="text-align: center;">1979</p> <p>from which</p> <p>A pine, 10 ins. diam., bears N. 50° E., 30 lks. dist., mkd. N 1/16 S4 BT.</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
21.50	<p>Cor. is located on steep N slope in dense oak and maple. Top of ledges, bears E and W; thence over broken ledges.</p>
42.85	<p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., hereinbefore described.</p>
<p>(Reestablishment of the Survey Executed by E. Buettner in 1879)</p>	
19.77	<p>From the cor. of secs. 8, 9, 16, and 17. West, bet. secs. 8 and 17. Over mountainous land, through scattered oak brush. Point for the E 1/16 sec. cor. of secs. 8 and 17. Set an aluminum post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
<p>T 7 S R 3 E E 1/16 $\frac{S 8}{S 17}$ 1979</p>	
32.83	<p>Cor. is located on steep W slope in a long patch of oak brush. Point for angle point No. 2, parcel No. PL-52, hereinafter described.</p>
39.54	<p>The ¼ sec. cor. of secs. 8 and 17, monumented with a brass cap, firmly set in concrete extending 18 ins. above ground, with Utah County brass cap mkd. $\frac{1}{4}$ $\frac{S 8}{S 17}$ 1951 This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position. Cor. is located on W slope of bench in gravel bed area.</p>
<p>(Reestablishment of the Survey Executed by A.J. Stewart Jr., Deputy Surveyor, in 1872)</p>	
<p>From the cor. of secs. 4, 5, 8, and 9. S. 89° 08' W., bet. secs. 5 and 8. Over mountainous land, through oak and maple.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
20.11	<p>Point for the E 1/16 sec. cor. of secs. 5 and 8.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">E 1/16 $\frac{S 5}{S 8}$</p> <p style="text-align: center;">1979</p> <p>Cor. is located on NW slope in oak brush.</p>
40.22	<p>The ¼ sec. cor. of secs. 5 and 8, monumented with an iron pipe, 2 ins. diam. firmly set in a mound of stone, with brass cap not dated, mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">¼ $\frac{S 5}{S 8}$</p> <p>Add the date 1979 to brass cap.</p> <p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located on steep W slope, 7 lks. N of old E - W fence line.</p>
<p>Subdivision of a Portion of Section 5, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
41.02	<p>From the ¼ sec. cor. of secs. 5 and 8.</p> <p>N. 0° 52' W., on the N and S center line of sec. 5.</p> <p>Point for the center ¼ sec. cor. of sec. 5, at intersection with the E and W center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;">C ¼ S 5</p> <p style="text-align: center;">1979</p>
61.82	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.</p> <p>Point for the center N 1/16 sec. cor. of sec. 5.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>

Subdivision of a Portion of Section 5,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
82.62	<div style="text-align: center;"> <p>C</p> <p>S 5 N 1/16</p> <p>C</p> <p>1979</p> </div> <p>Cor. is located on nearly level bench in clearing in oak brush.</p>	
21.20	<p>From the 1/4 sec. cor. of secs. 4 and 5.</p> <p>N. 88° 55' W., on the E - W center line of sec. 5.</p> <p>Point for the center E 1/16 sec. cor. of sec. 5.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	
42.40	<div style="text-align: center;"> <p>E 1/16</p> <p>C ——— S 5 ——— C</p> <p>1979</p> </div> <p>Cor. is located on steep SW slope in scattered oak and 40 lks. N of draw, draining W.</p>	
82.39	<p>The center 1/4 sec. cor. of sec. 5.</p> <p>The 1/4 sec. cor. of secs. 5 and 6, monumented with a regulation Utah County brass cap, firmly set in concrete, 20 ins. below ground in pasture, with brass cap mkd.</p>	
	<div style="text-align: center;"> <p>T 7 S R 3 E</p> <p>1/4</p> <p>S 6 S 5</p> <p>1970</p> </div> <p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p>	
20.99	<p>From the center E 1/16 sec. cor. of sec. 5.</p> <p>N. 2° 13' W., on the N and S center line of the NE 1/4 of sec. 5.</p> <p>Point for the NE 1/16 sec. cor. at intersection with the E - W center line of the NE 1/4, sec. 5.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	

Subdivision of a Portion of Section 5,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 7 S R 3 E</p> <p>NE 1/16</p> <p>S 5</p> <p>1979</p> <p>Cor. is located on W slope, 80 lks. S of draw, draining W, in dense oak and maple growth.</p>
42.23	The E 1/16 sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp., hereinbefore described.
	<p>From the N 1/16 sec. cor. of secs. 4 and 5.</p> <p>N. 89° 20' W., on the E and W center line of the NE 1/4 of sec. 5.</p>
20.70	The NE 1/16 sec. cor. of sec. 5.
41.40	The center N 1/16 sec. cor. of sec. 5.
	<p>Subdivision of a Portion of Section 8, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>
	<p>From the 1/4 sec. cor. of secs. 8 and 17.</p> <p>N. 0° 55' W., on the N and S center line of sec. 8.</p>
39.74	<p>Point for the center 1/4 sec. cor. of sec. 8, at intersection with the E and W center line.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<p>T 7 S R 3 E</p> <p>C 1/4 S 8</p> <p>1979</p>
59.22	<p>Set an 8 ft. oak post alongside the iron post.</p> <p>Point for the center N 1/16 sec. cor. of sec. 8.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
	<p>C</p> <p>S 8 N 1/16</p> <p>C</p> <p>1979</p>
78.70	<p>Set 6 ft. elm post alongside the aluminum post.</p> <p>Cor. is located in old gravel pit.</p> <p>The 1/4 sec. cor. of secs. 5 and 8.</p>

Subdivision of a Portion of Section 8,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah


CHAINS	
	From the $\frac{1}{4}$ sec. cor. of secs. 8 and 9.
	N. $89^{\circ} 51'$ W., on the E and W center line of sec. 8.
2.00	Bottom of Slate Canyon, drains NW.
19.94	Point for the center E $1/16$ sec. cor. of sec. 8.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">E $1/16$</p> <p style="text-align: center;">C ——— S 8 ——— C</p>
	1979
	Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N of cor.
	Cor. is located on N slope near bottom of Slate Canyon in oak brush.
21.10	Old rock dam, bears N and S.
39.88	The center $\frac{1}{4}$ sec. cor. of sec. 8.
79.88	The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a regulation Utah County brass cap, firmly set in concrete in patio, with brass cap mkd.
	<p style="text-align: center;">T 7 S R 3 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 7 S 8 </p>
	1969
	This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.
	Cor. is located in back yard of resident at 1218 E. and 640 S., Provo, Utah.
	From the center E $1/16$ sec. cor. of sec. 8.
	N. $0^{\circ} 39'$ W., on the N and S center line of the NE $\frac{1}{4}$ of sec. 8.
1.00	Bottom of Slate Canyon, drains SW.
9.78	Point selected for the witness cor. for the center south NE $1/64$ sec. cor. of sec. 8.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

Subdivision of a Portion of Section 8,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">W C S 8 C-S-NE 1/64 1979</p>	
9.82	<p>Cor. is located at base of limestone outcrop, 20 ft. high, on S slope.</p> <p>True point for the center south NE 1/64 sec. cor. of sec. 8, falls on face of limestone outcrop and cannot be perpetuated. Mark true point with a cross (X) chiseled in outcrop.</p>	
19.64	<p>Point for the NE 1/16 sec. cor. of sec. 8, at intersection with the E and W center line of the NE 1/4 of sec. 8.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	
39.29	<p style="text-align: center;">T 7 S R 3 E NE 1/16 S 8 1979</p> <p>Cor. is located on W slope in native grasses.</p> <p>The E 1/16 sec. cor. of secs. 5 and 8.</p>	
20.03	<p>From the N 1/16 sec. cor. of secs. 8 and 9.</p> <p>S. 89° 38' W., on the E and W center line of the NE 1/4 of sec. 8.</p> <p>The NE 1/16 sec. cor. of sec. 8.</p>	
40.06	<p>The center N 1/16 sec. cor. of sec. 8.</p>	
19.98	<p>From the S - N 1/64 sec. cor. of secs. 8 and 9.</p> <p>S. 89° 53' W., on the E and W center line of the SE 1/4 of the NE 1/4 of sec. 8.</p> <p>True point for the center S - NE 1/64 sec. cor. of sec. 8.</p>	
	<p style="text-align: center;">Subdivision of a Portion of Section 9, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
19.97	<p>From the 1/4 sec. cor. of secs. 9 and 16.</p> <p>N. 0° 15' W., on the N and S center line of sec. 9.</p> <p>Point for the center S 1/16 sec. cor. of sec. 9.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	

Subdivision of a Portion of Section 9,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS



1979

from which

A balsam pine, 6 ins. diam., bears N. 85° E.,
8½ lks. dist., mkd. S 1/16 BT.

Cor. is located on a steep N slope in dense underbrush.

39.94 Point for the center ¼ sec. cor. of sec. 9, at inter-
section with the E and W center line.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 5 ins.
in the ground to solid rock, in a mound of stone, 6 ft.
base to aluminum cap, mkd.

T 7 S R 3 E

C ¼ S 9

1979

from which


A juniper, 6 ins. diam., bears N. 10° E.,
18 lks. dist., mkd. C ¼ S9 BT.

53.00 Bottom of Slate Canyon, drains SW.

59.98 Point for the center N 1/16 sec. cor. of sec. 9.

Set an aluminum post, 28 ins. long, 2½ ins. diam., 10 ins.
in the ground to solid rock, in a mound of stone, 4½ ft.
base to top of aluminum cap, mkd.

C



C

1979

Cor. is located on steep SE slope in boulders and dense
oakbrush.

80.02 The ¼ sec. cor. of secs. 4 and 9.

From the ¼ sec. cor. of secs. 9 and 10.




S. 89° 14' W., on the E and W center line of sec. 9.

8.734 Intersection line 2-3 of Mattie Consolidated Placer,
Mineral Survey No. 3, Lot 39.

from which

Cor. No. 3, bears S. 9° 37' W., 41.853 chs. dist.,
hereinbefore described.

Subdivision of a Portion of Section 9,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>Cor. No. 2, bears N. 9° 37' E., 1.87 chs. dist., hereinbefore described. From this cor., Cor. No. 1, bears N. 52° 43' W., 18.75 chs. dist., determined record bearing and distance from Cor. No. 2. At this point set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.</p>	
	<div style="text-align: center;">  <p>1982</p> </div> <p>Cor. is located 15 lks. S of creek in bottom of Slate Canyon, which drains W, in oak and maple.</p>	
<p>24.974</p>	<p>Intersect line 1-4 of Mattie Consolidated Placer, Mineral Survey No. 3, Lot 39.</p> <p>from which</p> <p>Cor. No. 4, bears S. 6° 57' W., 37.78 chs. dist., hereinbefore described.</p> <p>Cor. No. 1, bears N. 6° 57' E., 13.518 chs. dist., hereinbefore described.</p>	
<p>39.86</p>	<p>The center ¼ sec. cor. of sec. 9.</p>	
<p>59.98</p>	<p>Point for the center W 1/16 sec. cor. of sec. 9.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>1979</p> </div>	
<p>70.04</p>	<p>Cor. is located on steep N slope in dense oak brush.</p> <p>Point for the center W - W 1/64 sec. cor. of sec. 9.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	
	<div style="text-align: center;">  <p>1979</p> </div>	
<p>77.00</p>	<p>Cor. is located on NW slope on top of pipeline, bears NE and SW; in dense oak brush.</p> <p>Bottom of Slate Canyon, drains SW.</p>	
<p>80.10</p>	<p>The ¼ sec. cor. of secs. 8 and 9.</p>	

Subdivision of a Portion of Section 9,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	From the W 1/16 sec. cor. of secs. 9 and 16.	
	N. 0° 19' W., on the N and S center line of the SW $\frac{1}{4}$ of sec. 9.	
19.90	Point for the SW 1/16 sec. cor. of secs. 9, at intersection with the E and W center line of the SW $\frac{1}{4}$.	
	Set an aluminum post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.	
	SW 1/16 S 9 1979	
	Cor. is located on steep N slope in pines and oak brush.	
29.85	Point for the center N - SW 1/64 sec. cor. of sec. 9.	
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.	
	S 9 C - N - SW	
	1/64 1979	
	Cor. is located on NW slope in scrub oak.	
39.80	The center W 1/16 sec. cor. of sec. 9.	
	From the center S 1/16 sec. cor. of sec. 9.	
	S. 89° 26' W., on the E and W center line of the SW $\frac{1}{4}$ of sec. 9.	
20.09	The SW 1/16 sec. cor. of sec. 9.	
30.14	Point for the center W - SW 1/64 sec. cor. of sec. 9.	
	Set an aluminum post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., over a cross (X) on solid rock, in a mound of stone, 5 ft. base to aluminum cap, mkd.	
	S 9 C - W - SW	
	1/64 1979	
	from which	
	An XBO on the N face of limestone ledge, 4 ft. high, bears S. 35° E., 32 lks. dist.	
	Cor. is located at base of ledge, bearing E and W, in oak brush.	
40.19	The S 1/16 sec. cor. of secs. 8 and 9.	

Subdivision of a Portion of Section 9,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
9.93	<p>From the center W - SW 1/64 sec. cor. of sec. 9.</p> <p>N. 0° 21' W., on the N and S center line of the NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 9.</p> <p>Point for the NW - SW 1/64 sec. cor. of sec. 9, at intersection with the E and W center line of NW$\frac{1}{4}$SW$\frac{1}{4}$, sec. 9.</p> <p>Set an aluminum post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">S 9 NW - SW 1/64 1979</p> <p>Cor. is located on steep N slope in dense oak brush.</p>	
19.86	<p>The center W - W 1/64 sec. cor. of sec. 9.</p> <hr/> <p>From the center N - SW 1/64 sec. cor. of sec. 9.</p> <p>S. 89° 20' W., on the E and W center line of the NW$\frac{1}{4}$ of the SW$\frac{1}{4}$ of sec. 9.</p>	
10.05	The NW - SW 1/64 sec. cor. of sec. 9.	
20.10	The N - S 1/64 sec. cor. of secs. 8 and 9.	
8.00	<p>From the center W 1/16 sec. cor. of sec. 9.</p> <p>N. 0° 19' W., on the N and S center line of the NW$\frac{1}{4}$ of sec. 9.</p> <p>Bottom of Slate Canyon, drains W.</p>	
9.97	<p>Point for the center S - NW 1/64 sec. cor. of sec. 9.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 9 C - S - NW 1/64 1979</p> <p>Cor. is located on S slope in oak brush and 1 ch. N of Slate Canyon, draining W.</p>	
19.94	<p>Point for the NW 1/16 sec. cor. of sec. 9, at intersection of the E and W center line of the NW$\frac{1}{4}$.</p> <p>Set an aluminum post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	

Subdivision of a Portion of Section 9,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
39.87	<p style="text-align: center;">NW 1/16 S 9 1979</p> <p>Cor. is located on steep S slope in rock slide.</p> <p>True point for the W 1/16 sec. cor. of secs. 4 and 9.</p>
20.14	<p>From the center N 1/16 sec. cor. of sec. 9.</p> <p>S. 88° 55' W., on the E and W center line of the NW¼ of sec. 9.</p> <p>The NW 1/16 sec. cor. of sec. 9.</p>
30.21	<p>Point for the center W - NW 1/64 sec. cor. of sec. 9.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">S 9 C - W - NW 1/64 1979</p> <p>Cor. is located on top of 50 ft. ledge on SW slope and at base of perpendicular ledges, bears irregularly NE and SW in oak brush.</p>
40.28	<p>The N 1/16 sec. cor. of secs. 8 and 9.</p>
7.00	<p>From the center W - W 1/64 sec. cor. of sec. 9.</p> <p>N. 0° 21' W., on the N and S center line of the SW¼ of the NW¼ of sec. 9.</p> <p>Bottom of Slate Canyon, drains SW.</p>
9.94	<p>Point for the SW - NW 1/64 sec. cor. of sec. 9, at the intersection of the E and W center line of the SW¼NW¼ of sec. 9.</p> <p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">S 9 SW - NW 1/64 1979</p> <p>Cor. is located on SW slope in oak brush.</p>
19.88	<p>The C - W - NW 1/64 sec. cor. of sec. 9.</p>

Subdivision of a Portion of Section 10,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
	<p style="text-align: center;">S 10</p> <p style="text-align: center;">C E 1/16 C</p> <p style="text-align: center;">1979</p> <p>from which</p> <p style="padding-left: 40px;">A balsam pine, 16 ins. diam., bears N. 60° W., 42 lks. dist., mkd. C - E 1/16 S 10.</p> <p>From this same cor., a Utah County iron pipe, 2 ins. diam., extending 10 ins. out of the ground, bears S. 45° 36' E., 81 lks. dist., with brass cap mkd. T7N R3E SE Cor of W½ of NE¼ S10 LS 2532 1969.</p> <p>Cor. is located on steep W slope in scattered pine.</p>	
40.10	The center ¼ sec. cor. of sec. 10.	
80.25	The ¼ sec. cor. of secs. 9 and 10.	
	<p>From the center E 1/16 sec. cor. of sec. 10.</p> <p>N. 0° 42' E., on the N and S center line of the NE¼ of sec. 10.</p> <p>Over mountainous land, through pine and oak.</p>	
36.00	Bottom of Slate Canyon, drains W.	
39.80	The E 1/16 sec. cor. of secs. 3 and 10.	
	<p>Subdivision of a Portion of Section 17, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
	<p>From the center ¼ sec. cor. of sec. 17, monumented with regulation Utah County brass cap, 3 ins. diam., firmly set flush with pavement in Utah County jail compound. Clyde Naylor, Utah County Surveyor, said this point is a remonumentation of a pipe set by Scot Stewart in 1923 for the center ¼ while subdividing the sec. for a subdivision for the City of Provo, Utah. Brass cap mkd.</p> <p style="text-align: center;">T 7 S</p> <p style="text-align: center;">C ¼ S 17</p> <p style="text-align: center;">1971</p> <p style="text-align: center;">R 3 E</p> <p>This position has long been recognized as the cor. and is accepted as the corner position.</p> <p>N. 0° 59' W., on the N and S center line of sec. 17.</p>	
40.32	The ¼ sec. cor. of secs. 8 and 17.	
	<p>From the ¼ sec. cor. of secs. 16 and 17.</p> <p>S. 89° 31' W., on the E and W center line of sec. 17.</p>	
18.21	Point for the angle point 7 of parcel 52, hereinafter described.	

Subdivision of a Portion of Section 17,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
19.89	<p>Point for the center E 1/16 sec. cor. of sec. 17.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E E 1/16 C ————— C S 17 1979</p> <p>Cor. is located on gently rolling bench land in native grasses.</p>
39.78	<p>The center ¼ sec. cor. of sec. 17.</p> <hr/> <p>From the center E 1/16 sec. cor. of sec. 17.</p> <p>N. 1° 08' W., on the N and S center line of the NE¼.</p>
4.925	<p>Intersect line 5 - 6, parcel No. 52, at a point S. 30° 41' E., 13.77 chs. distance from angle point 5, monumented with an iron post, 2½ ins. diam., hereinafter described, and at a point N. 30° 41' W., 1.68 chs. dist. from angle point 6, monumented with an iron post, 2½ ins. diam., hereinafter described.</p>
40.14	<p>The E 1/16 sec. cor. of secs. 8 and 17.</p>
<p>Subdivision of a Portion of Section 21, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>	
	<p>From the ¼ sec. cor. of secs. 21 and 28.</p> <p>N. 1° 41' W., on the N and S center line of sec. 21.</p> <p>Over bench land, through scattered oak brush.</p>
19.86	<p>Point for the center S 1/16 sec. cor. of sec. 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C S 21 S 1/16 C 1979</p> <p>Set a 6 ft. juniper post alongside the iron post.</p> <p>Cor. is located on a grassy SW slope.</p>
39.72	<p>Point for the center ¼ sec. cor. of sec. 21, at intersection with the E and W center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>



Subdivision of a Portion of Section 21,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
	<p style="text-align: center;">T 7 S R 3 E C ¼ S 21 1979</p>	
59.66	<p>Cor. is located on a W slope in scattered oak brush.</p> <p>Point for the center N 1/16 sec. cor. of sec. 21.</p>	
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	
	<p style="text-align: center;">C S 21 N 1/16 C 1979</p>	
79.60	<p>Cor. is located on a steep W slope in open area.</p> <p>The ¼ sec. cor. of secs. 16 and 21.</p>	
	<p>From the E ¼ sec. cor. of sec. 21.</p>	
39.92	<p>S. 89° 30' W., on the E and W center line of sec. 21.</p> <p>Over mountainous land, through oak brush.</p> <p>The center ¼ sec. cor. of sec. 21.</p>	
59.88	<p>Point for the center W 1/16 sec. cor. of sec. 21.</p>	
	<p>Set an aluminum post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	
	<p style="text-align: center;">W 1/16 C ————— C S 21 1979</p>	
71.60	<p>Cor. is located 10 lks. E of bulldozed road, bearing NE and SW.</p> <p>U.S. Highway 89, bears N. 34° 45' W. and S. 34° 45' E.</p>	
79.84	<p>The ¼ sec. cor. of secs. 20 and 21.</p>	
	<p>From the W 1/16 sec. cor. of secs. 21 and 28.</p>	
19.99	<p>N. 1° 04' W., on the N and S center line of the SW¼ of sec. 21.</p> <p>Over bottom land of industrial area.</p> <p>Point for the SW 1/16 sec. cor. of sec. 21, at intersection with the E and W center line of the SW¼.</p>	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	

Subdivision of a Portion of Section 21,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
<p>21.70</p> <p>39.98</p>	<p style="text-align: center;">SW 1/16</p> <p style="text-align: center;">S 21</p> <p style="text-align: center;">1979</p> <p>Cor. is located on W side of Highway 89.</p> <p>U.S. Highway 89, bears NW and SE on curve.</p> <p>The center W 1/16 sec. cor. of sec. 21.</p>	
<p>19.20</p> <p>20.12</p> <p>40.24</p>	<p>From the center S 1/16 sec. cor. of sec. 21.</p> <p>S. 89° 09' W., on the E and W center line of the SW$\frac{1}{4}$ of sec. 21.</p> <p>Over rolling bench land, through native grasses and scattered oak brush.</p> <p>U.S. Highway 89, bears NW and SE on curve.</p> <p>The SW 1/16 sec. cor. of sec. 21.</p> <p>Point for the S 1/16 sec. cor. of secs. 20 and 21.</p>	
<p>19.91</p> <p>39.82</p>	<p>From the center W 1/16 sec. cor. of sec. 21.</p> <p>N. 1° 39' W., on the N and S center line of the NW$\frac{1}{4}$ of sec. 21.</p> <p>Over bench land, through scattered oak brush.</p> <p>Point for the NW 1/16 sec. cor. of sec. 21, at intersection of the E and W center line of the NW$\frac{1}{4}$ of sec. 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16</p> <p style="text-align: center;">S 21</p> <p style="text-align: center;">1979</p> <p>from which</p> <p style="padding-left: 40px;">A 2 in. drill bit, extending 4 ins. out of the ground (unknown origin) bears N. 29° 52' E., 58 lks. dist.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Set a steel fence post, 6 ft. high, alongside the iron post.</p> <p>Cor. is located 10 lks. S of trail road, bearing E and W.</p> <p>The W 1/16 sec. cor. of secs. 16 and 21.</p>	

Subdivision of a Portion of Section 21,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
<p>19.95</p> <p>33.285</p> <p>39.90</p>	<p>From the center N 1/16 sec. cor. of sec. 21.</p> <p>S. 89° 23' W., on the E and W center line of the NW 1/4 of sec. 21.</p> <p>Over mountainous land, through oak brush.</p> <p>The NW 1/16 sec. cor. of sec. 21.</p> <p>Intersect the easterly boundary of the Ironton Subdivision hereinafter described.</p> <p>True point for the N 1/16 sec. cor. of secs. 20 and 21.</p>
<p>Subdivision of a Portion of Section 27, T. 7 S., R. 3 E., Salt Lak Meridian, Utah</p>	
<p>19.87</p> <p>39.66</p>	<p>From the 1/4 sec. cor. of secs. 27 and 34.</p> <p>N. 0° 51' W., on the N and S center line of sec. 27.</p> <p>Over broken mountainous land, through oak brush.</p> <p>Point for the center S 1/16 sec. cor. of sec. 27.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., over a cross (X) on solid rock, in a mound of stone, 4 1/2 ft. base to top of brass cap, mkd.</p> <div style="text-align: center;">  </div> <p>Cor. is located at base of ledge, 2 ft. high, bearing NE and SW on broken SW slope.</p> <p>Point selected for the witness cor. for the center 1/4 sec. cor. of sec. 27.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground to bedrock, in a mound of stone, 4 1/2 ft. base to top of aluminum cap, mkd.</p> <div style="text-align: center;">  </div>
<p>39.74</p> <p>79.52</p>	<p>Cor. is located on SW slope at base of 40 ft. ledge, bears irregularly E and W.</p> <p>True point for the center 1/4 sec. cor. of sec. 27, at intersection with the E and W center line of sec. 27, falls on perpendicular ledges and cannot be monumented.</p> <p>True point for the 1/4 sec. cor. of secs. 22 and 27.</p>
<p>From the 1/4 sec. cor. of secs. 26 and 27.</p>	

Subdivision of a Portion of Section 27,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
40.48	<p>N. 89° 36' W., on the E and W center line of sec. 27. Over broken mountainous land, through pine and oak brush. True point for the center ¼ sec. cor. of sec. 27.</p>
60.79	<p>Point for the center W 1/16 sec. cor. of sec. 27. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<p>W 1/16 C ——— C S 27 1979</p>
81.10	<p>Cor. is located on rocky SW slope. The ¼ sec. cor. of secs. 27 and 28.</p>
20.03	<p>From the W 1/16 sec. cor. of secs. 27 and 34. N. 0° 44' W., on the N and S center line of SW¼ of sec. 27. Over SW slope, through residential area and oak brush. Point for the SW 1/16 sec. cor. of sec. 27, at intersection of E and W center line of SW¼. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>SW 1/16 S 27 1979</p>
40.06	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor. Set a 6 ft. steel fence post alongside the iron post. Cor. is located 13 lks. N of old E and W fence line, on W slope. The center W 1/16 sec. cor. of sec. 27.</p>
20.35	<p>From the center S 1/16 sec. cor. of sec. 27. S. 89° 57' W., on the E and W center line of the SW¼ of sec. 27. Over broken mountainous land, through scattered oak brush. The SW 1/16 sec. cor. of sec. 27.</p>
40.70	<p>The S 1/16 sec. cor. of secs. 27 and 28.</p>

Subdivision of a Portion of Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Subdivision of a Portion of Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

From the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, monumented with a regulation Utah County brass cap, set 2 ins. below surface of paved road, bearing E and W, with brass cap mkd.

T 7 S R 3 E

$\frac{1}{4}$ $\frac{S 28}{S 33}$

1960

This position has long been recognized as the cor., and is accepted as the best available evidence of the original corner position.

N. $0^{\circ} 14'$ W., on the N and S center line of sec. 28.

Over bench land, through residential area.

40.29 Net wire fence line, bears E and W.

40.33 Point for the center $\frac{1}{4}$ sec. cor. of sec. 28, at intersection with the E and W center line.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 7 S R 3 E

C $\frac{1}{4}$ S 28

1979

Cor. is located in pasture.

60.27 Four strand barbwire fence line, bears E and W.

60.66 Point for the center N $1/16$ sec. cor. of sec. 28. Point not monumented.

75.87 Chain link fence, bears E and W.

76.26 Point for angle point 7 of parcel 85 hereinafter described.

77.14 Chain link fence, bears SE and NW.

80.99 The $\frac{1}{4}$ sec. cor. of secs. 21 and 28.

From the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.

S. $89^{\circ} 29'$ W., on the E and W center line of sec. 28.

Over bench land.

20.00 Point for the center E $1/16$ sec. cor. of sec. 28, falls on a $\frac{1}{2}$ in. rebar in E and W four strand barbwire fence line.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Subdivision of a Portion of Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
	<p style="text-align: center;">E 1/16 C ——— S 28 C 1979</p> <p>Cor. is located on N bank of ditch, draining irregularly W.</p>
39.90	Four strand barbwire fence line, bears N and S.
40.00	The center 1/4 sec. cor. of sec. 28. Over gently rolling pasture land and residential area.
53.00	U.S. Highway 89, bears N and S.
80.40	The 1/4 sec. cor. of secs. 28 and 29, monumented with a Utah County brass cap, firmly set in concrete 12 ins. in the ground in pasture, with brass cap, mkd.
	<p style="text-align: center;">T 7 S R 3 E 1/4 Cor. S 29 S 28 1969</p> <p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p>
	<p>From the center E 1/16 sec. cor. of sec. 28. N. 0° 13' W., on the N and S center line of the NE 1/4 of sec. 28. Over brush land, through scattered cottonwood trees and oak brush.</p>
9.18	Intersect line 4-5 of parcel 85 at a point N. 89° 36' E., 4.31 chs. dist. from angle point No. 5.
20.25	Point for the NE 1/16 sec. cor. of sec. 28, at intersection with the E and W center line of the NE 1/4. This cor. also functions as angle point 2, parcel 85. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;"> NE 1/16 AP-2 S 28 PL 85 ——— 1979</p>
	<p>Set 6 ft. aluminum post alongside the iron post. Cor. is located on gentle SW slope in sagebrush.</p>
40.50	The E 1/16 sec. cor. of secs. 21 and 28, identical with angle point 1, parcel 85.

Subdivision of a Portion of Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
	<p>From the N 1/16 sec. cor. of secs. 27 and 28.</p> <p>S. 89° 44' W., on the E and W center line of the NE¼ of sec. 28.</p> <p>Over bench land, through scattered oak brush.</p>
20.01	The NE 1/16 sec. cor. of sec. 28, identical with angle point 2, parcel 85.
28.62	Intersect NE cor. of land conveyed to Nellie Drury, by deed dated September 6, 1899, recorded by Book 54, page 322. Utah County Courthouse, Provo, Utah; and at intersection with parcel 85 at a point S. 21° 24' E., 2.19 chs. dist., of angle point No. 6, hereinafter described.
40.02	The center N 1/16 sec. cor. of sec. 28.
	<p style="text-align: center;">Subdivision of a Portion of Section 34, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>
	<p>From the ¼ sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., monumented with a Utah County brass cap, firmly set in concrete 10 ins. in the ground in old race track, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E ¼ S 34 CORS 3 T 8 S R 3 E 1956</p> <p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p> <p>N. 0° 14' E., on the N and S center line of sec. 34.</p> <p>Over pasture and residential area in Springville, Utah.</p>
40.04	<p>Point for the center ¼ sec. cor. of sec. 34, at intersection with the E and W center line of sec. 34.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 7 S R 3 E C ¼ S 34 1979</p>
60.33	<p>Cor. is located in lawn on the N side of center street between the sidewalk and the curb, bearing E and W.</p> <p>Point for the center N 1/16 sec. cor. of sec. 34.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground in lawn, with brass cap mkd.</p>

161

Subdivision of a Portion of Section 34,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS

T 7 S R 3 E

C
|
N 1/16 | S 34
|
C
1979

from which

Corner of fence, bears S. $15^{\circ} 47'$ E., 34 lks. dist.,
with fences extending S and E.

NE cor. of brick home, bears N. $85^{\circ} 12'$ W.,
1.07 chs. dist.

- 60.99 Picket fence, 6 ft. high, bears E and W.
- 63.35 S. bank of small irrigation ditch, bears SE and drains
NW; leave residential area, thence over bench land.
- 80.62 The $\frac{1}{4}$ sec. cor. of secs. 27 and 34.

From the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

N. $89^{\circ} 53'$ W., on the E and W center line of sec. 34.

Over bench land, through scrub oak brush.

- 9.82 Point for angle point 3 of parcel GR 89, hereinafter
described.
- 19.82 Point for the center E 1/16 sec. cor. of sec. 34. This
cor. also functions as angle point 4, parcel GR 89.
- Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 7 S R 3 E

E 1/16 | GR-89
| AP-4
C ——— S 34 ——— C

1979

Cor. is located alongside the curb on the N side of center
street bearing E and W in Springville.

- 39.64 The center $\frac{1}{4}$ sec. cor. of sec. 34.
- 80.09 The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a
Utah County brass cap, firmly set in concrete flush with
the road.

T 7 S R 3 E

 $\frac{1}{4}$ Cor.

S 33 | S 34

1973

Subdivision of a Portion of Section 34,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
	<p>This position has long been recognized as the cor. and is accepted as the best available evidence of the original corner position.</p> <p>Cor. is located on N edge of center street in Springville, Utah.</p>
<p>15.00</p> <p>20.16</p>	<p>From the center E 1/16 sec. cor. of sec. 34.</p> <p>N. 1° 05' E., on the N and S center line of the NE$\frac{1}{4}$ of sec. 34.</p> <p>Through residential area.</p> <p>Point for angle point 1 of parcel GR 89, hereinafter described.</p> <p>Point for the NE 1/16 sec. cor. of sec. 34, at intersection of E and W center line of NE$\frac{1}{4}$.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">NE 1/16 S 34 1979</p> <p>Raise a mound of stone, 3 ft. base, 1$\frac{1}{2}$ ft. high, W of cor. Cor. is located on SW slope.</p>
<p>40.32</p> <p>20.11</p> <p>40.22</p>	<p>The E 1/16 sec. cor. of secs. 27 and 34.</p> <p>From the N 1/16 sec. cor. of secs. 34 and 35.</p> <p>N. 89° 28' W., on the E and W center line of the NE$\frac{1}{4}$ of sec. 34.</p> <p>Over mountainous land, through oak brush.</p> <p>The NE 1/16 sec. cor. of sec. 34.</p> <p>Through bench land and residential area.</p> <p>The center N 1/16 sec. cor. of sec. 34.</p>
	<p style="text-align: center;">Subdivision of a Portion of Section 35, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>
<p>19.93</p>	<p>From the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0° 32' E., on the N and S center line of sec. 35.</p> <p>Over mountainous land, through oak brush.</p> <p>Point for the center S 1/16 sec. cor. of sec. 35.</p> <p>Set an aluminum post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>

Subdivision of a Portion of Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
	<p style="text-align: center;">C S 35 S 1/16 C 1979</p>	
39.86	<p>Cor. is located on SE slope at the end of a trail road bears NE.</p> <p>Point for the center 1/4 sec. cor. of sec. 35, at intersection of the E and W center line.</p> <p>Set an aluminum post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>	
59.20	<p style="text-align: center;">T 7 S R 3 E C 1/4 S 35 1979</p> <p>Cor. is located on SW slope in clearing in oak brush.</p> <p>Spur, slopes SW.</p>	
59.45	<p>Point for the center N 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 1/2 ft. base, to top of brass cap, mkd.</p>	
79.04	<p style="text-align: center;">T 7 S R 3 E C S 35 N 1/16 C 1979</p> <p>Cor. is located on W slope.</p> <p>The 1/4 sec. cor. of secs. 26 and 35.</p>	
19.65	<p>From the 1/4 sec. cor. of secs. 35 and 36.</p> <p>N. 89° 45' W., on the E and W center line of sec. 35.</p> <p>Over mountainous land, through oak, maple and scattered mahogany.</p> <p>Point for the center E 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">E 1/16 C ——— S 35 ——— C 1979</p>	

Subdivision of a Portion of Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS	
	Cor. is located in a patch of oak brush, on steep SE slope.
39.30	The center $\frac{1}{4}$ sec. cor. of sec. 35. Over mountainous land, through scattered patches of oak.
60.02	Point for the center W $\frac{1}{16}$ sec. cor. of sec. 35. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.
	W $\frac{1}{16}$ C $\frac{\text{S } 35}{1979}$ C
	Cor. is located on steep SW slope in native grasses.
66.90	Point for angle point 4 of parcel GR 96, hereinafter described.
67.51	Point for angle point 3 of parcel GR 96, hereinafter described.
80.74	The $\frac{1}{4}$ sec. cor. of secs. 34 and 35.
	From the E $\frac{1}{16}$ sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., hereinbefore described. N. $0^{\circ} 24'$ E., on the N and S center line of the SE $\frac{1}{4}$ of sec. 35. Over mountainous land, through scrub oak brush.
19.81	Point for the SE $\frac{1}{16}$ sec. cor. of sec. 35, at intersection with the E and W center line of the SE $\frac{1}{4}$. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	SE $\frac{1}{16}$ S 35 1979
	from which An X BO on limestone outcrop, 10 x 10 x 10 ft. high, bears S. $57^{\circ} 53'$ W., 13 lks. dist.
	Cor. is located on steep NW slope in oak brush.
39.62	The center E $\frac{1}{16}$ sec. cor. of sec. 35.
	From the S $\frac{1}{16}$ sec. cor. of secs. 35 and 36. S. $89^{\circ} 55'$ W., on the E and W center line of the SE $\frac{1}{4}$ of sec. 35.

Subdivision of a Portion of Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
19.69	<p>Over mountainous land, through oak brush.</p> <p>The SE 1/16 sec. cor. of sec. 35.</p>	
39.38	<p>The center S 1/16 sec. cor. of sec. 35.</p>	
19.95	<p>From true point for the W 1/16 sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0° 02' E., on the N and S center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Over bench land, through orchards and residential area.</p> <p>Point for the SW 1/16 sec. cor. of sec. 35, at intersection with the E and W center line of the SW$\frac{1}{4}$.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">SW 1/16 S 35 1979</p> <p>Cor. is located in excavated area, with trail roads, encircle it.</p> <p>Over rolling bench land, through oak brush.</p>	
39.90	<p>The center W 1/16 sec. cor. of sec. 35.</p>	
20.54	<p>From the center S 1/16 sec. cor. of sec. 35.</p> <p>N. 89° 48' W., on the E and W center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Over bench land, through scattered patches of oak.</p>	
41.06	<p>The SW 1/16 sec. cor. of sec. 35.</p>	
41.08	<p>Four strand barbwire fence line, bears N and S.</p>	
41.08	<p>The S 1/16 sec. cor. of secs. 34 and 35.</p>	
19.82	<p>From the center W 1/16 sec. cor. of sec. 35.</p> <p>N. 1° 13' E., on the N and S center line of the NW$\frac{1}{4}$ of sec. 35.</p> <p>Over mountainous land, through oak and maple.</p> <p>Point for the NW 1/16 sec. cor. of sec. 35, at intersection with the E and W center line of the NW$\frac{1}{4}$.</p> <p>Set an aluminum post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a collar of stone, with aluminum cap mkd.</p>	

Subdivision of a Portion of Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS										
39.64	<p>NW 1/16</p> <p>S 35</p> <p>1979</p> <p>Cor. is located on steep S slope in oak brush.</p> <p>The W 1/16 sec. cor. of secs. 26 and 35.</p>									
20.48	<p>From the center N 1/16 sec. cor. of sec. 35.</p> <p>N. 89° 07' W., on the E and W center line of the NW$\frac{1}{4}$ of sec. 35.</p> <p>Over mountainous land, through oak and maple.</p> <p>The NW 1/16 sec. cor. of sec. 35.</p>									
40.96	<p>The N 1/16 sec. cor. of secs. 34 and 35.</p>									
	<p>Survey of Parcel 52 in Section 17, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>									
	<p>Establishing Parcel 52 reconveyed to the United States of America on the 5th day of November 1965 as recorded in Deed Book No. 1030, page 46, in the Utah County Courthouse.</p>									
	<p>Beginning at point for angle point 2, 6.71 chs. East of the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T 7 S R 3 E</td> </tr> <tr> <td colspan="2" style="text-align: center;">S 8</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px;">AP-2</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">S 17</td> <td style="padding-left: 5px;">PL-52</td> </tr> </table> <p style="text-align: center;">1979</p> <p>From this cor., angle point 9, parcel 52, identical with the cor. of secs. 8, 9, 16, and 17, bears East, 32.83 chs. dist., hereinbefore described.</p> <p>Thence, S. 13° 15' E.</p> <p>Over rolling bench land, through scattered oak brush.</p>	T 7 S R 3 E		S 8			AP-2	S 17	PL-52	
T 7 S R 3 E										
S 8										
	AP-2									
S 17	PL-52									
16.58	<p>Point for Angle Point No. 3.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T 7 S R 3 E</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px;">PL-52</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px;">AP- 3</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;"></td> <td style="padding-left: 5px;">S 17</td> </tr> </table> <p style="text-align: center;">1979</p>	T 7 S R 3 E			PL-52		AP- 3		S 17	
T 7 S R 3 E										
	PL-52									
	AP- 3									
	S 17									

Survey of Parcel 52 in Section 17,
T. 7 S., R. 3 E., Salt Lake Meridian Utah


CHAINS

Cor. is located in trail road, bears NW and SE.

Thence S. 16° 29' E.

1.49 Point for angle point No. 4.


Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

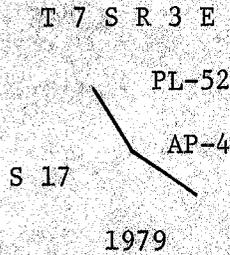

Thence S. 23° 25' E.

6.33 Point for Angle Point No. 5.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

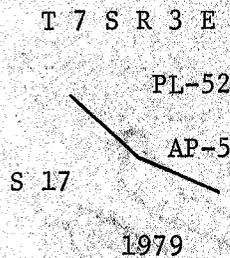


Cor. is located 20 lks. E of trail road, bearing NW and SE.

Thence S. 30° 41' E.

13.77 Intersect the N and S center line of the NE¼ of sec. 17. From which the center E 1/16 sec. cor. of sec. 17, bears S. 1° 08' E., 4.925 chs. dist.

15.45 Point for Angle Point No. 6.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

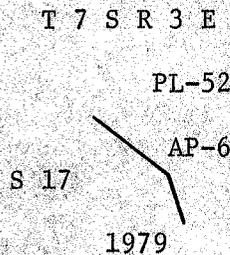

Set a 2 x 6 in., 5 ft. long plank alongside the iron post.

Cor. is located in well travelled area in old lime dump.

Survey of Parcel 52 in Section 17,
T. 7 S., R. 3 E., Salt Lake Meridian Utah


CHAINS

Thence S. $14^{\circ} 53'$ E.

3.59 Intersect E and W center line of sec. 17. Point for angle point 7.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E



S 17

1979

From this cor., the center E $1/16$ sec. cor. of sec. 17, bears S. $89^{\circ} 31'$ W., 1.68 chs. dist., hereinbefore described.

From the same cor., angle point No. 8, parcel 52, identical with the $1/4$ sec. cor. of secs. 16 and 17, bears N. $89^{\circ} 31'$ E., 18.21 chs. dist., hereinbefore described.

Survey of Parcel 85 in Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah


Establishing parcel 85 in sec. 28, T. 7 S., R. 3 E., re-conveyed to the United States of America on the 14th day of August 1936, as recorded in Deed Book No. 331, page 159 in the Utah County Courthouse, Provo, Utah.

From point for angle point 4, parcel 85, on line between secs. 27 and 28, from which angle point 3, identical with the N $1/16$ sec. cor. of secs. 27 and 28, bears N. $0^{\circ} 13'$ W., 11.00 chs. dist., hereinbefore described.

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, $3\frac{1}{2}$ ft. base to top of brass cap, mkd.

T 7 S R 3 E

PL-85



S 28 | S 27

1979

from which

Cor. of four strand barbwire fence, bears S. $9^{\circ} 44'$ W., 25 lks. dist., with fences extending S and W.

Cor. is located in scattered oak brush.

S. $89^{\circ} 36'$ W., on a mean bearing between E and W center line of the NE $1/4$ and the E and W center line of sec. 28.

Survey of Parcel 85 in Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian Utah


CHAINS

20.00 Intersect the N and S center line of the NE $\frac{1}{4}$ of sec. 28, which bears S. 0° 13' E., 9.18 chs. dist., to center E 1/16 sec. cor. of sec. 28, and N. 0° 13' W., 11.07 chs. dist. to NE 1/16 sec. cor. of sec. 28, hereinbefore described.

24.31 Intersect old fence line and E. bdy. of deed granted to Anna B. Houtz on the 23rd day of January 1901, recorded in Book 54, page 374 of Deeds, at the Utah County Courthouse in Provo, Utah. Point for Angle Point No. 5.

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E



1979


From this corner, the SE cor. of said deed above, bears S. 21° 24' W., 0.647 chs. dist., monumented with a 1/2 in. rebar, firmly set and exposed 2 ins. above the ground, with a steel fence post alongside.

Thence, N. 21° 24' W., along old fence line and the E. bdy. of Deeds granted to Anna B. Houtz on 23rd day of January 1901, and Nellie Drury on the 6th day of September 1899.

11.94 Intersect E and W center line of the NE $\frac{1}{4}$ of sec. 28, from which the NE 1/16 sec. cor. of sec. 28, bears N. 89° 44' E., 8.61 chs. dist., and the point for the center N 1/16 sec. cor. of sec. 28, bears S. 89° 44' W., 11.40 chs. dist. This point is identical with the NE cor. of Deed granted to Nellie Drury on the 6th day of September 1899, record in Deed Book No. 54, page 374.

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, for a witness point, with brass cap mkd.

WP
T 7 S R 3 E



1979

Leave fence line, bears S. 21° 24' E., and North.


14.13 Point for Angle Point No. 6, at record distance, and on extension of old fence line.

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Survey of Parcel 85 in Section 28,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS

T 7 S R 3 E



1979


Cor. is located in nearly level field.

Thence, N. 38° 20' W.

- 17.18 Point for Angle Point No. 7, on N and S center line of sec. 28, at record dist. southing from the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E



1979

Cor. is located in gently rolling field.

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, bears N. 0° 14' W., 4.73 chs. dist., hereinbefore described.

Survey of Parcels in Section 34,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah


Establishing parcels in sec. 34, T. 7 S., R. 3 E., reconveyed to the United States of America the 30th day of March 1939, as recorded in Deed Book No. 348, page 135, in the Utah County Courthouse. "All of the SE¼ of the NE¼ except the following grants."

Grant 89

Beginning at a point N. 29° 57' W., 6.25 chs. dist., from the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, point for Angle Point No. 6 of grant 89.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E






1979

Cor. is located on SW slope in oak brush.

Thence, N. 22° 50' W.

- 5.95 Bulldozed road, bears SE and NW.

Survey of a Parcel in Section 34,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS		
6.25	Point for Angle Point No. 7 of Grant 89.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	T 7 S R 3 E	
		
	Cor. is located on SW slope in native grasses.	
	Thence, S. 67° 10' W.	
0.30	Bulldozed road, bears SE and NW.	
4.25	Point for Angle Point No. 8 of Grant 89.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	T 7 S R 3 E	
		
	Cor. is located on SW slope in scattered oak brush.	
	Thence, S. 22° 50' E.	
6.25	Point for Angle Point No. 9 of Grant 89.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	T 7 S R 3 E	
		
	Cor. is located on SW slope in oak brush.	
	Thence, N. 67° 10' E.	
4.25	Angle Point No. 6 and point of beginning.	
	From point for Angle Point No. 1 of Grant 89, on the N - S center line of the NE¼ sec. 34.	
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	

Survey of a Parcel in Section 34,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS

T 7 S R 3 E

S 34 | GR 89
AP 1

1979

Cor. is located on gentle S slope in sagebrush.

From this cor., the NE 1/16 sec. cor. of sec. 34, bears N. 1° 05' E., 5.16 chs. dist., hereinbefore described.

Thence, S. 89° 53' E.

10.00 Point for Angle Point No. 2 of Grant 89.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E

GR89 | S 34
AP 2 |

1979

Cor. is located on SW slope in low sagebrush.

Thence, S. 1° 05' W.

15.00 Intersect the E and W center line of sec. 34. Point for Angle Point No. 3 of Grant 89.

Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.

T 7 S R 3 E

AP 3 |
GR89 | S 34

1979

Cor. is located on N edge of road, bears E and W.

From this cor., the center east 1/16 sec. cor. of sec. 34, identical with angle point No. 4 of this grant, bears N. 89° 53' W., 10.00 chs. dist., hereinbefore described.

Survey of a Parcel in Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

Establishing the boundaries of a parcel of land in sec. 35, T. 7 S., R. 3 E., reconveyed to the United States of America the 30th day of March 1939, as recorded in Deed Book 348, page 135 in the Utah County Courthouse. All of the SW¼ of the NW¼ except the following parcel.


Survey of a Parcel in Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian Utah

CHAINS

Parcel 96

From the point for Angle Point No. 1 of Grant 96, on the section line between secs. 34 and 35, N. 1° 53' E., 8.45 chs. dist., from the ¼ sec. cor. of secs. 34 and 35, hereinbefore described.


Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.



Cor. is located on S slope in sagebrush and scattered oak. Thence, S. 63° 30' E.

7.75 Point for Angle Point No. 2 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.




Cor. is located flush with the ground in trail road, bearing SE and NW.

Thence, S. 50° 00' E.

7.86 Intersect the E and W center line of sec. 35, at a point S. 89° 45' E., 13.23 chs. dist., from the ¼ sec. cor. of secs. 34 and 35 and N. 89° 45' W., 7.49 chs. dist., from the center W 1/16 sec. cor. of sec. 35. Point for Angle Point No. 3 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Cor. is located on S slope in scattered oak brush.

Thence, S. 89° 45' E., along E and W center line of sec. 35.

Survey of a Parcel in Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

0.61 Point for Angle Point No. 4 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 7 S R 3 E

AP 4
GR 96 / S 35

1979

Cor. is located on S slope in scattered oak brush.

Thence, N. 50° 00' E.

6.36 Point for Angle Point No. 5 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of brass cap, mkd.

T 7 S R 3 E

AP 5
GR 96 / S 35

1979

Cor. is located on SE slope in sagebrush.

Thence, N. 59° 37' W.

10.73 Point for Angle Point No. 6 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base, to top of brass cap, mkd.

T 7 S R 3 E

AP 6 / S 35
GR 96

1979

Cor. is located on S slope in sagebrush.

Thence, N. 63° 30' W.

7.75 Point for Angle Point No. 7 of Grant 96.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 7 S R 3 E
S 35

AP 7
GR 96

1979

Survey of a Parcel in Section 35,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
5.00	<p>Cor. is located on steep SW slope in sagebrush. Thence, S. 26° 30' W. Angle point 1, and point of beginning.</p>
	<p>The Survey of a Portion of the Easterly Boundary of the Ironton Subdivision, T. 7 S., R. 3 E., Salt Lake Meridian, Utah</p>
	<p>From the NE cor. of lot 2, Block 8 of the Iron Subdivision, at record distance from the cor. of secs. 17 and 20 and on the section line between secs. 17 and 20. Set a Bathey, 18 ins. long, 16 ins. in the ground, with cap mkd.</p> <div data-bbox="795 940 1015 1061" style="text-align: center;"> <p style="margin: 0;">S 17 Lot 2 S 20 I.R.T.</p> </div> <p>from which</p> <p>The cor. of secs. 17 and 20, bears N. 89° 25' E., 3.794 chs. dist. (250.40 ft., record.). A 3 in. brass cap, set in concrete, bears S. 89° 25' W., 0.49 chs. dist., mkd. Sub. Div. Cor. +</p> <p>Thence, S. 32° 52' E., along the easterly boundary of the Ironton Subdivision.</p>
7.31	<p>Intersect the sec. line between secs. 20 and 21, point for angle point No. 1. Set a Bathey, 18 ins. long, 16 ins. in the ground, with cap mkd.</p> <div data-bbox="803 1693 1006 1868" style="text-align: center;"> <p style="margin: 0;">S 20 AP1 S 21</p> </div> <p>from which</p> <p>The cor. of secs. 17 and 20, bears N. 1° 36' W., 6.175 chs. dist.</p>
16.85	<p>Point for the SE cor. of lot 29, Block 8 of the Ironton Subdivision, identical with angle point No. 2, at record bearing and distance. Set a bolt, 3/4 ins. diam., flush with the dirt road, that bears SE and NW, with cap mkd.</p> <div data-bbox="795 2217 1006 2405" style="text-align: center;"> <p style="margin: 0;">B.L.M. AP 2 Lot 29 S 21</p> </div>


The Survey of a Portion of the Easterly Boundary
of the Ironton Subdivision,
T. 7 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Thence, S. 57° 08' W.

1.82 Point for the SW cor. of lot 29, Block 8 of the Ironton Subdivision, identical with angle point No. 3, at record bearing and distance.

Set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.




Cor. is located in a 6 ft. high chain link fence that bears S. 32° 52' E., and S. 57° 08' W.

Thence, S. 32° 52' E., along fence line.

6.195 Intersect the E-W centerline of the NW¼ of sec. 21.

Point for the angle point No. 4.

Set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.




from which

The N 1/16 sec. cor. of secs. 20 and 21, bears S. 89° 23' W., 6.615 chs. dist.

10.00 Point for the NW cor. of lot 1, Block 9 of the Ironton Subdivision, at record bearing and distance.

Set a Bathey, 18 ins. long, 10 ins. in the ground, with cap mkd.



Cor. is located in a 6 ft. high chain link fence, that bears N. 32° 52' W., and S. 32° 52' E.

General Description

The area surveyed and resurveyed within T. 7 S., R. 3 E., is located on the E edge of Provo and Springville Utah. The land varies from broken mountainous land in the E portion to gently rolling land in the W portion. The elevation varies from 4500 ft. in the valley to 11,000 ft. in the mountains to the E. The lower elevations are mostly residential areas in the two cities.

Access to the township is attained by a few trail roads along the base of the mountains and an improved dirt road at the higher elevations that is passable after the snow has melted. This road can be reached either from Provo Canyon to the N of the township or from Hobble Creek Canyon to the E of the township.

Township 7 South, Range 3 East, Salt Lake Meridian, Utah

CHAINS

The vegetation in the township consists mostly of maple and oak brush, with dense stands of fir, balsam, pine, and aspen on the N slope. Grazing is not permitted due to watershed areas.

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Don Buhler	Supervisory Land Surveyor
Scott McMullin	Supervisory Land Surveyor
Kathy Johnson	Survey Technician
Rex Smith	Survey Aid
Terry Christensen	Survey Aid
Renee Wheeler	Survey Aid
John Mavor	Survey Aid
John Hales	Survey Aid

CERTIFICATE OF SURVEY

~~XX~~(We), Glen B. Hatch, Supervisory Cadastral Surveyor and Gail E. Reynolds, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 2nd day and Supplemental Special Instructions dated December 12, 1979, of April, 1979 ~~XX~~(We) have dependently resurveyed a portion of the north, south and east boundaries, and a portion of the subdivisional lines, and the survey of a portion of the subdivisions of certain sections and parcels of Township 7 South, Range 3 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by ~~XX~~(us) and under ~~XX~~(our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 4, 1982 (Date) *Gail E Reynolds* (Cadastral Surveyor) Supervisory

November 4, 1982 (Date) *Glen B Hatch* (Cadastral Surveyor) Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of a portion of the north, south and east boundaries, and a portion of the subdivisional lines, and the survey of a portion of the subdivisions of certain sections and parcels of T. 7 S., R. 3 E., Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor and Gail E. Reynolds, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

December 16, 1982 (Date) *Glen B Hatch* (Chief, Cadastral Survey Examination and Approval Staff) Chief Cadastral Surveyor for Utah

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) *Glen B Hatch* (Chief, Cadastral Survey Examination and Approval Staff) Chief Cadastral Surveyor for Utah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R604

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE EAST BOUNDARY

(PINE VALLEY GUIDE MERIDIAN),

THE NORTH, SOUTH AND WEST BOUNDARIES OF SECTION 1,

AND THE

SURVEY OF THE SUBDIVISION OF SECTION 1,

OF

TOWNSHIP 43 SOUTH, RANGE 16 WEST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ronald K. Baugh Cadastral Surveyor

Under special instructions dated May 25, 1982, approved May 25, 1982,

_____, which provided for the surveys included under U.S. Survey/Group
Number 615, and assignment instructions dated June 3, 1982.

Survey commenced June 8, 1982

Survey completed June 10, 1982

INDEX DIAGRAM

Township 43 South, Range 16 West

					3
6	5	4	3	2	4 1 2
					4
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

Subdivision of Section 1 - Page 6

Township 43 South, Range 16 West, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east boundary (Pine Valley Guide Meridian), the north, south and west boundaries of sec. 1, and the subdivision of sec. 1 of T. 43 S., R. 16 W., Salt Lake Meridian, Utah.

History of Surveys

<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
--------------------	-------------------------------

EAST BOUNDARY (Pine Valley Guide Meridian)

N. 1 mile	J. Gorlinski	1870	
			Jenkins and West 1897
S. 5 miles	Jenkins and West		
		1897	
Portion			A. Nelson 1965

NORTH BOUNDARY

E. 2 miles	J. Gorlinski	1870	
			Jenkins and West 1897
W. 4 miles	Jenkins and West		
		1897	
All			M.H. Dalley 1900
W. 5½ miles			G.B. Hatch 1967

SUBDIVISION

Portion	J. Gorlinski	1870	
Portion			Jenkins and West 1897
Portion	Jenkins and West		
		1897	
Portion			C. Sylvester 1971-1972

The resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 615, Utah, dated May 25, 1982.

The directions of all lines were determined by observations on Polaris and direct altitude observation of the sun. The lines were carried forward by sustained angulation throughout the section.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the witness corner for the southeast corner of sec. 1, determined from tie made to U.S.C. & G.S. triangulation station "GEORGE" located in sec. 7 of T. 43 S., R. 15 W., is as follows:

Latitude 37° 03' 59.07" N. Longitude 113° 35' 07.87" W.

The mean magnetic declination is 14 1/4° E.

Dependent Resurvey of a Portion of the
East Boundary (Pine Valley Guide Meridian),
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of the
East Boundary (Pine Valley Guide Meridian),
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by
J. Gorlinski in 1870 and the Resurveys Executed by
Jenkins and West in 1897 and A. Nelson in 1965)


Beginning at the witness cor. for secs. 1, 6, 7, and 12,
monumented with an iron post, 2½ ins. diam., firmly set
6 ins. above the ground, with brass cap mkd. as described
in the official record of the 1965 resurvey.

From this witness cor., U.S.C. & G.S. triangulation
station "GEORGE" bears S. 75° 53' E., 61.28 chs. dist.,
monumented with a standard brass tablet stamped "GEORGE
1954" set in rock outcrop.

N. 0° 02' W., bet. secs. 1 and 6.

Over rolling land, then scattered undergrowth.

- 0.58 Point for the meander cor. on the present left bank of
the Virgin River, at proportionate distance; there is no
remaining evidence of the original corner. Point not
monumented.
 - 1.60 True point for the cor. of secs. 1, 6, 7, and 12, at pro-
portionate distance, falls in the Virgin River.
 - 10.24 Point for the meander cor. on the present right bank of
the Virgin River at proportionate distance; there is no
remaining evidence of the original corner. Point not
monumented.
 - 15.95 The original meander cor. of secs. 1 and 6, monumented
with a cross (X) and MC chiseled in solid rock on top of
ledge, with a mound of stone W of cor. This cor. will
now function as an angle point only and was not remonu-
mented.
- N. 0° 28' W., beginning new measurement.
- Over rolling land.
- 24.00 Edge of golf course, bears ENE and WSW.
 - 25.09 Point for the ¼ sec. cor. of secs. 1 and 6, at propor-
tionate distance; there is no remaining evidence of the
original corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., flush with
the grass in golf course, with brass cap mkd.



Dependent Resurvey of a Portion of the
East Boundary (Pine Valley Guide Meridian),
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS											
29.32	Santa Clara River, course ESE.										
65.32	The cor. of Tps. 42 and 43 S., Rs. 15 and 16 W., monumented with an iron pipe, 3 ins. diam., firmly set in concrete, 6 ins. above the ground, with cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">SEC</td> <td style="text-align: center;">COR</td> </tr> <tr> <td style="text-align: center;">36</td> <td style="text-align: center;">31</td> </tr> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">6</td> </tr> <tr> <td colspan="2" style="text-align: center;">T 43 S R 15 W</td> </tr> <tr> <td colspan="2" style="text-align: center;">1972</td> </tr> </table>	SEC	COR	36	31	1	6	T 43 S R 15 W		1972	
SEC	COR										
36	31										
1	6										
T 43 S R 15 W											
1972											
	This monument is accepted as a careful and faithful perpetuation of the position of the original corner position.										
	Dependent Resurvey of a Portion of the North Boundary of T. 43 S., R. 16 W., Salt Lake Meridian, Utah										
	(Reestablishment of the Survey Executed by J. Gorlinski in 1870 and the Resurvey Executed by M.H. Dalley in 1900)										
	From the cor. of Tps. 42 and 43 S., Rs. 15 and 16 W. S. 89° 12' W., bet. secs. 1 and 36.										
	Over nearly level golf course.										
8.00	Asphalt surfaced road, bears N and S; enter rolling land through scattered undergrowth.										
40.37	The ¼ sec. cor. of secs. 1 and 36, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1968 resurvey of the S. bdy. of T. 42 S., R. 16 W.										
	(Reestablishment of the Survey Executed by J. Gorlinski in 1870 and the Resurveys Executed by M.H. Dalley in 1900 and Glen B. Hatch in 1968)										
	S. 89° 16' W., beginning new measurement.										
5.00	Asphalt surfaced road, bears NW and SE.										
15.70	Santa Clara River, course SE.										
20.52	Point for the W 1/16 sec. cor. of secs. 1 and 36; not monumented.										
41.04	Point for the cor. of secs. 1, 2, 35, and 36, falls on cultivated land; from which the witness corner bears S. 1° 01' E., 1.82 chs. dist., (record) monumented with an iron post, 2½ ins. diam., firmly set and projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1968 resurvey of the S. bdy. of T. 42 S., R. 16 W.										
	I removed the WC from the brass cap, and added RM and 1982										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 43 S., R. 16 W., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by
W. Jenkins and J.A. West in 1897)

From the true point for the cor. of secs. 1, 6, 7, and 12,
on the E. bdy. of the Tp., hereinbefore described.

S. 89° 39' W., along the N. bdy. of sec. 12.

Thence across the Virgin River.

9.57 Point for the meander cor. on the present right bank of
the Virgin River at proportionate distance; there is no
remaining evidence of the original corner. Point not
monumented.

40.20 The $\frac{1}{4}$ sec. cor. of sec. 12 only, monumented with a white
sandstone, 18 x 12 x 9 ins., firmly set 8 ins. in the
ground, mkd. $\frac{1}{4}$ on N face, with a mound of stone W.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 43 S R 16 W

$\frac{1}{4}$ S 12
1982

Deposit the mkd. stone alongside the iron post and rebuild
the mound of stone, 4 ft. base, 2 ft. high, S of cor.

S. 89° 28' W., beginning new measurement.

Over rolling land.

1.44 Point for the $\frac{1}{4}$ sec. cor. of sec. 1 only.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 4 ft. base,
to top of brass cap mkd.

T 43 S R 16 W

$\frac{1}{4}$ S 1
1982

40.02 The cor. of secs. 11 and 12 only, monumented with an
iron post, 2½ ins. diam., firmly set in a mound of stone,
with brass cap mkd. as described in the official record
of the 1972 resurvey of a portion of the subdivisional
lines.

From the point for the cor. of secs. 1, 2, 35, and 36,
on the N. bdy. of the Tp., hereinbefore described.

S. 0° 22' E., bet. secs. 1 and 2.

Over rolling land, through scattered undergrowth.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS	
10.50	Improved gravel road, bears NW and SE.
20.08	Point for the N 1/16 sec. cor. of secs. 1 and 2.
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T 43 S R 16 W N 1/16 S 2 S 1 1982</p>
	Set a steel fence post alongside the iron post.
40.16	The ¼ sec. cor. of secs. 1 and 2, monumented with a sandstone, 20 x 12 x 4 ins., firmly set in a mound of stone, mkd. ¼ on W face.
	At the corner point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 43 S R 16 W ¼ S 2 S 1 1982</p>
	Deposit the mkd. stone alongside the iron post and raise a mound of stone, 2½ ft. base, 2 ft. high, W of cor.
	S. 0° 06' E., beginning new measurement.
	Over rolling land.
15.60	Asphalt surfaced road, on curve, bears SSW and NE.
38.69	Intersect the closing cor. of secs. 1 and 2, monumented with a sandstone, 30 x 10 x 7 ins., mkd. CC on N face, and 5 grooves on S face. This cor. was found not to be on the N. bdy. of sec. 11, so I added the marks AM and buried the stone 6 ins. below the surface of the ground.
39.02	Intersect the N. bdy. of sec. 11.
	Point for the closing cor. of secs. 1 and 2.
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 43 S R 16 W C C S 2 S 1 S 11 1982</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
	From this cor., the cor. of secs. 11 and 12, bears S. 89° 45' E., 1.42 chs. dist., hereinbefore described.
	From this same cor., the ¼ sec. cor. of secs. 2 and 11, bears N. 89° 45' W., 38.48 chs. dist.




Survey of the Subdivision of Section 1,
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS	<p>Survey of the Subdivision of Section 1, T. 43 S., R. 16 W., Salt lake Meridian, Utah</p>
39.18	<p>From the 1/4 sec. cor. of sec. 1 only. N. 0° 31' E., along the N-S center line of sec. 1. Point for the center 1/4 sec. of sec. 1, at the inter- section with the E-W center line. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 43 S R 16 W C 1/4 S 1 1982</p>
41.65	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor. Junction of roads, from which an improved gravel road bears NW and an asphalt surfaced road bears E and W.</p>
42.29	<p>Point for angle point No. 1. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">  AP-1 1982 </p>
53.00	<p>Set a steel fence post, alongside the iron post. Santa Clara River, course SE.</p>
59.27	<p>Point for the center N 1/16 sec. cor. of sec. 1. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 43 S R 16 W C N 1/16 S 1 C 1982</p>
73.00	<p>Set a steel fence post alongside the iron post. Asphalt surfaced road, bears NW and SE.</p>
79.36	<p>The 1/4 sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., hereinbefore described.</p>
30.00	<p>From the 1/4 sec. cor. of secs. 1 and 6, on the E. bdy. of the Tp., hereinbefore described. S. 89° 17' W., along the E-W center line of sec. 1. Over nearly level golf course. Enter generally rolling land.</p>

Survey of the Subdivision of Section 1,
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS	
41.07	The center $\frac{1}{4}$ sec. cor. of sec. 1.
52.00	Asphalt surfaced road, bears WSW and ENE.
61.28	Point for the center W $\frac{1}{16}$ sec. cor. of sec. 1.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 43 S R 16 W W $\frac{1}{16}$
	C ————— C S 1
	1982
	Set a steel fence post alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.
81.49	The $\frac{1}{4}$ sec. cor. of secs. 1 and 2.
	From the center W $\frac{1}{16}$ sec. cor. of sec. 1.
	N. $0^{\circ} 04'$ E., along the N-S center line of the NW $\frac{1}{4}$ of sec. 1.
18.80	Improved graveled road, bears WNW and ESE.
19.31	Intersect line bet. angle point No. 3 and angle point No. 4. From this point, angle point No. 4 bears N. $66^{\circ} 21'$ W., 1.877 chs. dist., hereinafter described.
20.085	Point for the NW $\frac{1}{16}$ sec. cor. of sec. 1, at the intersection with the E-W center line of the NW $\frac{1}{4}$.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T 43 S R 16 W NW $\frac{1}{16}$ S 1
	1982
	Set a juniper post, 6 ins. diam., 4 ft. long, alongside the iron post.
40.17	Point for the W $\frac{1}{16}$ sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp.; not monumented.
	From the center N $\frac{1}{16}$ sec. cor. of sec. 1.
	S. $89^{\circ} 16'$ W., along the E-W center line of sec. 1.
8.00	Santa Clara River, course SE.
20.36	The NW $\frac{1}{16}$ sec. cor. of sec. 1.
22.08	Point for angle point No. 4.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

Survey of the Subdivision of Section 1,
T. 43 S., R. 16 W., Salt Lake Meridian, Utah

CHAINS	
	<div style="text-align: center;">  <p>AP-4 1982</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>22.70 Improved gravel road, bears WNW and ESE.</p> <p>40.72 The N 1/16 sec. cor. of secs. 1 and 2.</p>
	<p>Survey of a Traverse in the NW$\frac{1}{4}$ of Sec. 1, T. 43 S., R. 16 W., Salt Lake Meridian, Utah</p>
	<p>From angle point No. 1, on the N-S center line of sec. 1, hereinbefore described.</p> <p>Thence N. 55° 55' W., along the N side of gravel road.</p> <p>1.19 Point for angle point No. 2.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>AP-2 1982</p> </div> <p>Thence N. 33° 29' W., along the N side of gravel road.</p> <p>11.58 Point for angle point No. 3.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>AP-3 1982</p> </div> <p>Thence N. 66° 21' W., along the N side of gravel road.</p> <p>14.003 Intersect the N-S center line of the NW$\frac{1}{4}$ of sec. 1, from which the NW 1/16 sec. cor. bears N. 0° 04' E., 0.775 chs. dist.</p>
	<p>15.88 Angle point No. 4, on the E-W center line of the NW$\frac{1}{4}$ of sec. 1, hereinbefore described.</p> <p>From this angle point, the NW 1/16 sec. cor. of sec. 1, bears N. 89° 16' E., 1.72 chs. dist.</p>
	<p style="text-align: center;">General Description</p> <p>The land resurveyed within Township 43 South, Range 16 West, is located about 1 mile south of St. George, Utah, and is mostly broken desert land covered with sagebrush, blackbrush, shadscale, cacti, creosote bush, with willows and tamarack along the Santa Clara River, which flows southeast through sec. 1. The soil is clay and gypsum with sand and gravel along the river bottom. The elevation is about 2800 ft. above sea level.</p>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE SUBDIVISIONAL LINES

AND THE SURVEY OF A PARTIAL SUBDIVISION

OF SECTIONS 29 AND 32

AND THE DEPENDENT RESURVEY

OF A PORTION OF MINERAL SURVEYS

OF

TOWNSHIP 6 SOUTH, RANGE 3 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Glen B. Hatch Supervisory Cadastral Surveyor

Under special instructions dated May 2, 1979, approved May 11, 1979,

and Supplemental Instructions dated September 19, 1979

_____, which provided for the surveys included under U.S. Survey/Group
Number 589, and assignment instructions dated May 15, 1979.

Survey commenced May 18, 1979

Survey completed June 4, 1981

INDEX DIAGRAM

Township 6 South, Range 3 East,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30 14	29 10	28 7	27	26	25
	14	10	8	5	
31 13	32 9	33 5	34 3	35 3	36

Subdivision of Section 29
 Subdivision of Section 32
 Mineral Surveys

- Page 15
 - Page 18
 - Pages 20-22

Township 6 South, Range 3 East, Salt Lake Meridian, Utah

CHAINS

The following field notes describe the dependent resurvey of a portion of the subdivisional lines and the survey of a partial subdivision of sections 29 and 32 and dependent resurvey of a portion of mineral surveys of T. 6 S., R. 3 E., Salt Lake Meridian, Utah.

The history of survey of sections 28, 29, 32, 33, 34, 35, and 36 of T. 6 S., R. 3 E., Salt Lake Meridian, Utah, is as follows:

History of Surveys

T. 6 S., R. 3 E.

Surveyed by Retr. or Resurveyed by

SECTION 28

E. and S. Boundaries	A.J. Stewart Jr. 1881		
N. portion of W. Boundary (40.11)	A.J. Stewart Jr. 1881	Glen B. Hatch	1978
S. portion of W. Boundary (39.38)	A.J. Stewart Jr. 1881		
N. Boundary	A.J. Stewart Jr. 1881	Glen B. Hatch	1978

SECTION 29

W. portion N. Boundary (10.0)	C.L. Craig	1856	A.J. Stewart Jr. 1881	Glen B. Hatch	1978
E. portion of N. Boundary (70.15)	A.J. Stewart Jr. 1881		Glen B. Hatch		1978
W. Boundary	C.L. Craig	1856	A.J. Stewart Jr. 1881		
E. and S. Boundaries	A.J. Stewart Jr. 1881				

SECTION 32

W. Boundary	C.L. Craig	1856	A.J. Stewart Jr. 1881		
W. portion of S. Boundary (21.0)	C.L. Craig	1856	A.J. Stewart Jr. 1881		
E. portion of S. Boundary	A.J. Stewart Jr. 1881				
N. and E. Boundaries	A.J. Stewart Jr. 1881				

SECTION 33

All Section Boundary	A.J. Stewart Jr. 1881				
----------------------	-----------------------	--	--	--	--

Township 6 South, Range 3 East, Salt Lake Meridian, Utah

CHAINS

SECTION 34

W. Boundary A.J. Stewart Jr. 1881

N., E. and
S. Boundaries Henry and Nicholas
Fitzhugh 1895SECTION 35All Section
Boundary Henry and Nicholas
Fitzhugh 1895SECTION 36S. Boundary Henry and Nicholas
Fitzhugh 1895REMONUMENTATION $\frac{1}{4}$ sec. cor. of Ferrel D. Reynolds
secs. 26 and 27 1970

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 589, Utah, dated May 2, 1979.

The directions of lines were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous hour angle observations on Polaris, and altitude observations on the sun. Distances were determined by electronic measurement.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original corners or other calls of the original field note record. Identified corners were remonumented in their original positions, lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the South $\frac{1}{4}$ sec. cor. of sec. 36, as scaled from the U.S. Geological Survey Quadrangle map "Springville, Utah, 1950 Edition" is as follows:

Latitude 40° 14.8' N. Longitude 111° 33.1' W.

The mean magnetic declination is 15° 00' E.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 6 S., R. 3 E., Salt Lake Meridian, Utah

(Restoring the Survey Executed by
Henry and Nicholas Fitzhugh in 1895)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., projecting 6 ins. above the ground, with aluminum cap, mkd as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.

N. 3° 09' W., bet. secs. 35 and 36.

Over mountainous land, through scattered timber and dense undergrowth.

20.14 Point for the S 1/16 sec. cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.

```

T 6 S R 3 E
  S 1/16
    |
  S 35 | S 36
    |
    1979
  
```

Cor. is located in a rock slide, 20 lks. wide, and 41 lks. from the bottom of the slide, sloping N.

40.28 Point for the ¼ sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.

```

T 6 S R 3 E
    ¼
    |
  S 35 | S 36
    |
    1979
  
```

80.56 The cor. of secs. 25, 26, 35, and 36, monumented with a limestone, 22 x 12 x 10 ins., set 8 ins. in the ground, with a mound of stone, 2½ ft. base, 1½ ft. high, W of cor., marks have been obliterated.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

```

T 6 S R 3 E
  S 26 | S 25
  S 35 | S 36
    1979
  
```

Deposit the found stone alongside the aluminum post and rebuild the mound of stone, 3 ft. base, 2 ft. high, W of cor.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., projecting 12 ins. above the ground, with brass cap mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
40.33	<p>N. 0° 11' E., bet. secs. 34 and 35.</p> <p>Over mountainous land, through dense timber and undergrowth.</p> <p>Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <p>1/4</p> <p>S 34 S 35</p> <p>1979</p> </div> <p>from which</p> <p>An aspen, 7 ins. diam., bears N. 88° E., 30 lks. dist., mkd. 1/4 S35 BT.</p> <p>An aspen, 8 ins. diam., bears S. 60° W., 10.2 lks. dist., mkd. 1/4 S34 BT.</p>	
60.495	<p>Point for the N 1/16 sec. cor. of secs. 34 and 35.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <p>N 1/16</p> <p>S 34 S 35</p> <p>1979</p> </div> <p>from which</p> <p>An aspen, 12 ins. diam., bears N. 55° E., 30 lks. dist., mkd. N 1/16 S35 BT.</p> <p>A pine, 24 ins. diam., bears S. 77° W., 30 lks. dist., mkd. N 1/16 S34 BT.</p>	
80.66	<p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W of cor.</p> <p>The cor. of secs, 26, 27, 34, and 35, monumented with an iron post, 2 ins. diam., extending 8 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <p>S 27 S 26</p> <p>S 34 S 35</p> <p>1976</p> </div> <p>from which</p> <p>An aspen, 10 ins. diam., bears N. 50° E., 84.5 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

An aspen, 10 ins. diam., bears S. 64° E., 36 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

A pine, 12 ins. diam., bears S. 55° W., 52.1 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

A pine, 20 ins. diam., bears N. 24° W., 79.9 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, bears N. 1° 16' W., 39.98 chs. dist. This $\frac{1}{4}$ sec. cor. is monumented with an iron post, 2½ ins. diam., extending 6 ins. above ground, mkd. as described in the remonumentation of cors. in T. 6 S., R. 3 E. in 1970.

From the cor. of secs. 25, 26, 35, and 36.

S. 89° 33' W., bet. secs. 26 and 35.

Over mountainous land, through dense forest and undergrowth.

37.95 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

T 6 S R 3 E
 $\frac{1}{4}$ $\frac{S 26}{S 35}$
1979

from which

A pine, 8 ins. diam., bears S. 32° 30' W., 190 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

A pine, 15 ins. diam., bears N. 60° 16' W., 190 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

Cor. is located on steep SW slope.

75.90 The cor. of secs. 26, 27, 34, and 35.

(Restoring the Survey Executed by
A.J. Stewart Jr. in 1881)

From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., projecting 6 ins. above the ground, with aluminum cap, mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>N. 0° 43' W., along the E. bdy. of sec. 33.</p>
	<p>Over mountainous land, through dense timber and undergrowth.</p>
20.54	<p>Point for the S 1/16 sec. cor. of sec. 33.</p>
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base, to top of aluminum cap, mkd.</p>
	<p style="text-align: center;">T 6 S R 3 E S 1/16 S 33 1979</p>
	<p>from which</p>
	<p style="text-align: center;">A pine, 20 ins. diam., bears S. 21° 45' W., 31 lks. dist., mkd. S 1/16 S33 BT.</p>
20.665	<p>Point for the S 1/16 sec. cor. of sec. 34.</p>
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base, to top of aluminum cap, mkd.</p>
	<p style="text-align: center;">T 6 S R 3 E S 1/16 S 34 1979</p>
	<p>from which</p>
	<p style="text-align: center;">A mountain mahogany, 6 ins. diam., bears N. 77° 23' W., 10.3 lks. dist., mkd. S 1/16 S34 BT.</p>
41.08	<p>Point for the ¼ sec. cor. of sec. 33, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 6 S R 3 E ¼ S 33 1979</p>
	<p>from which</p>
	<p style="text-align: center;">A pine, 8 ins. diam., bears N. 2° 01' 19" W., 56.7 lks. dist., mkd. ¼ S33 BT.</p>
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, E of cor.</p>
41.33	<p>Point for the ¼ sec. cor. of sec. 34.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
82.16	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E ¼ S 34 1979</p> <p>Point for the cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E S 28 S 34 S 33 1979</p> <p>from which</p> <p style="text-align: center;">A pinon, 16 ins. diam., bears N. 47° 47' W., 143.3 lks. dist., mkd. T6S R3E S28 BT.</p>
0.51	<p>N. 0° 33' W., along the E. bdy. of sec. 28.</p> <p>Over mountainous land, through scattered timber and dense undergrowth.</p> <p>The closing cor. of secs. 27 and 34, hereinafter described.</p>
41.08	<p>Point for the ¼ sec. cor. of sec. 28, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E ¼ S 28 1979</p>
41.68	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.</p> <p>Point for the ¼ sec. cor. of sec. 27.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E ¼ S 27 1979</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, E of cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

82.16 The cor. of secs. 21 and 28, monumented with an iron post, 2½ ins. diam., extending 6 ins. above a collar of stone, with brass cap mkd. as described in the official record of the resurvey in 1978.

From this cor., the closing cor. of secs. 22 and 27, bears N. 1° 54' W., 0.70 chs. dist. This closing cor. is monumented with an iron post, 2½ ins. diam., extending 6 ins. above the ground, and in a collar of stone, with brass cap, mkd. as described in the official record of the resurvey in 1978.

(Restoring the Survey Executed by
Henry and Nicholas Fitzhugh in 1895)

From the cor. of secs. 26, 27, 34, and 35.

S. 88° 46' W., bet. secs. 27 and 34.

Over mountainous land, through dense timber and undergrowth.

20.01 The W 1/16 sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., extending 6 ins. above the ground, with brass cap mkd.

27 E 1/16
34
1976

This cor. is accepted as a careful and faithful determination of the position of the cor.

S. 88° 53' W., beginning new measurement.

19.98 The ¼ sec. cor. of secs. 27 and 34, monumented with an iron post, 2 ins. diam., extending 6 ins. above the ground, with brass cap mkd.

T 6 S R 3 E
¼ S 27
S 34
1976

from which

An aspen, 9 ins. diam., bears N. 45° E., 48.5 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

An aspen, 10 ins. diam., bears South, 44.2 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

An aspen, 9 ins. diam., bears N. 45° 30' W., 32.0 lks. dist., mkd. with an aluminum U.S. Forest Service bearing tree sign.

This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.


Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS							
41.95	<p>N. 87° 15' W., beginning new measurement.</p> <p>Intersect the E. bdy. of sec. 28.</p> <p>Point for the closing cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <table style="margin: auto;"> <tr> <td style="padding: 0 10px;">S 28</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S 27</td> <td style="padding: 0 10px;">C</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S 34</td> <td></td> </tr> </table> <p>1979</p> </div> <p>From this cor., the cor. of secs. 28 and 33, bears S. 0° 33' E., 0.51 chs. dist.</p>	S 28	S 27	C		S 34	
S 28	S 27	C					
	S 34						
19.99	<p>From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., monumented with an aluminum post, 2½ ins. diam., firmly set in a mound of stone, 5 ft. base, to top of aluminum cap, mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.</p> <p>N. 0° 40' W., bet. secs. 32 and 33.</p> <p>Over mountainous land, through scattered oakbrush and timber.</p> <p>Point for the S 1/16 sec. cor. of secs. 32 and 33, falls on the face of a limestone ledge, 3 ft. high, which I chiseled a cross (X) at true point.</p> <p>from which</p> <p style="padding-left: 40px;">A point on limestone ledge, even with the cor., bears N. 37° E., 3 lks. dist., mkd. X B0 chiseled in ledge.</p> <p style="padding-left: 40px;">An aluminum post, 30 ins. long, 2½ ins. diam., set 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. diam., for a reference monument, bears S. 29° E., 6.8 lks. dist., with aluminum cap mkd. T6S R3E RM S 1/16 S33 1979 and an arrow pointing to the cor.</p>						
39.98	<p>Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <table style="margin: auto;"> <tr> <td></td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">¼</td> <td></td> </tr> <tr> <td style="padding: 0 10px;">S 32</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S 33</td> <td></td> </tr> </table> <p>1979</p> </div> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p>		¼		S 32	S 33	
	¼						
S 32	S 33						

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS					
79.96	<p>Point for the cor. of secs. 28, 29, 32, and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 6 S R 3 E</td></tr> <tr><td>S 29 S 28</td></tr> <tr><td>S 32 S 33</td></tr> <tr><td>1979</td></tr> </table> </div> <p>from which</p> <p>A pinon, 18 ins. diam., bears N. 70° E., 46.2 lks. dist., mkd. T6S R3E S28 BT.</p> <p>A pinon, 12 ins. diam., bears S. 61° E., 18.8 lks. dist., mkd. T6S R3E S33 BT.</p> <p>A pinon, 10 ins. diam., bears S. 47° 30' W., 24.5 lks. dist., mkd. T6S R3E S32 BT.</p> <p>A pinon, 8 ins. diam., bears N. 75° 30' W., 48.2 lks. dist., mkd. T6S R3E S29 BT.</p>	T 6 S R 3 E	S 29 S 28	S 32 S 33	1979
T 6 S R 3 E					
S 29 S 28					
S 32 S 33					
1979					
40.27	<p>From the cor. of secs. 28 and 33.</p> <p>S. 87° 52' W., bet. secs. 28 and 33.</p> <p>Over mountainous land, through dense timber and undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 6 S R 3 E</td></tr> <tr><td>¼ S 28</td></tr> <tr><td>¼ S 33</td></tr> <tr><td>1979</td></tr> </table> </div> <p>from which</p> <p>A pinon, 24 ins. diam., bears S. 16° 12' W., 15.4 lks. dist., mkd. ¼ S33 BT.</p> <p>A pinon, 14 ins. diam., bears N. 71° 38' W., 31.3 lks. dist., mkd. ¼ S28 BT.</p>	T 6 S R 3 E	¼ S 28	¼ S 33	1979
T 6 S R 3 E					
¼ S 28					
¼ S 33					
1979					
80.54	<p>The cor. of secs. 28, 29, 32, and 33.</p> <p>N. 0° 11' W., bet. secs. 28 and 29.</p> <p>Over mountainous land, through scattered timber and undergrowth.</p>				


Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
22.50	<p>Intersect line 4-3 of Mineral Survey No. 5428, Monarch No. 5 Lode, at a point from which Cor. No. 3, bears S. $74^{\circ} 48'$ E., 16.30 chs. dist., determined at record bearing and distance from the original bearing tree</p> <p>A maple, 4 ins. diam., bears S. $72^{\circ} 30'$ W., 9 ft. dist., with a rotted open blaze.</p> <p>At the corner point</p> <p>Which falls on a boulder, 4 x 5 x 8 ft., which I chiseled a cross (X) at true point</p> <p>from which</p> <p>A Copperweld, 30 ins. long, $5/8$ in. diam., set 20 ins. in the ground for a reference monument, bears East, 0.03 chs. dist., with brass cap mkd. T.6S R39S S29 RM 1979 and an arrow pointing to the corner.</p> <p>From this same intersection point, the true point for Cor. No. 4, at proportionate distance, based on the Grant Boundary Method, bears N. $74^{\circ} 48'$ W., 6.43 chs. dist., falls on a ledge where it is impracticable to establish a permanent monument; there is no remaining evidence of the original witness corner.</p> <p>Point selected for the witness cor. to Cor. No. 4 bears N. $17^{\circ} 18'$ E., 0.075 chs. dist.</p> <p>Set a Copperweld, 30 ins. long, $5/8$ in. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> 
39.98	<p>The $\frac{1}{4}$ sec. cor. of secs. 28 and 29, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, 4 ft. base, to top of brass cap, mkd. as described in the official record of the 1978 resurvey of the subdivisional lines of T. 6 S., R. 3 E., from which the 1978 bearing object</p> <p>An X BO chiseled on the base of a vertical ledge, 50 ft. high, bears N. $14^{\circ} 30'$ W., 107 lks. dist.</p> <p>N. $1^{\circ} 32'$ W., beginning new measurement.</p>
0.318	<p>Intersect line 1-4 of Mineral Survey No. 5428, Monarch No. 1 Lode, at a point from which the witness cor. for Cor. No. 1, identical with Cor. No. 1 of Monarch Lode, same survey, bears N. $24^{\circ} 48'$ E., 0.385 chs. dist., which is determined at record bearing and distance from the original bearing object</p> <p>A cross (X) and BR W C chiseled on the face of a perpendicular cliff, bears N. $4^{\circ} 05'$ W., 9.5 ft. (14.4 lks.) dist.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
	<p>At the corner point</p>
	<p>Set a Copperweld, 30 ins. long, 5/8 in. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>WC ↑ 5428 1 M 1 M-1 1979</p> </div>
	<p>From this witness cor., true point bears N. 24° 48' E., 0.636 chs. dist.</p>
	<p>From this same intersection point, Cor. No. 4, identical with Cor. No. 1 of Monarch No. 5 Lode, bears S. 24° 48' W., 8.197 chs. dist., determined at record bearing and distance from the original bearing tree</p>
	<p style="padding-left: 40px;">A cedar, 5 ins. diam., bears N. 9° 55' W., 36.7 ft. (55.6 lks.) dist., mkd. BT-1-5428 on open blaze.</p>
	<p>At the corner point</p>
	<p>Set a Copperweld, 30 ins. long, 5/8 in. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>5428 M-1 4 1 M-5 1979</p> </div>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.</p>
	<p>From this cor., the true point for Cor. No. 4 of Monarch No. 5 Lode, bears S. 17° 18' W., 9.08 chs. dist., hereinbefore described.</p>
<p>0.553</p>	<p>Intersect line 1-4 of Mineral Survey 5353, Yellow Jack Mine Lode, at a point from which</p>
	<p style="padding-left: 40px;">Cor. No. 1, Yellow Jack Mine Lode, M.S. 5353, bears S. 32° 07' W., 3.926 chs. dist., monumented with a partially decayed wooden post, 4 x 4 ins. square, 4 ft. long, scribed 1-5353, and in a mound of stone, from which the remaining original bearing trees</p>
	<p style="padding-left: 40px;">An oak, 6 ins. diam., bears S. 70° W., 5 lks. dist., with healed blaze.</p>
	<p style="padding-left: 40px;">An oak, 6 ins. diam., bears N. 45° W., 14½ lks. dist., with healed blaze.</p>
	<p>From this same intersection point, true point for Cor. No. 1 of Monarch Lode, M.S. 5428, identical with Cor. No. 1 of Monarch No. 1 Lode, same survey, which is on line 1-4 of Yellow Jack Mine Lode, M.S. No. 5353, bears N. 32° 07' E., 0.817 chs. dist.</p>
<p>17.38</p>	<p>Intersect line 3-4 of Mineral Survey No. 5353 Rejuvinator Lode, at a point from which</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
40.11	<p>Cor. No. 3, Rejuvinator Lode, M.S. No. 5353, monumented with a hewed cedar post, 4½ ft. long, 4 ins. diam., scribed 3-5353, projecting 2½ ft. above a mound of stone, 3 ft. base, 2 ft. high, bears N. 73° 44' W., 14.67 chs. dist.</p> <p>Cor. No. 4, Rejuvinator Lode, M.S. No. 5353, bears S. 73° 44' E., 6.37 chs. dist. This cor. was determined at record bearing and distance from an original bearing tree.</p> <p>A cedar, 10 ins. diam., bears S. 34° 30' W., 31.7 ft. (48 lks.) dist., mkd. 4-BT.</p> <p>At the corner point</p> <p>Set a Copperweld, 24 ins. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>5353 R-4 1979</p> </div> <p>The cor. of secs. 20, 21, 28, and 29, monumented with an iron post, 2½ ins. diam., extending 6 ins. above the ground, and in a collar of stone, with brass cap, mkd. as described in the official record of the 1978 resurvey of the subdivisional lines of T. 6 S., R. 3 E.</p>	
40.09	<p>(Restoring the Surveys Executed by C.L. Craig in 1856 and the Resurvey Executed by A.J. Stewart Jr. in 1881)</p> <p>From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., monumented with a brass cap tablet, 3 ins. diam., set in concrete, 3 ins. below surface of asphalt road with brass cap, mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.</p> <p>N. 0° 52' W., bet. secs. 31 and 32.</p> <p>Over rolling bench land and residential properties, Provo, Utah,</p> <p>The ¼ sec. cor. of secs. 31 and 32, monumented with a brass tablet, 3 ins. diam., set 6 ins. below surface of lawn, mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <p>S 31 S 32</p> <p>¼ Cor.</p> <p>1960</p> </div> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>This cor. is located in the backyard of the 1212 Elm Street Residence, Provo, Utah.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
40.11	<p>N. 0° 54' W., beginning new measurement.</p> <p>The cor. of secs. 29, 30, 31, and 32, monumented with an iron pipe, 2 ins. diam., extending 3 ins. above ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E 30 29 31 32 1955</p> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>This cor. is located in a vacant field SW of 2080 North Street, Provo, Utah.</p>	
40.30	<p style="text-align: center;">(Restoring the Surveys Executed by A.J. Stewart Jr., in 1881)</p> <hr/> <p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>S. 89° 30' W., bet. secs. 29 and 32.</p> <p>Over mountainous land, through scattered timber and over residential properties, Provo, Utah.</p> <p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground; with aluminum cap mkd.</p> <p style="text-align: center;">T 6 S R 3 E 1/4 S 29 1/4 S 32 1979</p> <p>Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N of cor.</p>	
80.60	<p style="text-align: center;">(Restoring the Survey Executed by C.L. Craig in 1856 and the Resurvey Executed by A.J. Stewart Jr., in 1881)</p> <hr/> <p>N. 0° 46' W.; bet. secs. 29 and 30.</p> <p>Through private subdivisions of Provo, Utah.</p> <p>Point for the S 1/16 sec. cor. of secs. 29 and 30.</p> <p>Set a brass tablet, 3 ins. diam., with 3 ins. pigtail in concrete, flush with asphalt surface, mkd.</p> <p style="text-align: center;">T 6 S R 3 E S 1/16 S 30 S 29 1979</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

108

CHAINS		
40.00	<p>from which</p> <p>A cross (X) chiseled in the concrete curb of road, bears S. 47° 04' W., 16.6 lks. dist.</p> <p>A cross (X) chiseled in the concrete curb of road, bears N. 48° 34' W., 15.3 lks. dist.</p> <p>Cor. is located on West half of 1200 E. Street, Provo, Utah.</p> <p>The ¼ sec. cor. of secs. 29 and 30, monumented with a brass tablet, 3 ins. diam., set in concrete flush with asphalt, mkd.</p> <p style="text-align: center;">T 6 S R 3 E 30 29 1967</p> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>Cor. is located on South half of 4620 North Street and about 10 ft. West of 1200 East Street, Provo, Utah.</p> <p>N. 0° 46' W., beginning new measurement.</p>	
40.36	<p>The cor. of secs. 19, 20, 29, and 30, monumented with a brass tablet, 3 ins. diam., set in concrete flush with lawn, with brass cap, mkd. as described in the official record of the 1978 resurvey of the subdivisional lines of T. 6 S., R. 3 E.</p>	
	<p>Survey of the Subdivision of Section 29, T. 6 S., R. 3 E., Salt Lake Meridian, Utah</p>	
19.995	<p>From the ¼ sec. cor. of secs. 29 and 32.</p> <p>N. 0° 49' W., on the N and S center line of sec. 29.</p> <p>Over rolling hills through scattered oak brush and maple trees.</p> <p>Point for the center S 1/16 sec. cor. of sec. 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C S 1/16 S 29 C 1979</p>	
39.99	<p>Point for the center ¼ sec. cor. of sec. 29, at intersection with the E and W center line.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base, to top of aluminum cap, mkd.</p>	

Survey of the Subdivision of Section 29,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>T 6 S R 3 E</p> <p style="margin-left: 100px;">C</p> <p style="margin-left: 100px;"> </p> <p style="margin-left: 100px;">¼ S 29</p> <p style="margin-left: 100px;"> </p> <p style="margin-left: 100px;">C</p> <p style="margin-left: 100px;">1979</p>	
	Cor. is located on steep NW slope.	
80.22	The ¼ sec. cor. of secs. 20 and 29, monumented with an iron post, 2½ ins. diam., extending 6 ins. above the ground, and in a collar of stone, 2 ft. base, to top of brass cap, mkd. as described in the official record of the 1978 resurvey of the subdivisional lines of T. 6 S., R. 3 E.	
	From the ¼ sec. cor. of secs. 28 and 29.	
	S. 89° 31' W., on the E and W center line of sec. 29.	
	Over mountainous land and rolling hills, through scattered oak brush and into the private subdivisions of Provo, Utah.	
0.156	Intersect line 1-4, Monarch #1 Lode, M.S. No. 5428 at a point from which	
	Cor. No. 4, Monarch #1 Lode, M.S. No. 5428, identical with Cor. No. 1 Monarch #5 Lode, M.S. No. 5428, bears S. 24° 48' W., 7.845 chs. dist., hereinbefore described.	
	The witness cor. for Cor. No. 1, Monarch #1, M.S. No. 5428, bears N. 24° 48' E., 0.737 chs. dist., hereinbefore described.	
0.363	Intersect line 1-4, Yellow Jack Mine Lode, M.S. No. 5353 at a point from which	
	Cor. No. 1, Yellow Jack Mine Lode, M.S. No. 5353, bears S. 32° 07' W., 3.27 chs. dist., hereinbefore described.	
	Point on line 4-1, Yellow Jack Mine Lode, M.S. No. 5353, identical with the true point for Cors. No. 1 of Monarch and Monarch No. 1 Lodes, M.S. No. 5428, bears N. 32° 07' E., 1.473 chs. dist., hereinbefore described.	
11.502	Intersect line 1-2, Yellow Jack Mine Lode, M.S. No. 5353 at a point from which	
	Cor. No. 1, Yellow Jack Mine Lode, M.S. No. 5353, bears S. 74° 07' E., 9.773 chs. dist., hereinbefore described.	
	Cor. No. 1, Peay's Dream Mine Lode, M.S. No. 5353, on line 1-2, Yellow Jack Mine Lode, M.S. No. 5353, monumented with a cedar post, 4 x 4 ins. square, 24 ins. long, in a mound of stone, no visible markings, bears N. 74° 07' W., 4.02 chs. dist.	

Survey of the Subdivision of Section 29,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS


15.40

Intersect line 1-2, Peay's Dream Mine Lode, M.S. No. 5353 at a point from which

Cor. No. 1, Peay's Dream Mine Lode, M.S. No. 5353, bears N. 1° 37' E., 1.134 chs. dist., hereinbefore described.

Cor. No. 2, Peay's Dream Mine Lode, M.S. No. 5353, bears S. 1° 37' W., 21.675 chs. dist., at proportionate distance, based on the Grant Boundary Method; there is no remaining evidence of the original corner.

Set a Copperweld, 30 ins. long, 5/8 in. diam., 20 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.



1979


24.28

Intersect line 3-4, Peay's Dream Mine Lode, M.S. No. 5353 at a point from which

True point for Cor. No. 4, identical with Cor. No. 2 of Yellow Jack Mine Lode, M.S. No. 5353, bears N. 1° 37' E., 3.624 chs. dist., at proportionate distance, based on the Grant Boundary Method; there is no remaining evidence of the original corner. The cor. point falls on a sloping ledge 6 ft. high, and is impractical to establish a permanent monument.


Point selected for the witness cor. of Cor. No. 2, bears N. 26° 53' E., 10.8 lks. dist.

Set a Copperweld, 30 ins. long, 5/8 in. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.



Cor. No. 3 of Peay's Dream Mine Lode, M.S. No. 5353, bears S. 1° 37' W., 19.20 chs. dist., at proportionate distance, based on the Grant Boundary Method; there is no remaining evidence of the original corner.

Set a Copperweld, 30 ins. long, 5/8 in. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.



1979

From this cor., Cor. No. 2 of Peay's Dream Mine Lode, M.S. No. 5353, bears S. 74° 46' E., 9.13 chs. dist., hereinbefore described.

Survey of the Subdivision of Section 29,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS	
40.74	The center $\frac{1}{4}$ sec. cor. of sec. 29.
60.875	<p>Point for the center W $\frac{1}{16}$ sec. cor. of sec. 29.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>W $\frac{1}{16}$</p> <p>C ——— S 29 C</p> <p>1979</p> </div> <p>Set a steel fence post alongside the iron post.</p>
81.01	The $\frac{1}{4}$ sec. cor. of secs. 29 and 30.
<p>Survey of the Subdivision of Section 32, T. 6 S., R. 3 E., Salt Lake Meridian, Utah</p>	
19.985	<p>From the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp., monumented with an aluminum post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, 3 ft. base, to top of aluminum cap, mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E.</p> <p>N. $0^{\circ} 40'$ W., on the N and S center line of sec. 32.</p> <p>Over rolling hills through scattered oak brush.</p>
19.985	<p>Point for the center S $\frac{1}{16}$ sec. cor. of sec. 32.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>S $\frac{1}{16}$ S 32</p> <p>C</p> <p>1979</p> </div>
39.97	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 32, at intersection with the E and W center line.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 6 S R 3 E</p> <p>C</p> <p>$\frac{1}{4}$ S 32</p> <p>C</p> <p>1979</p> </div>
80.01	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 29 and 32.</p>

Survey of the Subdivision of Section 32,
T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
20.15 40.30 80.44	<p>From the $\frac{1}{4}$ sec. cor. of secs. 32 and 33. S. $89^{\circ} 25'$ W., on the E and W center line of sec. 32. Over steep SW slope, through scattered oak brush and private subdivisions of Provo, Utah.</p> <p>Point for the center E $\frac{1}{16}$ sec. cor. of sec. 32, not monumented.</p> <p>The center $\frac{1}{4}$ sec. cor. of sec. 32.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 31 and 32.</p>	
19.985 39.97	<p>From the E $\frac{1}{16}$ sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp., monumented with an aluminum post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, 3 ft. base, to top of aluminum cap, mkd. as described in the concurrent resurvey of the N. bdy. of T. 7 S., R. 3 E. N. $0^{\circ} 40'$ W., on the N and S center line of the SE$\frac{1}{4}$ of sec. 32. Over steep SW slope, through scattered oak brush.</p> <p>Point for the SE $\frac{1}{16}$ sec. cor. of sec. 32, at intersection with the E and W center line of the SE$\frac{1}{4}$. Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">SE $\frac{1}{16}$ S 32 1979</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Point for the center E $\frac{1}{16}$ sec. cor. of sec. 32.</p>	
20.15 40.30	<p>From the S $\frac{1}{16}$ sec. cor. of secs. 32 and 33. S. $89^{\circ} 25'$ W., on the E and W center line of the SE$\frac{1}{4}$ of sec. 32. Over steep SW slope, through scattered oak brush.</p> <p>The SE $\frac{1}{16}$ sec. cor. of sec. 32.</p> <p>The center S $\frac{1}{16}$ sec. cor. of sec. 32.</p>	
	<p>Note: A dependent resurvey of portions of Mineral Surveys Nos. 5353 and 5428 was necessary to properly determine the points of intersection of the section lines with private owned mineral claims in T. 6 S., R. 3 E.</p>	

Dependent Resurvey of Portions of Mineral Surveys in Section 29, T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of Portions of Mineral Surveys in Section 29, T. 6 S., R. 3 E., Salt Lake Meridian, Utah

(Reestablishment of a Portion of Mineral Survey No. 5353, Executed by George C. Swan in 1904 and 1905)

Yellow Jack Mine Lode, No. 5353


From true point for Cor. No. 2 of Yellow Jack Mine Lode, identical with Cor. 4 of Peay's Dream Mine Lode, M.S. No. 5353, hereinbefore described.

Thence, N. 31° 51' E., along line 2-3.

9.50 Cor. No. 3 of Yellow Jack Mine Lode, on line 1-2 of Sparrow Extension Lode, M.S. No. 5353, monumented with a badly decayed wood post, 4 x 4 ins. square, 4 ft. long, set in a mound of stone, with no visible scribe marks.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a collar of stone, with aluminum cap mkd.



Sparrow Extension Lode, M.S. No. 5353

Thence, N. 74° 03' W., along line 1-2.


21.07 Cor. No. 2, monumented with a rotted cedar post, 2 ft. long, 3 ins. diam., and in a mound of stone, with no visible scribe marks.

Thence, N. 16° 04' E., along line 2-3.

8.86 Cor. No. 3, which is determined at record bearing and distance from the remains of the original bearing object.

A chiseled cross (X) and faint illegible marks on face of cliff, bears N. 35° 10' E., 50 lks. dist., (33 ft.)

Set a Bathey, 24 ins. long, 18 ins. in the ground, and in a collar of stone, with cap mkd.



Thence, S. 74° 23' E., along line 3-4.

22.79 Cor. No. 4, on line 2-3 of Rejuvenator Lode, M.S. No. 5353, monumented with a hewed juniper post, 4 ft. long, 3 ins. diam., and in a mound of stone, scribed 4-5353.

Dependent Resurvey of Portions of Mineral Surveys in Section 29, T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS		
	<p>From this cor., Cor. No. 3 of Rejuvinator Lode, same survey, bears N. 14° 23' E., 1.88 chs. dist., hereinbefore described.</p>	
	<p>Dependent Resurvey of Portions of Mineral Surveys in Section 28, T. 6 S., R. 3 E., Salt Lake Meridian, Utah</p>	
<p>8.95</p>	<p>(Reestablishment of a Portion of Mineral Survey No. 5428, Executed by William B. Searle in 1906)</p> <p>Monarch No. 6 Lode, M.S. No. 5428</p> <p>From Cor. No. 1, monumented with a decayed wood post, with illegible scribe marks, and in a mound of stone, from which the original bearing trees</p> <p>An oak, 5 ins. diam., bears N. 72° E., 0.32 chs. dist., with a healed blaze and illegible scribe marks.</p> <p>A maple, 6 ins. diam., bears S. 73° E., 0.39 chs. dist., with a healed blaze and illegible scribe marks.</p> <p>From this cor., Cor. No. 3 of Monarch No. 5 Lode, same survey, bears S. 24° 45' W., 0.43 chs. dist., hereinbefore described.</p> <p>Thence, S. 75° 59' E., along line 1-8.</p> <p>Cor. No. 8, which is determined at record bearing and distance from the remains of an original bearing tree</p> <p>A rotted pinon stump, 10 ins. diam., bears N. 20° E., 7.6 lks. dist., scribed 8-5.</p> <p>Set a Copperweld, 30 ins. long, 5/8 in. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>M-6</p> <p>5428 </p> <hr style="width: 50px; margin: 0 auto;"/> <p>8 </p> <p>1979</p> </div> <p>from which</p> <p>An X BO, 5 ins. high, chiseled in a vertical sandstone cliff, bears S. 83° 02' W., 4.9 lks. dist.</p> <p>Thence, N. 17° 22' E., along line 8-7.</p>	
	<p>8.12</p> <p>Cor. No. 7, monumented with a rotted cedar post, with illegible scribe marks, and in a mound of stone.</p> <p>Set a Copperweld, 30 ins. long, 5/8 in. diam., 18 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.</p>	

Dependent Resurvey of Portions of Mineral Surveys in
Section 28, T. 6 S., R. 3 E., Salt Lake Meridian, Utah

CHAINS

M-6

7

5428

1979

General Description

The land encompassed in this survey is located within the Uinta National Forest and Provo City, Utah.

Drainage is generally to the west by way of Rock Canyon, eventually draining into the Provo River. The elevation varies from 4900 ft. at the southwest cor. of sec. 32 to 9900 ft. in the southeast cor. of sec. 35.

Access is by way of Provo City streets to the east and the Pole Canyon light duty road to the north.

There are scattered stands of timber including aspen, maple, pinon and juniper. The undergrowth consists of oak brush. There is a good cover of native and reseeded grasses.

The principal use of the area is for recreation and watershed.

The improvements noted were development of subdivisions for private homes located in the west half of secs. 29 and 32.

The mean magnetic declination is 15° E.

CERTIFICATE OF SURVEY

(I) ~~(WXX)~~ Glen B. Hatch, Supervisory Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day and Supplemental Instructions dated September 19, 1979 of May 1979, ~~(I) (WXX)~~ have dependently resurveyed a portion of the subdivisional lines and surveyed a partial subdivision of sections 29 and 32 and dependently resurveyed a portion of mineral surveys of Township 6 South, Range 3 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(WXX)~~ and under (my) ~~(WXX)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 22, 1982
(Date)

Glen B Hatch
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependant resurvey of a portion of the subdivisional lines and the survey of a partial subdivision of sections 29 and 32 and the dependant resurvey of a portion of mineral surveys of Township 6 South, Range 3 East of the Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

December 16, 1982
(Date)

Glen B Hatch
~~(XXXXX)~~
Chief Cadastral Surveyor for Utah

~~CERTIFICATE OF TRANSCRIPT~~

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

~~(XXXXX)~~
Chief Cadastral Surveyor for Utah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

R604

218

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

WEST BOUNDARY OF T. 12 S., R. 19 E.,

THE DEPENDENT RESURVEY OF THE NORTH BOUNDARY AND A

PORTION OF THE WEST BOUNDARY;

AN INDEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES;

THE SURVEY OF THE EASTERLY BOUNDARY OF THE

UINTAH AND OURAY INDIAN RESERVATION;

THE SURVEY OF A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES, TRACT 37,

THE MEANDERS OF THE GREEN RIVER

AND

ISLANDS IN SECTIONS 8, 9, 10, AND 17,

OF

TOWNSHIP 12 SOUTH, RANGE 18 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ray Harpin Supervisory Cadastral Surveyor

Milton R. Workman Cadastral Surveyor

Under special instructions dated May 1, 1969, approved May 7, 1969,

and Supplemental Special Instructions dated March 13, 1981 and approved

March 13, 1981, which provided for the surveys included under ~~U.S. Survey~~/Group

Number 520, and assignment instructions dated May 19, 1969.

and March 13, 1981

Survey commenced June 30, 19 69

Survey completed May 21, 19 81

INDEX DIAGRAM

Township		12 South			Range		18 East	
21	20	19	17	17	16			
28 6 76 75	5 62 74	4 53 62	3 42 52	2 34 42	1 34			15
27 7 73 72	8 60 71	9 50 59	10 40 49	11 33 40	12 33			13
26 18 70 69	17 58 68	16 48 58	15 39 47	14 32 38	13 31			12
25 19 68 67	20 57 66	21 46 56	22 37 46	23 31 37	24 30			11
24 30 65 64	29 56 64	28 45 55	27 36 44	26 29 36	25 29			9
22 31 63	32 54	33 43	34 35	35 28	36 28			8

Uintah and Ouray Indian Reservation Bdy.
 Tract 37
 Meanders of Island in Secs. 8 and 17
 Meanders of Island in Secs. 9 and 10
 Meanders of Left Bank of Green River
 Meanders of Right Bank of Green River

- Pages 1 - 8
- Page 77
- Page 78
- Page 79
- Page 79
- Page 83

Township 12 South, Range 18 East, Salt Lake Meridian, Utah

CHAINS

Certain boundaries of the township and a portion of the subdivisional lines have been established by earlier surveys as follows:

The east boundary was surveyed by Scott P. and J.R. Stewart, U.S. Deputy Surveyors, in 1901. Portions of the north and west boundaries and a portion of the subdivisional lines were surveyed by H.D. Heist and W.A. Stumm, U.S. Deputy Surveyors in 1909 and 1910. The survey of a portion of the north boundary and the retracement of a portion of the east boundary was executed by Craig P. Sylvester, Fred R. Chappell, and Glen B. Hatch, Supervisory Cadastral Surveyors in 1961. The south boundary was surveyed concurrently with this assignment in Township 13 South, Range 18 East.

The following field notes are those of the dependent resurvey of the west boundary of T. 12 S., R. 19 E., the dependent resurvey of the north boundary and a portion of the west boundary; an independent resurvey of a portion of the subdivisional lines, the survey of the easterly boundary of the Uintah and Ouray Indian Reservation; the survey of a portion of the west boundary, a portion of the subdivisional lines, tract 37, the meanders of the Green River, and islands in sections 8, 9, 10, and 17, of Township 12 South, Range 18 East, Salt Lake Meridian, Utah

The survey was executed in accordance with specifications set forth in the Manuals of Surveying Instructions, 1947 and 1973, and the Special Instructions for Group No. 520, dated May 1, 1969, and Supplemental Special Instructions dated March 13, 1981.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein. The original monuments of the subdivisional lines were located and removed during the execution of the independent resurvey.

The direction of all lines were determined from a true meridian established by direct altitude observations on the sun by fore- and backsights and angular deflections.

The geographic position of the southeast corner of the township as computed through section line ties to U.S.G.S. triangulation station "PETERS," located in sec. 7, T. 13 S., R. 18 E., is as follows:

Latitude $39^{\circ} 43' 22.9''$ N. Longitude $109^{\circ} 50' 29.8''$ W.

The mean magnetic declination is 16° E.

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

1st Mile

Beginning at a point N. $79^{\circ} 32'$ W., 200.00 chs. dist., from the SW cor. of sec. 7, T. 12 S., R. 19 E., as per Public Law 440, an act dated March 11, 1948, on the Uintah

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS


and Ouray Indian Reservation boundary, at midpoint bet.
 the right and left banks of the Green River.

Thence, S. 37° 24' W., across river.

3.76 Intersect the meander line on the left bank of the Green
 River. Point not monumented; asc. over steep N slope.

15.78 Point for angle point No. 1 on rim of Tabyago Canyon.


Set an aluminum post, 30 ins. long, 2½ ins. diam., 3 ins.
 in the ground to bedrock, in a mound of stone, 4 ft.
 base, to top of aluminum cap, mkd.



Thence, S. 51° 02' E., along rim of canyon.

21.20 Point for angle point No. 2.


Set a bathey, 24 ins. long, 18 ins. in the ground, with
 cap mkd.



Thence, S. 11° 15' W.


3.02 Point for the ½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins.
 in the ground to bedrock, in a mound of stone, 4 ft.
 base, to top of aluminum cap, mkd.



20.19 Point for angle point No. 3.

Set a bathey, 24 ins. long, 18 ins. in the ground, with
 cap mkd.



Thence, S. 16° 12' W.

20.15 Point for angle point No. 4.

Set a bathey, 24 ins. long, 18 ins. in the ground, with
 cap mkd.

Survey of the Easterly Boundary of the
Uintah and Ouray Indian Reservation through
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

UOIR
AP-4

S 15
1981

Thence, N. 61° 47' W.

2.68 Point for the 1st mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

UOIR
T 12 S
R 18 E
S 15

1981

2nd Mile

N. 61° 47' W., along rim of canyon.

37.35 Point for angle point No. 5.

Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

UOIR
AP-5

S 15
1981

Thence, S. 33° 41' W.

2.65 Point for the 1½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

UOIR / T 12 S
1½ M / R 18 E
S 15

1981

9.08 Point for angle point No. 6.

Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.

UOIR

AP-6

S 15

1981


Thence, S. 36° 47' E.

29.68 Point for angle point No. 7.

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS


Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 47° 01' E.

3.89 Point for the 2nd mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.




3rd Mile

Thence, S. 47° 01' E., along rim of canyon.

18.07 Point for angle point No. 8.


Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, N. 44° 08' E.

19.36 Point for angle point No. 9.

Set a bathey, 24 ins. long, 18 ins. in the ground, with brass cap mkd.




Thence, S. 33° 19' E.

2.32 Point selected for the witness cor. to the 2½ mile post.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah


CHAINS

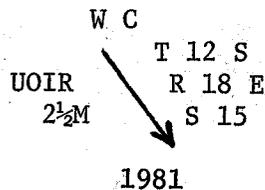

2.57 True point for the 2 1/2 mile post, falls on vertical ledge.

11.73 Point for angle point No. 10, on edge of rim.


Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 7° 00' W., across Tabyago Canyon.

30.84 Point for the 3rd mile post.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.




4th Mile

Thence, S. 7° 00' W.

26.06 Point for angle point No. 11 on rim of canyon.


Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.



Thence, S. 36° 55' W., across West Tabyago Canyon.

4.80 Point selected for the witness cor. to the 3 1/2 mile post, on rim of canyon.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

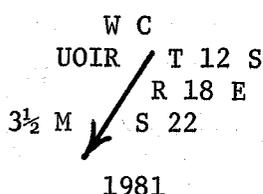

13.94 True point for the 3 1/2 mile post falls on vertical ledge.

53.94 Point for the 4th mile post.

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR 4 M / T 12 S R 18 E S 28 1981 </p>
<p>24.10</p> <p>15.90</p> <p>55.90</p>	<p style="text-align: center;">5th Mile</p> <p>Thence, S. 36° 55' W.</p> <p>Point for angle point No. 12.</p> <p>Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <p style="text-align: center;"> UOIR AP-12 / S 28 1981 </p> <p>Thence, S. 40° 49' W.</p> <p>Point for the 4½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR 4½ M / T 12 S R 18 E S 28 1981 </p> <p>Point for the 5 mile post</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR 5 M / T 12 S R 18 E S 28 1981 </p>
<p>40.00</p>	<p style="text-align: center;">6th Mile</p> <p>Thence, S. 40° 49' W.</p> <p>Point for the 5½ mile post.</p>


Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR 5½ M / T 12 S R 18 E S 28 1981 </p>
47.48	<p>Point for angle point No. 13.</p> <p>Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <p style="text-align: center;"> UOIR AP-13 / S 33 1981 </p> <p>Thence, S. 60° 45' W.</p>
32.52	<p>Point for the 6th mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR / T 12 S 6 M / R 18 E S 32 1981 </p>
	<p style="text-align: center;">7th Mile</p> <p>Thence, S. 60° 45' W.</p>
7.19	<p>Point for angle point No. 14.</p> <p>Set a bathey, 24 ins. long, 18 ins. in the ground, with cap mkd.</p> <p style="text-align: center;"> UOIR / S 32 AP-14 / 1981 </p> <p>Thence, S. 30° 55' W., across Little Rock Canyon.</p>
32.81	<p>Point for the 6½ mile post.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;"> UOIR / T 12 S 6½ M / R 18 E S 32 1981 </p>

Survey of the Easterly Boundary of the
 Uintah and Ouray Indian Reservation through
 T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- 72.81 True point for the 7th mile post, falls on a steep NE slope where a cor. cannot be perpetuated.
- 74.78 Point selected for the witness cor. to the 7th mile post.
 Set an aluminum post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

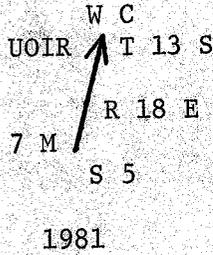

Dependent Resurvey of the West Boundary of
 T. 12 S., R. 19 E., Salt Lake Meridian, Utah


(Reestablishment of the Survey Executed by
 Scott P. Stewart and J.R. Stewart,
 U.S. Deputy Surveyors, in 1901)

Beginning at the cor. of Tps. 12 and 13 S., R. 19 E., the cor. of secs. 6 and 31, described in the official field note record of T. 13 S., R. 18 E., executed concurrently with this group.

N. 0° 13' E., along the W. bdy. of sec. 31.

Over rolling E slope, through sparse sagebrush and grasses.

- 1.36 Point for the cor. of Tps. 12 and 13 S., R. 18 E.
 Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

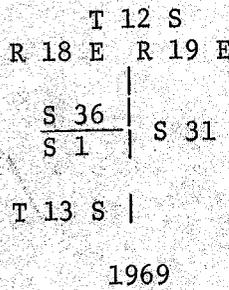

- 21.20 Trail road, 20 lks. wide, bears generally E and W.
- 37.70 Spur, slopes E; desc. over steep N slope.
- 39.93 Point for the ¼ sec. cor. of sec. 31, at proportionate distance; there is no remaining evidence of the original corner.
 Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

T 12 S
¼
S 31
R 19 E

1969

- 41.36 Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.
Point for the ¼ sec. cor. of sec. 36, T. 12 S., R. 18 E.
Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 12 S
¼
S 36
R 18 E

1969

- 79.86 Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.
The cor. of secs. 30 and 31, monumented with a sandstone,
18 x 8 x 6 ins., loosely set 8 ins. in the ground, mkd.
5 notches on the N and 1 notch on the S. edges.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 12 S	T 12 S
S 36	S 30
	S 31
R 18 E	R 19 E

1969

Deposit the mkd. stone alongside the iron post, raise a
mound of stone, 2½ ft. base, 1½ ft. high to W.

N. 0° 05' E., along the W. bdy. of sec. 30.

Over E slope through sparse sagebrush.

- 1.50 Point for the cor. of secs. 25 and 36, T. 12 S., R. 18 E.
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground to bedrock, in a mound of stone, 3 ft.
base, to top of brass cap, mkd.

T 12 S	
R 18 E	R 19 E
S 25	S 30
S 36	

1969

- 39.20 Raise a mound of stone, 3 ft. base, 3½ ft. high, W of cor.
South rim of spur, slopes NE.

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS													
40.09	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 30, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td> </td><td>T 12 S</td></tr> <tr><td> </td><td>$\frac{1}{4}$</td></tr> <tr><td> </td><td>S 30</td></tr> <tr><td> </td><td>R 19 E</td></tr> </table> <p>1969</p> </div> <p>Raise a mound of stone, 4 ft. base, $3\frac{1}{2}$ ft. high, W of cor.</p>		T 12 S		$\frac{1}{4}$		S 30		R 19 E				
	T 12 S												
	$\frac{1}{4}$												
	S 30												
	R 19 E												
40.20	<p>North rim of spur, slopes NE; desc. over steep NW slope through sparse sagebrush.</p>												
41.50	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 25, T. 12 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 12 S</td><td> </td></tr> <tr><td>$\frac{1}{4}$</td><td> </td></tr> <tr><td>S 25</td><td> </td></tr> <tr><td>R 18 E</td><td> </td></tr> </table> <p>1969</p> </div> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.</p>	T 12 S		$\frac{1}{4}$		S 25		R 18 E					
T 12 S													
$\frac{1}{4}$													
S 25													
R 18 E													
62.50	<p>Canyon rim, bears NE and SW; thence over rolling mesa.</p>												
68.10	<p>N rim of mesa; desc. over steep SE slope.</p>												
79.75	<p>Dry wash, drains E; asc. over steep SE slope.</p>												
80.18	<p>The cor. of secs. 19 and 30, monumented with a sandstone, 20 x 10 x 4 ins., set 6 ins. in the ground, mkd. 4 notches on N and illegible marks on S edge.</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 12 S</td><td> </td><td>R 19 E</td></tr> <tr><td>R 18 E</td><td> </td><td></td></tr> <tr><td></td><td> </td><td>S 19</td></tr> <tr><td>S 25</td><td> </td><td>S 30</td></tr> </table> <p>1969</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Raise a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, W of cor.</p>	T 12 S		R 19 E	R 18 E					S 19	S 25		S 30
T 12 S		R 19 E											
R 18 E													
		S 19											
S 25		S 30											

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS											
	N. 0° 04' W., along the W. bdy. of sec. 19.										
	Asc. over steep SE slope through sparse sagebrush.										
1.32	Point for the cor. of secs. 24 and 25, T. 12 S., R. 18 E.										
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T 12 S</td></tr> <tr><td style="text-align: center;">R 18 E</td><td style="text-align: center;"> R 19 E</td></tr> <tr><td colspan="2" style="text-align: center;"> </td></tr> <tr><td style="text-align: center;">S 24</td><td style="text-align: center;"> S 19</td></tr> <tr><td style="text-align: center;">S 25</td><td style="text-align: center;"> </td></tr> </table>	T 12 S		R 18 E	R 19 E			S 24	S 19	S 25	
T 12 S											
R 18 E	R 19 E										
S 24	S 19										
S 25											
	1969										
	Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.										
9.50	Rim, bears NE and SW; thence along rolling mesa.										
15.20	Rim, bears NE and SW; desc. over steep N slope.										
40.12	Point for the ¼ sec. cor. of sec. 19, at proportionate distance; there is no remaining evidence of the original corner.										
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="text-align: center;"> T 12 S</td></tr> <tr><td style="text-align: center;"> ¼</td></tr> <tr><td style="text-align: center;"> S 19</td></tr> <tr><td style="text-align: center;"> R 19 E</td></tr> </table>	T 12 S	¼	S 19	R 19 E						
T 12 S											
¼											
S 19											
R 19 E											
	1969										
	Raise a mound of stone, 2½ ft. base, 3½ ft. high, W of cor.										
41.32	Point for the ¼ sec. cor. of sec. 24, T. 12 S., R. 18 E.										
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="text-align: center;">T 12 S</td><td style="text-align: center;"> </td></tr> <tr><td style="text-align: center;">¼</td><td style="text-align: center;"> </td></tr> <tr><td style="text-align: center;">S 24</td><td style="text-align: center;"> </td></tr> <tr><td style="text-align: center;">R 18 E</td><td style="text-align: center;"> </td></tr> </table>	T 12 S		¼		S 24		R 18 E			
T 12 S											
¼											
S 24											
R 18 E											
	1969										
	Raise a mound of stone, 2½ ft. base, 3 ft. high, W of cor.										
49.10	Spur, slopes W, over rolling W slope.										
80.24	The cor. of secs. 18 and 19, monumented with a sandstone, 18 x 6 x 4 ins., firmly set 9 ins. in the ground, mkd. 3 notches on the N and S.										
	At the corner point										
	Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.										

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

T 12 S		R 19 E
R 18 E		
S 24		S 18
		S 19

1969

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

N. 0° 11' W., along the W. bdy. of sec. 18.

Asc. over steep SW slope through sparse sagebrush and grasses.

1.08 Point for the cor. of secs. 13 and 24, T. 12 S., R. 18 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 12 S		R 19 E
R 18 E		
S 13		S 18
S 24		

1969

Raise a mound of stone, 2½ ft. base, 3 ft. high, W of cor.

28.10 Spur, slopes NW; desc. over NE slope.

40.00 The ¼ sec. cor. of sec. 18, monumented with a limestone, 18 x 9 x 4 ins., firmly set 9 ins. in the ground, mkd. ¼ on W face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 12 S	
¼	
S 18	
R 19 E	

1969

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.

N. 0° 20' W., beginning new measurement.

1.08 Point for the ¼ sec. cor. of sec. 13, T. 12 S., R. 18 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 12 S	
¼	
S 13	
R 18 E	

1969

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS	
	Raise a mound of stone, 2½ ft. base, 2½ ft. high, W of cor.
34.40	Rim, bears E and W; thence over mesa.
34.90	Rim, bears E and W; desc. over steep NW slope through sparse sagebrush and grasses.
39.92	The cor. of secs. 7 and 18, monumented with a sandstone, (record, quartzite), 24 x 7 x 4 ins., firmly set 15 ins. in the ground, mkd. 4 notches on S and 2 notches on N edges.
	This cor. is located on the broken north rim of a dry wash, 4 ft. high, an unsafe location for this monument. I removed this stone and placed at the witness corner, hereinafter described.
	N. 0° 02' E., along the W. bdy. of sec. 7.
0.54	Point selected for the witness cor. to the cor. of secs. 7 and 18.
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base, to top of brass cap, mkd.
	<div style="text-align: center;"> <p>T 12 S R 18 E R 19 E S 13 S 7 S 18 ↓ W C 1969</p> </div>
	Deposit the mkd. stone, described at the true point, alongside the iron post.
1.16	Point for the cor. of secs. 12 and 13, T. 12 S., R. 18 E.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 2½ ft. base, to top of brass cap, mkd.
	<div style="text-align: center;"> <p>T 12 S R 18 E R 19 E S 12 S 7 S 13 1969</p> </div>
39.99	The ¼ sec. cor. of sec. 7, monumented with a sandstone, 16 x 11 x 3 ins., (record, limestone, 18 x 5 x 4 ins.) loosely set 6 ins. in the ground, mkd. ¼ on W face.
	At the corner point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 2 ft. base, to top of brass cap, mkd.

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

T 12 S
1/4
S 7
R 19

1969

Deposit the mkd. stone alongside the iron post at the base of mound of stone.

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

N. 1° 18' W., beginning new measurement.

Desc. over NW slope.

1.17 Point for the 1/4 sec. cor. of sec. 12, T. 12 S., R. 18 E.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 2 1/2 ft. base, to top of brass cap, mkd.

T 12 S
1/4
S 12
R 18 E

1969

Raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W of cor.

2.40 Dry wash, drains W; asc. over steep SW slope through sparse sagebrush and grasses.

11.20 Rim, bears SE and NW; thence over gently rolling mesa through scattered sagebrush and grasses.

30.70 Rim, bears E and W; desc. over steep NE slope.

40.14 The cor. of secs. 6 and 7, monumented with a sandstone, 24 x 4 x 3 ins., (record, 18 x 10 x 4 ins.), set 8 ins. in the ground, mkd. 5 notches on S and 1 notch on N edge.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.

T 12 S
R 18 E
S 12
R 19 E
S 6
S 7

1969

Deposit the mkd. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.

Cor. is located on a prominent spur, slopes NE.

Dependent Resurvey of the West Boundary of
T. 12 S., R. 19 E., Salt Lake Meridian, Utah

CHAINS

- N. 0° 25' W., along the W. bdy. of sec. 6.
Desc. over gentle N slope, over grassland through sagebrush.
- 1.03 Point for the cor. of secs. 1 and 12, T. 12 S., R. 18 E.
Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
- | | |
|--------|--------|
| T 12 S | |
| R 18 E | R 19 E |
| S 1 | S 6 |
| S 12 | S 6 |
- 1969
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.
- 26.50 Dry wash, 130 lks. wide, drains SW; asc. over steep SE slope.
- 40.43 The ¼ sec. cor. of sec. 6, monumented with an iron post, 2½ ins. diam., firmly set, projecting 20 ins. above ground, and in a mound of stone, 4½ ft. base, to top of brass cap mkd. as described in the official record of the 1961 resurvey.
- _____
- N, 0° 20' W., beginning new measurement.
Asc. over steep SE slope.
- 0.60 Point for the ¼ sec. cor. of sec. 1, T. 12 S., R. 18 E.
Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of brass cap, mkd.
- | | |
|--------|--------|
| T 12 S | |
| R 18 E | R 19 E |
| ¼ | |
| S 1 | |
- 1969
- Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
- 4.10 Rim, bears NE and SW; thence over gently rolling mesa through scattered sagebrush and grasses.
- 21.26 The closing cor. of Tps. 11 and 12 S., R. 18 E., monumented with an iron post, projecting 20 ins. above ground, and set in a mound of stone, 3 ft. base, to top of brass cap, mkd. as described in the official record of the 1961 survey of the S. bdy. of T. 11 S., R. 18 E.
- 27.50 Wash, 20 lks. wide, 2 ft. deep, drains W.
- 31.20 Top of rim, bears SE and NW; desc. over N slope.
- 40.05 The cor. of Tps. 11 and 12 S., R. 19 E., monumented with an iron post, 2½ ins. diam., firmly set, projecting 22 ins. above the ground and in a mound of stone, 4½ ft. base, to top of brass cap, mkd. as described in the official record of the 1961 resurvey.

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	Dependent Resurvey of the South Boundary, T. 11 S., R. 18 E., Salt Lake Meridian Utah												
	(Restoring the Survey Executed by Craig P. Sylvester, Fred R. Chappell, and Glen B. Hatch, in 1961)												
	From the closing cor. of Tps. 11 and 12 S., R. 18 E., hereinbefore described.												
	West, on the S. bdy. of sec. 36.												
	Over gently rolling mesa through scattered sagebrush and grasses.												
6.20	Rim, bears NE and SW; desc. steep NW slope.												
36.59	Point for the ¼ sec. cor. of sec. 1, T. 12 S., R. 18 E., established at a point 40.00 chs. easting from the sec. cor. of secs. 1 and 2.												
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of brass cap, mkd.												
	<table border="0"> <tr><td colspan="2">¼ S 1</td></tr> <tr><td colspan="2">T 12 S R 18 E</td></tr> <tr><td colspan="2">1972</td></tr> </table>	¼ S 1		T 12 S R 18 E		1972							
¼ S 1													
T 12 S R 18 E													
1972													
	Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.												
	Over broken benches and ravines.												
40.00	The ¼ sec. cor. of sec. 36, monumented with an iron post, 2½ ins. diam., firmly set and projecting 14 ins. above ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd. as described in the official record of the 1961 survey. I change the marks to read for sec. 36 only and added 1972.												
	<table border="0"> <tr><td colspan="2">West, beginning new measurement.</td></tr> </table>	West, beginning new measurement.											
West, beginning new measurement.													
28.00	Prominent spur, slopes N.												
36.59	Point for the cor. of secs. 1 and 2, T. 12 S., R. 18 E., established at a point North from the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of T. 12 S., R. 18 E.												
	Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.												
	<table border="0"> <tr><td colspan="2">T 11 S R 18 E</td></tr> <tr><td colspan="2">.</td></tr> <tr><td colspan="2">S 36</td></tr> <tr><td colspan="2">S 2 S 1</td></tr> <tr><td colspan="2">T 12 S</td></tr> <tr><td colspan="2">1972</td></tr> </table>	T 11 S R 18 E		.		S 36		S 2 S 1		T 12 S		1972	
T 11 S R 18 E													
.													
S 36													
S 2 S 1													
T 12 S													
1972													
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of cor.												

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
40.00	<p>The original cor. of secs. 1, 2, 35, and 36, monumented with an iron post, 2½ ins. diam., firmly set and projecting 12 ins. above ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd. as described in the official record of the 1961 survey. I change the marks to read for secs. 35 and 36 only and add 1972.</p>	
	<p>West, along the S. bdy. of sec. 35.</p>	
	<p>Asc. gentle E slope over grass land.</p>	
5.30	<p>Small knoll; thence over rolling land through sagebrush.</p>	
20.90	<p>The witness cor. to the ¼ sec. cor. of sec. 35, monumented with an iron post, firmly set and projecting 24 ins. above ground, in a mound of stone, 4 ft. base, to top of brass cap, mkd. as described in the official record of the 1961 survey.</p>	
	<p>West, beginning new measurement.</p>	
0.90	<p>True point for the ¼ sec. cor. of sec. 35, on ledge about 50 ft. high, facing NW, and impracticable to monument.</p>	
15.69	<p>Point for the ¼ sec. cor. of sec. 2.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;"> $\frac{1}{4} \quad S \quad 2$ $T \quad 12 \quad S \quad R \quad 18 \quad E$ </p>	
	<p style="text-align: center;">1972</p>	
	<p>Raise a mound of stone, 3 ft. base, 3 ft. high, S of cor.</p>	
	<p>Cor. is located on steep N slope.</p>	
35.90	<p>Spur, slopes N; desc. over broken ledges and NW slope.</p>	
40.85	<p>The cor. of secs. 34 and 35, monumented with an iron post, 2½ ins. diam., firmly set and projecting 20 ins. above ground, in a mound of stone, 3 ft. base, to top of brass cap, mkd. as described in the official record of the 1961 survey. I added to the brass cap S2 and 1972.</p>	
	<p>West, along the S. bdy. of sec. 34.</p>	
	<p>Over canyon lands.</p>	
14.84	<p>Point for the cor. of secs. 2 and 3, T. 12 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	
	<p style="text-align: center;">T 11 S</p>	
	<p style="text-align: center;"> $\frac{S \quad 34}{S \quad 3 \quad \quad S \quad 2}$ $T \quad 12 \quad S \quad R \quad 18 \quad E$ </p>	
	<p style="text-align: center;">1972</p>	

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS										
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, S of cor.</p>									
	<p>Over nearly level river bottom through salt cedar and willows.</p>									
26.57	<p>The original meander cor. of secs. 3 and 34, on the left bank of the Green River, monumented with an iron post, 2½ ins. diam., firmly set and projecting 8 ins. above ground, with brass cap, mkd. as described in the official record of the 1961 survey.</p> <p>Thence across Green River.</p>									
39.84	<p>Point for the ¼ sec. cor. of sec. 34, at proportionate distance, falls in Green River.</p>									
47.01	<p>True point for the original meander cor. of secs. 3 and 34, on the right bank of the Green River and point for AP-1, Tract 37, at record bearing and distance from the original witness cor.</p> <p>Thence over nearly level river bottom through dense salt cedar and willow.</p>									
48.50	<p>The original witness cor. to the meander cor. of secs. 3 and 34, on the right bank of the Green River, monumented with an iron post, 2½ ins. diam., firmly set and projecting 8 ins. above the ground, with brass cap, mkd. as described in the official record of the 1961 survey.</p> <p>This cor. is also designated as a witness cor. for AP-1, Tract 37, and I add AP-1, TR-37, 1972 to brass cap.</p>									
54.84	<p>Point for the ¼ sec. cor. of sec. 3, T. 12 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" data-bbox="802 1677 1013 1757"> <tr> <td colspan="2" style="border: none;">¼</td> <td style="border: none;">S 3</td> </tr> <tr> <td style="border: none;">T 12 S</td> <td style="border: none;">R 18 E</td> <td style="border: none;"></td> </tr> </table> <p data-bbox="883 1776 948 1803">1972</p> </div> <p>No accessories available.</p>	¼		S 3	T 12 S	R 18 E				
¼		S 3								
T 12 S	R 18 E									
71.85	<p>Asc. over steep SE slopes and ledges.</p>									
79.68	<p>The original cor. of secs. 3, 4, 33, and 34, monumented with an iron post, 3 ins. diam., firmly set and projecting 18 ins. above ground, in a mound of stone, 4 ft. base, to top of brass cap, mkd. as described in the official record of the 1909 survey.</p> <p>This cor. will now function for secs. 33 and 34 and is designated as Angle Point No. 2, Tract 37. I change the marks to read:</p> <div style="text-align: center;"> <table border="1" data-bbox="818 2295 1029 2456"> <tr> <td colspan="2" style="border: none;">T 11 S R 18 E</td> </tr> <tr> <td style="border: none;">S 33</td> <td style="border: none;">S 34</td> </tr> <tr> <td style="border: none;">S 3</td> <td style="border: none;">AP-2</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">TR-37</td> </tr> </table> <p data-bbox="818 2483 1029 2537">T 12 S R 18 E 1972</p> </div>	T 11 S R 18 E		S 33	S 34	S 3	AP-2		TR-37	
T 11 S R 18 E										
S 33	S 34									
S 3	AP-2									
	TR-37									

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p>(Restoring the Survey Executed by H.D. Heist and W.A. Stumm, in 1909)</p> <hr/> <p>S. 89° 55' W., along the S. bdy. of sec. 33. Asc. steep W slope.</p>	
1.30	Prominent spur, slopes S, thence over rolling mesa through sagebrush and grass.	
15.16	Point for the cor. of secs. 3 and 4, T. 12 S., R. 18 E. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
	<p>T 11 S</p> <hr/> <p>S 33</p> <hr/> <p>S 4 S 3</p>	
	<p>T 12 S R 18 E</p> <p>1972</p>	
	Raise a mound of stone, 2½ ft. base, 4 ft. high, S of cor. Set on a gentle NE slope.	
40.90	The original ¼ sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., firmly set and projecting 12 ins. above ground, in a scattered mound of stone, with brass cap mkd. as described in the official record of the 1909 survey. This cor. will now function for sec. 33 only. I removed S4 and added 1972 to brass cap. Restore the mound of stone, 4 ft. base, to top of brass cap.	
	<hr/> <p>S. 89° 53' W., beginning new measurement.</p>	
35.50	Canyon rim, bears N and S; thence in broken canyon.	
14.26	Point for the ¼ sec. cor. of sec. 4, on an overhanging ledge and unsafe to monument due to the liability of destruction by erosion.	
14.39	Point selected for the witness cor. to the ¼ sec. cor. of sec. 4, T. 12 S., R. 18 E. Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) cut in sandstone ledge, in a mound of stone, 4 ft. base, to top of brass cap, mkd.	
	<p>¼ S 4 → WC</p> <p>T 12 S R 18 E</p> <p>1972</p>	

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
31.60	Rim, bears N and S; desc. steep canyon.	
38.95	<p>The original cor. of secs. 4, 5, 32, and 33, monumented with an iron post, 3 ins. diam., firmly set and projecting 10 ins. above a mound of stone, 3 ft. base, 20 ins. high, with brass cap, mkd. as described in the official record of the 1909 survey.</p> <p>This cor. will now function for secs. 32 and 33 only. I removed S5 and added 1972 to brass cap.</p> <p>An original mound of stone, 3 ft. base, 1½ ft. high, West, 5 lks. dist.</p>	
9.00	<p>N. 89° 53' W., along the S. bdy. of sec. 32.</p> <p>Asc. steep SE slope.</p> <p>Canyon rim, bears NE and SW; thence over rolling grass land through sagebrush.</p>	
15.31	<p>Point for the cor. of secs. 4 and 5, T. 12 S., R. 18 E., on a gentle SE slope.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 11 S S 32 ----- S 5 S 4 T 12 S R 18 E 1972</p>	
40.98	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.</p> <p>The original ¼ sec. cor. of secs. 5 and 32, monumented with an iron post, 1 in. diam., firmly set and projecting 10 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.</p> <p>This cor. will now function for sec. 32 only.</p> <p>I removed S5 and added 1972 to brass cap.</p> <p>Original mound of stone, 3 ft. base, 1½ ft. high, N of cor.</p> <p style="text-align: center;">-----</p> <p>S. 89° 59' W., beginning new measurement.</p> <p>Asc. steep NE slope.</p>	
14.33	<p>Point for the ¼ sec. cor. of sec. 5, T. 12 S., R. 18 E., on steep E slope.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">----- ¼ S 5 T 12 S R 18 E 1972</p>	

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
38.87	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, S of cor.</p> <p>The original cor. of secs. 5, 6, 31, and 32, monumented with an iron post, 3 ins. diam., firmly set and projecting 20 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.</p> <p>This cor. will now function for secs. 31 and 32 only.</p> <p>I removed S6 and added 1972 to brass cap.</p> <p>Original mound of stone, 4 ft. base, 2 ft. high, W of cor.</p>	
15.46	<p>West, along the S. bdy. of sec. 31.</p> <p>Asc. steep SE slope.</p> <p>True point for the cor. of secs. 5 and 6, T. 12 S., R. 18 E., located under an overhanging ledge. An unsafe location for monument.</p>	
16.50	<p>Rim, bears SE and NW; thence over gently rolling grass land through sagebrush.</p>	
16.76	<p>Point selected for the witness cor. to the cor. of secs. 5 and 6, T. 12 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 11 S</p> <p style="text-align: center;"> $\begin{array}{c} \text{S 31} \\ \hline \text{S 6} \mid \text{S 5} \end{array} \rightarrow \text{WC}$ </p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">1972</p>	
39.93	<p>The original ¼ sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., firmly set and projecting 10 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.</p> <p>This cor. will now function for sec. 31 only.</p> <p>I removed S6 and added 1972 to brass cap.</p> <p>Restore the mound of stone, 2½ ft. base, 1½ ft. high, N of cor.</p> <p style="text-align: center;">_____</p> <p>S. 89° 49' W., beginning new measurement.</p> <p>Over gently rolling grass land through scattering sagebrush.</p>	
15.53	<p>Point for the ¼ sec. cor. of sec. 6, T. 12 S., R. 18 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	

Dependent Resurvey of the South Boundary,
T. 11 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

$\frac{1}{4}$ S 6
 T 12 S R 18 E

1972

40.26

The cor. of Tps. 11 and 12 S., Rs. 17 and 18 E., monumented with an iron post, 3 ins. diam., firmly set and projecting 24 ins. above ground, in a mound of stone, 4 ft. base, to top of brass cap, mkd. as described in the official record of the 1909 survey.

Survey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of Tps. 12 S., Rs. 17 and 18 E., established on the N. bdy. of T. 13 S., R. 18 E., and South from the original witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, hereinafter described.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 12 S
 R 17 E | R 18 E
 S 36 | S 31
 S 6

T 13 S R 18 E
1972

Set on steep SE slope.

From this cor., the witness cor. to the meander cor. of secs. 6 and 31, bears S. 89° 56' E., 7.13 chs. dist., set and mkd. as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.

North, on the W. bdy. of sec. 31.

Over an inaccessible spur.

12.64

Point selected for the witness cor. to the meander cor. of secs. 31 and 36, on the right bank of the Green River.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of aluminum cap, mkd.

W C
 T 12 S
 R 17 E | R 18 E

M C
 S 36 | S 31

1981

Survey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

- 13.27 Right bank of the Green River; point for meander cor. of secs. 31 and 36, falls on unstable river bank.
- 25.77 Left bank of the Green River; point for meander cor. of secs. 31 and 36, falls on unstable river bank.
- 26.04 Point selected for the witness cor. to the meander cor. of secs. 31 and 36, on the left bank of the Green River.
- Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

W C
T 12 S
R 17 E R 18 E

S 36 | S 31

M C
1981

- 40.00 Point for the ¼ sec. cor. of sec. 31, on a steep W slope E of the Green River.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

| T 12 S
| ¼
| S 31
| R 18 E

1972

Asc. steep SW slope through boulders.

- 54.60 Spur, slopes W; desc. steep NW slope.

- 74.13 Point selected for the witness cor. to the cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

W C
↑
| T 12 S
| S 30
| S 31
| R 18 E

1972

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Set in salt cedar on high sand bank.

This cor. is also designated as the witness cor. to the meander cor. of secs. 31 and 36, on the left bank of the Green River.

Survey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
74.28	Left bank of the Green River; point for meander cor. of secs. 31 and 36, falls on unstable river bank.
80.00	True point for the cor. of secs. 30 and 31, falls in the Green River.
	Land, broken and portions inaccessible. Soil, sandy loam and alluvial silt. Timber, none. Undergrowth, salt cedar.
	North, on the W. bdy. of sec. 30. Across river and over inaccessible ledges and slopes in Desolation Canyon.
0.97	Right bank of the Green River; point for meander cor. of secs. 25 and 30, falls on unstable river bank.
1.36	Point selected for the witness cor. to the meander cor. of secs. 25 and 30, on the right bank of the Green River.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
	<p style="text-align: center;">W C T 12 S R 17 E R 18 E S 25 S 30 — MC 1981</p>
32.48	Point selected for the witness cor. to the ¼ sec. cor. of sec. 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	<p style="text-align: center;">W C ↑ T 12 S R 18 E ¼ S 30 1972</p>
40.00	True point for the ¼ sec. cor. of sec. 30, falls on inaccessible NW slopes above Green River; an unsafe location for monument.
57.38	Point selected for a witness point in Rock House Bottom.
	Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.

Survey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

848

CHAINS																									
	W P T 12 S S 30 R 18 E 1972																								
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor. This monument is set at the top of a talus slope on the S side of a canyon bottom, approximately 12 chs. west of Green River. Over nearly level Rock House Bottom.																								
67.00	Asc. steep in accessible SW slope.																								
79.81	Point for the cor. of secs. 19, 24, 25, and 30, Tps. 12 S., Rs. 17 and 18 E., at record course and distance hereinafter described. This corner point is on a steep shale slide of W slope and there is no remaining evidence of the position of the original corner witnessed as hereinafter described. Land, broken canyons and portions inaccessible. Soil, rocky and sandy loam. Timber, none. Undergrowth, salt cedar in the bottom.																								
Dependent Resurvey of a Portion of the West Boundary, T. 12 S., R. 18 E., Salt Lake Meridian, Utah																									
(Restoring the Survey Executed by H.D. Heist and W.A. Stumm, in 1909)																									
	North, bet. secs. 19 and 24. Asc. steep SW slope.																								
8.63	On a prominent spur, slopes SW; point selected for the witness cor. to the cor. of secs. 19, 24, 25, and 30. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.																								
	<table style="margin: auto;"> <tr> <td></td> <td style="text-align: center;">T 12 S</td> <td></td> </tr> <tr> <td style="text-align: center;">R 17 E</td> <td style="text-align: center;"> </td> <td style="text-align: center;">R 18 E</td> </tr> <tr> <td></td> <td style="text-align: center;">↓</td> <td></td> </tr> <tr> <td style="text-align: center;">S 24</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 19</td> </tr> <tr> <td style="text-align: center;">S 25</td> <td style="text-align: center;"> </td> <td style="text-align: center;">S 30</td> </tr> <tr> <td></td> <td style="text-align: center;">↓</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">W C</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">1972</td> <td></td> </tr> </table>		T 12 S		R 17 E		R 18 E		↓		S 24		S 19	S 25		S 30		↓			W C			1972	
	T 12 S																								
R 17 E		R 18 E																							
	↓																								
S 24		S 19																							
S 25		S 30																							
	↓																								
	W C																								
	1972																								
	Over broken canyons and steep SW slopes through scattered sagebrush and bunch grass.																								

Dependent Resurvey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
40.00	True point for the ¼ sec. cor. of secs. 19 and 24, on inaccessible ledges, witnessed as hereinafter described.	
45.02	The original witness cor. to the ¼ sec. cor. of secs. 19 and 24, monumented with an iron post, 1 in. diam., firmly set and projecting 8 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.	
	Added 1972 to brass cap.	
	Raise a mound of stone, 4 ft. base, 4 ft. high, W of cor.	
	North, beginning new measurement.	
	Asc. steep SW slope.	
6.89	Prominent spur, slopes W; point selected for a witness point.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.	
	<div style="text-align: center;"> <p>W P</p> <p>T 12 S</p> <p>R 17 E R 18 E</p> <p>S 24 S 19</p> <p>1972</p> </div>	
	Asc. rolling SW slope.	
35.12	The cor. of secs. 13, 18, 19, and 24, monumented with an iron post, 3 ins. diam., firmly set and projecting 18 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.	
	Added 1972 to brass cap.	
	Original mound of stone, 3 ft. base, 2½ ft. high, W of cor.	
	N. 0° 18' E., bet. secs. 13 and 18.	
	Asc. vertical ledges.	
0.90	High rim, bears NE and SW; thence over gently rolling mesa through scattered cedar.	
40.08	The ¼ sec. cor. of secs. 13 and 18, monumented with an iron post, 1 in. diam., firmly set and projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1909 survey.	
	from which the original bearing trees	
	A cedar, 10 ins. diam., bears N. 83° E., 39 lks. dist., mkd. ¼ S18 BT.	
	A cedar, 10 ins. diam., bears N. 79° W., 42 lks. dist., mkd. ¼ S13 BT.	

Dependent Resurvey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS																	
	<p>I added 1972 to brass cap.</p> <hr/> <p>N. 0° 09' W., beginning new measurement.</p> <p>4.20 Rim, bears NE and SW; desc. steep NW slope.</p> <p>34.00 Prominent spur, slopes E; desc. gentle N slope.</p> <p>40.15 Point for the sec. cor. of secs. 7, 12, 13, and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock over a cross (X), in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>T 12 S</td><td></td></tr> <tr><td>R 17 E</td><td> </td><td>R 18 E</td></tr> <tr><td></td><td>S 12</td><td>S 7</td></tr> <tr><td></td><td>S 13</td><td>S 18</td></tr> </table> <p style="text-align: center;">1969</p>		T 12 S		R 17 E		R 18 E		S 12	S 7		S 13	S 18				
	T 12 S																
R 17 E		R 18 E															
	S 12	S 7															
	S 13	S 18															
	<p>N. 0° 09' W., bet. secs. 7 and 12.</p> <p>Over rolling broken canyons.</p> <p>0.20 Rim of deep canyon, bears NE and SW.</p> <p>28.70 Prominent wide spur; desc. gentle NE slope.</p> <p>36.30 Rim of Maverick Canyon, bears NE and SW.</p> <p>40.15 Point for the ¼ sec. cor. of secs. 7 and 12, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>T 12 S</td><td> </td><td></td></tr> <tr><td></td><td>¼</td><td> </td><td></td></tr> <tr><td>S 12</td><td> </td><td>S 7</td><td></td></tr> <tr><td>R 17 E</td><td> </td><td>R 18 E</td><td></td></tr> </table> <p style="text-align: center;">1972</p> <p>Cor. is located on steep NW slope.</p> <p>41.00 Maverick Canyon, course NE; asc. steep SW slope.</p> <p>68.20 Prominent spur, slopes W; desc. NW slope.</p> <p>80.30 The cor. of secs. 1, 6, 7, and 12, monumented with an iron post, 3 ins. diam., firmly set and projecting 10 ins. above a mound of stone, 4 ft. base, 10 ins. high, with brass cap mkd. as described in the official record of the 1909 survey.</p>		T 12 S				¼			S 12		S 7		R 17 E		R 18 E	
	T 12 S																
	¼																
S 12		S 7															
R 17 E		R 18 E															

Dependent Resurvey of a Portion of the West Boundary,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Added 1972 to brass cap.</p> <p>Raise a mound of stone to top of brass cap.</p> <p>Original mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>
8.48	<p>N. 0° 11' E., bet. secs. 1 and 6.</p> <p>Asc. steep S slopes, talus, and vertical ledges.</p> <p>Rim, bears E and W, and a cairn of stone, 4 ft. base, 4 ft. high.</p> <p>Over gently rolling mesa through scattered sagebrush and grass land.</p>
40.09	<p>The ¼ sec. cor. of secs. 1 and 6, monumented with an iron post, 1 in. diam., firmly set and projecting 10 ins. above ground, with brass cap, mkd. as described in the official record of the 1909 survey.</p>
	<p>N. 0° 10' E., beginning new measurement.</p>
19.40	<p>Dry wash, 10 lks. wide, course NW.</p>
19.58	<p>The cor. of Tps. 11 and 12 S., Rs. 17 and 18 E., hereinbefore described.</p>
<p>Survey of a Portion of the Subdivisional Lines of T. 12 S., R. 18 E., Salt Lake Meridian, Utah</p>	
	<p>From the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., monumented as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.</p> <p>North, on the Sectional Guide Meridian between secs. 35 and 36.</p> <p>Over rolling land, through sagebrush and grasses.</p>
0.80	<p>Dry wash, 15 lks. wide, drains NW.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 35 and 36.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p>T 12 S R 18 E</p> <p>¼</p> <p>S 35 S 36</p> <p>1972</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS							
	Asc. over steep SW slope.						
64.40	Prominent ridge, 1½ chs. wide, bears NE and SW; desc. over NW slope.						
80.00	Point for the cor. of secs. 25, 26, 35, and 36.						
	Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.						
	T 12 S R 18 E						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 26</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 25</td> </tr> <tr> <td style="padding: 2px;">S 35</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 36</td> </tr> </table>	S 26		S 25	S 35		S 36
S 26		S 25					
S 35		S 36					
	1972						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.						
	Cor. is located on gentle NW slope.						
	Land, rolling.						
	Soil, sandy and clay loam.						
	No timber.						
	Undergrowth, sagebrush and grasses.						
38.14	From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., hereinbefore described.						
	N. 89° 55' W., bet. secs. 25 and 36.						
	Over mountainous land, through sagebrush and grasses.						
38.14	Point for the ¼ sec. cor. of secs. 25 and 36.						
	Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.						
	T 12 S R 18 E						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="padding: 2px;">S 25</td> </tr> <tr> <td></td> <td style="padding: 2px;">S 36</td> </tr> </table>	¼	S 25		S 36		
¼	S 25						
	S 36						
	1972						
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of cor.						
	Cor. is located in canyon bottom.						
78.14	The cor. of secs. 25, 26, 35, and 36, on the E. bdy. of the Tp.						
	Land, rolling and broken.						
	Soil, sandy and clay loam.						
	No timber.						
	Undergrowth, scattering sagebrush and grasses.						
	North, on the Sectional Guide Meridian, bet. secs. 25 and 26.						
	Asc. over steep SW slope.						
15.60	Rim, bears SE and NW; thence over rolling mesa.						
29.10	Rim, bears NE and SW; desc. over steep NW slope.						

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
35.80	Bottom of descent; thence along W slope.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>
<p>T 12 S R 18 E</p> <p style="margin-left: 100px;">$\frac{1}{4}$</p> <p style="margin-left: 80px;">S 26 S 25</p> <p style="margin-left: 100px;">1972</p>	
Asc. over steep SW slope.	
49.00	Rim, bears SE and NW; thence over nearly level mesa.
53.60	Rim, bears NE and SW; thence over NW slope.
67.00	Prominent spur, slopes NW; desc. over steep NE slope.
80.00	<p>Point for the cor. of secs. 23, 24, 25, and 26.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
<p>T 12 S R 18 E</p> <p style="margin-left: 100px;">S 23 S 24</p> <p style="margin-left: 100px;">S 26 S 25</p> <p style="margin-left: 100px;">1972</p>	
Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.	
Cor. is located on gentle N slope.	
Land, rolling.	
Soil, sandy and clay loam.	
No timber.	
Undergrowth, sagebrush and grasses.	
<p>From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., hereinbefore described.</p>	
N. $89^{\circ} 51'$ W., bet. secs. 24 and 25.	
Over mountainous land through scattering sagebrush and grasses.	
24.00	Dry wash, 15 lks. wide, drains NE.
38.28	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 7 ins. in the ground over a cross (X) chiseled on bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
78.28	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$</p> <p style="text-align: center;">1972</p> <p>The cor. of secs. 23, 24, 25, and 26.</p> <p>Land, rolling to broken canyons. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	
1.00	<p>North, on the Sectional Guide Meridian, bet. secs. 23 and 24.</p> <p>Along a gently rolling canyon through sagebrush and grasses.</p> <p>Dry wash, 10 lks. wide, drains NW.</p>	
38.40	<p>Prominent spur, slopes NW; desc. over N slope.</p>	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, $2\frac{1}{2}$ ft. base, to top of brass cap, mkd.</p>	
76.60	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 23 S 24</p> <p style="text-align: center;">1972</p> <p>Prominent spur, slopes W; desc. over N slope.</p>	
80.00	<p>Point for the cor. of secs. 13, 14, 23, and 24.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{S\ 14}{S\ 23}$ $\frac{S\ 13}{S\ 24}$</p> <p style="text-align: center;">1972</p> <p>Land, rolling canyon. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	
	<p>From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. $89^{\circ} 49'$ W., bet. secs. 13 and 24.</p>	

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	Over mountainous land, through sagebrush and grasses.
15.50	Dry wash, 15 lks. wide, drains NW.
37.15	West rim of narrow canyon.
38.16	Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	<p style="text-align: center;">T 12 S R 18 E</p> $\frac{1}{4} \begin{array}{c} \text{S 13} \\ \text{S 24} \end{array}$ <p style="text-align: center;">1972</p>
78.16	<p>The cor. of secs. 13, 14, 23, and 24.</p> <p>Land, broken canyons. Soil, sandy and clay loams. No timber. Undergrowth, sagebrush and grasses.</p>
	<p>North, on the Sectional Guide Meridian, bet. secs. 13 and 14.</p>
	Along rolling canyon through sagebrush and grasses.
37.30	Prominent narrow ridge, bears SE and NW; desc. over steep NE slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 12 S R 18 E</p> $\begin{array}{c} \frac{1}{4} \\ \\ \text{S 14} \quad \quad \text{S 13} \\ \end{array}$ <p style="text-align: center;">1972</p>
	Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W of cor.
70.00	Desc. over gentle N slope.
80.00	Point for the cor. of secs. 11, 12, 13, and 14.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 12 S R 18 E</p> $\begin{array}{c} \text{S 11} \quad \quad \text{S 12} \\ \text{S 14} \quad \quad \text{S 13} \end{array}$ <p style="text-align: center;">1972</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.</p> <p>Land, rolling canyons. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
37.89	<p>From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89° 46' W., bet. secs. 12 and 13.</p> <p>Over canyon land through sagebrush and grasses.</p> <p>Point for the ¼ sec. cor. of secs. 12 and 13.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 12}{S\ 13}$</p> <p style="text-align: center;">1972</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.</p> <p>Cor. is located on gentle NW slope.</p>
57.00	<p>Dry wash, 20 lks. wide, drains NW.</p>
77.89	<p>The cor. of secs. 11, 12, 13, and 14.</p> <p>Land, rolling canyon. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
1.50	<p>North, on the Sectional Guide Meridian, bet. secs. 11 and 12.</p> <p>Along canyon through sagebrush and grasses.</p>
10.50	<p>Canyon rim, bears NE and SW; thence across canyon.</p>
28.80	<p>Tabyago Canyon, drains SW.</p>
28.80	<p>Canyon rim, bears SE and NW; thence over rolling mesa.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 11 and 12.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">¼ $\frac{S\ 11}{S\ 12}$</p> <p style="text-align: center;">1972</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS							
80.00	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor. Point for the cor. of secs. 1, 2, 11, and 12.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">S 2</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 1</td> </tr> <tr> <td style="padding: 2px;">S 11</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 12</td> </tr> </table> </p> <p style="text-align: center;">1972</p> <p>Land, broken canyon and rolling. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	S 2		S 1	S 11		S 12
S 2		S 1					
S 11		S 12					
37.00	<p>From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89° 43' W., bet. secs. 1 and 12.</p> <p>Over rolling mesas and canyons through sagebrush and grasses.</p> <p>Point for the ¼ sec. cor. of secs. 1 and 12.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 2½ ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 1</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 12</td> </tr> </table> </p> <p style="text-align: center;">1972</p>	¼		S 1			S 12
¼		S 1					
		S 12					
55.00	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N of cor. Cor. is located on gentle NW slope.</p>						
77.00	<p>Tabyago Canyon, drains SW.</p> <p>The cor. of secs. 1, 2, 11, and 12.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>						
21.10	<p>North, on the Sectional Guide Meridian, bet. secs. 1 and 2. Over rolling mesa.</p> <p>Prominent spur, slopes NW.</p>						
40.00	<p>Point for the ¼ sec. cor. of secs. 1 and 2.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.</p>						

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 12 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 2 \quad | \quad \text{S } 1 \\ | \end{array}$$

1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W of cor.
Cor. is located on a wide and nearly level flat.

Over gently rolling land.

60.31 The cor. of secs. 1 and 2, on the N. bdy. of the Tp.,
hereinbefore described.

Land, rolling.

Soil, sandy and clay loam.

No timber.

Undergrowth, sagebrush and grasses.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy.
of the Tp., monumented as described in the field notes
of the concurrent survey of T. 13 S., R. 18 E.

N. $0^{\circ} 01'$ W., bet. secs. 34 and 35.

Over gently rolling N slope through sparse sagebrush
and grasses.

12.50 Prominent knoll; desc. over NW slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 21 ins.
in the ground, with brass cap mkd.

T 12 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 34 \quad | \quad \text{S } 35 \\ | \end{array}$$

1973

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

40.10 Dry wash, drains NW.

45.50 Dry wash, in canyon, drains W; asc. over steep SW slope.

80.00 Point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a
cross (X) chiseled on bedrock, in a mound of stone, 4 ft.
base, to top of brass cap, mkd.

T 12 S R 18 W

$$\begin{array}{c} \text{S } 27 \quad | \quad \text{S } 26 \\ \text{S } 34 \quad | \quad \text{S } 35 \end{array}$$

1973

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Cor. is located on steep W slope.
Land, rolling to broken.
Soil, sandy, clay loam with marl stone.
No timber.
Undergrowth, sparse sagebrush and grasses.

From the cor. of secs. 25, 26, 35, and 36.

N. 89° 55' W., bet. secs. 26 and 35.

Over rolling S slope, through sparse sagebrush and grasses.

33.90 Spur, slopes SW; desc. over SW slope.

39.00 Trail road, 15 lks. wide, bears N and S.

40.02 Point for the 1/4 sec. cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 12 S R 18 E

1/4 S 26 / S 35

1973

Over broken canyons and rolling N slope.

76.70 Desc. over steep SW slope.

80.04 The cor. of secs. 26, 27, 34, and 35.

Land, rolling to broken canyons.
Soil, sandy and clay loam.
No timber.
Undergrowth, sparse sagebrush and grasses.

N. 0° 01' W., bet. secs. 26 and 27.

Asc. over steep SW slope, through sparse sagebrush.

4.00 Rim, bears SE and NW.

4.70 Spur, slopes W; desc. over steep NW slope.

40.00 Point for the 1/4 sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 12 S R 18 E

1/4 S 27 | S 26

1973

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS					
74.10	Dry wash, 20 lks. wide, drains NW; asc. over steep N slope				
80.00	Point for the cor. of secs. 22, 23, 26, and 27.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.				
	T 12 S R 18 E				
	<table border="1"> <tr> <td>S 22</td> <td>S 23</td> </tr> <tr> <td>S 27</td> <td>S 26</td> </tr> </table>	S 22	S 23	S 27	S 26
S 22	S 23				
S 27	S 26				
	1973				
	Land, rolling and broken. Soil, sandy, clay loam and marl stone. No timber. Undergrowth, sparse sagebrush and grasses.				
	From the cor. of secs. 23, 24, 25, and 26.				
	N. 89° 56' W., bet. secs. 23 and 26.				
	Over gently rolling N slope, through sparse sagebrush and grasses.				
14.00	Dry wash, drains N.				
28.80	Ridge, bears N and S.				
31.70	Desc. over rolling SW slope.				
39.99	Point for the ¼ sec. cor. of secs. 23 and 26.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.				
	T 12 S R 18 E				
	<table border="1"> <tr> <td>¼</td> <td>S 23</td> </tr> <tr> <td></td> <td>S 26</td> </tr> </table>	¼	S 23		S 26
¼	S 23				
	S 26				
	1973				
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.				
60.60	Rim, bears SE and NE; desc. over steep W slope.				
79.98	The cor. of secs. 22, 23, 26, and 27.				
	Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.				
	N. 0° 01' W., bet. secs. 22 and 23.				
	Asc. over steep S slope, through sparse sagebrush and grasses.				
10.30	Rim, bears SE and NW; thence over gently rolling mesa.				

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
37.40	Rim, bears NE and SW; desc. over steep NW slope.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 22 S 23 1973 </p> <p>Over broken W slope of a canyon.</p>
78.85	<p>Point selected for the witness cor. to the cor. of secs. 14, 15, 22, and 23.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">W C</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> ^ S 15 S 14 S 22 S 23 1973 </p> <p>Cor. is located on spur, slopes NW.</p>
79.00	Vertical rim, 30 ft. high, bears NE and SW.
80.00	<p>True point for the cor. of secs. 14, 15, 22, and 23, which is located at an inaccessible location.</p> <p>Land, rolling and broken canyon. Soil, sandy, clay loam and marl stone. No timber. Undergrowth, sparse sagebrush and grasses.</p>
	<p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. $89^{\circ} 58'$ W., bet. secs. 14 and 23.</p>
	Over gently rolling canyon land, through sparse sagebrush and grasses.
23.50	Dry wash, drains NE.
39.30	Prominent spur, slopes N; thence over broken canyon and rolling mesa, through sparse sagebrush and grasses.
39.98	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>


Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 14}{S 23}$</p> <p style="text-align: center;">1973</p>
78.56	<p>Point selected for a witness point.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">W P T 12 S R 18 E</p>
	<p style="text-align: center;">$\frac{S 14}{S 23}$</p>
	<p style="text-align: center;">1973</p>
	<p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor. Cor. is located on a spur, slopes N.</p>
	<p>Desc. over abrupt W slope.</p>
79.96	<p>True point for the cor. of secs. 14, 15, 22, and 23.</p>
	<p>Land, rolling to broken canyon. Soil, sandy, clay loam and marl stone. No timber. Undergrowth, sparse sagebrush and grasses.</p>
	<p>N. 0° 01' W., bet. secs. 14 and 15.</p>
	<p>Over broken canyon through scattering sagebrush and grasses.</p>
21.30	<p>Tabyago Canyon, drains W.</p>
40.00	<p>True point for the ¼ sec. cor. of secs. 14 and 15, is located on a steep SE slope in a slide area. An unsafe place for a monument.</p>
40.50	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 14 and 15.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
	<p style="text-align: center;">W C T 12 S R 18 E</p>
	<p style="text-align: center;">$\frac{1}{4}$ S 15 S 14 ↓</p>
	<p style="text-align: center;">1973</p>
	<p>Cor. is located on a prominent spur, slopes E.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
71.90	Prominent spur, slopes NE.	
80.00	<p>Point for the cor. of secs. 10, 11, 14, and 15.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 10 & S 11 \\ \hline S 15 & S 14 \\ \hline \end{array}$ </p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on gentle SW slope.</p> <p>Land, broken rolling canyons. Soil, sandy, clay loam and marl stone. No timber. Undergrowth, sparse sagebrush and grasses.</p>	
	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. 89° 57' W., bet. secs. 11 and 14.</p> <p>Over S slope of broken canyon through sparse sagebrush and grasses.</p>	
23.70	Prominent spur, slopes N.	
35.40	Tabyago Canyon, drains S.	
39.97	<p>Point for the ¼ sec. cor. of secs. 11 and 14.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{c c} \hline S 11 \\ \hline S 14 \\ \hline \end{array}$ </p> <p style="text-align: center;">1973</p> <p>Cor. is located on prominent low knoll.</p>	
77.00	Desc. over steep SW slope.	
79.94	<p>The cor. of secs. 10, 11, 14, and 15.</p> <p>Land, broken and rolling canyons. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>	
	<p>N. 0° 01' W., bet. secs. 10 and 11.</p> <p>Asc. over SW slope through sparse sagebrush and grasses.</p>	
2.20	<p>Ridge, bears E and W; desc. over steep N slope and broken canyon to Green River.</p>	

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
10.14	<p>Point selected for the witness cor. to the meander cor. of secs. 10 and 11, on the left bank of the Green River.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">M C ----- S 10 S 11</p> <p style="text-align: center;">1981</p>
10.73	<p>Left bank of the Green River; point for the meander cor. of secs. 10 and 11, falls on unstable river bank.</p>
15.94	<p>Right bank of the Green River; point for the meander cor. of secs. 10 and 11.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">S 10 S 11 ----- M C</p> <p style="text-align: center;">1981</p>
31.40	<p>Asc. over gentle SE slope.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 10 and 11.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to boulders, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">  </p> <p style="text-align: center;">1973</p>
70.16	<p>Point selected for the witness cor. to the meander cor. of secs. 10 and 11, on the right bank of the Green River.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">M C ----- S 10 S 11</p> <p style="text-align: center;">1981</p>
70.42	<p>Right bank of the Green River; point for the meander cor. of secs. 10 and 11, falls on unstable river bank.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
80.00	<p>True point for the cor. of secs. 2, 3, 10, and 11, is located in the Green River.</p> <p>Land, rolling to broken. Soil, alluvial silt, sandy and clay loam. No timber. Undergrowth, sagebrush, french tamarisk and grasses.</p>	
	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>N. 89° 59' W., bet. secs. 2 and 11.</p> <p>Over gently rolling mesa through sparse sagebrush and grasses.</p>	
40.01	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 2}{S\ 11}$</p> <p style="text-align: center;">1973</p> <p>Cor. is located on a rim, bears SE and NW.</p> <p>Desc. over SE slope to the Green River.</p>	
68.46	<p>Left bank of the Green River; point for the meander cor. of secs. 2 and 11.</p> <p>Set an aluminum post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">MC $\frac{S\ 2}{S\ 11}$</p> <p style="text-align: center;">1981</p>	
80.02	<p>True point for the cor. of secs. 2, 3, 10, and 11.</p> <p>Land, rolling to broken. Soil, sandy, clay loam and alluvial silt. No timber. Undergrowth, sparse sagebrush, french tamarisk and grasses.</p>	
	<p>N. 0° 06' W., bet. secs. 2 and 3.</p>	
2.18	<p>Left bank of the Green River; point for the meander cor. of secs. 2 and 3, falls on unstable river bank.</p>	
5.57	<p>Point selected for the witness cor. to the cor. of secs. 2, 3, 10, and 11.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>	




Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 3 & S 2 \\ \hline S 10 & S 11 \\ \hline \end{array}$ V 1973 </p> <p>This cor. is also designated as the witness cor. to the meander cor. bet. secs. 2 and 3 on the left bank of the Green River.</p> <p>Asc. over rolling SW slope.</p>	
35.70	Rim, bears SE and NW; thence over rolling mesa through sparse sagebrush and grasses.	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 2 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ \\ S 3 \quad \quad S 2 \\ \\ 1973 \end{array}$ </p>	
	<p>Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, N of cor.</p>	
53.20	Rim, bears NE and SW; desc. over steep NW slope.	
60.31	<p>The cor. of secs. 2 and 3, on the N. bdy. of the Tp., hereinbefore described.</p> <p>Land, gently rolling to broken. Soil, alluvial silt, sandy and clay loam. No timber. Undergrowth, willows, french tamarisk, scattering sagebrush and grasses.</p>	
	<p>From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., monumented as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.</p>	
	<p>N. $0^{\circ} 02'$ W., bet. secs. 33 and 34.</p>	
	<p>Asc. over steep N slope, through scattering sagebrush and grasses.</p>	
20.00	Rim, bears E and W; thence over gently rolling mesa through scattering juniper.	
31.90	Rim, bears E and W; desc. over steep NE slope, through sagebrush and grasses.	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 33 S 34 1972 </p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p> <p>80.00 Point for the cor. of secs. 27, 28, 33, and 34.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> S 28 S 27 S 33 S 34 1972 </p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W of cor.</p> <p>Land, rolling. Soil, sandy and clay loam. Timber, scattering juniper. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>N. 89° 57' W., bet. secs. 27 and 34.</p> <p>Desc. over steep SW slope of Tabyago Canyon.</p> <p>23.90 West Tabyago Canyon, drains N; asc. over steep NE slope.</p>
	<p>40.01 Point for the ¼ sec. cor. of secs. 27 and 34.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S 27}{S 34}$ 1973 </p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.</p>
	<p>45.00 Rim, bears SE and NW; thence over rolling mesa through sparse sagebrush and grasses.</p>
	<p>80.02 The cor. of secs. 27, 28, 33, and 34.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	N. $0^{\circ} 02'$ W., bet. secs. 27 and 28.
	Over broken canyon, through sparse sagebrush and grasses.
23.00	Dry wash, drains NE.
37.95	Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to boulders, in a mound of stone, 4 ft. base, to top of brass cap, mkd.
	<p style="text-align: center;">W C T 12 S R 18 E</p>
	<p style="text-align: center;"> $\frac{1}{4}$  S 28 S 27 </p>
	1973
	Cor. is located on a prominent spur, slopes E.
40.00	True point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28, is located on a vertical slide ledge. An unsafe location for monument.
68.40	Rim, bears NE and SW; desc. over steep NW slope.
70.98	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 27 and 28.
	Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.
	<p style="text-align: center;">T 12 S R 18 E UOIR</p>
	<p style="text-align: center;">  C C S 28 S 27 </p>
	1981
	From this closing cor., angle point No. 12, bears S. $36^{\circ} 55'$ W., 3.26 chs. dist., hereinbefore described.
80.00	Point for the cor. of secs. 21, 22, 27, and 28.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	<p style="text-align: center;">T 12 S R 18 E</p>
	<p style="text-align: center;">  S 21 S 22 S 28 S 27 </p>
	1973
	Land, broken.
	Soil, sandy, clay loam and marl stone.
	No timber.
	Undergrowth, sagebrush and grasses.

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
10.50	<p>From the cor. of secs. 22, 23, 26, and 27. N. 89° 57' W., bet. secs. 22 and 27. Along broken canyon through sparse sagebrush and grasses. West Tabyago Canyon, drains N.</p>
40.01	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27. Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
52.00	<p style="text-align: center;">T 12 S R 18 E \wedge $\frac{1}{4}$ $\frac{S\ 22}{S\ 27}$ 1973</p> <p>Dry wash in canyon, drains N.</p>
70.10	Rim, bears SE and NW; thence over mesa.
73.24	<p>Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 22 and 27. Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p>
76.80	<p style="text-align: center;">T 12 S R 18 E UOIR / $\frac{CS\ 22}{CS\ 27}$ 1981</p> <p>From this closing cor., the 4th mile post, bears N. 36° 55' E., 9.58 chs. dist., hereinbefore described.</p>
80.02	Rim, bears NE and SW; desc. over steep NW slope.
80.02	<p>The cor. of secs. 21, 22, 27, and 28. Land, rolling and broken canyon. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>
40.00	<p>N. 0° 02' W., bet. secs. 21 and 22. Over broken canyon, through sparse sagebrush and grasses.</p>
41.41	<p>True point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, is located on a vertical ledge, 20 ft. high. An unsafe location for monument.</p>
41.41	<p>Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 21 and 22. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

W C
T 12 S R 18 E

$\frac{1}{4}$
S 21 | S 22
↓

1973

Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.

Cor. is located on a prominent spur, slopes E.

46.50 West Tabyago Canyon, drains NE from SE.

70.00 West Tabyago Canyon, drains NW.

70.96 Point selected for the witness cor. to the cor. of secs.
15, 16, 21, and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

W C
T 12 S R 18 E

S 16 | S 15
S 21 | S 22

1973

Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Cor. is located on a prominent spur, slopes SW, 1 ch.
E of West Tabyago Canyon bottom.

80.00 True point for the cor. of secs. 15, 16, 21, and 22,
is located in an inaccessible location.

Land, broken and steep.
Soil, sandy, clay loam and marl stone.
No timber.
Undergrowth, sparse sagebrush and grasses.

From the true point for the cor. of secs. 14, 15, 22,
and 23.

N. $89^{\circ} 58'$ W., bet. secs. 15 and 22.

Over broken NW slope of canyon, through sparse sagebrush
and grasses.

31.47 Intersect the Uintah and Ouray Indian Reservation
boundary; point for the closing cor. of secs. 15 and 22.

Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock, in a mound of stone, 4 ft.
base, to top of aluminum cap, mkd.

T 12 S R 18 E
UOIR | C S 15
| C S 22

1981


Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>From this closing cor., the 3rd mile post, bears S. 7° 00' W., 3.35 chs. dist., hereinbefore described.</p>
40.04	<p>True point for the ¼ sec. cor. of secs. 15 and 22, is located within a dry wash, 40 lks. wide, drains SW. An unsafe location for monument.</p>
41.00	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 15 and 22.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>W C T 12 S R 18 E</p> <p>¼ $\frac{S\ 15}{S\ 22}$ →</p> <p>1973</p> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor. Cor. is located on the N bank of the dry wash, in bottom of Tabyago Canyon.</p>
74.80	<p>Prominent spur, slopes SE.</p>
80.08	<p>True point for the cor. of secs. 15, 16, 21, and 22.</p> <p>Land, broken canyons. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>
	<p>N. 0° 02' W., bet. secs. 15 and 16.</p> <p>Over rolling, broken ledges of canyon.</p>
7.00	<p>Foot of vertical ledges on E side of West Tabyago Canyon; asc. over steep S slope and ledge.</p>
18.00	<p>Tabyago Canyon, drains W.</p>
38.50	<p>Prominent high ridge, bears E and W; desc. over steep N slope.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 15 and 16.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
	<div style="text-align: center;"> <p>T 12 S R 18 E</p> <p>¼ S 16 S 15</p> <p>1973</p> </div>
59.58	<p>Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 15 and 16.</p>

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS


Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

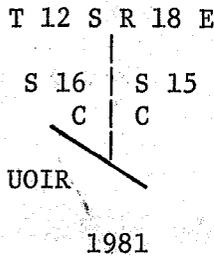

From this closing cor., angle point No. 6, bears N. 36° 47' W., 2.93 chs. dist., hereinbefore described.

64.54 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 15 and 16.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap, mkd.

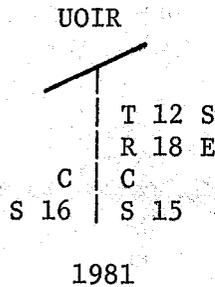


From this closing cor., angle point No. 6, bears S. 33° 41' W., 3.16 chs. dist., hereinbefore described.

66.50 Rim, bears NE and SW; desc. over steep NW slope.

80.00 Point for the cor. of secs. 9, 10, 15, and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.

Land, broken canyon.
Soil, sandy and clay loam.
No timber.
Undergrowth, sparse sagebrush and grasses.

From the cor. of secs. 10, 11, 14, and 15.

N. 89° 55' W., bet. secs. 10 and 15.


Asc. over steep SE slopes, through sparse sagebrush and grasses.

17.60 Prominent ridge, bears N and S; desc. over steep NW slope.

Survey of a Portion of the Subdivisional Lines of
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

33.88 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 10 and 15.
Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

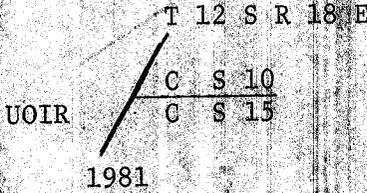

From this closing cor., the ½ mile post, bears N. 11° 15' E., 6.88 chs. dist., hereinbefore described.

34.50 Rim, desc. over W slope.

40.04 Point for the ¼ sec. cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

T 12 S R 18 E

¼	S 10
	S 15

1973

62.80 West edge of mesa and rim, bears SE and NW; desc. over steep SW slope.

79.00 Wash, 15 lks. wide, drains NW.

80.08 The cor. of secs. 9, 10, 15, and 16.

Land, rolling and broken.
Soil, sandy and clay loam.
No timber.
Undergrowth, sparse sagebrush and grasses.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

(Superseding the Survey Executed by
H.D. Heist and W.A. Stumm in 1910)

N. 0° 02' W., bet. secs. 9 and 10.

Desc. over steep NW slope, through sparse sagebrush and grasses.

1.00 Wash, 15 lks. wide, drains NW; asc. over steep S slope.

4.50 Spur, slopes NW; thence over broken canyons.

35.10 Enter Green River Valley.


40.00 Point for the ¼ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 12 S R 18 E




1973

This cor. is also designated as the witness cor. to the meander cor. of secs. 9 and 10, on the left bank of the south channel of the Green River.

- 41.96 Left bank of the south channel of the Green River; point for the meander cor. of secs. 9 and 10, falls on unstable river bank.
- 46.02 Right bank of the south channel of the Green River; point for the meander cor. of secs. 9 and 10, falls on unstable river bank.
- 46.67 Point selected for the witness cor. to the meander cor. of secs. 9 and 10, on the right bank of the south channel of the Green River.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

W C
T 12 S R 18 E




M C

1981

- 54.79 Point selected for the witness cor. to the meander cor. of secs. 9 and 10, on the left bank of the north channel of the Green River.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.




W C
T 12 S R 18 E



1981

- 55.76 Left bank of the north channel of the Green River; point for the meander cor. of secs. 9 and 10, falls on unstable river bank.
- 58.45 Right bank of the north channel of the Green River; point for the meander cor. of secs. 9 and 10, falls on unstable river bank; there is no remaining evidence of the original meander cor. of secs. 9 and 10.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
58.64	<p>Point selected for the witness cor. to the meander cor. of secs. 9 and 10, on the right bank of the north channel of the Green River.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>W C T 12 S R 18 E</p>  <p>S 9 S 10</p> <hr style="width: 100px; margin: 0 auto;"/> <p>M C 1981</p> </div>
78.90	Rim, bears NE and SW; thence over rolling mesa.
80.00	<p>Point for the cor. of secs. 3, 4, 9, and 10.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 12 S R 18 E</p>  <p>S 4 S 3 S 9 S 10</p> <p>1973</p> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>From this cor., the cor. of secs. 3, 4, 9, and 10, of the suspended survey of H.D. Heist and W.A. Stumm, which is monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above ground, with a mound of stone, 2½ ft. base, 1 ft. high, W of cor., bears N. 87° 31' E., 15.23 chs. dist., with brass cap mkd. T12S R18E S3 S4 S9 S10 1909. I removed the iron post and deposited it alongside the witness cor. to the ¼ sec. cor. of secs. 3 and 10, hereinafter described.</p> <p>Land, broken canyons. Soil, alluvial silt, sandy and clay loam. No timber. Undergrowth, french tamarisk, sagebrush and grasses.</p>
22.76	<p>From the true point for the cor. of secs. 2, 3, 10 and 11. N. 89° 55' W., bet. secs. 3 and 10. Over Green River and inaccessible NE slope of Green River.</p> <p>Right bank of the Green River; point for the meander cor. of secs. 3 and 10.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 12 S R 18 E</p>  <p>S 3 / MC S 10</p> <p>1981</p> </div>

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
39.99	True point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, is located on inaccessible NE slope.
41.50	Rim, bears SE and NW; thence over rolling mesa.
41.71	Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 3}{S\ 10}$ \rightarrow</p> <p style="text-align: center;">1973</p>
	Deposit the original cor. of secs. 3, 4, 9, and 10, hereinbefore described, alongside the iron post.
	There is no remaining evidence of the original meander cor. of secs. 3 and 10.
67.40	Prominent spur, slopes S.
79.98	The cor. of secs. 3, 4, 9, and 10.
	Land, broken and rolling. Soil, alluvial, sandy and clay loam. No timber. Undergrowth, french tamarisk, sparse sagebrush and grasses.
	North, bet. secs. 3 and 4. Over rolling mesa through sagebrush and grasses.
37.10	Prominent spur, slopes E; desc. over steep NE slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ S 4 S 3</p> <p style="text-align: center;">1973</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
60.23	The cor. of secs. 3 and 4, on the N. bdy. of the Tp., hereinbefore described.
	Land, rolling. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.

273

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., monumented as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.

N. 0° 02' W., bet. secs. 32 and 33.

Desc. over steep NW slope.

4.50 Wash, 10 lks. wide, in bottom of Little Rock House Canyon, drains SW; asc. over steep SE slope, through scattering juniper.


21.80 Canyon rim, bears NE and SW; thence, over rolling E slope, through sparse sagebrush and grasses.

32.50 Desc. over gentle NW slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 12 S R 18 E



1973

from which

A juniper, 7 ins. diam., bears N. 10° 00' E., 49 lks. dist., mkd. $\frac{1}{4}$ S33 BT.


A juniper, 3 ins. diam., bears S. 61° 45' W., 72 lks. dist., mkd. X BT.

64.41 Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 32 and 33.

Set an aluminum post. 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

T 12 S R 18 E

UOIR



1981

From this closing cor., angle point No. 13, bears N. 60° 45' E., 11.79 chs. dist., hereinbefore described.

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
69.90	Prominent ridge, slopes SW; desc. over steep NW slope.
70.00	Point selected for the witness cor. to the cor. of secs. 28, 29, 32, and 33.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.
	$\begin{array}{c} \text{W C} \\ \text{T 12 S R 18 E} \\ \uparrow \\ \frac{\text{S 29} \quad \quad \text{S 28}}{\text{S 32} \quad \quad \text{S 33}} \end{array}$
	1973
80.00	True point for the cor. of secs. 28, 29, 32, and 33, is located on a very steep NW slope, an unsafe location for monument.
	Land, rolling to very steep. Soil, sandy and clay loam. Timber, scattering juniper. Undergrowth, sparse sagebrush and grasses.
	From the cor. of secs. 27, 28, 33, and 34.
	N. 89° 57' W., bet. secs. 28 and 33.
6.00	Dry wash, drains N.
	Asc. NE slope, through sparse sagebrush and grasses.
39.96	Point for the ¼ sec. cor. of secs. 28 and 33.
	Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.
	T 12 S R 18 E
	$\frac{1}{4} \quad \frac{\text{S 28}}{\text{S 33}}$
	1973
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor.
60.50	Prominent spur, slopes N; desc. over steep NW slope and vertical rocky ledges, through sparse sagebrush and grasses.
61.13	Intersect the Uintah and Ouray Indian Reservation boundary; point for the closing cor. of secs. 28 and 33.
	Set an aluminum post. 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.
	T 12 S R 18 E
	$\begin{array}{c} \text{UOIR} \quad / \quad \frac{\text{C S 28}}{\text{C S 33}} \end{array}$
	1981

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
79.92	<p>From this closing cor., the 5½ mile post, bears S. 40° 49' W., 5.51 chs. dist., hereinbefore described.</p> <p>True point for the cor. of secs. 28, 29, 32, and 33.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>
40.00	<p>N. 0° 02' W., bet. secs. 28 and 29.</p> <p>Desc. over steep NW slope and vertical ledges through sparse sagebrush and grasses.</p> <p>Point for the ¼ sec. cor. of secs. 28 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 29 S 28 </p> <p style="text-align: center;">1973</p> <p>Cor. is located in the bottom land E of Green River.</p> <p>Thence, over bottom land, through sparse sagebrush and grasses.</p>
80.00	<p>Point for the cor. of secs. 20, 21, 28, and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <u>S 20 S 21</u> S 29 S 28 </p> <p style="text-align: center;">1973</p> <p>Cor. is located on a gentle SE slope.</p> <p>Land, broken to nearly level. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
31.30	<p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>N. 89° 58' W., bet. secs. 21 and 28.</p> <p>Over rolling slopes, through sagebrush and grasses.</p> <p>Ridge, bears N and S.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
39.00	<p>Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ ← $\frac{S\ 21}{S\ 28}$</p> <p style="text-align: center;">1973</p> <p>Cor. is located on a sharp ridge, sloping NW.</p> <p>Raise a mound of stone, 4 ft. base, 5 ft. high, N of cor.</p> <p>Desc. over very steep W slope.</p>
39.98	<p>True point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, is located on a very steep W slope. An unsafe location for monument.</p>
65.95	<p>Prominent ridge, slopes NW; desc. over steep NW slope.</p>
79.96	<p>The cor. of secs. 20, 21, 28, and 29.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
40.00	<p>N. $0^{\circ} 02'$ W., bet. secs. 20 and 21.</p> <p>Over broken ledges and gently rolling SW slope, through sagebrush and grasses.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ S 20 S 21</p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on gentle SW slope.</p>
80.00	<p>Point for the cor. of secs. 16, 17, 20, and 21.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	<p style="text-align: center;">T 12 S R 18 E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 17</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 20</td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on a gentle NW slope.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	S 17	S 16	S 20	S 21	
S 17	S 16					
S 20	S 21					
	<p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>N. 89° 59' W., bet. secs. 16 and 21.</p> <p>Over broken canyon, through sparse sagebrush and grasses.</p>					
5.50	West Tabyago Canyon, drains N.					
27.50	Dry wash, drains N.					
39.97	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>					
	<p style="text-align: center;">T 12 S R 18 E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">$\frac{1}{4}$</td> <td style="padding: 0 5px;">S 16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S 21</td> </tr> </table> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 2½ ft. base, 2 ft. high, N of cor.</p> <p>Cor. is located on gentle SE slope.</p> <p>Asc. over steep E slope.</p>	$\frac{1}{4}$	S 16		S 21	
$\frac{1}{4}$	S 16					
	S 21					
57.30	Prominent ridge, bears N and S.					
79.94	<p>The cor. of secs. 16, 17, 20, and 21.</p> <p>Land, rolling. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>					
40.00	<p>N. 0° 02' W., bet. secs. 16 and 17.</p> <p>Over gently rolling SW slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>					

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 17 S 16 </p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor. Cor. is located on gentle SE slope. Asc. over gentle to steep SE slope.</p>
73.10	<p>Prominent spur, slopes SE; thence, along steep rolling E slopes.</p>
80.00	<p>Point for the cor. of secs. 8, 9, 16, and 17.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{S\ 8}{S\ 17}$ $\frac{S\ 9}{S\ 16}$ </p> <p style="text-align: center;">1973</p> <p>Land, rolling to steep. Soil, sandy and clay loam. No timber. Undergrowth, sparse sagebrush and grasses.</p>
	<p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>West, bet. secs. 9 and 16.</p> <p>Along steep rolling canyon slopes, through sagebrush and grasses.</p>
36.81	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 9 and 16.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>
	<p style="text-align: center;">W C</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ ← $\frac{S\ 9}{S\ 16}$ </p> <p style="text-align: center;">1973</p> <p>Cor. is located on a vertical rim, bears NW and S.</p>
39.97	<p>True point for the ¼ sec. cor. of secs. 9 and 16, is located on a steep talus slope, below steep slope and ledge. An unsafe location for monument.</p>
42.00	<p>Tabyago Canyon, drains N.</p>

279

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

79.94

The cor. of secs. 8, 9, 16, and 17.

Land, rolling and broken canyons.
Soil, clay and sandy loam.
No timber.
Undergrowth, sagebrush and grasses.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

(Superseding the Survey Executed by
H.D. Heist and W.A. Stumm in 1910)

N. 0° 02' W., bet. secs. 8 and 9.

Desc. over steep NE slope of Desolation Canyon and the
Green River.

24.86

Point selected for the witness cor. to the meander cor.
of secs. 8 and 9, on the left bank of the Green River.

Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with aluminum cap mkd.

W C
T 12 S R 18 E
M C
S 8 | S 9

1981

25.00

Left bank of the Green River; point for the meander cor.
of secs. 8 and 9, falls on unstable river bank.

32.66

Right bank of the Green River; point for the meander cor.
of secs. 8 and 9, falls on unstable river bank.

32.87

Point selected for the witness cor. to the meander cor.
of secs. 8 and 9, on the right bank of the Green River.

Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with aluminum cap mkd.

W C
T 12 S R 18 E
S 8 | S 9

M C

1981

40.00

Point for the ¼ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins.
in the ground, with brass cap mkd.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

T 12 S R 18 E

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 8 \quad | \quad \text{S } 9 \\ | \end{array}$$

1973

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 8 and 9 of the suspended survey of H.D. Heist and W.A. Stumm, is monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, in a mound of stone, 3 ft. base, to top, bears N. $88^{\circ} 20'$ E., 15.29 chs. dist., with brass cap mkd. $\frac{1}{4}$ S8 S9 1909. I removed the monument and buried it alongside the above $\frac{1}{4}$ sec. cor.

From this same cor., the meander cor. bet. secs. 8 and 9, on the left bank of the Green River, of the suspended survey of H.D. Heist and W.A. Stumm, is monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 4 ft. base, to top, bears S. $49^{\circ} 45'$ E., 20.09 chs. dist., with brass cap mkd. T12S R18E S8 S9 1909. A mining claim corner described in 1941 was located at this cor. I removed the iron post and left the mound of stone in place. I deposited the iron post alongside the above $\frac{1}{4}$ sec. cor. of secs. 8 and 9.

Thence, over gently rolling river bottom land.

80.00 Point for the cor. of secs. 4, 5, 8, and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.

T 12 S R 18 E

$$\begin{array}{c} \text{S } 5 \quad | \quad \text{S } 4 \\ \text{S } 8 \quad | \quad \text{S } 9 \end{array}$$

1973

from which

A box elder, 22 ins. diam., bears S. $89^{\circ} 30'$ W., 234 lks. dist., mkd. T12S R18E S8 BT.

From this cor., the cor. of secs. 4, 5, 8, and 9 of the suspended survey of H.D. Heist and W.A. Stumm, is monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, in a mound of stone, 3 ft. base, to top, bears N. $89^{\circ} 13'$ E., 15.31 chs. dist., with brass cap mkd. T12S R18E S4 S5 S8 S9 1909. I removed the iron post and deposited it alongside the above sec. cor.

Land, broken to nearly level river bottom.

Soil, sandy and clay loam with alluvial silt along the Green River.

No timber.

Undergrowth, sagebrush and grasses with french tamarisk along river bottom.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
33.30	<p>From the cor. of secs. 3, 4, 9, and 10. N. 89° 57' W., bet. secs. 4 and 9. Over rolling mesa and broken canyon, through sagebrush and grasses.</p>
40.02	<p>Prominent spur, slopes SE; thence, over S slope.</p>
40.02	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S\ 4}{S\ 9}$ </p> <p style="text-align: center;">1973</p>
40.10	<p>Raise a mound of stone, 2½ ft. base, 3 ft. high, N of cor.</p> <p>From this cor., the $\frac{1}{4}$ sec. cor. of secs. 4 and 9 of the suspended survey of H.D. Heist and W.A. Stumm, is monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, with scattering mound of stone, N of cor., bears N. 87° 59' E., 15.18 chs. dist., with brass cap mkd. $\frac{1}{4}$ S4 S9 1909. I removed the iron post and buried it alongside the above sec. cor.</p>
48.10	<p>Desc. over gentle SW slope.</p>
80.04	<p>Prominent spur, slopes SW; desc. over steep W slope and broken canyon.</p>
80.04	<p>The cor. of secs. 4, 5, 8, and 9.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
33.00	<p>N. 0° 04' W., bet. secs. 4 and 5.</p> <p>Along river bottom land and then asc. over steep SW slope and broken ledges.</p>
40.00	<p>Rim, bears E and W; thence over rolling mesa.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4}$ S 5 S 4 </p> <p style="text-align: center;">1973</p>


Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
60.09	<p>Raise a mound of stone, 4 ft. base, 3 ft. high, W of cor.</p> <p>From this cor., the $\frac{1}{4}$ sec. cor. bet. secs. 4 and 5 of the suspended survey of H.D. Heist and W.A. Stumm, is monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 4 ft. base, to top, bears N. $88^{\circ} 22'$ E., 15.34 chs. dist., with brass cap mkd. $\frac{1}{4}$ S4 S5 1909. I removed the iron post and buried it alongside the above sec. cor.</p> <p>Cor. of secs. 4 and 5 on the N. bdy. of the Tp., hereinbefore described.</p> <p>Land, rolling and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
<p>Survey of a Portion of the Subdivisional Lines, T. 12 S., R. 18 E., Salt Lake Meridian, Utah</p>	
8.50	<p>From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., monumented as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.</p> <p>N. $0^{\circ} 03'$ W., bet. secs. 31 and 32.</p> <p>Asc. over SW slope, through scattering juniper.</p> <p>Desc. over steep NE slope, through widely scattering juniper into Little Rock House Canyon.</p>
32.30	<p>Prominent narrow jagged ridge, bears E and W.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, $2\frac{1}{2}$ ft. base, to top brass cap, mkd.</p>
<p>T 12 S R 18 E</p> <p>$\frac{1}{4}$</p> <p>S 31 S 32</p> <p>1972</p>	
55.50	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on a steep NW slope.</p> <p>Little Rock House Canyon bottom, 1 ch. wide, drains W; asc. over steep NW slope.</p>
80.00	<p>Point for the cor. of secs. 29, 30, 31, and 32.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c c} \hline S 30 & S 29 \\ \hline S 31 & S 32 \\ \hline \end{array}$ </p> <p style="text-align: center;">1972</p> <p>Land, steep and broken. Soil, sandy and clay loam. Timber, widely scattering juniper. Undergrowth, sagebrush and grasses.</p>	
	<p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 89° 54' W., bet. secs. 29 and 32.</p> <p>Asc. over broken NE slope, through widely scattering juniper.</p>	
32.30	Ridge, bears NE and SW; desc. over broken slope.	
40.01	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{c} S 29 \\ S 32 \end{array}$ </p> <p style="text-align: center;">1973</p>	
80.02	<p>The cor. of secs. 29, 30, 31, and 32.</p> <p>Land, broken. Soil, sandy and clay loam. Timber, very widely scattering juniper. Undergrowth, sagebrush and grasses.</p>	
	<p>S. 89° 58' W., bet. secs. 30 and 31.</p> <p>Over broken slope and ledges.</p>	
20.86	<p>Point selected for a witness point bet secs. 30 and 31.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">W P</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c} S 30 \\ S 31 \end{array}$ </p> <p style="text-align: center;">1972</p>	
40.00	<p>Cor. is located on a prominent spur, slopes SW.</p> <p>Desc. over steep, jagged and narrow spurs and ledges.</p> <p>True point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31 is located on an inaccessible location within Desolation Canyon.</p>	

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Continue into Desolation Canyon and the Green River.</p> <p>50.37 Point selected for the witness cor. to the meander cor. of secs. 30 and 31, on the left bank of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>W C</p> <p>T 12 S R 18 E</p>  <p>1981</p> </div> <p>50.69 Left bank of the Green River; point for the meander cor. of secs. 30 and 31, falls on unstable river bank.</p> <p>65.34 True point for the cor. of secs. 30 and 31, on the W. bdy. of the Tp., hereinbefore described.</p> <p>Land, broken and mostly inaccessible canyon. Soil, sandy and clay loam with alluvial silt. No timber. Undergrowth, sagebrush and french tamarisk in river bottom land.</p>
	<p>From the cor. of secs. 29, 30, 31, and 32.</p> <p>N. 0° 03' W., bet. secs. 29 and 30.</p> <p>Asc. over rolling E and SE slope.</p> <p>12.40 Prominent spur, slopes SW; desc. over steep NW slope.</p> <p>39.60 Canyon rim, bears NE and NW; desc. over steep NE slope.</p> <p>40.00 Point for the ¼ sec. cor. of secs. 29 and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 12 S R 18 E</p>  <p>1973</p> </div> <p>Desc. over steep NE slope and vertical ledges.</p> <p>56.24 Left bank of the Green River; point for the meander cor. of secs. 29 and 30.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">M C</p> <p style="text-align: center;">S 30 S 29</p> <p style="text-align: center;">1981</p>
62.26	<p>Right bank of the Green River; point for the meander cor. of secs. 29 and 30.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">S 30 S 29</p> <p style="text-align: center;">M C</p> <p style="text-align: center;">1981</p> <p>Thence over bottom land.</p>
71.00	<p>Dry wash, drains SE.</p>
75.00	<p>Asc. over steep S slope and talus.</p>
78.50	<p>Point selected for the witness cor. to the cor. of secs. 19, 20, 29, and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">W C</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">S 19 ↑ S 20</p> <p style="text-align: center;">S 30 S 29</p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>
78.60	<p>Asc. over vertical ledge.</p>
80.00	<p>True point for the cor. of secs. 19, 20, 29, and 30 is located on an inaccessible ledge. An unsafe location for monument.</p> <p>Land, steep and broken with river bottom land near river. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush.</p>
39.95	<p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>N. 89° 58' W., bet. secs. 20 and 29.</p> <p>Over rolling S slope, through sagebrush and grasses.</p> <p>Point for the ¼ sec. cor. of secs. 20 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4} \frac{S 20}{S 29}$</p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, located on a boulder, 4 ft. high, bears south, 6 lks. dist.</p>
46.33	<p>Point selected for the witness cor. to the meander cor. of secs. 20 and 29, on the left bank of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">MC $\frac{S 20}{S 29}$</p> <p style="text-align: center;">1981</p>
46.63	<p>Left bank of the Green River; point for the meander cor. of secs. 20 and 29, falls on unstable river bank.</p>
56.74	<p>Right bank of the Green River; point for the meander cor. of secs. 20 and 29, falls on unstable river bank.</p>
56.99	<p>Point selected for the witness cor. to the meander cor. of secs. 20 and 29, on the right bank of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{S 20}{S 29}$ MC</p> <p style="text-align: center;">1981</p>
79.90	<p>True point for the cor. of secs. 19, 20, 29, and 30.</p> <p>Land, rolling to broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
	<p>S. 89° 42' W., bet. secs. 19 and 30.</p> <p>Over rolling Green River Valley in Desolation Canyon.</p>
8.00	<p>Dry wash, drains SE.</p>
30.70	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 19 and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">¼ ← $\frac{S\ 19}{S\ 30}$</p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 2½ ft. base, 2 ft. high, N of cor. Cor. is located 50 lks. N of river.</p>
40.00	True point for the ¼ sec. cor. of secs. 19 and 30, is located near the right bank of the Green River. An unsafe location for a monument.
65.24	True point for the cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described.
	<p>Land, river bottom land to steep and broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
	<p>From the cor. of secs. 19, 20, 29, and 30. N. 0° 03' W., bet. secs. 19 and 20. Asc. over steep S slope and vertical ledges.</p>
35.40	Prominent spur, slopes SE; thence, over steep E slope.
40.00	Point for the ¼ sec. cor. of secs. 19 and 20.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">¼ S 19 S 20 </p> <p style="text-align: center;">1973</p>
	<p>Cor. is located on a steep E slope. Thence, over steep and broken E slope.</p>
80.00	True point for the cor. of secs. 17, 18, 19, and 20 is located on a very steep slope with broken vertical ledges. An unsafe location for a monument.
	<p>Land, broken. Soil, sandy and clay loam. No timber. No undergrowth.</p>
	<p>From the cor. of secs. 16, 17, 20, and 21. N. 89° 56' W., bet. secs. 17 and 20. Over gently rolling land, through sagebrush and grasses.</p>
18.00	Prominent ridge, bears N and S.

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
32.10	<p>Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 17}{S 20}$ \rightarrow</p> <p style="text-align: center;">1973</p> <p>from which</p> <p style="padding-left: 40px;">A box elder, 7 ins. diam., bears South, 10 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A box elder, 9 ins. diam., bears West, 5 lks. dist., mkd. X BT.</p> <p>This cor. is also designated as the witness cor. to the meander cor. of secs. 17 and 20, on the left bank of the Green River.</p>
32.55	<p>Left bank of the Green River; point for the meander cor. of secs. 17 and 20, falls on unstable river bank.</p>
39.95	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20 is located in the Green River.</p>
42.66	<p>Right bank of the Green River; point for the meander cor. of secs. 17 and 20.</p> <p>Set an aluminum post. 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{S 17}{S 20}$ MC</p> <p style="text-align: center;">1981</p>
79.90	<p>True point for the cor. of secs. 17, 18, 19, and 20.</p> <p>Land, broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>
16.40	<p>S. $89^{\circ} 51'$ W., bet. secs. 18 and 19.</p> <p>Asc. over steep E slope and vertical ledges.</p> <p>Thence, over gently rolling land through sagebrush and grasses.</p>
33.00	<p>Dry wash, drains S.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
65.17	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S 18}{S 19}$</p> <p style="text-align: center;">1973</p> <p>The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., hereinbefore described.</p> <p>Land, broken to gently rolling. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	
8.20	<p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0° 03' W., bet. secs. 17 and 18.</p> <p>Over broken steep to vertical E slope.</p> <p>Prominent ridge, bears E and W.</p>	
8.30	<p>Point selected for the witness cor. to the cor. of secs. 17, 18, 19, and 20.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">S 18 S 17 S 19 S 20 V 1973</p>	
40.00	<p>Thence, over broken canyon.</p> <p>True point for the ¼ sec. cor. of secs. 17 and 18 is located in an unsafe location for a monument.</p>	
43.05	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 17 and 18.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4}$ S 18 S 17 V 1973</p>	
53.70	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p> <p>Cor. is located on a gentle S slope.</p> <p>Canyon rim, bears NE and SW; desc. over steep broken NW slope.</p>	

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS											
80.00	<p>Point for the cor. of secs. 7, 8, 17, and 18.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">S 7</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 8</td> </tr> <tr> <td style="padding: 2px;">S 18</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 17</td> </tr> </table> </p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 2½ ft. base, 2 ft. high, W of cor.</p> <p>Land, broken. Soil, sandy and clay loam. No timber. No undergrowth.</p>	S 7		S 8	S 18		S 17				
S 7		S 8									
S 18		S 17									
2.60	<p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>N. 89° 58' W., bet. secs. 8 and 17.</p> <p>Asc. over steep E slope and ledges.</p> <p>Prominent ridge, slopes S.</p>										
12.08	<p>Left bank of the east channel of the Green River; point for the meander cor. of secs. 8 and 17.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">MC</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 8</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 17</td> </tr> </table> </p> <p style="text-align: center;">1981</p>	MC		S 8			S 17				
MC		S 8									
		S 17									
19.00	<p>Right bank of the east channel of the Green River; point for the meander cor. of secs. 8 and 17, falls on unstable river bank.</p>										
21.07	<p>Point selected for the witness cor. to the meander cor. of secs. 8 and 17, on the right bank of the east channel and the left bank of the west channel of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W C</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">MC</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 8</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">MC</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 17</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;"></td> </tr> </table> </p> <p style="text-align: center;">1981</p>	MC		S 8		MC			S 17		
MC		S 8		MC							
		S 17									
21.31	<p>Left bank of the west channel of the Green River; point for the meander cor. of secs. 8 and 17, falls on unstable river bank.</p>										
24.40	<p>Right bank of the west channel of the Green River; point for the meander cor. of secs. 8 and 17, falls on unstable river bank.</p>										

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
24.99	<p>Point selected for the witness cor. to the meander cor. of secs. 8 and 17, on the right bank of the west channel of the Green River.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;"> $\begin{array}{c c} \text{S 8} & \\ \hline \text{S 17} & \text{MC} \end{array}$ </p> <p style="text-align: center;">1981</p>	
39.92	<p>Point for the ¼ sec. cor. of secs. 8 and 17.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4} \frac{\text{S 8}}{\text{S 17}}$ </p> <p style="text-align: center;">1973</p>	
79.84	<p>Cor. is located on a gentle E slope.</p> <p>The cor. of secs. 7, 8, 17, and 18.</p> <p>Land, broken and river bottom. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>	
24.60	<p>N. 89° 57' W., bet. secs. 7 and 18.</p> <p>Over rolling broken steep canyon slopes.</p> <p>Ridge, bears NE and SW; desc. over steep NW slope.</p>	
40.00	<p>True point for the ¼ sec. cor. of secs. 7 and 18 is located at the base of vertical ledges in a deep canyon. An unsafe location for a monument.</p>	
42.87	<p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 7 and 18.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;"> $\frac{1}{4} \frac{\text{S 7}}{\text{S 18}} \rightarrow$ </p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N of cor.</p> <p>Cor. is located 20 lks. W of the rim of vertical ledge, on a gentle SE slope.</p>	

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS							
55.10	Ridge, bears NE and SW; desc. over gentle NW slope through sagebrush and grasses.						
65.04	<p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., hereinbefore described.</p> <p>Land, broken. Soil, sandy and clay loam. No timber. Undergrowth, sagebrush and grasses.</p>						
	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0° 03' W., bet. secs. 7 and 8.</p> <p>Over broken canyon.</p>						
11.00	Deep wash, in bottom of Maverick Canyon, drains E.						
26.50	Rim, bears SE and NW; desc. over steep broken NW slope.						
32.00	Top of mesa; thence, over rolling mesa land.						
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 30 ins. in the ground, with brass cap mkd.</p>						
	<p style="text-align: center;">T 12 S R 18 E</p> <div style="text-align: center;"> $\frac{1}{4}$ S 7 S 8 1973 </div> <p>Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W of cor.</p>						
65.25	Narrow flat ridge, bears E and W; desc. over gentle NE slope.						
66.70	Vertical rim, bears SE and NW.						
80.00	<p>Point for the cor. of secs. 5, 6, 7, and 8.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on a cross (+) chiseled on bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>						
	<p style="text-align: center;">T 12 S R 18 E</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">S 6</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 5</td> </tr> <tr> <td style="padding: 2px;">S 7</td> <td style="padding: 2px;"> </td> <td style="padding: 2px;">S 8</td> </tr> </table> <p>1973</p> </div>	S 6		S 5	S 7		S 8
S 6		S 5					
S 7		S 8					
	<p>From the sec. cor., the cor. of secs. 5, 6, 7, and 8, of the suspended survey of H.D. Heist and W.A. Stumm, which is monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 4 ft. base, to top, bears N. 88° 34' E., 15.02 chs. dist., with brass cap mkd. T12S R18E S5 S6 S7 S8 1909. I removed the iron post and buried it alongside the sec. cor.</p>						

Survey of a Portion of the Subdivisional Lines,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Land, broken.
Soil, sandy and clay loam.
No timber.
Undergrowth, none.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

(Superseding the Survey Executed by
H.D. Heist and W.A. Stumm in 1910)

From the cor. of secs. 4, 5, 8, and 9.

N. 89° 53' W., bet. secs. 5 and 8.

Over nearly level river bottom.

3.02 Point selected for the witness cor. to the meander cor.
of secs. 5 and 8, on the right bank of the Green River.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with aluminum cap mkd.

W C
T 12 S R 18 E

MC		S 5
		S 8

1981

3.17 Right bank of the Green River; point for the meander cor.
of secs. 5 and 8, falls on unstable river bank; there
is no remaining evidence of the original meander cor.

13.76 Left bank of the Green River; point for the meander cor.
of secs. 5 and 8, falls on unstable river bank.

13.85 Point selected for the witness cor. to the meander cor.
of secs. 5 and 8, on the left bank of the Green River.

Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with aluminum cap mkd.

W C
T 12 S R 18 E

S 5		MC
S 8		

1981

33.00 Spur, slopes N; desc. over NW slope.

39.85 Point for the ¼ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins.
in the ground, with brass cap mkd.

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 12 S R 18 E</p> <p style="text-align: center;">$\frac{1}{4} \frac{S 5}{S 8}$</p> <p style="text-align: center;">1973</p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, N of cor. Enter river bottom land.</p>
48.44	<p>Point selected for the witness cor. to the meander cor. of secs. 5 and 8, on the left bank of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">MC $\frac{S 5}{S 8}$</p> <p style="text-align: center;">1981</p>
50.43	<p>Left bank of the Green River; point for the meander cor. of secs. 5 and 8, falls on unstable river bank.</p>
57.78	<p>Right bank of the Green River; point for the meander cor. of secs. 5 and 8, falls on unstable river bank; there is no remaining evidence of the original meander corner.</p>
58.43	<p>Point selected for the witness cor. to the meander cor. of secs. 5 and 8, on the right bank of the Green River.</p> <p>Set an aluminum post. 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">W C T 12 S R 18 E</p> <p style="text-align: center;">$\frac{S 5}{S 8}$ MC</p> <p style="text-align: center;">1981</p>
79.70	<p>The cor. of secs. 5, 6, 7, and 8.</p> <p>Land, broken and nearly level river bottom. Soil, sandy and clay loam. No timber. Undergrowth, scattering french tamarisk in river bottom land.</p>
36.50	<p>N. 89° 46' W., bet. secs. 6 and 7.</p> <p>Over broken canyons and ledges.</p> <p>Rim, bears N and SE; thence over rolling mesa.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 6 and 7.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>

Independent Resurvey of a Portion of the Subdivision,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>T 12 S R 18 E</p> <p>$\frac{1}{4} \frac{S 6}{S 7}$</p> <p>1973</p> <p>From the $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, of the suspended survey of H.D. Heist and W.A. Stumm, which is monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, to top, bears N. $87^{\circ} 44'$ E., 14.91 chs. dist., with brass cap mkd. $\frac{1}{4}$ S6 S7 1909. I removed the iron post and buried it alongside the cor.</p>
58.80	Rim, bears N and S; desc. over steep W slope.
65.18	The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the hereinbefore described.
	<p>Land, broken.</p> <p>Soil, sandy and clay loam.</p> <p>No timber.</p> <p>Undergrowth, none.</p>
	<p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. $0^{\circ} 17'$ W., bet. secs. 5 and 6.</p> <p>Asc. over steep SW slope.</p>
33.99	Rim, bears NE and SW; thence over nearly level mesa.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p>
	<p>T 12 S R 18 E</p> <p>$\frac{1}{4}$</p> <p>S 6 S 5</p> <p>1973</p>
	<p>From the $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, of the suspended survey of H.D. Heist and W.A. Stumm which is monumented with an iron post, 1 in. diam., firmly set, projecting 20 ins. above ground, with scattering mound of stone, W of cor., bears N. $88^{\circ} 36'$ E., 15.39 chs. dist., with brass cap mkd. $\frac{1}{4}$ S5 S6 1909. I removed the iron post and buried it alongside the cor.</p>
60.04	True point for the cor. of secs. 5 and 6, on the N. bdy. of the Tp., hereinbefore described.
	<p>Land, broken to nearly level.</p> <p>Soil, sandy to clay loam.</p> <p>No timber.</p> <p>Undergrowth, grasses.</p>

Survey of Tract 37,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

Survey of Tract 37,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for Angle Point No. 1, identical with the meander cor. of secs. 3 and 34, on the right bank of the Green River and on the N. bdy. of T. 12 S., R. 18 E., hereinbefore described.

West, on line 1-2, identical with a portion of the line bet. secs. 3 and 34.

1.49 The witness cor. to Angle Point No. 1, hereinbefore described.

7.83 The $\frac{1}{4}$ sec. cor. of sec. 3, hereinbefore described.

32.67 Angle Point No. 2, hereinbefore described.

Thence,

S. $0^{\circ} 02'$ E., on line 2-3, identical with the original line bet. secs. 3 and 4.

Desc. gentle SE slope through sagebrush and grasses.

2.00 Vertical rim, bears NE and SW; desc. steep SE slopes and ledges.

19.67 Point for Angle Point No. 3, identical with the $\frac{1}{4}$ sec. cor. of secs. 3 and 4, of the suspended survey of H.D. Heist and W.A. Stumm, monumented with an iron post, 1 in. diam., firmly set in the ground, with the broken and rusted top of the iron post lying alongside, with brass cap mkd. as described in the official record of the 1909 survey.

At the angle point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.

TR 37
AP 3

S 3
T 12 S R 18 E

1973

Bury the remains of the original post alongside.

East, on line 3-4.

Desc. steep E slope through dense salt cedar.

1.88 Point selected for the witness cor. to Angle Point No. 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.

297

Survey of Tract 37,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

TR 37
AP 4 → WC
S 3
T 12 S R 18 E

1973

2.50 Raise a mound of stone, 2½ ft. base, 2½ ft. high, N of cor.
Right bank of Green River; point for Angle Point No. 4,
falls on unstable river bank.

Thence, along the well defined right bank of the Green
River, 8 ft. high, through dense willow and salt cedar
with a transit traverse.

N. 55° 42' E., 15.97 chs.

N. 57° 50' E., 20.04 chs. At end of course, true point
for Angle Point No. 1 and
point of beginning.

Meanders of an Island in Secs. 8 and 17,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for the meander cor. of secs.
8 and 17, on the E. side of the island, hereinbefore
described.

Thence, with the meanders of the right bank of the east
channel of the Green River, upstream

N. 26° 47' W., 12.52 chs. At end of this course,
commence meanders of left
bank of west channel of
Green River, downstream.

S. 16° 36' E., 11.67 chs. True point for the meander
cor. of secs. 8 and 17 on
the west side of island,
hereinbefore described.

Thence with the meanders of the left bank of the west
channel of the Green River through sec. 17.

S. 10° 15' E., 11.32 chs.

S. 5° 32' W., 4.09 chs.

S. 26° 48' W., 4.01 chs.

S. 10° 40' E., 7.24 chs.

S. 30° 48' E., 8.71 chs. At end of this course, com-
mence meanders of right bank
of the east channel of the
Green River, upstream.

N. 8° 02' E., 17.34 chs.

Meanders of an Island in Secs. 8 and 17,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

N. 19° 26' W., 17.21 chs. To true point for meander cor. of secs. 8 and 17, on the east side of island, hereinbefore described.

Meanders of an Island in Secs. 9 and 10,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for the meander cor. of secs. 9 and 10, on the north side of the island.

Thence with the meanders of the left bank of the north channel of the Green River, downstream.

S. 56° 55' W., 22.55 chs. At end of this course, commence meanders of the right bank of the south channel of the Green River, upstream.

S. 87° 32' E., 5.52 chs.

N. 78° 09' E., 13.67 chs. To true point for meander cor. of secs. 9 and 10 on the south side of island, hereinbefore described.

Thence with the meanders of the right bank of the south channel of the Green River through sec. 10.

N. 86° 04' E., 7.64 chs.

N. 62° 23' E., 20.47 chs. At end of this course commence meanders of the left bank of the north channel of the Green River, downstream.

N. 52° 33' W., 4.52 chs.

N. 84° 57' W., 13.22 chs.

S. 65° 04' W., 9.94 chs. To true point for meander cor. of secs. 9 and 10, on the north side of the island, hereinbefore described.

Meanders of the Left Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for the meander cor. of secs. 3 and 34, on the N. bdy. of the Tp., hereinbefore described.

Thence with the meanders through sec. 3.

S. 41° 42' W., 14.99 chs.

S. 75° 31' W., 6.48 chs.

S. 85° 04' W., 8.71 chs.

S. 74° 16' W., 6.48 chs.

Meanders of the Left Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

S. 48° 12' W., 8.24 chs.
 S. 39° 12' W., 5.25 chs.
 S. 17° 12' W., 7.01 chs.
 S. 15° 12' E., 4.77 chs.
 S. 36° 06' E., 6.03 chs.
 S. 54° 31' E., 11.31 chs.
 S. 68° 26' E., 12.57 chs.
 S. 78° 23' E., 29.39 chs. True point for the meander
 cor. of secs. 2 and 3, here-
 inbefore described.

Thence with the meanders through sec. 2.

S. 79° 20' E., 11.76 chs. The meander cor. of secs. 2
 and 11, hereinbefore
 described.

Thence with the meanders through sec. 11.

S. 72° 51' E., 16.08 chs.
 S. 37° 30' E., 13.29 chs.
 S. 13° 32' E., 11.01 chs.
 S. 9° 28' W., 10.99 chs.
 S. 20° 59' W., 16.71 chs.
 S. 43° 48' W., 14.45 chs.
 S. 61° 23' W., 10.70 chs.
 S. 82° 59' W., 10.45 chs. True point for the meander
 cor. of secs. 10 and 11,
 hereinbefore described.

Thence with the meanders through sec. 10.

N. 75° 58' W., 9.55 chs.
 N. 68° 30' W., 7.79 chs.
 N. 53° 20' W., 6.54 chs.
 N. 64° 46' W., 7.54 chs.
 N. 52° 21' W., 17.60 chs. At 15.78 chs. on this course,
 intersect the Uintah and
 N. 61° 33' W., 12.32 chs. Ouray Indian Reservation
 boundary.
 N. 81° 26' W., 17.09 chs.
 S. 89° 22' W., 9.80 chs. True point for the meander
 cor. of secs. 9 and 10,
 hereinbefore described.

Meanders of the Left Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Thence with the meanders through sec. 9.</p> <p>S. 79° 20' W., 7.46 chs.</p> <p>S. 64° 59' W., 13.64 chs.</p> <p>S. 54° 54' W., 14.86 chs.</p> <p>S. 65° 29' W., 15.88 chs.</p> <p>N. 75° 51' W., 14.24 chs.</p> <p>N. 84° 37' W., 19.95 chs. True point for the meander cor. of secs. 8 and 9, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 8.</p> <p>N. 66° 13' W., 11.50 chs.</p> <p>N. 14° 33' W., 12.84 chs.</p> <p>N. 7° 08' E., 10.48 chs.</p> <p>N. 2° 51' W., 27.57 chs. True point for the meander cor. of secs. 5 and 8, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 5.</p> <p>N. 11° 24' W., 14.77 chs.</p> <p>N. 34° 30' W., 6.89 chs.</p> <p>N. 77° 32' W., 6.20 chs.</p> <p>S. 69° 36' W., 10.51 chs.</p> <p>S. 50° 10' W., 12.57 chs.</p> <p>S. 23° 54' W., 10.62 chs. True point for the meander cor. of secs. 5 and 8, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 8.</p> <p>S. 14° 15' E., 29.73 chs.</p> <p>S. 24° 10' E., 12.34 chs.</p> <p>S. 39° 33' E., 35.75 chs.</p> <p>S. 14° 59' E., 12.85 chs. The meander cor. of secs. 8 and 17, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 17.</p> <p>S. 12° 14' E., 16.49 chs.</p> <p>S. 9° 02' W., 24.48 chs.</p> <p>S. 26° 47' W., 44.47 chs. True point for the meander cor. of secs. 17 and 20, hereinbefore described.</p>

Meanders of the Left Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>Thence with the meanders through sec. 20.</p> <p>S. 13° 20' W., 28.49 chs.</p> <p>S. 2° 59' W., 22.03 chs.</p> <p>S. 29° 28' W., 9.93 chs.</p> <p>S. 9° 48' W., 9.90 chs.</p> <p>S. 1° 18' E., 11.88 chs. True point for the meander cor. of secs. 20 and 29, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 29.</p> <p>S. 10° 04' W., 19.73 chs.</p> <p>S. 26° 50' W., 7.86 chs.</p> <p>S. 58° 27' W., 7.10 chs.</p> <p>N. 85° 51' W., 5.65 chs.</p> <p>N. 67° 34' W., 15.79 chs. The meander cor. of secs. 29 and 30, hereinbefore described</p>
	<p>Thence with the meanders through sec. 30.</p> <p>N. 58° 52' W., 11.36 chs.</p> <p>N. 73° 02' W., 13.59 chs.</p> <p>S. 88° 26' W., 11.63 chs.</p> <p>S. 60° 40' W., 6.38 chs.</p> <p>S. 9° 59' E., 13.72 chs.</p> <p>S. 4° 38' W., 13.67 chs.</p> <p>S. 14° 02' W., 13.53 chs.</p> <p>S. 21° 13' W., 24.07 chs. True point for the meander cor. of secs. 30 and 31, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 31.</p> <p>S. 68° 40' W., 15.72 chs. True point for the meander cor. of secs. 31 and 36, on the W. bdy. of the Tp., hereinbefore described.</p>
	<p>From the true point for the meander cor. of secs. 31 and 36, on the left bank of the Green River, and on the W. bdy. of the Tp., hereinbefore described.</p> <p>Thence with the meanders through sec. 31.</p>

Meanders of the Left Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

S. 34° 40' E., 21.82 chs.

S. 25° 14' E., 8.65 chs.

The meander cor. of secs. 6 and 31, on the S. bdy. of the Tp., monumented as described in the field notes of the concurrent survey of T. 13 S., R. 18 E.

Meanders of the Right Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

Beginning at the true point for the meander cor. of secs. 3 and 34, identical with AP-1, Tract 37, on the N. bdy. of the Tp., hereinbefore described.

Thence with the meanders through sec. 3.

S. 57° 50' W., 20.04 chs.

S. 55° 42' W., 15.97 chs.

S. 19° 48' W., 3.47 chs.

At end of this course true point for AP-4, Tract 37, hereinbefore described.

S. 17° 52' E., 13.76 chs.

S. 34° 43' E., 12.89 chs.

S. 55° 09' E., 9.96 chs.

S. 64° 09' E., 8.28 chs.

S. 67° 18' E., 7.50 chs.

S. 77° 27' E., 6.84 chs.

The meander cor. of secs. 3 and 10, hereinbefore described

Thence with the meanders through sec. 10.

S. 71° 17' E., 15.12 chs.

S. 60° 37' E., 9.71 chs.

True point for the meander cor. of secs. 10 and 11, hereinbefore described.

Thence with the meanders through sec. 11.

S. 54° 09' E., 9.40 chs.

S. 33° 58' E., 20.59 chs.

S. 13° 50' E., 8.96 chs.

S. 0° 42' W., 11.99 chs.

S. 34° 07' W., 7.54 chs.

S. 56° 57' W., 6.81 chs.

S. 73° 31' W., 5.56 chs.

Meanders of the Right Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS		
	N. 86° 43' W., 5.82 chs.	The meander cor. of secs. 10 and 11, hereinbefore described.
	Thence with the meanders through sec. 10.	
	N. 76° 30' W., 7.54 chs.	
	N. 65° 03' W., 9.30 chs.	
	N. 54° 07' W., 11.56 chs.	
	N. 44° 55' W., 43.96 chs.	
	N. 75° 30' W., 5.78 chs.	
	S. 89° 05' W., 10.05 chs.	
	S. 74° 39' W., 8.54 chs.	True point for the meander cor. of secs. 9 and 10, hereinbefore described.
	Thence with the meanders through sec. 9.	
	S. 60° 07' W., 11.06 chs.	
	S. 48° 10' W., 18.07 chs.	
	S. 55° 23' W., 26.13 chs.	
	N. 86° 07' W., 24.19 chs.	
	N. 66° 02' W., 12.35 chs.	True point for the meander cor. of secs. 8 and 9, hereinbefore described.
	Thence with the meanders through sec. 8.	
	N. 51° 02' W., 7.10 chs.	
	N. 25° 33' W., 8.29 chs.	
	N. 12° 17' E., 20.79 chs.	
	N. 5° 29' E., 15.14 chs.	True point for the meander cor. of secs. 5 and 8, hereinbefore described.
	Thence with the meanders through sec. 5.	
	N. 6° 31' E., 10.49 chs.	
	N. 8° 30' W., 8.75 chs.	
	N. 56° 39' W., 10.54 chs.	
	N. 75° 05' W., 9.79 chs.	
	S. 78° 17' W., 14.56 chs.	
	S. 55° 22' W., 11.04 chs.	
	S. 47° 24' W., 14.80 chs.	

Meanders of the Right Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS	
	<p>S. 31° 42' W., 6.27 chs.</p> <p>S. 25° 16' E., 3.00 chs. True point for the meander cor. of secs. 5 and 8, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 8.</p> <p>S. 32° 18' E., 5.55 chs.</p> <p>S. 5° 54' W., 22.64 chs.</p> <p>S. 27° 50' E., 17.15 chs.</p> <p>S. 43° 57' E., 6.05 chs.</p> <p>S. 69° 44' E., 6.80 chs.</p> <p>S. 32° 03' E., 14.12 chs.</p> <p>S. 19° 39' E., 20.17 chs. True point for the meander cor. of secs. 8 and 17, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 17.</p> <p>S. 7° 07' E., 9.93 chs.</p> <p>S. 6° 37' E., 7.45 chs.</p> <p>S. 10° 39' E., 8.93 chs.</p> <p>S. 27° 19' E., 6.92 chs.</p> <p>S. 5° 52' E., 4.72 chs.</p> <p>S. 21° 28' W., 16.02 chs.</p> <p>S. 34° 56' W., 34.42 chs. The meander cor. of secs. 17 and 20, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 20.</p> <p>S. 5° 47' W., 47.91 chs.</p> <p>S. 18° 33' W., 25.48 chs.</p> <p>S. 7° 33' W., 8.24 chs. True point for the meander cor. of secs. 20 and 29, hereinbefore described.</p>
	<p>Thence with the meanders through sec. 29.</p> <p>S. 12° 30' E., 6.65 chs.</p> <p>S. 17° 10' W., 7.73 chs.</p> <p>S. 41° 58' W., 8.55 chs.</p> <p>S. 56° 22' W., 5.32 chs.</p> <p>N. 78° 11' W., 5.70 chs.</p>

Meanders of the Right Bank of the Green River,
T. 12 S., R. 18 E., Salt Lake Meridian, Utah

CHAINS

N. 56° 54' W., 7.86 chs. The meander cor. of secs.
29 and 30, hereinbefore
described.

Thence with the meanders through sec. 30.

N. 58° 49' W., 21.93 chs.

N. 66° 05' W., 11.24 chs.

N. 80° 33' W., 9.04 chs.

S. 78° 06' W., 6.82 chs.

S. 42° 22' W., 4.07 chs.

S. 14° 09' W., 6.11 chs.

S. 9° 26' E., 13.72 chs.

S. 7° 02' W., 8.40 chs.

S. 19° 47' W., 15.54 chs.

S. 10° 57' W., 21.39 chs.

S. 37° 13' W., 13.75 chs. True point for the meander
cor. of secs. 25 and 30, on
the W. bdy. of the Tp.,
hereinbefore described.

From the true point for the meander cor. of secs. 31 and
36, on the right bank of the Green River and on the W.
bdy. of the Tp., hereinbefore described.

Thence with the meanders through sec. 31.

S. 39° 32' E., 11.69 chs.

S. 13° 48' E., 4.39 chs. True point for the meander
cor. of secs. 6 and 31, on
the S. bdy. of the Tp., monu-
mented as described in the
field notes of the concurrent
survey of T. 13 S., R. 18 E.

General Description

A variety of land and soil are found in T. 12 S.,
R. 18 E., of the Salt Lake Meridian, Utah. The general
elevation of the township ranges from about 4600 to 6400
feet above sea level. The western and northwestern
portions are rough land with deep broken canyons with
remaining positions being rolling to broken canyons. The
soil of the bottom lands of the canyons and river is
alluvial silt with sand, gravel, and clay loam. The
rolling higher portions is a sandy loam. Sagebrush and
native grasses cover the major portions with salt cedar
along the river. A very wide scattering of juniper and
pinon are noted in the township with a few box elder along
the river. The exposed rocks are mainly sandstone, shale,
and marl stone.

Township 12 South, Range 18 East, Salt Lake Meridian, Utah

CHAINS

The Green River with its tributaries consisting of Little Rock House, Tabyago, Maverick Canyon, and Rock House Creek are the major water courses. This area is arid and no springs are noted in the township.

There are no major improvements located in the township but a few trails provide limited access to certain portions of the area.

There are no inhabitants in the area and at the present the predominating interest is in stock grazing.

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Julian J. Cordova	Survey Aid
Roy J. Vincent	Survey Aid
Barry B. Babbitt	Survey Aid
Everett E. Gorgen	Survey Aid
Victor E. Templeton	Survey Aid
Caleb C. Costin	Survey Aid
Richard P. Godesiabois	Survey Aid
Donald R. Duran	Survey Aid
Scott McMullin	Supervisory Cadastral Surveyor
Richard A. Zaninovich	Supervisory Cadastral Surveyor
John Mavor	Survey Aid
Rex Smith	Survey Aid
Terry Christensen	Survey Aid

CERTIFICATE OF SURVEY

308

~~XXX~~We), Ray Harpin and Milton R. Workman , HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st day of May, 1969, and Supplemental Special Instructions dated March 13, 1981, ~~(XXX)~~We) have dependently resurveyed the west boundary of T. 12 S., R. 19 E., dependently resurveyed the north boundary and a portion of the west boundary; independently resurveyed a portion of the subdivisional lines; surveyed the easterly boundary of the Uintah and Ouray Indian Reservation; surveyed a portion of the west boundary, a portion of the subdivisional lines, tract 37, the meanders of the Green River, and islands in sections 8, 9, 10, and 17 of Township 12 South, Range 18 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by ~~(XXX)~~(us) and under ~~(XXX)~~(our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 12, 1982 (Date) Ray Harpin (Cadastral Surveyor) Supervisory

July 12, 1982 (Date) Milton R. Workman (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the west boundary of Township 12 South, Range 19 East, the dependent resurvey of the north boundary and a portion of the west boundary; an independent resurvey of a portion of the subdivisional lines; the survey of the easterly boundary of the Uintah and Ouray Indian Reservation; the survey of a portion of the west boundary, a portion of the subdivisional lines, tract 37, the meanders of the Green River, and islands in sections 8, 9, 10, and 17 of Township 12 South, Range 18 East, Salt Lake Meridian, Utah executed by Ray Harpin, Supervisory Cadastral Surveyor Milton R. Workman, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

August 17, 1982 (Date) Glen B. Hatch (Chief Cadastral Surveyor for Utah)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____ is a true copy of the original field notes.

(Date) Chief Cadastral Surveyor for Utah

R604

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF THE

SOUTH BOUNDARY AND A PORTION OF THE SUBDIVISIONAL LINES

AND THE

SURVEY OF THE SUBDIVISIONS OF SECTIONS 21, 27, 29, AND 34

OF

TOWNSHIP 9 SOUTH, RANGE 2 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Gary L. Kratz Supervisory Cadastral Surveyor

Under special instructions dated April 28, 1981, approved April 29, 1981,

_____, which provided for the surveys included under ~~XXXXXX~~/Group
Number 606, and assignment instructions dated April 30, 1981.

Survey commenced June 16, 1981

Survey completed August 12, 1981

INDEX DIAGRAM

Township 9 South, Range 2 East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16 14	15	14	13
19	20 14 15	21 11 14	22 11	23	24
30	29 13 15	28 10 13	27 9	26	25
31 7	32 12 6	33 9 5	34 4	35 3	36 2

- | | |
|---------------------------|-----------|
| Subdivision of Section 21 | - Page 16 |
| Subdivision of Section 27 | - Page 18 |
| Subdivision of Section 29 | - Page 19 |
| Subdivision of Section 34 | - Page 21 |

Township 9 South, Range 2 East, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of the south boundary, a portion of the subdivisional lines and the survey of the subdivision of sections 21, 27, 29, and 34 of T. 9 S., R. 2 E., Salt Lake Meridian, Utah.

History of Surveys

	<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>	
--	--------------------	-------------------------------	--

SOUTH BOUNDARY

Portion	C.L. Craig	1856	
Portion	John T. Breckon	1891	
			John T. Breckon 1891
E. 5 miles			F.E. Joy 1905

EAST BOUNDARY

Portion	C.L. Craig	1856	
Portion			A.J. Stewart Sr. 1872
Portion	A.J. Stewart Sr.	1872	
Portion			Ernst Hesse 1883
Portion	Ernst Hesse	1883	
Portion	John T. Breckon	1891	
Portion			John T. Breckon 1891
Portion			John R. Stewart 1914

WEST BOUNDARY

All	C.L. Craig	1856	
N. 3 miles			A.J. Stewart Sr. 1872

SUBDIVISION

Portion	C.L. Craig	1856	
Portion			John T. Breckon 1891
Portion	John T. Breckon	1891	

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated April 28, 1981.

The directions of the lines refer to the true meridian, determined by direct altitude observations of the sun and hour angle observations of Polaris. The lines were carried forward by sustained angulation.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The geographic position of the southeast corner of the township, as determined from a tie to U.S. Geological Survey triangulation station "Payson", located in section 21, T. 9 S., R. 2 E., is as follows:

Latitude $39^{\circ} 59' 01.5''$ N. Longitude $111^{\circ} 39' 08.5''$ W.

The mean magnetic declination is $14^{\circ} 45'$ E.

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by
John T. Breckon in 1891 and the
Resurvey Executed by F.E. Joy in 1905)

Beginning at the cor. of Tps. 9 and 10 S., R. 2 E.,
determined at record distance from the U.S. Forest Service
Reserve Boundary Post No. 54, from which a 1905 bearing
tree

A fir, 24 ins. diam., bears N. 67½° W., 145 lks.
dist., mkd. with a healed blaze. (Record,
N. 67° 15' W., 132 lks.)

Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, and in a mound of stone, 2½ ft. base, to
top of aluminum cap, mkd.

T 9 S
R 2 E R 3 E
S 36
S 1
T 10 S
1981

N. 89° 49' W., bet. secs. 1 and 36.

0.06 U.S. Forest Service Reserve Boundary Post No. 54,
monumented with an iron post, 4 ins. diam., firmly set,
projecting 1 ft. above the ground, with brass cap mkd.
as described in the official record of the 1905 resurvey
by F.E. Joy.

9.84 U.S. Forest Service Reserve Boundary Post No. 55,
monumented with an iron post, 4 ins. diam., firmly set,
flush with the surface of the ground, with brass cap mkd.
as described in the official record of the 1905 resurvey
by F.E. Joy.

S. 89° 56' W., beginning new measurement.

30.73 The ¼ sec. cor. of secs. 1 and 36, determined from a
1905 bearing tree

A dead fir, 18 ins. diam., bears N. 46° E.,
150 lks. dist., mkd. ¼ S36 BT.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T 9 S R 2 E
¼ S 36
S 1
T 10 S
1981

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

from which new bearing trees

A fir, 12 ins. diam., bears N. 63° E., 52½ lks.
dist., mkd. ¼ S36 BT.

A fir, 4 ins. diam., bears S. 38° E., 39 lks.
dist., mkd. X BT.

S. 89° 44' W., beginning new measurement.

39.65 The cor. of secs. 1, 2, 35, and 36, monumented with a limestone, 18 x 12 x 6 ins., firmly set 14 ins. in the ground, plainly mkd. 1 notch on the E edge and 5 notches on the W edge.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with aluminum cap mkd.

T 9 S R 2 E
S 35 S 36
S 2 S 1
T 10 S
1981

Bury the mkd. stone alongside the aluminum post.

S. 89° 53' W., bet. secs. 2 and 35.

0.06 U.S. Forest Service Reserve Boundary Post No. 56, monumented with an iron post, 4 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. as described in the official record of the 1905 resurvey by F.E. Joy.

40.29 The ¼ sec. cor. of secs. 2 and 35, monumented with a broken sandstone, bottom portion firmly set in the ground on the S side of a mound of stone; top portion mkd. ¼ on one side was found lying on top of the ground several feet down the hill from the mound of stone.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 9 S R 2 E
¼ S 35
S 2
T 10 S
1981

Cor. falls in an old fallen fence line, bearing E and W.

Bury the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, 2 ft. high, N of cor.

S. 89° 41' W., beginning new measurement.

40.85 U.S. Forest Service Reserve Boundary Post No. 57, monumented with an iron post, 4 ins. diam., firmly set, projecting 24 ins. above the ground, with brass cap mkd. as described in the official record of the 1905 resurvey by F.E. Joy.

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS		
41.00	Center of improved road, 15 lks. wide, bears N and S.	
41.05	<p>The cor. of secs. 2, 3, 34, and 35, determined at record distance from the U.S. Forest Service Reserve Boundary Post No. 57.</p> <p>At the corner point</p> <p>Set a T-iron, 24 ins. long, 12 ins. in the ground and 4 ins. below a cattle guard.</p> <p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground, and in a collar of stone, for a reference monument, bears S. 45° W., 50 lks. dist., with brass cap mkd. T10S R2E S3 RM 33 FT 1981, and an arrow pointing to the cor.</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground and in a collar of stone, for a reference monument, bears N. 45° W., 50 lks. dist., with brass cap mkd. T9S R2E S34 RM 33 FT 1981 and an arrow pointing to the cor.</p> <p>Cor. falls in a cattle guard.</p>	
	S. 89° 53' W., bet. secs. 3 and 34.	
25.00	Center line of asphalt road, 30 lks. wide, bears N and S.	
27.74	Point for the U.S. Forest Service Reserve Boundary Post No. 58, at proportionate distance; there is no remaining evidence of the boundary post; not monumented.	
39.06	<p>Point for the ¼ sec. cor. of secs. 3 and 34, at proportionate distance based on the irregular boundary adjustment; there is no remaining evidence of the original corner position.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 9 S R 2 E S 34 ¼ S 3 T 10 S 1981</p> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, N of cor.</p> <p style="text-align: center;">_____</p> <p>S. 89° 43' W., beginning new measurement.</p>	
20.02	<p>Point for the W 1/16 sec. cor. of secs. 3 and 34.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;"> S 34 W 1/16 S 3 1981</p>	

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS						
40.04	<p>From this cor., an iron rebar of unknown origin, $\frac{1}{2}$ in. diam., firmly set, projecting 4 ins. above the ground, bears S. $67\frac{1}{2}^{\circ}$ W., $30\frac{1}{2}$ lks. dist., with a mound of stone, $2\frac{1}{2}$ ft. base, 1 ft. high, S of rebar.</p> <p>The cor. of secs. 3, 4, 33, and 34, determined at record distance from U.S. Forest Service Reserve Boundary Post No. 59.</p> <p>At the corner point</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 9 S R 2 E</td></tr> <tr><td>S 33 S 34</td></tr> <tr><td>S 4 S 3</td></tr> <tr><td>T 10 S</td></tr> <tr><td>1981</td></tr> </table> </div>	T 9 S R 2 E	S 33 S 34	S 4 S 3	T 10 S	1981
T 9 S R 2 E						
S 33 S 34						
S 4 S 3						
T 10 S						
1981						
0.06	<p>S. $89^{\circ} 04'$ W., bet. secs. 4 and 33.</p> <p>U.S. Forest Service Reserve Boundary Post No. 59, monumented with an iron post, 4 ins. diam., firmly set, projecting 18 ins. above the ground, and in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. as described in the official record of the 1905 resurvey by F.E. Joy.</p>					
40.86	<p>The $\frac{1}{4}$ sec. cor. of secs. 4 and 33, monumented with a limestone, 18 x 12 x 7 ins., firmly set 16 ins. in the ground, plainly mkd. $\frac{1}{4}$ on N face, from which a 1905 bearing tree</p> <p style="padding-left: 40px;">A maple, 8 ins. diam., bears N. 25° E., $18\frac{1}{2}$ lks. dist., mkd. with a healed blaze. (Record, N. 37° E.).</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T 9 S R 2 E</td></tr> <tr><td>S 33</td></tr> <tr><td>$\frac{1}{4}$ S 4</td></tr> <tr><td>T 10 S</td></tr> <tr><td>1981</td></tr> </table> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p> <p>Bury the mkd. stone alongside the iron post.</p>	T 9 S R 2 E	S 33	$\frac{1}{4}$ S 4	T 10 S	1981
T 9 S R 2 E						
S 33						
$\frac{1}{4}$ S 4						
T 10 S						
1981						
42.39	<p>S. $88^{\circ} 48'$ W., beginning new measurement.</p> <p>The cor. of secs. 4, 5, 32, and 33, monumented with a sandstone, 18 x 15 x 5 ins., firmly set 12 ins. in the ground, plainly mkd. 4 notches on the E edge and 2 on the W edge, from which the 1905 bearing trees</p>					

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

A Douglas fir, 24 ins. diam., bears S. 60° E.,
127 lks. dist., mkd. T10S R2E S4 BT. (Record,
S. 53° E., 121 lks.)

A dead fir, 6 ins. diam., bears S. 83° W.,
54 lks. dist., mkd. T10S R2E S5 BT. (Record,
S. 77° W., 50 lks.)

And a tree mkd. by the U.S. Forest Service

A spruce, 16 ins. diam., bears S. 35° W.,
40½ lks. dist., mkd. with a bearing tree tag

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 21 ins.
in the ground, with aluminum cap mkd.

T 9 S R 2 E
S 32 | S 33
S 5 | S 4
T 10 S
1981

Bury the mkd. stone alongside the aluminum post.

S. 89° 30' W., bet. secs. 5 and 32.

0.08 U.S. Forest Service Reserve Boundary Post No. 60,
4 ins. diam., firmly set, projecting 12 ins. above
the ground, and in a collar of stone, with brass cap mkd.
as described in the 1905 resurvey by F.E. Joy.

39.32 Point for the ¼ sec. cor. of secs. 5 and 32, at propor-
tionate distance; falls on a steep slope, unsuitable for
monumentation.

42.46 Top of spur, bears NW.

43.78 The witness ¼ sec. cor. of secs. 5 and 32, monumented
with a granite stone, 24 x 14 x 8 ins., firmly set 18
ins. in the ground, plainly mkd. WC ¼ on the N face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground, and in a mound of stone, 3 ft. base,
to top of brass cap, mkd.

W C
T 9 S R 2 E
¼ S 32 →
S 5
T 10 S
1981

Bury the mkd. stone alongside the iron post.

S. 89° 11' W., beginning new measurement.

36.43 The cor. of secs. 5, 6, 31, and 32, monumented with a
blue limestone, 10 x 8 x 8 ins., loosely set, 4 ins. in
the ground, plainly mkd. 5 notches on the E edge and 1
on the W edge, from which

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

U.S. Forest Service Reserve Boundary Post No. 61, monumented with an iron post, 4 ins. diam., firmly set, projecting 18 ins. above the ground, and in a collar of stone, with brass cap mkd. as described in the 1905 resurvey by F.E. Joy, bears S. 0° 35' W., 6 lks. dist.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T 9 S R 2 E
S 31 S 32
S 6 S 5
T 10 S
1981

Bury the mkd. stone alongside the iron post.

(Reestablishment of the Survey of the W. 33 1/3
Chs. Executed by C.L. Craig in 1856 and the Resurvey and
Survey Executed by John T. Breckon in 1891

S. 88° 59' W., bet. secs. 6 and 31.

2.38 Intersect line 2-3, Midnight No. 3 lode, mineral survey No. 5993, at a point from which Cor. No. 2, identical with Cor. No. 4, Midnight No. 5 lode, same mineral survey, monumented with a wood post, 4 ins. square, 30 ins. long, and in a mound of stone, scribed 5993, bears S. 1° 42' W., 5.55 chs. dist.

From this cor., Cor. No. 1, same lode and mineral survey, identical with Cor. No. 2, Midnight No. 2 lode, Cor. No. 4, Midnight No. 4 lode and Cor. No. 1, Midnight No. 5 lode, mineral survey No. 5993, monumented with a wood post, 4 ins. square, 30 ins. long, in a mound of stone, scribed 2141 - 5993 M2 M3 M4 M5, bears N. 88° 08' W., 22.75 chs. dist.

from which

A dead mahogany, 3 ins. diam., bears N. 14° E., 33 lks. dist., scribed 2345 x 5993.

Cor. No. 4, same lode, identical with Cor. No. 3, Midnight No. 2 lode, same survey, Cor. No. 1, Midnight No. 6 lode, mineral survey No. 5996, and Cor. No. 2, Midnight No. 7 lode, mineral survey No. 5996, monumented with a wood post, 4 ins. square, 36 ins. long, in a mound of stone, bears N. 1° 42' E., 9.08 chs. dist.

from which

A cedar, 3 ins. diam., bears S. 71° E., 36 lks. dist., scribed BT 3-4-5993.

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

From the same point of intersection, Cor. No. 3, identical with Cor. No. 2, Midnight No. 6 lode, mineral survey No. 5996, monumented with a wood post, 4 ins. square, 36 ins. long, in a mound of stone, scribed 2-5996 M6 3-5993, bears N. 1° 42' E., 3.54 chs. dist.

from which

A maple, 4 ins. diam., bears S. 70° E., 44 lks. dist., mkd. with a healed blaze.

40.47 Point for the ¼ sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.

T 9 S R 2 E
¼ $\frac{S 31}{S 6}$
T 10 S
1981

47.92 Intersect line 1-4, Midnight No. 2 lode, mineral survey No. 5993, at a point from which Cor. No. 1, identical with Cor. No. 1, Midnight No. 4 lode, same mineral survey monumented with a wood post, 4 ins. square, 30 ins. long, and in a mound of stone, bears S. 1° 42' W., 3.28 chs. dist.

from which

A quartzite boulder, 2 x 3 ft., projecting 2½ ft. above the ground, mkd. X 5993 1-1-B0, bears N. 33½° E., 77 lks. dist.

Cor. No. 2, Midnight No. 2 lode, mineral survey No. 5993, identical with Cor. No. 1, Midnight No. 3 lode, Cor. No. 4, Midnight No. 4 lode, and Cor. No. 1, Midnight No. 5 lode, mineral survey No. 5993, hereinbefore described bears S. 88° 12' E., 22.74 chs. dist.

From the same point of intersection, point for Cor. No. 4, identical with Cor. No. 1, Midnight No. 7 lode, mineral survey No. 5996, established at a point so that line 4-1 is parallel and of equal length to line 2-3, Midnight No. 2 lode, mineral survey No. 5993, bears N. 1° 42' E., 5.80 chs. dist.; there is no remaining evidence of the original claim corner.

Set an iron T-bar, 18 ins. long, 12 ins. in the ground, with an aluminum cap, mkd.

4
5993

75.03 Center line of State Highway 91, bears NE and SW.

78.70 Center line of Interstate Highway 15, bears NE and SW.

81.24 The cor. of Tps. 9 and 10 S., Rs. 1 and 2 E., monumented with a concrete post, 5 ins. square, firmly set, 1 in. below the surface, with a Utah County Land Survey Brass cap mkd.

Dependent Resurvey of the South Boundary of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

```

      T 9 S
      |
R 1 E | 36 | 31 | R 2 E
      | 1 | 6 |
      |
      T 10 S
      1967
  
```

This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.

The cor. is located near the center of a gravel road bearing N and S, 53 lks. N of the intersection of the gravel road with 2 asphalt roads, bearing SW and W.

Dependent Resurvey of a Portion of the Subdivisional Lines of T. 9 S., R. 2 E., Salt Lake Meridian, Utah

(Reestablishment of the Survey Executed by
John T. Breckon in 1891)

From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., hereinbefore described.

N. 1° 08' W., bet. secs. 33 and 34.

39.88 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

```

      T 9 S R 2 E
      |
      1/4
      |
      S 33 | S 34
      |
      1981
  
```

79.76 Point for the cor. of secs. 27, 28, 33, and 34, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.

```

      T 9 S R 2 E
      |
      S 28 | S 27
      |
      S 33 | S 34
      |
      1981
  
```

Cor. falls on SE slope.

From the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, monumented with a concrete post, 5 ins. square, firmly set, projecting 1 in. above the ground, with a Utah County Land Survey brass cap, mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS		
	<p style="text-align: center;">T 9 S R 2 E $\frac{1}{4}$ $\frac{S 27}{S 34}$ 1972</p> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>S. 89° 14' W., bet. secs. 27 and 34.</p>	
2.50	Center line of asphalt road, 30 lks. wide, bears NNW and SSE.	
20.31	Point for the W 1/16 sec. cor. of secs. 27 and 34.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	<p style="text-align: center;">W 1/16 $\frac{S 27}{S 34}$ 1981</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p> <p>Cor. is located 42 lks. N of a fence line, extending E and W.</p>	
40.62	The cor. of secs. 27, 28, 33, and 34.	
	N. 1° 14' W., bet. secs. 27 and 28.	
39.88	Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original corner.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	<p style="text-align: center;">T 9 S R 2 E $\frac{1}{4}$ S 28 S 27 1981</p>	
79.76	Point for the cor. of secs. 21, 22, 27, and 28, at proportionate distance; there is no remaining evidence of the original corner.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	<p style="text-align: center;">T 9 S R 2 E S 21 S 22 S 28 S 27 1981</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with an iron rebar, 18 ins. long, $\frac{1}{2}$ in. diam., firmly set 14 ins. in the ground and in a collar of stone. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E</p> <p>$\frac{1}{4}$ S 22</p> <p>S 27</p> <p>1981</p> </div> <p>Bury the iron rebar alongside the iron post.</p> <p>S. $89^{\circ} 21'$ W., bet, secs. 22 and 27.</p> <p>36.50 Center line of asphalt road, 30 lks. wide, bears NW and SE.</p> <p>40.55 The cor. of secs. 21, 22, 27, and 28.</p>
	<p style="text-align: center;">(Reestablishment of the Survey Executed by C.L. Craig in 1856 and the Resurvey Executed by John T. Breckon in 1891)</p> <hr/> <p>N. $0^{\circ} 52'$ W., bet. secs. 21 and 22.</p> <p>5.00 Center line of asphalt road, 30 lks. wide, bears NW and SE.</p> <p>19.935 Point for the S $\frac{1}{16}$ sec. cor. of secs. 21 and 22.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>S $\frac{1}{16}$</p> <p> </p> <p>S 21 S 22</p> <p> </p> <p>1981</p> </div> <p>From this cor., an iron rebar, $\frac{1}{2}$ in. diam., firmly set, projecting 4 ins. above the ground, with a steel fence post alongside, bears South, 24 lks. dist.</p> <p>39.87 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E</p> <p>$\frac{1}{4}$</p> <p> </p> <p>S 21 S 22</p> <p> </p> <p>1981</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS											
59.805	<p>Point for the N 1/16 sec. cor. of secs. 21 and 22.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>N 1/16</p> <table border="0"> <tr> <td>S 21</td> <td> </td> <td>S 22</td> </tr> <tr> <td colspan="3" style="text-align: center;">1981</td> </tr> </table> </div>	S 21		S 22	1981						
S 21		S 22									
1981											
79.74	<p>The cor. of secs. 15, 16, 21, and 22, monumented with a concrete post, 6 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E</p> <table border="0"> <tr> <td>16</td> <td> </td> <td>15</td> </tr> <tr> <td>21</td> <td> </td> <td>22</td> </tr> <tr> <td colspan="3" style="text-align: center;">1957</td> </tr> </table> </div> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.</p>	16		15	21		22	1957			
16		15									
21		22									
1957											
<p>(Reestablishment of th Survey Executed by John T. Breckon in 1891)</p>											
39.96	<p>From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0° 01' W., bet. secs. 32 and 33.</p> <p>Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E</p> <p>¼</p> <table border="0"> <tr> <td>S 32</td> <td> </td> <td>S 33</td> </tr> <tr> <td colspan="3" style="text-align: center;">1981</td> </tr> </table> </div>	S 32		S 33	1981						
S 32		S 33									
1981											
79.92	<p>Point for the cor. of secs. 28, 29, 32, and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E</p> <table border="0"> <tr> <td>S 29</td> <td> </td> <td>S 28</td> </tr> <tr> <td>S 32</td> <td> </td> <td>S 33</td> </tr> <tr> <td colspan="3" style="text-align: center;">1981</td> </tr> </table> </div> <p>Cor. falls at the base of cliff, on a W slope.</p>	S 29		S 28	S 32		S 33	1981			
S 29		S 28									
S 32		S 33									
1981											

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
40.87	<p>From the cor. of secs. 27, 28, 33, and 34. S. 89° 02' W., bet. secs. 28 and 33. Point for the ¼ sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original corner. Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E S 28 ¼ S 33 1981</p> </div> <p>Raise a mound of stone, 4 ft. base, 3 ft. high, N of cor.</p>
81.74	<p>The cor. of secs. 28, 29, 32, and 33.</p>
39.97	<p>N. 1° 17' W., bet. secs. 28 and 29. Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original corner. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E ¼ S 29 S 28 1981</p> </div>
59.955	<p>Point for the N 1/16 sec. cor. of secs. 28 and 29. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>N 1/16 S 29 S 28 1981</p> </div>
79.94	<p>The cor. of secs. 20, 21, 28, and 29, monumented with a concrete post, 5 ins. square, firmly set, projecting 2 ins. above the ground, with a Utah County Land Survey brass cap mkd.</p> <div style="text-align: center;"> <p>T 9 S R 2 E 20 21 29 28 1967</p> </div> <p>This cor. is accepted as a careful and faithful perpetuation of the position of the original corner. Alongside the cor. is a steel fence post, firmly set, projecting 4 ft. above the ground.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS								
	Cor. falls in an old fence line, bearing N and S.							
	From the cor. of secs. 21, 22, 27, and 28. S. 89° 11' W., bet. secs. 21 and 28.							
20.435	Point for the E 1/16 sec. cor. of secs. 21 and 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd. <div style="text-align: center;"> <table border="0"> <tr><td>E 1/16</td><td>S 21</td></tr> <tr><td></td><td>S 28</td></tr> <tr><td></td><td>1981</td></tr> </table> </div>	E 1/16	S 21		S 28		1981	
E 1/16	S 21							
	S 28							
	1981							
20.73	Bottom of draw, drains NE.							
40.87	Point for the ¼ sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original corner. Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd. <div style="text-align: center;"> <table border="0"> <tr><td>T 9 S R 2 E</td></tr> <tr><td>¼</td><td>S 21</td></tr> <tr><td></td><td>S 28</td></tr> <tr><td></td><td>1981</td></tr> </table> </div>	T 9 S R 2 E	¼	S 21		S 28		1981
T 9 S R 2 E								
¼	S 21							
	S 28							
	1981							
81.74	The cor. of secs. 20, 21, 28, and 29.							
	N. 0° 35' W., bet. secs. 20 and 21.							
40.06	The ¼ sec. cor. of secs. 20 and 21, monumented with a concrete post, 5 ins. square, firmly set, projecting 1 in. above the ground, surrounded by a collar of stone, with a Utah County Land Survey brass cap mkd. <div style="text-align: center;"> <table border="0"> <tr><td>T 9 S R 2 E</td></tr> <tr><td>¼</td><td>COR</td></tr> <tr><td>S 20</td><td>S 21</td></tr> <tr><td></td><td>1961</td></tr> </table> </div> <p>This monument is accepted as a careful and faithful perpetuation of the position of the original corner. Cor. is located on N edge of Christmas tree stand.</p>	T 9 S R 2 E	¼	COR	S 20	S 21		1961
T 9 S R 2 E								
¼	COR							
S 20	S 21							
	1961							
20.58	(Reestablishment of the Survey Executed by C.L. Craig in 1856 and the Resurvey Executed by John T. Breckon in 1891) From the cor. of secs. 15, 16, 21, and 22. S. 89° 28' W., bet. secs. 16 and 21. Point for the E 1/16 sec. cor. of secs. 16 and 21.							

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.

E 1/16 $\frac{S\ 16}{S\ 21}$
1981

41.16 The ¼ sec. cor. of secs. 16 and 21, monumented with a concrete post, 6 ins. diam., firmly set flush with the ground, with brass cap mkd.

T 9 S R 2 E
 $\frac{S\ 16\ \frac{1}{4}}{S\ 21}$ COR
1956

This monument is accepted as a careful and faithful perpetuation of the position of the original corner.

From this cor., United States Coast and Geodetic Survey triangulation station "PAYSON" bears S. 56° 09' E., 24.255 chs. dist., monumented with a standard brass tablet, firmly set in concrete on a rock outcrop with brass tablet mkd. "PAYSON 1946."

From the cor. of secs. 28, 29, 32, and 33.

S. 87° 28' W., bet. secs. 29 and 32.

20.35 Point for the E 1/16 sec. cor. of secs. 29 and 32.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with aluminum cap mkd.

E 1/16 $\frac{S\ 29}{S\ 32}$
1981

Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.

40.45 Center of graveled road, bears NW and S.

40.70 The ¼ sec. cor. of secs. 29 and 32, monumented with a concrete post, 5 ins. square, firmly set, projecting 3 ins. above the ground, with a Utah County Land Survey brass cap mkd.

T 9 S R 2 E
 $\frac{S\ 29\ \frac{1}{4}}{S\ 32}$ COR
1965

This monument is accepted as a careful and faithful perpetuation of the position of the original corner.

From the cor. of secs. 20, 21, 28, and 29.

S. 89° 03' W., bet. secs. 20 and 29.

14.00 Center of canal, bears N and S.

15.00 Center of graveled road, 25 lks. wide, bears N and S.

Dependent Resurvey of a Portion of the Subdivisional Lines of
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS		
20.145	Point for the E 1/16 sec. cor. of secs. 20 and 29; not monumented.	
40.29	<p>The 1/4 sec. cor. of secs. 20 and 29, monumented with a concrete post, 5 ins. square, firmly set flush with the ground, with a Utah County Land Survey brass cap mkd.</p> <p style="text-align: center;">T 9 S R 2 E S 20 1/4 S 29 COR 1957</p> <p>This monument is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>Cor. is located in a fence cor. from which fences bear N, S and W.</p>	
<p>Survey of the Subdivision of Section 21, T. 9 S., R. 2 E., Salt Lake Meridian, Utah</p>		
<p>From the 1/4 sec. cor. of secs. 21 and 28.</p>		
	<p>N. 1° 06' W., on the N and S center line of sec. 21.</p>	
19.985	<p>Point for the center S 1/16 sec. cor. of sec. 21.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">C S 1/16 S 21 C 1981</p>	
39.47	N edge of water tank foundation.	
39.97	<p>Point for the center 1/4 sec. cor. of sec. 21; at intersection with the E-W center line.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 9 S R 2 E C 1/4 S 21 1981</p>	
42.61	Center line of asphalt road, bears SE and NW.	
59.96	<p>Point for the center N 1/16 sec. cor. of sec. 21.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	

Survey of the Subdivision of Section 21,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
79.95	<div style="text-align: center;"> </div> <p>The 1/4 sec. cor. of secs. 16 and 21.</p>
20.51	<p>From the 1/4 sec. cor. of secs. 21 and 22. S. 89° 19' W., on the E and W center line of sec. 21. Point for the center E 1/16 sec. cor. of sec. 21. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>
38.06	<div style="text-align: center;"> </div> <p>Center line of asphalt road, bears SE and NW.</p>
41.02	<p>The center 1/4 sec. cor. of sec. 21.</p>
81.56	<p>The 1/4 sec. cor. of secs. 20 and 21.</p>
19.96	<p>From the center E 1/16 sec. cor. of sec. 21. N. 0° 59' W., on the N and S center line of the NE 1/4 of sec. 21. Point for the NE 1/16 sec. cor. of sec. 21, at intersection with the E-W center line. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
39.92	<div style="text-align: center;"> </div> <p>The E 1/16 sec. cor. of secs. 16 and 21.</p>
20.545	<p>From the N 1/16 sec. cor. of secs. 21 and 22. S. 89° 23' W., on the E and W center line of the NE 1/4 of sec. 21. The NE 1/16 sec. cor. of sec. 21.</p>
41.09	<p>The center N 1/16 sec. cor. of sec. 21.</p>
	<p>From the E 1/16 sec. cor. of secs. 21 and 28. N. 0° 59' W., on the N and S center line of the SE 1/4 of sec. 21.</p>

Survey of the Subdivision of Section 21,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
19.96	Point for the SE 1/16 sec. cor. of sec. 21; at intersection with the E-W center line. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd. SE 1/16 S 21 1981
26.00	Center line of asphalt road, bears NW and SE.
39.92	The center E 1/16 sec. cor. of sec. 21.
From the S 1/16 sec. cor. of secs. 21 and 22. S. 89° 15' W., on the E and W center line of the SE¼ of sec. 21.	
15.00	Center line of asphalt road, bears NW and SE.
20.475	The SE 1/16 sec. cor. of sec. 21.
40.95	The center S 1/16 sec. cor. of sec. 21.
Survey of the Subdivision of Section 27, T. 9 S., R. 2 E., Salt Lake Meridian, Utah	
From the ¼ sec. cor. of secs. 27 and 34. N. 1° 16' W., on the N and S center line of sec. 27.	
39.71	Point for the center ¼ sec. cor. of sec. 27; at intersection with the E and W center line. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T 9 S R 2 E C ¼ S 27 1981
79.67	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor. The ¼ sec. cor. of secs. 22 and 27.
From the ¼ sec. cor. of secs. 26 and 27, monumented with a concrete post, 5 ins. square, firmly set, projecting 1 in. above the ground, with a Utah County Land Survey brass cap mkd. T 9 S R 2 E ¼ 27 26 1974	

Survey of the Subdivision of Section 27,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
	This cor. is accepted as a careful and faithful perpetuation of the position of the original corner.
	Alongside the cor. is a steel fence post.
	S. 89° 28' W., on the E and W center line of sec. 27.
40.18	The center ¼ sec. cor. of sec. 27.
60.47	Point for the center W 1/16 sec. cor. of sec. 27.
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p>W 1/16</p> <p>C ——— C</p> <p style="margin-left: 100px;">S 27</p> <p style="margin-left: 100px;">1981</p>
	Cor. is located S. 61½° E., 47 lks. dist. from the SE cor. of a concrete platform, 6 x 5 ft.
61.64	Center line of asphalt road, bears SE and NW.
80.76	The ¼ sec. cor. of secs. 27 and 28.
	From the W 1/16 sec. cor. of secs. 27 and 34.
	N. 1° 15' W., on the N and S center line of the SW¼ of sec. 27.
36.39	Center line of asphalt road, bears SE and NW.
39.79	The center W 1/16 sec. cor. of sec. 27.
<p>Survey of the Subdivision of Section 29, T. 9 S., R. 2 E., Salt Lake Meridian, Utah</p>	
	From the ¼ sec. cor. of secs. 29 and 32.
	N. 1° 00' W., on the N and S center line of sec. 29.
12.50	Center line of canal, bears NE and SW.
14.00	Center of graveled road, 25 lks. wide, bears NE and SW.
41.00	Point for the center ¼ sec. cor. of sec. 29, at intersection with the E and W center line.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T 9 S R 2 E</p> <p style="margin-left: 100px;">C ¼ S 29</p> <p style="margin-left: 100px;">1981</p>
	Set an old wooden fence post, 6 ft. long, alongside the iron post.
57.49	Center line of asphalt road, bears E and W.
61.035	Point for the center N 1/16 sec. cor. of sec. 29; not monumented.

Survey of the Subdivision of Section 29,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
81.07	The $\frac{1}{4}$ sec. cor. of secs. 20 and 29.
	From the $\frac{1}{4}$ sec. cor. of secs. 28 and 29. S. $88^{\circ} 55'$ W., on the E and W center line of sec. 29.
19.07	Center of unimproved road, 17 lks. wide, bears SE and NW.
20.245	Point for the center E $\frac{1}{16}$ sec. cor. of sec. 29. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p>E $\frac{1}{16}$</p> <p>C ——— C</p> <p>S 29</p> <p>1981</p>
21.09	Center of canal, bears NE and SW.
21.39	Center of graveled road, 25 lks. wide, bears NE and SW.
40.49	The center $\frac{1}{4}$ sec. cor. of sec. 29.
80.87	The $\frac{1}{4}$ sec. cor. of secs. 29 and 30, monumented with a concrete post, 5 ins. square, firmly set 3 ins. below the surface, with a brass cap mkd. illegibly. This cor. is accepted as a carefully and faithful perpetuation of the position of the original corner. Cor. is located 3 lks. E of the center line of State Highway No. 91, bearing NE and SW.
	From the center E $\frac{1}{16}$ sec. cor. of sec. 29. N. $1^{\circ} 08'$ W., on the N and S center line of the NE $\frac{1}{4}$ of sec. 29.
2.00	Center of canal, bears SE and NW.
2.85	Center of graveled road, 25 lks. wide, bears NE and SW.
20.01	Point for the NE $\frac{1}{16}$ sec. cor. of sec. 29; at intersection with the E and W center line. Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.
	<p>NE $\frac{1}{16}$</p> <p>S 29</p> <p>1981</p>
	Set a wooden post, 4 ins. square, 5 ft. long, alongside the iron post.
40.02	Point for the E $\frac{1}{16}$ sec. cor. of secs. 20 and 29.
	From the N $\frac{1}{16}$ sec. cor. of secs. 28 and 29. S. $88^{\circ} 59'$ W., on the E and W center line of the NE $\frac{1}{4}$ of sec. 29.

Survey of the Subdivision of Section 29,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
16.00	Center of canal, bears N and S.
17.25	Center of graveled road, 25 lks. wide, bears SE and NW.
20.195	The NE 1/16 sec. cor. of sec. 29.
40.39	Point for the center N 1/16 sec. cor. of sec. 29.
	From the E 1/16 sec. cor. of secs. 29 and 32.
	N. 1° 08' W., on the N and S center line of the SE 1/4 of sec. 29.
40.48	The center E 1/16 sec. cor. of sec. 29.
	<p style="text-align: center;">Survey of the Subdivision of Section 34, T. 9 S., R. 2 E., Salt Lake Meridian, Utah</p>
	From the 1/4 sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 0° 42' W., on the N and S center line of sec. 34.
39.94	Point for the center 1/4 sec. cor. of sec. 34; at intersection with the E and W center line.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T 9 S R 2 E C 1/4 S 34 1981</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
40.15	Fence line, bears E and W.
40.44	Graveled driveway, 20 lks. wide, bears E and NW.
75.50	Center line of asphalt road, 30 lks. wide, bears NNW and SSE.
80.06	The 1/4 sec. cor. of secs. 27 and 34.
	From the 1/4 sec. cor. of secs. 34 and 35, monumented with a concrete post, 5 ins. square, firmly set, projecting 2 ins. above the ground, with brass cap mkd.
	<p style="text-align: center;">T 9 S R 2 E 1/4 34 35 1974</p>
	Alongside the concrete post is a sandstone, 14 x 12 x 7 ins., plainly mkd. 1/4 on one face.
	Fallen fences extend N, E and W, from the cor.

Survey of the Subdivision of Section 34,
T. 9 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89° 35' W., on the E and W center line of sec. 34.
34.88	Center line of asphalt road, 30 lks. wide, bears N and S.
39.93	The center $\frac{1}{4}$ sec. cor. of sec. 34.
60.095	Point for the center W $\frac{1}{16}$ sec. cor. of sec. 34.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	W $\frac{1}{16}$
	C S 34 C
	1981
80.26	The $\frac{1}{4}$ sec. cor. of secs. 33 and 34.
	From the W $\frac{1}{16}$ sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 0° 55' W., on the N and S center line of the SW $\frac{1}{4}$ of sec. 34.
39.90	The center W $\frac{1}{16}$ sec. cor. of sec. 34.
	N. 0° 55' W., on the N and S center line of the NW $\frac{1}{4}$ of sec. 34.
40.00	The W $\frac{1}{16}$ sec. cor. of secs. 27 and 34.
	General Description
	The area surveyed lies immediately south of Payson, Utah, along the north slopes of Dry Mountain in the Wasatch Range. The elevation ranges from 4700 to 7600 feet above sea level.
	Peteetneet Creek flows northward down Payson Canyon and drains most of the central portion of the area, while Loafer Canyon drains the eastern portion. Water along the west facing slopes is funneled towards Spring Lake.
	Sagebrush, juniper and oak brush dominate the slopes, with some stands of fir, mostly in the higher elevations. The soil is shallow and rocky.
	State Highway No. 91 borders the western side of the mountains and asphalt-surfaced roads in Payson and Loafer Canyons provide access to the remainder of the area.
	The magnetic declination was transcribed from U.S. Geological Survey maps.

CERTIFICATE OF SURVEY

334

(I) ~~(We)~~, Gary L. Kratz, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 28th day

of April, 19 81. (I) ~~(We)~~ have dependently resurveyed the south boundary and a portion of the subdivisional lines and subdivided sections 21, 27, 28, 29, and 34 of Township 9 South, Range 2 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 23, 1982
(Date)

Gary L. Kratz
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the south boundary and a portion of the subdivisional lines and the survey of the subdivision of sections 21, 27, 28, 29, and 34 of Township 9 South, Range 2 East, Salt Lake Meridian, Utah

executed by Gary L. Kratz, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

August 30, 1982
(Date)

Glen B. Hatch
(Chief, Cadastral Survey Examination and Approval Staff)
Chief Cadastral Surveyor for Utah

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Cadastral Survey Examination and Approval Staff)
Chief Cadastral Surveyor for Utah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

R604

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

THE WEST ONE MILES OF THE SOUTH AND NORTH BOUNDARIES,

PORTIONS OF THE SUBDIVISIONAL LINES

AND

THOSE MINERAL SURVEYS NECESSARY FOR PROPER CLOSURE

AND THE SURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 8 SOUTH, RANGE 17 WEST

Of the Salt Lake Meridian,
In the State of Utah

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor
Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated January 26, 1979, approved January 29, 1979

_____, which provided for the surveys included under ~~XXXXXX~~ Survey/Group
Number 587, and assignment instructions dated April 9, 1979.

Survey commenced April 24, 1979

Survey completed June 18, 1979

INDEX DIAGRAM

Township 8 South, Range 17 West

3						
6 38	5 21	4	8	2	1	
37	36	20	17		11	
7 35	8 19	9	10 17	11 11	12	
33	31		16	16	10	
18 29	17	16	15 15	14 10	13	
29	28		15	15	10	
19 27	20 19	21	22 14	23 9	24	
24	24	19	14	13	9	
30 23	29 18	28	27 13	26 8	25	
21		17	12	12		
	7					
31 4	32 6	33	34 11	35	36	
1						

Mineral Surveys

- Pages 39 - 62

Township 8 South, Range 17 West, Salt Lake Meridian, Utah

CHAINS

The south boundary was surveyed by Joseph Gorlinski in 1875 and dependently resurveyed by Leslie Godwin in 1958. The east boundary was independently resurveyed and the west boundary surveyed by Andrew Nelson in 1925. The north boundary and a portion of the subdivisional lines were surveyed by Leslie Godwin in 1958.

The following field notes are those of a dependent resurvey of the west one miles of the south and north boundaries, portions of the subdivisional lines, and those mineral surveys necessary for proper closure, and the survey of a portion of the subdivisional lines completing the subdivision of T. 8 S., R. 17 W., Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 587, Utah, dated January 26, 1979.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

Measurements were determined by electronic means along survey lines where accessible.

The geographic position of the southeast corner of the township, as recorded in the 1958 survey is as follows:

Latitude $40^{\circ} 04' 47.8''$ N. Longitude $113^{\circ} 42' 01.9''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $16^{\circ} 30'$ E.

Dependent Resurvey of a Portion of the South Boundary,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring the Survey Executed by Joseph Gorlinski
in 1875 and the Resurvey Executed by
Leslie H. Godwin in 1958)

Beginning at the cor. of secs. 5 and 6, T. 9 S., R. 17 W., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 resurvey of the N. bdy. of T. 9 S., R. 17 W.

Dependent Resurvey of a Portion of the South Boundary,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- From this cor., the cor. of secs. 31 and 32, T. 8 S., R. 17 W., bears S. 89° 22' E., 0.26 chs. dist., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 resurvey of the N. bdy. of T. 9 S., R. 17 W.
- S. 88° 57' W., along the N. bdy. of sec. 6, T. 9 S., R. 17 W.
- Over broken mountain land of Clifton Hills, along general S. slope, through scrub juniper and pinon.
- 5.045 Intersect line 1 - 4 of Bully Boy Lode, M.S. No. 5046.
- From this intersection, Cor. No. 1, bears S. 10° 12' W., 2.060 chs. dist., monumented with a squared wooden post, set, in a mound of stone, scribed 1-5046.
- From this same intersection, Cor. No. 4, bears N. 10° 12' E., 20.661 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 4-5046.
- 37.48 Point for the ¼ sec. cor. of sec. 31, T. 8 S., R. 17 W., only, at 40.00 chs. of Easting from the cor. of Tps. 8 and 9 S., Rs. 17 and 18 W.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.
- T 8 S R 17 W
¼ S 31
T 9 S R 17 W
1979
- 40.24 The ¼ sec. cor. of sec. 6, T. 9 S., R. 17 W., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 resurvey of the N. bdy. of T. 9 S., R. 17 W.
- S. 89° 07' W., beginning new measurement.
- Over broken mountain land.
- 0.74 The original ¼ sec. cor. of sec. 31, T. 8 S., R. 17 W., monumented with an iron post, 2½ ins. diam., set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 resurvey of the N. bdy. of T. 9 S., R. 17 W. This cor. will now function for alignment only and the letters AP were added to the markings.
- 12.457 Intersect line 1-2 of Fortuna Hill Lode, M.S. No. 5885.
- From this intersection Cor. No. 1, bears N. 37° 07' E., 6.922 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 1-5885.
- From this same intersection, Cor. No. 2, bears S. 37° 07' W., 15.797 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 2-5885.

Dependent Resurvey of a Portion of the South Boundary,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
24.024	<p>Intersect line 3-4 of Fortuna Hill Lode, M.S. No. 5885.</p> <p>From this intersection, Cor. No. 3, bears S. 37° 05' W., 8.687 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 3-5885.</p> <p>From this same intersection, Cor. No. 4, bears N. 37° 05' E., 14.032 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 4-5885.</p> <p>From which</p> <p style="padding-left: 40px;">Cor. No. 1, bears S. 52° 57' E., 9.125 chs. dist., hereinbefore described.</p>
27.981	<p>Intersect line 1-4 of Montedelrey No. 3 Lode, M.S. No. 6066.</p> <p>From this intersection, Cor. No. 1, bears S. 28° 33' W., 14.398 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed 1-6066.</p> <p>From this same intersection, Cor. No. 4, bears N. 28° 33' E., 8.65 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
37.24	<p>The cor. of Tps. 8 and 9 S., Rs. 17 and 18 W., monumented with an iron post, 3 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1925 survey of the E. bdy. of T. 8 S., R. 18 W.</p>
<p>Dependent Resurvey of a Portion of the North Boundary, T. 8 S., R. 17 W., Salt Lake Meridian, Utah</p>	
<p>(Restoring the Survey Executed by Leslie Godwin in 1958)</p>	
27.705	<p>From the cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., hereinafter described.</p> <p>N. 89° 58' W., bet. secs. 6 and 31.</p> <p>Intersect line 2-3 of Gem No. 3 Lode, M.S. No. 5417.</p> <p>From this intersection, Cor. No. 3, bears N. 22° 13' W., 4.334 chs. dist., monumented with a decayed wooden post, loosely set in a mound of stone, no scribe marks visible, rebuild mound of stone, 3 ft. base, 2 ft. high.</p> <p>From this same intersection, Cor. No. 2, identical with Cor. No. 3 of Gem No. (2) Lode, same survey, bears S. 22° 13' E., 6.531 chs. dist., monumented with a small mound of stone, no marks found. This position is harmoniously related with other identified cors. of this mineral survey and is accepted as the best available evidence of the original corner position, rebuild the mound of stone, 3 ft. base, 2 ft. high.</p>
40.10	<p>The ¼ sec. cor. of secs. 6 and 31, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of the N. bdy. of T. 8 S., R. 17 W.</p>

Dependent Resurvey of a Portion of the North Boundary,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	S. 89° 57' W., beginning new measurement.
26.284	Intersect line 3-4 of Dottie Lode, Lot No. 62, M.S. No. 26.
	From this intersection, Cor. No. 3, bears N. 26° 37' W., 8.816 chs. dist., monumented with a squared wooden post, in a mound of stone, no scribe marks visible.
	From this same intersection, Cor. No. 4, bears S. 26° 37' E., 14.592 chs. dist., monumented with a squared pine post, firmly set in a mound of stone, scribed US 62 P4.
27.738	Intersect line 8-9 of Alvorado Lode, Lot No. 59, M.S. No. 23.
	From this intersection, Cor. No. 8, bears N. 3° 30' W., 6.218 chs. dist., monumented with a small mound of stone, no marks found, rebuild the mound of stone, 3 ft. base, 2 ft. high.
	From this same intersection, Cor. No. 9, bears S. 3° 30' E., 2.805 chs. dist., monumented with a squared pine post, in a mound of stone, scribed US 59.
31.336	Intersect line 9-10 of Alvorado Lode, Lot No. 59, M.S. No. 23.
	From this intersection, Cor. No. 10, bears N. 53° 24' W., 18.16 chs. dist., monumented with a squared pine post, in a mound of stone, with illegible scribe marks.
	From this same intersection, Cor. No. 9, bears S. 53° 24' E., 4.695 chs. dist., hereinbefore described.
37.72	The closing cor. of secs. 6 and 31, Tps. 7 and 8 S., R. 17 W., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 resurvey of the N. bdy. of T. 8 S., R. 17 W.
	Dependent Resurvey of a Portion of the Subdivisional Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah
	(Restoring the Survey Executed by Leslie Godwin in 1958)
	From the cor. of secs. 31 and 32, on the S. bdy. of the Tp.
	N. 2° 02' W., bet. secs. 31 and 32.
	Over broken mountains of Clifton Hills.
20.10	Intersect line 3-4 of Bully Boy Lode, M.S. No. 5046.
	From this intersection, Cor. No. 1 of Mary Anderson Lode, identical with Cor. No. 1 of Agnes Winzell Lode, M.S. No. 6259 located on line 3-4, Bully Boy Lode, M.S. No. 5046, bears S. 80° 23' E., 3.832 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
	<p>From this same intersection, Cor. No. 4, bears N. 80° 23' W., 0.948 chs. dist., hereinbefore described.</p>	
22.441	<p>Intersect line 1-2 of Mary Anderson Lode, M.S. No. 6259.</p> <p>From this intersection, Cor. No. 1, identical with Cor. No. 1 of Agness Winzell Lode, M.S. No. 6259, bears S. 52° 21' E., 4.879 chs. dist., hereinbefore described.</p>	
	<p>From this same intersection, Cor. No. 2, bears N. 52° 21' W., 4.360 chs. dist., monumented with a mound of stone, no marks found. This position is harmoniously related with other identified original corners in the area and is accepted as the best available evidence of the original corner position.</p>	
32.108	<p>Intersect line 2-3 of Mary Anderson Lode, M.S. No. 6259.</p> <p>From this intersection, Cor. No. 2, bears S. 23° 58' W., 7.656 chs. dist., hereinbefore described.</p>	
	<p>From this same intersection, Cor. No. 3, bears N. 23° 58' E., 15.037 chs. dist., monumented with a wooden post, 4 x 4 ins., square, set in a mound of stone, with illegible scribe marks.</p>	
38.46	<p>Point for the ¼ sec. cor. of sec. 31 only, at 40.00 chs. of southing from the cor. of secs. 29, 30, 31, and 32.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.</p>	
	<p style="text-align: center;">T 8 S R 17 W</p> <p style="text-align: center;">¼ </p> <p style="text-align: center;">S 31 </p> <p style="text-align: center;">1979</p>	
39.96	<p>The ¼ sec. cor. of secs. 31 and 32, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines. This cor. will now function as the ¼ sec. cor. of sec. 32 only, and was remarked.</p>	
	<p style="text-align: center;">T 8 S R 17 W</p> <p style="text-align: center;"> ¼</p> <p style="text-align: center;"> S 32</p> <p style="text-align: center;">1958</p> <p style="text-align: center;">1979</p>	
	<p>N. 0° 21' W., beginning new measurement.</p>	
38.50	<p>Over mountainous land, through scrub juniper and juniper.</p> <p>The cor. of secs. 29, 30, 31, and 32, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines. This cor. will now function as the cor. for secs. 31 and 32 only and was remarked.</p>	

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

T 8 S R 17 W

S 30

S 31 | S 32

1958

1979

From this cor., the cor. of secs. 29 and 30 only, bears
S. $89^{\circ} 53'$ E., 2.05 chs. dist., hereinafter described.

From the cor. of secs. 32 and 33, on the S. bdy. of the
Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly
set in a mound of stone, with brass cap mkd. as described
in the 1958 survey of the S. bdy.

N. $0^{\circ} 01'$ W., bet. secs. 32 and 33.

Over rolling land, through scattered sagebrush and
shadscale.

20.512 Intersect line 2-3 of Hancock Lode, M.S. No. 5690.

From this intersection, Cor. No. 2, bears S. $44^{\circ} 45'$ W.,
16.722 chs. dist., monumented with a squared wooden post,
set in a mound of stone, with illegible scribe marks.

From this same intersection point, Cor. No. 3, identical
with Cor. No. 2 of Albert Lode, same survey, bears
N. $44^{\circ} 45'$ E., 4.853 chs. dist., monumented with a
squared wooden post, set in a mound of stone, with
illegible scribe marks

from which

Cor. No. 3 of Albert Lode, bears N. $70^{\circ} 37'$ E.,
23.108 chs. dist., monumented with a squared
wooden post, set in a mound of stone, with illegible
scribe marks.

32.594 Intersect line 1-4 of Albert Lode, M.S. No. 5690.

From this intersection, Cor. No. 1, identical with Cor.
No. 4 of Hancock Lode, same survey, bears S. $71^{\circ} 47'$ W.,
1.745 chs. dist., monumented with a squared wooden post,
set in a mound of stone, with illegible scribe marks.

From this same intersection, Cor. No. 4, bears
N. $71^{\circ} 47'$ E., 21.291 chs. dist., monumented with a
squared wooden post, set in a mound of stone, with
illegible scribe marks.

from which

Cor. No. 3, bears S. $33^{\circ} 14'$ E., 9.111 chs. dist.,
hereinbefore described.

38.677 Intersect line 1-4 of Electric Lode No. 1 Lode,
M.S. No. 6258.

From this intersection, Cor. No. 4, bears N. $81^{\circ} 04'$ E.,
2.746 chs. dist., monumented with a squared wooden post,
set in a mound of stone, with illegible scribe marks.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p>From this same intersection, Cor. No. 1, bears S. 81° 04' W., 15.381 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
39.22	<p>The ¼ sec. cor. of secs. 32 and 33, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines of T. 8 S., R. 17 W.</p>
	<p>N. 2° 49' W., beginning new measurements. Over mountainous land.</p>
21.157	<p>Intersect line 2-3 of Electric Lode No. 4 lode, M.S. No. 6258.</p>
	<p>From this intersection, Cor. No. 2, bears S. 89° 14' W., 8.525 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
	<p>From this same intersection, Cor. No. 3, bears N. 89° 14' E., 10.456 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
25.70	<p>Trail road, bears E and W.</p>
39.86	<p>The cor. of secs. 28, 29, 32, and 33, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines. This cor. will now function as the cor. for secs. 32 and 33 only, and was remarked.</p>
	<p style="text-align: center;">T 8 S R 17 W S 29 S 32 S 33 1958 1979</p>
	<p>From this cor., the cor. of secs. 28 and 29 only, bears N. 89° 57' E., 1.96 chs. dist., hereinafter described.</p>
	<p>N. 89° 42' W., along the N. bdy. of sec. 32. Over broken mountainous land.</p>
38.04	<p>Point for the ¼ sec. cor. of sec. 29 only, at 40.00 chs. of westing from the cor. of secs. 28 and 29. Set an aluminum post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W ¼ S 29 1979</p>

344

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
40.02	<p>The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines. This cor. will now function as the $\frac{1}{4}$ sec. cor. of sec. 32 only, and was remarked.</p>
	<p style="text-align: center;">T 8 S T 17 W <hr style="width: 50%; margin: auto;"/> $\frac{1}{4}$ S 32 1958 1979 <hr style="width: 50%; margin: auto;"/></p> <p>N. $89^{\circ} 53'$ W., beginning new measurement. Over broken mountainous land.</p>
28.00	Trail road, in canyon, bears N and S.
38.02	<p>Point for the cor. of secs. 29 and 30 only, at 80.00 chs. of westing from the cor. of secs. 28 and 29.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W S 30 S 29 <hr style="width: 50%; margin: auto;"/> S 32 1979</p>
40.07	The cor. of secs. 31 and 32 only, hereinbefore described.
	<p style="text-align: center;">Survey of a Portion of the Subdivisional Lines, T. 8 S., R. 17 W., Salt Lake Meridian, Utah</p>
	<p>From the cor. of secs. 25, 26, 35, and 36, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a collar of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p> <p>N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.</p> <p>Over rolling desert land, covered with shadscale and bunch grass.</p>
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ <hr style="width: 50%; margin: auto;"/> S 26 S 25 <hr style="width: 50%; margin: auto;"/> 1979</p> <p>Cor. is located on S side of sandy wash.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
51.00	Trail road, bears E and W.
80.00	<p>Point for the cor. of secs. 23, 24, 25, and 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 23 S 24 S 26 S 25 1979</p>
40.03	<p>From the cor. of secs. 24 and 25 only, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 independent resurvey of the W. bdy. of T. 8 S., R. 16 W.</p> <p>N. 89° 59' W., bet. secs. 24 and 25.</p> <p>Over rolling desert land, draining E.</p> <p>Point for the ¼ sec. cor. of secs. 24 and 25.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 24 ¼ S 25 1979</p>
80.06	<p>The cor. of secs. 23, 24, 25, and 26.</p> <p>N. 0° 01' W., bet. secs. 23 and 24.</p> <p>Over rolling desert land, draining E.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 23 and 24.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W ¼ S 23 S 24 1979</p>
80.00	<p>Point for the cor. of secs. 13, 14, 23, and 24.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 14 S 13 S 23 S 24 1979</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p>From the cor. of secs. 13 and 24 only, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 independent resurvey of the W. bdy. of T. 8 S., R. 16 W.</p> <p>S. 89° 58' W., bet. secs. 13 and 24.</p> <p>Over sandy rolling desert land, draining E.</p>
40.03	<p>Point for the ¼ sec. cor. of secs. 13 and 24.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W ¼ S 13 S 24 1979</p>
80.06	<p>The cor. of secs. 13, 14, 23, and 24.</p>
	<p>N. 0° 01' W., bet. secs. 13 and 14.</p> <p>Over rolling desert land, draining E.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 13 and 14.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W ¼ S 14 S 13 1979</p>
80.00	<p>Point for the cor. of secs. 11, 12, 13, and 14.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 11 S 12 S 14 S 13 1979</p>
40.03	<p>From the cor. of secs. 12 and 13 only, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 independent resurvey of the W. bdy. of T. 8 S., R. 16 W.</p> <p>S. 89° 56' W., bet. secs. 12 and 13.</p> <p>Over rolling desert land, draining E.</p> <p>Point for the ¼ sec. cor. of secs. 12 and 13.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
80.06	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ $\frac{S 12}{S 13}$ 1979</p> <p>The cor. of secs. 11, 12, 13, and 14.</p>	
40.04	<p>N. 0° 02' E., bet. secs. 11 and 12. Over rolling desert land, draining E.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>	
80.08	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 11 — S 12 1979</p> <p>No accessories available.</p> <p>The cor. of secs. 1, 2, 11, and 12, monumented with an iron post, 2½ ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>	
39.99	<p>From the cor. of secs. 1 and 12 only, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd. as described in the official record of the 1925 independent resurvey of the W. bdy. of T. 8 S., R. 16 W.</p> <p>S. 89° 59' W., bet. secs. 1 and 12. Over rolling desert land, draining E.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12. Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with aluminum cap mkd.</p>	
79.98	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ $\frac{S 1}{S 12}$ 1979</p> <p>No accessories available.</p> <p>The cor. of secs. 1, 2, 11, and 12.</p>	
	<p>From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the dependent resurvey of the N. bdy. of T. 9 S., R. 17 W.</p>	

348

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	N. 0° 01' W., bet. secs. 34 and 35.
	Over broken desert land, draining E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.
	<div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>$\frac{1}{4}$</p> <p>S 34 S 35</p> <p>1979</p> </div>
80.00	Point for the cor. of secs. 26, 27, 34, and 35.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
	<div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>S 27 S 26</p> <p>S 34 S 35</p> <p>1979</p> </div>
	Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.
	From the cor. of secs. 25, 26, 35, and 36.
	N. 89° 56' W., bet. secs. 26 and 35.
	Over desert land; asc. general E slope.
33.60	Graded gravel road, bears N. 15° W. and S. 15° E.
40.04	Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with aluminum cap mkd.
	<div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>$\frac{1}{4}$ S 26</p> <p>S 35</p> <p>1979</p> </div>
	No other accessories available.
80.08	The cor. of secs. 26, 27, 34, and 35.
	N. 89° 56' W., bet. secs. 27 and 34.
	Over broken desert land; asc. gentle E slope.
40.01	Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with aluminum cap mkd.

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ $\frac{S 27}{S 34}$ 1979</p> <p>Raise a mound of stone, 3½ ft. base, 1 ft. high, E of cor. Cor. is located on E side of old gravel road.</p> <p>80.02 The cor. of secs. 27, 28, 33, and 34, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>
	<p>From the cor. of secs. 26, 27, 34, and 35. N. 0° 01' W., bet. secs. 26 and 27. Over broken desert land, draining E.</p> <p>40.00 Point for the ¼ sec. cor. of secs. 26 and 27. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 27 S 26 1979</p> <p>80.00 Point for the cor. of secs. 22, 23, 26, and 27. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 22 S 23 S 27 S 26 1979</p>
	<p>From the cor. of secs. 23, 24, 25, and 26. N. 89° 56' W., bet. secs. 23 and 26. Over rolling desert land; asc. over gentle E slope.</p> <p>40.04 Point for the ¼ sec. cor. of secs. 23 and 26. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
	<p>T 8 S R 17 W</p> <p>¼ $\frac{S\ 23}{S\ 26}$</p> <p>1979</p>	
40.80	Trail road, bears NW and SE.	
56.50	Graded gravel road, bears N. 15° W. and S. 15° E.	
80.08	The cor. of secs. 22, 23, 26, and 27.	
	N. 89° 56' W., bet. secs. 22 and 27.	
	Over rocky desert land; asc. over E slope.	
34.50	Graded gravel road, bears N and S.	
40.01	Point for the ¼ sec. cor. of secs. 22 and 27.	
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground; and in a collar of stone, with aluminum cap mkd.	
	<p>T 8 S R 17 W</p> <p>¼ $\frac{S\ 22}{S\ 27}$</p> <p>1979</p>	
80.02	The cor. of secs. 21, 22, 27, and 28, monumented with an iron post, 2½ ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.	
	From the cor. of secs. 22, 23, 26, and 27.	
	N. 0° 01' W., bet. secs. 22 and 23.	
	Over rocky desert land, along gentle E slope.	
32.50	Graded gravel road, bears N. 48° 15' W. and S. 48° 15' E.	
40.00	Point for the ¼ sec. cor. of secs. 22 and 23.	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	<p>T 8 S R 17 W</p> <p>¼ $\frac{S\ 22}{S\ 23}$</p> <p>1979</p>	
80.00	Point for the cor. of secs. 14, 15, 22, and 23.	

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 15 S 14 S 22 S 23 1979</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.</p>
40.05	<p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. 89° 56' W., bet. secs. 14 and 23.</p> <p>Over rolling desert land; asc. over gentle E slope.</p> <p>Point for the ¼ sec. cor. of secs. 14 and 23.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 14 ¼ S 23 1979</p>
80.10	<p>The cor. of secs. 14, 15, 22, and 23.</p> <p>N. 89° 55' W., bet. secs. 15 and 22.</p> <p>Over desert land; asc. over E slope.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 15 and 22.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 15 ¼ S 22 1979</p>
43.10	<p>Graded gravel road, bears N. 31° W. and S. 31° E.</p>
80.00	<p>The cor. of secs. 15, 16, 21, and 22, monumented with an iron post, 2½ ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>
	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>N. 0° 01' W., bet. secs. 14 and 15.</p> <p>Over rocky desert land; along gentle E slope.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>$\frac{1}{4}$</p> <p>S 15 S 14</p> <p>1979</p> </div> <p>Continue along broken E slope.</p>
80.00	<p>Point for the cor. of secs. 10, 11, 14, and 15.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>S 10 S 11</p> <p>S 15 S 14</p> <p>1979</p> </div>
40.05	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. $89^{\circ} 56'$ W., bet. secs. 11 and 14.</p> <p>Over rocky desert land; asc. over E slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>S 11</p> <p>$\frac{1}{4}$ S 14</p> <p>1979</p> </div>
80.10	<p>The cor. of secs. 10, 11, 14, and 15.</p> <p>N. $89^{\circ} 56'$ W., bet. secs. 10 and 15.</p> <p>Over broken and hilly desert land; asc. over E slope.</p>
40.01	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of brass cap, mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>S 10</p> <p>$\frac{1}{4}$ S 15</p> <p>1979</p> </div>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
80.02	<p>True point for the cor. of secs. 9, 10, 15, and 16, from which its witness cor. bears N. 0° 02' W., 2.50 chs. dist., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>
	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>N. 0° 10' E., bet. secs. 10 and 11.</p> <p>Over broken and mountainous desert land; along rocky E slope.</p>
40.02	<p>Point for the ¼ sec. cor. of secs. 10 and 11.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T 8 S R 17 W</p> <p> ½</p> <p> </p> <p>S 10 S 11</p> <p> </p> <p> 1979</p> </div>
80.04	<p>The cor. of secs. 2, 3, 10, and 11, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>
	<p>N. 89° 59' W., bet. secs. 3 and 10.</p> <p>Over broken desert land; asc. over E slope.</p>
40.15	<p>Point for the ¼ sec. cor. of secs. 3 and 10.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T 8 S R 17 W</p> <p> S 3</p> <p>¼ ———</p> <p> S 10</p> <p> 1979</p> </div>
80.30	<p>The cor. of secs. 3, 4, 9, and 10, monumented with an iron post, 2½ ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines.</p>
	<p>From the cor. of secs. 27, 28, 33, and 34.</p> <p>S. 89° 57' W., bet. secs. 28 and 33.</p> <p>Over rolling desert land; asc. over gentle E slope.</p>
30.00	<p>Trail road, bears N and S.</p>

354

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ $\frac{S 28}{S 33}$ 1979</p>
	<p>Cor. is located in wide sandy wash area, draining E.</p>
72.50	<p>Trail road, bears NW and SE.</p>
80.00	<p>Point for the cor. of secs. 28 and 29 only.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W $\frac{S 29}{S 33}$ $\frac{S 28}{S 33}$ 1979</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of cor.</p>
81.96	<p>The cor. of secs. 32 and 33 only, hereinbefore described.</p>
	<p>From the cor. of secs. 28 and 29 only.</p> <p>N. $0^{\circ} 03'$ W., bet. secs. 28 and 29.</p> <p>Over broken desert land; draining E.</p>
5.50	<p>Trail road, bears E and W.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 29 S 28 1979</p>
80.00	<p>Point for the cor. of secs. 20, 21, 28, and 29.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p>
	<p style="text-align: center;">T 8 S R 17 W $\frac{S 20}{S 29}$ $\frac{S 21}{S 28}$ 1979</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	Cor. is located on S bank of wash, which drains E.
37.20	<p>From the cor. of secs. 21, 22, 27, and 28. S. 89° 57' W., bet. secs. 21 and 28. Over broken desert land; asc. over E slope. Trail road, bears NE and SW irregularly.</p>
39.95	<p>Point for the ¼ sec. cor. of secs. 21 and 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p>
79.90	<p style="text-align: center;">T 8 S R 17 W S 21 ¼ ——— S 28 1979</p> <p>The cor. of secs. 20, 21, 28, and 29.</p>
40.06	<p>N. 0° 03' W., bet. secs. 20 and 21. Over broken desert land; along E slope. Point for the ¼ sec. cor. of secs. 20 and 21. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
80.12	<p style="text-align: center;">T 8 S R 17 W ¼ S 20 S 21 1979</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor. Asc. over SE slope; enter hills. The cor. of secs. 16, 17, 20, and 21, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines</p>
21.73	<p>From the cor. of secs. 8, 9, 16, and 17, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of a portion of the subdivisional lines. N. 0° 03' W., bet. secs. 8 and 9. Over broken mountainous desert land; draining E. Intersect line 2-3, M.S. 6673, Mammoth No. 3 Lode.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah


CHAINS

From this point, Cor. No. 3, bears S. 65° 16' E., 2.123 chs. dist., determined by mound of stone, with old decayed post alongside.

From this same point, Cor. No. 2, identical with Cor. No. 3, M.S. 6673, Mammoth No. 4 Lode, bears N. 65° 16' W., 6.93 chs. dist., monumented with a squared post scribed 2-3-6673, in a mound of stone.

40.00 Point for the 1/4 sec. cor. of secs. 8 and 9.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with aluminum cap mkd.



Raise a mound of stone, 3 ft. base, 3 ft. high, W of cor.


41.725 Intersect line 1-4, M.S. 6673, Mammoth Lode.

From this point, Cor. No. 4, bears S. 64° 59' E., 1.435 chs. dist., monumented with a squared wooden stake scribed 4-6673, in a mound of stone.

From this same point, Cor. No. 1, identical with Cor. No. 2, M.S. 6673 Mammoth No. 2 Lode, bears N. 64° 59' W., 21:308 chs. dist., monumented with an old decayed post, in a mound of stone.

80.00 Point for the cor. of secs. 4, 5, 8, and 9.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock, over a cross (X) and in a mound of stone, 5 ft. base, to top of brass cap, mkd.



Cor. is located on S bank of wash, draining E.

From the cor. of secs. 3, 4, 9, and 10.

S. 89° 56' W., bet. secs. 4 and 9.

Over broken desert land; draining E.

39.98 Point for the 1/4 sec. cor. of secs. 4 and 9.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.


Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ $\frac{S 4}{S 9}$ 1979</p>
54.50	Graded road, bears N and S.
79.96	The cor. of secs. 4, 5, 8, and 9.
40.00	<p>N. 0° 09' E., bet. secs. 4 and 5. Over broken desert land, draining E. Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.</p>
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>
42.00	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 5 S 4 1979</p>
72.45	Graded road, bears NW and SE.
23.96	<p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set and extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1958 survey of the N. bdy. of the Tp.</p>
23.96	<p>From the cor. of secs. 31 and 32. N. 89° 46' W., along the N. bdy. of sec. 31. Over mountainous land of Clifton Hills, through pinon and juniper trees.</p>
34.33	<p>Intersect line 1-2, M.S. 6421, Snow Storm No. 4 Lode. From this point, Cor. No. 1, bears S. 28° 11' W., 12.29 chs. dist., monumented with a squared post, in a mound of stone, scribed 1-6421. From this same point, Cor. No. 2, bears N. 28° 11' E., 10.43 chs. dist., monumented with a squared post, in mound of stone, dimly scribed 2-6421.</p>
34.33	<p>Intersect line 3-4, M.S. 6421, Snow Storm No. 4 Lode. From this point, Cor. No. 3, bears N. 28° 17' E., 15.255 chs. dist., monumented with a squared post, in a mound of stone, dimly scribed 3-6421. From this same point, Cor. No. 4, bears S. 28° 17' W., 7.485 chs. dist., monumented with a squared post, in a mound of stone, scribed 4-6421.</p>
	<p>From which Cor. No. 1, bears S. 62° 10' E., 9.174 chs. dist., hereinbefore described.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
36.06	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 31 only, at 40.00 chs. of easting from the cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p>
	<p>T 8 S R 17 W <u>$\frac{1}{4}$ S 31</u> 1979</p>
37.95	<p>Point for the $\frac{1}{4}$ sec. cor. of sec. 30 only, at 40.00 chs. of westing from the cor. of secs. 29 and 30.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, over a cross (X), in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p>
	<p>T 8 S R 17 W <u>$\frac{1}{4}$ S 30</u> 1979</p>
38.09	<p>Intersect line 1-2, M.S. 6421, Snow Storm Lode.</p> <p>From this point, Cor. No. 1, identical with Cor. No. 1, M.S. 6421, Snow Storm No. 3 Lode, bears S. $19^{\circ} 15'$ W., 16.205 chs. dist., monumented with a squared pine post, scribed 1-6421 on two sides.</p> <p>From this same point, Cor. No. 2, identical with Cor. No. 1, M.S. 6421, Snow Storm No. 2 Lode, bears N. $19^{\circ} 15'$ E., 6.555 chs. dist., monumented with a squared post, scribed 1-6421 and 2-6421.</p>
47.74	<p>Intersect line 3-4, M.S. 6421, Snow Storm Lode.</p> <p>From this point, Cor. No. 3, identical with Cor. No. 4, M.S. 6421, Snow Storm No. 2 Lode, bears N. $19^{\circ} 48'$ E., 9.755 chs. dist., monumented with a pine post, in a mound of stone, blazed on 2 sides and scribed 4-6421 and 3-6421.</p> <p>From this same point, Cor. No. 4, identical with Cor. No. 2, M.S. 6421, Snow Storm No. 3 Lode, bears S. $19^{\circ} 48'$ W., 12.835 chs. dist., monumented with a pine post, in a mound of stone, with blaze marks scribed 2-6421 and 4-6421.</p>
57.715	<p>Intersect line 1-2, M.S. 6998, Julian Lode.</p> <p>From this point, Cor. No. 1, bears N. $30^{\circ} 43'$ W., 2.305 chs. dist., determined by a mound of stone, no marks.</p> <p>From this same point, Cor. No. 2, bears S. $30^{\circ} 43'$ E., 7.065 chs. dist., monumented with a squared post set loosely in the ground, scribed JU-2-6998. This position was verified by measurements to bearing trees.</p>
65.425	<p>Intersect line 1-4, M.S. 6998, Julian Lode.</p> <p>From this point, Cor. No. 1, bears N. $73^{\circ} 22'$ E., 6.815 chs. dist., hereinbefore described.</p> <p>From this same point, Cor. No. 4, bears S. $73^{\circ} 22'$ W., 15.935 chs. dist., monumented with a squared post and small mound of stone, post scribed JU-4-6998.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
65.93	<p>From this same point, intersection of line 3-4, M.S. 7002, Lion Lode, bears S. 73° 22' W., 0.675 chs. dist., hereinafter described.</p> <p>Intersect line 3-4, M.S. 7002, Lion Lode.</p> <p>From this point, Cor. No. 3, bears N. 35° 59' E., 5.60 chs. dist., monumented with a pine post, in a mound of stone, scribed 3-7002-L.</p> <p>From this point, Cor. No. 4, bears S. 35° 59' W., 16.355 chs. dist., monumented with a squared cedar post, scribed 4-7002-L, in a mound of stone.</p> <p>From this same point, the intersection of line 1-4, M.S. 6998, Julian Lode, bears S. 35° 59' W., 0.241 chs. dist., hereinbefore described.</p>
76.06	<p>The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 survey of the E. bdy. of T. 8 S., R. 18 W.</p>
17.98	<p>From the cor. of secs. 29 and 30.</p> <p>N. 0° 04' W., bet. secs. 29 and 30.</p> <p>Over mountainous land of Clifton Hills, draining E.</p> <p>Intersect line 3-4, M.S. 5699, Spanish Lode.</p> <p>From this point, Cor. No. 3, identical with Cor. No. 4, M.S. 5699, Seminole Lode, bears N. 49° 17' E., 8.49 chs. dist., monumented with a squared post, in a mound of stone, scribed 3-4-5699.</p> <p>From this same point, Cor. No. 4, bears S. 49° 17' W., 15.43 chs. dist., monumented with a squared post, in a mound of stone, scribed 4-5699.</p>
29.65	<p>From which</p> <p>Cor. No. 1 of the Spanish Lode, bears N. 26° 10' W., 9.147 chs. dist.; hereinafter described.</p> <p>Intersect line 1-2, M.S. 5699, Spanish Lode.</p>
40.00	<p>From this point, Cor. No. 1, bears S. 49° 17' W., 20.735 chs. dist., determined by parallel lines. Set a copperweld rod, 28 ins. long, 5/8 ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">  S-1-5699 1979 </p> <p>From this same intersection, Cor. No. 2, identical with Cor. No. 1, M.S. 5699, Seminole Lode, bears N. 49° 17' E., 3.185 chs. dist., monumented with a squared pine post, set in a mound of stone, scribed 1-2-5699.</p> <p>Point for the ¼ sec. cor. of secs. 29 and 30.</p>
	<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
80.00	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 30 S 29 1979</p> <p>Point for the cor. of secs. 19, 20, 29, and 30.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 19 S 20 S 30 S 29 1979</p> <p>Cor. is located 20 lks. W of wash, draining SE.</p>	
40.01	<p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>N. $89^{\circ} 49'$ W., bet. secs. 20 and 29.</p> <p>Over broken desert land; asc. over general E slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.</p> <p>Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 20 S 29 1979</p> <p>Asc. over broken E slope.</p>	
80.02	<p>The cor. of secs. 19, 20, 29, and 30.</p> <p>N. $89^{\circ} 45'$ W., bet. secs. 19 and 30.</p> <p>Over mountainous desert land; asc. over E slope.</p>	
6.758	<p>Intersect line 2-3, M.S. 4375, George E. Lode.</p> <p>From this intersection, Cor. No. 2, bears S. $4^{\circ} 56'$ W., 1.292 chs. dist., monumented with a pine post, in a mound of stone, marks on blaze illegible.</p> <p>From this same intersection, Cor. No. 3, bears N. $4^{\circ} 56'$ E., 8.129 chs. dist., monumented with a squared pine post, in a mound of stone scribed 3-4375.</p>	
26.434	<p>Intersect line 6-7, M.S. 4375, George E. Lode.</p>	


Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

From this intersection, Cor. No. 6, bears N. $67^{\circ} 11'$ E., 1.406 chs. dist., determined by broken boundary method; there is no remaining evidence of the original corner.

At the corner point

Drove a Copperweld rod, 28 ins. long, $5/8$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.



Cor 6
4375
1979

From this same intersection, Cor. No. 7, bears S. $67^{\circ} 11'$ W., 0.694 chs. dist., monumented with a blazed cedar post, in a mound of stone, illegible scribe marks on post.

27.896 Intersect line 3-4, M.S. 19, Lot 55, Paymaster No. 2 Lode.

From this intersection, Cor. No. 3, bears S. $78^{\circ} 57'$ W., 5.035 chs. dist., monumented with a blazed post, in a mound of stone, scribed USL 55-3.

From this same intersection, Cor. No. 6, M.S. 4375, George E. Lode, bears N. $78^{\circ} 57'$ E., 2.811 chs. dist., hereinbefore described.

33.039 Intersect line 2-3, M.S. 19, Lot 55, Paymaster No. 2 Lode.

From this intersection, Cor. No. 2, bears N. $11^{\circ} 31'$ W., 8.002 chs. dist., monumented with a mound of stone, with decayed post.

At the corner point

Drove a Copperweld rod, 28 ins. long, $5/8$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.



COR 2
PMTR 55
1979

From this same intersection, Cor. No. 3, bears S. $11^{\circ} 31'$ E., 1.008 chs. dist., hereinbefore described.


37.795 Intersect line 1-2, M.S. 21, Lot 57, Juniper Lode.

From this intersection, Cor. No. 1, bears S. $55^{\circ} 45'$ W., 1.410 chs. dist., monumented with a mound of stone, and blazed post scribed USL 57-1.

From this same intersection, Cor. No. 2, bears N. $55^{\circ} 45'$ E., 19.726 chs. dist., monumented with a mound of stone and posted with illegible scribe marks.

At the corner point

Set a Copperweld rod, 28 ins. long, $5/8$ ins. diam., 10 ins. in the ground, and in a collar of stone, with brass cap mkd.



COR 2
JNPR 57
1979

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
39.475	<p>Intersect line 1-4, M.S. 21, Lot 57, Juniper Lode.</p> <p>From this intersection, Cor. No. 1, bears S. 32° 38' E., 0.954 chs. dist., hereinbefore described.</p> <p>From this same intersection, Cor. No. 4, bears N. 32° 38' W., 7.954 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
39.562	<p>Intersect line 1-5, M.S. No. 31, Lot 67, Sunshine Lode.</p> <p>From this intersection, Cor. No. 5, bears N. 36° 21' W., 1.256 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <p>From this same intersection, Cor. No. 1, bears S. 36° 21' E., 4.403 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 19 and 30.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <p>¼ $\frac{S 19}{S 30}$</p> <p>1979</p> </div> <p>Continue along N slope, through scattered juniper and pinon trees.</p>
54.569	<p>Intersect line 2-3, M.S. No. 7, Lot 43, Columbia Lode.</p> <p>From this intersection, Cor. No. 3, bears N. 48° 30' E., 12.296 chs. dist., hereinafter described.</p> <p>From this same intersection, line 2-3, Atlantis Lode, Lot 44, M.S. No. 8, hereinafter described, bears N. 48° 30' E., 2.380 chs. dist.</p> <p>From the same intersection, Cor. No. 2, bears S. 48° 30' W., 10.366 chs. dist., monumented with the decayed remains of a squared wooden post, and in a mound of stone.</p> <p>From the same intersection, line 4-5, Neptune Lode, Lot 40, M.S. 4, hereinafter described, bears S. 48° 30' W., 10.121 chs. dist.</p>
54.597	<p>Intersect line 1-4, M.S. No. 6, Lot 42, Fleetwing Lode.</p> <p>From this intersection, Cor. No. 1, bears N. 48° 51' E., 2.352 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <p>From this same intersection, Cor. No. 4, bears S. 48° 51' W., 18.252 chs. dist., monumented with the decayed remains of a squared wooden post, in a mound of stone, with illegible scribe marks.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS


From this same intersection, line 4-5, Neptune Lode, Lot 40, M.S. 4, hereinafter described, bears S. 48° 51' W. 10.113 chs. dist.

68.275 Intersect line 2-3, M.S. 6, Lot 42, Fleetwing Lode.

From this intersection, Cor. No. 2, bears N. 49° 04' E., 13.462 chs. dist., monumented with an old post, set in the ground, illegible scribe marks.

At the corner point

Drove a Copperweld rod, 28 ins. long, 5/8 ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.




From the same intersection, Cor. No. 3, bears S. 49° 04' W., 7.37 chs. dist., monumented with a cedar tree, no marks could be identified. The original notes called for a blaze, mkd. with pencil, on this tree.

From which

The original witness point for this cor., bears S. 37° 14' E., 3.3 ft. (record) mkd. with a mound of stone and decayed post.

At the witness point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 16 ins. in the ground, and in a collar of stone, with brass cap mkd.



From this witness point, USLM #2, bears N. 47° 45' W., 18.710 chs. dist.

78.00 The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 survey of the E. bdy. of T. 8 S., R. 18 W.

From this cor., USLM #2, bears N. 51° 34' W., 12.333 chs. dist.

From the cor. of secs. 19, 20, 29, and 30.

N. 0° 04' W., bet. secs. 19 and 20.

Over broken mountain land; asc. S slope in draw, draining S.


40.00 Point for the 1/4 sec. cor. of secs. 19 and 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
75.702	<p style="text-align: center;">T 8 S R 17 W $\frac{1}{4}$ S 19 S 20 1979</p> <p>Intersect line 1-5, M.S. 6691, Alta No. 4 Lode.</p> <p>From this intersection, Cor. No. 1, bears S. 5° 35' E., 2.755 chs. dist., monumented with a mound of stone and decayed squared post with some illegible scribe marks.</p> <p>From the same intersection, Cor. No. 5, bears N. 5° 35' W., 18.329 chs. dist., monumented with a squared post, in a mound of stone, with 4-6691 the only legible scribe marks remaining.</p>
80.00	<p>Point for the cor. of secs. 17, 18, 19, and 20.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">T 8 S R 17 W S 18 S 17 S 19 S 20 1979</p> <p>Cor. is located on gentle W slope in bottom of draw.</p>
38.65	<p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>N. 89° 53' W., bet. secs. 17 and 20.</p> <p>Over broken mountain land; asc. NE slope.</p> <p>Point selected for the witness cor. to the ¼ sec. cor. of secs. 17 and 20.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <p style="text-align: center;">W C T 8 S R 17 W S 17 $\frac{1}{4}$ ← S 20 1979</p> <p>Witness cor. is located on top of ridge, which bears N. 30° E. and S. 30° W.; desc. over steep NW slope.</p>
40.00	<p>True point for the ¼ sec. cor. of secs. 17 and 20, falls on steep ledgy shale rock slope and cannot be perpetuated.</p>
74.064	<p>Intersect line 2-3, M.S. 6691, Alta No. 4 Lode.</p> <p>From this intersection, Cor. No. 2, bears S. 0° 16' E., 2.835 chs. dist., monumented with a squared post, in a mound of stone, with illegible scribe marks.</p>

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah


CHAINS							
80.00	<p>From this same intersection, Cor. No. 3, identical with Cor. No. 2, M.S. 6691, Alta Lode, bears N. 0° 16' W., 0.060 chs. dist., monumented with a squared post, in a mound of stone, with faint scribe marks.</p> <p>The cor. of secs. 17, 18, 19, and 20.</p>						
21.303	<p>N. 89° 46' W., bet. secs. 18 and 19.</p> <p>Over broken mountain land; desc. over gentle W slope.</p> <p>Intersect line 1-4, M.S. 6691, Alta No. 2 Lode.</p> <p>From this intersection, Cor. No. 1, bears S. 1° 23' W., 10.639 chs. dist., monumented with a blazed cedar post, set in a mound of stone, with blaze scribed 1-6691.</p> <p>From the same intersection, Cor. No. 4, bears N. 1° 23' E., 9.429 chs. dist., monumented with a decayed squared post, in a mound of stone, scribed 4-6691AL 2.</p> <p>At the corner point</p> <p>Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, with brass cap mkd.</p>						
40.00	<p>Point for the 1/4 sec. cor. of secs. 18 and 19.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;">  <p>COR 4 A-2 6691 1979</p> </div> <div style="text-align: center;"> <p>T 8 S R 17 W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td style="text-align: center;">S 18</td> </tr> <tr> <td style="text-align: center;">1/4</td> <td style="text-align: center;">S 19</td> </tr> <tr> <td></td> <td style="text-align: center;">1979</td> </tr> </table> </div>		S 18	1/4	S 19		1979
	S 18						
1/4	S 19						
	1979						
77.88	<p>The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., in a large mound of stone, with brass cap mkd. as described in the official record of the 1925 survey of the E. bdy. of T. 8 S., R. 18 W.</p>						
39.76	<p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0° 04' W.; bet. secs. 17 and 18.</p> <p>Over broken desert mountain land, draining NE.</p> <p>Intersect line 3-4, M.S. 6691, Alta No. 8 lode.</p> <p>From this intersection, Cor. No. 3 bears N. 68° 02' E., 7.524 chs. dist., determined by a mound of stone, no marks identified.</p>						

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS


At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.




From this same intersection. Cor. No. 4, identical with Cor. No. 3, Alta No. 11 Lode, bears S. 68° 02' W., 2.271 chs. dist., established on line and at midpoint bet. Cor. No. 3, Alta No. 8 Lode and Cor. No. 4, Alta No. 11 Lode. There is no remaining evidence of the original corner.

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of brass cap, mkd.

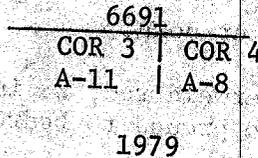

40.00 Point for the 1/4 sec. cor. of secs. 17 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.



Raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.


62.00 Intersect line 3-4, M.S. 4994, Emma Lode.

From this intersection, Cor. No. 6 of M.S. No. 6674, Uncel Same No. 7 Lode, on the S. bdy. of Emma Lode, M.S. No. 4994, bears S. 81° 36' E., 1.151 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

From this same intersection, Cor. No. 4, identical with Cor. No. 3, M.S. 4389, New Baltimore Lode, bears N. 81° 36' W., 12.005 chs. dist., monumented with a mound of stone, and a decayed post.

At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 18 ins. in the ground to bedrock, in a mound of stone, with brass cap mkd.



80.00 Point for the cor. of secs. 7, 8, 17, and 18.

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.

T 8 S R 17 W
S 7 S 8
S 18 S 17
1979

Cor. is located on S slope of hill.

From the cor. of secs. 8, 9, 16, and 17.

N. 89° 47' W., bet. secs. 8 and 17.

Over broken hills, along S slope.

7.215 Intersect line 3-4, M.S. 5642, Success No. 2 Lode.

From this intersection, Cor. No. 3, bears S. 43° 59' E., 1.905 chs. dist., monumented with an iron pipe, 4 ins. diam., 2 ft. high, set in concrete, stamped 3-5642.

From the same intersection, Cor. No. 4, identical with Cor. No. 4, M.S. 4811, Success Lode, bears N. 43° 59' W., 20.53 chs. dist., monumented with an iron pipe, 4 ins. diam., 2 ft. high, set in concrete, stamped 4-5642.

19.58 Intersect line 1-2, M.S. 5642, Success No. 2 Lode.

From this intersection, Cor. No. 1, identical with Cor. No. 5, M.S. 4811, Success Lode, bears N. 44° 01' W., 15.067 chs. dist., monumented with an iron pipe, 4 ins. diam., 2 ft. high, set in concrete, stamped 1-5642.

From the same intersection, Cor. No. 2, bears S. 44° 01' E., 7.359 chs. dist., monumented with an iron pipe, 4 ins. diam., 2 ft. high, set in concrete, stamped 2-5642.

26.860 Intersect line 2-3, M.S. 4994, Quartzite Lode.

From this intersection, Cor. No. 2, bears N. 8° 43' E., 0.807 chs. dist., monumented with a decayed post, in a mound of stone, dimly scribed 2-4994.

At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 10 ins. in the ground, in a mound of stone, with brass cap mkd.

COR 2
QUART
4994
1979

From this same intersection, Cor. No. 3, bears S. 8° 43' W., 21.929 chs. dist., monumented with a decayed post, in a mound of stone, dimly mkd. 3-4994.

At the corner point

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS					
	<p>Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 12 ins. in the ground, in a mound of stone, with brass cap mkd.</p>				
	<table border="1"> <tr><td>COR 3</td></tr> <tr><td>QUART</td></tr> <tr><td>4994</td></tr> <tr><td>1979</td></tr> </table>	COR 3	QUART	4994	1979
COR 3					
QUART					
4994					
1979					
39.99	<p>Point for the 1/4 sec. cor. of secs. 8 and 17.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p>				
	<table border="1"> <tr><td>T 8 S R 17 W</td></tr> <tr><td>1/4 S 8</td></tr> <tr><td>S 17</td></tr> <tr><td>1979</td></tr> </table>	T 8 S R 17 W	1/4 S 8	S 17	1979
T 8 S R 17 W					
1/4 S 8					
S 17					
1979					
45.25	<p>Intersect the line between Cor. No. 1, Clifton Lode and Cor. No. 2, Sunshine Lode, both M.S. 4994.</p> <p>From this intersection, Cor. No. 1, Clifton Lode, bears N. 8° 36' E., 3.50 chs. dist., monumented with a squared post, in a mound of stone, scribed 1-4994.</p> <p>From the same intersection, Cor. No. 2, Sunshine Lode, bears S. 8° 36' W., 1.065 chs. dist., monumented with a mound of stone, the remains of an old squared post with illegible scribe marks.</p>				
49.878	<p>Intersect line 1-2, M.S. 4994, Sunshine Lode.</p> <p>From this intersection, Cor. No. 1, bears N. 76° 32' W., 17.18 chs. dist., monumented with a mound of stone and part of squared post, scribed 1-4994.</p> <p>From this same intersection, Cor. No. 2, bears S. 76° 32' E., 4.594 chs. dist., hereinbefore described.</p>				
67.18	<p>Intersect line 1-4, M.S. 4994, Sunshine Lode.</p> <p>From this intersection, Cor. No. 1, bears N. 8° 37' E., 3.98 chs. dist., hereinbefore described.</p> <p>From this same intersection, Cor. No. 4, identical with Cor. No. 1, M.S. 4994, Climax Lode, bears S. 8° 37' W., 5.096 chs. dist., monumented with a squared post, in a mound of stone, scribed 1-4-4994.</p>				
77.74	<p>Intersect line 1-2, M.S. 4994, Comstock Lode.</p> <p>From this intersection, Cor. No. 1, bears N. 81° 34' W., 10.415 chs. dist., monumented with a mound of stone, and remains of decayed post.</p> <p>At the corner point</p> <p>Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 14 ins. in the ground, in a mound of stone, with brass cap mkd.</p>				

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

COR 1
COM
4994
1979

From this same intersection, Cor. No. 2, bears S. 81° 34' E., 11.195 chs. dist., monumented with a squared post, in a mound of stone, scribed 4994.

At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

4994
COR 2
COM
1979

79.98 The cor. of secs. 7, 8, 17, and 18.

N. 89° 46' W., bet. secs. 7 and 18.

Over broken hills; along general S slope.

8.383 Intersect line 1-4, M.S. 4994, Comstock Lode.

From this intersection, Cor. No. 1, bears N. 12° 11' E., 1.519 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 4, identical with Cor. No. 1, M.S. 4994, Emma Lode, bears S. 12° 11' W., 7.554 chs. dist., monumented with a mound of stone.

At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 12 ins. in the ground, in a mound of stone, with brass cap mkd.

4994 | COR 4
COM
COR 1
EMMA

1979

From this cor., Cor. No. 3 of New Baltimore Lode, M.S. 4389, identical to Cor. No. 4, Emma Lode, M.S. 4994, bears S. 11° 54' W., 9.088 chs. dist., hereinafter described.

37.120 Intersect line 1-4, M.S. 3497, Ella A. Lode.

From this intersection, Cor. No. 1, identical with Cor. No. 4, M.S. 3497, Greenback Lode, bears N. 80° 05' W., 0.693 chs. dist., monumented with a granite stone, 24 x 18 x 6 ins., mkd. 1-4-3497.

From this same intersection, Cor. No. 4, bears S. 80° 05' E., 18.075 chs. dist., mkd. with a cross (X) and 4-3497, chiseled on a small granite ledge. Raised a mound of stone, N. of marks.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 18.

370

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

Set an aluminum post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base, to top of aluminum cap, mkd.

T 8 S R 17 W

$$\frac{1}{4} \frac{S 7}{S 18}$$

1979

58.559 Intersect line 1-2, M.S. 3497, Greenback Lode.

From this intersection, Cor. No. 1, bears N. 13° 19' E., 2.498 chs. dist., monumented with a granite stone, 24 x 14 x 6 ins., chiseled 1-3497.

From this cor., Cor. No. 4, M.S. 3497, Greenback Lode, bears S. 83° 13' E., 20.325 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 2, bears S. 13° 19' W., 1.764 chs. dist., monumented with a granite stone in place, 24 x 18 x 14 ins., chiseled 2-3497 on face and cross (X) on top.

From this same intersection, the intersection of line 2-3, M.S. 6449, Moonlight Lode, bears S. 13° 19' W., 0.906 chs. dist.

60.551 Intersect line 3-4, M.S. 6451, Moonlight No. 3 Lode.

From this intersection, Cor. No. 3, identical with Cor. No. 4, M.S. 6452, Moonlight No. 4 Lode, bears N. 22° 57' E., 4.003 chs. dist., monumented with a squared post, in a mound of stone, scribed 3-6451 and 4-6452.

From this same intersection, Cor. No. 2, M.S. 6449, Moonlight Lode, bears S. 22° 57' W., 0.179 chs. dist., monumented with a squared post, in a mound of stone, scribed 2-6449.

From which

The intersection of line 1-2, M.S. 3497, Greenback Lode, bears S. 68° 39' E., 1.990 chs. dist.

70.009 Intersect line 1-4, M.S. 6451, Moonlight No. 3 Lode.

From this intersection, Cor. No. 1, bears N. 56° 34' W., 13.878 chs. dist., monumented with a squared post, in a mound of stone, scribed 1-6451.

From this same intersection, the township line between sec. 7 and sec. 12, bears N. 56° 34' W., 9.299 chs. dist.


From this same intersection, Cor. No. 4, bears S. 56° 34' E., 8.895 chs. dist., determined at record course and distance from location monument. There is no remaining evidence of the original corner.

At the corner point

Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 18 ins. in the ground, in a mound of stone, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS



77.77 The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and extending 4 ins. above a large mound of stone, with brass cap mkd. as described in the official record of the E. bdy. of T. 8 S., R. 18 W.

From this cor., line 4-1 of M.S. 6451, Moonlight No. 3 Lode, bears North, 5.092 chs. dist.

From the cor. of secs. 7, 8, 17, and 18.

N. 0° 04' W., bet. secs. 7 and 8.

Over broken and barren hills; asc. along E slope.


0.325 Intersect line 1-2, M.S. 4994, Comstock Lode.

From this intersection, Cor. No. 1, bears N. 81° 34' W., 8.15 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 2, bears S. 81° 34' E., 13.46 chs. dist., hereinbefore described.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 8.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.



41.107 Intersect line 1-2, M.S. 5645, Maple No. 5 Lode.

From this intersection, Cor. No. 1, bears N. 24° 23' W., 5.89 chs. dist., monumented with a squared post, set in a mound of stone, faint scribe marks on post.

From this same intersection, Cor. No. 2, bears S. 24° 23' E., 16.86 chs. dist., monumented with an old pine post, set in a mound of stone, 5645 only legible scribe marks.

47.487 Intersect line 1-4, M.S. 5645, Maple No. 5 Lode.

From this intersection, Cor. No. 1, bears S. 67° 12' W., 2.629 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 4, bears N. 67° 12' E., 6.453 chs. dist., monumented with a mound of stone and old decayed post.

372

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS					
80.00	<p>Point for the cor. of secs. 5, 6, 7, and 8.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T 8 S R 17 W</td></tr> <tr><td>S 6 S 5</td></tr> <tr><td>S 7 S 8</td></tr> <tr><td>1979</td></tr> </table> </div>	T 8 S R 17 W	S 6 S 5	S 7 S 8	1979
T 8 S R 17 W					
S 6 S 5					
S 7 S 8					
1979					
	<p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>N. 89° 47' W., bet. secs. 5 and 8.</p> <p>Over broken hills; asc. over general E slope.</p>				
12.476	<p>Intersect line 3-4, M.S. 5646, Lucky Boy No. One Lode.</p> <p>From this intersection, Cor. No. 3, identical with Cor. No. 4, M.S. 5646, Lucky Boy No. 2 Lode, bears S. 18° 16' E., 17.045 chs. dist., monumented with a mound of stone and decayed post, remains of scribe marks illegible.</p>				
	<p>From this same intersection, Cor. No. 4, bears N. 18° 16' W., 5.655 chs. dist., monumented with a mound of stone and decayed square post; marks illegible.</p>				
30.364	<p>Intersect line 1-4, M.S. 5646, Lucky Boy No. 3 Lode.</p> <p>From this intersection, Cor. No. 1, bears S. 71° 44' W., 1.192 chs. dist., monumented with a mound of stone.</p>				
	<p>From this same intersection, Cor. No. 4, identical with Cor. No. 1, M.S. 5646, Lucky Boy No. One Lode, bears N. 71° 44' E., 7.89 chs. dist., monumented with a squared post, in a mound of stone, scribed 4-1-5646.</p>				
39.98	<p>Point for the ¼ sec. cor. of secs. 5 and 8.</p> <p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T 8 S R 17 W</td></tr> <tr><td>¼ S 5</td></tr> <tr><td> S 8</td></tr> <tr><td>1979</td></tr> </table> </div>	T 8 S R 17 W	¼ S 5	S 8	1979
T 8 S R 17 W					
¼ S 5					
S 8					
1979					
	<p>Asc. E slope of hill.</p>				
68.874	<p>Intersect line 3-4, M.S. 5645, Maple No. 3 Lode.</p> <p>From this intersection, Cor. No. 3, identical with Cor. No. 4, M.S. 4390, Maple Lode, bears S. 33° 37' E., 6.254 chs. dist., monumented with an iron pipe, 3 ins. diam., 2 ft. high, set in concrete, stamped 4-4390.</p>				
	<p>From this same intersection, Cor. No. 4, bears N. 33° 37' W., 16.472 chs. dist., monumented with an iron pipe, 3 ins. diam., 2 ft. high, set in concrete, stamped 4-5645.</p>				

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
79.793	<p>Intersect line 1-2, M.S. 5645, Maple No. 3 Lode.</p> <p>From this intersection, Cor. No. 1, bears N. 33° 37' W., 10.399 chs. dist., monumented with an iron pipe, 3 ins. diam., 2 ft. high, set in concrete, stamped 5645.</p> <p>From this same intersection, Cor. No. 2, identical with Cor. No. 1, M.S. 4390, Maple Lode, bears S. 33° 37' E., 12.329 chs. dist., monumented with an iron pipe, 3 ins. diam., 2 ft. high, set in concrete, stamped 2-5645 and 1-4390.</p>
79.96	<p>The cor. of secs. 5, 6, 7, and 8.</p> <p>N. 89° 49' W., bet. secs. 6 and 7.</p> <p>Over broken and barren hills; asc. E slope.</p>
18.343	<p>Intersect line 1-2, M.S. 5001, Black Eagle No. 1 Lode.</p> <p>From this intersection, the point for Cor. No. 1, identical with Cor. No. 4, M.S. No. 5644, Black Bird Lode, bears N. 24° 08' W., 15.085 chs. dist., determined by broken boundary method and verified by tie to location monument.</p> <p>At the corner point</p> <p>Set a Copperweld rod, 28 ins. long, 5/8 ins. diam., 16 ins. in the ground, in a mound of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>COR 1 B E 5001 1979</p> </div> <p>From this same intersection, Cor. No. 2, bears S. 24° 08' E., 5.151 chs. dist., monumented with a squared post, in a mound of stone, scribed 2-5001.</p>
37.417	<p>Intersect line 4-5, M.S. 5994, Grandee Lode.</p> <p>From this intersection, Cor. No. 4, bears S. 20° 20' E., 5.622 chs. dist., monumented with a square post, in a mound of stone, no legible marks.</p> <p>From this same intersection, Cor. No. 5, bears N. 20° 20' W., 9.419 chs. dist., monumented with a squared post, in a mound of stone, no legible marks.</p>
40.00	<p>Point for the 1/4 sec. cor. of secs. 6 and 7.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 5 ft. base, to top of aluminum cap, mkd.</p> <div style="text-align: center;"> <p>T 8 S R 17 W 1/4 S 6 S 7 1979</p> </div> <p>Cor. is located on top of spur, which slopes SE.</p>
50.267	<p>Intersect line 1-2, M.S. 6522, Southern Belle Lode.</p>

374

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

From this intersection, Cor. No. 1, identical with Cor. No. 2, M.S. No. 6522, Helmet Lode, bears N. 11° 53' E., 2.394 chs. dist., monumented with a squared post, in a mound of stone, scribed 1-2-6522, SB. H.

From this same intersection, Cor. No. 2, bears S. 11° 53' W., 20.169 chs. dist., monumented with a decayed post, in a mound of stone, faint scribe marks. From this cor., a cedar, bears S. 11° W., 76 lks. dist., scribed 2-6522.

77.64 The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and extending 10 ins. above ground, with brass cap mkd. as described in the official record of the 1925 survey of the E. bdy. of T. 8 S., R. 18 W.

From the cor. of secs. 5, 6, 7, and 8.

N. 0° 09' E., bet. secs. 5 and 6.

Over barren and broken hills; desc. along E slope.

0.249 Intersect line 1-2, M.S. 5645, Maple No. 3 Lode.

From this intersection, Cor. No. 1, bears N. 33° 37' W., 10.099 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 2, identical with Cor. No. 1, M.S. 4390, Maple Lode, bears S. 33° 37' E., 12.629 chs. dist., hereinbefore described.

12.392 Intersect line 1-4, M.S. 5645, Maple No. 3 Lode.

From this intersection, Cor. No. 1, bears S. 56° 26' W., 6.75 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 4, bears N. 56° 26' E., 2.32 chs. dist., hereinbefore described.

15.735 Intersect line 3-4, M.S. 5418, Giant Lode.

From this intersection, Cor. No. 3, identical with Cor. No. 4, M.S. 5418, Incomparable No. 3 Lode, bears S. 71° 46' E., 14.718 chs. dist., monumented with a mound of stone and old post, no marks identified.

From this same intersection, Cor. No. 4, bears N. 71° 46' W., 8.04 chs. dist., monumented with a mound of stone and decayed post, no marks identified.

40.00 Point for the ¼ sec. cor. of secs. 5 and 6.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.

T 8 S R 17 W

¼
S 6 | S 5

1979

52.808 Intersect line 1-2, M.S. 5418, Western Pacific No. 6 Lode.

Survey of a Portion of the Subdivisional Lines,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	<p>From this intersection, Cor. No. 1, bears N. 71° 17' W., 1.03 chs. dist., monumented with a square post, in a mound of stone, scribed 1-5418.</p>
	<p>From this same intersection, Cor. No. 2, identical with Cor. No. 1, M.S. 5418, Western Pacific No. 5 Lode, bears S. 71° 17' E., 17.35 chs. dist., monumented with a squared post, in a mound of stone, scribed 2-1-5418.</p>
61.80	<p>Graded gravel road, bears S. 74° W. and N. 74° E.</p>
72.16	<p>The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1958 survey of the N. bdy. of T. 8 S., R. 17 W.</p>
<p>Dependent Resurvey of a Portion of Mineral Survey No. 5646, T. 8 S., R. 17 W., Salt Lake Meridian, Utah</p>	
<p>(Restoring a Portion of Mineral Survey No. 5646, Executed by John T. Breckon, U.S. Deputy Mineral Surveyor in 1907)</p>	
<p>LUCKY BOY NO. 2 LODE, M.S. NO. 5646</p>	
<p>From Cor. No. 4 of Lucky Boy No. 2 Lode, identical with Cor. No. 3 of Lucky Boy No. One Lode, hereinbefore described.</p>	
<p>Thence S. 18° 11' E., along line 3-4.</p>	
18.007	<p>Cor. No. 3 of Lucky Boy No. 2 Lode, M.S. No. 5646, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
<p>Thence S. 71° 48' W., along line 2-3.</p>	
5.690	<p>Intersect line 1-4 of Mammoth Lode, M.S. No. 6673, from intersection point, Cor. No. 4 bears S. 64° 59' E., 9.112 chs. dist., hereinbefore described.</p>
<p>From this same intersection point, Cor. No. 1 of Mammoth Lode, bears N. 64° 59' W., 13.631 chs. dist., hereinbefore described.</p>	
9.063	<p>Cor. No. 2 of Lucky Boy No. 2 Lode, M.S. No. 5646, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>
<p>Thence N. 18° 17' W., along line 1-2.</p>	
3.18	<p>Intersect line 1-4 of Mammoth Lode, M.S. No. 6673, from intersection point, Cor. No. 1, bears N. 64° 59' W., 8.998 chs. dist.</p>
17.993	<p>Cor. No. 1 of Lucky Boy No. 2 Lode, identical with Cor. No. 2 of Lucky Boy No. One Lode and Cor. No. 3 of Lucky Boy No. 3 Lode, M.S. No. 5646, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>

376

Dependent Resurvey of a Portion of Mineral Survey
No. 5646, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

LUCKY BOY NO. 3 LODE, M.S. NO. 5646

Thence S. $71^{\circ} 44'$ W., along line 2-3.

9.077 Cor. No. 2 of Lucky Boy No. 3 Lode, M.S. No. 5646; monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. $18^{\circ} 14'$ W., along line 1-2.

22.723 Cor. No. 1 of Lucky Boy No. 3 Lode, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
No. 6673, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey No. 6673,
Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor
in 1921)

MAMOTH NO. 3 LODE, M.S. NO. 6673

From Cor. No. 3 of Mammoth No. 3 Lode, hereinbefore described.

Thence N. $65^{\circ} 16'$ W., along line 2-3.

2.123 Intersect section line bet. secs. 8 and 9.

From intersection point, the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, bears N. $0^{\circ} 03'$ W., 18.27 chs. dist.

9.053 Cor. No. 2 of Mammoth No. 3 Lode, identical with Cor. No. 3 of Mammoth No. 4 Lode, M.S. 6673, hereinbefore described.

MAMOTH NO. 4 LODE, M.S. NO. 6673

Thence N. $65^{\circ} 08'$ W., along line 2-3.

22.811 Cor. No. 2 of Mammoth No. 4 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. $24^{\circ} 52'$ E., along line 1-2.

9.109 Cor. No. 1 of Mammoth No. 4 Lode, identical with Cor. No. 2 of Mammoth Lode and Cor. No. 3 of Mammoth No. 2 Lode, M.S. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

MAMOTH NO. 2 LODE, M.S. NO. 6673

Thence N. $65^{\circ} 05'$ W., along line 3-4.

22.962 Cor. No. 4 of Mammoth No. 2 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. $25^{\circ} 05'$ E., along line 4-1.

Dependent Resurvey of a Portion of Mineral Survey
No. 6673, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
9.161	Cor. No. 1 of Mammoth No. 2 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks. Thence S. 64° 56' E., along line 1-2.
22.930	Cor. No. 2 of Mammoth No. 2 Lode, identical with Cor. No. 1 of Mammoth Lode, M.S. No. 6673, hereinbefore described. MAMMOTH LODE, M.S. NO. 6673 Thence S. 64° 59' E., along line 1-4.
8.998	Intersect line 1-2 of Lucky Boy No. 2 Lode, M.S. 5646. From intersection point, Cor. No. 2, bears S. 18° 17' E., 3.180 chs. dist., hereinbefore described.
13.631	Intersect line 2-3 of Lucky Boy No. 2 Lode, M.S. N. 5646. From intersection point, Cor. No. 2, bears S. 71° 48' W., 3.374 chs. dist., hereinbefore described.
21.308	Intersect section line bet. secs. 8 and 9. From intersection point, the ¼ sec. cor. of secs. 8 and 9, bears S. 0° 03' E., 1.725 chs. dist.
22.743	Cor. No. 4 of Mammoth Lode, M.S. No. 6673, hereinbefore described. MAMMOTH NO. 3 LODE, M.S. NO. 6673 Thence N. 24° 46' E., along line 1-2.
4.527	Cor. No. 1 of Mammoth No. 3 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks. Thence S. 65° 21' E., along line 1-4.
9.124	Cor. No. 4 of Mammoth No. 3 Lode, identical with Cor. No. 1 of Mammoth No. 5 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks. MAMMOTH NO. 5 LODE, M.S. NO. 6673 Thence S. 73° 21' E., along line 1-4.
4.750	Cor. No. 4 of Mammoth No. 5 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks. Thence S. 24° 52' W., along line 3-4.
17.017	Cor. No. 3 of Mammoth No. 5 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Dependent Resurvey of a Portion of Mineral Survey
No. 6673, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

Thence N. 73° 19' W., along line 2-3.

4.753 Cor. No. 2 of Mammoth No. 5 Lode, M.S. No. 6673, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

MAMOTH NO. 3 LODE, M.S. NO. 6673

Thence S. 24° 51' W., along line 3-4.

5.670 Cor. No. 3 of Mammoth No. 3 Lode, M.S. No. 6673, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey Nos.
4390 and 5645, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey No. 4390, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor, in 1900 and Mineral Survey No. 5646, Executed by John T. Breckon, U.S. Deputy Mineral Surveyor in 1907)

MAPLE LODE, M.S. NO. 4390

From Cor. No. 1 of Maple Lode, M.S. No. 4390, identical with Cor. No. 2 of Maple No. 3 Lode, M.S. No. 5645, hereinbefore described.

Thence S. 24° 23' E., along line 1-2.

10.558 Cor. No. 4 of Maple No. 2 Lode, M.S. 5645, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

MAPLE NO. 2 LODE, M.S. 5645

Thence S. 60° 21' W., along line 1-4.

9.980 Cor. No. 1 of Maple No. 2 Lode, M.S. No. 5645, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence S. 32° 32' E., along line 1-2.

6.154 Cor. No. 4 of Maple No. 5 Lode, M.S. No. 5645, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Survey Nos. 6449 and 6450, Executed by Frank Anderson, U.S. Deputy Mineral Surveyor in 1917)

MOONLIGHT LODE, M.S. NO. 6449

From Cor. No. 4 of Moonlight No. 3 Lode, M.S. No. 6451, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- Thence S. 23° 25' W., along line 1-2.
- 4.015 Cor. No. 1 of Moonlight Lode, M.S. No. 6449, identical with Cor. No. 2 of Moonlight No. 2 Lode, M.S. No. 6450, monumented with a squared wooden post, set in a mound of stone, scribed 1-6449 on N face and 2-6450 on S face.
- MOONLIGHT NO. 2 LODE, M.S. NO. 6450
- Thence S. 23° 00' W., along line 1-2.
- 9.088 Cor. No. 1 of Moonlight No. 2 Lode, M.S. No. 6450, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- MOONLIGHT NO. 2 LODE, M.S. NO. 6450
- Thence S. 68° 41' E., along line 1-4.
- 22.594 Cor. No. 4 of Moonlight No. 2 Lode, M.S. No. 6450, monumented with a squared wooden post, set in a mound of stone, scribed 4-6450 on NW face.
- MOONLIGHT NO. 2 LODE, M.S. NO. 6450
- Thence N. 23° 01' E., along line 3-4.
- 9.092 Cor. No. 3 of Moonlight No. 2 Lode, M.S. No. 6450, identical with Cor. No. 4 of Moonlight Lode, M.S. No. 6449, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- MOONLIGHT LODE, M.S. NO. 6449
- Thence N. 22° 58' E., along line 3-4.
- 9.089 Cor. No. 3 of Moonlight Lode, M.S. No. 6449, identical with Cor. No. 2 of ELLA A Lode and Cor. No. 3 of Green Back Lode, M.S. No. 3497, monumented with a quartzite stone, 2 x 2 x 1 ft., mkd. 3-2 3497 on N face and 3-6449 on S face, set in a mound of stone.
- (Reestablishment of a Portion of Mineral Survey No.
3497 Executed by Augustus D. Ferron,
U.S. Deputy Mineral Surveyor in 1897)
- ELLA A. LODE, M.S. NO. 3497
- Thence S. 78° 51' E., along line 2-3.
- 18.603 Cor. No. 3 of ELLA A. LODE, M.S. No. 3497, monumented with a quartzite stone, firmly set and exposed 1 x 1 x 1 ft., above the ground, mkd. 3-3497.
- (Reestablishment of a Portion of Mineral Survey
No. 4389, Executed by Henry Fitzhugh,
U.S. Deputy Mineral Surveyor in 1900)
- NEW BALTIMORE LODE, M.S. NO. 4389
- Thence S. 13° 11' W., along line 1-4.

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
2.256	<p>Cor. No. 4 of New Baltimore Lode, M.S. No. 4389, monumented with a squared wooden post, set in a mound of stone, scribed 4-4389.</p> <p>Thence S. 77° 02' E., along line 3-4.</p>
10.254	<p>Cor. No. 3 of New Baltimore Lode, M.S. No. 4389, identical with Cor. No. 4 of Emma Lode, M.S. 4994, hereinbefore described.</p> <p>Thence N. 11° 24' E., along line 2-3.</p>
9.089	<p>Cor. No. 2 of New Baltimore Lode, M.S. No. 4389, monumented with a mound of stone only.</p> <p>Thence N. 76° 47' W., along line 1-2.</p>
10.013	<p>Cor. No. 1 of New Baltimore Lode, M.S. No. 4389, on line 4-3 of Ella A. Lode, M.S. 3497, monumented with a mound of stone only.</p> <p>from which</p> <p>Cor. No. 4 of Ella A. Lode, M.S. No. 3497, bears N. 12° 57' E., 2.139 chs. dist., hereinbefore described.</p>
<p>(Reestablishment of a Portion of Mineral Survey No. 4994, Executed by R.E.L. Collier, U.S. Deputy Mineral Surveyor in 1902)</p>	
<p>EMMA LODE, M.S. No. 4994</p>	
<p>From Cor. No. 4 of Emma Lode, M.S. 4994, identical to Cor. No. 3 of New Baltimore Lode, M.S. 4389, hereinbefore described.</p> <p>Thence S. 81° 36' E., along line 3-4.</p>	
12.005	<p>Intersect section line bet. secs. 17 and 18.</p> <p>From intersection point, the $\frac{1}{2}$ sec. cor. of secs. 17 and 18, bears S. 0° 04' E., 22.00 chs. dist., hereinbefore described.</p>
13.156	<p>Cor. No. 6 of Uncel Same No. 7 Lode, M.S. No. 6674, hereinbefore described.</p> <p>(Reestablishment of a Portion of Mineral Survey No. 6674, Executed by Henry Fitzhugh, U.S. Deputy Surveyor in 1922)</p>
<p>UNCCEL SAME NO. 7 LODE, M.S. NO. 6674</p>	
<p>Thence S. 0° 09' W., along line 1-6.</p>	
6.107	<p>Cor. No. 1 of Uncel Same No. 7 Lode, identical with Cor. No. 4 of Uncel Sam No. 5 Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p>

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

UNCLE SAM NO. 5 LODE, M.S. NO. 6674

Thence S. 0° 04' E., along line 1-4.

- 9.368 Cor. No. 1 of Uncel Sam No. 5 Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence S. 77° 17' E., along line 1-2.

- 4.021 Cor. No. 5 of Uncel Sam Lode No. 2 Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

UNCLE SAM LODE NO. 2 LODE, M.S. NO. 6674

Thence S. 0° 03' E., along line 5-6.

- 3.687 Intersect line 3-4 of Alta No. 8 Lode, M.S. No. 6691.
From intersection point, Cor. No. 3 of Alta No. 8 Lode, bears N. 68° 02' E., 2.105 chs. dist., hereinbefore described.

- 11.270 Cor. No. 6 of Uncle Sam Lode No. 2 Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

(Reestablishment of a Portion of Mineral Survey
No. 6691, Executed by Henry Fitzhugh, U.S. Deputy
Surveyor, in 1921)

ALTA NO. 8 LODE, M.S. NO. 6691

From Cor. No. 3 of Alta No. 8 Lode, M.S. No. 6691.

Thence S. 68° 02' W., along line 3-4.

- 2.105 Intersect line 5-6 of Uncle Sam No. 2 Lode, M.S. No. 6674, hereinbefore described.

- 7.524 Intersect sec. line bet. secs. 17 and 18.

From intersection point, the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, bears N. 0° 04' W., 0.24 chs. dist., hereinbefore described.

- 9.795 Cor. No. 4 of Alta No. 8 Lode, identical with Cor. No. 3 of Alta No. 11 Lode, M.S. No. 6691, hereinbefore described.

ALTA NO. 11 LODE, M.S. NO. 6691

Thence S. 68° 02' W., along line 3-4.

- 9.795 Cor. No. 4 of Alta No. 11 Lode, M.S. No. 6691, monumented with a squared wooden post, set in a mound of stone, scribed 4-6691 on SE face.

Dependent Resurvey of a Portion of Mineral Survey Nos. 3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS							
	Thence S. 1° 46' W., along line 1-4.						
22.294	Cor. No. 1 of Alta No. 11 Lode, identical with Cor. No. 4 of Alta No. 5 Lode and Cor. No. 3 of Alta No. 2 Lode, all of M.S. No. 6691; monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.						
	ALTA NO. 2, M.S. NO. 6691						
	Thence S. 69° 19' W., along line 3-4.						
9.789	Cor. No. 4 of Alta No. 2 Lode, M.S. No. 6691, hereinbefore described.						
	Thence S. 1° 23' W., along line 1-4.						
9.429	Intersect sec. line bet. secs. 18 and 19. From intersection point, the cor. of secs. 17, 18, 19, and 20, bears S. 89° 46' E., 21.303 chs. dist., hereinbefore described.						
20.068	Cor. No. 1 of Alta No. 2 Lode, M.S. No. 6691, hereinbefore described.						
	Thence N. 68° 30' E., along line 1-2.						
9.836	Cor. No. 2 of Alta No. 2 Lode, identical with Cor. No. 1 of Alta No. 5 Lode, M.S. No. 6691, determined from the remaining original bearing tree A juniper, 13 ins. diam., bears N. 15° W., 12.0 ft. dist., with illegible scribe marks on open blaze. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base, to top of aluminum cap, mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">AL-2</td> <td style="padding: 2px;">AL-5</td> </tr> <tr> <td style="padding: 2px;">COR 2</td> <td style="padding: 2px;">1 COR</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">1979</td> </tr> </table>	AL-2	AL-5	COR 2	1 COR	1979	
AL-2	AL-5						
COR 2	1 COR						
1979							
	ALTA NO. 5 LODE, M.S. NO. 6691						
	Thence N. 69° 15' E., along line 1-2.						
9.838	Cor. No. 2 of Alta No. 5 Lode, identical with Cor. No. 1 of Alta Lode, M.S. No. 6691, monumented with a squared wooden post, set in a mound of stone, scribed 1-2-6691 on N face.						
	ALTA LODE, M.S. NO. 6691						
	Thence N. 69° 01' E., along line 1-2.						

Dependent Resurvey of a Portion of Mineral Survey Nos. 3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- 3.232 Intersect line 1-5 of Alta No. 4 Lode, M.S. No. 6691.
From intersection point, Cor. No. 5 of Alta No. 4 Lode, bears N. 5° 35' W., 16.323 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- 9.730 Cor. No. 2 of Alta Lode, identical with Cor. No. 3 of Alta No. 4 Lode, M.S. No. 6691, hereinbefore described.

ALTA NO. 4 LODE, M.S. NO. 6691
From Cor. No. 5 Alta No. 4 Lode.
Thence S. 5° 35' E., along line 1-5.
- 16.323 Intersect line 1-2 of Alta Lode, M.S. No. 6691.
From intersection point, Cor. No. 1 of Alta Lode, identical with Cor. No. 2 of Alta No. 2 Lode, bears S. 69° 01' W., 3.232 chs. dist.
- 18.329 Intersect section line bet. secs. 19 and 20.
From intersection point, the cor. of secs. 17, 18, 19, and 20, bears N. 0° 04' W., 4.298 chs. dist.
- 21.084 Cor. No. 1 of Alta No. 4 Lode, M.S. No. 6691, hereinbefore described.

Thence N. 53° 33' E., along 1-2.
- 7.057 Cor. No. 2 of Alta No. 4 Lode, M.S. No. 6691, monumented with a wooden post, 4 ins. square, set in a mound of stone, with illegible scribe marks.

Thence N. 0° 16' W., along line 2-3.
- 2.835 Intersection section line bet. secs. 17 and 20.
From intersection point, the cor. of secs. 17, 18, 19, and 20, bears N. 89° 53' W., 5.936 chs. dist.
- 2.895 Cor. No. 3 of Alta No. 4 Lode, M.S. No. 6691, identical with Cor. No. 2 of Alta Lode, hereinbefore described.

Thence N. 1° 26' E., along line 2-4.
- 6.881 Intersect line 1-2 of Uncel Same No. 8 Lode, M.S. No. 6675.
From intersection point, Cor. No. 1 of Uncel Same No. 8 Lode, M.S. No. 6675, bears N. 88° 40' W., 0.647 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- 19.881 Cor. No. 4 of Alta No. 4 Lode, M.S. No. 6691, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

(Restoring a Portion of Mineral Survey No. 6675, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor in 1921)

384

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
	<p>UNCCEL SAME NO. 8 LODE, M.S. NO. 6675</p> <p>From Cor. No. 1 of Uncel Same No. 8 Lode, M.S. No. 6675. Thence S. 88° 40' E., along line 1-2.</p>	
0.647	<p>Intersect line 3-4 of Alta No. 4 Lode, M.S. No. 6691. From intersection point, Cor. No. 4 of Alta No. 4 Lode, bears N. 1° 26' E., 13.00 chs. dist.</p>	
22.128	<p>Cor. No. 2 of Uncel Same No. 8 Lode, M.S. No. 6675, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <hr/> <p>Thence N. 0° 55' W., along line 2-3.</p>	
5.404	<p>Cor. No. 3 of Uncel Same No. 8 Lode, M.S. No. 6675, identical with Cor. No. 2 of Florance Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, mkd. 3-6675 on W face.</p> <hr/> <p>(Restoring a Portion of Mineral Survey No. 6674, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor in 1922)</p> <hr/> <p>FLORANCE LODE, M.S. NO. 6674</p> <p>Thence N. 30° 45' E., along line 2-3.</p>	
6.061	<p>Cor. No. 3 of Florance Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <hr/> <p>Thence N. 76° 30' W., along line 3-4.</p>	
4.668	<p>Cor. No. 2 of Uncel Sam No. 4 Lode, M.S. No. 6674, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <hr/> <p>UNCCEL SAM NO. 4 LODE, M.S. NO. 6674</p> <p>Thence N. 31° 00' E., along line 2-3.</p>	
11.453	<p>Cor. No. 3 of Uncel Sam No. 4 Lode, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <hr/> <p>(Reestablishment of a Portion of Mineral Survey No. 4994, Executed by R.E.L. Collier, U.S. Deputy Mineral Surveyor in 1902)</p> <hr/> <p>IRON SPRING LODE, M.S. NO. 4994</p> <p>Thence S. 0° 27' W., along line 1-4.</p>	
2.603	<p>Cor. No. 4 of Iron Spring Lode, monumented with a squared wooden post, set in a mound of stone, mkd. 4-4994 on N face.</p>	

Dependent Resurvey of a Portion of Mineral Survey Nos.
3497, 4389, 4994, 6449, 6450, 6674, 6675, and 6691,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
	Thence S. 81° 02' E., along line 3-4.
9.525	Cor. No. 3 of Iron Spring Lode, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
	Thence N. 1° 08' W., along line 2-3.
17.260	Cor. No. 2 of Iron Spring Lode, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
	GREENSIDE LODE, M.S. NO. 4994
	Thence S. 81° 02' E., along line 3-4.
9.511	Cor. No. 3 of Greenside Lode, monumented with a squared wooden post, set in a mound of stone, mkd. 3-4994.
	Thence N. 11° 59' E., along line 2-3.
9.093	Cor. No. 2 of Greenside Lode, identical with Cor. No. 3 of Transvaal and Cor. No. 4 of Clifton No. 3 Lode, M.S. No. 4994, monumented with a squared wooden post, set in a mound of stone, mkd. 2-3-4994 and 4-4994.
	CLIFTON NO. 3 LODE, M.S. NO. 4994
	Thence N. 80° 30' E., along line 3-4.
16.166	Cor. No. 3 of Clifton No. 3 Lode, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
	Thence N. 12° 03' E., along line 2-3.
9.103	Cor. No. 2 of Clifton No. 3 Lode, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
	Thence S. 80° 29' W., along line 1-2.
16.177	Cor. No. 1 of Clifton No. 3 Lode, identical with Cor. No. 2 of Transvaal Lode, M.S. No. 4994, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
	TRANSVAAL LODE, M.S. NO. 4994
	Thence N. 81° 26' W., along line 1-2.
4.566	Cor. No. 3 of Quartzite Lode, M.S. No. 4994, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 4, 5, 6, 7, 8, and 31,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of Mineral Survey
Nos. 4, 5, 6, 7, 8, and 31,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey Nos.
4, 5, 6, 7, and 8, Executed by Simon F. Mackie,
U.S. Deputy Mineral Surveyor in 1886, and Portion of
Mineral Survey No. 31 Executed by J. Fensen Smith Jr.,
U.S. Deputy Mineral Surveyor in 1892)

LOST TREASURE LODE, LOT 41, M.S. No. 5

From Cor. No. 4 of Lost Treasure Lode, Lot 41, M.S. No. 5,
monumented with a squared wooden post, in a mound of
stone, with illegible scribe marks.

Thence N. 42° 05' W., along line 3-4,

7.444 Intersect line 2-3 of Neptune Lode, Lot, 40, M.S. No. 4.

From intersection point, Cor. No. 3, bears N. 51° 28' E.,
1,929 chs. dist.

8.725 Cor. No. 3 of Lost Treasure Lode, Lot 41, M.S. No. 5,
monumented with a squared wooden post, set in a mound of
stone, mkd. 3-US-41.

NEPTUNE LODE, LOT 41, M.S. 4

From Cor. No. 2 of Neptune Lode, Lot 40, M.S. No. 4.

Thence N. 51° 28' E., along line 2-3.

1.589 Intersect line 3-4 of Lost Treasure Lode, Lot 40,
M.S. No. 4, hereinbefore described.

3.518 Cor. No. 3 of Neptune Lode, Lot 40, M.S. 4, monumented
with a squared tree stump, blazed and mkd. N°3-US-40.

Thence N. 58° 50' E., along line 3-4.

17.564 Intersect line 1-2 of Columbia Lode, Lot 43, M.S. 7.

From intersection point, Cor. No. 1 of Columbia Lode,
identical with Cor. No. 4 of Sunshine Lode, Lot 67,
M.S. 31, bears S. 35° 42' E., 4,292 chs. dist., herein-
after described.

18.867 Cor. No. 4 of Neptune Lode, Lot 40, M.S. No. 4, monumented
with a squared wooden post, set in a mound of stone, mkd.
N°4-US-40.

Thence N. 48° 47' W., along line 4-5.

4.660 Intersect line 2-3, Columbia Lode, Lot 43, M.S. No. 4,
hereinbefore described.

4.741 Intersect line 4-1, Fleetwing Lode, Lot 42, M.S. No. 6,
hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 4, 5, 6, 7, 8, and 31,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- 9.018 Cor. No. 5 of Neptune Lode, Lot 40, M.S. No. 4, monumented with a 2 x 4 ins. wooden post, set in a mound of stone, with no markings, with decayed pine post alongside. No marks.
-
- COLUMBIA LODE, LOT 43, M.S. No. 7
- From Cor. No. 2 of Columbia Lode, Lot 43, M.S. No. 7, hereinbefore described.
- Thence S. 35° 42' E., along line 1-2.
- 4.411 Intersect line 3-4 of Neptune Lode, Lot 40, M.S. No. 4.
- From intersection point, Cor. No. 4 of Neptune Lode, bears N. 58° 50' E., 1.303 chs. dist.
- 8.703 Cor. No. 1 of Columbia Lode, Lot 43, M.S. No. 7, identical with Cor. No. 4 of Sunshine Lode, Lot 67, M.S. No. 31, monumented with a squared wooden post, set in a mound of stone, mkd. N°-1-US-43.
-
- SUNSHINE LODE, LOT 67, M.S. NO. 31
- Thence S. 36° 20' E., along line 3-4.
- 2.359 Cor. No. 3 of Sunshine Lode, Lot 67, M.S. No. 31, monumented with a 4 x 4 wooden post, set in a mound of stone, with illegible scribe marks.
-
- Thence N. 58° 10' E., along line 2-3.
- 19.991 Cor. No. 2 of Sunshine Lode, Lot 67, M.S. No. 31, monumented with a wooden post, 4 x 4 ins., square, set in a mound of stone, mkd. US 67 P2.
-
- Thence N. 48° 52' E., along line 1-2.
- 2.552 Cor. No. 1 of Sunshine Lode, Lot 67, M.S. No. 31, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
-
- Thence N. 36° 21' W., along line 1-5.
- 4.403 Intersect section line bet. secs. 19 and 30.
- From intersection point, the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, bears N. 89° 45' W., 0.438 chs. dist., hereinbefore described.
- 5.659 Cor. No. 5 of Sunshine Lode, Lot 67, M.S. No. 31, identical with Cor. No. 4 of Columbia Lode, Lot 43, M.S. No. 7, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
-
- COLUMBIA LODE, LOT 43, M.S. NO. 7
- Thence N. 35° 03' W., along line 3-4.
- 7.938 Intersect line 2-3 of Atlantis Lode, Lot 44, M.S. No. 8.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 4, 5, 6, 7, 8, and 31,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

From intersection point, Cor. No. 3 of Atlantis Lode, Lot 44, M.S. No. 8, bears S. 53° 28' W., 9.908 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. 4° 56' E., along line 2-3.

- 8.798 Cor. No. 3 of Columbia Lode, Lot 43, M.S. No. 7, monumented with a mound of stone, no marks found. This position is harmoniously related to other identified corners and is accepted as the best available evidence of the original corner.

ATLANTIS LODE, LOT 44, M.S. NO. 8

From Cor. No. 3 of Atlantis Lode, hereinbefore described.

Thence N. 53° 28' E., along line 2-3.

- 0.049 Intersect line 2-3, Columbia Lode, Lot 43, M.S. No. 7, hereinbefore described.

- 9.908 Intersect line 3-4 of Columbia Lode, Lot 43, M.S. 7, hereinbefore described.

- 19.105 Cor. No. 2 of Atlantis Lode, Lot 44, M.S. No. 8, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. 36° 30' W., along line 1-2.

- 9.282 Cor. No. 1 of Atlantis Lode, Lot 44, M.S. No. 8, monumented with the remains of a squared wooden post, in a mound of stone, with illegible scribe marks.

Thence S. 52° 43' W., along line 1-4.

- 18.988 Cor. No. 4 of Atlantis Lode, Lot 44, M.S. No. 8, identical with Cor. No. 2 of Fleetwing Lode, Lot 42, M.S. No. 6, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 19, 21, and 4375
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey Nos. 19 and 21, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor in 1889 and Mineral Survey No. 4375, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor in 1900)

GEORGE E. LODE, M.S. NO. 4375

From Cor. No. 7, George E. Lode, hereinbefore described.

Thence S. 4° 46' W., along line 7-1.

- 9.304 Cor. No. 1 of George E. Lode, M.S. No. 4375, monumented with a wooden post, 4 x 4 ins., square, set in a mound of stone, with illegible scribe marks.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 19, 21, and 4375,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS		
	Thence N. 68° 43' E., along line 1-2.	
22.510	Cor. No. 2 of George E. Lode, M.S. No. 4375, hereinbefore described.	
	Thence N. 4° 56' E., along line 2-3.	
1.292	Intersect section line bet. secs. 19 and 30.	
	From intersection point, the cor. of secs. 19, 20, 29, and 30, bears S. 89° 45' E., 6.758 chs. dist.	
9.421	Cor. No. 3 of George E. Lode, M.S. No. 4375, hereinbefore described.	
	Thence S. 58° 02' W., along line 3-4.	
5.407	Cor. No. 4 of George E. Lode, M.S. No. 4375, on the E. bdy. of Paymaster No. 2 Lode, Lot 55, M.S. No. 19, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.	
	PAYMASTER NO. 2 LODE, LOT 55, M.S. NO. 19	
	Thence N. 12° 26' W., along line 1-4.	
7.361	Cor. No. 1 of Paymaster No. 2 Lode, Lot 55, M.S. No. 19, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.	
	Thence S. 78° 43' W., along line 1-2.	
10.831	Intersect line 1-2 of Juniper Lode, Lot 57, M.S. No. 21.	
	From intersection point, Cor. No. 2, bears N. 55° 45' E., 1.654 chs. dist., hereinbefore described.	
22.847	Cor. No. 2 of Paymaster No. 2 Lode, Lot 55, M.S. No. 19, hereinbefore described.	
	JUNIPER LODE, LOT 57, M.S. NO. 21	
	From Cor. No. 1 of Juniper Lode, Lot 57, M.S. No. 21.	
	Thence N. 55° 45' E., along line 1-2.	
1.410	Intersect section line bet. secs. 19 and 30.	
	From intersection point, the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, bears N. 89° 45' W., 2.205 chs. dist.	
6.459	Intersect line 2-3 of Paymaster No. 2 Lode, Lot 55, M.S. No. 19.	
	From intersection point, Cor. No. 2, bears N. 11° 31' W., 5.082 chs. dist., hereinbefore described.	
19.482	Intersect line 12 of Paymaster No. 2 Lode, Lot 55, M.S. No. 19.	

Dependent Resurvey of a Portion of Mineral Survey
Nos. 19, 21, and 4375,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- From intersection point, Cor. No. 2, bears
S. $78^{\circ} 43'$ W., 12.016 chs. dist.
- 21.136 Cor. No. 2 of Juniper Lode, Lot 57, M.S. No. 21,
hereinbefore described.
- Thence N. $32^{\circ} 37'$ W., along line 2-3.
- 9.099 Cor. No. 3 of Juniper Lode, Lot 57, M.S. No. 21,
monumented with a squared wooden post, set in a mound
of stone, with illegible scribe marks.
- Thence S. $55^{\circ} 14'$ W., along line 3-4.
- 21.145 Cor. No. 4 of Juniper Lode, Lot 57, M.S. No. 21,
hereinbefore described.
-
- Dependent Resurvey of a Portion of Mineral Survey
No. 10, T. 8 S., R. 17 W., Salt Lake Meridian, Utah
-
- (Restoring a Portion of Mineral Survey No. 10,
Executed by Simon F. Mackie, U.S. Deputy Mineral
Surveyor in 1886)
-
- IRON LODE, LOT 46, M.S. No. 10
- From Cor. 5 of Iron Lode, Lot 46, M.S. No. 10, monumented
with a squared wooden post, set in a mound of stone, with
illegible scribe marks.
- Thence S. $84^{\circ} 52'$ E., along line 5-6.
- 0.240 Intersect section line bet. secs. 25 and 30, Tps. 8 S.,
Rs. 17 and 18 W.
- From intersection point, the cor. of secs. 19, 24, 25,
and 30, Tps. 8 S., Rs. 17 and 18 W., bears South, 6.110
chs. dist., hereinbefore described.
- 10.236 Cor. No. 6 of Iron Lode, Lot 46, M.S. No. 10, monumented
with the remains of a wooden post, in a mound of stone,
with illegible scribe marks.
- Thence N. $63^{\circ} 40'$ E., along line 1-6.
- 12.644 Cor. No. 1 of Iron Lode, Lot 46, M.S. No. 10, monumented
with a squared wooden post, set in a mound of stone,
with illegible scribe marks.
- Thence N. $25^{\circ} 35'$ W., along line 1-2.
- 9.102 Cor. No. 2 of Iron Lode, Lot 46, M.S. No. 10, monumented
with the remains of a squared wooden post, set in a
mound of stone, no scribe marks could be found.

Dependent Resurvey of a Portion of Mineral Survey
No. 10, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

- Thence S. 64° 29' W., along line 2-3.
- 11.193 Cor. No. 3 of Iron Lode, Lot 46, monumented with the remains of a squared wooden post, set in a mound of stone, no scribe marks could be found.
- Thence N. 89° 34' W., along line 3-4.
- 7.260 Intersect section line bet. secs. 19 and 24.
- From intersection point, the cor. of secs. 19, 24, 25, and 30, Tps. 8 S., Rs. 17 and 18 W., bears South, 14.265 chs. dist., hereinbefore described.
- 11.216 Cor. No. 4 of Iron Lode, Lot 46, M.S. No. 10, monumented with a squared wooden post, set in a mound of stone, scribed 4 US 46.
-
- Dependent Resurvey of a Portion of Mineral Survey
Nos. 11, 30, 34, and 6173,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah
-
- (Restoring a Portion of Mineral Survey Nos. 11 and 34,
Executed by Simon F. Mackie, U.S. Deputy Mineral
Surveyor in 1886 and 1892 and a Portion of
Mineral Survey No. 30, Executed by J. Fenson Smith Jr,
U.S. Deputy Mineral Surveyor in 1892 and a Portion of
Mineral Survey No. 6173, Executed by R.E. Caldwell,
U.S. Deputy Mineral Surveyor in 1911)
-
- IBAPAH LODE, LOT 47, M.S. No. 11
- From Cor. No. 3 of Ibapah Lode, Lot 47, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- Thence N. 68° 33' E., along line 3-4.
- 3.345 Intersect section line bet. secs. 25 and 30, Tps. 8 S., Rs. 17 and 18 W.
- From intersection point, the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, bears South, 2.429 chs. dist., monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd. as described in the 1925 survey of the E. bdy. of T. 8 S., R. 18 E.
- 9.485 Cor. No. 4 of Ibapah Lode, Lot 47, M.S. No. 11, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.
- Thence S. 52° 30' E., along line 4-5.
- 5.822 Intersect line 1-2 of Mount Vernon Lode, Lot 66, M.S. No. 30, hereinafter described.
- 8.730 Cor. No. 5 of Ibapah Lode, Lot 47, M.S. No. 11, monumented with a squared wooden post, set in a mound of stone, scribed NO 5 US 47.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 11, 30, 34, and 6173,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

MOUNT VERNON LODE, LOT 66, M.S. NO. 30

From Cor. No. 1 of Mount Vernon Lode, Lot 66, M.S. No. 30.

Thence N. $47^{\circ} 18'$ E., along line 1-2.

6.485 Intersect line 4-5 of Ibapah Lode, Lot 47, M.S. No. 11.

From intersection point, Cor. No. 5, bears
S. $52^{\circ} 30'$ E., 2.908 chs. dist.

22.630 Cor. No. 2 of Mount Vernon Lode, Lot 66, M.S. No. 30,
monumented with a squared wooden post, set in a mound
of stone, scribed US 66 P2.

Thence S. $48^{\circ} 23'$ E., along line 2-3.

7.097 Intersect line 2-3 of Black Hawk Lode, M.S. No. 6173,
hereinafter described.

9.102 Cor. No. 3 of Mount Vernon Lode, Lot 66, M.S. No. 30,
monumented with a wooden post, set in a mound of stone,
with illegible scribe marks.

Thence S. $54^{\circ} 17'$ W., along line 3-4.

14.358 Intersect line 3-4 of Red Jacket Lode, M.S. No. 6173,
hereinafter described.

23.10 Cor. No. 4 of Mount Vernon Lode, Lot 66, M.S. No. 30,
on the E. bdy. of George Washington Lode, Lot 70,
M.S. No. 34, monumented with a squared wooden post, set
in a mound of stone, with illegible scribe marks.

BLACK HAWK LODE, M.S. NO. 6173

From Cor. No. 2, Black Hawk Lode, M.S. No. 6173,
monumented with a squared wooden post, set in a mound
of stone, scribed US 6173 P2 BH.

Thence N. $50^{\circ} 08'$ E., along line 2-3.

13.035 Intersect line 2-3 of Mount Vernon Lode, Lot 66,
M.S. No. 30.

From intersection point, Cor. No. 3, bears
S. $48^{\circ} 23'$ E., 2.005 chs. dist.

22.713 Cor. No. 3 of Black Hawk Lode, M.S. No. 6173, monumented
with a squared wooden post, set in a mound of stone,
with illegible scribe marks.

Thence S. $40^{\circ} 08'$ E., along line 3-4.

8.938 Cor. No. 4 of Black Hawk Lode, M.S. No. 6173, monumented
with a squared wooden post, set in a mound of stone,
with illegible scribe marks.

Thence S. $51^{\circ} 01'$ W., along line 1-4.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 11, 30, 34, and 6173,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS	
22.730	<p>Cor. No. 1 of Black Hawk Lode, M.S. No. 6173, identical with Cor. No. 2 of Red Jacket Lode, monumented with a squared wooden post, set in a mound of stone, scribed US 6173 P2-1.</p> <p style="text-align: center;">RED JACKET LODGE, M.S. NO. 6173</p> <p>Thence S. 46° 40' W., along line 1-2.</p>
22.897	<p>Cor. No. 1 of Red Jacket Lode, M.S. No. 6173, monumented with a squared wooden post, set in a mound of stone, dimly scribed US 6173 P1 RJ.</p> <p>Thence N. 39° 59' W., along line 1-4.</p>
5.797	<p>Cor. No. 4 of Red Jacket Lode, M.S. No. 6173, monumented with a squared wooden post, set in a mound of stone, scribed US 6173 P4 RJ.</p> <p>Thence N. 41° 53' E., along line 4-3.</p>
22.078	<p>Intersect line 3-4 of Mount Vernon Lode, Lot 66, M.S. No. 30.</p> <p>From intersection point, Cor. No. 4, bears S. 54° 17' W., 8.742 chs. dist.</p>
23.085	<p>Cor. No. 3 of Red Jacket Lode, M.S. No. 6173, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.</p> <p style="text-align: center;">GEORGE WASHINGTON LODGE, LOT 70, M.S. NO. 34</p> <p>From Cor. No. 4, Mount Vernon Lode, Lot 66, M.S. No. 30. S. 48° 12' E., along line 1-2.</p>
1.777	<p>Cor. No. 1 of George Washington Lode, Lot 70, M.S. No. 30, monumented with a mound of stone, no marks found. This position is harmoniously related to other cors. in the area and is accepted as the best available evidence of the original corner position.</p> <p>Thence S. 47° 36' W., along line 1-8.</p>
15.641	<p>Intersect section line bet. secs. 25 and 30, Tps. 8 S., Rs. 17 and 18 W.</p> <p>From intersection point, the cor. of secs. 25, 30, 31, and 36, Tps. 8 S., Rs. 17 and 18 W., bears South, 20.801 chs. dist., hereinbefore described.</p>
17.979	<p>Cor. No. 8 of George Washington Lode, Lot 70, M.S. No. 34, monumented with a squared wooden post, set in a mound of stone, scribed US 70 P8.</p>

Dependent Resurvey of a Portion of Mineral Survey No. 28,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

Dependent Resurvey of a Portion of Mineral Survey
No. 28, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey No. 28,
Executed by Henry Fitzhugh, U.S. Deputy Surveyor,
in 1892)

SOUTHERN CONFEDERATE LODGE, LOT 64, M.S. NO. 28

From Cor. No. 3 of Southern Confederate, monumented with
a squared wooden post, set in a mound of stone, with
illegible scribe marks.

Thence N. 49° 41' E., along line 3-4.

0.088 Intersect section line bet. secs. 25 and 30, Tps. 8 S.,
Rs. 17 and 18 W.

From intersection point, the cor. of secs. 25, 30, 31,
and 36, Tps. 8 S., Rs. 17 and 18 W., bears South, 6.494
chs. dist.

22.371 Cor. No. 4 of Southern Confederate Lodge, Lot 64, M.S.
No. 28, monumented with a squared wooden post, set in a
mound of stone, with illegible scribe marks.

Thence N. 47° 45' W., along line 4-1.

2.864 Cor. No. 1 of Southern Confederate Lodge, Lot 64, M.S.
No. 28, monumented with a squared wooden post, set in
a mound of stone, scribed US 64 P1.

Thence S. 49° 45' W., along line 1-2.

19.485 Intersect section line bet. secs. 25 and 30, Tps. 8 S.,
Rs. 17 and 18 W.

From intersection point, the cor. of secs. 25, 30, 31,
and 36, bears South, 10.244 chs. dist.

22.340 Cor. No. 2 of Southern Confederate Lodge, Lot 64, M.S.
No. 28, monumented with a squared wooden post, set in a
mound of stone, with illegible scribe marks.

Dependent Resurvey of a Portion of Mineral Survey
No. 6998, T. 8 S., R. 17 W., Salt Lake Meridian, Utah


(Restoring a Portion of Mineral Survey No. 6998,
Executed by John R. Stewart,
U.S. Mineral Surveyor in 1930)

JULIAN LODGE, M.S. NO. 6998

From Cor. No. 2 of Julian Lodge, hereinbefore described.

Thence S. 72° 59' W., along line 2-3.

Dependent Resurvey of a Portion of Mineral Survey
No. 6998, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

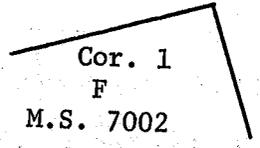CHAINS	
21.862	<p>Intersect line 3-4 of Lion Lode, M.S. No. 7002.</p> <p>From this intersection, Cor. No. 3, bears N. 35° 59' E., 21.056 chs. dist., hereinbefore described.</p> <p>From this same intersection, Cor. No. 4, bears S. 35° 59' W., 0.899 chs. dist., monumented with a squared wooden post, set in a mound of stone, scribed P4</p>
22.719	<p>Cor. No. 3 of Julian Lode, M.S. No. 6998, on lines 1-2 of Monocca No. 2 Lode, M.S. No. 6998, and Florence Lode, M.S. No. 7002, monumented with a mound of stone. No marks found.</p>
<p>Dependent Resurvey of a Portion of Mineral Survey No. 7002, T. 8 S., R. 17 W., Salt Lake Meridian, Utah</p>	
<p>(Restoring a Portion of Mineral Survey No. 7002, Executed by Lafayette G. Burton, U.S. Deputy Mineral Surveyor in 1929)</p>	
<p>FLORENCE LODE, M.S. NO. 7002</p>	
<p>From Cor. No. 1, identical with Cor. No. 1 of Monocca No. 2 Lode, M.S. No. 6998, Cor. No. 4 of Monocca Lode, Lot No. 58, M.S. No. 22, and on line 3-4 of Julian Lode, M.S. No. 6998, monumented with a dead tree, laying on the ground, with illegible scribe marks. Corner point was determined at stump hole in ground.</p>	
<p>At the corner point</p>	
<p>Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap mkd.</p>	
	
<p>Thence S. 29° 44' E., along line 1-2.</p>	
0.015	<p>Cor. No. 3 of Julian Lode, M.S. No. 6998, hereinbefore described.</p>
0.243	<p>Intersect line 4-1 of Lion Lode, M.S. No. 7002.</p>
<p>From this intersection, Cor. No. 1, bears N. 32° 34' W., 9.272 chs. dist., hereinbefore described.</p>	
<p>From this same intersection, Cor. No. 4, bears S. 32° 34' E., 0.331 chs. dist., hereinbefore described.</p>	
9.141	<p>Cor. No. 2, on line 1-2 of Monocca No. 2 Lode, M.S. No. 6998, monumented with a squared wooden post, 5 x 5 ins., set in a mound of stone, scribed 2-7002 F.</p>
<p>From this cor., Cor. No. 2 of Monocca No. 2 Lode, M.S. No. 6998, bears S. 29° 44' E., 0.215 chs. dist., monu- mented with a mound of stone only. No marks could be found.</p>	
<p>Thence S. 69° 13' W., along line 2-3.</p>	

Dependent Resurvey of a Portion of Mineral Survey
No. 7002, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

3.048 Intersect line 2-3 of Monocca No. 2 Lode. M.S. No. 6998.
From this intersection, Cor. No. 2 of Monocca No. 2 Lode, M.S. 6998, bears N. $73^{\circ} 10'$ E., 3.089 chs. dist., hereinbefore described.

From this same intersection, Cor. No. 3, bears S. $73^{\circ} 10'$ W., 19.462 chs. dist., monumented with a mound of stone only. No marks could be found.

5.085 Intersect Section Line bet. Sec. 31 and 36, Tps. 8 S., Rs. 17 and 18 W.

From this intersection, the cor. of secs. 25, 30, 31, and 36, bears North, 22.526 chs. dist.

22.172 Cor. No. 3, monumented with a squared wooden post, scribed 3-7002 F, in a mound of stone.

LION LODE, M.S. NO. 7002

From Cor. No. 1, monumented with a squared wooden post, set in a mound of stone, scribed 1-7002 L.

Thence N. $36^{\circ} 07'$ E., along line 1-2.

7.892 Intersect section line bet. secs. 25 and 30, Tps. 8 S., Rs. 17 and 18 W.

From intersection point, the cor. of secs. 25, 30, 31, and 36, Tps. 8 S., Rs. 17 and 18 W., bears South, 1.195 chs. dist.

22.059 Cor. No. 2 of Lion Lode, M.S. No. 7002, monumented with a sawed wooden post, 4 ins. by 6 ins., set in a mound of stone, scribed 2-7002-L.

Thence S. $31^{\circ} 54'$ E., along line 2-3.

9.599 Cor. No. 3 of Lion Lode, M.S. No. 7002, hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
No. 6421, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey No. 6421,
Executed by R.E. Caldwell, U.S. Deputy Mineral
Surveyor in 1916)

SNOW STORM NO. 2 LODE, M.S. NO. 6421

From Cor. No. 4, identical with Cor. No. 3 of Snow Storm Lode, M.S. No. 6421, hereinbefore described.

Thence N. $49^{\circ} 24'$ E., along line 4-3.

22.262 Cor. No. 3 of Snow Storm No. 2 Lode, monumented with a wooden post, 4 x 4 ins., square, scribed 3-6421, set in a mound of stone.

Thence S. $70^{\circ} 29'$ E., along line 3-2.

Dependent Resurvey of a Portion of Mineral Survey
No. 6421, T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS
10.731

Cor. No. 2 of Snow Storm No. 2 Lode, M.S. No. 6421, monumented with a wooden post, 4 x 4 ins. square, scribed 2-6421, set in a mound of stone.

Thence S. 53° 02' W., along line 2-1.

11.547

Intersect line 2-3 of Snow Storm No. 4 Lode.

From this intersection, Cor. No. 2 bears S. 62° 02' E., 8.616 chs. dist., hereinbefore described.

From this same intersection point, Cor. No. 3, bears N. 62° 02' W., 0.518 chs. dist., hereinbefore described.

12.785

Intersect line 3-4 of Snow Storm No. 4 Lode.

From this intersection point, Cor. No. 3 bears N. 28° 17' E., 1.121 chs. dist., hereinbefore described.

From this same intersection point, Cor. No. 4, bears S. 28° 17' W., 21.619 chs. dist., hereinbefore described.

23.167

Cor. No. 1 of Snow Storm No. 2 Lode, identical with Cor. No. 2 of Snow Storm Lode, same survey, hereinbefore described.

SNOW STORM NO. 3, LODE, M.S. NO. 6421

From Cor. No. 2, identical with Cor. No. 4 of Snow Storm Lode, M.S. No. 6421.

Thence S. 28° 37' W., along line 2-3.

22.755

Cor. No. 3 of Snow Storm No. 3 Lode, monumented with a mound of stone only. No marks could be found.

Thence S. 68° 37' E., along line 3-4.

9.197

Cor. No. 4 of Snow Storm No. 3 Lode, monumented with a decayed wooden post, in a mound of stone, no scribe marks visible, rebuild mound of stone, 3 ft. base, 2 ft. high.

Thence N. 28° 43' E., along line 4-1.

22.879

Cor. No. 1 of Snow Storm No. 3 Lode, identical with Cor. No. 1 of Snow Storm Lode, M.S. No. 6421; hereinbefore described.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 5442 and 6258,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

(Restoring a Portion of Mineral Survey No. 5442, Executed by Henry Fitzhugh, U.S. Deputy Mineral Surveyor in 1905 and a Portion of Mineral Survey No. 6258, Executed by Harvey D. Heist, U.S. Deputy Mineral Surveyor in 1913)

ELECTIRC LODE NO. 1 LODE, M.S. NO. 6258

From Cor. No. 4 of Electirc Lode No. 1, hereinbefore described.

Thence N. 22° 22' E., along line 4-3.

3.646

Intersect line 1-4 of Electirc Lode No. 3.

Dependent Resurvey of a Portion of Mineral Survey
Nos. 5442 and 6258,
T. 8 S., R. 17 W., Salt Lake Meridian, Utah

CHAINS

From intersection point, Cor. No. 4, bears N. 88° 09' E., 2.218 chs. dist., monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

From this same intersection point, Cor. No. 1, identical with Cor. No. 2 of Electirc Lode No. 1, M.S. No. 6258, bears S. 88° 09' W., 17.002 chs. dist., monumented with a squared post, set in a mound of stone, with illegible scribe marks.

3.885 Intersect Cor. No. 1 of Electirc Amended No. 2 Lode, M.S. No. 5442, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

ELECTIRC AMENDED NO. 2 LODE, M.S. NO. 5442

Thence S. 81° 18' E., along line 1-2.

1.194 Intersect line 1-4 of Electirc Lode, No. 3, M.S. No. 6258.

From intersection point, Cor. No. 4, bears N. 88° 09' E., 0.947 chs. dist., hereinbefore described.

22.714 Cor. No. 2 of Electirc Amended No. 2 Lode, M.S. No. 5442, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. 22° 23' E., along line 2-3.

9.359 Cor. No. 3 of Electirc Amended No. 2 Lode, M.S. No. 5442, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

Thence N. 81° 13' W., along line 3-4.

22.706 Cor. No. 4 of Electirc Amended No. 2 Lode, identical with Cor. No. 3 of Electirc Lode No. 3 and Cor. No. 4 of Electirc Lode No. 4, M.S. No. 6258, monumented with a squared wooden post, set in a mound of stone, with illegible scribe marks.

ELECTIRC LODE NO. 4, M.S. NO. 6258

Thence N. 10° 16' E., along line 4-3.

9.258 Cor. No. 3 of Electirc Lode No. 4, M.S. No. 6258, hereinbefore described.

General Description

Township 8 South, Range 17 West, is located about 25 miles south of Wendover, Utah. The township consists of desert land with rocky bench land on the east portion and broken hills and mountains on the west portion. The vegetation consists mostly of shadscale and scattered bunch grass with scattered juniper and pinon on the mountain tops. There are numerous dirt roads within the township, the main being a graded gravel road which enters the township on the south boundary of sec. 35, bears NW and leaves the township on the north boundary of sec. 6. There are numerous patented mining claims and old diggings on the mountainous portion of the township. The elevation varies from about 4400 to 7000 ft. above sea level.

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Stewart Burt	Surveying Technician
Michael Fitzgerald	Supervisory Cadastral Surveyor
Kevin Hinckley	Survey Aid
John Julander	Survey Aid
Larry Judd	Survey Aid
Mark Ferguson	Survey Aid
Gary Gogos	Survey Aid

CERTIFICATE OF SURVEY

~~(XX)~~We), Craig P. Sylvester and Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day

of January, 19 79, ~~(XX)~~We) have dependently resurveyed the west one miles of the south and north boundaries, portions of the subdivisional lines, and those mineral surveys necessary for proper closure and surveyed a portion of the subdivisional lines completing the subdivision of T. 8 S., R. 17 W.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by ~~(XX)~~ (us) and under ~~(XX)~~ (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 23, 1982 (Date) Craig P. Sylvester (Cadastral Surveyor) Supervisory

July 23, 1982 (Date) Ferrel D. Reynolds (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Denver, Colorado

The foregoing field notes of the dependent resurvey of the west one miles of the south and north boundaries, portions of the subdivisional lines, and those mineral surveys necessary for proper closure and the survey of a portion of the subdivisional lines completing the subdivision of T. 8 S., R. 17 W., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor
Ferrel D. Reynolds, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

September 10, 1982 (Date) Glen B Hatch (Chief, Cadastral Survey Examination and Approval Staff) Chief Cadastral Surveyor for Utah

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in T. 8 S., R. 17 W., Salt Lake Meridian, Utah is a true copy of the original field notes.

(Date) Glen B Hatch (Chief, Cadastral Survey Examination and Approval Staff) Chief Cadastral Surveyor for Utah

