

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY

OF A PORTION

OF THE NORTH AND WEST BOUNDARIES,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

MINERAL SURVEY No. 6877

IN SECTIONS 30 AND 31

AND THE SUBDIVISION OF SECTIONS

3, 9, 19, 20, 29 AND 31

IN

TOWNSHIP 21 SOUTH, RANGE 1 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

*Gail E. Reynolds,
Cadastral Surveyor*


Under special instructions dated *October 30, 1991*, approved *November 12, 1991*, which provided for the surveys included under Group Number 778, and assignment instructions dated *November 12, 1991*.

Survey commenced *November 19, 1991*

Survey completed *March 8, 1993*

INDEX DIAGRAM

Township 21 South, Range 1 West

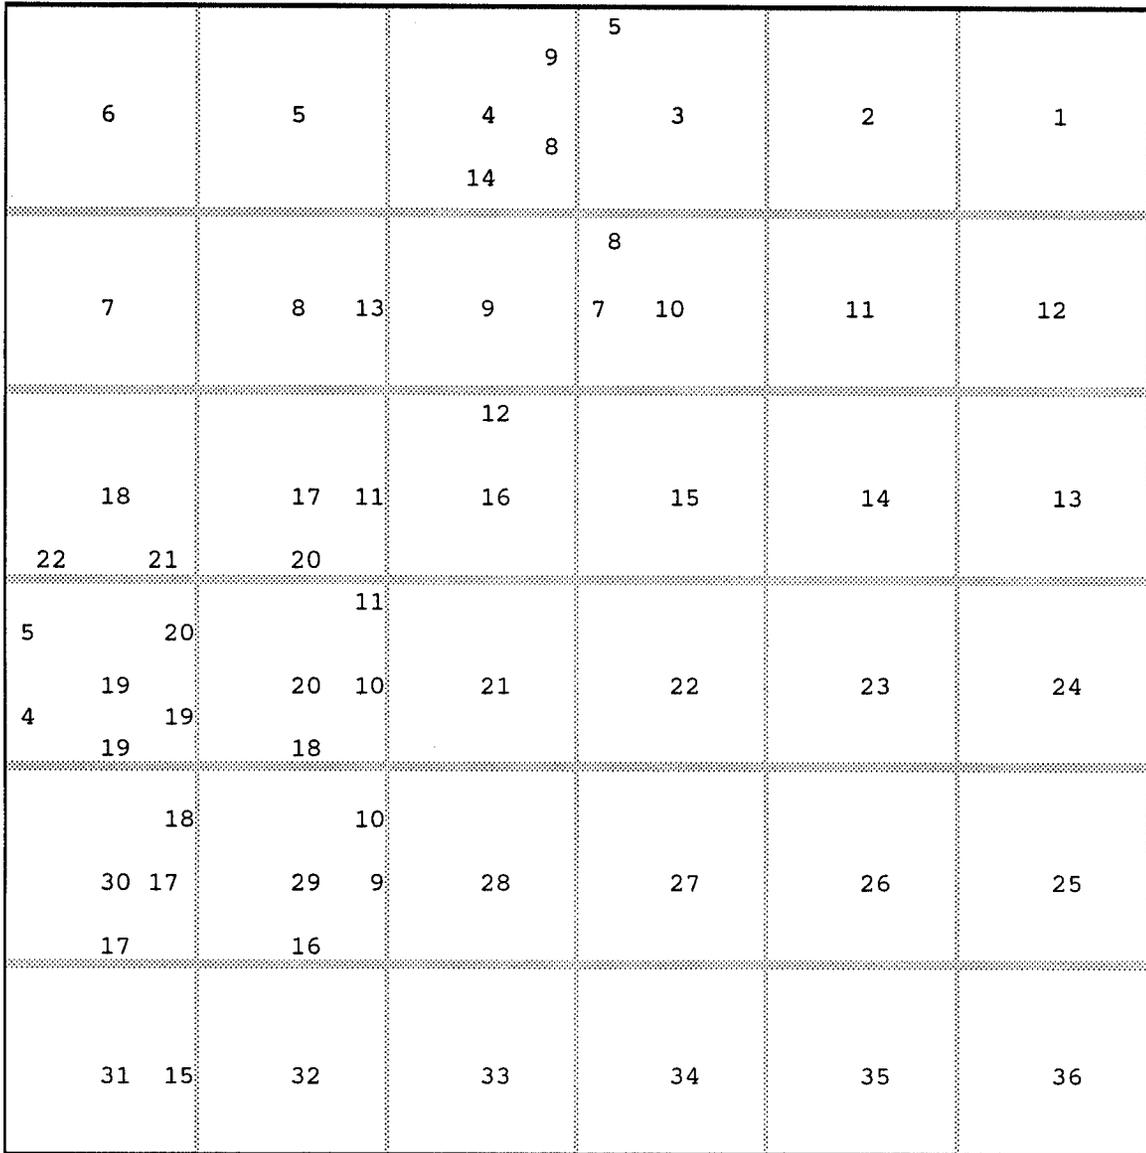

The Subdivision of Section 3.....Page 22
 The Subdivision of Section 9.....Page 24
 The Subdivision of Section 19.....Page 26
 The Subdivision of Section 20.....Page 29
 The Subdivision of Section 29.....Page 32
 The Subdivision of Section 31.....Page 35
 Mineral Survey No. 6877.....Page 38

TOWNSHIP 21 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of a portion of the north and west boundaries, a portion of the subdivisional lines, and Mineral Survey Number 6877 in sections 30 and 31, and the subdivision of sections 3, 9, 19, 20, 29, and 31, in Township 21 South, Range 1 West, Salt Lake Meridian, Utah.

History of Earlier SurveysSurveyed byRetr. or Resurveyed byNORTH BOUNDARY (Fourth Standard Parallel South)

Portion	C. Mogo	1856		
Portion	H. Fitzhugh	1882	H. Fitzhugh	1882
Portion			Heist and Woolley	1906
Portion			Miller and Hayes	1915

SOUTH BOUNDARY

Portion	C. Mogo	1856		
All	A.D. Ferron	1878	A.D. Ferron	1878
Portion			Clark and Yundt	1945
Portion			G.E. Reynolds	1988

EAST BOUNDARY

Portion	C. Mogo	1856		
Portion			A.D. Ferron	1878
Portion	Bailey and Burrill	1874	Bailey and Burrill	1874
Portion			E.W. Koeber	1891
All			Clark and Yundt	1945

WEST BOUNDARY

Portion	A.D. Ferron	1878		
All			H. Fitzhugh	1882
Portion			Miller and Hayes	1915
Portion			F.R. Chappell	1969

SUBDIVISION

Portion	C. Mogo	1856		
Portion	A.D. Ferron	1878	A.D. Ferron	1878
Portion	Miller and Hayes	1915	Miller and Hayes	1915

Mineral Survey No. 6877

All	L.G. Burton	1925		
Portion			G.E. Reynolds	1988

TOWNSHIP 21 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

During the execution of the official survey by Miller and Hayes in 1915, corners were found monumented with G.L.O. type monuments with brass caps filed smooth. These monuments were identified in the survey notes, as being set by the State Engineers Office in 1915-16, and were accepted and utilized where noted. In the execution of this survey under Group No. 778, similar type monuments were found and are believed to have been set by John R. Stewart under the direction of the State Engineers office in 1915-16. In the absence of a record of survey, these monuments are accepted and utilized as the best available evidence of corner positions where noted within the body of these notes.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 778, dated October 30, 1991.

The directions of the lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey and resurveys were retraced and a diligent search was made for any evidence of the original and resurvey field note records. Identified corners, when appropriate were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original or resurvey record.

The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the corner of sections 5, 6, 31, and 32, on the south boundary as determined by a tie made to U.S. Geological Survey triangulation station Bench Mark "X 50 1934" is as follows:

Latitude 38°55'39.86" N. Longitude 111°56'33.87" W.
N.A.D. 1927

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1985 is 13 1/2° E.

Dependent Resurvey of a Portion of the West Boundary,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by A.D. Ferron in
1878 and the Resurvey Executed by H. Fitzhugh in 1882

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Beginning at the corner of Tps. 21 and 22 S., Rs. 1 and 2 W., monumented with an iron post, 2 1/2 ins. diam., projecting 20 ins. out of the ground and in a mound of stone, 4 ft. base to top of brass cap, marked as described in the official record of the 1969 resurvey.

N. 0°46.8' W., on the west boundary of section 31.

Over mountainous land, through pinon and juniper.

39.75 Wash in draw, drains E.

40.281 The 1/4 section corner of sections 31 and 36, monumented with a scattered mound of stone.

From which the original bearing trees:

A juniper stump, 10 ins. diam., bears S. 40° E., 29 lks. dist.

A juniper, 12 ins. in diam., bears N. 10° W., 30 lks. dist.
with faint scribe marks visible.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S
R2W R1W
1/4
S36 | S31
1992

Corner is located on SW slope in pinon and juniper.

N. 0°51.6' W., beginning new measurement.

41.216 The corner of sections 25, 30, 31, and 36, monumented with an iron post, 2 1/2 ins. diam., projecting 6 ins. out of the ground and in a collar of stone, with brass cap, marked as described in the official record of the 1969 resurvey.

Corner is located on gentle NE slope in sagebrush, 20 lks. S of a trail road, bears NE and SW.

DEPENDENT RESURVEY OF THE WEST BOUNDARY OF SECTION 19,
T. 21 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of the West Boundary of Section 19,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by H. Fitzhugh in 1882
and the Resurvey by F.R. Chappell in 1969

From the corner of sections. 19, 24, 25, and 30, on the west boundary of the township,
monumented with an iron post, 2 1/2 ins. diam., projecting 2 ins. out of the ground, with brass
cap marked as described in the official record of the 1969 resurvey.

Corner witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high to the W.

N. 0°14.1' W., on the east boundary of section 24.

37.980 Point for the 1/4 section corner of section 19 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap
marked:

T21S
R2W R1W
| 1/4
| S19
1991

Raise a mound of stone, 3 ft. base, 2 ft. high to the E.

Corner is located on gently rolling bench land in shadscale and widely scattered juniper
growth.

40.873 The 1/4 section corner of section 24 only, monumented with an iron post, 2 1/2 ins. diam.,
projecting 4 ins. out of the ground, with brass cap marked as described in the official record of
the 1969 resurvey.

Corner is witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high to the W.

N. 1°11.6' W., beginning new measurement.

16.100 Point for the N 1/16 section corner of section 19 only, T. 21 S., R. 1 W.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap
marked:

DEPENDENT RESURVEY OF THE WEST BOUNDARY OF SECTION 19,
T. 21 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S
R2W R1W
| N 1/16
| S19
1992

Set a steel fence post, alongside the aluminum post.

Corner is located on nearly level land in greasewood and native grasses.

35.093 The closing corner of sections 18 and 19, T. 21 S., R. 1 W., monumented with an iron post, 2 ins. diam., projecting 10 ins. out of the ground, with brass cap marked as described in the official record of the 1915 survey.

Corner is located in the bottom of Denmark Wash, drains SE.

40.866 The corner of sections 13 and 24, monumented with an iron post, 3 ins., diam., projecting 6 ins. above ground and in a collar of stone, with brass cap, marked as described in the official record of the 1915 survey and the 1969 resurvey record.

Dependent Resurvey of a Portion of the North Boundary,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by C. Mogo in 1856

From the corner of sections 3, 4, 33, and 34, monumented with an iron post, 2 ins. diam., projecting 2 ins. out of concrete, with a GLO type brass cap filed smooth and marked.

T20S R1W
S33 | S34
S4 | S3
T21S
1915

This corner was accepted and utilized in the survey by Miller and Hayes in 1915.

Corner is located in a barb wire fence line, bears N. 89°50' E. and S. 89°50' W.

N. 89°50.0' E., between sections 3 and 34.

Over gently rolling E slope, through sagebrush and native grasses.

19.971 The W 1/16 section corner of sections 3 and 34, monumented with a concrete block, 8x8x8 ins. above ground, marked with a cross.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

This corner is accepted as a careful and faithful determination of the position of the W 1/16 section corner.

This corner cannot be improved on and is not remonumented.

The corner is located in a barb wire fence line, 4 strand, bears N. 89°50' E. and S. 89°50' W.

N. 89°48.8' E., beginning new measurement.

19.998 The 1/4 section corner of sections 3 and 34, monumented with an iron post, 2 ins. diam., projecting 6 ins. out of concrete, with a GLO type brass cap filed smooth and marked.

T20S R1W
1/4
T21S
1915

This corner is accepted as a careful and faithful determination of the position of the original corner.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey executed by C. Mogo in 1856

From the corner of sections 9, 10, 15, and 16, monumented with an iron post, 2 ins. diam., projecting 8 ins. out of solid concrete with a GLO type brass cap, filed off and marked.

T21S R1W
S9 | S10
S16 S15
1915

This corner is accepted as a careful and faithful determination of the position of the original corner.

Corner is located in fence line, 4 strand barb wire, bears E and W.

N. 1°29.4' W., between sections 9 and 10.

Over gently rolling E slope, through sagebrush and native grasses.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**40.637**

The 1/4 section corner of sections 9 and 10, monumented with an iron post, 2 ins. diam., projecting 6 ins. out of solid concrete with a GLO type brass cap, filed smooth and marked.

T21S R1W
1/4
S9 | S10
1915

This corner is accepted as a careful and faithful determination of the position of the original corner.

N. 1°26.4' W., beginning new measurement.

19.73

Improved graveled road, bears E and W.

20.03

Barb wire fence line, 4 strand, bears E and W.

20.378

The N 1/16 section corner of sections 9 and 10, monumented with an iron post, 2 ins. diam., projecting 6 ins. out of solid concrete, with a GLO type brass cap, not marked. I mark the brass cap to read.

T21S R1W
N 1/16
S9 | S10
1992

This corner is accepted as a careful and faithful determination of the position of the N 1/16 corner position.

N. 1°29.0' W., beginning new measurement.

20.243

The corner of sections 3, 4, 9, and 10, monumented with an iron post, 2 ins. diam., projecting 8 ins. out of solid concrete, with GLO type brass cap, marked.

T21S R1W
S4 | S3
S9 S10
1915

This corner was accepted and utilized in the survey by Miller and Hayes in 1915.

From the 1/4 section corner of sections 3 and 10, monumented with an iron post, 2 ins. diam., projecting 8 ins. out of solid concrete, with GLO type brass cap, marked.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

1/4 T21S R1W
S3
S10
1915

This corner is accepted as the best available evidence of the original corner position.

S. 88°53.2' W., between sections 3 and 10.

- 20.077** The W 1/16 section corner of sections 3 and 10, monumented with an iron post, 2 ins. diam., set in concrete, with GLO type brass cap not marked. I mark the brass cap to read.

W 1/16 T21S R1W
S3
S10
1992

This corner is accepted as a careful and faithful determination of the W 1/16 corner position.

- 40.133** The corner of sections 3, 4, 9 and 10.

Reestablishment of the Survey Executed by C. Mogo in 1856
and the Resurvey Executed by Miller and Hayes in 1915

N. 1°27.4' W., between sections 3 and 4.

Over rolling SE slope, through sagebrush and native grasses.

- 21.883** The S 1/16 section corner of section 3 only, monumented with an iron post, 2 ins. diam., projecting 8 ins. out of solid concrete with a GLO type brass cap not marked. I mark the brass cap to read.

S 1/16 T21S R1W
S3
1992

This corner is accepted as a careful and faithful determination of the position of the S 1/16 corner position.

Set a steel fence post, alongside the corner.

Corner is located 20 lks. S of a trail road, bears SE and NW.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 1°36.0' W., beginning new measurement.

- 18.140** The 1/4 section corner of section 4 only, monumented with an iron post, 1 in. diam., projecting 12 ins. out of the ground, with brass cap marked as described in the official record of the 1915 resurvey.

N. 0°54.0' W., beginning new measurement.

- 3.525** The 1/4 section corner of section 3 only, monumented with an iron post, 1 in. diam., projecting 12 ins. out of the ground, with brass cap, marked as described in the official record of the 1915 resurvey.

N. 1°28.0' W., beginning new measurement.

- 0.130** An iron post, 2 ins. diam., projecting 8 ins. out of solid concrete, with GLO type brass cap, dated 1915 with no other markings. This monument was not accepted in the 1915 resurvey by Miller and Hayes, and is not utilized in this survey for any corner positions.

- 43.694** The corner of sections 3, 4, 33, and 34, on the north boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by C. Mogo in 1856

From the 1/4 section corner of sections 28 and 29, established in an east and west fence line, and at intersection with the projection of a fence from the north. This point is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4
S29 | S28
1992

Corner is located in cultivated land.

N. 1°07.6' W., between sections 28 and 29.

Over cultivated land.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**20.223**

Point for the N 1/16 of sections 28 and 29; not monumented.

40.446

The corner of sections 20, 21, 28, and 29, established at intersection with fence lines projecting from the North, East and South. This position is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with aluminum cap marked:

T21S R1W	
S20	S21
S29	S28
1992	

Set a steel fence post alongside the aluminum post.

Corner is located on right bank of a State canal, drains NW.

N. 1°21.2' W., between sections 20 and 21.

Over rolling E slope, through sagebrush and native grasses.

19.756

Point for the S 1/16 section corner of sections 20 and 21; not monumented.

39.512

The 1/4 section corner of sections 20 and 21, monumented with a steel rod, extending 12 ins. out of solid concrete.

The steel rod is set in a 5 strand barb wire fence line, bears N and S and is being used by local surveyors and land owners as the 1/4 section corner position. I accept this corner as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W	
1/4	
S20	S21
1992	

Deposit the steel rod and concrete alongside the aluminum post.

Corner is located on a gently rolling E slope in low sagebrush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°19.7' W. beginning new measurement.

- 39.917** The corner of sections 16, 17, 20, and 21, monumented with an unmarked aluminum cap on a rebar, set in a mound of stone.

This point is accepted as a careful and faithful determination of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base, to top of aluminum cap marked:

T21S R1W
S17 | S16
S20 | S21
1992

Deposit the rebar with aluminum cap alongside the aluminum post.

Set a steel fence post, alongside the aluminum post.

Corner located on rolling E slope in low sagebrush and native grasses.

Reestablishment of the Survey Executed by C. Mogo in 1856
and the Resurvey by Miller and Hayes in 1915

N. 2°46.2' E., between sections 16 and 17.

Over rolling E slope, through sagebrush and native grasses.

- 38.182** Point for the 1/4 section corner of sections 16 and 17, at proportionate distance, falls in a scattered mound of stone, with an old broken piece of wood.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
1/4
S17 | S16
1992

Set a steel fence post alongside the aluminum post.

Corner is located on low spur ridge, slopes E in low sagebrush and native grasses.

N. 5°16.7' W., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**42.432**

The corner of sections 8, 9, 16, and 17, monumented with an iron post, 2 ins. diam., projecting 10 ins. out of the ground, with brass cap marked as described in the official record of the 1915 resurvey.

Witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high to the W.

Reestablishment of the Survey Executed by C. Mogo in 1856

From the corner of sections 9, 10, 15, and 16.

S. 87°20.1' W., between sections 9 and 16.

Over rolling SE slope, through low sagebrush and native grasses.

20.036

Point for the E 1/16 section corner of sections 9 and 16.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

	T21S R1W
E 1/16	<u>S9</u>
	S16
	1992

Set a steel fence post, alongside the aluminum post.

Corner is located on gently rolling E slope in low sagebrush and native grasses.

40.072

Point for the 1/4 section corner of sections 9 and 16, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

	T21S R1W
1/4	<u>S9</u>
	S16
	1992

Set a steel fence post, alongside the aluminum post.

Corner is located on gently rolling E slope in low sagebrush and native grasses.

80.144

The corner of sections 8, 9, 16, and 17.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Reestablishment of the Survey by C. Mogo in 1856
and the Resurvey by Miller and Hayes in 1915

N. 0°49.5' W., between sections 8 and 9.

Over E slope of bench land, through low sagebrush and native grasses.

- 41.275** The 1/4 section corner of sections 8 and 9, monumented with a limestone, 22x12x3 ins., firmly set 10 ins. in the ground and plainly marked 1/4 on W. face, with mound of stone to W., 3 ft. base, 1 1/2 ft. high.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4
S8 | S9
1991

Deposit the marked stone alongside the aluminum post.

Corner is located on rolling bench land in low sagebrush and native grasses.

N. 0°45.6' W., beginning new measurement.

- 41.265** The corner of sections 4, 5, 8, and 9, monumented with an iron post, 2 ins. in diam., projecting 8 ins. out of the ground, with brass cap marked as described in the official record of the 1915 resurvey.

Witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high to W.

From the corner of sections 3, 4, 9, and 10.

S. 88°15.2' W., between sections 4 and 9.

Over rolling bench land, through sagebrush and native grasses.

- 19.775** Point for the E 1/16 section corner of sections 4 and 9.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R1W
E 1/16 $\frac{S4}{S9}$
1992

Set a steel fence post alongside the aluminum post.

Corner is located in bottom of a draw, drains SE in low sagebrush.

39.550 The 1/4 section corner of sections 4 and 9, monumented with a limestone, 18x10x6 ins., firmly set 10 ins. in the ground and plainly marked 1/4 on N. face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4 $\frac{S4}{S9}$
1991

Deposit the marked stone alongside the aluminum post.

Corner is located on gently rolling N slope, 50 links N of a trail road, bears E and W, in low sagebrush.

S. 88°14.1' W., beginning new measurement.

39.577 The corner of sections 4, 5, 8 and 9.

Reestablishment of the Survey Executed by A.D. Ferron in 1878

From the corner of sections 5, 6, 31, and 32, on the south boundary, monumented with an aluminum post, 2 1/2 ins. in diam., extending 6 ins. out of ground, with aluminum cap, marked as described in the official record of the 1988 resurvey.

From this corner:

U.S. Geological Survey Bench Mark "X 50", bears, N. 33°55.9' E.,
223.624 chs. dist., monumented with a standard bronze disk, firmly
set in a concrete block, 6x6x6 ins. above ground, marked X 50.

N. 1°20.2' W., between sections 31 and 32.

Over nearly level cultivated land.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**20.819**

Point for the S 1/16 section corner of sections 31 and 32.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
S 1/16
S31 | S32
1992

Corner is located in a barb wire fence line, bears N and S.

Leave cultivated land, thence over rolling E slope, through sagebrush and native grasses.

41.638

The 1/4 section corner of sections 31 and 32, monumented with a fence corner, 5 strand barb wire, bears N, E and S, and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4
S31 | S32
1992

Corner is located on a gentle N slope in sagebrush.

N. 1°16.8' W., beginning new measurement.

40.738

The corner of sections 29, 30, 31, and 32, monumented with a fence corner, 5 strand barb wire, bears E and S, and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
S30 | S29
S31 | S32
1992

Corner is located on a S slope in sagebrush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the point for the 1/4 section corner of sections 29 and 32, established in the center of highway No. 256, (according to court house records), at projection of a fence line to the west, projecting east to Highway No. 256, which bears N and S. This position is utilized as the best available evidence of the position of the 1/4 section corner position.

At the corner point

Set a railroad spike, flush with highway No. 256.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 41°24' E., 46 ft. dist., with aluminum cap marked T21S R1W S 29 RM 46 ft., 1992 with an arrow pointing to the corner point.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 52°57' E., 39 ft. dist., with aluminum cap marked T21S R1W S32 RM 39 ft., 1992 with an arrow pointing to the corner point.

Reference monuments are located on E side of highway alongside barb wire fence line, bears N and S.

S. 88°48.7'W., between sections 29 and 32.

Over feedlot area.

20.203 Point for the W 1/16 section corner of sections 29 and 32.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

	T21S R1W
W 1/16	<u>S29</u>
	S32
	1992

Corner is located 6 lks. N of a 5 strand barb wire fence line, bears E and W, on rolling E slope in native grasses.

40.406 The corner of sections 29, 30, 31, and 32.

N. 86°18.4' W., between sections 30 and 31.

Over rolling bench land, through sagebrush, native grasses and scattered juniper growth.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 35.456** Intersect line 1-2 of Contact Clay No. 5, Mineral Survey No. 6877; not monumented.
- 37.620** Point selected for the witness 1/4 section corner of sections 30 and 31.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- WC
T21S R1W
1/4 S30
 S31
 1992
- Set a steel fence post alongside the aluminum post.
- Corner is located on gently rolling N slope, in sagebrush.
- 40.120** True point for the 1/4 section corner of sections 30 and 31, falls in open pit of a mining area and is unsuitable for monumentation.
- 45.632** Intersect line 3-4 of Contact Clay No. 5, Mineral Survey No. 6877; not monumented.
- 79.898** The corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.
-
- From the corner of sections 29, 30, 31, and 32.
- N. 0°20.0' W., between sections 29 and 30.
- Over rolling bench land, through sagebrush and native grasses.
- 20.892** Point for the S 1/16 section corner of sections 29 and 30.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- T21S R1W
S 1/16
S30 | S29
1992
- Set a steel fence post, alongside the aluminum post.
- 41.784** Point for the 1/4 section corner of sections 29 and 30 at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
1/4
S30 | S29
1992

Set a steel fence post alongside the aluminum post.

Corner is located on S slope in sagebrush and native grasses.

- 83.568** Corner of sections 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., projecting 8 ins. out of the ground, with brass cap, marked as described in the official record of the 1915 resurvey record. Witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. to the W.

From the corner of sections 20, 21, 28, and 29.

N. 89°27.2' W., between sections 20 and 29.

Over gently rolling E slope, through sagebrush and native grasses.

- 19.875** Point for the E 1/16 section corner of sections 20 and 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
E 1/16 S20
 S29
 1992

Set a steel fence post alongside the aluminum post.

Corner is located on a gently rolling E slope in low sagebrush.

- 39.750** Point for the 1/4 section corner of sections 20 and 29, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
1/4 S20
 S29
 1992

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the aluminum post.

Corner is located on gently rolling E slope in sagebrush.

79.500 The corner of sections 19, 20, 29, and 30.

Reestablishment of the Survey Executed by A.D. Ferron in 1877
and the Resurvey Executed by Hayes and Miller in 1915

N. 87°42.6' W., between sections 19 and 30.

Over rolling bench land, through sagebrush and native grasses.

40.573 The 1/4 section corner of sections 19 and 30, monumented with an iron post, 1 inch in diam., extending 8 ins. out of the ground, with brass cap, marked as described in the official record of the 1915 resurvey.

N. 87°41.6' W., beginning new measurement.

Over bench land, through sagebrush, pinon and juniper growth.

40.042 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by C. Mogo in 1856
and the Resurvey Executed by Miller and Hayes in 1915

From the corner of sections 19, 20, 29, and 30.

N. 0°40.2' W., between sections 19 and 20.

Over rolling bench land, through sagebrush and native grasses.

39.636 Point for the 1/4 section corner of sections 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4
S19 | S20
1991

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on nearly level bottom land on S side of Denmark Wash, drains SE, in sagebrush and native grasses.

59.454 Point for the N 1/16 section corner of sections 19 and 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
N 1/16
S19 | S20
1992

Raise mound of stone 3 ft. base, by 2 ft. high to the W.

Corner is located on a W slope in sagebrush and scattered juniper growth.

79.272 The corner of sections 17, 18, 19, and 20, monumented with an iron post, 2 ins. diam., projecting 4 ins. out of the ground, with brass cap, marked as described in the official record of the 1915 resurvey.

From the corner of sections 16, 17, 20, and 21.

N. 89°33.6' W., between sections 17 and 20.

Over rolling bench land, through sagebrush and native grasses.

39.624 Point for the 1/4 section corner of sections 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

1/4 T21S R1W
 S17
 S20
 1992

Set a steel fence post alongside the aluminum post.

Corner is located on a rolling NE slope, under power lines, bears NE and SW, in sagebrush and native grasses.

59.436 Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R1W
W 1/16 S17
 S20
 1992

Set a steel fence post alongside the aluminum post.

Corner is located on a spur ridge, slopes NE in sagebrush and native grasses.

79.248 The corner of sections 17, 18, 19, and 20.

S. 89°56.6' W., between sections 18 and 19.

Over gently rolling land, through sagebrush and native grasses.

20.010 Point for the E 1/16 section corner of sections 18 and 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
E 1/16 S18
 S19
 1991

Set a steel fence post alongside the aluminum post.

Corner is located on nearly level land in sagebrush and native grasses.

40.020 The 1/4 section corner of sections 18 and 19, monumented with an iron post, 1 inch in diam., rusted in two pieces, with brass cap, marked as described in the official record of the 1915 resurvey.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
1/4 S18
 S19
 1991

Set a steel fence post alongside the aluminum post.

Corner is located on nearly level land in greasewood and native grasses.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. $89^{\circ}57.3'$ W., beginning new measurement.

19.939 Point for the W 1/16 section corner of sections 18 and 19, falls in the westbound lane of Highway No. 63.

Set a railroad spike flush with the pavement.

From which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° E., 43 ft. dist., with aluminum cap marked T21S R1W S18 RM 43 ft 1992 and arrow pointing to the corner.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° W., 109 ft. dist., with aluminum cap marked T21S R1W RM S19 109 ft. 1992 and arrow pointing to the corner.

Both reference monuments located in highway right-of-way fence, bears SE and NW.

40.486 The closing corner of sections 18 and 19, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 3,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

Note: Due to the extensive retracement needed to reestablish the 1/4 section corner of sections 2 and 3, for a complete subdivision of section 3, found subdivisional corners within the interior of section 3, utilized by private land surveyors and local landowners, were accepted and utilized as careful determinations of the corner positions where noted.

From the 1/4 section corner of sections 3 and 10.

N. $1^{\circ}34.2'$ W., on the N-S center line of section 3.

43.310 The center 1/4 section corner of section 3, monumented with an iron post, 2 ins. diam., set in concrete with G.L.O. type brass, marked.

CENTER
Sec 3
1915

This corner is accepted as the center 1/4 position.

THE SUBDIVISION OF SECTION 3,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- N. 1° 34.9' W., beginning new measurement.
- 43.281** The 1/4 section corner of sections 3 and 34 on the north boundary of the township, hereinbefore described.
-
- From the center 1/4 section corner of section 3.
- S.89°25.7' W., on the W 1/2 of the E - W center line of section 3.
- 20.047** The center W 1/16 section corner, monumented with a cross in the center of a solid concrete marker, 16 ins. in diam., set flush with the ground.
- This corner is accepted as the center W 1/16 corner position.
- This corner cannot be improved upon and is not remonumented.
-
- S. 89°01.4' W., beginning new measurement.
- 20.008** The 1/4 section corner of section 3 only, on the west boundary of section 3.
-
- From the W 1/16 section corner of sections 3 and 10.
- N. 1° 30.9' W., on the N-S center line of the SW 1/4 of section 3.
- 21.775** The SW 1/16 section corner of section 3, monumented with an iron post, 2 ins. diam., set in concrete, with a GLO type brass cap, marked
- CENTER
SW1/16 S3
1916
- This corner is accepted as the SW 1/16 section corner position.
-
- N. 1° 33.2' W., beginning new measurement.
- 21.724** The center W 1/16 section corner of section 3.
-
- From the SW 1/16 section corner of section 3.
- S. 89° 11.7' W., on the W 1/2 of the E - W center line of the SW 1/4 of section 3.
- 20.033** The S 1/16 section corner of section 3 only.
-

THE SUBDIVISION OF SECTION 3,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- From the center W 1/16 section corner of section 3.
N. 1°31.2' W., on the N - S center line of the NW 1/4 of section 3.
- 43.416** The W 1/16 section corner of sections 3 and 34, on the north boundary of the township, hereinbefore described.
-
- The Subdivision of Section 9,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.
-
- From the 1/4 section corner of sections 9 and 16.
N. 1°07.3' W., on the N - S center line of section 9.
Over rolling bench land, through sagebrush and native grasses.
- 40.956** Point for the center 1/4 section corner of section 9, at intersection with the E - W center line of section 9.
Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- T21S R1W
C 1/4 S9
1992
- Set a steel fence post alongside the aluminum post.
Corner is located on a rolling E slope in low sagebrush and native grasses.
- 61.429** Point for the center N 1/16 section corner of section 9.
Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- T21S R1W
C
N 1/16 | S9
C
1992
- Set a steel fence post alongside the aluminum post.
Corner is located on a rolling E slope in native grasses.
- 81.902** The 1/4 section corner of sections 4 and 9.
-

THE SUBDIVISION OF SECTION 9,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 9 and 10.

S. 87°47.1' W., on the E - W center line of section 9.

Over rolling E slope, through sagebrush and native grasses.

19.900 Point for the center E 1/16 section corner of section 9.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C $\frac{E\ 1/16}{S9}$ C
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a rolling E slope in low sagebrush and native grasses.

39.800 The center 1/4 section corner of section 9.

79.647 The 1/4 section corner of sections 8 and 9.

From the center E 1/16 section corner of section 9.

N. 1°17.5' W., on the N - S center line of the NE 1/4 of section 9.

Over rolling bench land, through sagebrush and native grasses.

20.426 Point for the NE 1/16 section corner of section 9, at intersection with the E - W center line of the NE 1/4 of section 9.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
NE 1/16 S9
1992

Set a steel fence post alongside the aluminum post.

Corner is located in a hollow, drains NE in native grasses.

40.784 The E 1/16 section corner of sections 4 and 9.

THE SUBDIVISION OF SECTION 9,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- From the N 1/16 section corner of sections 9 and 10.
S. 87°55.3' W., on the E - W center line of the NE 1/4 of section 9.
- 19.844** The NE 1/16 section corner of section 9.
- 39.682** The center N 1/16 section corner of section 9.
-
- From the E 1/16 section corner of sections 9 and 16.
N. 1°18.3' W., on the N - S center line of the SE 1/4 of section 9.
- 40.795** The center E 1/16 section corner of section 9.
-
- The Subdivision of Section 19,
T 21 S., R. 1 W., Salt Lake Meridian, Utah.
-
- From the 1/4 section corner of sections 19 and 30.
N. 0°18.4' W., on the N - S center line of section 19.
- Over rolling bench land, through sagebrush, scattered pinon and juniper and native grasses.
- 39.807** Point for the center 1/4 section corner of section 19, at intersection with the E - W center line of section 19.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- T21S R1W
C 1/4 S19
1991
- Set a steel fence post alongside the aluminum post.
- Corner is located in a draw, drains NE, in sagebrush and scattered juniper.
- 58.207** Point for the center N 1/16 section corner of section 19.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 19,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R1W
C
N 1/16 | S19
C
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a gently rolling E slope in greasewood.

77.607 The 1/4 section corner of sections 18 and 19.

From the 1/4 section corner of sections 19 and 20.

N. 88°52.4' W., on the E - W center line of section 19.

Over rolling bench land, through scattered pinon and juniper, sagebrush and native grasses.

20.144 Point for the center E 1/16 section corner of section 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
C $\frac{E\ 1/16}{S19}$ C
1991

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle N slope in low sagebrush.

40.288 The center 1/4 section corner of section 19.

60.269 Point for the center W 1/16 section corner of section 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 4 ft. base, with aluminum cap marked:

T21S R1W
C $\frac{W\ 1/16}{S19}$ C
1991

Corner is located on a SE slope in sagebrush and scattered pinon and juniper growth.

THE SUBDIVISION OF SECTION 19,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**80.250**

The 1/4 section corner of section 19 only, on west boundary of the township, hereinbefore described.

From the center E 1/16 section corner of section 19.

N. 0°29.3' W., on the N - S center line of the NE 1/4 of section 19.

19.609

Point for the NE 1/16 section corner of section 19, at intersection with the E - W center line of the NE 1/4 of section 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
NE 1/16 S19
1991

Set a steel fence post alongside the aluminum post.

Corner is located on nearly level land in sagebrush and native grasses.

39.218

The E 1/16 section corner of sections 18 and 19.

From the N 1/16 section corner of sections 19 and 20.

N. 89°27.9' W., on the E - W center line of the NE 1/4 of section 19.

20.076

The NE 1/16 section corner of section 19.

40.152

The center N 1/16 section corner of section 19.

From the center W 1/16 section corner of section 19.

N. 0°15.3' W., on the N - S center line of the NW 1/4 of section 19.

19.193

Point for the NW 1/16 section corner of section 19, at intersection with the E - W center line of the NW 1/4 of section 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
NW 1/16 S19
1992

THE SUBDIVISION OF SECTION 19,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- Corner is located on gently rolling land in greasewood and native grasses.
- 20.20** Draw, drains, E.
- 38.389** The W 1/16 section corner of sections 18 and 19.
-
- From the center N 1/16 section corner of section 19.
- N. 89°28.0' W., on the E - W center line of the NW 1/4 of section 19.
- 19.959** The NW 1/16 section corner of section 19.
- 40.198** The N 1/16 section corner of section 19 only, on the west boundary of the township, hereinbefore described
-
- The Subdivision of Section 20,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.
-
- From the 1/4 section corner of sections 20 and 29.
- N. 0°45.3' W., on the N - S center line of section 20.
- Over rolling bench land, through sagebrush and native grasses.
- 19.784** Point for the center S 1/16 section corner of section 20.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:
- T21S R1W
C
S 1/16 | S20
C
1992
- Set a steel fence post alongside the aluminum post.
- Corner is located on gentle E slope, in sagebrush and native grasses.
- 39.568** Point for the center 1/4 section corner of section 20, at intersection with the E - W center line of section 20, falls in wash, drains SW, and is unsuitable for monumentation.
- 40.318** Point selected for the witness corner to the center 1/4 section corner of section 20.

THE SUBDIVISION OF SECTION 20,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap marked:

WC
T21S R1W
C 1/4 ↓ S20

1992

Corner is located on nearly level land in gravel pit.

59.458 Point for the center N 1/16 section corner of section 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C
N 1/16 | S20
C

1992

Set a steel fence post alongside the aluminum post.

Corner is located on rolling E slope in sagebrush and native grasses.

79.348 The 1/4 section corner of sections 17 and 20.

From the 1/4 section corner of sections 20 and 21.

N. 89°21.2' W., on the E - W center line of section 20.

Over rolling bench land, through sagebrush and native grasses.

19.668 Point for the center E 1/16 section corner of section 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C $\frac{E\ 1/16}{S20}$ C
1992

Set a steel fence post alongside the aluminum post.

Corner is located on gently rolling E slope in sagebrush and native grasses.

THE SUBDIVISION OF SECTION 20,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

39.336 True point for the center 1/4 section corner of section 20.

59.181 Point for the center W 1/16 section corner of section 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with aluminum cap marked:

$$\begin{array}{c} \text{T21S R1W} \\ \text{C} \frac{\text{W 1/16}}{\text{S20}} \text{C} \\ 1992 \end{array}$$

Corner is located on steep SW slope of cut for highway No 63, bears SE and NW.

79.026 The 1/4 section corner of sections 19 and 20.

From the E 1/16 section corner of sections 20 and 29.

N. 1°03.2' W., on the N - S center line of the SE 1/4 of section 20.

19.770 Point for the SE 1/16 section corner of section 20, at intersection with the E - W center line of the SE 1/4 of section 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

$$\begin{array}{c} \text{T21S R1W} \\ \text{SE 1/16 S20} \\ 1992 \end{array}$$

Set a steel fence post alongside the aluminum post.

Corner is located in paved work area of Highway No. 63.

20.620 Center of Highway No. 63, bears SE and NW.

39.540 The center E 1/16 section corner of section 20.

From the point for the S 1/16 section corner of sections 20 and 21.

N. 89°24.2' W., on the E - W center line of the SE 1/4 of section 20.

19.772 The SE 1/16 section corner of section 20.

39.544 The center S 1/16 section corner of section 20.

THE SUBDIVISION OF SECTION 20,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the center W 1/16 section corner of section 20.

N. 0°42.7' W., on the N - S center line of the NW 1/4 of section 20.

19.854 Point for the NW 1/16 section corner of section 20, at intersection with E - W center line of the NW 1/4 of section 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
NW 1/16 S20
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a rolling E slope in sagebrush and native grasses.

39.708 The W 1/16 section corner of sections 17 and 20.

From the center N 1/16 section corner of section 20.

N. 89°27.4' W., on the E - W center line of section 20.

19.829 The NW 1/16 section corner of section 20.

39.657 The N 1/16 section corner of sections 19 and 20.

The Subdivision of Section 29,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 29 and 32.

N. 0°47.0' W., on the N - S center line of section 29.

Over Highway No. 256

20.623 Point for the center S1/16 section corner of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 30 ins. flush with the pavement, with aluminum cap marked:

THE SUBDIVISION OF SECTION 29,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R1W
C
S 1/16 | S29
C
1992

Corner is located on the right edge of Highway No. 256, 18 lks. E. of the center line.

41.246 Point for the center 1/4 section corner of section 29, at intersection with the E - W center line of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C 1/4 S29
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a gently rolling E slope in sagebrush in old dump area.

61.803 Point for the center N 1/16 section corner of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
C
N 1/16 | S29
C
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a gently rolling E slope in low sagebrush and native grasses.

82.360 The 1/4 section corner of sections 20 and 29.

From the 1/4 section corner of sections 28 and 29.

S. 89°34.8' W., on the E - W center line of section 29.

Over gently rolling E slope, through cultivated land.

19.994 Point for the center E 1/16 section corner of section 29, not monumented.

THE SUBDIVISION OF SECTION 29,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**39.988**

The center 1/4 section corner of section 29.

60.025

Point for the center W 1/16 section corner of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

$$\begin{array}{c} \text{T21S R1W} \\ \text{C} \frac{\text{W 1/16}}{\text{S29}} \text{C} \\ 1992 \end{array}$$

Set a steel fence post alongside the aluminum post.

Corner is located on a rolling S slope in old gravel pit.

80.062

The 1/4 section corner of sections 29 and 30.

From the point for the center E 1/16 section corner of section 29.

N. 0°57.3' W., on the N - S center line of the NE 1/4 of section 29.

20.390

Point for the NE 1/16 section corner of section 29, falls in Highway No. 256.

Set a railroad spike flush with the highway, bears NE and SW.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins.
in the ground, for a reference monument, bears S.45° E.,
60 ft. dist., with aluminum cap marked RM T21S R1W S29
60 ft. 1992.

Corner is located in right-of-way fence, bears NE and SW.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins.
in the ground, for a reference monument, bears N. 45° W.,
60 ft. dist., with aluminum cap, marked RM T21S R1W S29
60 ft. 1992.

Corner is located on rolling E slope in native grasses.

40.780

The E 1/16 section corner of sections 20 and 29.

THE SUBDIVISION OF SECTION 29,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the point for the N 1/16 section corner of sections 28 and 29.

N. 89°56.2' W., on the E - W center line of the NE 1/4 of section 29.

19.934 The NE 1/16 section corner of section 29.

39.868 The center N 1/16 section corner of section 29.

From the W 1/16 section corner of sections 29 and 32.

N. 0°33.5' W., on the N - S center line of the SW 1/4 of section 29.

20.758 Point for the SW 1/16 section corner of section 29, at intersection with the E - W center line of the SW 1/4 of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T21S R1W
SW 1/16 S29
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a rolling S slope in sagebrush and native grasses, 39 lks. N of a netwire fence line, bears E and W.

41.516 The center W 1/16 section corner of section 29.

From the center S 1/16 section corner of section 29.

S. 89°11.7' W., on the E - W center line of the SW 1/4 of section 29.

20.119 The SW 1/16 section corner of section 29.

40.238 The S 1/16 section corner of sections 29 and 30.

The Subdivision of Section 31,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah.

THE SUBDIVISION OF SECTION 31,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 6 and 31, on the south boundary, monumented with a stainless steel post, 2 1/2 ins. diam., projecting 6 ins. above ground, with brass cap marked as described in the official record of the 1988 resurvey.

N. 1°05.2' W., on the N - S center line of section 31.

Over bench land, through sagebrush and scattered pinon and juniper growth.

8.086 Intersect line 1 - 2 of Contact Clay No. 4, Mineral Survey No. 6877; not monumented.

19.101 Point for the center S 1/16 section corner of section 31; not monumented.

38.202 Point for the center 1/4 section corner of section 31, at intersection with the E - W center line of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C 1/4 S31
1992

Set a steel fence post alongside the aluminum post.

Corner is located on a S slope in sagebrush and scattered pinon and juniper.

79.180 The 1/4 section corner of sections 30 and 31.

From the 1/4 section corner of sections 31 and 32.

N. 86°40.0' W., on the E - W center line of section 31.

Over bench land, through sagebrush and scattered pinon and juniper.

20.120 Point for the center E 1/16 section corner of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

T21S R1W
C $\frac{E\ 1/16}{S31}$ C
1992

Set a steel fence post alongside the aluminum post.

THE SUBDIVISION OF SECTION 31,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- Corner located on NE slope, under high voltage power line, bears NE and SW, in sagebrush and native grasses.
- 32.640** Intersect line 1 - 2 of Contact Clay No. 2, Mineral Survey No. 6877; not monumented.
- 40.240** The center 1/4 section corner of section 31.
- 41.734** Intersect line 3 - 4 of Contact Clay No. 2, Mineral Survey No. 6877; not monumented.
- 80.165** The 1/4 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described.
-
- From the E 1/16 section corner of sections 6 and 31, on the south boundary of the township, monumented with an aluminum post, 2 1/2 ins. in diam., projecting 6 ins. out of the ground, with aluminum cap, marked as described in the official record of the 1988 resurvey.
- N. 1°13.2' W., on the N - S center line of the SE 1/4 of section 31.
- 19.961** Point for the SE 1/16 section corner of section 31, at intersection with the E - W center line of the SE 1/4 of section 31.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:
- T21S R1W
SE 1/16 S31
1992
- Set a steel fence post alongside the aluminum post.
- Corner is located on a E slope in low sagebrush.
- 39.921** The center E 1/16 section corner of section 31.
-
- From the S 1/16 section corner of sections 31 and 32.
- N. 84°15.0' W., on the E - W center line of the SE 1/4 of section 31.
- 20.249** The SE 1/16 section corner of section 31.
- 37.203** Intersect line 1 - 2 of Contact Clay No. 3, Mineral Survey No. 6877; not monumented.

THE SUBDIVISION OF SECTION 31,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
40.501

The point for the center S 1/16 section corner of section 31.

Dependent Resurvey of Mineral Survey No. 6877,
Contact Clay Nos. 1, 2, 3, 4, and 5 Lode in Sections 30 and 31,
T. 21 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
L.G. Burton, U.S. Mineral Surveyor in 1925

From corner No. 3 of Contact Clay No. 3 Lode, identical with Corner No. 4, Contact Clay No. 4 Lode, same survey, monumented with a stainless steel post, 2 1/2 ins. diam., projecting 6 ins. out of the ground, with brass cap marked as described in the official record of the 1988 resurvey of Mineral Survey No. 6877.

N. 15°58.8'E., on line 3 - 4 of Contact Clay No. 3 and parallel with line 1 - 2, of Contact Clay No. 3.

22.730 Point for corner No. 4 of Contact Clay No. 3, identical with Corner No. 3 of Contact Clay No. 2, at intersection with line 3 - 4 of Contact Clay No. 2, running parallel with line 1 - 2 of Contact Clay No. 2. No evidence of the original corner could be found.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

MS 6877
T21S R1W
S31 | 3-2
 | 4-3
 | 1992

Set a steel fence post alongside the aluminum post.

Corner is located in a dry pond in scattered juniper growth.

N. 2°07.0' W., on line 3 - 4 of Contact Clay No. 2, same survey, and parallel with line 1 - 2 of Contact Clay No. 2.

6.225 Intersect the E - W center line of section 31; not monumented.

22.589 Corner No. 4 of Contact Clay No. 2, identical with Corner No. 4 of Contact Clay No. 1, monumented with a 6 x 6 in. x 4 ft. long pine post, set in a mound of stone, with faint markings.

DEPENDENT RESURVEY OF M.S. No. 6877, CONTACT CLAY
 NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
 T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

MS 6877
 T21S R1W
 | 4-1
 ——— S31
 | 4-2
 1992

Deposit the corner post alongside the aluminum post.

Corner is located on top of a low spur, slopes N in sagebrush.

N. 1°37.2' E., on line 4 - 5 of Contact Clay No. 1 of same survey.

- 7.580** Corner No. 5 of Contact Clay No. 1, monumented with a 4 x 4 in. x 4 ft. long post, set in a mound of stone with scribe marks 5-6877 CC 1, visible.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

MS 6877
 T21S R1W
 S31 | 5-1
 1991

Deposit the marked post alongside the aluminum post.

Corner is located on a E slope in sagebrush and scattered juniper.

N. 11°16.4' W., on line 5 - 6 of Contact Clay No. 1.


- 15.162** Corner No. 6 of Contact Clay No. 1, identical with corner No. 3 of Contact Clay No. 5, monumented with a 4 x 4 in. x 4 ft. pine post, set in a mound of stone, plainly marked 6-3-6877 CC-1 CC-1.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF M.S. No. 6877, CONTACT CLAY
 NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
 T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS



Deposit the marked corner post alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located in a small saddle of low ridge, bears E and W, in sagebrush and scattered pinon and juniper.

N. 30°25.6' W., on line 3 - 4 of Contact Clay No. 5.


2.829 Intersect the section line between sections 30 and 31; not monumented.

Continue in section 30.

22.771 Corner No. 4 of Contact Clay No. 5, monumented with a 4 x 4 in. x 4 ft. pine post, set in a mound of stone, marked 4-6877 CC 5., with its bearing tree lying dead and down.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, with aluminum cap marked:



Deposit the marked post alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on the S rim of a draw, drains SE in sagebrush, pinon and juniper growth.

N. 82°11.4' E., on line 1 - 4 of Contact Clay No. 5.

9.084 Corner No. 1 of Contact Clay No. 5, monumented with a 4 x 4 in. x 4 ft. pine post, set in a mound of stone, marked 1-6877 CC 5.

DEPENDENT RESURVEY OF M.S. No. 6877, CONTACT CLAY
 NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
 T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH


CHAINS

from which the original bearing tree

A juniper, 10 ins. diam., bears S. 53°04' W., 27 lks. dist.,
 marked 1-6877 CC 5.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of
 stone, with aluminum cap marked:

MS 6877
 T21S R1W

 1992

Deposit the marked post alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located in bottom of a hollow, drains SE, in sagebrush, pinon and juniper growth.


S. 30°31.6' E., on line 1 - 2 of Contact Clay No. 5.

22.156 Intersect the line between sections 30 and 31; not monumented.

22.744 Corner No. 2 of Contact Clay No. 5, identical with corner No. 1 of Contact Clay No. 1,
 monumented with a 4 x 4 in. x 4 ft. pine post set in a mound of stone, marked 1-2 6877 CC 1
 CC 5.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of
 stone, with aluminum cap marked:

MS 6877
 T21S R1W

 1992

Deposit the marked post alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF M.S. No. 6877, CONTACT CLAY
 NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
 T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on a gently rolling NE slope in sagebrush and scattered pinon and juniper growth.

S. $11^{\circ}10.5'$ E., on line 1 - 2 of Contact Clay No. 1.

15.189 Corner No. 2 of Contact Clay No. 1, monumented with a 4 x 4 in. x 3 ft. pine post, set in a mound of stone, marked 2-6877 CC 1.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, with aluminum cap marked:

MS 6877
 T21S R1W
 2-1 } S31
 1992

Deposit the marked post alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on top of a ridge, bears N and S, in sagebrush and native grasses.

S. $1^{\circ}31.2'$ W., on line 2 - 3 of Contact Clay No. 1.

7.600 Corner No. 3 of Contact Clay No. 1, identical with corner No. 1 of Contact Clay No. 2, monumented with a mound of stone, 3 ft. base, 2 ft. high, showing signs of having had a post in the center at some time in the past and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, with aluminum cap marked:

MS 6877
 T21S R1W
 3-1
 S31 ——— |
 1-2
 1992

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF M.S. NO. 6877, CONTACT CLAY
NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on gentle E slope in sagebrush and native grasses.

S. 2°07.0' E., on line 1 - 2 of Contact Clay No. 2.


18.121 Intersect the E - W center line of section 31; not monumented.

22.742 Corner No. 2 of Contact Clay No. 2, identical with corner No. 1 of Contact Clay No. 3, monumented with a mound of stone that coincides with the record and pattern of the survey and is accepted as the best available evidence of the position of the original corner. The original bearing tree is dead and down.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with aluminum cap marked:

MS 6877
T21S R1W



1992

Set a steel fence post alongside the aluminum post.

Corner is located on top of a ridge, bears N and S, in sagebrush and scattered pinon and juniper.

S. 15°58.8' W., on line 1 - 2 of Contact Clay No. 3.

14.946 Intersect the E - W center line of the SE 1/4 of section 31; not monumented.

22.597 Corner No. 2 of Contact Clay No. 3, identical with corner No. 1 of Contact Clay No. 4, monumented with an aluminum post, 2 1/2 ins. in diam., projecting 6 ins. out of the ground, with aluminum cap marked as described in the official record of the 1988 resurvey.

S. 16°13.0' W., on line 1 - 2 of Contact Clay No. 4.

3.465 Intersect the N - S center line of section 31; not monumented.

DEPENDENT RESURVEY OF M.S. No. 6877, CONTACT CLAY
NOS. 1, 2, 3, 4, AND 5, IN SECS. 30 AND 31,
T. 21 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
22.862

Corner No. 2 of Contact Clay No. 4, monumented with an aluminum post, 2 1/2 ins. diam., projecting 6 ins., out of the ground, with aluminum cap marked as described in the official record of the 1988 resurvey.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Ferrel D. Reynolds	Cadastral Surveyor

CERTIFICATE OF SURVEY

I, *Gail E. Reynolds, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *30th day of October, 1991*, I have *dependently resurveyed a portion of the north and west boundaries, a portion of the subdivisional lines, and Mineral Survey No. 6877 in sections 30 and 31, and subdivided sections 3, 9, 19, 20, 29 and 31, in Township 21 South, Range 1 West,*

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 22, 1996

Date


(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the north and west boundaries, a portion of the subdivisional lines, and Mineral Survey No. 6877 in sections 30 and 31, and the subdivision of sections 3, 9, 19, 20, 29 and 31, in Township 21 South, Range 1 West, Salt Lake Meridian, Utah,*

executed by *Gail E. Reynolds, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

May 22, 1996

Date


(Chief Cadastral Surveyor for Utah)