

R-62

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

**FIELD NOTES**

OF

THE DEPENDENT RESURVEY OF PORTIONS

OF THE

NORTH, SOUTH AND WEST BOUNDARIES

AND A PORTION OF THE

SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS

5, 29 AND 31

IN

TOWNSHIP 24 SOUTH, RANGE 7 WEST

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Ferrel D. Reynolds,  
Cadastral Surveyor*

Under special instructions dated *November 13, 1995*, approved *November 13, 1995*, and Supplemental Special Instructions dated *March 1, 1996*, approved *March 13, 1996* which provided for the surveys included under Group Number *809*, and assignment instructions dated *November 13, 1995*.

Survey commenced *February 8, 1996*  
Survey completed *March 26, 1996*

INDEX DIAGRAM

Township 24 South, Range 7 West

	5	4				
6	8	5	6	4	3	2
		8				1
7		8		9	10	11
						12
18		17		16	15	14
						13
19		20		21	22	23
						24
30		29		28	27	26
			6			25
7		7				
4	7					
	31					
3		32		33	34	35
	6					36
3	2					

- The Subdivision of Section 5.....Page 9
- The Subdivision of Section 29.....Page 11
- The Subdivision of Section 31.....Page 12

## TOWNSHIP 24 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

**CHAINS**

The following field notes describe the dependent resurvey of portions of the north, south and west boundaries, and a portion of the subdivisional lines, and the subdivision of sections 5, 29 and 31, in Township 24 South, Range 7 West, Salt Lake Meridian, Utah.

**History of Earlier Surveys**

		Surveyed by	Retr. or Resurveyed by	
<b>NORTH BOUNDARY</b>				
All	A.J. Stewart	1876		
All			H.W. Miller	1917
<b>SOUTH BOUNDARY</b>				
Portion	M.T. Burgess	1871		
Portion	H.W. Miller	1917	H.W. Miller	1917
Portion			Miller & Byergo	1919-20
<b>EAST BOUNDARY</b>				
Portion	M.T. Burgess	1871		
All	A.J. Stewart Jr.	1876	A.J. Stewart Jr.	1876
All			H.W. Miller	1917
<b>WEST BOUNDARY</b>				
All	H.W. Miller	1917	H.W. Miller	1917
<b>SUBDIVISION</b>				
Portion	M.T. Burgess	1871		
All	H.W. Miller	1917	H.W. Miller	1917

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 809, dated November 13, 1995, and Supplemental Special Instructions dated March 1, 1996.

The directions of the lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey and resurveys were retraced and a diligent search was made for any evidence of the original and resurvey field note records. Identified corners, when appropriate were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original or resurvey record.

## TOWNSHIP 24 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

**CHAINS**

The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the corner of sections 6 and 31 only, Townships 24 and 25 South, Range 7 West, on the west boundary of the township, as determined by the Global Positioning System, static relative positioning techniques, utilizing U.S. Coast and Geodetic Survey Triangulation Station " BURNT " is as follows:

Latitude 38° 40'18.094" N. Longitude 112° 41'34.449" W.  
N.A.D. 1983

This point is designated as a B.L.M. Control Station.

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1990 is 13 1/2° E.

---

Dependent Resurvey of a Portion of the South Boundary,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey Executed by H. W. Miller in 1917  
and the Resurvey Executed by H.W. Miller and W. Byergo in 1920

---

Beginning at the corner of sections 31 and 32 only, on the south boundary of the township, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller and W. Byergo in 1920.

S. 89°58.5' W., on the south boundary of section 31.

**4.170** From this point, the corner of sections 5 and 6 only, Township 25 South, Range 7 West, bears South 0.023 chains dist., monumented with an iron post, 2 ins. diam., projecting 12 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller and W. Byergo in 1920.

**40.027** The 1/4 section corner of section 31 only, monumented with an iron post, 1 inch in diam., projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller and W. Byergo in 1920.

---

S. 89°57.0' W., beginning new measurement.

**4.132** From this point, the 1/4 section corner of section 6 only, Township 25 South, Range 7 West, bears North 0.021 chains dist., monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground with the brass cap marked as described in the official record of the resurvey by H.W. Miller and W. Byergo in 1920.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

**20.006**

Point for the W 1/16 section corner of section 31 only; not monumented.

**46.975**

The corner of sections 31 and 6 only, Townships 24 and 25 South, Range 7 West, monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

From this corner:

U.S. Coast and Geodetic Survey triangulation station "BURNT" bears N. 65°28.4' W., (B.S. S. 65° 29.8' E.) 173.130 chains distance.

---

Dependent Resurvey of a Portion of the West Boundary,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey Executed by H. W. Miller in 1917

---

From the corner of sections 6 and 31 only, Townships 24 and 25 South, Range 7 West.

N. 0°03.0' W., on the west boundary of section 31.

**6.417**

The old corner of Townships 24 and 25 South, Range 7 West, monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917. This corner was designated an Angle Point at the time of the resurvey by Miller in 1917.

**14.595**

From this point, the closing corner of sections 1 and 36, Townships 24 and 25 South, Range 8 West, bears East 0.010 chains dist., monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917.

**20.019**

Point for the S 1/16 section corner of section 31 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S  
R8W R7W  
| S 1/16  
| S31  
1996

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

Set a steel fence post alongside the aluminum post.

The corner falls on the E edge of a dirt road, projecting N and S, and 3 lks. dist., W of a N and S fence line.

- 40.038** The 1/4 section corner of section 31 only, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

The corner falls on the E edge of a dirt road, projecting N and S, and 4 lks. dist., W of a N and S fence line.

---

Dependent Resurvey of a Portion of the North Boundary,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey Executed by A.J. Stewart in 1876  
and the Resurvey by H.W. Miller in 1917

---

From the 1/4 section corner of section 33 only, T. 23 S. R. 7 W., monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H. W. Miller in 1917.

N. 89°13.7' W., on the south boundary of section 33, T. 23 S., R. 7 W.

- 36.891** Intersect true point for the closing corner of sections 4 and 5; not monumented.

From this point, the closing corner of sections 4 and 5, bears N. 0°01.8' W., 0.026 chains dist., monumented with an iron post, 2 ins. diam., firmly set, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

- 40.712** The corner of sections 32 and 33 only, T. 23 S. R. 7 W., monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917.

N. 89°16.6' W., on the south boundary of section 32, T. 23 S., R. 7 W.

- 36.215** True point for the 1/4 corner of section 5 only. From this point, the monumented 1/4 section corner of section 5 only, bears S. 0°04.5' E., 0.010 chains distance, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS****40.714**

The 1/4 section corner of section 32 only, T. 23 S., R. 7 W., monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917.

---

N. 88°18.1' W., beginning new measurement.

**15.502**

Point for the W 1/16 section corner of section 5 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked.

T23S R7W	
<hr/>	
W 1/16	S5
T24S	
1996	

Raise a mound of stone S of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on gentle rolling desert land, 25 lks. dist., W of a dirt road, projecting N and S.

**35.505**

The closing corner of sections 5 and 6, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

**39.910**

The corner of sections 31 and 32 only, Township 23 South, Range 7 West, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the resurvey by H.W. Miller in 1917.

---

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey Executed by H.W. Miller in 1917

---

From the corner of sections 28, 29, 32, and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

N. 0°04.1' W., between sections 28 and 29.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL  
LINES, T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

CHAINS

40.050

The 1/4 section corner of sections 28 and 29, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

From this corner:

The corner of sections 4, 5, 8, and 9, bears N. 0°02.6' W., 280.180 chains distance, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

From the corner of sections 4, 5, 8, and 9.

N. 0°02.7' W., between sections 4 and 5.

40.028

The 1/4 section corner of sections 4 and 5, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

N. 0°01.8' W., beginning new measurement.

48.564

True point for the closing corner of sections 4 and 5, at intersection with the south boundary of section 31; hereinbefore described.

From the corner of sections 31 and 32 only, on the south boundary of the township; hereinbefore described.

N. 0°01.9' W., between sections 31 and 32.

40.023

The 1/4 section corner of sections 31 and 32, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

N. 0°07.0' W., beginning new measurement.

20.012

Point for the N 1/16 section corner of sections 31 and 32.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with the aluminum cap marked:

T24S R7W  
N 1/16  
S31 | S32  
1996

The corner falls on a NE slope, in juniper growth, in a N and S fence line.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL  
LINES, T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

**40.024**

The corner of sections 29, 30, 31, and 32, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

From the corner of sections 28, 29, 32, and 33.

N. 89°57.8' W., between sections 29 and 32.

**40.022**

The 1/4 section corner of sections 29 and 32, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

S. 89°58.3' W., beginning new measurement.

**20.021**

Point for the W 1/16 section corner of sections 29 and 32.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
W 1/16  $\frac{S29}{S32}$   
1996

Raise a mound of stone, E of the aluminum post.

**40.042**

The corner of sections 29, 30, 31, and 32.

---

S. 89°58.2' W., between sections 30 and 31.

**20.006**

Point for the E 1/16 section corner of sections 30 and 31; not monumented.

**40.012**

The 1/4 section corner of sections 30 and 31, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

From the corner of sections 4, 5, 8, and 9.

S. 89°59.2' W., between sections 5 and 8.

**39.982**

The 1/4 section corner of sections 5 and 8, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL  
LINES, T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

S. 89°59.2' W., beginning new measurement.

**39.990**

The corner of sections 5, 6, 7, and 8, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins., above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

N. 0°03.7' W., between sections 5 and 6.

**40.017**

The 1/4 section corner of sections 5 and 6, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

N. 0°05.6' W., beginning new measurement.

**20.013**

Point for the N 1/16 section corner of sections 5 and 6.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T24S R7W  
N 1/16  
S6 | S5  
1996

Raise a mound of stone, W of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on gentle rolling sage covered ground.

**50.214**

The closing corner of sections 5 and 6, hereinbefore described.

The Subdivision of Section 5,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 5 and 8.

N. 0°04.5' W., on the N - S center line of section 5.

**40.025**

Point for the center 1/4 section corner, at intersection with the E - W center line of section 5.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 5,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

T24S R7W  
C 1/4 S5  
1996

The corner is located in a recent burned area on rolling ground.

**60.015** Point for the center N 1/16 section corner of section 5.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
C  
N 1/16 | S5  
C  
1996

The corner falls in a recent burned area on rolling desert land.

**89.110** True point for the 1/4 section corner of section 5 only on the north boundary of the township; hereinbefore described.

---

From the 1/4 section corner of sections 4 and 5.

S. 89°58.7' W., on the E - W center line of section 5.

**39.999** The center 1/4 section corner of section 5.

**59.987** Point for the center W 1/16 section corner of section 5.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
C W 1/16 C  
S5  
1996

Set a steel fence post alongside the aluminum post.

The corner falls in a recent burned area on level desert land.

**79.975** The 1/4 section corner of sections 5 and 6.

---

THE SUBDIVISION OF SECTION 5,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

From the center W 1/16 section corner of section 5.

N. 0°05.1' W., on the N - S center line of the NW 1/4 of section 5.

**20.002**

Point for the NW 1/16 section corner, at intersection with the E - W center line of the NW 1/4 of section 5.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
NW 1/16 S5  
1996

Set a steel fence post alongside the aluminum post.

The corner falls in a recent burned area on rolling desert land.

From this point, a well bears N. 83°18.2' W., 3.555 chains distance. At this point tied an 8 ins. diam., vertical pipe, set in the center of a concrete pad.

**49.610**

The W 1/16 section corner of section 5 only, on the north boundary of the township; hereinbefore described.

---

From the center N 1/16 section corner of section 5.

N. 89°59.4' W., on the E - W center line of the NW 1/4 of section 5.

**19.990**

The NW 1/16 section corner of section 5.

**39.980**

The N 1/16 section corner of sections 5 and 6.

---

The Subdivision of Section 29,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 29 and 32.

N. 0°04.0' W., on the N - S center line of section 29.

**40.009**

Point for the center 1/4 section corner, at the intersection with the E - W center line of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 29,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

T24S R7W  
C 1/4 S29  
1996

Set a steel fence post alongside the aluminum post.

The corner falls on a gentle SW slope in sagebrush.

- 80.046** The 1/4 section corner of sections 20 and 29, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

From the 1/4 section corner of sections 28 and 29.

S. 89°58.5' W., on the E - W center line of section 29.

- 40.016** The center 1/4 section corner of section 29.

- 60.024** Point for the center W 1/16 section corner of section 29.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
C  $\frac{W\ 1/16}{S29}$  C  
1996

Set a steel fence post alongside the aluminum post.

The corner falls in a recent burned area on rolling desert land.

- 80.032** The 1/4 section corner of sections 29 and 30, monumented with an iron post, 1 inch in diam., firmly set, projecting 10 ins. above ground, with the brass cap marked as described in the official record of the survey by H.W. Miller in 1917.

---

From the W 1/16 section corner of sections 29 and 32.

N. 0°03.0' W., on the N - S center line of the SW 1/4 of section 29.

- 40.009** The center W 1/16 section corner of section 29.
-

THE SUBDIVISION OF SECTION 31,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

The Subdivision of Section 31,  
T. 24 S., R. 7 W., Salt Lake Meridian, Utah

From the 1/4 section corner of section 31 only, on the south boundary of the township, hereinbefore described.

N. 0°04.2' W., on the N - S center line of section 31.

**20.010** Point for the center S 1/16 section corner of section 31, not monumented.

**40.020** Point for the center 1/4 section corner, at the intersection with the E - W center line of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, set in a collar of stone, with the aluminum cap marked:

T24S R7W  
C 1/4 S31  
1996

Set a steel fence post alongside the aluminum post.

The corner falls on a steep NW slope in sagebrush and juniper.

**60.031** Point for the center N 1/16 section corner of section 31, not monumented.

**80.042** The 1/4 section corner of sections 30 and 31.

From the 1/4 section corner of sections 31 and 32.

S. 89°58.3' W., on the E - W center line of section 31.

**20.025** Point for the center E 1/16 section corner of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, set in a mound of stone, to top of the aluminum cap marked:

T24S R7W  
C E 1/16 C  
S31  
1996

The corner falls on a steep rocky NW slope in dense juniper growth.

**40.050** The center 1/4 section corner of section 31.

THE SUBDIVISION OF SECTION 31,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**  
**60.053**

Point for the center W 1/16 section corner of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T24S R7W  
C  $\frac{W\ 1/16}{S31}$  C  
1996

Set a steel fence post alongside the aluminum post.

The corner falls on nearly level pasture ground.

**87.007**

The 1/4 section corner of section 31 only, on the west boundary of the township; hereinbefore described.

---

From the center E 1/16 section corner of section 31.

N. 0°05.6' W., on the N - S center line of the NE 1/4 of section 31.

**20.011**

Point for the NE 1/16 section corner at intersection with the E - W center line of the NE 1/4, of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, set in a mound of stone, to top of the aluminum cap marked:

T24S R7W  
NE 1/16 S31  
1996

The corner falls on a rocky W slope in juniper growth.

**40.022**

Point for the E 1/16 section corner of sections 30 and 31.

---

From the N 1/16 section corner of sections 31 and 32.

S. 89°58.3' W., on the E - W center line of the NE 1/4 of section 31.

**20.016**

The NE 1/16 section corner of section 31.

**40.032**

Point for the center N 1/16 section corner of section 31.

---

THE SUBDIVISION OF SECTION 31,  
T. 24 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

**CHAINS**

From the point for the W 1/16 section corner of section 31 only, on the south boundary of the township; hereinbefore described.

N. 0°04.1' W., on the N - S center line of the SW 1/4 of section 31.

**20.014** Point for the SW 1/16 section corner, at intersection with the E - W center line of the SW 1/4 of section 31.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, set in a collar of stone, with the aluminum cap marked:

T24S R7W  
SW 1/16 S31  
1996

The corner falls on a gentle NW slope in juniper and pinon growth.

**40.028** The center W 1/16 section corner of section 31.

---

From the point for the center S 1/16 section corner of section 31.

S. 89°57.7' W., on the E - W center line of the SW 1/4 of section 31.

**20.005** The SW 1/16 section corner of section 31.

**46.966** The S 1/16 section corner of section 31 only, on the west boundary of the township; hereinbefore described.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

Name	Capacity
Philip Tobler	Surveying Technician
Billy Shepard	Engineering Technician
Gene Reed	Supervisory Civil Eng. Tech.
LaRell Chappell	Soil Scientist

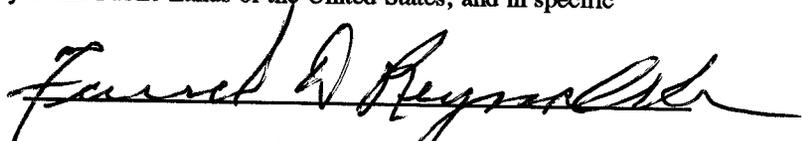
## CERTIFICATE OF SURVEY

I, *Ferrel D. Reynolds, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *13th day of November, 1995*, I have *dependently resurveyed portions of the north, south and west boundaries and a portion of the subdivisional lines, and subdivided sections 5, 29, and 31, in Township 24 South, Range 7 West*,

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

September 5, 1997

Date

  
(Cadastral Surveyor)

Date

(Cadastral Surveyor)

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of portions of the north, south and west boundaries, and a portion of the subdivisional lines, and the subdivision of sections 5, 29, and 31, in Township 24 South, Range 7 West, Salt Lake Meridian, Utah*,

executed by *Ferrel D. Reynolds, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

September 11, 1997

Date



(Chief Cadastral Surveyor for Utah)