

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL  
FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS

7, 17, 18, 19, 20, 21, 28, 29 AND 30

IN

TOWNSHIP 29 SOUTH, RANGE 8 WEST

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

**Larry V. Judd**  
**Cadastral Surveyor**

Under special instructions dated **April 18, 1995**, approved **April 24, 1995**,  
which provided for the surveys included under Group Number **823**, and  
assignment instructions dated **May 19, 1995**

Survey commenced **June 13, 1995**  
Survey completed **August 3, 1995**

## INDEX DIAGRAM

Township 29 South, Range 8 West

	<b>6</b> 24	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
6	<b>7</b> 23 22	<b>8</b> 13 21	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>
5	<b>18</b> 20 20	<b>17</b> 12 18	<b>16</b> 11	<b>15</b>	<b>14</b>	<b>13</b>
4	<b>19</b> 17 17	<b>20</b> 10 16	<b>21</b> 8 10	<b>22</b>	<b>23</b>	<b>24</b>
2	<b>30</b> 15 15	<b>29</b> 9 13	<b>28</b>	<b>27</b>	<b>26</b>	<b>25</b>
2	<b>31</b>	<b>32</b>	<b>33</b>	<b>34</b>	<b>35</b>	<b>36</b>

The Subdivision of Section 7.....	Page 24
The Subdivision of Section 17 .....	Page 25
The Subdivision of Section 18.....	Page 28
The Subdivision of Section 19.....	Page 29
The Subdivision of Section 20.....	Page 31
The Subdivision of Section 21.....	Page 34
The Subdivision of Section 28.....	Page 36
The Subdivision of Section 29.....	Page 37
The Subdivision of Section 30.....	Page 41

## TOWNSHIP 29 SOUTH, RANGE 8 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the west boundary, a portion of the subdivisional lines and the subdivision of sections 7, 17, 18, 19, 20, 21, 28, 29 and 30, in Township 29 South, Range 8 West, Salt Lake Meridian, Utah.

**History of Surveys**

<b>Surveyed by</b>		<b>Retr. or Resurveyed by</b>	
<b>SOUTH BOUNDARY</b>			
All	J. Bausman	1870	
All			T.C. Bailey 1881
All			R.C. Yundt 1950
<b>EAST BOUNDARY</b>			
All	J. Bausman	1870	
Portion			F.D. Reynolds 1990
<b>WEST BOUNDARY</b>			
Portion	J. Bausman	1870	
Portion	A.D. Ferron	1878	
All			H. Fitzhugh 1882
Portion			J. W. Dougall 1910
<b>NORTH BOUNDARY</b>			
All	A.D. Ferron	1882	
Portion			A. Nelson 1916
<b>SUBDIVISION</b>			
Portion	J. Bausman	1870	
Portion	A.D. Ferron	1878	

**PRIVATE SURVEY**

Robert Platt of Platt and Platt Engineering of Cedar City, Utah executed a survey in section 30 of T. 29 S., R. 8 W., with plat signed and dated August 6, 1992.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 823, Utah, dated April 18, 1995.

The directions of lines were determined by references to true meridians established on line by hour angle observations of the sun and Polaris. The lines were carried forward by sustained angulations, being supplemented by other observations taken throughout the progress of the survey. Distances were determined by electronic measurement.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a diligent search was made for all corners and other calls of record. Identified corners were re-monumented in their original positions. The retracement data were thoroughly verified and only the true line field notes are given herein.

## TOWNSHIP 29 SOUTH, RANGE 8 WEST, SALT LAKE MERIDIAN, UTAH

Geodetic control was derived from U.S. Coast and Geodetic Survey triangulation station " GREENVILLE ", with published data as follows:

Latitude 38° 15' 20.152" N. Longitude 112° 44' 44.430"W. N.A.D. 1927

The geographic position of the 1/4 section corner of sections 27 and 28, as determined by a tie made to U.S. Coast and Geodetic Survey triangulation station " GREENVILLE ", is as follows:

Latitude 38° 15' 27.27" N Longitude 112° 44' 59.86" W.  
N.A.D. 1927

*Chains*

---

Dependent Resurvey of a Portion of the West Boundary,  
T. 29 S., R.8 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey Executed by  
J. Bausman in 1870 and the Resurvey by  
H. Fitzhugh in 1882.

---

Beginning at the corner of sections 1, 6, 31 and 36, Townships 29 and 30 South, Ranges 8 and 9 West, monumented with an iron post, 2 inches diameter, firmly set, projecting 2 inches above ground, with the brass cap marked as described in the official record of the resurvey by R.C. Yundt in 1950.

The corner is set at the corner of fences, projecting, north, south, east and west.

N.0° 02.0' W., on the west boundary of the township, between sections 31 and 36.

**38.780** Point for the witness 1/4 section corner of sections 31 and 36, at proportionate distance. No remaining evidence of the original corner was found. The point falls within Minersville Reservoir, not monumented.

**79.548** Point for the corner of sections 25, 30, 31 and 36, at proportionate distance. No remaining evidence of the original corner was found. The point falls within Minersville Reservoir, not monumented.

---

N.0° 02.0' W., on the west boundary of the township, between sections 25 and 30.

**15.740** North edge of Minersville Reservoir, bears N. 58° E., and S. 58° W.

**19.887** Point for the S 1/16 section corner of sections 25 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

T29S  
R9W R8W  
S 1/16  
S25 | S30  
1995

Raise a mound of stone, 2 ft. base by 1 ft. high, west of the aluminum post.

The corner falls on a gradual south slope, in sage brush undergrowth, 2.6 feet east of a fence, projecting north and south.

- 39.774** The 1/4 section corner of sections 25 and 30, monumented with a steel fence post, set by Ralph P. Platt of Platt and Platt Engineering in 1969. No remaining evidence of the original stone monument was found. Information about the reestablishment of the 1/4 section corner was obtained from the office of Platt and Platt Engineering.

This monumented position is accepted as a careful and faithful reestablishment of the 1/4 section corner position.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S  
R9W R8W  
1/4  
S25 | S30  
1995

Raise a mound of stone, 4 ft. base by 2 ft. high, west of the aluminum post.

Reset the steel fence post to the west of the aluminum post.

The corner is set on a steep north slope, 14 feet north of a fence, projecting east and west.

---

N.0° 01.8' W., beginning new measurement.

- 19.891** Point for the N 1/16 section corner of sections 25 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S  
R9W R8W  
N 1/16  
S25 | S30  
1995

Raise a mound of stone, 3 ft. base by 1 ft. high, west of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

The corner is set on a gradual easterly slope.

- 39.782** The corner of sections 19, 24, 25, and 30, monumented with a quartzite stone, 24x12x8 ins., firmly set and plainly marked with 2 notches on the south and 4 notches on the west edges, with the top portion of the stone painted red, and a steel fence post alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S	
R9W R8W	
S24	S19
S25	S30
1995	

Deposit the marked stone, alongside the aluminum post.

Raise a mound of stone, 3 1/2 ft. base by 2 ft. high, west of the aluminum post.

The corner falls on a gradual east slope, 11 feet east of the east edge of a trail road, 8 feet wide, bears N. 20° W., and S. 20° E.

---

Reestablishment of the Survey executed by  
A.D. Ferron, in 1878 and the  
Resurvey by H. Fitzhugh in 1882

---

N. 0° 38.9' E., on the west boundary of the township, between sections 19 and 24.

- 40.049** The 1/4 section corner of sections 19 and 24, monumented with a limestone, 10x6x4 ins., firmly set, dimly marked 1/4 on the west face. ( 1878 survey record limestone 10x10x8 ins.)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, in a collar of stone, with the aluminum cap marked:

T29S	
R9W R8W	
1/4	
S24	S19
1995	

Buried the marked stone alongside the aluminum post.

From this corner, the 1/4 section corner as set by H. Fitzhugh in the 1882 resurvey, monumented with a limestone 12x8x6 inches, ( record trachyte 12x12x10 ins.) firmly set, plainly marked 1/4 on the west face, bears N. 14° 15.9' W., 3.137 chains distance.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

At this time, the marks AM were chiseled on the face of the stone and buried 6 inches below ground. This 1/4 section corner stone was not utilized.

---

N. 0° 32.3' E., beginning new measurement.

- 42.997** The corner of sections 13, 18, 19, and 24, monumented with a limestone 14x8x4 inches, laying loose in a small mound of stone, plainly marked with 3 notches on one edge and 1 notch on the opposite edge. ( record 3 notches on the south and west edges ).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S	
R9W R8W	
S13	S18
S24	S19
1995	

Buried the marked stone, alongside the aluminum post.

Raise a mound of stone, 3 1/2 ft. base by 2 ft. high, west of the aluminum post.

Set a steel fence post, west of the aluminum post.

The corner falls, 34 feet west of a trail road, 8 feet wide, bears, N. 15° E., and S. 15° W.

---

N. 0° 17.3' E., on the west boundary of the township, between sections 13 and 18.

- 38.380** A dirt trail road, 10 feet wide, bears N. 50° W., and S. 50° E.

- 40.193** The 1/4 section corner of sections 13 and 18, monumented with a limestone, 14x10x3 inches, laying loose, plainly marked 1/4 on the west face, set in a scattered mound of stone, alongside a cedar post.

From which

A juniper, 14 ins., diam., with healed over blaze, bears S. 15° E., 50 links dist. ( Record S. 27° E., 56 links dist.)

A juniper, 16 ins., diam., marked 1/4 BT, bears N. 70° W., 93 links dist. ( Record 72 links dist.)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

T29S  
R9W R8W  
1/4  
S13 | S18  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 2 ft. base by 1 ft. high, west of the aluminum post.

---

N. 0° 18.1' E., beginning new measurement.

- 40.267** The corner of sections 7, 12, 13, and 18, monumented with a decomposed granite, 16x14x10 inches, laying alongside a pine post in a small mound of stone, dimly marked with 4 notches on one edge and 2 notches on the opposite edge.

From which

A juniper, 10 ins., diam., with scribe marks visible through mostly healed blaze, bears S. 65° E., 54 links dist. (Record 48 links dist.)

No remaining evidence of the NE and NW bearing trees were found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S  
R9W R8W  
S12 | S7  
S13 | S18  
1995

Buried the marked stone, alongside the aluminum post.

Raise a mound of stone, 3 ½ ft. base by 2 ft. high, west of the aluminum post.

---

N. 0° 25.8' E., on the west boundary of the township, between sections 7 and 12.

- 40.381** The 1/4 section corner of sections 7 and 12 monumented with a limestone, 14x12x8 inches, firmly set, plainly marked 1/4 on the west face, with a small mound of stone to the west.

From which

A juniper, 10 ins., diam., with scribe marks visible through mostly healed blaze, bears S. 68° W., 29 links dist. (Record S. 48° W., 32 links dist)

No remaining evidence of the NE bearing tree was found.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S  
R9W R8W  
1/4  
S12 | S7  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 3 ft. base, by 3 ft. high, to the west of the aluminum post.

---

N. 0° 10.2' E., beginning new measurement.

**8.0** A dirt road, 24 feet wide, bears N. 80° E., and S. 80° W.

**40.293** The corner of sections 1, 6, 7, and 12, monumented with a granite stone, 16x12x8 inches, firmly set, plainly marked with 5 notches on the south and 1 notch on the north edges.

From which

A juniper, 12 ins., diam., marked S1 T29S R9W BT,  
bears N. 20° W., 30 links dist. (Record N. 10° W.,  
34 links dist.)

A stump, 10 inches diameter, found near record bearing and distance for the SW bearing tree was not tied.

No remaining evidence of the NE bearing tree was found.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S  
R9W R8W  
S1 | S6  
S12 | S7  
1995

Buried the marked stone, alongside the aluminum post.

Raise a mound of stone, 4 ft. base by 2 ft. high, west of the aluminum post.

The corner falls, on a southerly slope, in a natural drainage area.

---

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

Reestablishment of the Survey executed by  
J. Bausman in 1870

---

From the corner of sections 21, 22, 27 and 28, monumented with a lava stone 14x8x6 inches, laying loose alongside a lone cedar post, plainly marked with 3 grooves on the east face and 2 grooves on the south face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S21	S22
S28	S27
1995	

Buried the marked stone, alongside the aluminum post.

The corner falls on the west side of the cedar post described.

N. 0° 09.8' E., between sections 21 and 22.

**20.293** Point for the S 1/16 section corner of sections 21 and 22, not monumented.

**40.586** The 1/4 section corner of sections 21 and 22, monumented with a quartzite, 14x7x4 ins., firmly set, plainly marked 1/4 on the east face, with a small cross (x) on top of the stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
1/4	
S21	S22
1995	

Buried the marked stone alongside the aluminum post.

The corner falls on flat ground in sage brush undergrowth.

---

N. 0° 10.3' E., beginning new measurement.

**40.538** The corner of sections 15, 16, 21 and 22, monumented with a cobble stone, 16x7x5 inches, firmly set, plainly marked with 3 notches on the south and east edges, with a steel fence post alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

T29S R8W  
S16 | S15  
S21 | S22  
1995

Buried the marked stone, alongside the aluminum post.

The corner falls on a gradual west slope.

---

From the 1/4 section corner of sections 28 and 29, monumented with a quartzite stone, 12x6x5 inches, ( record cedar post), plainly marked 1/4 on one face, laying loose alongside a steel fence post.

At the steel fence post.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S29 | S28  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 3 ft. base, by 1 ft. high, west of the aluminum post.

Reset the steel fence post to the north of the aluminum post.

The corner falls, 90 feet north of a paved road, 21 ft. wide, bears N. 80° W., and S. 80° E.

N. 1'11.4' W., between sections 28 and 29.

**10.104** Point for S - N 1/64 section corner of sections 28 and 29, not monumented.

**20.208** Point for the N 1/16 section corner of sections 28 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
N 1/16  
S29 | S28  
1995

Raise a mound of stone, 2 ft. base, by 2 ft. high, west of the aluminum post.

The corner falls on a gradual easterly slope.

**40.416** Point for corner of sections 20, 21, 28 and 29, at proportionate distance. No remaining evidence of the original corner was found.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S20	S21
S29	S28
1995	

Raise a mound of stone, 2 ft. base by 2 ft. high, west of the corner.

The corner falls on flat ground, 49 ft. west of a dirt trail road, 8 ft. wide, bears N. 15° E., and S. 15° W.

From the corner of sections 21, 22, 27 and 28.

N. 89° 49.1' W., between sections 21 and 28.

**20.271** Point for the E 1/16 section corner of sections 21 and 28, not monumented.

**40.542** Point for the 1/4 section corner of sections 21 and 28, at proportionate distance. No remaining evidence of the original 1/4 section corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S21	
1/4	_____
S28	
1995	

Raise a mound of stone, 2 ft. base, by 1 ft. high to the north of the aluminum post.

**81.084** The corner of sections 20, 21, 28 and 29.

N. 0°45.8' E., between sections 20 and 21.

**20.205** Point for S 1/16 section corner of sections 20 and 21, not monumented.

**40.410** Point for the 1/4 section corner of sections 20 and 21, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
1/4	
S20	S21
1995	

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set a steel fence post, alongside the aluminum post.

From this corner, a rebar with no cap, with a steel fence post alongside, bears S. 0°52.2' E., 1.733 chains distance. The origin of the rebar was not determined.

**60.615** Point for the N 1/16 section corner of sections 20 and 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
N 1/16  
S20 | S21  
1995

Set a steel fence post, alongside the aluminum post.

**80.820** The corner of sections 16, 17, 20, and 21, monumented with a quartzite stone, 12x7x6 inches, laying loose in a scattered mound of stone, plainly marked with 4 notches on one edge and 3 notches on another, with a steel fence post set alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S17 | S16  
S20 | S21  
1995

Raise a mound of stone, 2 ft. base, by 1 ft. high, west of the aluminum post.

The corner falls on a gradual southeast slope, 79 feet north of a drainage, 5 ft. wide, drains southwest.

From the corner of sections 15, 16, 21 and 22.

S. 89° 57.8' W., between sections 16 and 21.

**40.113** Point for the 1/4 section corner of sections 16 and 21, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S16  
1/4 ———  
S21  
1995

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

Raise a mound of stone, 2 ft. base, by 1 ft. high to the north of the aluminum post.

**46.000** The center of a gravel road, 22 ft. wide, bears S. 53' E., and N. 53' W.

**80.226** The corner of sections 16, 17, 20 and 21.

---

N. 0°02.2' E., between sections 16 and 17.

**20.192** Point for S 1/16 section corner of sections 16 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S 1/16  
S17 | S16  
1995

Raise a mound of stone, 2 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post, alongside the aluminum post.

**40.384** Point for the 1/4 section corner of sections 16 and 17, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S17 | S16  
1995

Raise a mound of stone, 3 ft. base, by 2 ft. high, west of the aluminum post.

**80.768** The corner of sections 8, 9, 16, and 17, monumented with a granite stone, 8x8x6 inches, laying loose, with a few other smaller stones around, with no visible marks on the stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a collar of stone, with the aluminum cap marked:

T29S R8W  
S8 | S9  
S17 | S16  
1995

The corner falls on flat ground, in sagebrush and greasewood undergrowth.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

---

N. 0°22.6' E., between sections 8 and 9.

**38.57** The center of a dirt road, 22 ft. wide, bears N. 25° E., and S 25° W.

**40.372** The 1/4 section corner of sections 8 and 9, monumented with a granite stone, 12x10x8 inches, firmly set, plainly marked 1/4 on the west face.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S8 | S9  
1995

Buried the marked stone, alongside the aluminum post.

Raise a mound of stone, 2 ft. base, by 2 ft. high, west of the aluminum post.

---

From the corner of sections 28, 29, 32 and 33, monumented with a limestone, 16x8x8 inches, ( Record gray sandstone 16x11x4 ins.), with no visible marks, firmly set in low swampy ground at the corner of fences, projecting, south, east and N. 30° W.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with the aluminum cap marked:

T29S R8W  
S29 | S28  
S32 | S33  
1995

For additional verification, the following ties were made.

From this corner, the 1/4 section corner of sections 28 and 29, bears N.0° 55.6'E., 40.606 chains distance, hereinbefore described.

From this same corner, the 1/4 section corner of sections 28 and 33, bears N. 89° 58.2' E., 41.063 chains distance, monumented with a limestone, 16x8x4 inches, firmly set, dimly marked 1/4 on the north face.

At the corner point for the 1/4 section corner of sections 28 and 33.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
S28  
1/4 —————  
S33  
1995

Buried the marked stone alongside the aluminum post.

The corner is set in an old fence line, projecting north and south, with an old but newer fence line, projecting east, set in swampy ground.

And also from the corner of sections 28, 29, 32 and 33.

The corner of sections 32 and 33 only, on the south boundary of the township, bears S. 0° 00.4' E., 80.760 chains distance, monumented with an iron post, 2 inches diameter, firmly set, projecting 4 inches above ground, with the brass cap marked as described in the official record of the resurvey by R.C. Yundt in 1950.

The intervening 1/4 section corner was searched for, but not found.

N. 89° 52.7' W., between sections 29 and 32.

- 40.373** Point for the 1/4 section corner of sections 29 and 32, at proportionate distance. No remaining evidence of the original corner was found.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S29  
1/4 —————  
S32  
1995

The corner is set in a fence, projecting east and west, between cultivated fields.

- 80.746** Point for the corner of sections 29, 30, 31 and 32, at proportionate distance. No remaining evidence of the original corner was found.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S30 | S29  
S31 | S32  
1995

The corner is set in swampy pasture ground.

From this corner, the center of a power pole, tied 3 feet above ground, bears S. 44° 17.4' E., 29.99 feet distance.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

From this same corner, the corner of sections 31 and 32 only, on the south boundary of the township, bears S. 0° 08.4' E., 80.752 chains distance, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above ground, with the brass cap marked as described in the official record of the resurvey by R.C. Yundt in 1950.

The intervening 1/4 section corner was searched for, but not found.

---

S. 89°20.7' W., between sections 30 and 31.

- 40.300** Point for the 1/4 section corner of sections 30 and 31, at proportionate distance. No remaining evidence of the original corner was found.

The point falls within Minersville Reservoir, not monumented.

- 80.449** Point for the corner of sections 25, 30, 31 and 36, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 29, 30, 31 and 32.

N. 0°05.1' W., between sections 29 and 30.

- 40.376** Point for the 1/4 section corner of sections 29 and 30, at proportionate distance. No remaining evidence of the original corner was found. ( Record cedar post in mound ).

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, over the top of a steel fence post, 6 feet long driven 5 1/2 feet in the ground and mounded in with rocks. The corner is set in standing water, with the brass cap marked:

T29S R8W  
1/4  
S30 | S29  
1995

From this corner, S. 48° 56.5' E., 34.52 feet distance, found a G.L.O. iron post, 2 inches diameter, rusted through and broken off at ground level, with the upper portion of the iron post and attached brass cap laying loose on top of the ground alongside the remainder of the iron post still in the ground. The brass cap was marked with a large and deep 1/4. There is no official record of this monument, and no determination could be made at the time of survey, as to who or when the monument was set.

This monument is not accepted or utilized as the 1/4 section corner position. The upper portion of the iron post with attached brass cap were removed from the survey area.

- 78.65** Fence, projects N. 65° W., and S. 65° E.

- 80.752** Point for the corner of sections 19, 20, 29 and 30, at

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S19	S20
S30	S29
1995	

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 20, 21, 28 and 29.

S. 89°56.4' W., between sections 20 and 29.

**17.30** A dirt trail road, 8 feet wide, bears N. 5° E., and S. 5° W.

**20.168** Point for the E 1/16 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S20	
E 1/16	S29
1995	

Set a steel fence post alongside the aluminum post.

**30.252** Point for the W-E 1/64 section corner of sections 20 and 29, not monumented.

**35.294** Point for the W-W-E 1/256 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S20	
W-W-E 1/256	S29
1995	

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 2 ft. base, by 1 ft. high, north of the aluminum post.

**37.52** A fence, projecting N. 15° E., and S. 15° W.

**40.336** Point for the 1/4 section corner of sections 20 and 29, at proportionate distance. No remaining evidence of the original corner was found. Point falls within cultivated land, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

**80.672** The corner of sections 19, 20, 29 and 30.

---

S. 87°06.4' W., between sections 19 and 30.

**20.226** Point for the E 1/16 section corner of sections 19 and 30, not monumented.

**40.452** The 1/4 section corner of sections 19 and 30, monumented with a gray sandstone, 18x8x5 inches, dimly marked 1/4, laying loose on top of the ground.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S19  
1/4           
S30  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, north of the aluminum post.

The corner falls on a northeast slope.

---

S. 89°53.8' W., beginning new measurement.

**20.071** Point for the W 1/16 section corner of sections 19 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S19  
W 1/16           
S30  
1995

Raise a mound of stone, 3 ft. base by 1 ft. high, north of the aluminum post.

**39.951** The corner of sections 19, 24, 25 and 30, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 19, 20, 29 and 30.

N. 0°46.5' E., between sections 19 and 20.

**20.190** Point for the S 1/16 section corner of sections 19 and 20.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S 1/16  
S19 | S20  
1995

The corner is set, 13 feet west of a fence, projecting north and south.

- 40.380** Point for the 1/4 section corner of sections 19 and 20, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S19 | S20  
1995

Raise a mound of stone, 2 ft. base, by 1 ft. high, west of the corner.

- 41.34** The center of a gravel road, 14 1/2 feet wide, bears N. 50' E., and S. 50' W.

- 80.760** The corner of sections 17, 18, 19, and 20, monumented with a granite stone, 18x8x5 inches, firmly set, plainly marked with 5 notches on the east and 3 notches on the south edges, set in a scattered mound of stone, with a steel fence post alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a collar of stone, with the aluminum cap marked:

T29S R8W  
S18 | S17  
S19 | S20  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 3 ft. base by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 16, 17, 20 and 21.

S. 89°53.7' W., between sections 17 and 20.

- 10.080** Point for the E-E 1/64 section corner of sections 17 and 20.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S17  
E-E 1/64           
S20  
1995

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 3 ft. base, by 1 ft. high, north of the aluminum post.

The corner falls on flat ground, 6 feet east of a fence, projecting north and south.

**20.160** Point for the E 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S17  
E 1/16           
S20  
1995

Set a steel fence post alongside the aluminum post.

The corner falls in the bottom lands of Indian Creek.

**40.320** Point for the 1/4 section corner of sections 17 and 20, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S17  
1/4           
S20  
1995

Set a steel fence post alongside the aluminum post.

The corner is set in an area of old cultivation.

**51.77** The center of a dirt road, 15 feet wide, bears N. 30° E., and S. 30° W.

**60.480** Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 42 S., R. 13 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
S17  
W 1/16 —————  
S20  
1995

Set a steel fence post alongside the aluminum post.

- 80.640** The corner of sections 17, 18, 19 and 20.

---

N. 89°52.5' W., between sections 18 and 19.

- 40.016** Point selected for the witness corner to the 1/4 section corner of sections 18 and 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
WC  
S18  
1/4 ←—————  
S19  
1995

The corner is set in a newly constucted fence line projecting, north and south.

- 40.236** Point for the 1/4 section corner of sections 18 and 19, at proportionate distance, falls on the east edge of a dirt road, 14 feet wide, bears north and south.

From this point, the original 1/4 section corner, a limestone, 16x12x6 inches, dimly marked 1/4 was found laying loose nearby. The original position could not be determined and therefore not utilized. Buried the marked stone, alongside the witness corner monument.

- 80.572** The corner of sections 13, 18, 19 and 24, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 17, 18, 19 and 20.

N. 0°21.8' W., between sections 17 and 18.

- 20.376** Point for the S 1/16 section corner of sections 17 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S 1/16  
S18 | S17  
1995

Set a steel fence post, alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 42 S., R. 13 W., SALT LAKE MERIDIAN, UTAH

## Chains

- 40.752** The 1/4 section corner of sections 17 and 18, monumented with a decomposed granite, 20x10x6 inches, firmly set, plainly marked 1/4 on the west face, set in a small scattered mound of stone.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S18 | S17  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 3 ft. base, by 2 ft. high, west of the aluminum post.

---

N. 0°16.5' E., beginning new measurement.

- 40.341** The corner of sections 7, 8, 17, and 18, monumented with a granite stone, 15x12x7 inches, firmly set, dimly marked with 4 notches on the south and 5 notches on the east edges, set in a mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S7 | S8  
S18 | S17  
1995

Raise a mound of stone, 3 ft. base by 1 ft. high, west of the aluminum post.

---

From the corner of sections 8, 9, 16 and 17.

N. 89°52.5' W., between sections 8 and 17.

- 20.185** Point for the E 1/16 section corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S8  
E 1/16 ———  
S17  
1995

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 42 S., R. 13 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Raise a mound of stone, 3 ft. base by 3 ft. high, north of the aluminum post.

The corner is set underneath a power transmission line.

- 40.370** Point for the 1/4 section corner of sections 8 and 17, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S8  
1/4 ———  
S17  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, north of the aluminum post.

The corner is set on a gradual easterly slope.

- 80.740** The corner of sections 7, 8, 17 and 18.

S. 89°40.4' W., between sections 7 and 18.

- 39.958** Point for the 1/4 section corner of sections 7 and 18, at proportionate distance. No remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
S7  
1/4 ———  
S18  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, north of the aluminum post.

The corner is set on flat ground.

- 40.38** A fence projecting, north and south.

- 40.81** The center of a dirt road, bears north and south.

- 59.937** Point for the W 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 42 S., R. 13 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
S7  
W 1/16 ———  
S18  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, north of the corner.

The corner is set on the northerly side of a reservoir, 10 ½ feet east and 26 ½ feet south of the corner of fences, projecting south, east and west.

- 80.076** The corner of sections 7, 12, 13 and 18, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 7, 8, 17 and 18.

N. 0°14.0' E., between sections 7 and 8.

- 40.328** The 1/4 section corner of sections 7 and 8, monumented with a limestone, 16x8x4 inches, firmly set, plainly marked 1/4 on the west face, with a small mound of stone to the east.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S7 | S8  
1995

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 3 ft. base, by 1 ft. high, west of the aluminum post.

---

N. 0°15.1' E., beginning new measurement.

- 40.247** The corner of sections 5, 6, 7, and 8, monumented with a granite stone, 14x10x4 inches, firmly set, plainly marked with 5 notches on the south and east edges.

From which

A juniper, 16 ins., diam., with scribe marks  
visible, bears S. 41° W., 98 links dist. (Record 67  
links dist.)

No remaining evidence of the original NE and SE bearing trees were found.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
T. 42 S., R. 13 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 6 inches in the ground, in a mound of stone, 5 ft. base to top of the aluminum cap marked:

T29S R8W	
S6	S5
S7	S8
1995	

Buried the marked stone alongside the aluminum post.

The corner is set in juniper growth, on a gradual southerly slope.

---

S. 89°12.5' W., between sections 6 and 7.

- 39.902** The 1/4 section corner of sections 6 and 7, monumented with a limestone, 11x10x8 inches, firmly set, dimly marked 1/4 on the north face.

At the corner point.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W	
S6	
1/4	_____
S7	
1995	

Buried the marked stone alongside the aluminum post.

Raise a mound of stone, 4 ft. base, by 2 ft. high, to the north of the aluminum post.

The corner is set on flat ground, 22 feet west of the center of a dirt trail road, 8 feet wide, bears northwest and southeast.

---

N. 89°43.5' W., beginning new measurement.

- 40.081** The corner of sections 1, 6, 7 and 12, on the west boundary of the township, hereinbefore described.

---

The Subdivision of Section 7,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 7 and 18.

N. 0°16.9' E., on the N - S center line of section 7.

- 38.88** A fence, projects northwest and southeast.

THE SUBDIVISION OF SECTION 7  
T. 29 S., R. 8 W., SAL LAKE MERIDIAN, UTAH

## Chains

- 40.354** Point for the center 1 /4 section corner, at intersection with the E - W center line of section 7.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S7  
1995

- 80.251** The 1/4 section corner of sections 6 and 7.

---

From the 1/4 section corner of sections 7 and 8.

S. 89° 42.6' W., on the E - W center line of section 7.

- 39.922** The center 1/4 section corner of section 7.

- 79.930** The 1/4 section corner of sections 7 and 12 on the west boundary of the township, hereinbefore described.

---

The Subdivision of Section 17,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 17 and 20.

N. 0°00.3' W., on the N - S center line of section 17.

- 20.284** Point for the center S 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
S 1/16 | S17  
C  
1995

Set a steel fence post alongside the aluminum post.

- 40.568** Point for the center 1/4 section corner, at intersection with the E - W center line of section 17.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S17  
1995

Raise a mound of stone, 3 ft. base by 1 ft. high, west of the aluminum post.

THE SUBDIVISION OF SECTION 17,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

The corner falls on a gradual easterly slope in sage brush undergrowth, 66 feet east of a power line, which bears N. 30° E. and S. 30° W.

- 80.931** The 1/4 section corner of sections 8 and 17.
- 

From the 1/4 section corner of sections 16 and 17.

N. 89° 50.7' W., on the E - W center line of section 17.

- 20.172** Point for center E 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
E 1/16  
C ——— C  
S17  
1995

Raise a mound of stone, 3 ft. base, by 3 ft. high, to the north of the aluminum post.

- 40.344** The center 1/4 section corner of section 17.

- 60.629** Point for the center W 1/16 section corner of section 17, not monumented.

- 80.914** The 1/4 section corner of sections 17 and 18.
- 

From the center E 1/16 section corner of section 17.

N. 0° 01.0' E., on the N - S center line of the NE 1/4, of section 17.

- 0.49** A fence, projects northwest and southeast.

- 40.374** The E 1/16 section corner of sections 8 and 17.
- 

From the E 1/16 section corner of sections 17 and 20.

N. 0° 00.9' E., on the N - S center line of the SE 1/4, of section 17.

- 20.238** Point the SE 1/16 section corner at intersection with the E - W center line of the SE 1/4 of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

THE SUBDIVISION OF SECTION 17,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
SE 1/16  
S17  
1995

Set a steel fence post alongside the aluminum post.

The corner is set in cultivated land, within a flood plane area of Indian creek.

- 40.476** The center E 1/16 section corner of section 17.
- 

From the S 1/16 section corner of sections 16 and 17.

N. 89° 58.5' W., on the E - W center line of the SE 1/4 of section 17.

- 10.083** Point for C-E-SE 1/64 section corner of section 17.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C-E-SE 1/64  
S17  
1995

Set a steel fence post alongside the aluminum post.

The corner is set 5 1/2 feet west of a fence, projecting north and south.

- 20.166** The SE 1/16 section corner of section 17.

- 40.332** The center S 1/16 section corner of section 17.
- 

From the E-E 1/64 section corner of sections 17 and 20.

N. 0° 01.6' E., on the N - S center line of the SE 1/4 of the SE 1/4 of section 17.

- 20.215** The C-E-SE 1/64 section corner of section 17.
- 

From the W 1/16 section corner of sections 17 and 20.

N. 0° 11.1' W., on the N - S center line of the SW 1/4, of section 17.

- 20.330** Point for the SW 1/16 section corner at intersection with the E - W center line of the SW 1/4 of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

THE SUBDIVISION OF SECTION 17,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

T29S R8W  
SW 1/16  
S17  
1995

Raise a mound of stone, 4 ft. base by 2 ft. high, northeast of the corner.

The corner is set 2 ½ feet west of the bottom of a drainage, 3 feet wide, drains southeast.

**40.660** Point for the center W 1/16 section corner of section 17.

---

From the center S 1/6 section corner of section 17.

N. 89° 58.5' W., on the E - W center line of the SW 1/4 of section 17.

**20.222** The SW 1/16 section corner of section 17.

**40.444** The S 1/16 section corner of section 17 and 18.

---

The Subdivision of Section 18,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the true point for the 1/4 section corner of sections 18 and 19.

N. 0°08.7' E., on the N - S center line of section 18.

**40.473** Point for the center 1/4 section corner, at intersection with the E - W center line of section 18.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S18  
1995

Raise a small mound of stone to west of the aluminum post.

The corner is set 8 ½ feet east of a fence, projecting north and south and 35 feet east of the center of a dirt trail road, 20 feet wide, bears north and south.

**80.777** The 1/4 section corner of sections 7 and 18.

---

From the 1/4 section corner of sections 17 and 18.

S. 89° 43.6' W., on the E - W center line of section 18.

**39.870** The center 1/4 section corner of section 18.

THE SUBDIVISION OF SECTION 18,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

**59.921** Point for the center W 1/16 section corner of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
W 1/16  
C ——— C  
S18  
1995

Set a steel fence post alongside the aluminum post.

**80.102** The 1/4 section corner of sections 13 and 18, on the west boundary of the township, hereinbefore described.

---

From the center W 1/16 section corner of section 18.

N. 0° 14.7' E., on the N - S center line of the NW 1/4, of section 18.

**40.286** The W 1/16 section corner of sections 7 and 18.

---

The Subdivision of Section 19,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 19 and 30.

N. 0° 51.8' E., on the N - S center line of section 19.

**20.598** Point for the center S 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
S 1/16 | S19  
C  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, west of the aluminum post.

The corner is set on a open southwest slope, 10 feet north of the bottom of a small drainage, 2 feet wide drains southeast.

**21.62** A fence projects east and west.

**41.196** Point for the center 1/4 section corner, at intersection with the E - W center line of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

THE SUBDIVISION OF SECTION 19,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
C 1/4  
S19  
1995

Raise a small mound of stone, to the west of the aluminum post.

The corner is set 2 ½ feet west of a fence, projecting north and south

- 82.890** The true point for the 1/4 section corner of sections 18 and 19.

---

From the 1/4 section corner of sections 19 and 20.

S. 88° 15.6' W., on the E - W center line of section 19.

- 20.170** Point for the center E 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
E 1/16  
C ——— C  
S19  
1995

Raise a mound of stone, 1 ft. base by 1 ft. high, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

- 23.65** The center of a dirt road, 16 ½ feet wide, bears N. 42° E., and S. 42° W.

- 40.340** The center 1/4 section corner of section 19.

- 80.473** The 1/4 section corner of sections 19 and 24, on the west boundary of the township, hereinbefore described.

---

From the point for the E 1/16 section corner of sections 19 and 30.

N. 0° 49.2' E., on the N - S center line of the SE 1/4, of section 19.

- 20.394** Point for the SE 1/16 section corner at intersection with the E - W center line of the SE 1/4 of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
SE 1/16  
S19  
1995

THE SUBDIVISION OF SECTION 19,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Raise a mound of stone, 2 ft. base by 2 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner is set 22 feet south of an fence, projecting east and west.

- 40.788** The center E 1/16 section corner of section 19.

---

From the S 1/16 section corner of sections 19 and 20.

S. 87°41.0' W., on the E - W center line of the SE 1/4 of section 19.

- 20.197** The SE 1/16 section corner of section 19.

- 40.394** The center S 1/16 section corner of section 19.

---

The Subdivision of Section 20,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the point for the 1/4 section corner of sections 20 and 29.

N. 0°46.2' E., on the N - S center line of section 20.

- 20.198** Point for the center S 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
S 1/16 | S20  
C  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner is set, 2 feet north of a wire fence, projecting east and west.

- 40.396** Point for the center 1 /4 section corner, at intersection with the E - W center line of section 20.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

THE SUBDIVISION OF SECTION 20,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
C 1/4  
S20  
1995

Set a steel fence post alongside the aluminum post.

- 60.594** Point for the center N 1/16 section corner of section 20, not monumented.  
**80.792** The 1/4 section corner of sections 17 and 20.

From the 1/4 section corner of sections 20 and 21.

S. 89° 55.0' W., on the E - W center line of section 20.

- 20.163** Point for the center E 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
E 1/16  
C ——— C  
S20  
1995

Set a steel fence post alongside the aluminum post.

The corner is set, 53 feet east of a fence, projecting N. 10° W., and S. 10° E.

- 40.326** The center 1/4 section corner of section 20.  
**80.653** The 1/4 section corner of sections 19 and 20.

From the center E 1/16 section corner of section 20.

N. 0°45.9' E., on the N - S center line of the NE 1/4, of section 20.

- 20.201** Point for the NE 1/16 section corner at intersection with the E - W center line of the NE 1/4 of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a collar of stone, with the aluminum cap marked:

T29S R8W  
NE 1/16  
S20  
1995

From this corner, the corner of a newly constructed fence, projecting south and east, bears N. 45° E., 3 feet distance.

- 40.402** The E 1/16 section corner of sections 17 and 20.

THE SUBDIVISION OF SECTION 20,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

Chains

---

From the N 1/16 section corner of sections 20 and 21.

S. 89° 54.4' W., on the E - W center line of the NE 1/4 of section 20.

**10.081** Point for the C-E-NE 1/64 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C-E-NE 1/64  
S20  
1995

Set a steel fence post alongside the aluminum post.

From this corner, the corner of a newly constructed fence, projecting north and west, bears N. 55° E., 8 feet distance.

**20.162** The NE 1/16 section corner of section 20.

**40.324** Point for the center N 1/16 section corner of section 20.

---

From the C-E-NE 1/64 section corner of section 20.

N. 0° 45.9' E., on the N - S center line of the NE 1/4 of the NE 1/4, of section 20.

**20.203** The E-E 1/64 section corner of sections 17 and 20.

---

From the E 1/16 section corner of sections 20 and 29.

N. 0° 46.0' E., on the N - S center line of the SE 1/4, of section 20.

**20.202** Point for the SE 1/16 section corner at intersection with the E - W center line of the SE 1/4 of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
SE 1/16  
S20  
1995

Set a steel fence post alongside the aluminum post.

From this corner, the corner of a newly constructed fence, projecting N. 5° E., and west, bears N. 85° 33' E., 119 feet distance.

**40.403** The center E 1/16 section corner of section 20.

THE SUBDIVISION OF SECTION 20,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

---

From the point for the S 1/16 section corner of sections 20 and 21.

S. 89° 55.7' W., on the E - W center line of the SE 1/4, of section 20.

- 20.165** Point for the SE 1/16 section corner of section 20.
- 30.247** Point for the C-W-SE 1/64 section corner of section 20, not monumented.
- 35.288** Point for the C-W-W-SE 1/256 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground with the aluminum cap marked:

T29S R8W  
C-W-W-SE  
1/256 S20  
1995

Raise a mound of stone, 3 ft. base by 3 ft. high, west of the aluminum post.

The corner is set in a fence, projecting east and west.

- 40.329** The center S 1/16 section corner of section 20.

---

From the point for the W-E 1/64 section corner of sections 20 and 29.

N. 0° 46.1' E., on the N - S center line of the SW 1/4, of the SE 1/4, of section 20.

- 20.200** Point for the C-W-SE 1/64 section corner of section 20.

---

From the W-W-E 1/256 section corner of sections 20 and 29.

N. 0° 46.1' E., on the N - S center line of the W 1/2 of the SW 1/4 of the SE 1/4, of section 20.

- 20.199** The C-W-W-SE 1/256 section corner of section 20.

---

The Subdivision of Section 21,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 21 and 28.

N. 0° 27.9' E., on the N - S center line of section 21.

- 20.249** Point for the center S 1/16 section corner of section 21.

THE SUBDIVISION OF SECTION 21,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
S 1/16 | S21  
C  
1995

Set a steel fence post alongside the aluminum post.

- 40.498** Point for the center 1/4 section corner, at intersection with the E - W center line of section 21.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S21  
1995

Set a steel fence post alongside the aluminum post.

- 80.972** The 1/4 section corner of sections 16 and 21.

From the 1/4 section corner of sections 21 and 22.

N. 89° 56.6' W., on the E - W center line of section 21.

- 20.162** Point for the center E 1/16 section corner of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
E 1/16  
C ——— C  
S21  
1995

Set a steel fence post alongside the aluminum post.

- 40.324** The center 1/4 section corner of section 21.

- 80.651** The 1/4 section corner of sections 20 and 21.

From the point for the E 1/16 section corner of sections 21 and 28.

N. 0°18.8' E., on the N - S center line of the SE 1/4, of section 21.

- 20.271** Point for the SE 1/16 section corner at intersection with the E - W center line of the SE 1/4 of section 21.

THE SUBDIVISION OF SECTION 21,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
SE 1/16  
S21  
1995

Set a steel fence post alongside the aluminum post.

- 40.542** The center E 1/16 section corner of section 21.

---

From the point for the S 1/16 section corner of sections 21 and 22.

N. 89° 52.9' W., on the E - W center line of the SE 1/4 of section 21.

- 20.216** The SE 1/16 section corner of section 21.

- 40.432** The center S 1/16 section corner of section 21.

---

The Subdivision of Section 28,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 28 and 33.

N. 0° 29.6' W., on the N - S center line of section 28.

- 40.417** Point for the center 1/4 section corner, at intersection with the E - W center line of section 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S28  
1995

Raise a mound of stone, 2 ft. base by 2 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner is set at the northerly end of an old gravel pit, 8 feet south of a fence, projecting N. 80° W., and S. 80° E.

- 80.861** The 1/4 section corner of sections 21 and 28.

---

From the 1/4 section corner of sections 27 and 28, monumented with a cobble stone, 16x7x5 inches, firmly set, projecting 6 inches above ground, plainly marked 1/4 on the west face.

At the corner point.

THE SUBDIVISION OF SECTION 28,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
1/4  
S28 | S27  
1995

Buried the marked stone alongside the aluminum post.

The corner is set at the corner of fences, projecting north and east.

From this corner, U.S. Coast and Geodetic Survey triangulation station "GREENVILLE" bears S. 59°39.4' E., ( forward bearing ) 21.608 chains distance.

N. 89° 46.0' W., on the E - W center line of section 28.

**40.233** The center 1/4 section corner of section 28.

**80.287** The 1/4 section corner of sections 28 and 29.

The Subdivision of Section 29,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 29 and 32.

N. 0° 06.4' W., on the N - S center line of section 29.

**40.488** Point for the center 1/4 section corner, at intersection with the E - W center line of section 29, falls within a fenced corral area, not monumented.

**60.684** Point for the center N 1/16 section corner of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
N 1/16 | S29  
C  
1995

Set a steel fence post alongside the aluminum post.

The corner is set 21 ft., north of a fence, projecting east and west.

**80.880** Point for the 1/4 section corner of sections 20 and 29.

From the 1/4 section corner of sections 28 and 29.

S. 89° 57.7' W., on the E - W center line of section 29.

THE SUBDIVISION OF SECTION 29,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

**10.276** Point for the C-E-E 1/64 section corner of section 29, not monumented.

**15.414** Point for the C-W-E-E 1/256 section corner of section 29.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the brass cap marked:

T29S R8W  
C-W-E-E  
1/256  
S29  
1995

Raise a mound of stone, 2 ft base by 1 ft. high, west of the corner.

Set a steel fence post alongside the stainless steel post.

The corner is set at the northerly end of a fenced pasture, 3 1/2 ft. south of the south edge of an old ditch and 12 ft. south of a fence, projecting easterly and westerly.

**20.552** Point for the center E 1/16 section corner of section 29, falls within a dirt irrigation ditch, 7 ft wide, bears north and south, not monumented.

**20.572** Point selected for the witness corner to the center E 1/16 section corner of section 29.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

WC  
T29S R8W  
C — E 1/16 —> C  
S29  
1995

Set a steel fence post alongside the east side of the stainless steel post.

The corner is set, 1.3 ft. west of the west edge of the irrigation ditch, and 2.3 ft. east of a board fence, bears north and south.

**41.104** Point for the center 1/4 section corner of section 29.

**81.457** The 1/4 section corner of sections 29 and 30.

---

From the true point for the center E 1/16 section corner of section 29.

N. 0° 38.9' W., on the N - S center line of the NE 1/4, of section 29.

THE SUBDIVISION OF SECTION 29,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

- 2.05** The center of a paved road, 21 ft. wide, bears N. 80° W., and S. 80° E.
- 2.525** Point for the C-S-S-S-NE 1/1024 section corner on the N-S center line of the NE 1/4 of section 29.
- Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the brass cap marked:
- 1/1024  
S29  
1995
- Set a steel fence post alongside the stainless steel post.
- The corner is set on a steep, southerly slope.
- 5.050** Point for the C-S-S-NE 1/256 section corner of section 29, not monumented.
- 10.100** Point for the C-S-NE 1/64 section corner of section 29, not monumented.
- 19.93** A fence, projecting east and west.
- 20.200** Point for the NE 1/16 section corner at intersection with the E - W center line of the NE 1/4 of section 29.
- Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:
- T29S R8W  
NE 1/16  
S29  
1995
- Set a cedar fence post alongside the stainless steel post.
- 40.402** The E 1/16 section corner of sections 20 and 29.
- 
- From the N 1/16 section corner of sections 28 and 29.
- S. 89° 57.0' W., on the E - W center line of the NE 1/4, of section 29.
- 10.180** Point for the C-E-NE 1/64 section corner of section 29, not monumented.
- 20.360** The NE 1/16 section corner of section 29.
- 30.540** Point for the C-W-NE 1/64 section corner of section 29, not monumented.
- 35.630** Point for the C-W-W-NE 1/256 section corner of section 29.

THE SUBDIVISION OF SECTION 29,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C-W-W-NE  
1/256 S29  
1995

Set a pine post, alongside the stainless steel post.

The corner is set 24 feet north of a fence, projecting east and west.

**40.720** The center N 1/16 section corner of section 29.

---

From the point for the C-E-E 1/64 section corner of section 29.

N. 0° 55.3' W., on the N - S center line of the SE 1/4, of the NE 1/4, of section 29.

**5.0510** Point for the C-S-SE-NE 1/256 section corner of section 29, not monumented.

**10.102** Point for the SE-NE 1/64 section corner, at intersection with the E - W center line of the SE 1/4 of the NE 1/4 of section 29, not monumented.

**20.204** Point for the C-E-NE 1/64 section corner of section 29.

---

From the point for the S-N 1/64 section corner of sections 28 and 29.

S. 89° 57.3' W., on the E - W center line of the SE 1/4 of the NE 1/4 of section 29.

**10.228** Point for the SE-NE 1/64 section corner of section 29.

**15.342** Point for the C-W-SE-NE 1/256 section corner of section 29, not monumented.

**20.456** Point for the C-S-NE 1/64 section corner of section 29.

---

From the C-W-E-E 1/256 section corner of section 29.

N. 0° 47.2' W., on the N - S center line of the SW 1/4 of the SE 1/4 of the NE 1/4 of section 29.

**1.26** The center of a paved road, 21 feet wide, bears S. 85° E., and N. 85° W.

**2.525** Point for the C-S-SW-SE-NE 1/1024 section corner of section 29.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

THE SUBDIVISION OF SECTION 29,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

1/1024  
S29  
1995

Set a steel fence post alongside the stainless steel post.

Raise a mound of stone, 2 ft. base by 2 ft. high, west of the corner.

- 5.050** Point for the SW-SE-NE 1/256 section corner, at intersection with the E - W center line of the SW 1/4 of the SE 1/4 of the NE 1/4 of section 29, not monumented.
- 10.100** Point for the C-W-SE-NE 1/256 section corner of section 29.

---

From the point for the C-S-SE-NE 1/256 section corner of section 29.

S. 89° 57.5' W., on the E - W center line of the SW 1/4 of the SE 1/4 of the NE 1/4, of section 29.

- 5.126** Point for the SW-SE-NE 1/256 section corner of section 29.
- 10.252** Point for the C-S-S-NE 1/256 section corner of section 29.

---

From the C-S-SW-SE-NE 1/1024 section corner on the N-S center line of the SW 1/4 of the SE 1/4 of the NE 1/4 of section 29.

S. 89° 57.6' W., on the E - W center line of the SW 1/4 of the SW 1/4 of the SE 1/4 of the NE 1/4 of section 29.

- 5.132** The C-S-S-S-NE 1/1024 section corner on the N-S center line of the NE 1/4 of section 29.

---

From the point for the C-W-NE 1/64 section corner of section 29.

N. 0° 22.7' W., on the N - S center line of the NW 1/4 of the NE 1/4 of section 29.

- 20.198** Point for the W-E 1/64 section corner of sections 20 and 29.

---

From the C-W-W-NE 1/256 section corner of section 29.

N. 0° 14.6' W., on the N-S centerline of the W 1/2 of the NW 1/4 of the NE 1/4 of section 29.

- 20.197** The W-W-E 1/256 section corner of sections 20 and 29.

---

The Subdivision of Section 30,  
T. 29 S., R. 8 W., Salt Lake Meridian, Utah

---

THE SUBDIVISION OF SECTION 30,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

From the point for the 1/4 section corner of sections 30 and 31.

N. 0°10.1' W., on the N - S center line of section 30.

**39.01** A fence, bears east and west.

**40.074** Point for the center 1/4 section corner, at intersection with the E - W center line of section 30.

Set a stainless steel post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
C 1/4  
S30  
1995

Set a steel fence post alongside the stainless steel post.

The corner is set in a fenced pasture.

**41.77** A fence, bears N. 80° E., and S. 80° W.

**59.623** Point for the center N 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with the aluminum cap marked:

T29S R8W  
C  
N 1/16 | S30  
C  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, west of the corner.

The corner is set 18 1/2 ft., north of a fence, projecting N. 57° W., and S. 57° E.

**79.172** The 1/4 section corner of sections 19 and 30.

---

From the 1/4 section corner of sections 29 and 30.

S. 88° 55.0' W., on the E - W center line of section 30.

**39.44** A fence, projects north and south.

**40.357** The center 1/4 section corner of section 30.

**60.470** Point for the center W 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 30,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

## Chains

T29S R8W  
W 1/16  
C ——— C  
S30  
1995

Raise a mound of stone, 3 ft. base by 3 ft. high, north of the aluminum post.

The corner is set on a steep south slope, 3 ft. north of a fence, projecting east and west.

From this corner, a Platt and Platt Engineering rebar, 5/8 inch diameter, with yellow plastic cap attached bears S. 55° 37' E., 10.6 ft. distance. This monument was set, based upon incorrect methods used to subdivide section 30, and therefore not utilized as the center W 1/16 section corner.

- 80.412** The 1/4 section corner of sections 25 and 30 on the west boundary of the township, hereinbefore described.

---

From the center W 1/16 section corner of section 30.

N. 0° 06.8' W., on the N - S center line of the NW 1/4, of section 30.

- 19.721** Point for the NW 1/16 section corner at intersection with the E - W center line of the NW 1/4 of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T29S R8W  
NW 1/16  
S30  
1995

Raise a mound of stone, 3 ft. base by 2 ft. high, west of the aluminum post.

The corner is set on a moderate south slope, 33 ft. north of the bottom of a draw, 23 ft. wide, drains southeast and the corner of fences projecting south and east, bears N. 60° E., 23 ft. distance.

- 39.442** The W 1/16 section corner of sections 19 and 30.

---

From the center N 1/16 section corner of section 30.

S. 89° 24.3' W., on the E - W center line of the NW 1/4, of section 30.

- 20.091** The NW 1/16 section corner of section 30.

THE SUBDIVISION OF SECTION 30,  
T. 29 S., R. 8 W., SALT LAKE MERIDIAN, UTAH

*Chains*

**40.002** The N 1/16 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

Name	Capacity
Brandon S. Sanchez	Survey Technician
Eric Wilbanks	Survey Aid

## CERTIFICATE OF SURVEY

I, **Larry V. Judd, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the **18th day of April, 1995**, I have **executed a dependent resurvey of a portion of the west boundary, a portion of the subdivisional lines and the subdivision of sections 7, 17, 18, 19, 20, 21, 28, 29 and 30, in Township 29 South, Range 8 West,**


of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

5/7/2003

Date

\_\_\_\_\_

Date

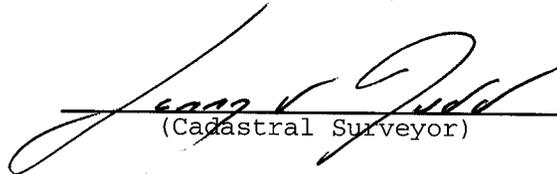

(Cadastral Surveyor)

\_\_\_\_\_

(Cadastral Surveyor)


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the west boundary, a portion of the subdivisional lines and the subdivision of sections 7, 17, 18, 19, 20, 21, 28, 29 and 30, in Township 29 South, Range 8 West**, executed by **Larry V. Judd, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

June 11, 2003

Date



(Chief Cadastral Surveyor for Utah)