

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
PORTIONS OF THE EAST AND NORTH BOUNDARIES,
A PORTION OF THE SUBDIVISIONAL LINES,
THE SUBDIVISION OF SECTIONS 1, 12, 13, AND 24

AND

A METES AND BOUNDS SURVEY IN SECTION 24

OF

TOWNSHIP 43 SOUTH, RANGE 15 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY


Larry V. Judd
Cadastral Surveyor

Under special instructions dated *October 6, 1997*, approved October 6, 1997, which provided for the surveys included under Group Number 876, and assignment instructions dated *October 10, 1997*

Survey commenced *October 31, 1997*
Survey completed *November 19, 1997*

INDEX DIAGRAM

Township 43 South, Range 15 West

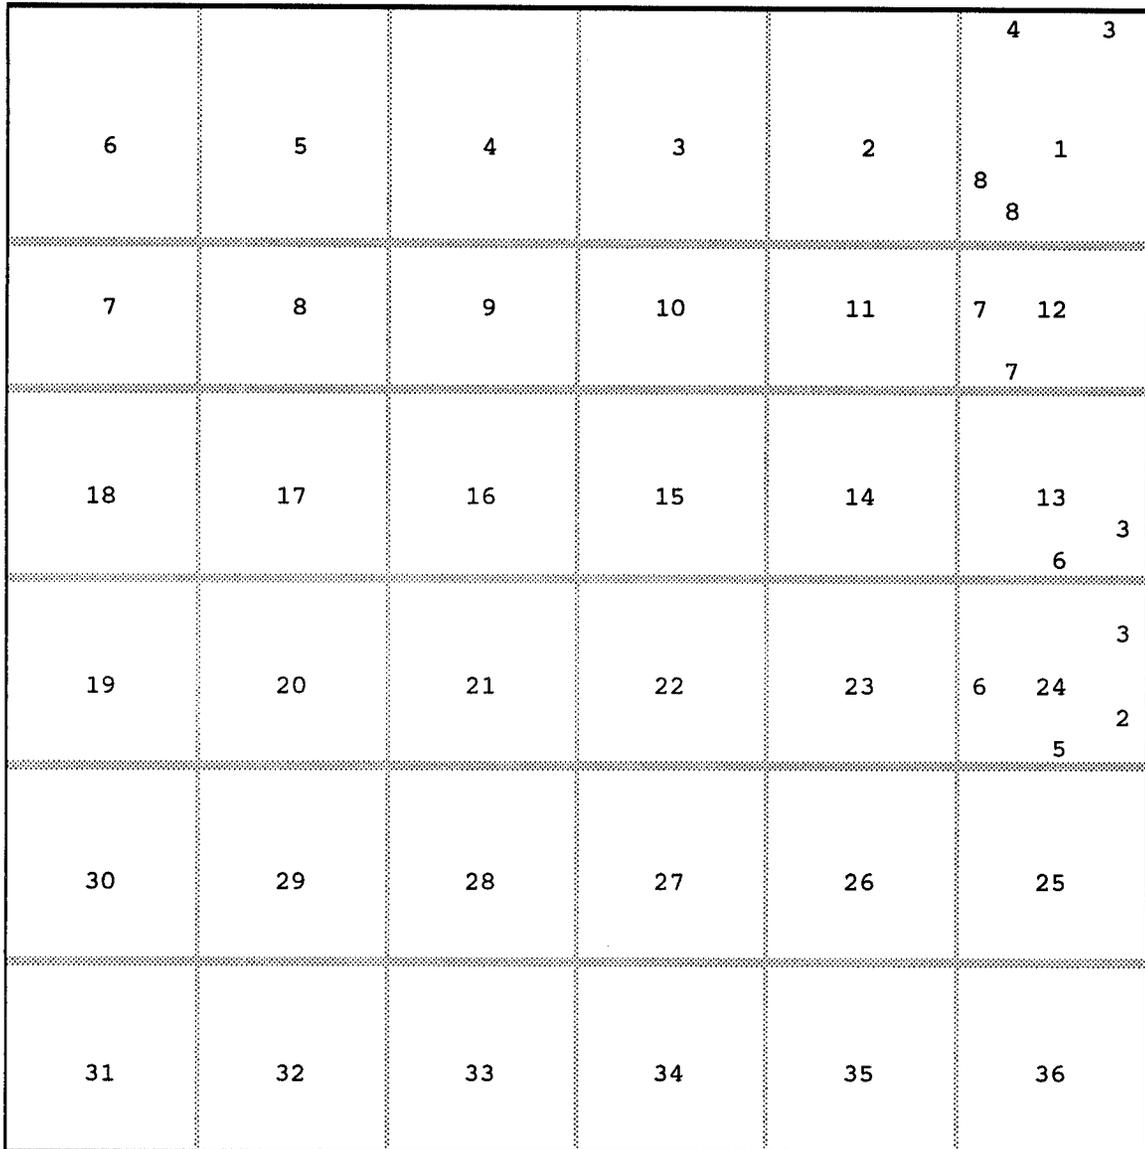

The Subdivision of section 1..... Page 8

The Subdivision of section 12..... Page 11

The Subdivision of section 13..... Page 12

The Subdivision of section 24..... Page 13

Metes and Bounds Survey in section 24..... Page 15

TOWNSHIP 43 SOUTH, RANGE 15 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of portions of the east and north boundaries, a portion of the subdivisional lines, the subdivision of sections 1, 12, 13 and 24, and a metes and bounds survey in section 24, of Township 43 South, Range 15 West, Salt Lake Meridian, Utah.

History of Surveys

	Surveyed by		Retr. or Resurveyed by	
NORTH BOUNDARY				
All	J. Gurlinski	1870		
All			Jenkins & West	1897
All			M.H. Dalley	1900
Portion			C.P. Sylvester	1973
SOUTH BOUNDARY (Utah-Arizona State Boundary Line)				
All	Jenkins & West	1897		
All	H.B. Carpenter	1901		
Closing			Stewart & Snow	1909
Portion			C.P. Sylvester	1973
EAST BOUNDARY				
All	Jenkins & West	1897		
All			Stewart & Snow	1909
Portion			C.P. Sylvester	1973
WEST BOUNDARY (Pine Valley Guide Meridian)				
Portion	J. Gurlinski	1870		
All	Jenkins & West	1897	Jenkins & West	1897
Portion			Stewart & Snow	1909
Portion			A. Nelson	1965
Portion			C.P. Sylvester	1973
Portion			R.K. Baugh	1982
Portion			J.L. Thomas	1983
Portion			R.A. Zaninovich	1985-86
SUBDIVISION				
Portion	J. Gurlinski	1870		
Portion	Jenkins & West	1897	Jenkins & West	1897
Portion			Stewart & Snow	1909
Portion			C.P. Sylvester	1973
Portion			R.A. Zaninovich	1985-86

TOWNSHIP 43 SOUTH, RANGE 15 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 876 Utah, dated October 6, 1997.

The directions of lines were determined by references to true meridians established on line by hour angle observations of the sun and Polaris. The lines were carried forward by sustained angulations, being supplemented by other observations taken throughout the progress of the survey. Distances were determined by electronic measurement.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the corner of sections 24 and 25 only, on the east boundary of the township, as determined by an indirect tie to U.S. Geological Survey Triangulation Station "SAND" 1954 is:

Latitude: 37°01' 23.66" N. Longitude: 113°28' 33.72" W.
N.A.D. 1927.

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1990 is: 13 1/2° East.

Dependent Resurvey of a Portion of the East Boundary
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Jenkins & West in 1897,
and the Resurveys by Stewart & Snow in 1909,
and C.P. Sylvester in 1973.

Beginning at the corner of sections 24 and 25 only, on the east boundary of the township, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The iron post is set at the corner of fences, projecting N and W.

From this corner:

U.S. Geological Survey triangulation station "SAND" 1954, bears N. 52°50.2' E., (forward bearing) and S. 52°52.2' W., (back bearing), 307.783 chains distance, monumented with a standard tablet set in solid rock, with the tablet marked SAND 1954.

N. 0°01.6' W., along the east boundary of section 24.

40.057 The 1/4 section corner of section 24 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The iron post is set at the corner of fences projecting S, E, and N. 45° E., with an E and W road on the N side of the fence, and the center line of the county road, 25 ft wide, 74 ft. to the E.

N. 0°03.1' W., beginning new measurement.

5.765 Point selected for Angle Point No. 1, a corner point of a metes and bounds survey in section 24, hereinafter described.

40.036 The corner of sections 13 and 24 only, on the east boundary of the township, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, in a small mound of stone, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls 20 ft. S of a drainage, 4 ft. wide, drains SW.

N. 0°02.0' W., on the east boundary of section 13.

40.040 The 1/4 section corner of section 13 only, monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls on top of a finger ridge, sloping SW.

Dependent Resurvey of a Portion of the North Boundary
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by J. Gorlinski in 1870,
and the Resurveys by Jenkins and West in 1897, M.H. Dalley in 1900,
and C.P. Sylvester in 1973.

From the corner of sections 1 and 36, Townships 42 and 43 South, Range 15 West, monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, with the iron post projecting 6 ins. above the mound, and with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner is set on the N edge of a drainage, 12 ft. wide, drains W.

S. 89°26.0' W., between sections 1 and 36, on the north boundary of the township.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

40.132

Point for the 1/4 section corner of sections 1 and 36, determined on line from the extension of a found PK nail and a found rebar and plat distances with index error adjustment, establish from the plat of survey by James E. Stuercke, R.L.S. No. 4953 of Alpha Engineering Co., of St. George, Utah, dated March, 1994, obtained from the Washington County Map Depository.

From this point, the found rebar, 5/8 inch in diameter, with a yellow plastic cap marked Alpha Eng., bears S. 89°22.8' W., 20.084 chains distance.

From this same point, the found PK nail, marked Apha Eng., bears S. 89°22.8' W., 40.168 chains distance.

No remaining evidence of the 1973 iron post set by C.P. Sylvester was recovered at the time of this survey.

At the corner point.

Set a stainless steel post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the brass cap marked:

T42S R15W
1/4 $\frac{S36}{S1}$
T43S R15W
1997

Deposit a clear Deep-1 magnet at the base of the stainless steel post.

Set a steel fence post, 1 lk. E of the stainless steel post.

Raise a mound of stone, 5 ft. base, by 2 ft. high, E of the stainless steel post.

The corner falls in the bottom of a drainage, 7 ft. wide, 2 ft. deep, drains SW.

S. 89°23.1' W., beginning new measurement.

20.112

True point for the W 1/16 section corner of sections 1 and 36, at proportionate distance; not monumented.

The point falls on top of a earth diversion dam.

From this corner point, a rebar, 5/8 inch in diam., with a yellow plastic cap marked, Alpha Eng., hereinbefore referenced, bears S. 85°44.2' E., 0.028 chains distance. This rebar was set for the W 1/16 section corner, without utilizing the monumented witness corner to this corner point as set by C.P. Sylvester in 1973. This rebar was not utilized or accepted as the W 1/16 section corner position.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS
23.118

The witness corner to the W 1/16 section corner of sections 1 and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls on the N edge of a dirt road projecting E and W, 13 ft. S of a netwire fence, projecting E and W.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Jenkins and West in 1897, and the Resurvey by C.P. Sylvester in 1973.

From the corner of sections 24 and 25 only, on the east boundary of the township, hereinbefore described.

S. 89°56.7' W., between sections 24 and 25.

39.981

The 1/4 section corner of sections 24 and 25, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The iron post falls at the corner of fences, projecting, E, W, and N, with a road on the S side of the fence, projecting E and W.

S. 89°56.3' W., beginning new measurement.

39.976

The corner of sections 23, 24, 25 and 26, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls in a netwire and barbwire fence line, projecting E and W.

From the 1/4 section corner of sections 23 and 24, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls on flat sandy ground, with a small mound of stone to the N of the iron post.

N. 0°03.7' W., between sections 23 and 24.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.117** The corner of sections 13, 14, 23 and 24, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.
- The corner falls 6 ft. S of the S edge of a dirt road, 8 ft. wide, bears E and W.
-
- From the corner of sections 13 and 24 only, on the east boundary of the township, hereinbefore described.
- S. 89°58.2' W., between sections 13 and 24.
- 12.65** Center line of the county road, 30 ft. wide bears N. 19°36.6' W, and S. 19°36.6' E.
- 13.168** Point selected for Angle Point No. 7, a corner point of a metes and bounds survey within section 24, hereinafter described.
- 39.996** The 1/4 section corner of sections 13 and 24, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.
- The corner is set at the corner of fences, projecting S and W.
-
- S. 89°57.2' W., beginning new measurement.
- 19.977** The W 1/16 section corner of sections 13 and 24, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.
- The corner is set in a fence line, projecting E and W, 9 1/2 ft. E of the corner of fences, projecting N and E.
-
- S. 89°56.1' W., beginning new measurement.
- 19.998** The corner of sections 13, 14, 23, and 24.
-
- From the 1/4 section corner of sections 12 and 13, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.
- The corner falls 6 1/2 ft. S of the corner of fences, projecting N and W, and falls 34 1/2 ft. W of the center line of the county road at a cattle guard, 28 ft. wide, bears N and S.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°51.0' W., between sections 12 and 13.

20.001 Point for the W 1/16 section corner of sections 12 and 13.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

W 1/16 S12
 S13
 1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls 8 ft. N of a fence, projecting E and W.

40.002 The corner of sections 11, 12, 13, and 14, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls in a fence line projecting E and W.

N. 0°04.8' W., between sections 11 and 12.

40.038 Point for the 1/4 section corner of sections 11 and 12, at proportionate distance.

The original corner was not found or reestablished at the time of the resurvey by C.P. Sylvester in 1973. No monumentation by any other surveyor was found at proportionate position.

The corner point falls within an area under development for a subdivision and golf course; not monumented.

80.076 The corner of sections 1 and 12 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, but leaning 1 lk. S of plumb, and projecting 2 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The monument was straightened up before the field tie was made.

The corner falls on flat sandy ground.

From the 1/4 section corner of sections 1 and 12, monumented with an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The corner falls at the base of a earth diversion dike, 10 ft. high, bears N and S.

S. 89°56.1' W., between sections 1 and 12.

20.001 The W 1/16 section corner of sections 1 and 12, monumented with a rebar 5/8 inch diameter, firmly set, with a yellow plastic cap marked L.S. 187849. This monument was set by Mark A. Schraut of Bush and Gudgeon Inc. for the W 1/16 section corner and is accepted as such. No improvements made to the monument.

S. 89° 57.7' W., beginning new measurement.

19.999 The corner of sections 1 and 12 only.

N. 0°10.6' W., between sections 1 and 2.

20.990 Point for the S 1/16 section corner of section 1 only; not monumented.

41.980 The 1/4 section corner of sections 1 and 2, monumented with an iron post, 2 1/2 ins. diam., firmly set 2 ins. below ground, with the brass cap marked and witnessed as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner falls within a gate area, set on the E edge of concrete around a 2 ins. diam., galvanized pipe set flush with the ground, believed to be part of a gate stop.

The Subdivision of Section 1,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 1 and 12.

N. 0°04.0' W., on the N - S center line of section 1.

20.474 Point for the center S 1/16 section corner of section 1.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

C
S 1/16 | S1
C
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

THE SUBDIVISION OF SECTION 1,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The corner falls on the westerly slope of a earth diversion dike, 14 ft. from the top edge, 10 ft. wide at the top, and 10 ft. up from the bottom of the slope, which bears N. 5° W., and S. 5° E.

40.948 Point for the center 1/4 section corner at intersection with the E - W center line of section 1.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, set in a mound of stone, 4 ft. base to top of aluminum cap marked:

T43S R15W
C 1/4
S 1
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls E of the diversion dike, on flat ground.

82.624 The 1/4 section corner of sections 1 and 36, on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of section 1 only, on the east boundary of the township, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner is set on top of a ridge, which bears NW and SE.

N. 88°34.7' W., on the E - W center line of section 1.

40.105 The center 1/4 section corner of section 1.

41.92 Top of earth diversion dike, 10 ft. wide at top.

59.62 Drainage, 3 ft. wide, 3 1/2 ft. deep, drains N. 50° W.

60.150 Point for the center W 1/16 section corner of section 1.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

C ——— W 1/16 ——— C
S1
1997

THE SUBDIVISION OF SECTION 1,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 2 ft. base, by 1 ft. high N of the aluminum post.

The corner falls on flat sandy ground.

80.195 The 1/4 section corner of sections 1 and 2.

From the point for the W 1/16 section corner of sections 1 and 12.

N. 0°07.3' W., on the N - S center line of the SW 1/4 of section 1.

20.737 Point for the SW 1/16 section corner, at intersection with the E - W center line of the SW 1/4 of section 1.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

SW 1/16
S 1
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground.

41.469 The center W 1/16 section corner of section 1.

From the center S 1/16 section corner of section 1.

N. 89°18.8' W., on the E - W center line of the SW 1/4 of section 1.

20.021 The SW 1/16 section corner of section 1.

40.042 The point for the S 1/16 section corner of section 1 only.

From the center W 1/16 section corner of section 1.

N. 0°10.3' W., on the N - S center line of the NW 1/4 of section 1.

THE SUBDIVISION OF SECTION 1,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS**40.962**

True point for the W 1/16 section corner of sections 1 and 36, on the north boundary of the township, hereinbefore described.

The Subdivision of Section 12,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 12 and 13.

N. 0°04.6' W., on the N - S center line of section 12.

39.959

Point for the center 1/4 section corner at intersection with the E - W center line of section 12.

Set a stainless steel post, 30 ins. long, 2 1/2 ins. diam., 1 inch below the surface of a paved county road, 25 ft. wide, with the brass cap marked:

T43S R15W
C 1/4
S 12
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

The corner falls on the westerly side of the paved road, 4 1/2 ft. E of the W edge and 12 ft. E of a netwire fence, projecting N and S.

59.986

Rebar, 5/8 inch diameter, with red plastic cap marked L.R.Pope PLS 5921. This rebar was set by L.R. Pope, Engineers and Surveyors, in 1993, for the center N 1/16 section corner of section 12.

80.008

The 1/4 section corner of sections 1 and 12.

From the 1/4 section corner of section 12 only, on the east boundary of the township, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above a mound of stone, 2 ft. base, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

The corner is set on open ground in rolling hills, cut with washes.

S. 89°57.8' W., on the E - W center line of section 12.

40.033

The center 1/4 section corner of section 12.

80.034

Point for the 1/4 section corner of sections 11 and 12.

THE SUBDIVISION OF SECTION 13,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 13,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 13 and 24.

N. 0°01.1' W., on the N - S center line of section 13.

40.020 Point for the center 1/4 section corner at intersection with the E - W center line of section 13.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

T43S R15W
C 1/4
S 13
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 2 ft. base, by 1 ft. high, W of the aluminum post.

The corner falls on flat sandy ground, in sage brush undergrowth.

80.082 The 1/4 section corner of sections 12 and 13.

From the 1/4 section corner of section 13 only, on the east boundary of the township, hereinbefore described.

S. 89°56.5' W., on the E - W center line of section 13.

39.982 The center 1/4 section corner of section 13.

59.979 Point for the center W 1/16 section corner of section 13.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

C ——— W 1/16 ——— C
S13
1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

THE SUBDIVISION OF SECTION 13,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the aluminum post.

The corner falls in a fence line, projecting N and S, on the easterly side of a dirt road, 7 ft. E of center, road 9 ft. wide.

79.976 The 1/4 section corner of sections 13 and 14, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with the brass cap marked as described in the official record of the resurvey by C.P. Sylvester in 1973.

From the W 1/16 section corner of sections 13 and 24.

N. 0°03.0' W., on the N - S center line of the SW 1/4 of section 13.

40.015 The center W 1/16 section corner of section 13.

N. 0°01.6' W., on the N - S center line of the NW 1/4 of section 13.

40.030 The W 1/16 section corner of sections 12 and 13.

The Subdivision of Section 24,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 24 and 25.

N. 0°03.0' W., on the N - S center line of section 24.

40.022 The center 1/4 section corner of section 24, monumented with a 1 inch diam., iron rod, 24 ins. long, with a 2 ins. diam., aluminum cap attached and marked:

ENG. ASSOC. INC.
CENTER
SEC.
T43S R15W
1973

This monument is accepted as a faithful determination of the center 1/4 section corner position, and is accepted as such.

At the corner point.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 24,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T43S R15W
C 1/4
S 24
1997

Deposit the rebar and aluminum cap inside the aluminum post.

Deposit a clear Deep-1 magnet at the base of the aluminum post.

The corner is set at the corner of fences, projecting S and E.

N. 0°03.5' W., beginning new measurement.

40.090 The 1/4 section corner of sections 13 and 24.

From the 1/4 section corner of 24 only, on the east boundary of the township, hereinbefore described.

S. 89°53.7' W., on the E - W center line of section 24.

39.994 The center 1/4 section corner of section 24.

S. 89°54.3' W., beginning new measurement.

19.988 Point for the center W 1/16 section corner of section 24.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with the aluminum cap marked:

C ——— W 1/16 ——— C
 S24
 1997

Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls 12 ft. E of the center of a dirt road, 8 ft. wide, bears E and W.

39.976 The 1/4 section corner of sections 23 and 24.

From the center W 1/16 section corner of section 24.

N. 0°02.7' W., on the N - S center line of the NW 1/4 of section 24.

THE SUBDIVISION OF SECTION 24,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS
40.107


The W 1/16 section corner of sections 13 and 24.

Metes and Bounds Survey in Section 24,
T. 43 S., R. 15 W., Salt Lake Meridian, Utah

The metes and bounds boundary for the following courses was determined by running a line parallel to, and approximately 33 ft. offset from the center line of an existing county road, as near as could be determined on tangent courses, and with the least amount of corner points.

From the point selected for Angle Point No. 1 on the east boundary of section 24, hereinbefore described.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:




Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 16°29.5' W., on line 1 - 2.

2.114 Point selected for Angle Point No. 2.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:



Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.


METES AND BOUNDS SURVEY IN SECTION 24,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 18°43.4' W., on line 2 - 3.

3.344 Point selected for Angle Point No. 3.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:




Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 26°18.6' W., on line 3 - 4.

1.576 Point selected for Angle Point No. 4.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:




Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 33°41.0' W., on line 4 - 5.

2.831 Point selected for Angle Point No. 5.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:



METES AND BOUNDS SURVEY IN SECTION 24,
T. 43 S., R. 15 W., SALT LAKE MERIDIAN, UTAH

CHAINS


Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

N. 25°54.9' W., on line 5 - 6.

2.404 Point selected for Angle Point No. 6.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:



Deposit a clear Deep-1 magnet at the base of the aluminum post.


Set a steel fence post alongside the aluminum post.

N. 19°31.6' W., on line 6 - 7.

24.551 The point selected for Angle Point No. 7, on the line between sections 13 and 24.

At the corner point.

Set an aluminum post, 30 ins., long, 2 1/2 ins. diam., 24 ins. in the ground, with the aluminum cap marked:



Deposit a clear Deep-1 magnet at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Shane L. Chamberlin	Survey Aid

CERTIFICATE OF SURVEY

I, *Larry V. Judd, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *6th day of October, 1997*, I have *dependently resurveyed portions of the east and north boundaries, a portion of the subdivisional lines, the subdivision of sections 1, 12, 13, and 24, and a metes and bounds survey in section 24, of Township 43 South, Range 15 West,*

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

1/30/98

Date

Larry V. Judd

(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of portions of the east and north boundaries, a portion of the subdivisional lines, the subdivision of sections 1, 12, 13, and 24, and a metes and bounds survey in section 24, of Township 43 South, Range 15 West, Salt Lake Meridian, Utah,*

executed by *Larry V. Judd, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

March 18, 1998

Date

Daniel W. Webb

(Chief Cadastral Surveyor for Utah)