

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

SECTIONS 15, 16, 17, 20, 21, AND 22

AND THE

SUBDIVISIONAL LINES OF

SECTION 15, 16, 17, 20, 21, AND 22

AND THE

SEGREGATION OF HANKSVILLE TOWNSITE

WITHIN THE

NORTH-EAST ONE QUARTER, OF THE SOUTH-EAST ONE QUARTER

OF SECTION 16

TOWNSHIP 28 SOUTH, RANGE 11 EAST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Frank C. Profaizer
Cadastral Surveyor

Under **Special Instructions** dated **August 20, 1998**, which provided for the surveys included **Group Number 880**, approved **August 20, 1998** and **Assignment Instructions** dated **August 20, 1998**.

Investigation Retracement Commenced, December 10, 1996
Dependent Resurvey Commenced, August 26, 1998
Dependent Resurvey Completed, November 9, 2001

INDEX DIAGRAM

Township 28 South , Range 11 East

6	5	4	3	2	1
7	8	9	10	11	12
	23 24	18 19	12 13	5	
18	23 17	17 16	11 15	5 14	13
	21 22	15 16	8 10	4	
19	21 20	15 21	7 22	3 23	24
	20 19	14 13	6 6	3	
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 15.....Page 25
 The Subdivision of Section 16.....Page 36
 The Subdivision of Section 17.....Page 40
 The Subdivision of Section 20.....Page 44
 The Subdivision of Section 21.....Page 45
 The Subdivision of Section 22.....Page 61
 The Resurvey of the Hanksville TownsitePage 63
 The Land Description Correction for Parcels within the Townsite..Page 88

CENTER STREET	GEODETTIC	N. 00° 16' 53" E. &	S. 00° 16' 53" W.
	GRID	N. 00° 12' 00" W. &	S. 00° 12' 00" E.
MAIN STREET	GEODETTIC	S. 89° 43' 08" E. &	N. 89° 43' 08" W.
	GRID	N. 89° 48' 00" E. &	S. 89° 48' 00" W.

This is in relation to State Plane Coordinate System of 1983, based on the North American Datum of 1983, and International Feet / Meters (1 Meter = 3.280839895 Feet), and a project Elevation of 4300 feet above mean sea level.

The **Geographic Coordinates** of the **TOWNSITE INITIAL POINT** is as follows:

LATITUDE:	38° 22' 22.2055" North	NORTHING:	10,464,734.789
LONGITUDE:	110° 42' 52.5298" West	EASTING:	1,865,594.173
ELEVATION:	4300.00 FEET		

The directions of lines were determined by reference to true meridians established by the Global Positioning System, utilizing fast static survey techniques observed with Trimble 4000 model Global Positioning System equipment, based on the following information.

Geodetic Triangulation Control Stations:

DESIGNATION:	"HANKS"	NAD 83 (1986) U.S.G.S.	
LATITUDE:	38° 21' 47.69863"	NORTHING:	10,461,331.135
LONGITUDE:	110° 40' 45.29127"	EASTING:	1,875,757.585
ELEVATION:	4670.08 FEET		

DESIGNATION:	"L-112" (BEACON TOWER)	NAD 83 (1986) N.G.S.	
LATITUDE:	38° 24' 45.08058"	NORTHING:	10,479,226.986
LONGITUDE:	110° 41' 54.84895"	EASTING:	1,870,063.785
ELEVATION:	4430.11 FEET		

DESIGNATION:	"PINTO"	NAD 83 (Converted NAD 27 via NADCON)	
LATITUDE:	38° 23' 57.89090"	NORTHING:	10,474,318.059
LONGITUDE:	110° 45' 20.34460"	EASTING:	1,853,745.701
ELEVATION:	4747.01 FEET		

Geodetic Coordinates shown for TRI STATION "PINTO" have been converted using U.S. Army Corps of Engineers conversion software Corpscon ver. 5.11.08, from the published U.S.G.S., N.A.D., 1927 Coordinates: LATITUDE: 38° 23' 57.956" LONGITUDE: 110° 45' 17.800" ELEVATION: 4743.60 FEET

The geographic position of the **South-East Corner** of **Section 22**, of the Township as acquired by utilization of Global Positioning System and Trimble Navigational Receivers is based on the North American Datum of 1983.

LATITUDE:	38° 21' 08.5670"	NORTHING:	10,457,336.159
LONGITUDE:	110° 41' 37.9391"	EASTING:	1,871,598.501
ELEVATION:	4300.00 FEET		

The **Mean Magnetic Declination** as calculated by the "Compute Values of Earth's Magnetic Field Version 3.1" software from the Geomagnetic Data at NGDC is: **13° 38.2' E.**

DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.

CHAINS

DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20, 21 AND 22.
TOWNSHIP 28 SOUTH, RANGE 11 EAST, SALT LAKE MERIDIAN, UTAH

Restoring the Surveys Executed by Augustus Ferron 1883,
Craig Sylvester 1964, Jerry L. Thomas 1987

Beginning at the corner of sections 22, 23, 26, and 27, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E500N300** 38° 21' 08.5670"
Monumented (01). 110° 41' 37.9391"

(Record for the Original Survey of A.D. Ferron completed in 1883: Set Red Sandstone 16 x 12 x 10 inches, 12 inches in the ground for the corner to sections 22, 23, 26, and 27, marked 2 notches on South, and 2 notches on East edges. Dug pits 18 x 18 x 12 inches in each section quadrant, 5 ½ feet distance and raised a mound of earth 2 feet high, 4 ½ feet base alongside)

(Record for the Dependent Resurvey of C. P. Sylvester completed in 1966: The corner of sections 22, 23, 26, and 27, at proportionate distance; there is no remaining evidence of the original corner. Set an iron post, 30 inches long, 2 ½ inches diameter; 24 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, S22, S23, S26, S27, 1963)

From this corner the U. S. Geological **Survey Triangulation Station "HANKS"** bears **N. 46° 38' 48.5" E.**, on a forward bearing and **S. 46° 39' 21.2 W.**, on a back bearing with a chain distance of **87.3958**, at an average elevation of **4300** feet.

N. 00° 47' 19" E., between sections 22, and 23.

20.122 Point for the South 1/16 section corner, of sections 22 and 23.

Corner Point Identity: **E500N320** 38° 21' 21.6914"
Not Monumented (01). 110° 41' 37.7096"

40.244 The 1/4 section corner of sections 22 and 23, monumented with an Iron Post, 1 inch diameter, firmly set, projecting 8 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E500N340** 38° 21' 34.8158"
Monumented (02). 110° 41' 37.4803"

(Record for the Original Survey of A. D. Ferron completed in 1883: Set a Sandstone 15 x 6 x 4 inches, 10 inches in the ground, for 1/4 section corner, marked 1/4 on West face. Dug pits 15 x 15 x 12 inches North and South of stone, 5 ½ feet distance and raised a mound of stone 1 ½ feet high, 3 ¾ feet base along side.)

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

(Record for the Dependent Resurvey of C. P. Sylvester completed in 1966: *Point for the 1/4 section corner of sections 22 and 23, at proportionate distance, there is no remaining evidence of the original corner. Set an iron post, 36 inches long, 2 1/2 inch diameter, 28 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, 1/4 S22, S23, 1963*)

N. 00° 46' 13" E., beginning new measurement.

20.122 Point for the North 1/16 section corner, of sections 14 and 15.

Corner Point Identity: **E500N360** **38° 21' 47.9404"**
Not Monumented (02). **110° 41' 37.2561"**

40.244 The corner of sections 14, 15, 22, and 23, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 2 ins. above ground, with brass cap marked, as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E500N400** **38° 22' 01.0649"**
Monumented (03). **110° 41' 37.0320"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: *Set Sandstone 24 x 6 x 6 inches 18 inches in the ground for the corner to sections 14, 15, 22, and 23, marked with 3 notches on South and 2 Notches on East edges, dug pits 18 x 18 x 12 inches in each section quadrant, 5 ½ feet distance and raised a mound of earth 2 feet high, 4 ½ feet base alongside.*)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: *The corner of sections 14, 15, 22 and 23, marked by a granite stone 12 x 12 x 16 ins. plainly marked 3 notches on South and 2 notches on East face. Deposit original stone alongside iron post, and raise a mound of stone 2 ½ feet base, 2 ½ feet high West of corner.*)

From the corner of sections 14, 15, 22, and 23.

Corner Point Identity: **E500N400** **38° 22' 01.0649"**
Heretofore Described. **110° 41' 37.0320"**

N 00° 25' 00" W., between sections 14 and 15.

20.335 Point for the South 1/16 section corner of sections 14 and 15.

Corner Point Identity: **E500N420** **38° 22' 14.3286"**
New Monument (01). **110° 41' 37.1545"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter 24 inches in the ground, with brass cap marked.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

**T 28 S R 11 E
S 1/16
S 15 | S 14
1999**

- 40.670** The 1/4 section corner of sections 14 and 15, monumented with an Iron Post, 1 inch diameter, firmly set, projecting 8 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E500N440** **38° 22' 27.5923"**
Monumented (04). **110° 41' 37.2771"**

(Record for the Original Survey of A. D. Ferron completed in 1883: Set a slate rock 12 x 10 x 3 inches 8 inches in the ground for 1/4 section corner marked 1/4 on West face and raised a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester completed in 1966: Point for the 1/4 section corner of sections 14, and 15, at proportionate distance, there is no remaining evidence of the original corner. Set an iron post 36 inches long, 1 inch diameter, 28 inches in the ground, with brass cap marked T28S, R11E, 1/4 S14, S15, 1963.)

N. 00° 23' 17" W., beginning new measurement.

- 20.362** Point for the North 1/16 section corner, of sections 14 and 15.

Corner Point Identity: **E500N460** **38° 22' 40.8737"**
New Monument (02). **110° 41' 37.3914"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter 24 inches in the ground, with brass cap marked.

**T 28 S R 11 E
N 1/16
S 15 | S 14
1999**

- 40.724** The corner of sections 10, 11, 14, and 15, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E500N500** **38° 22' 54.1550"**
Monumented (05). **110° 41' 37.5057"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a trachyte 12 x 12 x 8 inches 8 inches in the ground for the corner of section 10, 11, 14, and 15, marked 4 notches on South and 2 notches on East edges, raised a stone mound alongside.)

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

- 40.412** The corner of section 21, 22, 27, and 28, monumented with an Iron Post, 2 1/2 inches diameter, firmly set, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E400N300** **38° 21' 09.7854"**
Monumented (07). **110° 42' 44.8996"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a gray sandstone 12 x 12 x 3 inches 8 inches in the ground for the corner to sections 21, 22, 27, and 28, marked with 2 notches on South and 3 notches on East edges. Dug pits 18 x 18 x 12 ins. 5 1/2 feet distance and, raised a mound of earth 2 1/2 feet high and 4 1/2 feet base alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: The corner of sections 21, 22, 27, and 28, marked by a sandstone 4 x 14 x 20 inches Plainly marked, 2 notches on South, 3 notches on East face. Set an iron post 36 inches long, 2 1/2 inches diameter, 28 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, S21, S22, S27 and S28 1963. Deposit original stone alongside iron post.)

From the corner of sections 21, 22, 27, and 28.

Corner Point Identity: **E400N300** **38° 21' 09.7854"**
Heretofore Described. **110° 42' 44.8996"**

N. 01° 27' 49" E., between sections 21 and 22.

- 19.632** Point for the South 1/16 section corner, of sections 21 and 22.

Corner Point Identity: **E400N320** **38° 21' 22.5872"**
Not Monumented (05). **110° 42' 44.4842"**

- 39.264** The 1/4 section corner of sections 21 and 22, monumented with an Iron Post, 2 1/2 inches diameter, firmly set, projecting 6 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E400N340** **38° 21' 35.3890"**
Monumented (08). **110° 42' 44.0688"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 14 x 12 x 6 inches 10 inches in the ground for 1/4 section corner marked 1/4 on West face and raised a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 21 and 22, at proportionate distance: there is no remaining evidence of the original corner. Set an iron post 30 inches long, 2 1/2 inch diameter, 24 inches in the ground, with brass cap marked T28S, R11E, 1/4 S21, S22, 1963.)

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

S. 89° 55' 21" W., between sections 15 and 22.

19.952 Point for the East 1/16 section corner, of sections 15 and 22.

Corner Point Identity: **E460N400** 38° 22' 01.0473"
New Monument (03). 110° 41' 53.5629"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T 28 S R 11 E
 S 15
E 1/16 -----
 S 22
 2001

29.928 Point for the West, East 1/64 section corner, of sections 15, and 22.

Corner Point Identity: **E450N400** 38° 22' 01.0385"
New Monument (04). 110° 42' 01.8284"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T 28 S R 11 E
 S 15
W E 1/64 -----
 S 22
 1999

31.734 Point for the Witness Point at the Right-of-Way on the East side of **Highway Number 95**, at Station **114+95.10**

Corner Point Identity: **E447N400** 38° 22' 01.0369"
New Monument (05). 110° 42' 03.3248"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked

W P R W
T28S R11E
 S 15

 S 22
 1999

34.921 Point for the Witness Point to the Center Line of **Highway Number 95**, at Station **114+30.00**

Corner Point Identity: **E445N400** 38° 22' 01.0341"
Marked (01). 110° 42' 05.9651"

At the Witness Point, Set a PK Nail, with surface of asphalt road.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

38.108 Point for the Witness Point at the Right-of-Way on the West side of **Highway Number 95**, at Station **113+64.90**.

Corner Point Identity: **E442N400** 38° 22' 01.0313"
New Monument (06). 110° 42' 08.6052"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked

**W P R W
T28S R11E
S 15**

**S 22
1999**

39.904 The 1/4 section corner of sections 15 and 22, monumented with an Iron Post, 1 inch diameter firmly set, projecting 8 inches above ground, with brass cap, marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E440N400** 38° 22' 01.0297"
Monumented (11). 110° 42' 10.0938"

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 20 x 10 x 3 inches 15 inches in the ground for 1/4 section corner marked 1/4 on North face. Dug pits 18 x 18 x 12 ins. East and West of stone 5 ½ feet distance and raise a mound of earth 1 ½ feet high, 3 ½ feet base. alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 15 and 22, at proportionate distance; there is no remaining evidence of the original corner. Set an iron post 36 inches long, 1 inch diameter, 28 inches in the ground, with brass cap marked T28S, R11E, 1/4 S15, S22, 1964.)

S. 89° 52' 53" W., beginning new measurement.

20.004 Point for the West 1/16 section corner, of sections 15 and 22.

Corner Point Identity: **E420N400** 38° 22' 01.0027"
Not Monumented (07). 110° 42' 26.6674"

40.008 The corner of sections 15, 16, 21, and 22.

Corner Point Identity: **E400N400** 38° 22' 00.9757"
Heretofore Described. 110° 42' 43.2409"

From the corner of sections 15, 16, 21, and 22.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

Corner Point Identity: **E400N400** **38° 22' 00.9757"**
Heretofore Described. **110° 42' 43.2409"**

N. 01° 16' 38" W., (N. 01° 45' 40" W.), between sections 15 and 16.

20.442 Point for the South 1/16 sections corner, of sections 15 and 16.
(1349.17 IF)

Corner Point Identity: **E400N420** **38° 22' 14.3063"**
New Monument (07). **110° 42' 43.6186"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter 30 inches in the ground, with brass cap marked.

T 28 S R 11 E
S 1/16
S 16 | S 15
1999

32.504 Point for the **Witness Point HT-01**, at the Intersection with the
(2145.23 IF) projected **Center Line** of **Main Street**, within the Townsite
of Hanksville.

Corner Point Identity: **E400N432** **38° 22' 22.1719"**
Not Monumented (08). **110° 42' 43.8415"**

From this point the **Initial Point** for the Townsite of Hanksville Utah, bears **S. 89° 48' 00" W.**, on a **Grid** bearing, for **10.486** chains distance, which is also the point of intersection for **Center Line** of **Main Street** and **Center Line** of **Center Street**.

Corner Point Identity: **E376N432** **38° 22' 22.2055"**
Marked (02). **110° 42' 52.5298"**

At the **Initial Point**, Set a PK Nail, with surface of asphalt road.

40.884 True corner point for the 1/4 section corner of sections 15 and
(2698.34 IF) 16, at proportionate distance, falls on East edge of Bull Creek Wash, 1.63 chains wide, draining North, where it is impracticable to establish a permanent monument, there is no remaining evidence of the original corner.

Corner Point Identity: **E400N440** **38° 22' 27.6370"**
Not Monumented (09). **110° 42' 43.9963"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a post 3 feet long, 3 inches square with charred stake, 12 inches in the ground for 1/4 section corner marked 1/4 on West face and dug pits 18 x 18 x 12 inches North and South of post, 5 ½ feet distance and raise a mound of earth 1 ½ feet high, 3 ½ feet base around it.)

42.884 The Witness Corner to the 1/4 section corner of sections 15 and 16, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

- 40.618** Point for the 1/4 section corner, of sections 10 and 15, at proportionate distance; there is no remaining evidence of the Iron Post, set in 1966 Dependent Resurvey.

Corner Point Identity: **E440N500** **38° 22' 54.2440"**
New Monument (08). **110° 42' 11.1655"**

(Record for the Original Survey of A. D. Ferron, completed in 1887: Set a sandstone 11 x 10 x 2 inches, 7 inches in the ground for 1/4 section corner marked 1/4 on North face, dug pits 18 x 18 x 12 inches East and West of stone 5 1/2 feet distance and raise a mound of earth 1 1/4 feet high 3 1/4 feet base alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 10 and 15, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 30 inches long, 2 1/2 inches diameter 24 inches in the ground, with brass cap marked, T28S, R11E, 1/4 S10, S15, 1964.)

Set a Stainless Steel Post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with brass cap marked.

T 28 S R 11 E
S 10
 1/4 -----
S 15
1999

- 60.927** Point for the West 1/16 section corner, of sections 10 and 15.

Corner Point Identity: **E420N500** **38° 22' 54.2885"**
Not Monumented (12). **110° 42' 27.9955"**

- 81.236** The corner of sections 9, 10, 15, and 16.

Corner Point Identity: **E400N500** **38° 22' 54.3330"**
Heretofore Described. **110° 42' 44.8254"**

From the corner of sections 21, 22, 27, and 28.

Corner Point Identity: **E400N300** **38° 21' 09.7854"**
Heretofore Described. **110° 42' 44.8996"**

S. 89° 29' 13" W., between sections 21 and 28.

- 20.171** Point for the East 1/16 section corner, of sections 21 and 28.

Corner Point Identity: **E360N300** **38° 21' 09.6676"**
Not Monumented (13). **110° 43' 01.6076"**

- 40.342** The 1/4 section corner, of sections 21 and 28, monumented with an Iron Post, 1 inch, diameter, firmly set, projecting 16 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

Corner Point Identity: **E340N300** **38° 21' 09.5498"**
Monumented (14). **110° 43' 18.3156"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a post 3 feet long, 3 inches square with charred stake 12 inches in the ground for 1/4 section corner marked 1/4 on North face, dug pits 18 x 12 x 12 inches East and West of post 5 1/2 feet distance and raise a mound of earth 1 1/2 feet high 3 1/2 feet base around it.)

(Record for the Dependent Resurvey of C. P. Sylvester in 1966: Point for the 1/4 section corner of sections 21 and 28 at proportionate distance; there is no remaining evidence of original corner. Set an iron post 36 inches long, 1 inch diameter 30 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, 1/4, S21, S28, 1964.)

S. 89° 27' 06" W., beginning new measurement.

20.245 Point for the West 1/16 section corner, of sections 21 and 28.

Corner Point Identity: **E320N300** **38° 21' 09.4234"**
Not Monumented (14). **110° 43' 35.0849"**

40.490 The corner of sections 20, 21, 28, and 29, monumented with a 1 inch T-Iron Rod, projecting 5 inches above ground, as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N300** **38° 21' 09.2970"**
Marked (03). **110° 43' 51.8542"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: On top of ledge perpendicular 40 feet high bears North and South on East side of head of gulch draining South-East. Set a sandstone 16 x 7 x 6 inches, 12 inches in the ground for corner to sections 20, 21, 28, and 29. marked with 2 notches on South and 4 notches on the East edges and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: The corner of sections 20, 21, 28, and 29, marked by a sandstone 14 x 8 x 4 inches, plainly marked 2 notches on South and 4 notches on East face. This position falls on small gypsum ledge and cannot be safely monumented with regulation iron post. At the corner point set 1 inch T-iron peg, 24 inches long 18 ins in the ground from which its witness corner bears N. 0° 55' E., 0.50 chains dist., reset the original stone alongside the iron peg.)

From the corner of sections 20, 21, 28, and 29.

Corner Point Identity: **E300N300** **38° 21' 09.2970"**
Heretofore Described. **110° 43' 51.8542"**

N. 00° 55' 54" E., between sections 20 and 21.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

- 00.500** The **Witness Corner**, for sections 20, 21, 28, and 29, monumented with an Iron Post, 2 ½ inches diameter, firmly set projecting 6 inches above ground and encircled by a mound of stone 3 feet base, to top of brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N303** **38° 21' 09.6231"**
Monumented (15). **110° 43' 51.8474"**

- 20.241** Point for the South 1/16 section corner, of sections 20 and 21.

Corner Point Identity: **E300N320** **38° 21' 22.4980"**
Not Monumented (15). **110° 43' 51.5816"**

- 40.482** The 1/4 section corner, of sections 20 and 21, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N340** **38° 21' 35.6991"**
Monumented (16). **110° 43' 51.3090"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: At 37.25 chains on edge of perpendicular breaks bears North-East and South-West. Set a sandstone 24 x 7 x 4 ins. 18 inches in the ground for Witness Corner marked 1/4 W C on North face and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 20 and 21, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with brass cap marked T28S, R11E, 1/4 S20, S21, 1963. Raise a mound of stone, 3 feet base, 2 ½ ins. high, West of corner.)

- 60.728** Point for the North 1/16 section corner, of sections 20, and 21.

Corner Point Identity: **E300N360** **38° 21' 48.9035"**
Not Monumented (16). **110° 43' 51.0362"**

- 80.974** The corner of sections 16, 17, 20, and 21, monumented with an Iron Post, 2 ½ inches diameter, firmly set projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N400** **38° 22' 02.1080"**
Monumented (17). **110° 43' 50.7634"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 14 x 12 x 3 inches, 10 inches in the ground for corner to sections 16, 17, 20, and 21, marked with 3 notches on South and 4 notches on East edges and raise a stone mound along side.)

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 16 and 21, at proportionate ; there is no remaining evidence of the original corner. Set an iron post, 30 inches long, 2 1/2 inches diameter 24 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, 1/4, S16, S21, 1964.)

N. 88° 46' 25" W., beginning new measurement.

20.345 Point for the West 1/16 section corner, of section 16 and 21.
Corner Point Identity: **E320N400** 38° 22' 01.8239"
Not Monumented (19). 110° 43' 33.9112"

40.690 The corner of sections 16, 17, 20, and 21.

Corner Point Identity: **E300N400** 38° 22' 02.1080"
Heretofore Described. 110° 43' 50.7634"

From the corner of sections 16, 17, 20, and 21.

Corner Point Identity: **E300N400** 38° 22' 02.1080"
Heretofore Described. 110° 43' 50.7634"

N. 00° 59' 37" W., between sections 16, and 17.

20.243 Point for the South 1/16 section corner, of sections 16 and 17.

Corner Point Identity: **E300N420** 38° 22' 15.3101"
Not Monumented (20). 110° 43' 51.0542"

40.486 Point for the 1/4 section corner, of sections 16, and 17, at proportionate distance falls in Fremont River, 4.60 chains wide, draining North-East, where it is impracticable to establish a permanent monument, there is no remaining evidence of the original corner.

Corner Point Identity: **E300N440** 38° 22' 28.5121"
Not Monumented (21). 110° 43' 51.3451"

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 18 x 8 x 3 inches and 12 inches in the ground for 1/4 section corner, marked 1/4 on West face, dug pits 18 x 18 x 12 inches, North and South of stone, 5 1/2 feet distance and raise a mound of earth 1 1/2 feet high 3 1/2 feet base alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: At 40.47 chains, Point for the 1/4 section corner of sections 16 and 17, at proportionate distance: there is no remaining evidence of the original corner. Set an iron post, 36 inches long, 1 inch diameter, 26 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, 1/4, S16, S17, 1964.)

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

- 41.486** The **Witness Corner**, to the 1/4 section corner of sections 16, and 17, monumented with an Iron Post, 1 inch diameter, firmly set, projecting 14 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N443** **38° 22' 29.1644"**
Monumented (20). **110° 43' 51.3594"**

N. 01° 00' 27" W., beginning new measurement.

- 19.226** Point for the North 1/16 section corner, of sections 16 and 17.

Corner Point Identity: **E300N460** **38° 22' 41.7034"**
New Monument (09). **110° 43' 51.6396"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T 28 S R 11 E
N 1/16
S 17 | S 16
1999

- 39.452** The corner of sections 8, 9, 16, and 17, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E300N500** **38° 22' 54.8947"**
Monumented (21). **110° 43' 51.9342"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: *On South slope, Set a gypsum 18 x 12 x 3 inches, 12 inches in the ground for corner to sections 8, 9, 16, and 17, marked with 4 notches on South and 4 notches on East edges, and raise a stone mound alongside.*)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: *Point for the corner of sections 8, 9, 16, and 17, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 30 inches long, 2 ½ inches diameter 22 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, S8, S9, S16, S17, 1963. Corner falls on steep South slope of small gypsum hill.*)

From the corner of sections 9, 10, 15, and 16.

Corner Point Identity: **E400N500** **38° 22' 54.3330"**
Heretofore Described. **110° 42' 44.8254"**

N. 89° 21' 10" W., between sections 9, and 16.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

20.242 Point for the East 1/16 section corner, of sections 9, and 16.

Corner Point Identity: **E360N500** **38° 22' 54.4822"**
Not Monumented (22). **110° 43' 01.5990"**

40.484 The 1/4 section corner, of sections 9 and 16, monumented with an Iron Post, 1 inch diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E340N500** **38° 22' 54.6313"**
Monumented (22). **110° 43' 18.3726"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a slate 18 x 8 x 4 inches, 12 inches in the ground for 1/4 section corner marked 1/4 on North face and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 9 and 16, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 36 inches long, 1 inch diameter, 30 inches in the ground, in a collar of stone, with brass cap marked T28S, R11E, 1/4, S9, S16, 1964.)

N. 89° 25' 44" W., beginning new measurement.

20.251 Point for the West 1/16 section corner, of sections 9, and 16.

Corner Point Identity: **E320N500** **38° 22' 54.7630"**
Not Monumented (23). **110° 43' 35.1534"**

40.502 The corner of sections 8, 9, 16, and 17.

Corner Point Identity: **E300N500** **38° 22' 54.8947"**
Heretofore Described. **110° 43' 51.9342"**

From the corner of sections 20, 21, 28, and 29.

Corner Point Identity: **E300N300** **38° 21' 09.2970"**
Heretofore Described. **110° 43' 51.8542"**

N. 88° 55' 30" W., between sections 20 and 29.

20.591 Point for the East 1/16 section corner, of sections 20 and 29.

Corner Point Identity: **E260N300** **38° 21' 09.5177"**
Not Monumented (24). **110° 44' 08.8747"**

41.182 The 1/4 section corner, of sections 20 and 29, monumented with an Iron Post, 1 inch diameter, firmly set, projecting 8 inches above ground, with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

- 40.434** The 1/4 section corner, of section 19 and 20, monumented with Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E200N340** **38° 21' 36.5171"**
Monumented (25). **110° 45' 00.4946"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a *gypsum* 30 x 8 x 3 inches, 20 inches in the ground for 1/4 section corner, marked 1/4 on West face and raised a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester completed in 1966: The 1/4 section corner of sections 19 and 20, marked by a limestone in small mound of stones, faintly marked 1/4 the original record describes this as a gypsum rock. At the corner point set an iron post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground in a collar of stone, with brass cap marked T28S, R11E, 1/4 S19, S20, 1963.)

N. 03° 54' 22" E., beginning new measurement.

- 19.623** Point for the North 1/16 section corner, of sections 19 and 20.

Corner Point Identity: **E200N360** **38° 21' 49.3667"**
Not Monumented (27). **110° 44' 59.4172"**

- 39.246** The corner of sections 17, 18, 19, and 20, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1963 Dependent Resurvey.

Corner Point Identity: **E200N400** **38° 22' 02.2162"**
Monumented (26). **110° 44' 58.3398"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set sandstone 20 x 8 x 4 inches, 14 inches in the ground for corner to sections 17, 18, 19, and 20, marked 3 notches on South and 5 notches on East edges and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the corner of sections 17, 18, 19, and 20, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 30 inches long, 2 ½ inches diameter and 24 inches in the ground, in collar of stone, with brass cap marked T28S, R11E, S17, S18, S19, S20, 1964.)

From the corner of sections 16, 17, 20, and 21.

Corner Point Identity: **E300N400** **38° 22' 02.1080"**
Heretofore Described. **110° 43' 50.7634"**

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

N. 89° 39' 55" W., between sections 17, and 20.

20.402 Point for the East 1/16 section corner, of sections 17, and 20.

Corner Point Identity: **E260N400** 38° 22' 02.1857"
Not Monumented (28). 110° 44' 07.6668"

40.804 The 1/4 section corner, of sections 17, and 20, monumented with an Iron Post, 2 ½ inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E240N400** 38° 22' 02.2635"
Monumented (27). 110° 44' 24.5702"

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 16 x 10 x 4 inches, 12 inches in the ground for 1/4 section corner marked 1/4 on North face and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: Point for the 1/4 section corner of sections 17, and 20, at proportionate distance; there is no remaining evidence of original corner. Set an iron post, 36 inches long, 2 ½ inches diameter, 28 inches in the ground, in a collar of stone with brass cap marked T28S, R11E, 1/4, S17, S20, 1964.)

S. 89° 53' 53" W., beginning new measurement.

20.380 Point for the West 1/16 section corner, of sections 17 and 20.

Corner Point Identity: **E220N400** 38° 22' 02.2399"
New Monument (10). 110° 44' 41.4550"

Set a Stainless Steel Post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with brass cap marked.

T 28 S R 11 E
 S 17
W 1/16 -----
 S 20
 1999

40.760 The corner of sections 17, 18, 19, and 20.

Corner Point Identity: **E200N400** 38° 22' 02.2162"
Heretofore Described. 110° 44' 58.3398"

From the corner of sections 17, 18, 19, and 20.

Corner Point Identity: **E200N400** 38° 22' 02.2162"
Heretofore Described. 110° 44' 58.3398"

**DEPENDENT RESURVEY OF SECTIONS 15, 16, 17, 20,
21 AND 22, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

CHAINS

N. 01° 07' 47" W., between sections 17 and 18.

19.875 Point for the South 1/16 section corner, of sections 17 and 18.

Corner Point Identity: **E200N420** **38° 22' 15.1778"**
Not Monumented (29). **110° 44' 58.6645"**

39.750 The 1/4 section corner, of sections 17 and 18, monumented with an Iron Post, 2 1/2 inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E200N440** **38° 22' 28.1394"**
Monumented (28). **110° 44' 58.9892"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 28 x 14 x 3 inches, 24 inches in the ground for 1/4 section corner marked 1/4 on West face and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: The 1/4 section corner of sections 17 and 18, marked with a granite stone 5 x 5 x 6 inches, set in a mound of stone, no visible marks. Topography fits calls of original survey. It is accepted as the best remaining evidence of the original survey. At the corner point set an iron post, 30 inches long, 2 1/2 inches diameter on solid sandstone, over an X, in mound of stone, 4 feet base, 2 feet high, with brass cap marked T28S, R11E, 1/4, S17, S18, 1963.)

N. 00° 02' 56" E., beginning new measurement.

20.171 Point for the North 1/16 section corner, of sections 17 and 18.

Corner Point Identity: **E200N460** **38° 22' 41.2967"**
Not Monumented (30). **110° 44' 58.9750"**

40.342 The corner of sections 7, 8, 17 and 18, monumented with an Iron Post, 2 1/2 inches diameter, firmly set, projecting 6 inches above ground with brass cap marked as described in the official record of the 1966 Dependent Resurvey.

Corner Point Identity: **E200N500** **38° 22' 54.4540"**
Monumented (29). **110° 44' 58.9607"**

(Record for the Original Survey of A. D. Ferron, completed in 1883: Set a sandstone 30 x 20 x 15 inches, 24 inches in the ground for corner to sections 7, 8, 17, and 18, marked 4 notches on South and 5 notches on East edges and raise a stone mound alongside.)

(Record for the Dependent Resurvey of C. P. Sylvester, completed in 1966: The corner of sections 7, 8, 17, and 18, marked by a

**SURVEY OF THE SUBDIVISION LINES OF SECTION 15,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

(Record for the Dependent Resurvey of C. P. Sylvester in 1966:
Point for the 1/4 section corner of sections 8 and 17, at
proportionate distance. There is no remaining evidence of
original corner, falls on inaccessible ledges and cannot be
monumented.)

60.663 Point for the West 1/16 section corner, of sections 8 and 17.

Corner Point Identity: **E220N500** **38° 22' 54.5642"**
Not Monumented (33). **110° 44' 42.2041"**

80.884 The corner of sections 7, 8, 17, and 18.

Corner Point Identity: **E200N500** **38° 22' 54.4540"**
Heretofore Described. **110° 44' 58.9607"**

**SURVEY OF THE SUBDIVISION LINES OF SECTION 15,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

From the 1/4 section corner of sections 15 and 22.

Corner Point Identity: **E440N400** **38° 22' 01.0297"**
Heretofore Described. **110° 42' 10.0938"**

N. 00° 54' 30" W., on the North-South center line of section 15.

05.781 Point for the Reference Monument, at the intersection with the 200
foot Right-of-Way, on the West side of Highway Number 95, at
station **109+63.80** and on North-South center line of section 15.

Corner Point Identity: **E440N406** **38° 22' 04.7998"**
New Monument (11). **110° 42' 10.1698"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

**R M R W
T28S R11E
E440 N406
S 15
1999**

10.191 Point for the Center-South, South 1/64 section corner, of section
15.

Corner Point Identity: **E440N410** **38° 22' 07.6761"**
New Monument (12). **110° 42' 10.2277"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

**SURVEY OF THE SUBDIVISION LINES OF SECTION 15,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

T28S R11E

C S S

1/64

S 15

1999

- 13.470** Point for the Witness Point, at the intersection with the 50 foot Right-of-Way on the West side of Highway Number 95, at station **104+78.90**.

Corner Point Identity: **E440N413** **38° 22' 09.8147"**
New Monument (13). **110° 42' 10.2708"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

W P R W

T28S R11E

E440 N413

S 15

1999

- 16.032** Point for the Witness Point, at the intersection with the center line of Highway Number 95, at station **103+17.40** and on the North-South center line of section 15.

Corner Point Identity: **E440N416** **38° 22' 11.4860"**
Marked (04). **110° 42' 10.3045"**

At the Witness Point, Set a PK Nail, with surface of asphalt road.

- 20.382** Point for the Center-South 1/16 section corner, of section 15.

Corner Point Identity: **E440N420** **38° 22' 14.3225"**
New Monument (14). **110° 42' 10.3615"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E

C

S 1/16 | S 15

C

2001

From this point the **Center Line** of **Highway Number 95**, at station **100+15.50** bears **S. 89° 58' 00" W.**, **1.352** chains distance.

From this point a **Artesian Well**, 5 inches in diameter, projecting 3 feet above ground, bears **N. 16° 43' 14" W.**, **3.231** chains distance.

- 26.284** Point for the Witness Point, at the intersection with the 200 foot Right-of-Way, on the East side of Highway Number 95, at station **096+71.00**, and the North South center line of section 15.

SURVEY OF THE SUBDIVISION LINES OF SECTION 15,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner Point Identity: **E440N426** 38° 22' 18.1722"
New Monument (15). 110° 42' 10.4391"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

W P R W
T28S R11E
E440 N426
S 15
1999

30.573 Point for the Center-North, South 1/64 section corner, of section 15.

Corner Point Identity: **E440N430** 38° 22' 20.9689"
New Monument (16). 110° 42' 10.4954"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

T28S R11E
C N S
1/64
S 15
2001

40.764 Point for the Center 1/4 section corner, of section 15, at
intersection with the East-West center line.

Corner Point Identity: **E440N440** 38° 22' 27.6153"
New Monument (17). 110° 42' 10.6292"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

T28S R11E
C 1/4 S 15
1999

61.178 Point for the Center-North 1/16 section corner, of section 15.

Corner Point Identity: **E440N460** 38° 22' 40.9297"
Not Monumented (34). 110° 42' 10.8973"

81.592 The 1/4 section corner, of sections 10, and 15.

Corner Point Identity: **E440N500** 38° 22' 54.2440"
Heretofore Described. 110° 42' 11.1655"

From the 1/4 section corner, of sections 14, and 15.

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4
OF SECTION 15.

CHAINS

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4
OF SECTION 15.

From the East 1/16 section corner, of sections 15, and 22.

Corner Point Identity: **E460N400** **38° 22' 01.0473"**
Heretofore Described. **110° 41' 53.5629"**

N. 00° 39' 46" W., on the North-South center line, of the South-East 1/4, of section 15.

10.179 Point for the Center-South, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E460N410** **38° 22' 07.6865"**
New Monument (21). **110° 41' 53.6605"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E

C S S E

1/64

S 15

2001

20.358 Point for the South-East 1/16 section corner, of section 15, at the intersection with the East-West center line of the South-East 1/4 of section 15.

Corner Point Identity: **E460N420** **38° 22' 14.3258"**
New Monument (22). **110° 41' 53.7580"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E

S E

1/ 16

S 15

2001

30.537 Point for the Center-North, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E460N430** **38° 22' 20.9648"**
New Monument (23). **110° 41' 53.8555"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

31
SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4
OF SECTION 15.

CHAINS

T28S R11E
C N S E
1/64
S 15
1999

40.716 The Center-East 1/16 section corner, of section 15.

Corner Point Identity: E460N440	38° 22' 27.6038"
Heretofore Described.	110° 41' 53.9531"

From South 1/16 section corner, of sections 14, and 15.

Corner Point Identity: E500N420	38° 22' 14.3286"
Heretofore Described.	110° 41' 37.1545"

S. 89° 59' 12" W., on the East-West center line of the South-East 1/4, of section 15.

20.038 Point for the South-East 1/16 section corner of section 15.

Corner Point Identity: E460N420	38° 22' 14.3258"
Heretofore Described.	110° 41' 53.7580"

30.057 Point for the Center-West, South-East 1/64 section corner of section 15.

Corner Point Identity: E450N420	38° 22' 14.3242"
New Monument (24).	110° 42' 02.0597"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
C W S E
1/64
S 15
2001

38.242 Point for the Reference Monument, at the intersection with the 200 foot Right-of-Way, on the East side of Highway Number 95, at station **100+80.80** and on the East-West center line of the South-East 1/4, of section 15.

Corner Point Identity: E443N420	38° 22' 14.3229"
New Monument (25).	110° 42' 08.8412"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-WEST 1/4,
OF THE SOUTH-EAST 1/4, OF SECTION 15.

CHAINS

R M R W
T28S R11E
E443 N420
S 15
2001

40.076 The Center-South 1/16 section corner, of section 15.

Corner Point Identity: **E440N420** 38° 22' 14.3225"
Heretofore Described. 110° 42' 10.3615"

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-WEST 1/4,
OF THE SOUTH-EAST 1/4, OF SECTION 15.

From the West, East 1/64 section corner, of sections 15, and 22.

Corner Point Identity: **E450N400** 38° 22' 01.0385"
Heretofore Described. 110° 42' 01.8284"

N. 00° 47' 08" W., on the North-South center line of the South-West 1/4, of South-East 1/4, of section 15.

10.185 The South-West, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E450N410** 38° 22' 07.6814"
New Monument (26). 110° 42' 01.9441"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
S W S E
1/64
S 15
1999

20.370 The Center-West, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E450N420** 38° 22' 14.3242"
Heretofore Described. 110° 42' 02.0597"

From the Center-South, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E460N410** 38° 22' 07.6865"
Heretofore Described. 110° 41' 53.6605"

S. 89° 57' 16" W., on the East-West center line, of the South-West 1/4, of South-East 1/4, of section 15.

**THE EAST RIGHT-OF-WAY FOR HIGHWAY NUMBER 95,
WITHIN THE WEST 1/2, OF THE SOUTH-EAST 1/4,
OF SECTION 15.**

CHAINS

Set a Stainless Steel Post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with brass cap marked.

**T28S R11E
N W S E
1/64
S 15
2001**

- 20.370** The Center-West, East 1/64 section corner, of section 15, at the intersection with East-West center line of section 15.

Corner Point Identity: **E450N440** **38° 22' 27.6096"**
Heretofore Described. **110° 42' 02.2912"**

From the Center-North, South-East 1/64 section corner, of section 15.

Corner Point Identity: **E460N430** **38° 22' 20.9648"**
Heretofore Described. **110° 41' 53.8555"**

N. 89° 58' 56" W., on the East-West center line, of the North-West 1/4, of South-East 1/4, of section 15.

- 10.041** The North-West, South-East 1/64 section corner of section 15.

Corner Point Identity: **E450N430** **38° 22' 20.9670"**
Heretofore Described. **110° 42' 02.1754"**

- 20.082** The Center-North, South 1/64 section corner, of section 15.

Corner Point Identity: **E440N430** **38° 22' 20.9689"**
Heretofore Described. **110° 42' 10.4954"**

**THE EAST RIGHT-OF-WAY FOR HIGHWAY NUMBER 95,
WITHIN THE WEST 1/2, OF THE SOUTH-EAST 1/4,
OF SECTION 15.**

From the Witness Point, on the section line between sections 15 and 22, at the Intersection with the 200 foot Right-of-Way for Highway Number 95, at station **114+95.10** and

Corner Point Identity: **E447N400** **38° 22' 01.0369"**
Heretofore Described. **110° 42' 03.3248"**

N. 18° 06' 04" W., along the East side of Right-of-Way for Highway Number 95.

- 00.986** Point for the Witness Point, at right angle and 200 feet from center line of Highway 95, and intersection to Station **114+30.00**.

**THE EAST RIGHT-OF-WAY FOR HIGHWAY NUMBER 95,
WITHIN THE WEST 1/2, OF THE SOUTH-EAST 1/4,
OF SECTION 15.**

CHAINS

- | | | |
|---------------|---|--------------------------|
| | Corner Point Identity: E446N401 | 38° 22' 01.6482" |
| | Not Monumented (36). | 110° 42' 03.5788" |
| 08.050 | Point for the Witness Point, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station 109+63.80 . | |
| | Corner Point Identity: E445N406 | 38° 22' 06.0280" |
| | Not Monumented (37). | 110° 42' 05.3972" |
| 10.713 | Point for the Witness Point, on the East-West center line of the South-West 1/4, of South-East 1/4 of section 15, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station 107+88.00 . | |
| | Corner Point Identity: E447N410 | 38° 22' 07.6788" |
| | Heretofore Described. | 110° 42' 06.0824" |
| 15.396 | Point for the Witness Point, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at 104+78.90 . | |
| | Corner Point Identity: E444N413 | 38° 22' 10.5824" |
| | Not Monumented (38). | 110° 42' 07.2882" |
| 17.844 | Point for the Witness Point, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station 103+17.40 . | |
| | Corner Point Identity: E443N416 | 38° 22' 12.1002" |
| | Not Monumented (39). | 110° 42' 07.9184" |
| 21.429 | Point for the Reference Monument, on the East and West center line of the South-East 1/4 of section 15, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, and station 100+80.80 . | |
| | Corner Point Identity: E443N420 | 38° 22' 14.3229" |
| | Heretofore Described. | 110° 42' 08.8412" |
| 27.638 | Point for the Witness Point, at the intersection with the North-South center line of section 15, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station 096+71.00 . | |
| | Corner Point Identity: E440N426 | 38° 22' 18.1722" |
| | Heretofore Described. | 110° 42' 10.4391" |

THE WEST RIGHT-WAY FOR HIGHWAY NUMBER 95,
WITHIN THE SOUTH-WEST 1/4, OF THE SOUTH-EAST 1/4,
OF SECTION 15.

CHAINS

THE WEST RIGHT-OF-WAY FOR HIGHWAY NUMBER 95,
WITHIN THE SOUTH-WEST 1/4, OF THE SOUTH-EAST 1/4,
OF SECTION 15.

From the Witness Point, on the section line between sections 15 and 22, and the intersection with the center line of Highway Number 95, at station **114+30.00**.

Corner Point Identity: **E445N400** **38° 22' 01.0341"**
Heretofore Described. **110° 42' 05.9651"**

S. 71° 53' 56" W., on a Right Angle to the center line of Highway Number 95.

03.030 Point for the Witness Point, at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station **114+30.00**.

Corner Point Identity: **E443N397** **38° 22' 00.4200"**
Not Monumented (40). **110° 42' 08.3514"**

N. 18° 06' 04" W., beginning new measurement.

00.986 Point for the Witness Point, on the section line between sections 15 and 22, and at the intersection with the 200 foot Right-of-Way from center line of Highway Number 95, at station **113+64.90**.

Corner Point Identity: **E442N400** **38° 22' 01.0313"**
Heretofore Described. **110° 42' 08.6052"**

07.064 Point for the Reference Monument, at the intersection with the North-South center line of section 15, at the intersection with the 200 foot Highway Number 95, at station **109+63.80**.

Corner Point Identity: **E440N406** **38° 22' 04.7998"**
Heretofore Described. **110° 42' 10.1698"**

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 16,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

From the 1/4 section corner, of sections 16 and 21.

Corner Point Identity: **E340N400** **38° 22' 01.5399"**
Heretofore Described. **110° 43' 17.0591"**

N. 01° 06' 57" W., on the North-South center line of section 16.

20.345 Point for the Center-South 1/16 section corner, of section 16.

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 16,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

Corner Point Identity: **E340N420** **38° 22' 14.8078"**
New Monument (29). **110° 43' 17.3873"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
C
S 1/16 | S 16
C
1999

40.690 Point for the Center 1/4 section corner, of section 16, at intersection with the East-West center line of section 16.

Corner Point Identity: **E340N440** **38° 22' 28.0757"**
New Monument (30). **110° 43' 17.7156"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
C 1/4 S 16
1999

61.050 Point for the Center-North 1/16 section corner, of section 16.

Corner Point Identity: **E340N460** **38° 22' 41.3535"**
Not Monumented (41). **110° 43' 18.0441"**

81.410 The 1/4 section corner of sections 9, and 16.

Corner Point Identity: **E340N500** **38° 22' 54.6313"**
Heretofore Described. **110° 43' 18.3726"**

From the true point for the 1/4 section corner, of sections 15, and 16.

Corner Point Identity: **E400N440** **38° 22' 27.6370"**
Heretofore Described. **110° 42' 43.9963"**

N. 89° 03' 16" W., (N. 89° 32' W.), on the East-West center line, of section 16.

10.259 Point for the Witness Point **HT-02**, at the Intersection with **(677.07 IF)** the projected **Center Line** of **Center Street**, within the Townsite of Hanksville.

Corner Point Identity: **E376N440** **38° 22' 27.7477"**
Not Monumented (42). **110° 42' 52.4953"**

From this point the **Initial Point** for the Townsite of Hanksville, bears **S. 00° 12' 00" E.**, on a **Grid** bearing for a distance of **8.497** chains, which is also the point of intersection for **Main Street** and **Center Street**.

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4,
OF SECTION 16.

CHAINS

19.135 Point for the Witness Point at the Intersection with the projected
(1262.87 IF) center line of street 100 West, within the Townsite of Hanksville.

Corner Point Identity: **E364N440**
Heretofore Described.

20.350 Point for the Center-East 1/16 section corner, of section 16.
(1343.11 IF)

Corner Point Identity: **E360N440** 38° 22' 27.8563"
Marked (06). 110° 43' 00.8559"

Drive a Railroad Spike flush with surface of asphalt road, with top marked with an X.

40.700 The Center 1/4 section corner, of section 16.

Corner Point Identity: **E340N440** 38° 22' 28.0757"
Heretofore Described. 110° 43' 17.7156"

60.996 Point for the Center-West 1/16 section corner, of section 16.

Corner Point Identity: **E320N440** 38° 22' 28.2939"
Not Monumented (43). 110° 43' 34.5303"

81.292 The true point for the 1/4 section corner, of sections 16 and 17.

Corner Point Identity: **E300N440** 38° 22' 28.5121"
Heretofore Described. 110° 43' 51.3451"

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4
OF SECTION 16.

From the East 1/16 section corner, of sections 16, and 21.

Corner Point Identity: **E360N400** 38° 22' 01.2577"
Heretofore Described. 110° 43' 00.1499"

N. 01° 11' 50" W., (N. 1° 40' 37" W.), on the North-South center line of the South-East 1/4 of section 16.

20.394 Point for the South-East 1/16 section corner, at the intersection
(1345.92 IF) with the East-West center line, of the South-East 1/4, of section 16.

Corner Point Identity: **E360N420** 38° 22' 14.5573"
New Monument (31). 110° 43' 00.5029"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

**SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-EAST 1/4,
OF SECTION 16.**

CHAINS

T28S R11E
S E
1/ 16
S 16
1999

32.170 Point for the **Witness Point HT-03**, at the Intersection with
(**2123.15 IF**) the projected **Center Line** of **Main Street**, within the Townsite of
Hanksville.

Corner Point Identity: **E360N432** **38° 22' 22.2371"**
Not Monumented (**44**). **110° 43' 00.7068"**

From this point the **Initial Point** for the Townsite of Hanksville,
bears **N. 89° 48' 00" E.**, on a **Grid** bearing for a distance of
9.869 chains, which is also the point of intersection for **Main
Street** and **Center Street**.

40.788 The Center East 1/16 section corner of section 16.
(**2691.84 IF**)

Corner Point Identity: **E360N440** **38° 22' 27.8563"**
Heretofore Described. **110° 43' 00.8559"**

From South 1/16 section corner, of sections 15, and 16.

Corner Point Identity: **E400N420** **38° 22' 14.3063"**
Heretofore Described. **110° 42' 43.6186"**

N. 88° 55' 09" W., (**N. 89° 23' 58" W.**), on the East-West Center
Line of the South-East 1/4 of section 16.

00.311 Point for the **Witness Point HT-04**, at the Intersection with
(**20.51 IF**) the projected **Center Line** of **Street 100 East**, within the Townsite
of Hanksville.

Corner Point Identity: **E396N420** **38° 22' 14.3101"**
Not Monumented (**45**). **110° 42' 43.8761"**

10.816 Point for the **Witness Point HT-05**, at the Intersection with
(**713.83 IF**) the projected **Center Line** of **Center Street**, within the Townsite of
Hanksville.

Corner Point Identity: **E376N420** **38° 22' 14.4396"**
Not Monumented (**46**). **110° 42' 52.5783"**

From this point the **Initial Point** for the Townsite of Hanksville,
bears **N. 00° 12' 00" W.**, on a **Grid** bearing for a distance of
11.906 chains, which is also the point of intersection for **Main
Street** and **Center Street**.

19.692 Point for the **Witness Point HT-06**, at the Intersection with the
(**1299.65 IF**) projected **Center Line** of **Street 100 West**, within the Townsite of
Hanksville.

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 17,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner Point Identity: **E364N420** 38° 22' 14.5488"
Not Monumented (47). 110° 42' 59.9312"

20.382 Point for the South-East 1/16 section corner of section 16.
(1345.20 IF)

Corner Point Identity: **E360N420** 38° 22' 14.5573"
Heretofore Described. 110° 43' 00.5029"

40.764 The Center-South 1/16 section corner of section 16,

Corner Point Identity: **E340N420** 38° 22' 14.8078"
Heretofore Described. 110° 43' 17.3873"

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 17,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

From the 1/4 section corner, of sections 17 and 20.

Corner Point Identity: **E240N400** 38° 22' 02.2635"
Heretofore Described. 110° 44' 24.5702"

N. 00° 45' 18" W., on the North-South center line, of section 17.

19.980 Point for the Center-South 1/16 section corner, of section 17.

Corner Point Identity: **E240N420** 38° 22' 15.2954"
Not Monumented (48). 110° 44' 24.7883"

39.960 Point for the Center 1/4 section corner, of section 17, at
intersection with the East-West center line.

Corner Point Identity: **E240N440** 38° 22' 28.3274"
New Monument (32). 110° 44' 25.0064"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

T28S R11E
C 1/4 S 17
1999

60.158 Point for the Center-North 1/16 section corner, of section 17.

Corner Point Identity: **E240N460** 38° 22' 41.5009"
New Monument (33). 110° 44' 25.2269"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
24 inches in the ground, with brass cap marked.

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 17,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

CHAINS

T28S R11E

C

N 1/16 | S 17

C

1999

80.356 The true point for the 1/4 section corner, of sections 8, and 17.

Corner Point Identity: E240N500	38° 22' 54.6743"
Heretofore Described.	110° 44' 25.4474"

From the true point for the 1/4 section corner, of sections 16, and 17.

Corner Point Identity: E300N440	38° 22' 28.5121"
Heretofore Described.	110° 43' 51.3451"

S. 89° 35' 56" W., on the East-West center line of section 17.

20.313 Point for the Center-East 1/16 section corner, of section 17.

Corner Point Identity: E260N440	38° 22' 28.4197"
New Monument (34).	110° 44' 08.1757"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E

E 1/16

C ----- C

S 17

1999

40.626 The Center 1/4 section corner, of section 17.

Corner Point Identity: E240N440	38° 22' 28.3274"
Heretofore Described.	110° 44' 25.0064"

61.132 Point for the Center-West 1/16 section corner, of section 17.

Corner Point Identity: E220N440	38° 22' 28.2334"
New Monument (35).	110° 44' 41.9978"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E

W 1/16

C ----- C

S 17

1999

81.638 The 1/4 section corner, of sections 17 and 18.

Corner Point Identity: E200N440	38° 22' 28.1394"
Heretofore Described.	110° 44' 58.9892"

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-WEST 1/4,
OF SECTION 17.

CHAINS

SURVEY OF THE SUBDIVISION LINES OF THE SOUTH-WEST 1/4
OF SECTION 17.

From the West 1/16 section corner, of sections 17 and 20.

Corner Point Identity: **E220N400** 38° 22' 02.2399"
Heretofore Described. 110° 44' 41.4550"

N. 00° 56' 31" W., on the North-South center line, of the South-West 1/4, section 17.

- 19.928** Point for the South-West 1/16 section corner, of section 17, at the intersection with the East-West center line of the South-West 1/4, of section 17.

Corner Point Identity: **E220N420** 38° 22' 15.2368"
New Monument (37). 110° 44' 41.7264"

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
S W
1/ 16
S 17
1999

- 39.856** The Center-West 1/16 section corner, of section 17.

Corner Point Identity: **E220N440** 38° 22' 28.2334"
Heretofore Described. 110° 44' 41.9978"

From the Center South 1/16 section, corner 17.

Corner Point Identity: **E240N420** 38° 22' 15.2954"
Heretofore Described. 110° 44' 24.7883"

S. 89° 44' 51" W., on the East-West center line, of the South-West 1/4 of section 17.

- 20.443** Point for the South-West 1/16 section corner, of section 17.

Corner Point Identity: **E220N420** 38° 22' 15.2368"
Heretofore Described. 110° 44' 41.7264"

- 40.886** The South 1/16 section corner, of section 17 and 18.

Corner Point Identity: **E200N420** 38° 22' 15.1778"
Heretofore Described. 110° 44' 58.6645"

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 20,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

CHAINS

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 20,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

From the 1/4 section corner, of sections 20 and 29.

Corner Point Identity: **E240N300** **38° 21' 09.7385"**
Heretofore Described. **110° 44' 25.8952"**

N. 01° 11' 47" E., on the North-South center line, of section 20.

20.224 Point for the Center-South 1/16 section corner, of section 20.

Corner Point Identity: **E240N320** **38° 21' 22.9196"**
Not Monumented (49). **110° 44' 25.5627"**

40.448 Point for the Center 1/4 section corner, of section 20, at intersection with the East-West center line.

Corner Point Identity: **E240N340** **38° 21' 36.1008"**
New Monument (38). **110° 44' 25.2302"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 4 inches in ground to solid bedrock over large chiseled X on sandstone surface, encircled by a mound of stone 6 feet base to top of brass cap marked.

T28S R11E
C 1/4 S 20
2001

Corner falls on East bank of wash that drains to the North.

60.448 Point for the Center-North 1/16 section corner, of section 20.

Corner Point Identity: **E240N360** **38° 21' 49.1822"**
Not Monumented (50). **110° 44' 24.9002"**

80.448 The 1/4 section corner, of sections 17, and 20.

Corner Point Identity: **E240N400** **38° 22' 02.2635"**
Heretofore Described. **110° 44' 24.5702"**

From the 1/4 section corner, of sections 20, and 21.

Corner Point Identity: **E300N340** **38° 21' 35.6991"**
Heretofore Described. **110° 43' 51.3090"**

N. 89° 58' 23" W., on the East-West center line, of section 20.

20.496 Point for the Center East 1/16 section corner, of section 20.

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 21,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

Corner Point Identity: **E260N340** **38° 21' 35.8999"**
Not Monumented (51). **110° 44' 08.2696"**

40.992 The Center 1/4 section corner, of section 20.

Corner Point Identity: **E240N340** **38° 21' 36.1008"**
Heretofore Described. **110° 44' 25.2302"**

62.296 Point for the Center-West 1/16 section corner, of section 20.

Corner Point Identity: **E220N340** **38° 21' 36.3089"**
Not Monumented (52). **110° 44' 42.8624"**

83.600 The 1/4 section corner, of sections 19 and 20.

Corner Point Identity: **E200N340** **38° 21' 36.5171"**
Heretofore Described. **110° 45' 00.4946"**

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 21,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

From the 1/4 section corner, of sections 21 and 28.

Corner Point Identity: **E340N300** **38° 21' 09.5498"**
Heretofore Described. **110° 43' 18.3156"**

N. 01° 05' 25" E., on the North-South center line, of section 21.

19.932 Point for the Center-South 1/16 section corner, of section 21.

Corner Point Identity: **E340N320** **38° 21' 22.5487"**
Not Monumented (53). **110° 43' 18.0014"**

39.864 The Center 1/4 section corner, of section 21, at intersection with the East-West center line, monumented with a Stainless Steel Post, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C 1/4, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E340N340** **38° 21' 35.5476"**
Monumented (31). **110° 43' 17.6873"**

59.792 Point for the Center-North 1/16 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, N 1/16, C | C, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E340N360** **38° 21' 48.5423"**
Monumented (32). **110° 43' 17.3731"**

69.756 Point for the Center-North, North 1/64 section corner, of section 21.

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 21,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

Corner Point Identity: **E340N370** **38° 21' 55.0411"**
Not Monumented (54). **110° 43' 17.2161"**

79.720 The 1/4 section corner, of sections 16, and 21.

Corner Point Identity: **E340N400** **38° 22' 01.5399"**
Heretofore Described. **110° 43' 17.0591"**

From the 1/4 section corner, of sections 21, and 22.

Corner Point Identity: **E400N340** **38° 21' 35.3890"**
Heretofore Described. **110° 42' 44.0688"**

N. 89° 39' 52" W., on the East-West center line of section 21.

10.146 The Center-East, East 1/64 section corner, of section 21, falls at West edge of dirt road, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 4 inches below surface of road, with brass cap marked T28S, R11E, C-E-E, 1/64, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E370N340** **38° 21' 35.4286"**
Monumented (33). **110° 42' 52.4734"**

15.219 The Center-West-East, East 1/256 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-W-E, E 1/256, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E365N340** **38° 21' 35.4470"**
Monumented (34). **110° 42' 56.6755"**

20.292 The Center-East 1/16 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, E 1/16, C-C, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E360N340** **38° 21' 35.4683"**
Monumented (35). **110° 43' 00.8780"**

25.365 The Center-East-West, East 1/256 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-E-W, E 1/256, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E355N340** **38° 21' 35.4881"**
Monumented (36). **110° 43' 05.0803"**

30.438 The Center-West, East 1/64 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-W, E 1/64, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF SECTION 21.**

CHAINS

- Corner Point Identity: **E350N340** **38° 21' 35.5079"**
Monumented (37). **110° 43' 09.2827"**
- 40.584** The Center 1/4 section corner, of section 21.
- Corner Point Identity: **E340N340** **38° 21' 35.5476"**
Heretofore Described. **110° 43' 17.6873"**
- 60.876** Point for the Center-West 1/16 section corner, of section 21.
 Corner Point Identity: **E320N340** **38° 21' 35.6233"**
Not Monumented (55). **110° 43' 34.4981"**
- 81.168** The 1/4 section corner, of sections 20 and 21.
- Corner Point Identity: **E300N340** **38° 21' 35.6991"**
Heretofore Described. **110° 43' 51.3090"**

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF SECTION 21.**

- From the Center-East 1/16 section corner, of section 21.
- Corner Point Identity: **E360N340** **38° 21' 35.4683"**
Heretofore Described. **110° 43' 00.8780"**
- N. 01° 16' 24" E.**, on the North-South center line, of the North-East 1/4, of section 21.
- 09.886** The Center-South, North-East 1/64 section corner, of section 21.
- Corner Point Identity: **E360N350** **38° 21' 41.9154"**
Not Monumented (56). **110° 43' 00.6959"**
- 19.089** The South Witness Point, of the Hanksville Recreation Park, for the North-East 1/16 section corner, of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked WP, T28S, R11E, NE 1/16, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.
- Corner Point Identity: **E360N357** **38° 21' 47.9171"**
Monumented (38). **110° 43' 00.5265"**
- 19.537** Net wire fence along the South edge of tennis court, bears E and W.
- Corner Point Identity: **E360N358** **38° 21' 48.2096"**
Not Monumented (57). **110° 43' 00.5183"**
- 19.772** The North-East 1/16 section corner, at the intersection with the East-West center line of the North-East 1/4, of section 21, falls at the South-East portion of tennis court and cannot be monumented with regulation iron post. **Marked (X) on surface of pavement.**

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF SECTION 21.**

CHAINS

Corner Point Identity: **E360N360** **38° 21' 48.3625"**
Marked (07). **110° 43' 00.5140"**

20.453 Net wire fence along the North edge of tennis court, bears E and W.

Corner Point Identity: **E360N362** **38° 21' 48.8068"**
Not Monumented (58). **110° 43' 00.5014"**

22.244 Point for the 1/1024 section corner, between the North-East 1/16 and the Center-South-North, North-East 1/256 of section 21 on the North Boundary of the Hanksville Recreation Park.

Corner Point Identity: **E360N363** **38° 21' 49.9744"**
New Monument (39). **110° 43' 00.4684"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
1/ 1024
E360 N363
S 21
1999

24.716 Point for the Center-South-North, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E360N365** **38° 21' 51.5863"**
Not Monumented (59). **110° 43' 00.4229"**

29.660 Point for the Center-North, North-East 1/64 section corner, of section 21.

Corner Point Identity: **E360N370** **38° 21' 54.8101"**
New Monument (40). **110° 43' 00.3319"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

T28S R11E
C N N E
1/64
S 21
2001

Corner falls on East side of an old dirt road, that bears North and South.

39.547 The East 1/16 section corner, of sections 16 and 21.

Corner Point Identity: **E360N400** **38° 22' 01.2577"**
Heretofore Described. **110° 43' 00.1499"**

From the North 1/16 section corner, of section 21 and 22.

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF THE NORTH-EAST 1/4, OF SECTION 21.**

CHAINS

21.858 Net wire fence along the West edge of tennis court, bears N and S.

Corner Point Identity: **E358N360** **38° 21' 48.3758"**
Not Monumented (62). **110° 43' 01.7614"**

22.896 Point for the 1/1024 section corner, between the North-East 1/16, and the Center-East-West, North-East 1/256, of section 21 on the West Boundary of the Hanksville Recreational Park.

Corner Point Identity: **E357N360** **38° 21' 48.3850"**
New Monument (42). **110° 43' 02.6214"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

**T28S R11E
1/ 1024
E357 N360
S 21
1999**

25.440 The Center-East-West, North-East 1/256 of section, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-E-W, N-E 1/256, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E355N360** **38° 21' 48.4075"**
Monumented (41). **110° 43' 04.7288"**

30.528 The Center-West, North-East 1/64 of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-W, N-E 1/64, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E350N360** **38° 21' 48.4524"**
Monumented (42). **110° 43' 08.9435"**

40.704 The Center-North 1/16 section corner, of section 21.

Corner Point Identity: **E340N360** **38° 21' 48.5423"**
Heretofore Described. **110° 43' 17.3731"**

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF THE NORTH-EAST 1/4, OF SECTION 21.**

From the Center-East, North-East 1/64 section corner, of section 21.

Corner Point Identity: **E370N360** **38° 21' 48.2724"**
Heretofore Described. **110° 42' 52.0844"**

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF THE NORTH-EAST 1/4, OF SECTION 21.**

CHAINS

21.858 Net wire fence along the West edge of tennis court, bears N and S.

Corner Point Identity: **E358N360** **38° 21' 48.3758"**
Not Monumented (62). **110° 43' 01.7614"**

22.896 Point for the 1/1024 section corner, between the North-East 1/16, and the Center-East-West, North-East 1/256, of section 21 on the West Boundary of the Hanksville Recreation Park.

Corner Point Identity: **E357N360** **38° 21' 48.3850"**
New Monument (42). **110° 43' 02.6214"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

**T28S R11E
1/ 1024
E357 N360
S 21
1999**

25.440 The Center-East-West, North-East 1/256 of section, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-E-W, N-E 1/256, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E355N360** **38° 21' 48.4075"**
Monumented (41). **110° 43' 04.7288"**

30.528 The Center-West, North-East 1/64 of section 21, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked T28S, R11E, C-W, N-E 1/64, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

Corner Point Identity: **E350N360** **38° 21' 48.4524"**
Monumented (42). **110° 43' 08.9435"**

40.704 The Center-North 1/16 section corner, of section 21.

Corner Point Identity: **E340N360** **38° 21' 48.5423"**
Heretofore Described. **110° 43' 17.3731"**

**SURVEY OF THE SUBDIVISION LINES OF THE NORTH-EAST 1/4,
OF THE NORTH-EAST 1/4, OF SECTION 21.**

From the Center-East, North-East 1/64 section corner, of section 21.

Corner Point Identity: **E370N360** **38° 21' 48.2724"**
Heretofore Described. **110° 42' 52.0844"**

**SURVEY OF THE SOUTH-WEST 1/4, NORTH-EAST 1/4,
NORTH-EAST 1/4 OF SECTION 21.**

CHAINS

N. 01° 21' 57" E., on the North-South center line, of the North-East 1/4, of the North-East 1/4, of section 21.

04.924 Point for the Center-South, North-East, North-East 1/256, of section 21.

Corner Point Identity: **E370N365** **38° 21' 51.4835"**
Not Monumented (63). **110° 42' 51.9872"**

09.848 Point for the North-East, North-East 1/64, of section 21.

Corner Point Identity: **E370N370** **38° 21' 54.6946"**
Not Monumented (64). **110° 42' 51.8900"**

19.697 Point for the East, East 1/64 of section 21, and 16.

Corner Point Identity: **E370N400** **38° 22' 01.1167"**
Heretofore Described. **110° 42' 51.6954"**

From the North, North 1/64 of section 21, and 22.

Corner Point Identity: **E400N370** **38° 21' 54.5790"**
Heretofore Described. **110° 42' 43.4479"**

N. 89° 00' 14" W., on the East-West center line, of the North-East 1/4, of the North-East 1/4, of section 21.

10.192 Point for the North-East, North-East 1/64 section corner, of section 21.

Corner Point Identity: **E370N370** **38° 21' 54.6946"**
Heretofore Described. **110° 42' 51.8900"**

15.288 Point for the Center-West, North-East, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E365N370** **38° 21' 54.7523"**
Not Monumented (65). **110° 42' 56.1110"**

20.384 The Center-North, North-East 1/64 section corner, of section 21.

Corner Point Identity: **E360N370** **38° 21' 54.8101"**
Heretofore Described. **110° 43' 00.3319"**

**SURVEY OF THE SOUTH-WEST 1/4, NORTH-EAST 1/4,
NORTH-EAST 1/4 OF SECTION 21.**

From the Center-West-East, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E365N360** **38° 21' 48.3175"**
Heretofore Described. **110° 42' 56.2992"**

**SURVEY OF THE NORTH-WEST 1/4, NORTH-EAST 1/4,
OF SECTION 21.**

CHAINS

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter 24 inches in the ground, with brass cap marked.

W P
T 28 S R 11 E
E362 N363
S 21
1999

- 05.090** Point for the 1/1024 section corner, between the North-East 1/16 section corner and Center-South-North, North-East 1/256 section corner, of section 21.

Corner Point Identity: E360N363	38° 21' 49.9744"
Heretofore Described.	110° 43' 00.4684"

SURVEY OF THE NORTH-WEST 1/4, NORTH-EAST 1/4 OF SECTION 21.

From the Center-West, North-East 1/64 section corner, of section 21.

Corner Point Identity: E350N360	38° 21' 48.4524"
Heretofore Described.	110° 43' 08.9435"

N. 01° 10' 52" E., on the North-South center line, of the North-West 1/4, of the North-East 1/4, of section 21.

- 04.963** Point for the Center-South, North-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: E350N365	38° 21' 51.6890"
Not Monumented (70).	110° 43' 08.8588"

- 09.926** Point for the North-West, North-East 1/64 section corner, of section 21.

Corner Point Identity: E350N370	38° 21' 54.9256"
Not Monumented (71).	110° 43' 08.7740"

- 19.852** The West-East 1/64 section corner, of section 16 and 21.

Corner Point Identity: E350N400	38° 22' 01.3988"
Heretofore Described.	110° 43' 08.6045"

From the Center-North, North-East 1/64 section corner, of section 21.

Corner Point Identity: E360N370	38° 21' 54.8101"
Heretofore Described.	110° 43' 00.3319"

N. 89° 00' 16" W., on the East-West center line, of the North-West 1/4, of the North-East 1/4, of section 21.

**SURVEY OF THE SOUTH-EAST 1/4, NORTH-WEST 1/4,
NORTH-EAST 1/4, OF SECTION 21.**

CHAINS

- 05.096** Point for the Center-East, North-West, North-East 1/256 section corner, of section 21.
- Corner Point Identity: **E355N370** 38° 21' 54.8678"
Not Monumented (72). 110° 43' 04.5530"
- 10.192** Point for the North-West, North-East 1/64 section corner, of section 21.
- Corner Point Identity: **E350N370** 38° 21' 54.9256"
Heretofore Described. 110° 43' 08.7740"
- 20.384** Point for the Center-North, North 1/64 section corner, of section 21.
- Corner Point Identity: **E340N370** 38° 21' 55.0411"
Heretofore Described. 110° 43' 17.2161"
-

**SURVEY OF THE SOUTH-EAST 1/4, NORTH-WEST 1/4,
NORTH-EAST 1/4, OF SECTION 21.**

From the Center-East-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E355N360** 38° 21' 48.4075"
Heretofore Described. 110° 43' 04.7288"

N. 01° 13' 39" E., on the North-South center line, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4, of section 21.

- 02.477** Point for the 1/1024 section corner, between the Center-East-West, North-East 1/256 section corner, and the South-East, North-West, North-East 1/256 section corner, of section 21.
- Corner Point Identity: **E355N363** 38° 21' 50.0226"
Not Monumented (73). 110° 43' 04.6849"
- 04.954** Point for the South-East, North-West, North-East 1/256 section corner, of section 21.
- Corner Point Identity: **E355N365** 38° 21' 51.6377"
Not Monumented (74). 110° 43' 04.6409"
- 09.908** Point for the Center-East, North-West, North-East 1/256 section corner, of section 21.
- Corner Point Identity: **E355N370** 38° 21' 54.8678"
Heretofore Described. 110° 43' 04.5530"
-

From the Center-South-North, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E360N365** 38° 21' 51.5863"
Heretofore Described. 110° 43' 00.4229"

**SURVEY OF THE SOUTH-EAST 1/4, SOUTH-EAST 1/4,
NORTH-WEST 1/4, NORTH-EAST 1/4 OF SECTION 21.**

CHAINS

N. 89° 06' 51" W., on the East-West center line, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4, of section 21.

- 02.546** Point for the 1/1024 section corner between the Center-South-North, North-East 1/256 and South-East, North-West, North-East 1/256 of section 21.

Corner Point Identity: **E357N365** **38° 21' 51.6120"**
Not Monumented (75). **110° 43' 02.5319"**

- 05.092** Point for the South-East, North-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E355N365** **38° 21' 51.6377"**
Heretofore Described. **110° 43' 04.6409"**

- 10.184** Point for the Center-South, North-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E350N365** **38° 21' 51.6890"**
Heretofore Described. **110° 43' 08.8588"**

**SURVEY OF THE SOUTH-EAST 1/4, SOUTH-EAST 1/4,
NORTH-WEST 1/4, NORTH-EAST 1/4 OF SECTION 21.**

From the 1/1024 section corner, between North-East 1/16 section corner, and the Center-East-West, North-East 1/256 section corner, of section 21 on the West Boundary of the Hanksville Recreation Park.

Corner Point Identity: **E357N360** **38° 21' 48.3850"**
Heretofore Described. **110° 43' 02.6214"**

N. 01° 15' 03" E., on the North-South center line, of the South-East 1/4, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4, of section 21.

- 02.474** Point for the North-West Corner Point for the Hanksville Recreation Park, identical to the Center 1/1024 section corner, of the South-East 1/4, of the South-East 1/4 of the North-West 1/4 of the North-East 1/4, of section 21.

Corner Point Identity: **E357N363** **38° 21' 49.9985"**
New Monument (44). **110° 43' 02.5767"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

**T28S R11E
1/ 1024
E357 N363
S 21
1999**

**RESURVEY OF A PORTION OF THE AUXILIARY LOT BOUNDARY,
FOR LOTS 2, 4, 7, 8, 9, AND 10, WITHIN
THE NORTH-EAST 1/4, OF SECTION 21.**

CHAINS

- 04.948** Point for the 1/1024 section corner, between the Center-South-North, North-East 1/256 section corner, and South-East, North-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E357N365** **38° 21' 51.6120"**
Heretofore Described. **110° 43' 02.5319"**

From the 1/1024 section corner, between the North-East 1/16 section corner, and Center-South-North, North-East 1/256 section corner, of section 21 on the West Boundary of the Hanksville Recreation Park.

Corner Point Identity: **E360N363** **38° 21' 49.9744"**
Heretofore Described. **110° 43' 00.4684"**

N. 89° 10' 05" W., on the East-West center line, of the South-East 1/4, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4, of section 21.

- 02.545** Point for the North-West corner Point for the Hanksville Recreation Park, identical to the Center 1/1024 section corner, of the South-East 1/4, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4, of section 21.

Corner Point Identity: **E357N363** **38° 21' 49.9985"**
Heretofore Described. **110° 43' 02.5767"**

- 05.090** Point for the 1/1024 section corner, between the Center-East-West, North-East 1/256 section corner, and South-East, North-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E355N363** **38° 21' 50.0226"**
Heretofore Described. **110° 43' 04.6849"**

**RESURVEY OF A PORTION OF THE AUXILIARY LOT BOUNDARY,
FOR LOTS 2, 4, 7, 8, 9, AND 10, WITHIN
THE NORTH-EAST 1/4, OF SECTION 21.**

From the Center-West-East, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E365N360** **38° 21' 48.3175"**
Heretofore Described. **110° 42' 56.2992"**

S. 01° 19' 07" W., on the North-South center line, of the North-West 1/4, South-East 1/4, North-East 1/4, of section 21.

- 00.609** The South Witness Point, for the Center-West-East, North-East 1/256 section corner, monumented with a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, projecting 6 inches above ground, with brass cap marked WP, T28S, R11E, C-W-E, N-E 1/256, S21, 1987, as described in the official record of the 1987 Dependent Resurvey.

**AUXILIARY SURVEY BOUNDARY FOR THE
HANKSVILLE RECREATION PARK,
WITHIN THE NORTH-EAST 1/4 OF SECTION 21.**

CHAINS

N. 01° 13' 38" E., beginning new measurement along the Auxiliary Lot Boundary, and the North-South Center Line, of the North-East 1/4, of the South-West 1/4, of the North-East 1/4, of section 21.

00.757 The Point for the Center-East-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E355N360** **38° 21' 48.4075"**
Heretofore Described. **110° 43' 04.7288"**

**AUXILIARY SURVEY BOUNDARY FOR THE HANKSVILLE RECREATION PARK,
WITHIN THE NORTH-EAST 1/4 OF SECTION 21.**

Beginning at the South-East Corner, for the Hanksville Recreation Park, on the Auxiliary Survey Boundary, between the South Witness Point for the Center-West-East, North-East 1/256 section corner, and the South Witness Point for the North-East 1/16 section corner, of section 21.

Corner Point Identity: **E362N357** **38° 21' 47.9176"**
Heretofore Described. **110° 42' 59.8989"**

S. 89° 56' 35" W., beginning new measurement along the South Boundary for the Hanksville Recreation Park.

00.758 Point for the South Witness Point for the North-East 1/16 section corner of section 21, which is identical to Lot corners 2, 4, 8, and 9.

Corner Point Identity: **E360N357** **38° 21' 47.9171"**
Heretofore Described. **110° 43' 00.5265"**

03.302 Point for the Witness Point for the South-West corner of the Hanksville Recreation Park, identical to Lot corners 4, 7, and 8.

Corner Point Identity: **E357N357** **38° 21' 47.9154"**
Heretofore Described. **110° 43' 02.6343"**

N. 01° 14' 21" E., beginning new measurement along the West Boundary of the Hanksville Recreation Park within section 21.

00.720 Point for the 1/1024 section corner, between the North-East 1/16 section corner, and Center-East-West, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E357N360** **38° 21' 48.3850"**
Heretofore Described. **110° 43' 02.6214"**

N. 01° 15' 03" E., beginning new measurement along the West Boundary of the Hanksville Recreation Park within section 21.

**AUXILIARY SURVEY BOUNDARY FOR THE
HANKSVILLE RECREATION PARK,
WITHIN THE NORTH-EAST 1/4 OF SECTION 21.**

CHAINS

- 02.474** Point for the North-West Corner of the Hanksville Recreation Park, identical to the Center 1/1024 section corner, of the South-East 1/4, of the South-East 1/4, of the North-West 1/4, of the North-East 1/4 of section 21.

Corner Point Identity: **E357N363** **38° 21' 49.9985"**
Heretofore Described. **110° 43' 02.5767"**

S. 89° 10' 05" E., beginning new measurement along the North Boundary of the Hanksville Recreation Park within the North-East 1/4 of section 21.

- 02.545** Point for the 1/1024 section corner, between the North-East 1/16 section corner, and the Center-South-North, North-East 1/256 section corner, of section 21.

Corner Point Identity: **E360N363** **38° 21' 49.9744"**
Heretofore Described. **110° 43' 00.4684"**

- 03.303** Point for the North-East Corner of the Hanksville Recreation Park, identical to the Lot Corners of 5 and 6, and the North-West 1/4, of the South-West 1/4, of the South-West 1/4, of the North-East 1/4, of the North-East 1/4, of section 21.

Corner Point Identity: **E362N363** **38° 21' 49.9672"**
Heretofore Described. **110° 42' 59.8408"**

S. 01° 16' 34" W., beginning new measurement along the East Boundary of the Hanksville Recreation Park, within the North-East 1/4 of section 21.

- 02.471** Point for the East Witness Point to the North-East 1/16 section corner, identical to the Lot Corners 5, 6, 9 and 10 of section 21.

Corner Point Identity: **E362N360** **38° 21' 48.3558"**
Heretofore Described. **110° 42' 59.8864"**

S. 01° 17' 15" W., beginning new measurement along the East Boundary of the Hanksville Recreation Park, within the North-East 1/4 of section 21.

- 00.672** Point for the South-East Corner for the Hanksville Recreation Park, identical to Lot Corners 2, 9, and 10 of section 21.

Corner Point Identity: **E362N357** **38° 21' 47.9176"**
Heretofore Described. **110° 42' 59.8989"**

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 22,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

CHAINS

**SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 22,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.**

From the 1/4 section corner, of sections 22 and 27.

Corner Point Identity: **E440N300** **38° 21' 09.1748"**
Heretofore Described. **110° 42' 11.4331"**

N. 01° 09' 54" E., on the North-South center line, of section 22.

19.879 Point for the Center-South 1/16 section corner, of section 22.

Corner Point Identity: **E440N320** **38° 21' 22.1390"**
Not Monumented (76). **110° 42' 11.0983"**

39.758 Point for the Center 1/4 section corner, at intersection with the East-West center line of section 22.

Corner Point Identity: **E440N340** **38° 21' 35.1031"**
New Monument (47). **110° 42' 10.7635"**

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 24 inches in the ground, with brass cap marked.

**T28S R11E
C 1/4 S 22
2001**

59.636 Point for the Center-North 1/16 section corner of section 22.

Corner Point Identity: **E440N360** **38° 21' 48.0664"**
Not Monumented (77). **110° 42' 10.4287"**

79.514 The 1/4 section corner, of sections 15 and 22.

Corner Point Identity: **E440N400** **38° 22' 01.0297"**
Heretofore Described. **110° 42' 10.0938"**

From the 1/4 section corner, of sections 22 and 23.

Corner Point Identity: **E500N340** **38° 21' 34.8158"**
Heretofore Described. **110° 41' 37.4803"**

N. 89° 22' 25" W., on the East-West center line, of section 22.

20.089 Point for the Center-East 1/16 section corner, of section 22.

Corner Point Identity: **E460N340** **38° 21' 34.9595"**
Not Monumented (78). **110° 41' 54.1219"**

40.178 The Center 1/4 section corner, of section 22.

SURVEY OF THE SUBDIVISIONAL LINES OF SECTION 22,
T. 28 S., R. 11 E., SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner Point Identity: **E440N340** 38° 21' 35.1031"
Heretofore Described. 110° 42' 10.7635"

60.281 Point for the Center-West 1/16 section corner, of section 22,

Corner Point Identity: **E420N340** 38° 21' 35.2460"
Not Monumented (79). 110° 42' 27.4162"

80.384 The 1/4 section corner, of sections 21 and 22.

Corner Point Identity: **E400N340** 38° 21' 35.3890"
Heretofore Described. 110° 42' 44.0688"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

**RESURVEY FOR THE HANKSVILLE TOWNSITE (HT) LOCATED IN THE
NORTH-EAST 1/4, OF THE SOUTH-EAST 1/4,
OF SECTION 16, TOWNSHIP 28 SOUTH, RANGE 11 EAST,
SALT LAKE MERIDIAN, UTAH.**

LAND DESCRIPTION FOR HANKSVILLE TOWNSITE

In accordance with the Dependent Resurvey for the North-East One Quarter, of the South-East One Quarter, of Section 16, Township 28 South, Range 11 East, Salt Lake Meridian, Wayne County within the State of Utah. This land description is strictly conformable to the approved Survey Plat of Record, on file with the Wayne County Courthouse, which was submitted on May 16, 1905, and the Supplemental Survey Plat approve June 23, 2000. This Townsite Survey was executed under the direction set forth within the Manual of Surveying Instructions 1973, within sections (7-17 through 7-28).

Additional instructions are referenced under the Revised Statutes for the United States Numbers 2380 and 2381, and United States Code Number 43, 711-712, with respect to Townsite Surveys.

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

Beginning at the **Witness Point HT-05**, on the **East-West Center Line**, for the South-East 1/4, of section 16.

Corner Point Identity: E376N420	38° 22' 14.4396"
Heretofore Described.	110° 42' 52.5783"

N. 00° 12' 00" W., on a **GRID** bearing projected along the **Center Line of Center Street** for Hanksville Townsite.

051.55 Point for the **Witness Point HT-07**, and intersection with the **North Boundary of Buffer Zone** and **South Boundary of Block Number 5**, as depicted on the **Supplemental and Addendum Survey Plat approved June 23, 2000**.

Corner Point Identity: E376N422	38° 22' 14.9490"
Marked (08).	110° 42' 52.5751"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E374N422 2000 1905**.

Corner Point Identity: E374N422	38° 22' 14.9512"
New Monument (48).	110° 42' 53.1448"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

245.42 Point for the **Witness Point HT-11**, at the projected intersection with the **North boundary** of **Buffer Zone** and the **South boundary** of **Block Number 4**, for the Hanksville Townsite.

Corner Point Identity: **E376N426** 38° 22' 16.8650"
Marked (13). 110° 42' 52.5631"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E374N426 2000 1905**.

Corner Point Identity: **E374N426** 38° 22' 16.8672"
New Monument (51). 110° 42' 53.1328"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E378N426** 38° 22' 16.8628"
Not Monumented (81). 110° 42' 51.9934"

349.92 Point for the **Witness Point HT-12**, at the projected intersection with **Lot Boundaries** within **Block Number 3**, for the Hanksville Townsite.

Corner Point Identity: **E376S427** 38° 22' 17.8977"
Marked (14). 110° 42' 52.5567"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E374N427** 38° 22' 17.8999"
Not Monumented (82). 110° 42' 53.1264"

369.17 Point for the **Witness Point HT-13**, at the projected intersection with **Lot Boundaries** within **Block Number 4**, for the Hanksville Townsite.

Corner Point Identity: **E376N427** 38° 22' 18.0880"
Marked (15). 110° 42' 52.5555"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E378N427** 38° 22' 18.0858"
Not Monumented (83). 110° 42' 51.9858"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

492.92 Point for the **Witness Point HT-14**, at the projected intersection with the **East-West Center Line** of **Blocks 3**, and **4**, for **Hanksville Townsite**.

Corner Point Identity: **E376N428** 38° 22' 19.3110"
Marked (16). 110° 42' 52.5479"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E374N428** 38° 22' 19.3132"
Not Monumented (84). 110° 42' 53.1176"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E378N428 2000 1905**.

Corner Point Identity: **E378N428** 38° 22' 19.3088"
New Monument (52). 110° 42' 51.9782"

616.42 Point for the **Witness Point HT-15**, at the projected intersection with the **Lot Boundaries** within **Block Number 3**, for the **Hanksville Townsite**.

Corner Point Identity: **E376*S429** 38° 22' 20.5316"
Marked (17). 110° 42' 52.5403"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E374N429** 38° 22' 20.5338"
Not Monumented (85). 110° 42' 53.1100"

628.92 Point for the **Witness Point HT-16**, at the projected intersection with the **Lot Boundaries**, within **Block Number 4**, for the **Hanksville Townsite**.

Corner Point Identity: **E376N429** 38° 22' 20.6551"
Marked (18). 110° 42' 52.5395"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E378N429 2000 1905**.

Corner Point Identity: **E378N429** 38° 22' 20.6529"
New Monument (53). 110° 42' 51.9698"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

- 740.42** Point for the **Witness Point HT-17**, at the projected intersection with the **North Boundary** of **Blocks 3, and 4**, and **South Boundary** of **Main Street**, for the Hanksville Townsite.

Corner Point Identity: **E376N430** 38° 22' 21.7571"
Marked (19). 110° 42' 52.5326"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E374N430 2000 1905**.

Corner Point Identity: **E374N430** 38° 22' 21.7593"
New Monument (54). 110° 42' 53.1023"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E378N430 2000 1905**.

Corner Point Identity: **E378N430** 38° 22' 21.7549"
New Monument (55). 110° 42' 51.9629"

- 785.80** Point for the **Initial Point HT-18**, at the projected intersection with the **Center Line** of **Main Street**, and the **Center Line** of **Center Street** for the Hanksville Townsite.

Corner Point Identity: **E376N432** 38° 22' 22.2055"
Heretofore Described. 110° 42' 52.5298"

From which the **West Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **631.14** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E362N432 2000 1905**.

Corner Point Identity: **E362N432** 38° 22' 22.2361"
New Monument (56). 110° 43' 00.4532"

From which the **East Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **718.25** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E404N432 2000 1905**.

Corner Point Identity: **E404N432** 38° 22' 22.1707"
New Monument (57). 110° 42' 43.5129"

- 831.18** Point for the **Witness Point HT-19**, at the projected intersection with the **North Boundary** of **Main Street**, and **South Boundary** of **Blocks 1, and 2**, for the Hanksville Townsite.

Corner Point Identity: **E376N434** 38° 22' 22.6540"
Marked (20). 110° 42' 52.5270"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE OF CENTER STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

F E E T

At the Witness Point, Set a PK Nail, with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E374N434 2000 1905**.

Corner Point Identity: E374N434	38° 22' 22.6562"
New Monument (58).	110° 42' 53.0967"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E378N434 2000 1905**.

Corner Point Identity: E378N434	38° 22' 22.6518"
New Monument (59).	110° 42' 51.9573"

- 1078.68** Point for the **Witness Point HT-20**, at the projected intersection with the **East-West Center Line** of **Blocks 1**, and **2**, for the Hanksville Townsite.

Corner Point Identity: E376N436	38° 22' 25.1000"
Marked (21).	110° 42' 52.5118"

At the Witness Point, Set a PK Nail, with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: E374N436	38° 22' 25.1022"
Not Monumented (86).	110° 42' 53.0815"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: E378N436	38° 22' 25.0978"
Not Monumented (87).	110° 42' 51.9421"

- 1190.48** Point for the **Witness Point HT-21**, at the projected intersection with the **Lot Boundaries** within **Block Number 1**, for the Hanksville Townsite.

Corner Point Identity: E376N437	38° 22' 26.2049"
Marked (22).	110° 42' 52.5049"

At the Witness Point, Set a PK Nail, with surface of asphalt road.

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: E378N437	38° 22' 26.2027"
Not Monumented (88).	110° 42' 51.9352"

**RESURVEY OF THE EAST-WEST CENTER LINE OF MAIN STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

0358.46 Point for the **Witness Point HT-26**, at the projected intersection with the **North-South Center Line** of **Blocks 2, and 3**, for the Hanksville Townsite.

Corner Point Identity: **E370N432** 38° 22' 22.2197"
Marked (27). 110° 42' 56.2067"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E370N430 2000 1905**.

Corner Point Identity: **E370N430** 38° 22' 21.7713"
New Monument (63). 110° 42' 56.2094"

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E370N434** 38° 22' 22.6682"
Not Monumented (92). 110° 42' 56.2038"

0438.46 Point for the **Witness Point HT-27**, at the projected intersection with the **Lot Boundaries** within **Block Number 3**, for the Hanksville Townsite.

Corner Point Identity: **E372N432** 38° 22' 22.2158"
Marked (28). 110° 42' 55.2024"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which a Point for the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E372N430** 38° 22' 21.7674"
Not Monumented (93). 110° 42' 55.2051"

0605.96 Point for the **Witness Point HT-28**, at the projected intersection with the **East Boundary** of **Blocks 2, and 3**, and **West Boundary** of **Center Street**, for the Hanksville Townsite.

Corner Point Identity: **E374N432** 38° 22' 22.2077"
Marked (29). 110° 42' 53.0995"

At the Witness Point Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance, a Stainless Steel Post, 2 ½ inches diameter, projecting 3 inches above ground, with brass cap marked, **RM HT E374N430 2000 1905**.

Corner Point Identity: **E374N430** 38° 22' 21.7593"
Heretofore Described. 110° 42' 53.1023"

**RESURVEY OF THE EAST-WEST CENTER LINE OF MAIN STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

Corner Point Identity: **E380N434** **38° 22' 22.6458"**
Not Monumented (94). **110° 42' 50.4037"**

0944.22 Point for the **Witness Point HT-31**, at the projected intersection with the **North-South Center Line** of **Blocks 1**, and **4**, for the Hanksville Townsite.

Corner Point Identity: **E382N432** **38° 22' 22.1913"**
Marked (32). **110° 42' 48.8530"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E382N430** **38° 22' 21.7429"**
Not Monumented (95). **110° 42' 48.8558"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E382N434** **38° 22' 22.6398"**
Not Monumented (96). **110° 42' 48.8502"**

1237.09 Point for the **Witness Point HT-32**, at the projected intersection with the **East Boundary** of **Blocks 1**, and **4**, and the **West Boundary** of **Canal Easement**.

Corner Point Identity: **E388N432** **38° 22' 22.1771"**
Marked (33). **110° 42' 45.1763"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E388N430 2000 1905**.

Corner Point Identity: **E388N430** **38° 22' 21.7287"**
New Monument (64). **110° 42' 45.1791"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E388N434 2000 1905**.

Corner Point Identity: **E388N434** **38° 22' 22.6256"**
New Monument (65). **110° 42' 45.1735"**

1278.34 Point for the **Witness Point HT-33**, at the projected intersection with the **Center Line** of **Canal Easement**.

Corner Point Identity: **E390N432** **38° 22' 22.1751"**
Marked (34). **110° 42' 44.6585"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

**RESURVEY OF THE EAST-WEST CENTER LINE OF MAIN STREET,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

1319.59 Point for the **Witness Point HT-34**, and intersection with the **East Boundary of Canal Easement**, and **West Boundary of Street 100 East**.

Corner Point Identity: **E394N432** **38° 22' 22.1731"**
Marked (35). **110° 42' 44.1406"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E394N430** **38° 22' 21.7247"**
Not Monumented (97). **110° 42' 44.1434"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E394N434** **38° 22' 22.6216"**
Not Monumented (98). **110° 42' 44.1378"**

1343.42 Point for the **Witness Point HT-01**, on the **Section Line** for Sections 15 and 16.

Corner Point Identity: **E400N432** **38° 22' 22.1719"**
Heretofore Described. **110° 42' 43.8415"**

1344.59 Point for the **Witness Point HT-35**, at the intersection with the **Center Line of Street 100 East**, which is 50 feet wide and bears **N. 00° 12' W.**, and **S. 00° 12' E.**

Corner Point Identity: **E402N432** **38° 22' 22.1719"**
Marked (36). **110° 42' 43.8267"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

1369.59 Point for the **Witness Point HT-37**, at the intersection with the **East Boundary of Street 100 East**.

Corner Point Identity: **E404N432** **38° 22' 22.1707"**
Heretofore Described. **110° 42' 43.5129"**

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 WEST,
WITHIN THE HANKSVILLE TOWNSITE**

From the Witness Point **HT-06**, on the **East-West Center Line** of the South-East 1/4 of section 16.

Corner Point Identity: **E364N420** **38° 22' 14.5488"**
Heretofore Described. **110° 42' 59.9312"**

N. 00° 12' 00" W., on a **GRID** bearing along center line of Street 100 West.

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 WEST,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

043.37 Point for the **Witness Point HT-37**, at the projected intersection with the **North Boundary** of **Buffer Zone** and **South Boundary** of **Block Number 5**, as depicted on the **Supplemental and Addendum Survey Plat** approved **June 23, 2000**.

Corner Point Identity: **E364N422** **38° 22' 14.9774"**
Marked (37). **110° 42' 59.9286"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which a Point for the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E362N422** **38° 22' 14.9796"**
Not Monumented (99). **110° 43' 00.4983"**

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E366N422 2000 1905**.

Corner Point Identity: **E366N422** **38° 22' 14.9752"**
New Monument (66). **110° 42' 59.3589"**

146.49 Point for the **Witness Point HT-38**, at the projected intersection with the **North Boundary** of **Block Number 5**.

Corner Point Identity: **E364N423** **38° 22' 15.9965"**
Marked (38). **110° 42' 59.9222"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E362N423** **38° 22' 15.9987"**
Not Monumented (100). **110° 43' 00.4919"**

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E366N423** **38° 22' 15.9943"**
Not Monumented (101). **110° 42' 59.3525"**

237.24 Point for the **Witness Point HT-39**, at intersection with the **South Boundary** of **Block Number 3**.

Corner Point Identity: **E364N426** **38° 22' 16.8934"**
Marked (39). **110° 42' 59.9166"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E362N426 2000 1905**.

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 WEST,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

Corner Point Identity: **E362N426** 38° 22' 16.8956"
New Monument (67). 110° 43' 00.4863"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E366N426 2000 1905**.

Corner Point Identity: **E366N426** 38° 22' 16.8912"
New Monument (68). 110° 42' 59.3469"

343.24 Point for the **Witness Point HT-40**, at intersection with the **Lot Boundaries** within **Block Number 3**.

Corner Point Identity: **E364N427** 38° 22' 17.9409"
Marked (40). 110° 42' 59.9102"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E362N427** 38° 22' 17.9432"
Not Monumented (102). 110° 43' 00.4798"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E366N427** 38° 22' 17.9387"
Not Monumented (103). 110° 42' 59.3405"

484.74 Point for the **Witness Point HT-41**, at the projected intersection with the **East-West Center Line** of **Block Number 3**, for the **Hanksville Townsite**.

Corner Point Identity: **E364N428** 38° 22' 19.3394"
Marked (41). 110° 42' 59.9015"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E362N428 2000 1905**.

Corner Point Identity: **E362N428** 38° 22' 19.3416"
New Monument (69). 110° 43' 00.4712"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E366N428** 38° 22' 19.3372"
Not Monumented (104). 110° 42' 59.3318"

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 WEST,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

732.24 Point for the **Witness Point HT-42**, at the projected intersection with the **North Boundary** of **Block Number 3**, and the **South Boundary** of **Main Street**.

Corner Point Identity: **E364N430** 38° 22' 21.7855"
Marked (42). 110° 42' 59.8863"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which a Point for the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E362N430** 38° 22' 21.7877"
Not Monumented (105). 110° 43' 00.4560"

From which a Point for the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E366N430** 38° 22' 21.7833"
Heretofore Described. 110° 42' 59.3165"

777.62 Point for the **Witness Point HT-24**, at the projected intersection with the **Center Line** for **Main Street** and **Center Line** for **Street 100 West**.

Corner Point Identity: **E364N432** 38° 22' 22.2339"
Heretofore Described. 110° 42' 59.8835"

823.00 Point for the **Witness Point HT-43**, at the projected intersection with the **South Boundary** of **Blocks Number 2**, and **North Boundary** of **Main Street**, for the **Hanksville Townsite**.

Corner Point Identity: **E364N434** 38° 22' 22.6824"
Marked (43). 110° 42' 59.8807"

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which a Point for the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **45.38** feet distance.

Corner Point Identity: **E362N434** 38° 22' 22.6846"
Not Monumented (106). 110° 43' 00.4504"

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **45.38** feet distance, with a **Stainless Steel Post**, **2 ½ inches** diameter, at ground level and covered, with **brass cap** marked, **RM HT E366N434 2000 1905**.

Corner Point Identity: **E366N434** 38° 22' 22.6802"
Heretofore Described. 110° 42' 59.3110"

1070.50 Point for the **Witness Point HT-44**, at the projected intersection with the **East-West Center Line** of **Block Number 2**.

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 EAST,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E394N422** **38° 22' 14.9166"**
Not Monumented (113). **110° 42' 44.1861"**

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **107.47** feet distance.

Corner Point Identity: **E388N422** **38° 22' 14.9206"**
Not Monumented (114). **110° 42' 45.2218"**

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **25.00** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E404N422 2000 1905**.

Corner Point Identity: **E404N422** **38° 22' 14.9142"**
New Monument (72). **110° 42' 43.5584"**

164.36 Point for the **Witness Point HT-50**, at the projected intersection with the **North Boundary** of **Block Number 5**, and **South Boundary** for **Street 100 South**.

Corner Point Identity: **E396N423** **38° 22' 15.9345"**
Marked (49). **110° 42' 43.8658"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E394N423** **38° 22' 15.9357"**
Not Monumented (115). **110° 42' 44.1797"**

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E404N423** **38° 22' 15.9333"**
Not Monumented (116). **110° 42' 43.5520"**

From which the **Reference Monument HT**, bears **S. 89° 48' 00" W.**, on **GRID** bearing for **107.47** feet distance.

Corner Point Identity: **E388N423** **38° 22' 15.9397"**
Hereinafter Described. **110° 42' 45.2154"**

189.36 Point for the **Witness Point HT-51**, at the projected intersection with the **Center Line** of **Street 100 South**, and **Center Line** of **Street 100 East**.

Corner Point Identity: **E396N424** **38° 22' 16.1816"**
Marked (50). **110° 42' 43.8643"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

**RESURVEY OF THE NORTH-SOUTH CENTER LINE, OF STREET 100 EAST,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

From which a Point for the **Witness Point HT-67**, bears
S. 89° 48' W., on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E394N424** **38° 22' 16.1828"**
Marked (51). **110° 42' 44.1782"**

At the **Witness Point HT-67**, Set a **PK Nail** with surface of asphalt road.

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on
GRID bearing for **25.00** feet distance.

Corner Point Identity: **E404N424** **38° 22' 16.1804"**
Not Monumented (117). **110° 42' 43.5505"**

214.36 Point for the **Witness Point HT-52**, at the projected intersection
with the **North Boundary** of **Street 100 South**.

Corner Point Identity: **E396N425** **38° 22' 16.4287"**
Marked (52). **110° 42' 43.8627"**

At the **Witness Point**, Set a **PK Nail** with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on
GRID bearing for **25.00** feet distance.

Corner Point Identity: **E394N425** **38° 22' 16.4299"**
Not Monumented (118). **110° 42' 44.1767"**

255.11 Point for the **Witness Point HT-53**, at the projected intersection
with the **South Boundary** of **Block Number 4**.

Corner Point Identity: **E396N426** **38° 22' 16.8314"**
Marked (53). **110° 42' 43.8602"**

At the **Witness Point**, Set a **PK Nail** with surface of asphalt road.

From which the **Reference Monument HT**, bears **S. 89° 48' W.**, on
GRID bearing for **25.00** feet distance.

Corner Point Identity: **E394N426** **38° 22' 16.8326"**
Not Monumented (119). **110° 42' 44.1741"**

From which the **Reference Monument HT**, bears **N. 89° 48' E.**, on
GRID bearing for **25.00** feet distance, Set a **Stainless Steel Post**,
30 inches long, 2 ½ inches diameter, 27 inches in the ground, with
brass cap marked, **RM HT E404N426 2000 1905**.

Corner Point Identity: **E404N426** **38° 22' 16.8302"**
New Monument (73). **110° 42' 43.5463"**

From which the **Reference Monument HT**, bears **S. 89° 48' 00" W.**, on
GRID bearing for **107.47** feet distance.

**RESURVEY OF THE EAST-WEST CENTER LINE, OF STREET 100 SOUTH,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

Corner Point Identity: **E404N439** **38° 22' 27.5112"**
Not Monumented (129). **110° 42' 43.4795"**

1348.47 Point for the **Witness Point HT-61**, at the projected intersection with the **East-West Center Line** of section 15.

Corner Point Identity: **E396N440** **38° 22' 27.6369"**
Not Monumented (130). **110° 42' 43.7924"**

**RESURVEY OF THE EAST-WEST CENTER LINE, OF STREET 100 SOUTH,
WITHIN THE HANKSVILLE TOWNSITE.**

From the **Witness Point HT-09**, at the projected intersection with **Center Line** of **Street 100 South**, and **Center Line** of **Center Street**.

Corner Point Identity: **E376N424** **38° 22' 16.2152"**
Heretofore Described. **110° 42' 52.5672"**

N. 89° 48' 00" E., on a **GRID** bearing projected along the **Center Line** of **Street 100 South**.

045.38 Point for the **Witness Point HT-62**, at the projected intersection with the **East Boundary** of **Center Street** and the **West Boundary** of **Block Number 4**.

Corner Point Identity: **E378N424** **38° 22' 16.2130"**
Marked (61). **110° 42' 51.9975"**

At the **Witness Point**, Set a **PK Nail** with surface of asphalt road.

From which a point for the **Reference Monument HT**, bears **S 00° 12' E.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E378N423** **38° 22' 15.9659"**
Heretofore Described. **110° 42' 51.9990"**

From which a Point for the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E378N425** **38° 22' 16.4601"**
Heretofore Described. **110° 42' 51.9959"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **65.75** feet distance.

Corner Point Identity: **E378N426** **38° 22' 16.8628"**
Heretofore Described. **110° 42' 51.9934"**

292.88 Point for the **Witness Point HT-63**, at the projected intersection with the **North-South Center Line** of **Block Number 4**.

**RESURVEY OF THE EAST-WEST CENTER LINE, OF STREET 100 SOUTH,
WITHIN THE HANKSVILLE TOWNSITE.**

FEET

From which a Point for the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E388N425** **38° 22' 16.4339"**
Not Monumented (135). **110° 42' 45.2123"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **65.75** feet distance, Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked, **RM HT E388N426 2000 1905**.

Corner Point Identity: **E388N426** **38° 22' 16.8366"**
New Monument (78). **110° 42' 45.2097"**

627.00 Point for the **Witness Point HT-66**, at the projected intersection with the **Center Line** for **Canal Easement**.

Corner Point Identity: **E390N424** **38° 22' 16.1848"**
Marked (65). **110° 42' 44.6960"**

At the Witness Point, Set a PK Nail with surface of asphalt road.

668.25 Point for the **Witness Point HT-67**, at the projected intersection with the **East Boundary** of **Canal Easement**, and **West Boundary** of **Street 100 East**.

Corner Point Identity: **E394N424** **38° 22' 16.1828"**
Heretofore Described. **110° 42' 44.1782"**

From which the **Reference Monument HT**, bears **S. 00° 12' E.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E394N423** **38° 22' 15.9357"**
Heretofore Described. **110° 42' 44.1797"**

From which a Point for the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **25.00** feet distance.

Corner Point Identity: **E394N425** **38° 22' 16.4299"**
Heretofore Described. **110° 42' 44.1767"**

From which the **Reference Monument HT**, bears **N. 00° 12' W.**, on **GRID** bearing for **65.75** feet distance.

Corner Point Identity: **E394N426** **38° 22' 16.8326"**
Heretofore Described. **110° 42' 44.1741"**

693.25 Point for the **Witness Point HT-51**, at the projected intersection with the **Center Line** of **Street 100 East**, which is 50 feet wide and bears **N. 00° 12' W.**, and **S. 00° 12' E.**

Corner Point Identity: **E396N424** **38° 22' 16.1816"**
Heretofore Described. **110° 42' 43.8643"**

**LAND DESCRIPTION CORRECTION FOR LAND PARCELS
WITHIN THE TOWNSITE OF HANKSVILLE UTAH.**

FEET

718.25 Point for the **Reference Monument HT**, at the intersection with the East Boundary of Street 100 East.

Corner Point Identity: **E404N424** 38° 22' 16.1804"
Heretofore Described. 110° 42' 43.5505"

**LAND DESCRIPTION CORRECTION
FOR THE FOLLOWING LAND PARCELS
WITHIN THE TOWNSITE OF HANKSVILLE UTAH**

BLOCK: (4)	LOT: (1)	PARCEL: (H-13-1)
BLOCK: (4)	LOT: (1)	PARCEL: (H-13-2)
BLOCK: (4)	LOT: (2)	PARCEL: (H-14-1)

Beginning at the **Initial Point HT-18**, for the intersection of **Center Line** of **Main Street**, and the **Center Line** of **Center Street**, located within the Townsite of Hanksville, Utah.

Corner Point Identity: **E376N432** 38° 22' 22.2055"
Heretofore Described. 110° 42' 52.5298"

S. 00° 12' 00" E., on a **GRID** bearing projected along the Center Line of Center Street.

292.88 Point for the **Witness Point HT-14**, at the projected intersection with **East-West Center Line** of **Block Number 4**.

Corner Point Identity: **E376N428** 38° 22' 19.3110"
Heretofore Described. 110° 42' 52.5479"

N. 89° 48' 00" E., beginning new measurement on a **GRID** bearing projected along **East-West Center Line** of **Block 4**.

045.38 The **Reference Monument** for **Witness Point HT-14**, and corner for Parcels (H-14-1) and (H-15-1) within Block Number 4.

Corner Point Identity: **E378N428** 38° 22' 19.3088"
Heretofore Described. 110° 42' 51.9782"

292.88 Point for the **Reference Monument HT**, to Lots 1, 2, 3, and 4, of **Block Number 4**, as depicted on the **Supplemental and Addendum Survey Plat**, approved June 23, 2000.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked,
RM HT E382N428 2000 1905.

Corner Point Identity: **E382N428** 38° 22' 19.2968"
New Monument (79). 110° 42' 48.8711"

**LAND DESCRIPTION CORRECTION FOR LAND PARCELS
WITHIN THE TOWNSITE OF HANKSVILLE UTAH.**

FEET

392.88 Point for the **Reference Monument HT**, to parcels
(H-13-1) (H-13-2) and (H-16), within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
27 inches in the ground, with brass cap marked,
RM HT E384N428 2000 1905.

Corner Point Identity: E384N428	38° 22' 19.2919"
New Monument (80).	110° 42' 47.6157"

540.38 Point selected for the **Witness Corner to Reference Monument HT**,
Lots 1 and 4, on East boundary of **Block Number 4**, as depicted on
the **Supplemental and Addendum Survey Plat, approved June 23, 2000.**

At the Witness Corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
27 inches in the ground, with brass cap marked,
WC RM HT E386N428 2000 1905.

Corner Point Identity: E386N428	38° 22' 19.2847"
New Monument (81).	110° 42' 45.7640"

585.75 True Point for the **Reference Monument HT**, to Lots 1, and 4, on the
East boundary of Block Number 4, falls in Canal stream flow and
dense undergrowth where it is impracticable to establish a
permanent monument due to danger of destruction by further erosion
of canal bank.

Corner Point Identity: E388N428	38° 22' 19.2826"
Not Monumented (136).	110° 42' 45.1944"

N. 00° 12' 00" W., beginning new measurement on a **GRID** bearing
projected along the **East Boundary of Block 4.**, and the **West
Boundary of Canal Easement.**

136.00 True Point for the **Reference Monument HT**, to Parcels,
(H-13) and (H-13-1) and the East boundary of Block Number 4,
falls in Canal stream flow and dense undergrowth where it is
impracticable to establish a permanent monument due to danger of
destruction by further erosion of canal bank.

Corner Point Identity: E388N429	38° 22' 20.6267"
Not Monumented (137).	110° 42' 45.1860"

S. 89° 48' 00" W., beginning new measurement on a **GRID** bearing
projected along boundary between parcels (H-13) and (H-13-1)
within Block 4.

**LAND DESCRIPTION CORRECTION FOR LAND PARCELS
WITHIN THE TOWNSITE OF HANKSVILLE UTAH.**

FEET

045.37 Point selected for the **Witness Corner** to **Reference Monument HT**,
Parcels (H-13) and (H-13-1), on East boundary of Block Number 4

At the Witness Corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
27 inches in the ground, with brass cap marked,
WC RM HT E386N429 2000 1905.

Corner Point Identity: **E386N429** **38° 22' 20.6288"**
New Monument (82). **110° 42' 45.7556"**

192.87 Point for the **Reference Monument HT**, to parcels
(H-13)(H-13-1) and (H-13-2) within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
27 inches in the ground, with brass cap marked,
RM HT E384N429 2000 1905.

Corner Point Identity: **E384N429** **38° 22' 20.6360"**
New Monument (83). **110° 42' 47.6073"**

292.87 Point for the **Reference Monument HT**, to parcels (H-13)
(H-13-2) (H-14) and (H-14-1), within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27
inches in the ground, with brass cap marked,
RM HT E382N429 2000 1905.

Corner Point Identity: **E382N429** **38° 22' 20.6409"**
New Monument (84). **110° 42' 48.8627"**

S. 00° 12' 00" E., beginning new measurement on a **GRID** bearing
projected along the North-South Center Line for Block 4.

040.00 Point for the **Reference Monument HT**, to Parcels
(H-13-2) (H-14) and (H-14-1), within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter,
27 inches in the ground, with brass cap marked,
RM HT E382*S429 2000 1905.

Corner Point Identity: **E382*S429** **38° 22' 20.2456"**
New Monument (85). **110° 42' 48.8652"**

S. 89° 48' 00" W., beginning new measurement on a **GRID** bearing
projected along the boundary between parcels
(H-14) and (H-14-1) within Block 4.

**LAND DESCRIPTION CORRECTION FOR LAND PARCELS
WITHIN THE TOWNSITE OF HANKSVILLE UTAH.**

FEET

050.00 Point for the **Reference Monument HT**, to Parcels (H-14) and (H-14-1), within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked,
RM HT E381S429 2000 1905.

Corner Point Identity: E381*S429	38° 22' 20.2480"
New Monument (86).	110° 42' 49.4929"

N. 00° 12' 00" W., beginning new measurement on a **GRID** bearing projected along the boundary between parcels (H-14) and (H-14-1) within Block 4.

040.00 Point for the **Reference Monument HT**, to Parcels (H-14) and (H-14-1) within Block Number 4.

At the corner point.

Set a Stainless Steel Post, 30 inches long, 2 ½ inches diameter, 27 inches in the ground, with brass cap marked,
RM HT E381N429 2000 1905.

Corner Point Identity: E381N429	38° 22' 20.6433"
New Monument (87).	110° 42' 49.4904"

S. 89° 48' 00" W., beginning new measurement on a **GRID** bearing projected along the boundary between parcels (H-14) and (H-14-1) within Block 4.

197.50 The **Reference Monument** for **Witness Point HT-16**, and the corner for Parcels (H-14) and (H-14-1), within Block Number 4.

Corner Point Identity: E378N429	38° 22' 20.6529"
Heretofore Described.	110° 42' 51.9698"

S. 00° 12' 00" E., beginning new measurement on a **GRID** bearing projected along the boundary between parcel (H-14-1) and **East Boundary of Center Street.**

136.00 The **Reference Monument** for **Witness Point HT-14**, and the corner for Parcels (H-14-1) and (H-15-1), within Block Number 4.

Corner Point Identity: E378N428	38° 22' 19.3088"
Heretofore Described.	110° 42' 51.9782"

From the **Reference Monument HT**, to Lots 1, 2, 3, and 4, of **Block Number 4**, as depicted on the **Supplemental and Addendum Survey Plat**, approved June 23, 2000.

GENERAL DESCRIPTION

Hanksville is a small settlement adjacent to the Fremont River. By air miles it is fifty miles due East of Loa; the County Seat for Wayne County, or seventy-five miles as traveled by road. Originally it was known as Graves Valley, named after John Graves who is said to have been a member of one of the Powell exploring expeditions. Graves was definitely not with the first party which sailed down the Colorado River in 1869. People of Hanksville have a legend concerning Graves. He lived the life of a hermit and raised a large band of horses. Eventually a prospector by the name of Cass Hite joined Graves as a partner. Their prospecting grounds was around Mount Pennel in the middle of the Henry Mountains. Hite soon became discouraged at having little success at prospecting and followed the Colorado River down to a hamlet that now bears his name. Graves mysteriously faded from the picture and has since been referred to as the ghost of Mount Pennel.

In the summer of 1881 Ebenezer Hanks, the man for whom the town is named, made a trip from his home in Belview, Iron County, to Sevier Valley Utah. There he met A.K. Thurber, who told him of a valley lying North of the Henry Mountains, which contained considerable grass land. Hanks was interested and returned to his home, there by persuaded several families to come with him to Graves Valley. In the first group were Ebenezer Hanks and family, Mr. Mrs. Charles Goald, Samuel Goald and family, E.H. McDougall and family and Joe Sylvester. Having gathered at Parowan, Utah they left for their destination about March 10, 1882, and arrived in Hanksville April first of that year. When they reached the head of the Fremont River they followed it down to Blue Valley. From there they went South-East about eight miles to avoid crossing the river so many times, then turned North again to the river.

Soon after the Hanks company came, David King, William Bacon, Henry Rich, Ira Sutton, and Peter Brown arrived. During the ten years that followed, the Stuarths, Stoddards, Gibbons, Rusts, Mechams, Ekkers, Frank Weber, Reed Hall, Turners, and others came. Later some of these settlers moved away, but others took their places; Robinson, Hunts, Elijah Maxfield, Noyes, Johnson, Wyllie, Wells, Marsing, Rees and Brown.

After the settlers entered the valley they built log homes and located farms along the river where water could be obtained for irrigation. Peter Brown engineered the first dam to help supplement the needed water. N. J. Nielson built a number of houses and community buildings made of adobe and rock construction. In about 1892 a vein of gold was discovered on the East side of the Henry Mountains and since that time the region has been explored many times over in hopes of finding rich ore.

There were lots of wild cattle, deer, and antelope as the Blue Valley was settled, and from 1895 to 1930 many sheep and cattle were wintered in the territory around the Henry Mountains. Some of the sheep were owned by men from Sanpete and Emery Counties. All of the livestock operators needed supplies for their camps and grain and hay for their horses. Most of the Blue Valley settlers and livestock operators depended largely on Hanksville for getting supplies. The Anderson Brothers built the first store in Hanksville in 1893, and at a later date sold their business to Charles Gibbons. Others who followed in the mercantile and freighting business was William Rust, John G. Ekker, Elijah Maxfield, Fred Webster, Martha McDougall, Cornelius Ekker, Larry Cheskotty, Guy Robison, and Daryis Ekker.

For many years Frank J. Weber and wife kept a hotel, and boarded school teachers for the community of Blue Valley. The only Motel and service station was operated by Reo Hunt until 1950, when other business started to be established.

GENERAL DESCRIPTION

For many years the people of Hanksville depended upon the river for culinary water and irrigation. In the middle thirties the Government financed the drilling of a well under the Rehabilitation Act for the town of Hanksville. This first well resulted in the flow of good water for culinary purposes, and since that time two other wells have been drilled in the town, along with two at the airport.

During the years since Hanksville was settled, the community has had mail service most of the time over two routes. One from Greenriver and the other from the upper part of the county in the direction of Loa. Postmasters who have served the community are: Ebeneazer McDougall, Roxanna Hall, Martha McDougall, Nina Robison, Minnie Wells, Edith Marsing, and Annetta Noyes, whose daughter, Ida M. Weber contributed the historical information for this general description of Hanksville.

MONUMENTATION SUMMATION

NUMBER OF ORIGINAL MONUMENTS:	[044]
NUMBER OF ADDITIONAL MONUMENTS:	[087]
NUMBER OF IDENTIFIED MARKED CORNERS:	[065]
NUMBER OF CORNERS NOT MONUMENTED:	[137]
TOTAL NUMBER OF CORNER POINTS:	[333]
TOTAL NUMBER OF RE-SURVEY MILES:	[40.43]
TOTAL NUMBER ACRES WITHIN SIX SECTIONS:	[3,840]

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


Name	Capacity
Ronald Baugh	Cadastral Surveyor
Ross Workman	Cadastral Surveyor
Jerry Thomas	Cadastral Surveyor
Larry Judd	Cadastral Surveyor
Ferrel Reynolds	Cadastral Surveyor
Gregg Ostergaard	Surveying Technician

CERTIFICATE OF SURVEY

I, Frank C. Profaizer, Cadastral Surveyor, hereby certify upon honor that, in pursuance of Special Instructions bearing the date of the 20th day of August, 1998, I have executed a Dependent Resurvey of sections 15, 16, 17, 20, 21, and 22, and the subdivision lines of sections 15, 16, 17, 20, 21, and 22, along with the segregation of Hanksville Townsite, within the North-East One Quarter, of the South-East One Quarter of Section 16, of Township 28 South, Range 11 East, of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 13, 2002

Date

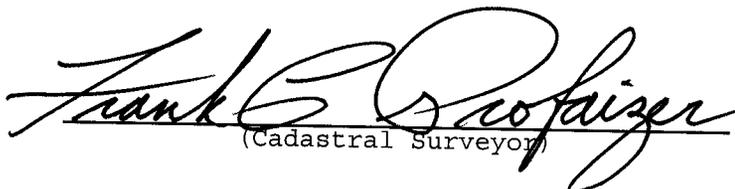

(Cadastral Surveyor)

Date

(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the Dependent Resurvey of sections 15, 16, 17, 20, 21, and 22, and the subdivision lines of sections 15, 16, 17, 20, 21, and 22, along with the segregation of Hanksville Townsite, within the North-East One Quarter, of the South-East One Quarter in Section 16, of Township 28 South, Range 11 East, executed by Frank C. Profaizer, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

August 28, 2002

Date



(Chief Cadastral Surveyor for Utah)

(Chief Cadastral Surveyor for Utah)