

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS

21, 22, AND 27,

AND

THE SURVEY OF CERTAIN LOTS,

AND

THE SURVEY OF CERTAIN PARCELS

IN

SECTIONS 21, 22, AND 27

IN

TOWNSHIP 24 SOUTH, RANGE 23 EAST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Larry V. Judd
Cadastral Surveyor

Under special instructions dated **December 20, 2001**, approved **December 20, 2001**, and amended special instructions dated **September 1, 2005**, which provided for the surveys included under Group Number **940**, and assignment instructions dated **May 20, 2002**.

Survey commenced **August 26, 2002**
Survey completed **November 4, 2005**

INDEX DIAGRAM

Township 24 South, Range 23 East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16 15	15 11	14	13
19	20 13	21 12	9 22 6	4 23 3	24
30	29	28	8 27 5	4 26	25
31	32	33	34	35	36

The Subdivision of Section 21.....Page 16
 The Subdivision of Section 22.....Page 19
 The Subdivision of Section 27.....Page 23
 The Survey of Lots.....Page 30
 The Survey of Parcels 1 - 4.....Page 34

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections, 21, 22 and 27, the survey of lot 2 in section 21, lots 2 and 3 in section 22, lot 5 in section 27, and the survey of parcels 1 - 4, in sections 21, 22 and 27, in T. 24 S., R. 23 E., Salt Lake Meridian, Utah.

History of Surveys

Surveyed by		Retr. or Resurveyed by		
SOUTH BOUNDARY				
All	E. Buettner	1880		
All			D.B. Clement	1915
EAST BOUNDARY (Grand River Guide Meridian)				
All	E. Buettner	1880		
Portion			D.B. Clement	1915
WEST BOUNDARY				
Portion	D.B. Clement	1915		
Portion	Moore & Yundt	1928		
NORTH BOUNDARY				
Portion	E. Buettner	1880		
All	Moore & Yundt	1928-30	Moore & Yundt	1928-1930
SUBDIVISION				
Portion	E. Buettner	1880		
Portion	D.B. Clement	1915	D.B. Clement	1915
Portion	Moore & Yundt	1931	Moore & Yundt	1931
PRIVATE SURVEYS				

A survey was executed in sections 22 and 27 by John E. Keogh RLS No. 1963, with plat dated July 1976 and November 1982.

A survey was executed in sections 21 and 22 by Keogh Land Surveying RLS NO. 7692, with plat dated 6/11/92. (Wilson and Chernushin Property)

A survey was executed in sections 22 and 27 by Keogh Land Surveying RLS No. 7692, with plat dated 8/4/92. (Professor Valley Ranch Property)

A survey was executed in section 22 by Keogh Land Surveying, RLS No. 171004, with plat dated 2/23/98. (Professor Valley Ranch Property)

T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 940, dated December 20, 2001, and amended Special Instructions dated September 1, 2005.

The direction of the lines were determined by references to true meridians, established by the Global Positioning System (GPS) utilizing Real-time kinematic (RTK) techniques throughout the survey. Trimble Model 4700 global positioning system receivers and Pacific Crest radios were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

The purpose of this survey was to define the boundaries of parcels of land, to help facilitate a land exchange between the owners of Professor Valley Ranch and the Bureau of Land Management. Lot 2 in section 21, lots 2 and 3 in section 22, and lot 5 in section 27 are under federal ownership and Parcels 1 - 4, are under ownership by Professor Valley Ranch. The survey of Parcels 1 - 4, was necessary to determine parcel descriptions and acreages. The survey of the parcels can be found within the body of these notes.

Geodetic control was derived from National Geodetic Survey CBN Station "CISCO", with the published data as follows:

Latitude: 38° 57'33.75428" N. Longitude: 109° 18'10.53294" W.
N.A.D. 1983 (1994), N.A.V.D. 1988, 4451 Ft.

The geographic position of the corner of sections 26, 27, 34 and 35, T. 24 S., R 23 E., as determined by a tie to National Geodetic Survey CBN Station "CISCO", is as follows:

Latitude: 38° 40'50.482" N. Longitude: 109° 21'09.646" W.
N.A.D. 1983.

TOWNSHIP 24 SOUTH, RANGE 23 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

Reestablishment of the Survey executed by E. Buettner in 1880,
and the Resurvey executed by D. B. Clement in 1915

Beginning at the 1/4 section corner of sections 23 only,
monumented with an iron post, 1 inch diameter, firmly set in a
mound of stone, 3 ft. by 2 ft. base, with the brass cap marked
as described in the official record of the resurvey executed
by D. B. Clement in 1915.

The monument falls on top of a rocky finger ridge, bears NW
and SE.

S. 89° 49.5' W., on the south boundary of section 23.

- 39.085** The closing corner of sections 26 and 27, monumented with an
iron post, 2 inches diameter, firmly set in a mound of stone,
with the brass cap marked as described in the official record
of the survey executed by D.B. Clement in 1915.

Raise a mound of stone around the post, 4 ft. by 3 ft. base to
a point 8 inches below the top of the brass cap.

The monument falls on a moderate rocky NE slope.

- 40.158** The corner of sections 22 and 23 only, monumented with an iron
post, 2 inches diameter, loosely set projecting 20 inches
above ground in a small mound of stone, with the brass cap
marked as described in the official record of the resurvey
executed by D. B. Clement in 1915.

Raise a mound of stone around the post, 3 ft. by 3 ft. base
to a point 8 inches below the top of the brass cap.

The monument falls on a gradual east rocky slope near the top
of the ridge.

Reestablishment of the Survey executed by D. B. Clement in 1915

From the corner of sections 26, 27, 34 and 35, monumented with
an iron post, 2 inches diameter, loosely set, projecting 30
inches above ground, with the brass cap marked as described in
the official record of the survey executed by D.B. Clement in
1915.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Reset the post to project 16 inches above the ground, set in a small mound of stone, 2 ft. by 2 ft. base to a point 10 inches below the top of the brass cap.

The monument falls on top of a finger ridge, on a gradual SW slope, bears NW and SE.

N. 0° 16.0' W., between sections 26 and 27.

- 40.019** The 1/4 section corner of sections 26 and 27, monumented with an iron post, 1 inch diameter, firmly set in a mound of stone, 4 ft. by 4 ft. base, with the brass cap marked as described in the official record of the survey executed by D. B. Clement in 1915.

The monument falls on a gradual rocky north slope, 12 feet east of the center of a dirt trail road, 8 feet wide, bears N. 33° E., and S. 33° W., and also falls 21 feet west of another dirt trail road, 8 feet wide, bears N. 30° E., and S. 30° W.

N. 0° 06.3' W., beginning new measurement.

- 19.909** Point for the N 1/16 section corner of sections 26 and 27, not monumented.
- 39.161** The closing corner of sections 26 and 27, hereinbefore described.

Reestablishment of the Survey Executed by E. Buettner in 1880

From the corner of sections 22 and 23 only.

N. 0° 43.5' E., between sections 22 and 23.

- 40.108** Point for the 1/4 section corner of sections 22 and 23 at proportionate distance, no remaining evidence of the original corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
1/4
S22|S23
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Raise a mound of stone, 4 ft. by 2 ft. base by 1 ft. high to the west of the aluminum post.

The monument falls on an open gradual northwesterly slope.

- 80.216** The corner of sections 14, 15, 22 and 23, monumented with a galvanized rod, 1 1/2 inches diameter, firmly set, projecting 14 inches above solid sandstone, with a sandstone, 16x16x8 inches, plainly marked with 3 grooves on the south edge and 2 grooves on the east edge, lying alongside the galvanized rod. This monument is accepted as the best available evidence of the position of the original section corner, with the original marked stone placed alongside.

At the corner point

Set an aluminum post, cut off to 20 inches in length, 2 1/2 inches diameter, set over the top of the galvanized rod in a mound of stone, 4 ft. by 4 ft. base to the top of the aluminum cap marked:

T24SR23E	
S15	S14
S22	S23
2002	

Deposit the marked stone on the north side of the aluminum post in the mound of stone.

The monument is set on the southerly side of the top of a ridge, bears NW and SE.

From this corner, National Geodetic Survey Cooperative Base Network station "CISCO", monumented with a standard disk set in the top of a square topped concrete post, stamped CISCO - 1937, bears, N. 8° 51'05" E., forward bearing and S. 8° 52'58" W., back bearing, 1395.51 chains distance.

Reestablishment of the Survey executed by D. B. Clement in 1915

From the corner of sections 26, 27, 34 and 35.

N. 89° 50.0' W., between sections 27 and 34.

- 39.966** The 1/4 section corner of sections 27 and 34, monumented with an iron post, 1 inch diameter, firmly set in a scattered mound of stone, projecting 20 inches above ground, with the brass cap marked as described in the official record of the survey executed by D.B. Clement in 1915.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Raise a mound of stone around the post, 3 ft. by 3 ft. base, to a point 12 inches below the top of the brass cap.

The monument falls in rolling hills, dissected with small washes in scattered juniper growth.

N. 89° 54.6' W., beginning new measurement.

39.705 The corner of sections 27, 28, 33 and 34, monumented with an iron post, 2 inches diameter, firmly set, projecting 20 inches above ground, with a small mound of stone to the west and with the brass cap marked as described in the official record of survey executed by D.B. Clement in 1915.

Raise a mound of earth and rocks around the post to a point 10 inches below the top of the brass cap.

The monument falls on an open gradual NE slope.

Reestablishment of the Survey executed by E. Buettner in 1880, and the Resurvey executed by D. B. Clement in 1915

From the corner of sections, 22 and 23 only.

S. 89° 49.0' W., on the south boundary section 22.

18.850 The E 1/16 section corner of section 27 only, monumented with a rebar, 3/4 inch diameter, firmly set, with no identifying cap or tag attached. This monument is accepted as a faithful and careful determination of the E 1/16 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

E 1/16 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar inside the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high to the north of the aluminum post.

The corner falls on the east side of a vertical railroad tie, which is the corner of fences, projecting south and west.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

with continuous measurement.

32.942 Point for an Angle Point, Corner No. 1 of Lot 3 in section 22, hereinafter described.

38.773 Point for the 1/4 section corner of section 27 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with the aluminum cap marked:

T24SR23E

1/4 S27

2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.70 feet east of the aluminum post.

The monument falls in the SE corner of an alfalfa field, 27 feet west and 30 feet south of the edges of the field.

40.138 Point for the 1/4 section corner of section 22 only, at proportionate distance, no remaining evidence of the original iron post was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches below ground, with the aluminum cap marked:

T24SR23E

1/4 S22

2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

The monument falls in an alfalfa field.

58.696 Point for the W 1/16 section corner of section 27 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 14 inches below ground, with the aluminum cap marked:

W 1/16 S27

2002

The monument falls in an alfalfa field.

60.207 Point for the W 1/16 section corner of section 22 only, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 67.001** Point for an Angle Point, Corner No. 1 of Lot 5 in section 27, identical with Corner No. 1 of Parcel No. 2, in section 22, hereinafter described.
- 78.619** True point for the closing corner of sections 27 and 28, not monumented.
- 80.276** The corner of sections 21 and 22 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 5 inches above ground, with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915.

The monument is set in a collar of stone, in rolling hills.

Reestablishment of the Survey executed by D. B. Clement in 1915

From the corner of sections 27, 28, 33 and 34.

N. 0° 11.5' W., between sections 27 and 28.

- 40.187** The 1/4 section corner of sections 27 and 28, monumented with an iron post, 1 inch diameter, firmly set, projecting 20 inches above ground, with the brass cap marked as described in the official record of the survey executed by D.B. Clement in 1915.

Raise a mound of stone around the post, 4 ft. by 4 ft. base to a point 8 inches below the top of the brass cap.

The monument falls on top of a low ridge, bears NW and SE.

N. 0° 14.5' W., beginning new measurement.

- 19.890** Point for the N 1/16 section corner of sections 27 and 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

N 1/16
S28|S27
2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Raise a small mound of stone to the west of the aluminum post.

The monument falls on a moderate NW slope, 8 feet north of the top of a ridge, bears E and W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 38.556** The monumented position for the closing corner of sections 27 and 28, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above ground, set in a collar of stone, with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915. Add the marks AM, 2002 to the brass cap.

The monument falls on flat sandy ground.

- 38.564** True point for the closing corner of sections 27 and 28, hereinbefore described.

Reestablishment of the Survey executed by E. Buettner in 1880

From the corner of sections 21 and 22 only.

N. 0° 15.5' E., between sections 21 and 22.

- 10.126** Point for an Angle Point, Corner No. 1 of Lot 2 in section 21, identical with Corner No. 3 of Parcel No. 2, in section 22, hereinafter described.

- 20.156** The S 1/16 section corner of sections 21 and 22, monumented with a galvanized rod, 1 inch diameter, firmly set alongside a steel fence post, with no identifying cap or tag. This monument is accepted as a careful and faithful determination of the S 1/16 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

S 1/16
S21|S22
2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Deposit the galvanized rod alongside the aluminum post.

Reset the steel fence post on the north side of the aluminum post.

The monument falls on the northerly edge of an alfalfa field, bears N. 60° E., and S. 60° W.

with continuous measurement

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.312** The 1/4 section corner of sections 21 and 22, monumented with a galvanized rod, 1 inch diameter, firmly set, projecting 6 inches above ground, set in the center of a scattered mound of stone, with no cap or identifying tag attached. This monument is accepted as a careful and faithful reestablishment of the 1/4 section corner by proportionate measurement. No remaining evidence of the original marked stone was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
1/4
S21|S22
2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base by 1 ft. high to the west of the aluminum post.

Deposit the galvanized rod, within the mound of stone.

Set a steel fence post 0.60 ft. north of the aluminum post.

The monument falls on flat sandy ground, 21 feet west of a fence line, projecting north and south.

N. 0° 16.8' E., beginning new measurement.

- 20.154** Point for the N 1/16 section corner of sections 21 and 22.

Set a steel T post, 48 inches long, driven 42 inches in the ground, with an aluminum post, 30 inches long, 2 1/2 inches diameter, set over the top of the T post, leaving 6 inches of the aluminum post above ground, with the aluminum cap marked:

N 1/16
S21|S22
2002

Set a steel fence post, 0.30 feet south of the aluminum post.

Raise a small mound of stone SE of the aluminum post.

The monument falls in the bottom of a drainage, 20 feet wide, 3 feet deep, set on the northerly side of the drainage, drains N. 50° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the monument, a corner of fences, projecting east, west and north, bears N. 35° E., 5.5 feet distance.

- 40.308** The corner of sections 15, 16, 21 and 22, monumented with an iron rod, 1 1/2 inches diameter, firmly set, projecting 4 inches above ground, set in a scattered mound of stone, with no identifying cap or tag attached to the rod. This monument is accepted as the best available evidence of the position of the original section corner. No remaining evidence of the original marked stone was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, set over the top of the iron rod, 24 inches in the ground, with the aluminum cap marked:

T24SR23E

S16	S15
S21	S22

 2002

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high to the north.

The monument falls, N. 45° E., 1.5 feet from the corner of fences, projecting, north and east.

From the corner of sections 14, 15, 22 and 23.

N. 89° 53.6' W., between sections 15 and 22.

- 39.973** The 1/4 section corner of sections 15 and 22, monumented with a galvanized pipe, 1 inch diameter, firmly set, projecting 8 inches above ground, set in the center of a small mound of stone, with no identifying cap or tag attached to the pipe. A sandstone, 16x8x4 inches dimly marked 1/4, was found lying loose alongside the galvanized pipe. The galvanized pipe monument is accepted as the best available evidence of the position of the original 1/4 section corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T24SR23E
S15
1/4 ———
S22
2002

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Deposit the galvanized rod, inside the aluminum post.

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high to the north of the aluminum post.

The monument falls on a gradual SW slope in brush undergrowth.

N. 89° 53.3' W., beginning new measurement.

20.461 Point for the W 1/16 section corner of sections 15 and 22, not monumented.

40.922 The corner of sections 15, 16, 21 and 22.

Reestablishment of the Survey executed by E. Buettner in 1880,
and the Resurvey executed by D. B. Clement in 1915

From the corner of sections 21 and 22 only.

N. 89° 30.3' W., on the south boundary of section 21.

19.958 Point for the E 1/16 section corner of section 21 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 5 inches in the ground, set in a mound of stone, 5 ft. by 4 ft. base, to top of the aluminum cap marked:

E 1/16 S21
—————
2002

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

The monument falls on a rocky gradual SW slope, near the top of a ridge, set in ledges.

38.136 Point for the 1/4 section corner of section 28 only, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.916** The 1/4 section corner of section 21 only, monumented with an iron post, 1 inch diameter, loosely set in a small mound of stone, projecting 24 inches above solid rock, with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915.

Reset the iron post an additional 4 inches in the ground, in a mound of stone, 4 ft. by 4 ft. base, to a point 12 inches below the top of the brass cap.

The monument falls at the most easterly point at the top of a spur ridge, on the edge of steep decent to the east.

N. 89° 30.5' W., beginning new measurement

- 38.013** From this point, the closing corner of sections 28 and 29 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 20 inches above ground, with the brass cap marked as described in the official record of the survey executed by D.B. Clements in 1915, bears south 0.060 chains distance.

Raise a mound of stone around the post, 4 ft. by 4 ft. base to a point 8 inches below the top of the brass cap.

- 40.055** The SW corner of section 21, monumented with an iron post, 2 inches diameter, loosely set and rusted off with 22 inches of the post remaining, projecting 16 inches above ground, with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915.

Reset the post to project 4 inches above ground and raise a mound of stone, 3 ft. by 3 ft. base by 1 ft. high, east of the iron post.

The monument falls on a gradual NW slope.

N. 0° 10.1' W., on the west boundary of section 21.

- 1.338** The closing corner of sections 20 and 29, monumented with an iron post, 2 inches diameter, loosely set in a small mound of stone, set on solid rock, with the brass cap marked as described in the official record of the survey executed by D.B. Clement in 1915.

Raise a mound of stone, around the post, 4 ft. by 4 ft. base to a point 10 inches below the top of the brass cap.

The monument falls in the bottom of a drainage, approximately 100 ft. wide, drains N. 60° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.370** The 1/4 section corner of section 21 only, monumented with an iron post, 1 inch diameter, loosely set, projecting 28 inches above the ground, with a large mound of stone to the west, and with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915.

Reset the post, 16 inches in the ground, in a mound of stone, 3 ft. by 3 ft. base, to a point 6 inches below the top of the brass cap.

The monument falls on a gradual to moderate rocky SW slope.

N. 0° 01.6' W., beginning new measurement.

- 0.857** Point for the 1/4 section corner of section 20 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
1/4
S20|
2002

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base by 1 ft. high to the west of the aluminum post.

Set a steel fence post, 0.50 ft. north of the aluminum post.

The monument falls on a very steep north slope, south of Utah State Road No 128.

- 40.207** The corner of sections 16 and 21 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 16 inches above ground, with the brass cap marked as described in the official record of the resurvey executed by D.B. Clement in 1915.

The monument falls 3 feet north of the edge of a unstable vertical bank, 10 feet high, and 16 feet south of the corner of fences, projecting north and east.

From this corner, the closing corner of sections 17 and 20, bears N. 0° 12.5' W., 0.539 chains distance, monumented with an iron post, 2 inches diameter, firmly set, projecting 12 inches above the ground, with the brass cap marked as described in the official record of the survey executed by D. B. Clement in 1915.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

The monument falls on flat sandy ground, in a fence line projecting north and south.

Reestablishment of the Survey executed by E. Buettner in 1880

From the corner of sections 15, 16, 21 and 22.

N. 89° 32.4' W., between sections 16 and 21.

- 20.117** The E 1/16 section corner of sections 16 and 21, monumented with a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above ground, with a 1 1/2 inches diameter, aluminum cap attached and marked UTAH RLS 1963. This monument is accepted as a careful and faithful determination of the E 1/16 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

S16
E 1/16 ———
S21
2002

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar and cap inside the aluminum post.

The monument falls N. 45° W., 1.3 feet from the corner of fences, projecting south and east.

with continuous measurement

- 40.234** The 1/4 section corner of sections 16 and 21, monumented with a rod, 1 inch diameter, firmly set, projecting 12 inches above ground, in a scattered mound of stone. No identifying cap or tag was found attached to the rod. This monument is accepted as the best available evidence of the 1/4 section corner by proportionate measurement. No remaining evidence of the original marked stone was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T24SR23E
S16
1/4 ———
S21
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rod inside the aluminum post.

Raise a mound of stone, 2 ft. by 1 ft. base by 1/2 ft. high to the south of the aluminum post.

The monument falls on flat open ground, in a new fence line, projecting east and west.

N. 89° 32.3' W., beginning new measurement.

40.237 The corner of sections 16 and 21 only.

The Subdivision of Section 21
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the 1/4 section corner of section 21 only, on the south boundary of the section.

N. 0° 02.2' E., on the N - S centerline of section 21.

20.170 Point for the center S 1/16 section corner of section 21, not monumented.

40.340 Point for the center 1/4 section corner at intersection with the E - W centerline of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
C1/4
S21
2002

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, SE of the aluminum post.

The monument falls on a gradual NW slope, dissected with washes, set on the edge of a shallow wash, drains NW.

THE SUBDIVISION OF SECTION 21
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

60.469 Point for the center N 1/16 section corner of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C
N1/16|S21
C
2002

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high to the west of the aluminum post.

The monument falls on top of a flat low rising hill.

80.598 The 1/4 section corner of sections 16 and 21.

From the 1/4 section corner of sections 21 and 22.

N. 89° 28.0' W., on the E - W centerline of section 21.

20.034 Point for the center E 1/16 section corner of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

E 1/16
C ——— C
S21
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.30 feet east of the aluminum post.

The monument falls on flat sandy ground, 1.5 feet east of a newer fence line, projecting north and south.

40.068 The center 1/4 section corner of section 21.

80.264 The 1/4 section corner of section 21 only.

From the center E 1/16 section corner of section 21.

N. 0° 09.6' E., on the N - S centerline of the NE 1/4 of section 21.

THE SUBDIVISION OF SECTION 21
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 20.141** The NE 1/16 section corner at intersection with the E - W centerline of the NE 1/4 of section 21, monumented with a rebar, 1/2 inch diameter, firmly set flush with the ground, with no identifying cap or tag attached to the rebar. This monument is accepted as a careful and faithful determination of the NE 1/16 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NE 1/16
S21
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high to the west of the aluminum post.

Deposit the rebar alongside the aluminum post.

The monument falls, at the intersection of fences, projecting north, south and east on flat open ground.

- 40.283** The E 1/16 section corner of sections 16 and 21.
-

From the N 1/16 section corner of sections 21 and 22.

N. 89° 30.2' W., on the E - W centerline of the NE 1/4 of section 21.

- 20.075** The NE 1/16 section corner of section 21.

- 40.151** The center N 1/16 section corner of section 21.
-

From the E 1/16 section corner of section 21 only, on the south boundary of the section.

N. 0° 08.9' E., on the N - S centerline of the SE 1/4 of section 21.

- 20.163** Point for the SE 1/16 section corner at intersection with the E - W centerline of the SE 1/4 of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 21
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

SE 1/16
S21
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.40 feet, east of the aluminum post.

Raise a mound of stone, 4 ft. by 3 ft. base, by 1 ft. high to the east of the aluminum post.

The monument falls on a gradual rocky NE slope, on the south edge of a small drainage, 3 feet wide, 1 foot deep, drains NE.

38.851 Point for an Angle Point, Corner No. 1 of Parcel No. 1, hereinafter described.

40.326 The center E 1/16 section corner of section 21.

From the S 1/16 section corner of sections 21 and 22.

N. 89° 29.2' W., on the E - W centerline of the SE 1/4 of section 21.

6.997 Point for an Angle Point, Corner No. 3, of Lot 2 in section 21, identical with Corner No. 2, of Parcel No. 1, in section 21, hereinafter described.

19.996 The SE 1/16 section corner of section 21.

39.992 Point for the center S 1/16 section corner of section 21.

The Subdivision of Section 22,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the 1/4 section corner of section 22 only, on the south boundary of the section.

N. 0° 50.1' E., on the N - S centerline of section 22.

6.070 Point for an Angle Point, Corner No. 3 of Lot 3 in section 22, hereinafter described

20.106 Point for the center S 1/16 section corner of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 22
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

C
S1/16|S22
C
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high to the west of the aluminum post.

Set a steel fence post, 0.70 ft., SE of the aluminum post.

The monument falls on flat sandy ground.

- 40.212** Point for the center 1/4 section corner at intersection with the E - W centerline of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
C1/4
S22
2002

Raise a mound of stone, 4 ft. by 3 ft. base, by 1 ft. high to the west of the aluminum post.

The monument falls on a gradual NW slope on sandy ground, approximately 200 ft. northwest of an old gravel pit area.

- 60.316** Point for the center N 1/16 section corner of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C
N1/16|S22
C
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 3 ft. base, by 2 ft. high, west of the aluminum post.

The monument falls on gradual southerly slope, 25 ft. north of a wash, drains SW.

- 80.420** The 1/4 section corner of sections 15 and 22.

THE SUBDIVISION OF SECTION 22
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 22 and 23.

S. 89° 57.9' W., on the E - W centerline of section 22.

40.055 The center 1/4 section corner of section 22.

60.324 Point for the center W 1/16 section corner of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

$$\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{ --- } \text{C} \\ \text{S22} \\ \text{2002} \end{array}$$

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet north of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high, 4 ft. north of the aluminum post.

The monument falls, 9 1/2 feet south of the center of a wash, 9 feet wide, 2 feet deep, and also 42 feet west of the same wash, drains N. 70° W.

80.593 The 1/4 section corner of sections 21 and 22.

From the point for the W 1/16 section corner of section 22 only, on the south boundary of the section.

N. 0° 32.8' E., on the N - S centerline of the SW 1/4 of section 22.

20.131 The SW 1/16 section corner at intersection with the E - W centerline of the SW 1/4 of section 22, monumented with a pipe, 1 inch diameter, firmly set, flush with the ground, with no identifying cap or tag attached to the pipe. This monument is accepted as a careful and faithful determination of the SW 1/16 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches below the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 22
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

SW 1/16
S22
2002

Deposit the found pipe inside the aluminum post.

The monument falls in an alfalfa field.

- 24.829** Point for an Angle Point, Corner No. 1 of Lot 2 in section 22, hereinafter described.
- 40.262** The center W 1/16 section corner of section 22.

From the center S 1/16 section corner of section 22.

S. 89° 53.5' W., on the E - W centerline of the SW 1/4 of section 22.

- 10.990** Point for an Angle Point, Corner No. 2 of Lot 2 in section 22, hereinafter described.
- 20.169** The SW 1/16 section corner of section 22.
- 40.338** The S 1/16 section corner of sections 21 and 22.

From the center W 1/16 section corner of section 22.

N. 0° 33.5' E., on the N - S centerline of the NW 1/4 of section 22.

- 20.129** Point for the NW 1/16 section corner at intersection with the E - W centerline of the NW 1/4 of section 22.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NW 1/16
S22
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet, north of the aluminum post.

The monument falls on flat ground, 5 feet north of the north edge of a dirt road, 18 feet wide, bears east and west.

- 40.258** Point for the W 1/16 section corner of sections 15 and 22.
-

THE SUBDIVISION OF SECTION 22
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the center N 1/16 section corner of section 22.

N. 89° 57.7' W., on the E - W centerline of the NW 1/4 of section 22.

20.365 The NW 1/16 section corner of section 22.

40.730 The N 1/16 section corner of sections 21 and 22.

The Subdivision of Section 27,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 27 and 34.

N. 0° 06.4' W., on the N - S centerline of section 27.

40.076 Point for the center 1/4 section corner at intersection with the E - W centerline of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T24SR23E
C1/4
S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

The monument falls on a moderate SE slope.

55.001 Point for the C-N-S-N 1/256 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C-N-S-N
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.30 feet west of the aluminum post.

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

The monument falls on flat open ground.

- 57.817** Intersect line 1-2 of Parcel 4, not monumented.
- 59.976** Point for the center N 1/16 section corner of section 27, not monumented.
- 78.938** The 1/4 section corner of section 27 only.

From the 1/4 section corner of sections 26 and 27.

N. 89° 45.1' W., on the E - W centerline of section 27.

- 19.925** Point for the center E 1/16 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

$$\begin{array}{c} \text{E } 1/16 \\ \text{C} \text{ ————— } \text{C} \\ \text{S27} \\ \text{2002} \end{array}$$

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 2 ft. base, by 1 ft. high, north of the aluminum post.

Set a steel fence post, 0.35 feet north of the aluminum post.

The corner falls on flat sandy ground in a group of cottonwood trees, approximately 100 feet west of a stream of water, 24 feet wide, 4 inches deep, flows north.

- 39.850** The center 1/4 section corner of section 27.
- 59.730** Point for the center W 1/16 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, set in a collar of stone, with the aluminum cap marked:

$$\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{ ————— } \text{C} \\ \text{S27} \\ \text{2002} \end{array}$$

The monument falls on top of a finger ridge, bears north and south.

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

79.610 The 1/4 section corner of sections 27 and 28.

From the center E 1/16 section corner of section 27.

N. 0° 06.4' W., on the N - S centerline of the NE 1/4 of section 27.

14.928 Point for the C-N-S-NE 1/256 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C-N-S-NE
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.40 feet, east of the aluminum post.

The monument falls on flat open ground.

19.904 Point for the NE 1/16 section corner at intersection with the E - W centerline of the NE 1/4 of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NE 1/16
S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 3 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post, 0.30 feet north of the aluminum post.

The monument falls in the bottom of a drainage, 10 feet east of a stream of water, 8 feet wide, 5 inches deep, flows N. 35° W.

39.012 The E 1/16 section corner of section 27 only.

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the point for the N 1/16 section corner of sections 26 and 27.

N. 89° 45.7' W., on the E - W centerline of the NE 1/4 of section 27.

19.924 The NE 1/16 section corner of section 27.

34.867 The C-W-W-NE 1/256 section corner of section 27, monumented with a rebar, 5/8 inch diameter, firmly set, projecting 4 inches above ground, with an aluminum cap attached and marked UTAH RLS 1963, with a steel fence post alongside.

This monument is accepted as a careful and faithful determination of the C-W-W-NE 1/256 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C-W-W-NE
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar with cap inside the aluminum post.

The monument falls on flat ground in a group of cottonwood trees, 42 1/2 feet west of a stream of water, 1 foot wide, 6 inches deep, flows N. 50° E, and east, 42 feet from the center of a dirt road, 8 feet wide, bears N. 40° E., and S. 40° W.

39.848 The point for the center N 1/16 section corner of section 27.

From the C-N-S-NE 1/256 section corner of section 27.

N. 89° 45.6' W., on the E - W centerline of the N 1/2, SW 1/4, NE 1/4 of section 27.

14.943 Point for the NW-SW-NE 1/256 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NW-SW-NE
1/256 S27
2002

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet north of the aluminum post.

The monument falls in a fence line, projecting east and west, on the west side of an H brace, 16 feet east of the concrete foundation of a cattle guard, 25 feet long, by 7 feet wide, and also 35 feet east of the center of an improved dirt road, 25 feet wide.

16.109 Point for an Angle Point, Corner No. 2 of Parcel No. 4, hereinafter described.

19.924 The C-N-S-N 1/256 section corner of section 27.

From the NW-SW-NE 1/256 section corner of section 27.

N. 0° 06.4' W., on the N - S centerline of the N 1/2, NW 1/4, SW 1/4, NE 1/4 of section 27.

4.976 The C-W-W-NE 1/256 section corner of section 27.

From the center W 1/16 section corner of section 27.

N. 0° 10.5' W., on the N - S centerline of the NW 1/4 of section 27.

14.922 Point for the C-N-S-NW 1/256 section corner of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C-N-S-NW
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a small mound of stone to the west of the aluminum post.

The monument falls on a gradual NW slope in rolling hills, dissected with washes.

19.896 The NW 1/16 section corner at intersection with the E - W centerline of the NW 1/4 of section 27, monumented with a rebar, 5/8 inch diameter, firmly set, projecting 6 inches above ground, with a 1 inch diameter aluminum cap attached and marked LS 1963. This monument is accepted as a careful and faithful determination of the NW 1/16 section corner position.

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NW 1/16
S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar and cap alongside the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post, 0.50 feet south of the aluminum post.

The monument falls on a gradual open SW slope.

with continuous measurement

32.494 Point for an Angle Point, Corner No. 2 of Lot 5 in section 27, identical with Corner No. 1 of Parcel No. 3, in section 27, hereinafter described.

38.713 The W 1/16 section corner of section 27 only.

From the point for the center N 1/6 section corner of section 27.

N. 89° 46.2' W., on the E - W centerline of the NW 1/4 of section 27.

2.925 Point for an Angle Point, Corner No. 2 of Parcel No. 3, identical with Corner No. 1 of Parcel No. 4, hereinafter described.

4.976 The C-E-E-NW 1/256 section corner of section 27, monumented with a rebar, 5/8 inch diameter, firmly set, projecting 5 inches above ground, with a 1 inch diameter aluminum cap attached and marked UTAH RLS 1963. This monument is accepted as a careful and faithful determination of the C-E-E-NW 1/256 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

C-E-E-NW
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar with cap inside the aluminum post.

Set a steel fence post, 0.40 feet west of the aluminum post.

The monument falls on flat ground.

19.904 The NW 1/16 section corner of section 27.

39.807 The N 1/16 section corner of sections 27 and 28.

From the C-N-S-N 1/256 section corner of section 27.

N. 89° 45.9' W., on the E - W centerline of the N 1/2, SE 1/4, NW 1/4 of section 27.

4.974 Point for the NE-SE-NW 1/256 section corner of section 27, monumented with a rebar, 5/8 inch diameter, firmly set, projecting 4 inches above ground, with a 1 inch diameter aluminum cap attached and marked UTAH RLS 1963. This monument is accepted as a careful and faithful determination of the NE-SE-NW 1/256 section corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NE-SE-NW
1/256 S27
2002

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar with cap inside the aluminum post.

Set a steel fence post, 0.30 feet west of the aluminum post.

The monument falls on flat open ground.

with continuous measurement

19.896 The C-N-S-NW 1/256 section corner of section 27.

THE SUBDIVISION OF SECTION 27
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the NE-SE-NW 1/256 section corner of section 27.

N. 0° 07.4' W., on the N - S centerline of the N 1/2, NE 1/4, SE 1/4, NW 1/4 of section 27.

4.975 The C-E-E-NW 1/256 section corner of section 27.

Survey of Lots in Sections 21, 22 and 27,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

Survey of Lot 5 in section 27,

From the point for Corner No. 1, of Lot 5 in section 27, identical with Corner No. 1, Parcel No. 2 in section 22 and on the line between sections 22 and 27, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 1 L5, 1 P2, 2005, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet, east of the aluminum post.

The monument falls in sandy ground, in a fence line, projecting N. 53° W., and S. 53° E.

S. 53° 21.2' E., on line 1 -2 of Lot 5.

10.375 Point for Corner No. 2, of Lot 5, identical with Corner No. 1, of Parcel No. 3, at intersection with the N - S center line of the NW 1/4 of section 27, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 2 L5, 1 P3, 2005, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet, east of the aluminum post.

The monument falls in sandy ground, in a fence line, projecting N. 53° W., and S. 53° E.

SURVEY OF LOTS IN SECTIONS 21, 22 AND 27,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0° 10.5' W., on line 2 - 3 of Lot 5, identical with the N - S center line of the NW 1/4 of section 27.

- 6.219** Point for Corner No. 3, of Lot 5, identical with the W 1/16 section corner of section 27 only, hereinbefore described in the dependent resurvey portion of these field notes.

S. 89° 49.0' W., on line 3 - 1, of Lot 5, identical with the line between sections 22 and 27.

- 8.305** Corner No. 1, of Lot 5, and Point of Beginning, containing 2.58 acres, more or less.

Survey of Lot 2, in Section 21,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the point for Corner No. 1, of Lot 2, on the line between sections 21 and 22, identical with Corner No. 3, of Parcel No. 2, in section 22, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 1 L2, 3 P2, 2005, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.60 feet, east of the aluminum post.

The monument falls in sandy ground, in a fence line, projecting N. 35° W., and S. 42° E.

N. 0° 15.5' E., on line 1 - 2, of Lot 2, identical with the line between sections 21 and 22.

- 10.030** Point for Corner No. 2, of Lot 2, identical with the S 1/16 section corner of sections 21 and 22, hereinbefore described in the dependent resurvey portion of these field notes.

N. 89° 29.2' W., on line 2 - 3, of Lot 2, identical with the E - W centerline of the SE 1/4 of section 21.

- 6.997** Point for Corner No. 3, of Lot 2, identical with Corner No. 2, of Parcel No. 1, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 3 L2, 2 P1, 2005, with lines of intersection.

SURVEY OF LOTS IN SECTIONS 21, 22 AND 27,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet east of the aluminum post.

The monument falls in a fence line, projecting N. 35° W. and S. 35° E.

S. 34° 33.4' E., on line 3 - 1 of Lot 2.

12.256 Corner No. 1, of Lot 2, and Point of Beginning, containing 3.51 acres more or less.

Survey of Lot 3, in Section 22,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the point for Corner No. 1, of Lot 3, on the line between sections 22 and 27, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 1, L3, 2005, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet to the east of the aluminum post.

The monument falls on flat ground, 11 feet east of the easterly edge of a road, 19 ft. wide, bears N. 10° W., and S. 10° E.

S. 89° 49.0' W., on line 1 - 2, of Lot 3, identical with the line between sections 22 and 27.

7.197 Point for Corner No. 2, of Lot 3, identical with the 1/4 section corner of section 22 only, hereinbefore described in the dependent resurvey portion of these field notes.

N. 0° 50.1' E., on line 2 - 3, of Lot 3, identical with the N - S centerline of section 22.

6.070 Point for Corner No. 3, of Lot 3, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 3 L3, 2005, with lines of intersection.

SURVEY OF LOTS IN SECTIONS 21, 22 AND 27,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet to the north of the aluminum post.

The monument falls on flat sandy ground, 55 feet south of the bank of a creek, bears N. 45° W., and S. 45° E.

S. 49° 36.9' E., on line 3 - 1, of Lot 3.

- 9.332** Corner No. 1, of Lot 3, and Point of Beginning, containing 2.18 acres, more or less.

Survey of Lot 2, in Section 22,
T. 24 S., R. 23 E., Salt Lake Meridian, Utah

From the point for Corner No. 1, of Lot 2, on the N - S center line of the SW 1/4 of section 22, monumented with a rebar, 5/8 inch diameter, firmly set, with a yellow plastic cap attached and marked LS 171040, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 1, L2, 2005, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar with cap inside the aluminum post.

Set a steel fence post, 0.50 feet to the north of the aluminum post.

The monument falls on flat sandy ground, 40 feet south of the southerly edge of a creek bank, bears N. 80 ° W., and S. 80° E.

S. 62° 51.9' E., on line 1 - 2, of Lot 2.

- 10.263** Point for Corner No. 2, of Lot 2, at intersection with the E - W center line of the SW 1/4 of section 22, monumented with a rebar, 5/8 inch diameter, firmly set, with a yellow plastic cap attached and marked LS 171040, hereinbefore described.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, in a mound of stone, 4 ft. by 4 ft. base to top of the aluminum cap marked 2 L2, 2005, with lines of intersection.

SURVEY OF LOTS IN SECTIONS 21, 22 AND 27,
T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Deposit the rebar with cap inside the aluminum post.

Set a steel fence post, 0.40 feet to the west of the aluminum post.

The monument falls on flat sandy ground, 29 feet west of the edge of a creek bank, bears N. 50° W., and S. 50° E.

S. 89° 53.5' W., on line 2 - 3, of Lot 2, identical with the E - W centerline of the SW 1/4 of section 22.

- 9.179** Corner No. 3, of Lot 2, identical with the SW 1/16 section corner of section 22, hereinbefore described in the dependent resurvey portion of these field notes.

N. 0° 32.8' E., on line 3 - 1, of Lot 2, identical with the N - S center line of the SW 1/4 of section 22.

- 4.698** Corner No. 1, of Lot 2, and Point of Beginning, containing 2.16 acres, more or less.

The Survey of Parcels 1 - 4, in Sections 21, 22 and 27, T. 24
S., R. 23 E., Salt Lake Meridian, Utah

Survey of Parcel 1, in the NE 1/4, SE 1/4 of section 21,

From the point for Corner No. 1, of Parcel No. 1, on the N - S center line of the SE 1/4 of section 21, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 1 P1 2002, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet west of the aluminum post.

The monument falls at the corner of fences, projecting north and S. 32° E., 8 feet east of the easterly edge of a dirt road, 23 feet wide, bears N. 35° W., and S. 35° E.

S. 34° 33.2' E., on line 1 - 2, Parcel 1.

THE SURVEY OF PARCELS 1 - 4, IN SECTIONS 21, 22
AND 27, T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 22.832** Point for Corner No. 2, of Parcel No. 1, identical with corner No. 3, of Lot 2 in section 21, hereinbefore described in the survey of Lot 2 in section 21, portion of these field notes.

N. 89° 29.2' W., on line 2 -3, identical with the E - W center line of the SE 1/4 of section 21.

- 12.999** Point for Corner No. 3, of Parcel No. 1, identical with the SE 1/16 section corner of section 21, hereinbefore described in the subdivision of section 21 portion of the field notes.

N. 0° 08.9' E., on line 3 - 1, of Parcel No. 1, identical with the N - S center line of the SE 1/4 of section 21.

- 18.688** Corner No. 1, of Parcel No. 1 and Point of Beginning, containing 12.14 acres, more or less.

Survey of Parcel No. 2, in the SW 1/4, SW 1/4 of section 22,

From the point for Corner No. 1, of Parcel No. 2, identical with Corner No. 1, of Lot 5 in section 27, hereinbefore described in the survey of Lot 5 in section 27, portion of these field notes.

S. 89° 49.0' W., on line 1 - 2, of Parcel No. 2, identical with a portion of the line between sections 22 and 27, and a portion of the line between sections 22 and 28.

- 13.275** Point for Corner No. 2, of Parcel No. 2, identical with the corner of sections 21 and 22 only, hereinbefore described in the dependent resurvey portion of these field notes.

N. 0° 15.5' E., on line 2 -3, of Parcel No. 2, identical with the line between sections 21 and 22.

- 10.126** Point for Corner No. 3, of Parcel No. 2, identical with Corner No. 1, of Lot 2 in section 21, hereinbefore described in the survey of Lot 2 in section 21 portion of these field notes.

S. 42° 18.0' E., on line 3 - 4, of Parcel No. 2.

- 1.018** Point for Corner No. 4, of Parcel No. 2.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 4 P2 2002, with lines of intersection.

THE SURVEY OF PARCELS 1 - 4, IN SECTIONS 21, 22
AND 27, T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet east of the aluminum post.

The monument falls in a fence line, projecting N. 42° W., and S. 53° E.

S. 53° 21.5' E., on line 4 - 1, of Parcel No. 2.

15.634 Corner No. 1, of Parcel No. 2 and Point of Beginning, containing 6.57 acres, more or less.

Survey of Parcel No. 3, in the NE 1/4, NW 1/4 of section 27,

From the point for Corner No. 1, of Parcel No. 3, identical with Corner No. 2, of Lot 5 in section 27, hereinbefore described in the survey of Lot 5 in section 27 portion of these field notes.

S. 53° 20.1' E., on line 1 - 2, of Parcel No. 3.

21.213 Point for Corner No. 2, of Parcel No. 3, identical with Corner No. 1, of Parcel No. 4, at intersection with the E - W center line of the NW 1/4 of section 27, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 2 P3, 1 P4 2002, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet to the east of the aluminum post.

The monument falls 4 feet east of the easterly edge of a improved dirt road, 21 feet wide, bears, N. 53° W., and S. 53° E.

N. 89° 46.2' W., on line 2 - 3, of Parcel No. 3, identical with the E - W center line of the NW 1/4 of section 27.

16.979 Point for Corner No. 3, of Parcel No. 3, identical with the NW 1/16 section corner of section 27, hereinbefore described in the dependent resurvey portion of these field notes.

N. 0° 10.5' W., on line 3 - 1, of Parcel No. 3, identical with the N - S center line of the NW 1/4 of section 27.

THE SURVEY OF PARCELS 1 - 4, IN SECTIONS 21, 22
AND 27, T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 12.598** Corner No. 1, of Parcel No. 3 and Point of Beginning, containing 10.69 acres, more or less.

Survey of Parcel No. 4, in the N 1/2, of section 27,

From the point for Corner No. 1, of Parcel No. 4, identical with Corner No. 2, of Parcel No. 3, hereinbefore described in the survey of Parcel No. 3 portion of these field notes.

S. 53° 27.1' E., on line 1 - 2, of Parcel No. 4.

- 3.646** Intersect the N - S center line of section 27. Not monumented.

- 8.402** Point for Corner No. 2, of Parcel No. 4, at intersection with the E - W center line of the N 1/2, SW 1/4, NE 1/4 of section 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked 2 P4 2002, with lines of intersection.

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, 0.50 feet east of the aluminum post.

The monument falls at the corner of fences, projecting N. 53° W., and N. 80° E.

N. 89° 45.6' W., on line 2 - 3, of Parcel No. 4, identical with the E - W center line of the N 1/2, SW 1/4, NE 1/4 of section 27.

- 3.815** Point for Corner No. 3, of Parcel No. 4, identical with the C-N-S-N 1/256 section corner of section 27, hereinbefore described in the subdivision of section 27 portion of these field notes.

N. 89° 45.9' W., on line 3 - 4, of Parcel 4, identical with the E - W center line of the N 1/2, SE 1/4, NW 1/4 of section 27.

- 4.974** Point for Corner No. 4, of Parcel No. 4, identical with the NE-SE-NW 1/256 section corner of section 27, hereinbefore described in the subdivision of section 27 portion of these field notes.
-

THE SURVEY OF PARCELS 1 - 4, IN SECTIONS 21, 22
AND 27, T. 24 S., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0° 07.4' W., on line 4 - 5, of Parcel No. 4, identical with the N - S center line of the NE 1/4, SE 1/4, NW 1/4 of section 27.

- 4.975** Point for Corner No. 5, of Parcel No. 4, identical with the C-E-E-NW 1/256 section corner of section 27, hereinbefore described in the subdivision of section 27 portion of these field notes.

S. 89° 46.2' E., on line 5 - 1, of Parcel No. 4, identical with the E - W center line of the NW 1/4 of section 27.

- 2.051** Corner No. 1, of Parcel No. 4, and Point of Beginning, containing 2.70 acres, more or less.
-

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

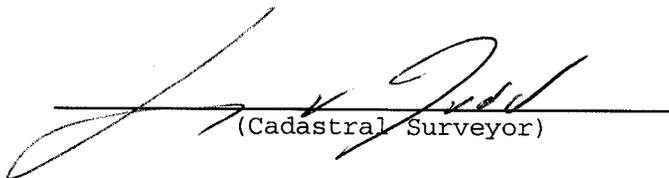
Name	Capacity
Denim Day	Survey Aide

CERTIFICATE OF SURVEY

I, **Larry V. Judd, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the **20th day of December 2001** and amended special instructions bearing the date of the **1st day of September 2005**, I have **executed a dependent resurvey of a portion of the subdivisional lines, the subdivision of sections 21, 22 and 27, and the survey of certain lots, and the survey of certain parcels, in sections 21, 22 and 27, in Township 24 South, Range 23 East,**

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

11/21/05
Date


(Cadastral Surveyor)

CERTIFICATE OF APPROVAL


BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections 21, 22 and 27, and the survey of certain lots, and the survey of certain parcels, in sections 21, 22 and 27, in Township 24 South, Range 23 East, Salt Lake Meridian, Utah,

executed by Larry V. Judd, *Cadastral Surveyor*,

having been critically examined and found correct, are hereby approved.

November 29, 2005
Date


Chief Cadastral Surveyor for Utah