

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE UTAH AND ARIZONA STATE BOUNDARY LINE,
FROM MILE POST 83 TO MILE POST 86,

AND

THE DEPENDENT RESURVEY OF
A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SUBDIVISION OF SECTIONS

9 AND 10

AND

A METES AND BOUNDS SURVEY

IN SECTION 9

IN

TOWNSHIP 44 SOUTH, RANGE 6 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Larry V. Judd
Cadastral Surveyor

Under special instructions dated **April 8, 2003**, approved **April 8, 2003**,
which provided for the surveys included under Group Number **958**, and
assignment instructions dated **April 8, 2003**

Survey commenced **April 16, 2003**
Survey completed **April 28, 2003**

INDEX DIAGRAM

Township 44 South, Range 6 West

6	5	4 6	3 6	2	1
7	8	9 9	8 10	7 11	12
UTAH - ARIZONA - STATE - BOUNDARY - LINE					

The Resurvey of the Utah-Arizona State Line from MP-83-MP86..... Page 3
 The Subdivision of Section 9.....Page 9
 The Subdivision of Section 10..... Page 11
 Metes and Bounds Survey of Section 9..... Page 13

The following field notes are those of the dependent resurvey of a portion of the Utah and Arizona State Boundary Line, from Mile Post 83 to Mile Post 86, and the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections, 9 and 10, and a metes and bounds survey in section 9, in T. 44 S., R. 6 W., Salt Lake Meridian, Utah.

History of Surveys

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY (Utah and Arizona State Boundary Line)			
All	H.B. Carpenter	1901	
All			R. Gentry 1912
EAST BOUNDARY (Panguitch and Kanab Guide Meridian)			
All	Bailey & Burrill	1877	
Portion			R. Gentry 1912
WEST BOUNDARY			
All	Bailey & Burrill	1877	
All			Stewart & French 1909
Portion			R. Gentry 1912
NORTH BOUNDARY			
All	Bailey & Burrill	1877	
Portion			Stewart & French 1909
Portion			Thoma & Clark 1914
Portion			R. Zaninovich 1984
SUBDIVISION			
All	Bailey & Burrill	1877	
Portion			R. Gentry 1912

PRIVATE SURVEYS

A survey was executed in section 9, T. 44 S., R. 6 W., by Bulloch Brothers Engineering, in 1995.

Several surveys were executed in the area by Lanny K. Talbot of Talbot Land Surveyors, with surveys in 1984, 1996, 1997 and 2000.

T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 958, dated April 8, 2003.

The direction of the lines were determined by references to true meridians, established by the Global Positioning System (GPS) utilizing Real Time Kinematic (RTK) techniques throughout the survey. Trimble Model 5700 global positioning system receivers and radios were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

Geodetic control was derived from National Geodetic Survey Control Station "A 57", with the published data as follows:

Latitude: $37^{\circ} 00'11.20779''$ N. Longitude: $112^{\circ} 31'44.95162''$ W.
N.A.D. 1983 (1994). N.A.V.D. 1988 4862.86 feet.

The geographic position of Mile Post 86 on the Utah and Arizona State Boundary Line, as determined by a tie to National Geodetic Survey Control Station "A 57", is as follows:

Latitude: $37^{\circ} 00'02.965''$ N. Longitude: $112^{\circ} 29'21.438''$ W.
N.A.D. 1983

DEPENDENT RESURVEY OF A PORTION OF THE UTAH AND ARIZONA STATE
BOUNDARY LINE, FROM MILE POST 83 TO MILE POST 86

CHAINS

Dependent Resurvey of a Portion of the Utah and Arizona State
Boundary Line, from Mile Post 83 to Mile Post 86.

Reestablishment of the Survey Executed by H.B. Carpenter in 1901
and the Retracement by R. Gentry in 1912

Beginning at the Mile Post 83, monumented with an iron post, 2 inches diameter, firmly set, projecting 20 ins., above ground with the brass cap marked as described in the official record of the survey executed by H.B. Carpenter in 1901. The marks BM 4827.32 were also stamped on the cap, added by person(s) and date unknown.

The corner is located on flat ground, in a fence, projecting east and west.

N. 89°54.1' E., between Mile Post 83 and Mile Post 84.

22.557 True point for the closing corner of sections 8 and 9, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.

62.304 Point of intersection with the closing N-S centerline of section 9, identical with the SW corner of Lot 2 and the SE corner of Lot 3, section 9, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.

80.090 Mile Post 84, monumented with an aluminum post, 2 inches diameter, firmly set in a mound of stone, with a 2 1/2 inches diameter aluminum cap attached and marked: TALBOT LAND SURVEYORS UT MP84 AZ 2000. This monument is accepted as a careful and faithful determination of the position of Mile Post 84, by proportionate measurement. No remaining evidence of the original marked stone or bearing tree accessories were found.

The corner is located on a moderate southeast slope on exposed solid sandstone outcrop, 6 feet north of a fence, projecting east and west. **NOTE:** The area around this corner shows extensive ground disturbance from a gravel pit operation to the north and east of this point.

From this corner, National Geodetic Survey Control Station "A 57", monumented with a standard survey disk set in solid sandstone, stamped A 57 1934, bears N. 51°52.3' W., forward bearing and S. 51°52.4' E., back bearing, 20.867 chains distance.

N. 89°51.0' E., beginning new measurement, between Mile Post 84 and Mile Post 85.

DEPENDENT RESURVEY OF A PORTION OF THE UTAH AND ARIZONA STATE
BOUNDARY LINE, FROM MILE POST 83 TO MILE POST 86

CHAINS

- 2.087** Point of intersection with the closing N-S centerline of the NE 1/4 of section 9, identical with the SE corner of Lot 2 and the SW corner of new Lot 6, section 9, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 9.577** Point for the SW corner of new Lot 5, identical with the SE corner of new Lot 6, section 9, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 21.961** True point for the closing corner of sections 9 and 10, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 61.650** Point of intersection with the closing N-S centerline of section 10, identical with the SE corner of Lot 6 and the SW corner of Lot 7, section 10, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 80.016** Mile Post 85, monumented with a conglomerate stone, buried 6 inches below ground, with 3 steel fence posts set around the stone. The stone measures 8 by 8 inches, with the length not measured. Illegible marks can be seen on all sides of the weathered stone. The stone was not completely dug up.

At the corner point

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, directly on top of the mile post stone, with 16 inches of added fill dirt at the base of the post, and raise a mound of stone, 4 ft. by 3 ft. base around the remainder of the post to the top of the brass cap marked:

MP 85
UTAH
ARIZ
2003

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Reset the steel fence posts around the aluminum post.

The corner is located on the south edge of a gravel road, 5 feet vertically below the top edge of the road, which is 26 to 30 feet wide, projecting east and west. The corner is also located 4 feet north of a fence, projecting east and west. The original stone monument was not disturbed or moved in any way.

N. 89°58.2' E., beginning new measurement, between Mile Post 85 and Mile Post 86.

DEPENDENT RESURVEY OF A PORTION OF THE UTAH AND ARIZONA STATE
BOUNDARY LINE, FROM MILE POST 83 TO MILE POST 86

CHAINS

- 1.479** Point of intersection with the closing N-S centerline of the NE 1/4 of section 10, identical with the SE corner of Lot 7 and the SW corner of Lot 8, section 10, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 21.323** True point for the closing corner of sections 10 and 11, T. 44 S., R. 6 W., Salt Lake Meridian, Utah, hereinafter described.
- 80.000** Mile Post 86, monumented with a conglomerate stone, 12 by 10 inches, firmly set, projecting 6 inches above ground, with illegible marks visible on two sides of the weathered stone, with 3 flat stones placed around the stone and a large reference mound of stone, approximately 6 feet to the east.

from which the original bearing trees

A juniper, 12 ins. diam., with scribe marks visible on rotted blaze, bears N. 72° E., 74 links dist. (Record N. 70°40' E., 73 links.)

A juniper, 16 ins. diam., with no scribe marks visible on rotted out blaze, bears S. 45° E., 65 links dist. (Record S. 44° 20' E., 64 links.)

A juniper, 20 ins. diam., scribed ARIZ 86M BT, bears S. 81°24' W., 111.5 links dist. (Record S. 81°15' W., 111 links.)

A juniper, 12 ins. diam., scribed UTAH 86M BT, bears N. 42° W., 24.5 links dist. (Record N. 47°30' W., 24 links.)

At the corner point

Chiseled a cross (X) on top of the stone for a measurement point, and left the original stone as is.

The corner is located on flat ground, 6 1/2 feet south of a fence, projecting east and west in scattered juniper growth.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 44 S., R. 6 W., Salt Lake Meridian, Utah

Reestablishment of the Survey executed by Bailey and Burrill in 1877,
and the Resurvey executed by R. Gentry in 1912.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 2, 3, 10 and 11, monumented with an aluminum post, 2 ins. diameter, firmly set, projecting 7 inches above ground, with a 2 1/2 ins. diameter aluminum cap attached and marked: TALBOT LAND SURVEYORS T44SR6W S2 S3 S10 S11 RLS 165634 1996. This monument is accepted as a careful and faithful determination of the original section corner position.

Buried alongside the aluminum post, found a sandstone, 16x8x5 inches, plainly marked with 2 notches on one edge and no other marks visible.

The corner is located in a fence, projecting east and west, 6 feet east of the corner of fences, projecting north and east.

N. 89°56.0' W., between sections 3 and 10.

19.944 Point for the E 1/16 section corner of sections 3 and 10, not monumented.

39.888 The 1/4 section corner of sections 3 and 10, monumented with an aluminum post, 2 inches diameter, firmly set, projecting 4 inches above ground, with a 2 1/2 inches diameter aluminum cap marked: TALBOT LAND SURVEYORS T44SR6W 1/4 S3 S10 PLS 165634 1996. This monument is accepted as a careful and faithful determination of the original 1/4 section corner position.

Buried alongside the aluminum post, found a granite stone, 18x7x6 inches plainly marked 1/4.

The corner is located in a fence, projecting east and west.

N. 89°42.1' W., beginning new measurement.

39.485 The corner of sections 3, 4, 9 and 10, monumented with an aluminum post, 2 ins. diameter, firmly set, 3 inches below ground, with a 2 1/2 ins. diameter aluminum cap attached and marked: TALBOT LAND SURVEYORS T44SR6W S3 S4 S9 S10 RLS 165634 1996. This monument is accepted as a careful and faithful determination of the original section corner position.

Buried alongside the aluminum post, found a sandstone, 12x8x5 inches, plainly marked with 3 grooves on one face and 1 groove on another.

The corner is located at the corner of fences, projecting south and west.

S. 89°55.6' W., between sections 4 and 9.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

19.944 The E 1/16 section corner of sections 4 and 9, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above ground, with the cap marked: RLS 6542 T44S R6W E 1/16 S4 S9 1984. This monument is accepted as a careful and faithful establishment of the E 1/16 section corner position.

with continuous measurement

39.888 The 1/4 section corner of sections 4 and 9, monumented with an iron post, 1 inch diameter, firmly set, flush with the ground, with the brass cap marked as described in the official record of the resurvey executed by R. Gentry in 1912.

The corner is located in a fence, projecting east and west.

N. 89°41.9' W., beginning new measurement.

39.636 The corner of sections 4, 5, 8 and 9, monumented with an aluminum post, 2 ins. diameter, firmly set, projecting 6 inches above ground, with a 2 1/2 ins. diameter aluminum cap attached and marked: TALBOT LAND SURVEYORS T44SR6W S4 S5 S8 S9 RLS 165634 1997. This monument is accepted as a careful and faithful determination of the original section corner position.

Buried alongside the aluminum post, found a sand stone, 12x8x7 inches, plainly marked with 4 grooves on one face and 1 groove on another.

The corner is located at the corner of old fences, projecting north and west, and a newer chain link fence projecting south and west.

From the corner of sections 2, 3, 10 and 11.

S. 0°07.1' W., between sections 10 and 11.

20.013 Point for the N 1/16 section corner of sections 10 and 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

N 1/16
S10|S11
2003

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

Set a steel fence post, east of the aluminum post.

The corner is located 11 feet east of the east edge of a dirt trail road, 8 feet wide, bears east and west.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 37.675** The closing corner of sections 10 and 11, monumented with an iron post, 2 inches diameter, firmly set, projecting 18 inches above ground, with the brass cap marked as described in the official record of the survey executed by R. Gentry in 1912.

Add the marks AM 2003 to the brass cap. This corner will now function for alignment only.

The corner is located 3 feet north of a fence, projecting east and west and 7 feet south of the south edge of a gravel road, 30 feet wide, bears east and west.

- 37.702** True point for the closing corner of sections 10 and 11, at intersection with the Utah and Arizona State Boundary Line, between Mile Post 85 and Mile Post 86, hereinbefore described. Point not monumented.

From the corner of sections 3, 4, 9 and 10.

S. 0°06.8' W., between sections 9 and 10.

- 20.002** Point for the N 1/16 section corner of sections 9 and 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

N 1/16
S9|S10
2003

Deposit a magnet enclosed within a clear plastic case at the base of the aluminum post.

A steel fence post set 0.50 feet NE of the aluminum post, was left where it was found.

The corner is located on flat sandy ground, 6 feet west of the west edge of a dirt road, 26 feet wide, bears north and south.

- 38.093** The closing corner of sections 9 and 10, monumented with an iron post, 2 inches diameter, firmly set, but bent over to the east, projecting 16 inches above ground, with the brass cap marked as described in the official record of the survey executed by R. Gentry in 1912. Point tied was the plumb point of the iron post at ground level.

Reset the post to project 6 inches above ground and add the marks AM 2003 to the brass cap. This monument will now function for alignment only.

Set a steel fence post alongside the iron post.

The corner is located on flat ground, 6 1/2 feet north of a fence, projecting east and west.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 38.116** True point for the closing corner of sections 9 and 10, at intersection with the Utah and Arizona State Boundary Line, between Mile Post 84 and Mile Post 85, hereinbefore described. Point not monumented.

From the corner of sections 4, 5, 8 and 9.

S. 0°03.4' W., between sections 8 and 9.

- 38.428** Point for the closing corner of sections 8 and 9, at intersection with the Utah and Arizona State Boundary Line, between Mile Post 83 and Mile Post 84, at proportionate distance. No remaining evidence of the original corner point was found. This corner point is located in the bottom of Kanab Creek, not suitable for permanent monumentation and therefore not monumented.

From this point, S. 82°04.4' E., 2.024 chains distance, found the original closing corner monument, an iron post, 2 inches diameter, firmly set, projecting 12 inches above ground with the post rotated and facing the wrong direction, and with the brass cap marked as described in the official record of the survey executed by R. Gentry in 1912.

The determination was made that the iron post monument had been moved and reset by person(s) and date unknown. The monument was not accepted as the location of the original closing corner, and was removed from the project area.

The Subdivision of Section 9
T. 44 S., R. 6 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 4 and 9.

S. 0°06.3' E., on the N - S center line of section 9.

- 19.938** Point for the center N 1/16 section corner, at prorated distance based on the mathematical breakdown of the original lots of fractional section 9. Point not monumented.

- 38.152** The point of intersection with the Utah and Arizona State Boundary Line, identical with the SW corner of Lot 2 and the SE corner of Lot 3, section 9, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 9,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T44SR6W	
C	
S	9
C	C

2003

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post, west of the aluminum post.

The monument falls on flat ground, 87 1/2 feet east of the centerline of Highway 89.

From the E 1/16 section corner of sections 4 and 9.

S. 0°00.2' W., on the N - S centerline of the NE 1/4 of section 9.

- 19.970** Point for the NE 1/16 section corner of section 9, at intersection with the E - W centerline of the NE 1/4 of section 9, based on the mathematical breakdown of the original lots of fractional section 9.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NE 1/16	
S 9	
2003	

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high to the east of the aluminum post.

Set a steel fence post, southeast of the aluminum post.

The monument falls on the westerly edge of a gravel pit operation area.

- 38.141** The point of intersection with the Utah and Arizona State Boundary Line, identical with the SE corner of Lot 2, and the SW corner of new Lot 6, section 9, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 9,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T44SR6W	
C	
NE	S9
C	C

2003

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft base, by 1 ft. high northeast of the aluminum post.

Set a steel fence post, west of the aluminum post.

The monument is located on the westerly edge of a small wash, 1 foot deep, 6 feet wide, drains S. 30°W., to south, 6 feet north of a fence, projecting east and west.

From the N 1/16 section corner of sections 9 and 10.

N. 89°58.0' W., on the E - W centerline of the NE 1/4 of section 9.

- 12.417** Point for the NW corner of new Lot 5, identical with the NE corner of new Lot 6, section 9.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T44SR6W	
L6	L5
S9	
2003	

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post to the north of the aluminum post.

The monument is located on a steep northwest slope.

- 19.907** The NE 1/16 section corner of section 9.

- 39.814** The point for the center N 1/16 section corner of section 9.

The Subdivision of Section 10,
T. 44 S., R. 6 W., Salt Lake Meridian, Utah

THE SUBDIVISION OF SECTION 10,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 3 and 10.

S. 0°11.5' E., on the N - S centerline of section 10.

19.966 Point for the center N 1/16 section corner, of section 10, at prorated distance based on the mathematical breakdown of the original lots of fractional section 10. Point not monumented.

37.807 The point of intersection with the Utah and Arizona State Boundary Line, identical with the SE corner of Lot 6, and the SW corner of Lot 7, of section 10, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T44SR6W	
C	
S	10
C	C

2003

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 2 ft. base, by 1 ft. high, north of the aluminum post.

The monument is located on flat ground, 3 feet south of the south edge of a gravel road, 30 feet wide, bears east and west, and also 5 feet north of a fence, projecting east and west.

From the point for the E 1/16 section corner of sections 3 and 10.

S. 0°02.2' E., on the N - S centerline of the NE 1/4 of section 9.

19.989 Point for the NE 1/16 section corner of section 10, at intersection with the E - W centerline of the NE 1/4 of section 10, based on the mathematical breakdown of the original lots of fractional section 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

NE 1/16	
S10	
2003	

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

THE SUBDIVISION OF SECTION 10,
T. 44 S., R. 6 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post, west of the aluminum post.

The monument is located on flat ground in sagebrush undergrowth.

- 37.734** The point of intersection with the Utah and Arizona State Boundary Line, identical with the SE corner of Lot 7, and the SW corner of Lot 8, of section 10, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T44S R6W	
C	
NE	S10
C	C

2003

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post to the north of the aluminum post.

The monument is located 6 feet south of the south edge of a gravel road, 30 feet wide bears east and west, and also 6 feet north of a fence, projecting east and west.

From the N 1/16 section corner of sections 10 and 11.

N. 89°51.9' W., on the E - W centerline of the NE 1/4 of section 10.

- 19.891** The NE 1/16 section corner of section 10.

- 39.783** The point for the center N 1/16 section corner of section 10.

Metes and Bounds Survey, Section 9
T. 44 S., R. 6 W., Salt Lake Meridian, Utah

From the NW corner of Lot 5, identical with the NE corner of Lot 6, on the E - W centerline of the NE 1/4 of section 9.

S. 0°00.3' W., on the line between new Lot 5 and new Lot 6, of section 9.

- 18.153** The SW corner of Lot 5, identical with the SE corner of Lot 6, at intersection with the Utah and Arizona State Boundary Line, hereinbefore described.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

METES AND BOUNDS SURVEY, SECTION 9,
T. 44 S., R. 614 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T44SR6W

S	9
L6	L5

2003

Deposit a magnet, enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post to the north of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft base, by 1 ft. high north of the aluminum post.

The monument is located on flat ground, 6 feet north of a fence, projecting east and west.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

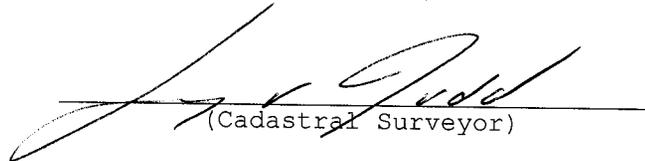
Name	Capacity
Jeremy D. Davis	Survey Technician

CERTIFICATE OF SURVEY

I, **Larry V. Judd, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the **8th day of April, 2003**, I have **executed a dependent resurvey of the Utah and Arizona State boundary line, from Mile Post 83 to Mile Post 86, and the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections 9 and 10, and a metes and bounds survey in section 9, in Township 44 South, Range 6 West,**

of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

2/09/06
Date


(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

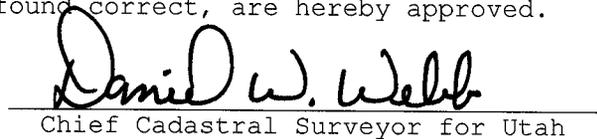
BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the dependent resurvey of the Utah and Arizona State boundary line, from Mile Post 83 to Mile Post 86, and the dependent resurvey of a portion of the subdivisional lines, the subdivision of sections 9 and 10, and a metes and bounds survey in section 9, in **Township 44 South, Range 6 West, Salt Lake Meridian, Utah,**

executed by **Larry V. Judd, Cadastral Surveyor,**

having been critically examined and found correct, are hereby approved.

May 24, 2006
Date


Chief Cadastral Surveyor for Utah