

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

## FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
A PORTION OF THE EAST BOUNDARY,  
A PORTION OF THE NORTH BOUNDARY,  
A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS

1 AND 12

IN

**TOWNSHIP 32 SOUTH, RANGE 7 WEST**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

**Larry V. Judd**  
**Cadastral Surveyor**

Under special instructions dated **March 23, 2004**, approved **March 23, 2004**, which provided for the surveys included under Group Number **979**, and assignment instructions dated **March, 23, 2004**

Survey commenced **April 27, 2004**  
Survey completed **May 20, 2004**

**INDEX DIAGRAM**  
Township 32 South, Range 7 West

6	5	4	3	10 2 14	11 1 8 13
7	8	9	10	11 12	12 6 12
18	17	16	15	14	13 4
19	20	21	22	23	24 3
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 1.....Page 15  
The Subdivision of Section 12.....Page 17

## T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the east boundary, a portion of the north boundary, a portion of the subdivisional lines, and the subdivision of sections 1 and 12, in T. 32 S., R. 7 W., Salt Lake Meridian, Utah.

**History of Surveys**

<b>Surveyed by</b>		<b>Retr. or Resurveyed by</b>	
<b>SOUTH BOUNDARY</b>			
Portion	J. Gorlinski	1871	
All	A.J. Stewart Jr.	1873	A.J. Stewart Jr. 1873
All			J.R. & Q. Stewart 1910
<b>EAST BOUNDARY</b>			
All	A.J. Stewart Jr.	1873	
All			J.R. & Q. Stewart 1910
<b>WEST BOUNDARY</b>			
All	J. Gorlinski	1871	
Portion			T.C. Bailey 1881
Portion			J.R. & Q. Stewart 1910
Remonumentation			F.D. Reynolds 1970
<b>NORTH BOUNDARY</b>			
Portion	J. Gorlinski	1871	
Portion	J.R. & Q. Stewart	1910	J.R. & Q. Stewart 1910
<b>SUBDIVISION</b>			
Portion	J. Gorlinski	1871	
Portion			J.R. & Q. Stewart 1910
			J.R. & Q. Stewart 1910

## T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 979, dated March 23, 2004.

The direction of the lines was determined by references to true meridians, established by the Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. Trimble model 5700 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from National Geodetic Survey, Station "EXTRA", with the published data as follows:

Latitude: 38°00'25.30326"N. Longitude: 112°30'57.87475"W.  
NAD 1983 (1994) 7114 feet elevation NAVD 1988.

The geographic position of the corner of sections 19, 24, 25 and 30, as determined by a tie to National Geodetic Survey, Station "EXTRA" is as follows:

Latitude: 37°59'56.011" N. Longitude: 112°35'24.336" W.  
NAD 1983.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

---

Dependent Resurvey of a Portion of the East Boundary,  
T. 32 S., R. 7 W., Salt Lake Meridian, Utah.

---

Reestablishment of the Survey executed by  
A.J. Stewart Jr. in 1873, and the Resurvey by  
J.R. and Quinby Stewart in 1910

---

Beginning at the corner of sections, 19, 24, 25 and 30, on the east boundary of the township, monumented with an iron post, 3 inches diameter, firmly set in a mound of stone, with the marks on the brass cap illegible. Remark the brass cap to read.

T32S	
R7W R6W	
S24	S19
-----	
S25	S30
1910	
2004	

The corner falls on a spur ridge, bearing north and south, in sagebrush and scrub oak undergrowth.

From this corner, National Geodetic Survey Station "EXTRA", monumented with a standard brass disk, set in concrete, marked EXTRA 1936, bears N. 82° 04' 04" E. (forward bearing) and S. 82° 06' 49" W. (back bearing), for 326.373 chains distance

N. 0° 03.4' W., on the east boundary of the township.

**39.795** Point for the 1/4 section corner of section 24 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T32S	
R7W R6W	
1/4	
S24	
2004	

Deposit a magnet enclosed in a clear plastic case, at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

The corner falls in sagebrush undergrowth.

**40.564** The 1/4 section corner of section 19 only, Township 32 South, Range 6 West, monumented with a granite stone, 12x10x6 inches, firmly set, plainly marked 1/4 on the west face.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
| 1/4  
| S19  
2004

Deposit the marked stone, alongside the aluminum post.

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

Raise a small mound of stone around the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

---

N. 0° 10.2' W., beginning new measurement.

- 39.027** From this point, the monumented closing corner of sections 13  
and 24, monumented with an iron post, 2 inches diameter,  
firmly set, protruding 14 inches above ground, with the brass  
cap marked as described in the official record of the resurvey  
executed by J.R. and Quinby Stewart in 1910, bears west 0.052  
chains distance.

Raise a mound of stone around the iron post, 3 ft. by 3 ft.  
base, by 1 foot high.

The corner falls on flat ground in sagebrush.

- 40.455** The corner of sections 18 and 19 only, Township 32 South,  
Range 6 West, monumented with an iron post, 3 inches diameter,  
firmly set in a mound of stone, with the brass cap incorrectly  
marked common to all four sections. Remark the brass cap to  
read. (Record granite stone, 9x6x6 inches above ground)

T32S  
R7W R6W  
| S18  
| S19  
1910  
2004

The corner falls on flat ground in sagebrush undergrowth.

---

N. 0° 06.4' W., continuing on the east boundary of the  
township.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

**38.677** Point for the 1/4 section corner of section 13 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
1/4 |  
S13 |  
2004

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

**39.959** The 1/4 section corner of section 18 only, Township 32 South,  
Range 6 West, monumented with an iron post, 1 inch diameter,  
firmly set, but bent over at ground level, with the brass cap  
marked as described in the official record of the resurvey  
executed by J.R. and Quinby Stewart in 1910.

Straightened and reset the iron post to project 6 inches above  
ground.

The corner falls on flat ground in sagebrush undergrowth.

---

N. 0° 07.7' W., beginning new measurement.

**38.824** Point for the closing corner of sections 12 and 13, at  
proportionate distance. The original iron post monument with  
attached brass cap marked as described in the official record  
of the survey executed by J.R. and Quinby Stewart in 1910 was  
found lying loose in the near vicinity. The monument was  
disturbed as the result of an old chaining.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
24 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
S12 C  
S13 C  
2004

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Raise a small mound of stone to the west of the aluminum post.

The corner falls on flat ground in sage brush undergrowth.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Removed the original iron post monument from the project area.

**40.039**

Point for corner of sections 7 and 18 only, at proportionate distance. The original iron post monument with attached brass cap, marked as described in the official record of the resurvey executed by J.R. and Quinby Stewart in 1910, was found lying loose in the near vicinity. The monument was disturbed as the result of an old chaining.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
| S7  
| S18  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sage brush undergrowth.

Removed the original iron post monument from the project area.

---

N. 0° 07.7' W., continuing on the east boundary of the township.

**38.833**

Point for the 1/4 section corner of section 12 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
1/4 |  
S12 |  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

**40.059**

The 1/4 section corner of section 7 only, Township 32 South, Range 6 West, monumented with an iron post, 1 inch diameter, firmly set, protruding 14 inches above ground, with the brass cap missing from the iron post.

At the corner point.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
| 1/4  
| S7  
2004

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

Deposit the remains of the original iron post monument  
alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

---

N. 0° 50.2' E., beginning new measurement.

**18.800**

Point for the N 1/16 section corner of section 12 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
N 1/16 |  
S12 |  
2004

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

The corner falls on flat ground, 12 feet north of a dirt road,  
8 feet wide, bears N. 80° E., and S. 80° W., and 21 feet north  
of a fence, projecting the same as the road.

**38.826**

True point for the closing corner of sections 1 and 12,  
hereinafter described.

**41.792**

The corner of sections 6 and 7 only, Township 32 South, Range  
6 West, monumented with a granite stone, 10x8x4 inches, firmly  
set, plainly marked with 4 notches on the south and 2 notches  
on the north edges. (1910 record set an iron post 3 inches  
diameter, 1873 record, set a granite stone, 14x10x4 inches,  
marked with 5 notches on the south and 1 notch on the north  
edges).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
24 inches in the ground, with the aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T32S  
R7W R6W  
| S6  
| S7  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

Deposit the marked stone, alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sage brush undergrowth.

N. 0° 01.8' W., continuing on the east boundary of the township.

**17.102** Point for the S 1/16 section corner of section 1 only, not monumented.

**37.170** Point for the 1/4 section corner of section 1 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
1/4 |  
S1 |  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

The corner is located on flat ground in sagebrush undergrowth.

**40.413** The 1/4 section corner of section 6 only, Township 32 South, Range 6 West, monumented with an iron post, 1 inch diameter, loosley set, with the brass cap marked as described in the official record of the resurvey executed by J.R. and Quinby Stewart in 1910. The monument was found to be nearly rusted through at ground level.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

T32S  
R7W R6W  
| 1/4  
| S6  
2004

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the remains of the original iron post monument alongside the aluminum post.

The corner falls on flat ground in sage brush undergrowth.

---

N. 0° 10.9' E., beginning new measurement.

**40.095**

The corner of sections 6 and 31 only, Townships 31 and 32 South, Range 6 West, monumented with an iron post, 3 inches diameter, firmly set, projecting 16 inches above ground, with the brass cap marked as described in the official record of the resurvey executed by J.R. and Quinby Stewart in 1910.

Raise a mound of stone, 4 ft. by 3 ft. base, by 2 ft. high, west of the iron post.

The corner falls on flat ground, at a fence corner, projecting S. 60° W., and north.

---

N. 0° 06.0' E., continuing on the east boundary of the township.

**5.479**

The closing corner of sections 1 and 36, Townships 31 and 32 South, Range 7 West, monumented with an iron post, 3 inches diameter, firmly set, projecting 20 inches above ground, with the brass cap marked as described in the official record of the resurvey executed by J.R. and Quinby Stewart in 1910.

Raise a mound of stone, around the iron post.

The corner falls on flat ground in a fence, projecting north and south, in sagebrush undergrowth.

From this corner

The corner of sections, 30 and 31, Township 31 South, Range 6 West, monumented with an iron post, 3 inches diameter, firmly set in a mound of stone, with the brass cap marked as described in the official record of the resurvey executed by J.R. and Quinby Stewart in 1910, bears N. 0° 06.0' E., 74.727 chains distance.

The corner falls on a gradual southeast slope in sagebrush undergrowth.

From this same corner

Point for the 1/4 section corner of section 31 only, Township 31 South, Range 6 West, at proportionate distance bears N. 0° 06.0' E., 34.624 chains distance. No remaining evidence of the original corner was found.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
26 inches in the ground, with the aluminum cap marked:

T31S  
R7W R6W  
| 1/4  
| S31  
2004

Deposit a magnet, enclosed in a clear plastic case, at the  
base of the aluminum post.

The corner falls 1 foot east of a fence, projecting north and  
south.

Dependent Resurvey of a Portion of the North Boundary,  
T. 32 S., R. 7 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by  
J.R. and Quinby Stewart in 1910

From the 1/4 section corner of section 35, only, Township 31  
South, Range 7 West, monumented with an iron post, 1 inch  
diameter, loosely set in a mound of stone, with the cap  
incorrectly marked for sections 2 and 35. Removed the S2 mark  
and add the date 2004 to the bottom of the brass cap.

At the corner point

Reset the iron post, 8 inches in the ground, in a mound of  
stone, 4 ft by 4 ft. base, by 2 ft. high around the iron post.

The corner falls on a moderate northwest slope in pinyon,  
juniper and oak brush growth.

N. 89° 48.9' E., on the north boundary of the township.

**38.662**

Point for the closing corner of sections 1 and 2, at  
proportionate distance. No remaining evidence of the original  
corner was found.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
10 inches in the ground, in a mound of stone, 5 ft. by 5 ft.  
base, to top of the aluminum cap marked:

T31S  
|  
| C |  
S2 S1  
T32SR7W  
2004

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

The corner is located on a gradual north slope, in pinyon and juniper growth.

39.552

The corner of sections, 35 and 36 only, Township 31 South, Range 7 West, monumented with an iron post, 3 inches diameter, firmly set in a mound of stone, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

From which

A pinyon, 16 inches diameter, with no visible scribe marks on a healed blaze, bears N. 10° E., 68 links distance.

A pinyon, 20 inches diameter, with no visible scribe marks on a healed blaze, bears S. 70° E., 69 links distance.

A pinyon, 8 inches diameter, with no visible scribe marks on a healed blaze, bears S. 38° W., 18 links distance.

A pinyon, 12 inches diameter, with no visible scribe marks on a healed blaze, bears N. 68° W., 21.5 links distance

N. 89° 56.1' E., continuing on the north boundary of the township.

39.402

Point for the 1/4 section corner of section 1 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground, in a mound of stone, 4 ft. by 4 ft. base, to the top of the aluminum cap marked:

T31S R7W  
1/4 S1  
T32S R7W  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

The corner falls on a gradual rocky southeast slope in juniper and pinyon growth.

40.823

The 1/4 section corner of section 36 only, Township 31 South, Range 7 West, monumented with an iron post, 1 inch diameter, firmly set in a mound of stone, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

No remaining evidence of the original bearing trees were found.

The corner falls on rocky ground in pinyon and juniper growth.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

N. 89° 45.6' E., beginning new measurement.

- 39.774** The closing corner of sections 1 and 36, Townships 31 and 32 South, Range 7 West, on the east boundary of the township, hereinbefore described.

---

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 32 S., R. 7 W., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
by J.R. and Quinby Stewart in 1910

---

From the corner of sections 11, 12, 13 and 14, monumented with an iron post, 2 inches diameter, firmly set, projecting 20 inches above ground, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

The corner falls on flat ground, in sagebrush undergrowth.

N. 89° 53.1' E., between sections 12 and 13.

- 40.098** The 1/4 section corner of sections 12 and 13, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above ground, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

The corner falls on flat ground in sagebrush undergrowth.

---

N. 89° 49.7' E., beginning new measurement.

- 39.775** The closing corner of sections 12 and 13, on the east boundary of the township, hereinbefore described.

---

From the corner of sections 11, 12, 13 and 14.

N. 0° 31.6' W., between sections 11 and 12.

- 39.950** The 1/4 section corner of sections 11 and 12, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above ground, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

The corner falls on flat ground in sagebrush undergrowth.

---

N. 0° 03.2' W., beginning new measurement.

- 20.040** Point for the N 1/16 section corner of sections 11 and 12.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with the aluminum cap marked:

N 1/16  
S11 | S12  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

From the corner, a fence, projecting east and west, bears south, 92 feet distance.

**40.080**

The corner of sections 1, 2, 11 and 12, monumented with an iron post, 2 inches diameter, firmly set in a mound of stone, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

The corner falls on a west slope in juniper, pinyon and sagebrush undergrowth.

N. 89° 44.8'E., between sections 1 and 12.

**20.042**

Point for the W 1/16 section corner of sections 1 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

S1  
W 1/16 —  
S12  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

Raise a small mound of stone, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on a gradual southeast slope in sagebrush undergrowth.

**40.084**

The 1/4 section corner of sections 1 and 12, monumented with an iron post, 1 inch diameter, loosely set, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Reset the iron post to project 12 inches above ground.

The corner falls on flat ground, 15 feet south of an old fence, projecting east and west.

---

N. 89° 52.4' E., beginning new measurement.

**20.045** Point for the E 1/16 section corner of sections 1 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

S1  
E 1/16 —  
S12  
2004

Deposit a magnet, enclosed in a clear plastic case, at the base of the aluminum post.

The corner falls on flat ground, in sagebrush undergrowth.

**40.652** True point for the closing corner of sections 1 and 12, at intersection with the east boundary of the township, hereinbefore described.

From this point

The closing corner of sections 1 and 12, monumented with an iron post, 2 inches diameter, firmly set, projecting 24 inches above ground, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910, bears N 89°52.4' E., 0.039 chains distance.

This monument will now function as an off line closing corner. Add the marks AM 2004 to the brass cap.

Reset the iron post, to project 8 inches above ground.

Set a steel fence post alongside the iron post.

The corner falls on flat ground, in sagebrush undergrowth.

---

From the corner of sections, 1, 2, 11 and 12.

N. 0° 03.9'W., between sections 1 and 2.

**19.982** Point for the S 1/16 section corner of sections 1 and 2, not monumented.

**39.964** The 1/4 section corner of sections 1 and 2, monumented with an iron post, 1 inch diameter, firmly set in a mound of stone, with the brass cap marked as described in the official record of the survey executed by J.R. and Quinby Stewart in 1910.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

From which

A juniper, 16 inches diameter, with scribe marks visible on a open blaze, bears N. 12° E., 65 links distance. (Record N. 20° E., 38 links).

A pinyon, 12 inches diameter, with scribe marks visible on an open blaze, bears N. 83° W. The tree is down and dead, and was not measured.

Raise a mound of stone, 5 ft. by 5 ft. base around the iron post.

---

N. 0° 39.6' W., beginning new measurement.

49.043

The closing corner of sections 1 and 2, at intersection with the north boundary of the township, hereinbefore described.

---

The Subdivision of Section 1,  
T. 32 S., R. 7 W., Salt Lake Meridian, Utah.

---

From the 1/4 section corner of sections 1 and 12.

N. 0° 15.2' W., on the N-S center line of section 1.

20.002

Point for the center S 1/16 section corner of section 1.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C  
S 1/16 | S 1  
C  
2004

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

40.004

Point for the center 1/4 section corner, at intersection with the E-W center line of section 1.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

T32S R7W  
C 1/4  
S1  
2004

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Set a cedar fence post, 6 inches diameter, 2 feet east of the aluminum post.

The corner falls on a east slope, in a shale rockslide.

**88.874** The 1/4 section corner of section 1 only, on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of section 1 only, on the east boundary of the township, hereinbefore described.

S. 89° 41.3' W., on the E-W center line of section 1.

**20.712** Point for the center E 1/16 section corner of section 1, not monumented.

**40.850** The center 1/4 section corner of section 1.

**60.825** Point for the center W 1/16 section corner of section 1, not monumented.

**80.800** The 1/4 section corner of sections 1 and 2.

From the E 1/16 section corner of sections 1 and 12.

N. 0° 07.1' W., on the N-S center line of the SE 1/4 of section 1.

**20.035** Point for the SE 1/16 section corner, at intersection with the E-W center line of the SE 1/4 of section 1.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

SE 1/16  
S1  
2004

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

**40.070** The point for the center E 1/16 section corner of section 1.

From the point for the S 1/16 section corner of section 1 only, on the east boundary of the township, hereinbefore described.

THE SUBDIVISION OF SECTION 12  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

S.  $89^{\circ} 46.9'$  W., on the E-W center line of the SE 1/4 of section 1.

**20.681** The SE 1/16 section corner of section 1.

**40.772** The center S 1/16 section corner of section 1.

---

From the W 1/16 section corner of sections 1 and 12.

N.  $0^{\circ} 09.6'$  W., on the N-S center line of the SW 1/4 of section 1.

**19.992** Point for the SW 1/16 section corner, at intersection with the E-W center line of the SW 1/4 of section 1.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground, in a mound of stone, 3 ft. base to top of the aluminum cap marked:

SW 1/16  
S1  
2004

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

The corner falls on top of a rocky ridge in sagebrush undergrowth.

**39.984** The point for the center W 1/16 section corner of section 1.

---

From the center S 1/16 section corner of section 1.

S.  $89^{\circ} 43.1'$  W., on the E-W center line of the SW 1/4 of section 1.

**20.008** The SW 1/16 section corner of section 1.

**40.016** The point for the S 1/16 section corner of sections 1 and 2.

---

The Subdivision of Section 12,  
T. 32 S., R. 7 W., Salt Lake Meridian, Utah.

---

From the 1/4 section corner of sections 12 and 13.

N.  $0^{\circ} 17.6'$  W., on the N-S center line of section 12.

**40.019** Point for the center 1/4 section corner, at intersection with the E-W center line of section 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with the aluminum cap marked:

THE SUBDIVISION OF SECTION 12  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T32S R7W  
C 1/4  
S12  
2004

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

The corner falls on a small rise, in sagebrush undergrowth.

**60.073** Point for the center N 1/16 section corner of section 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked:

C  
N 1/16 | S 12  
C  
2004

Deposit a magnet enclosed in a clear plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

The corner falls on flat ground in sagebrush undergrowth.

From this corner, a fence projecting east and west, bears south, 58 feet distance.

**80.127** The 1/4 section corner of sections 1 and 12.

---

From the 1/4 section corner of section 12 only on the east boundary of the township, hereinbefore described.

S. 89° 47.1' W., on the E-W center line of section 12.

**39.886** The center 1/4 section corner of section 12.

**80.143** The 1/4 section corner of sections 11 and 12.

---

From the N 1/16 section corner of section 12 only, on the east boundary of the township, hereinbefore described.

S. 89° 49.8' W., on the E-W center line of the NE 1/4 of section 12.

**40.258** The center N 1/16 section corner of section 12.

---

From the center N 1/16 section corner of section 12.

THE SUBDIVISION OF SECTION 12  
T. 32 S., R. 7 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89° 46.0' W., on the E-W center line of the NW 1/4 of section 12.

**40.171**

The N 1/16 section corner of sections 11 and 12.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

Name	Capacity
Jeremy Davis	Survey Technician
Samantha Hamblin	Survey Aid

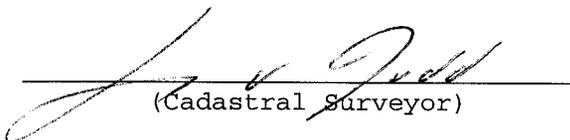
---

## CERTIFICATE OF SURVEY

I, **Larry V. Judd, Cadastral Surveyor**, hereby certify upon honor, that in pursuance of special instructions bearing the date of the **23 day of March, 2004**, I have **executed the dependent resurvey of a portion of the east boundary, a portion of the north boundary, a portion of the subdivisional lines, and the subdivision of sections 1 and 12, in Township 32 South, Range 7 West,**

of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

11/3/06  
Date

  
(Cadastral Surveyor)

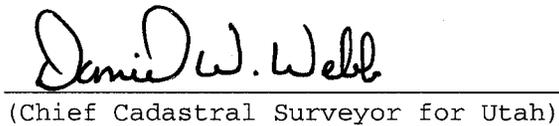
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The following field notes of the **dependent resurvey of a portion of the east boundary, a portion of the north boundary, a portion of the subdivisional lines, and the subdivision of sections 1 and 12, in Township 32 South, Range 7 West, Salt Lake Meridian, Utah,**

executed by **Larry V. Judd, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

December 21, 2006  
Date

  
(Chief Cadastral Surveyor for Utah)