

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY OF

T. 13 S., R. 10 E.;

AND

A PORTION OF THE SOUTH BOUNDARY,

A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND THE

SUBDIVISION OF SECTION 32,

IN

TOWNSHIP 12 SOUTH, RANGE 11 EAST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY


Michael L. Thompson
Cadastral Surveyor

Under special instructions dated and approved **August 24, 2004**, which provided for the surveys included under Group Number **988**, and assignment instructions dated **August 24, 2004**.

Survey commenced **August 24, 2004**
Survey completed **October 1, 2004**

INDEX DIAGRAM

Township 12 South, Range 11 East

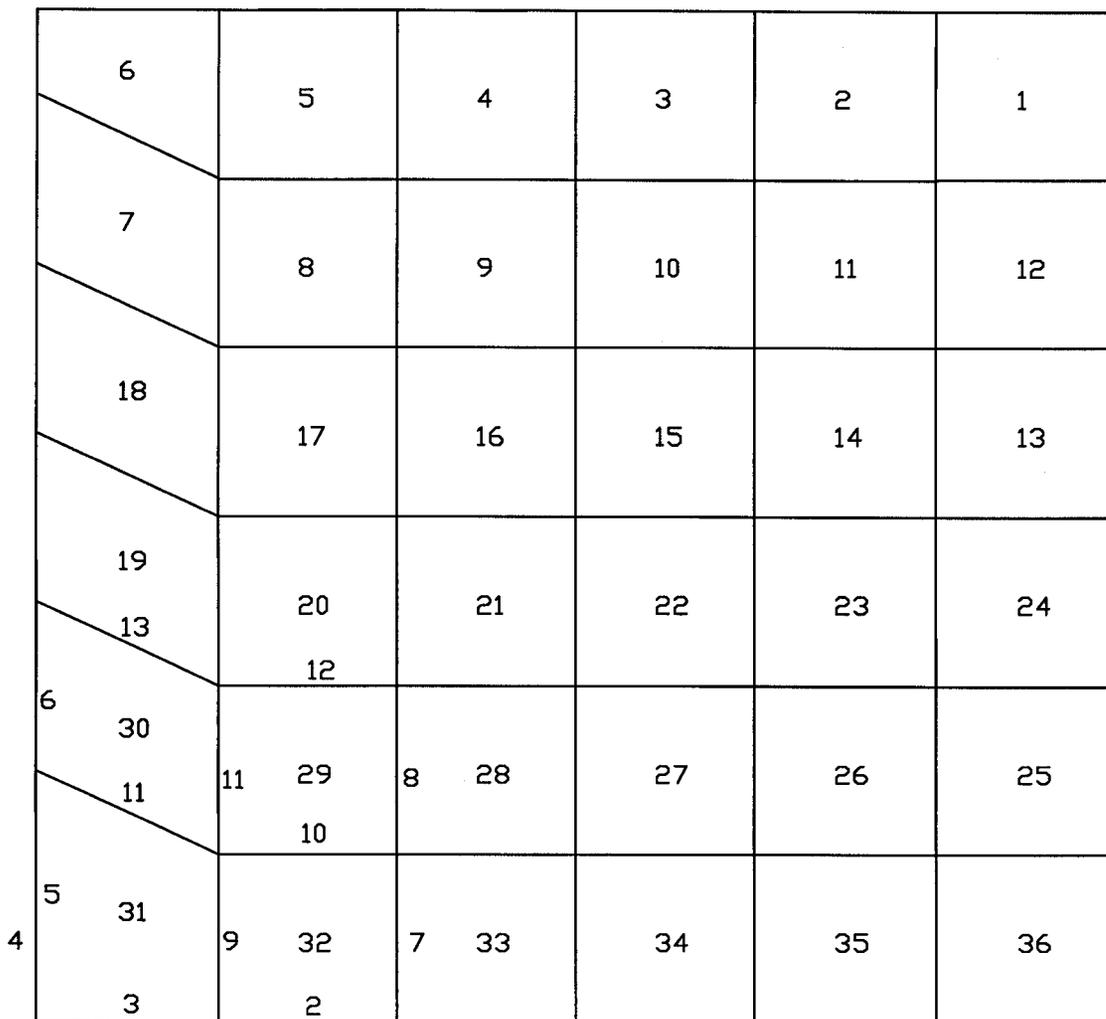

T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

The following field notes describe the dependent resurvey of a portion of the east boundary of T. 13 S., R. 10 E; a portion of the south boundary, a portion of the west boundary, a portion of the subdivisional lines, and the subdivision of section 32, in Township 12 South, Range 11 East, Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by	Retraced or Resurveyed by	
SOUTH BOUNDARY		
All	A.D. Ferron	1885
All	F.E. Baxter	1900
All	G.B. Hatch	1965
EAST BOUNDARY		
Portion	A.D. Ferron	1878
All	A.D. Ferron	1885
Portion	H.W. Miller & W. Byergo	1918-21
WEST BOUNDARY		
Portion	A.D. Ferron	1878
All	A.D. Ferron	1885
Portion	H.W. Miller & W. Byergo	1918-21
Portion	H.W. Miller	1923
Portion	G.B. Hatch	1965
NORTH BOUNDARY		
All	H.W. Miller & W. Byergo	1918-21
SUBDIVISION		
Portion	A.D. Ferron	1878
Portion	A.D. Ferron	1894
Portion	H.W. Miller & W. Byergo	1918-21

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 988, dated August 24, 2004. Prior to the restoration of any corners, all necessary lines of the original surveys were retraced and diligent search was made for any evidence of the original monuments and other calls of the official record. If necessary, identified corners were re-monumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence of the control of each corner.

The true geodetic mean bearings and the true horizontal ground distances of all lines were determined by inverting between the established corners using Global Positioning System (GPS) Real-Time Kinematic (RTK) observations with a Trimble 5700 model receiver. Geodetic control was derived using Global Positioning System (GPS) static survey observations, and post-processed by the National Geodetic Survey's (NGS) On-line Positioning Users Service (OPUS), utilizing Continually Operating Reference Stations (CORS), MIDVALE, CARBON COUNTY, and MYTON1.

T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

The N.A.D. 1983 (CORS 96) geographic position of the southeast corner of section 32, is as follows:

Latitude: 39° 43' 31.097" N., Longitude: 110° 42' 21.577" W., NAVD 1988, Elevation: 8395 feet.

Dependent Resurvey of a Portion of the South Boundary,
T. 12 S., R. 11 E., Salt Lake Meridian

Reestablishment of the survey executed by A. D. Ferron in 1885; the dependent resurvey by F.E. Baxter, et al., in 1900; and the dependent resurvey executed by G.B. Hatch in 1965.

Beginning at the corner of sections 32 and 33 only, on the south boundary of the township, monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 4 inches above ground in a collar of stone, with brass cap marked:

T12S	R11E
S32	S33

S5
T13S R11E
1965

Corner is located directly on-line of east and west fence line in dense undergrowth of sagebrush, scattered oakbrush, and serviceberry.

S. 89° 06.3' W., on the south boundary of section 32.

22.280

The north 1/4 section corner of section 5, T. 13 S., R. 11 E., monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 5 inches above ground in a collar of stone, with brass cap marked:

T12S R11E

1/4	S5
T13S	R11E
1965	

Corner is located in dense aspen in rolling hills.

40.792

The south 1/4 section corner of section 32, T. 12 S., R. 11 E., monumented with an iron post, 2 1/2 inches in diameter, firmly set 8 inches above ground in a collar of stone, with steel t-post set next to brass cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S R11E
1/4 S32

T13S R11E
1965

Corner is located on level ground in dense undergrowth of sagebrush, scattered oakbrush, and serviceberry with east and west fence line bearing north 55 links distance from monument.

S. 89° 06.4' W., beginning new measurement.

- 20.545** Point for the west 1/16 section corner of section 32 only; Not monumented.
- 22.496** Point for the closing corner of sections 5 and 6, T. 13 S., R. 11 E., at proportionate distance, falls in steep slope where it is impracticable to establish a permanent monument. There is no remaining evidence of the original corner.
- 41.090** The corner of sections 31 and 32, monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 12 inches above ground, in a mound of stone 3 foot base, to top of brass cap marked:

T12S R11E
S31 | S32

S6
T13S R11E
1965

Corner is located on steep slope of loose rock and shale with clay base in dense undergrowth of sagebrush, oakbrush, and serviceberry.

S. 89° 09.9' W., on the south boundary of section 31.

- 22.370** Point for the north 1/4 corner of section 6, T. 13 S., R. 11 E., at proportionate distance. There is no remaining evidence of the original corner; Not monumented.

Corner is located on steep slope of loose rock and shale with clay base.

- 40.866** The south 1/4 section corner of section 31, monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 3 inches above ground in a collar of stone, with brass cap marked:

T12S R11E
1/4 S31

T13S R11E
1965

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on a steep south facing slope of loose rock and shale with clay base in dense undergrowth of sagebrush, and scattered oakbrush.

S. 88° 27.3' W., beginning new measurement.

23.738

The closing corner of sections 6 and 31, Ts. 12 & 13 S., R. 11 E., monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 4 inches above ground, with brass cap marked:

		T12S	
		R11E	
T13S		S31	C
R10E		S6	C
S1		T13S	
		R11E	
		1965	

Corner is located on steep southeast slope of loose rock and shale with clay base, in patches of oakbrush, and 20 links west of large sandstone boulder, 40 x 30 x 25 feet.

Dependent resurvey of a portion of the East boundary
T. 13 S., R. 10 E., Salt Lake Meridian, Utah

Reestablishment of the resurvey executed by A.D. Ferron in 1885, and the dependent resurvey executed by H. W. Miller, etal, in 1923.

From the east 1/4 section corner of section 1, T.13 S., R.10 E., monumented with an iron post, 2 1/2 inches in diameter, firmly set projecting 12 inches above ground, with brass cap marked:

		T12S	
R10E		R11E	
1/4			
S1			
		1965	

Corner is located on steep slope in dense undergrowth of sagebrush, and scattered oakbrush.

From this corner, the closing corner of sections 6 and 31, T. 12 & 13 S., R. 11 E., heretofore described, bears S. 4° 30.5' E., 0.082 chains distance.

N. 5° 17.7' W., on the east boundary of section 1.

38.727

The corner of sections 1 and 36, Ts. 12 and 13 S., R. 10 E., and also the 80-S 1/16 section corner of section 31, T. 12 S., R. 11 E., monumented with an iron post, 3 inches in

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY

T. 13 S., R. 10 E., SALT LAKE MERIDIAN, UTAH

CHAINS

diameter, firmly set projecting 12 inches above ground,
with brass cap marked:

	T12S	
R10E		T12S
S36		R11E
		S31
		1923

Corner is located in a barbed wire fence extending north and south, approximately 1/4 mile north of cliff edge with gentle rolling hills interspersed with aspen, and pinon pine groves. There is no remaining evidence of bearing trees described by H.W. Miller in his field notes.

Dependent resurvey of a portion of the West boundary of
T. 12 S., R. 11 E., Salt Lake Meridian, Utah

Reestablishment of the survey executed by A.D. Ferron in 1885, and the dependent resurvey executed by H. W. Miller in 1923.

N. 0° 23.5" E., between sections 31 and 36.

40.208

The 1/4 section corner of sections 31 and 36, monumented with an iron post, 1 inch in diameter, firmly set projecting 3 inches above ground, with a mound of stones to west, with brass cap marked:

	T12S	
R10E		R11E
	1/4	
S36		S31
		1923

Corner is located on gentle north facing slope near bottom of wide, shallow draw. There is no remaining evidence of bearing trees described by H.W. Miller in his field notes.

N. 0° 21.8' E., beginning new measurement.

40.175

The corner of sections 25, 30, 31, and 36, monumented with an iron post, 2 inches in diameter, leaned over and firmly set projecting 14 inches above ground, with brass cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S	
R10E	R11E
S25	S30
S36	S31
1923	

Corner is located in small clearing on southeast slope of a low ridge. There is no remaining evidence of bearing trees described by H.W. Miller in his field notes.

N. 0° 20.6' E., between sections 25 and 30.

40.308

The 1/4 section corner of sections 25 and 30, monumented with an iron post, 1 inch in diameter, firmly set projecting 5 inches above ground, with a collar of stone, and brass cap marked:

T12S10E	
1/4	
S25	S30
1923	

Corner is located in a north and south fence line on side slope of steep south facing ridge in thick sagebrush. A dry creek and aspen grove bears southeast 4.50 chains. There is no remaining evidence of bearing trees described by H.W. Miller in his field notes.

N. 0° 20.9' E., beginning new measurement.

40.193

The corner of sections 19, 24, 25, and 30, monumented with an iron post, 2 inches in diameter, firmly set in a 5 foot base x 2 1/2 foot high mound of stones, projecting 6 inches above top of cairn, with brass cap marked:

T12S	
R10E	R11E
S24	S19
S25	S30
1923	

Corner is located in a level clearing in thick sagebrush at top of ridge. No accessories set in original survey.

Dependent Resurvey of a Portion of the Subdivisional Lines
of T. 12 S., R. 11 E., Salt Lake Meridian, Utah

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T 12 S., R.11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Reestablishment of the survey executed
by A.D. Ferron in 1894.

From the corner of sections 32 and 33, on the south
boundary of the township heretofore described.

N. 0° 20.9' E., between sections 32 and 33.

40.425 The 1/4 section corner of sections 32 and 33, monumented
with a sandstone 18 x 6 x 6 inches, plainly marked 1/4,
with t-post at side.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in
diameter, 24 inches in the ground, with a collar of stone,
a magnet at base, with aluminum cap marked:

T12S	R11E
1/4	
S32	S33
2004	

Buried sandstone next to aluminum post.

The corner is located in a shallow hollow with thick canopy
of aspens, and dirt road bearing south at approximate
distance of 4.50 chains.

N. 3° 17.3' W., beginning new measurement.

36.674 The corner of sections 28, 29, 32, and 33, monumented with
a 5 foot tall wood post, 8 inch in diameter, and mound of
stones at base. No corner stone found. The position was
pointed out by a local resident, is harmoniously related
with other identified original corners in the area, and is
accepted as the best available evidence of the original
corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in
diameter, 14 inches in the ground to bedrock, in a mound of
stone, 3 1/2 foot base, to top of aluminum cap marked:

T12S	R11E
S29	S28
S32	S33
2004	

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located in a level clearing with slight northeast slope. There is additional evidence of fence post holes bearing due east.

From this corner, the 1/4 section corner of sections 28 and 33 bears S. 89° 08.7' E., 38.254 chains distance, monumented with a partially buried stone, and clearly marked with an X on top. Not remonumented.

A 6 foot tall wood post, 8 inches in diameter, bears N. 60° W., 1.5 links distance.

Corner adjoins an aspen grove; a dirt road bears north at a distance of 9 links.

N. 1° 40.2' W., between sections 28 and 29.

40.209

Point for the 1/4 section corner of sections 28 and 29, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 23 inches in the ground, a magnet at base, with aluminum cap marked:

T12S	R11E
	1/4
S29	S28
	2004

Raise a rock cairn, 2 foot base, 1 foot high, 1 foot west of aluminum post. Corner is located in thick sagebrush on a gentle south slope, 15 links south of a dirt road that bears east and west. A barbed wire fence parallels the north side of dirt road.

80.418

The corner of sections 20, 21, 28, and 29, at intersection of barbed wire fences extending east, west, north, and south. This position is harmoniously related to the other identified corners in the area, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 22 inches in the ground, a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S	R11E
S20	S21
S29	S28

2004

Corner located in level clearing with dirt road paralleling fence on south side, next to west end of gate through existing fence line.

From this corner, the 1/4 section corner of sections 16 and 17, bears N. 0° 21.5' E., 121.841 chains distance, and monumented with a stone 16 x 8 x 5 inches marked with 1/4 on top. A 5/8 inch steel rebar sets next to stone projecting 6 inches above ground.

The control line was fully retraced, and no evidence of the intervening corners was found.

The 1/4 section corner is located at the corner of fences extending west, north, and south.

Corner stands in level clearing with thick sagebrush approximately 100 feet east of locked gate and dirt road.

From this same corner, the 1/4 section corner of sections 21 and 28 bears N. 89° 46.7' E, 40.387 chains distance, and monumented with a stone 24 x 11 x 3 inches dimly marked with 1/4 on top. Set a railroad spike flush with ground.

This corner is located at the corner of fences extending west and north.

Corner stands in level clearing with thick sagebrush.

From the corner of sections 31 and 32, on the south boundary of township heretofore described.

N. 1° 57.3' E., between sections 31 and 32.

21.428 Point for the south 1/16 section corner of sections 31 and 32; Not monumented.

42.856 The 1/4 section corner of sections 31 and 32, monumented with a sandstone, 11 x 7 x 7 inches, plainly marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 21 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S R11E
1/4
S31 | S32
2004

Buried stone on west side of monument in collar of stone.

Corner stands on gentle southeast slope in thick aspens with low oakbrush. A low east-west running ridge bears north approximately 25 feet, and a north-south fence line with dirt road on east side bears west at a distance of approximately 350 feet.

N. 0° 46.1' E., beginning new measurement.

- 20.182** Point for the north 1/16 section corner of sections 31 and 32; Not monumented.
- 40.364** The corner of sections 29, 30, 31, and 32, monumented with a sandstone, 16 x 8 x 6 inches, plainly marked with five grooves on east face, and one notch on south edge.

At the corner point

Set aluminum post, 30 inches long, 2 1/2 inches in diameter, 26 inches in ground, with aluminum cap marked:

T12S R11E
S30 | S29
S31 | S32
2004

From the corner of sections 28, 29, 32, and 33.

N. 86° 24.8' W., between sections 29 and 32.

- 19.537** Point for the east 1/16 section corner of sections 29 and 32; Not monumented.
- 39.074** Point for the 1/4 section corner of sections 29 and 32, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 22 inches in ground, with mound of stones 6 inches high, 2 foot base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S R11E
S29
1/4 ———
S32
2004

Corner stands on steep west facing slope approximately 180 feet east of dirt road extending north and south. Grove of aspen trees bears to the east.

58.611 Point for the west 1/16 section corner of sections 29 and 32; Not monumented.

78.148 The corner of sections 29, 30, 31, and 32.

N. 63° 34.7' W., between sections 30 and 31.

48.742 Point for the 1/4 section corner of sections 30 and 31, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 23 inches in ground, in collar of stone, with aluminum cap marked:

T12S R11E
S30
1/4 ———
S31
2004

Corner stands on easterly facing slope in thick sagebrush. A fence line bears south approximately 250 feet, and an Aspen grove bears southwest at a distance of 500 feet.

73.113 Point for the west 1/16 section corner of sections 30 and 31; Not monumented.

77.745 The corner of sections 25, 30, 31, and 36, on the west boundary of the township, heretofore described.

From the corner of sections 29, 30, 31 and 32.

N. 4° 01.5' W., between sections 29 and 30.

39.913 Point for the 1/4 section corner of sections 29 and 30, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 25 inches in ground, in collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S	R11E
1/4	
S30	S29
2004	

Corner stands on steep south facing slope in thick sagebrush. A ravine with dry spring is located approximately 50 feet south of corner that empties into Summit Creek to west of point.

79.826

Point for the corner of sections 19, 20, 29, and 30, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 16 inches in ground, set on bedrock in mound of stones, one foot high, two foot base, with aluminum cap marked:

T12S	R11E
S19	S20
S30	S29
2004	

Corner stands in slight north facing slope with dense sagebrush. A grove of aspen is located to the south.

From this corner, the corner of sections 7, 8, 17, and 18 bears N. 0° 24.8' E., 158.879 chains distance, and monumented with a limestone 16 x 10 x 3 inches clearly marked with five notches on edge, and four groves on face.

The control line was fully retraced, and no evidence of the intervening corners was found.

The corner is east of a barbed wire fence extending north and south at distance of 15 feet. The gas line ROW bears south approximately 45 feet.

From the corner of sections 20, 21, 28, and 29.

N. 89° 47.8' W., between sections 20 and 29.

41.145

The 1/4 section corner of sections 20 and 29, at intersection of wood fences extending north, south, and east. This position is harmoniously related with identified existing original corners in the area, has long been recognized by owners of the adjacent lands as the corner, and is accepted as the best available evidence of the original corner position.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post with magnet at base, 30 inches long, 2 1/2 inches in diameter, 25 inches in ground, in collar of stone, with aluminum cap marked:

T12S R11E
S20
1/4 ———
S29
2004

Corner stands on level ground with cottonwood trees and sagebrush, with a gate through north-south fence bearing south approximately 70 feet. Dirt road bears west at 25 feet distance.

N. 84° 20.3' W., beginning new measurement.

40.287 The corner of sections 19, 20, 29, and 30.

N. 60° 44.3' W., between sections 19 and 30.

45.826 Point for the 1/4 section corner of sections 19 and 30, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 23 inches in ground, in collar of stone, with aluminum cap marked:

T12S R11E
S19
1/4 ———
S30
2004

Corner stands on south facing slope in thick sagebrush.

68.739 Point for the west 1/16 section corner of sections 19 and 30; Not monumented.

72.837 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, heretofore described.

Subdivision of Section 32,
T. 12 S., R. 11 E., Salt Lake Meridian, Utah

SUBDIVISION OF SECTION 32,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 corner of section 32, on the south boundary of township, heretofore described.

N. 0° 03.3' W., on the north and south centerline of section 32.

- 20.818** Point for the center south 1/16 section corner; Not monumented.
- 41.636** Point for the center 1/4 section corner, at intersection with the east and west centerline; Not monumented.
- 60.873** Point for the center north 1/16 section corner; Not monumented.
- 80.110** The 1/4 section corner of sections 29 and 32.

From the 1/4 section corner of sections 32 and 33.

N. 89° 11.7' W., on the east and west centerline of section 32.

- 20.534** Point for the center east 1/16 section corner; Not monumented.
- 41.068** The point for the center 1/4 section corner.
- 60.859** Point for the center west 1/16 section corner; Not monumented.
- 80.650** The 1/4 section corner of sections 31 and 32.

From the point for the center east 1/16 section corner of section 32.

N. 1° 40.3' W., on the north and south centerline of the northeast quarter.

- 37.575** The point for the east 1/16 section corner of sections 29 and 32.

From the point for the west 1/16 section corner of section 32, on the south boundary of the township, heretofore described.

N. 0° 58.0' E., on the north and south centerline of the southwest quarter.

- 21.121** Point for the southwest 1/16 section corner, at intersection with the east and west centerline of the southwest quarter; Not nonumented.

SUBDIVISION OF SECTION 32,
T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

CHAINS

- 42.242** The point for the center west 1/16 section corner of section 32.
-
- From the point for the center south 1/16 section corner of section 32.
- S. 89° 57.3' W.**, on the east and west centerline of the southwest quarter.
- 20.168** The point for the southwest 1/16 section corner.
- 40.336** The point for the south 1/16 section corner of sections 31 and 32.
-
- From the point for the center west 1/16 section corner of section 32.
- N. 0° 22.1' E.**, on the north and south centerline of the northwest quarter.
- 19.708** Point for the northwest 1/16 section corner, at intersection with the east and west centerline; Not monumented.
- 39.416** The point for the west 1/16 corner of sections 29 and 32.
-
- From the point for the center north 1/16 corner of section 32.
- N. 87° 49.1' W.**, on the east and west centerline of the northwest quarter.
- 19.658** The point for the northwest 1/16 section corner.
- 39.316** The point for the north 1/16 section corner of sections 31 and 32.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

T. 12 S., R. 11 E., SALT LAKE MERIDIAN, UTAH

FIELD ASSISTANTS

Name	Capacity
Ronald K. Baugh Glen B. Hatch Jerry L. Thomas	Supervisory Cadastral Surveyor Land Surveyor Land Surveyor

CERTIFICATE OF SURVEY

I, **Michael L. Thompson, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the **24th day of August, 2004**, I have **executed a dependent resurvey of a portion of the east boundary of Township 13 South, Range 10 East, a portion of the south boundary, a portion of the west boundary, a portion of the subdivisional lines, and the subdivision of Section 32, in Township 12 South, Range 11 East,**

of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

9/21/2006

Date

Michael L. Thompson

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the east boundary of Township 13 South, Range 10 East, a portion of the south boundary, a portion of the west boundary, a portion of the subdivisional lines, and the subdivision of Section 32, in Township 12 South, Range 11 East, Salt Lake Meridian, Utah.**

executed by **Michael L. Thompson, Cadastral Surveyor,**

having been critically examined and found correct, are hereby approved.

September 26, 2006

Date

Daniel W. Webb

Chief Cadastral Surveyor for Utah