

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES,
A PORTION OF THE SUBDIVISION OF SECTIONS 25 AND 26 WITHIN THE MYTON
TOWNSITE,

THE LOCATION OF CERTAIN INTERSECTIONS OF THE CENTERLINES OF
CERTAIN STREETS WITHIN THE MYTON TOWNSITE,

THE LOCATION OF CERTAIN LOT LINES WITHIN BLOCKS 15, 24, 25, 26,
27, 36, 38, 39, 40, 41, 46, 51, 60, 61, 70, 71, 72, 73 AND 74,
WITHIN THE MYTON TOWNSITE

IN

TOWNSHIP 3 SOUTH, RANGE 2 WEST

OF THE UINTAH SPECIAL MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY


John F. Carroll
Cadastral Surveyor

Under special instructions dated **July 6, 2005**, approved **July 6, 2005**,
which provided for the surveys included under Group Number **1003**, and
assignment instructions dated **July 6, 2005**

Survey commenced **July 13, 2005**
Survey completed **May 1, 2006**

INDEX DIAGRAM

TOWNSHIP 3 SOUTH, RANGE 2 WEST, UINTAH SPECIAL MERIDIAN, UTAH.

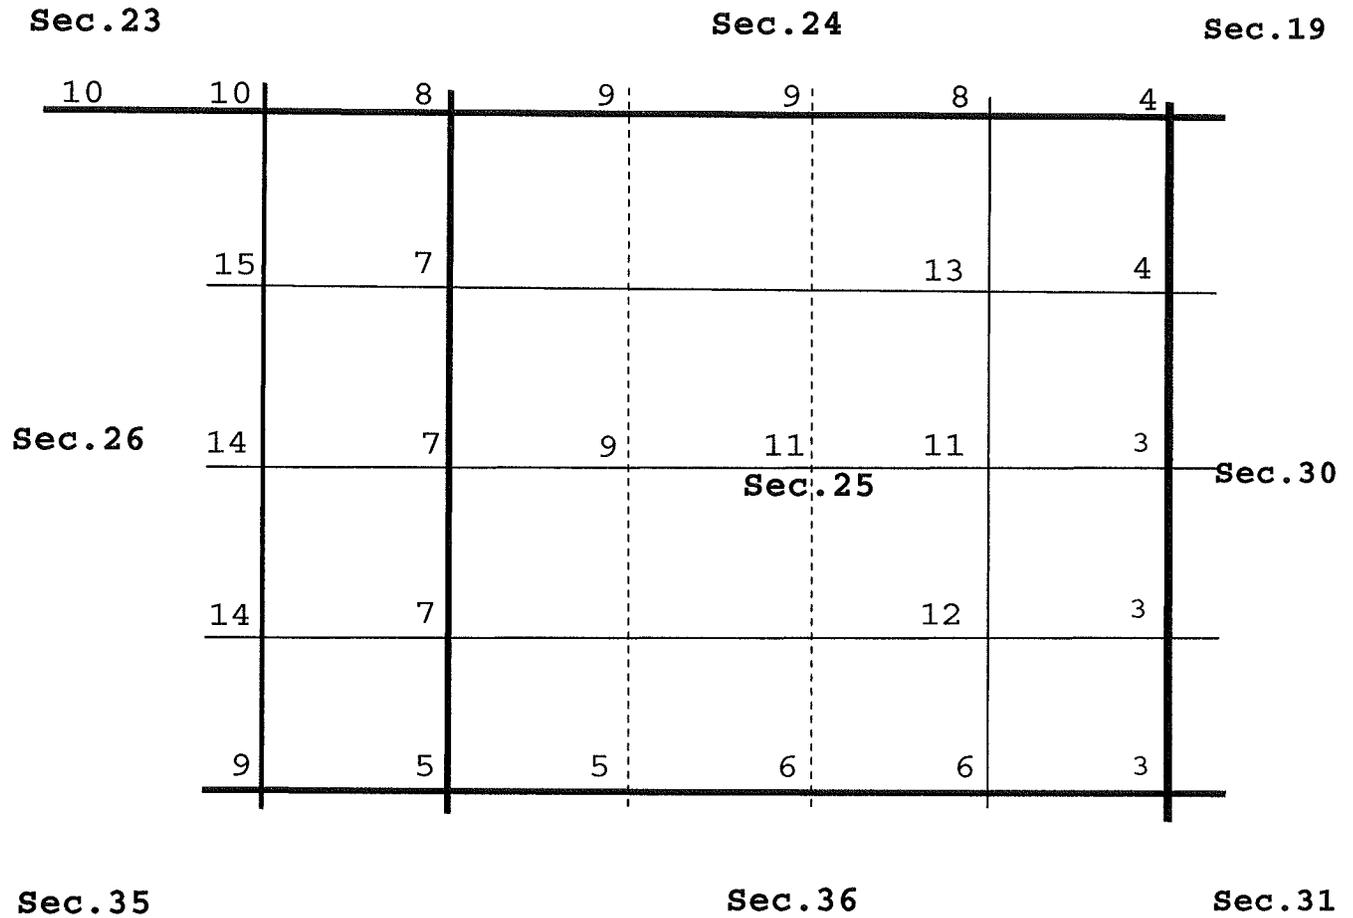

The metes-and bounds resurvey of centerline of South Bdy. Street...	Page 15
The metes-and bounds resurvey of centerline of K Street.....	Page 21
The metes-and bounds resurvey of centerline of J Street.....	Page 26
The metes-and bounds resurvey of centerline of I Street.....	Page 31
The metes-and bounds resurvey of centerline of H Street.....	Page 39
The metes-and bounds resurvey of centerline of G Street.....	Page 49
The metes-and bounds resurvey of centerline of F Street.....	Page 56
The metes-and bounds resurvey of centerline of E Street.....	Page 58
The metes-and bounds resurvey of centerline of D Street.....	Page 60
The metes-and bounds resurvey of centerline of C Street.....	Page 62
The metes-and bounds resurvey of centerline of B Street.....	Page 65
The metes-and bounds resurvey of centerline of East Bdy. Street....	Page 66
The metes-and bounds resurvey of centerline of First Street.....	Page 67
The metes-and bounds resurvey of centerline of Second Street.....	Page 68
The metes-and bounds resurvey of centerline of Third Street.....	Page 69
The metes-and bounds resurvey of centerline of Fourth Street.....	Page 70
The metes-and bounds resurvey of centerline of Fifth Street.....	Page 71
The metes-and bounds resurvey of centerline of Sixth Street.....	Page 72
The metes-and bounds resurvey of centerline of Seventh Street.....	Page 73
The metes-and bounds resurvey of centerline of Eighth Street.....	Page 74
The metes-and bounds resurvey of centerline of Ninth Street.....	Page 74
The metes-and bounds resurvey of centerline of Tenth Street.....	Page 75
The metes-and-bounds resurvey of Block 15.....	Page 76

The metes-and-bounds resurvey of Block 24.....	Page 79
The metes-and-bounds resurvey of Block 25.....	Page 83
The metes-and-bounds resurvey of Block 26.....	Page 88
The metes-and-bounds resurvey of Block 27.....	Page 93
The metes-and-bounds resurvey of Block 36.....	Page 96
The metes-and-bounds resurvey of Block 38.....	Page 97
The metes-and-bounds resurvey of Block 39.....	Page 101
The metes-and-bounds resurvey of Block 40.....	Page 104
The metes-and-bounds resurvey of Block 41.....	Page 110
The metes-and-bounds resurvey of Block 46.....	Page 115
The metes-and-bounds resurvey of Block 51.....	Page 115
The metes-and-bounds resurvey of Block 60.....	Page 119
The metes-and-bounds resurvey of Block 61.....	Page 122
The metes-and-bounds resurvey of Block 70.....	Page 124
The metes-and-bounds resurvey of Block 71.....	Page 130
The metes-and-bounds resurvey of Block 72.....	Page 134
The metes-and-bounds resurvey of Block 73.....	Page 136
The metes-and-bounds resurvey of Block 74.....	Page 140

TOWNSHIP 3 SOUTH, RANGE 2 WEST, UINTAH SPECIAL MERIDIAN, UTAH.

The following field notes are those of the of the dependent resurvey of a portion of the east boundary, a portion of the subdivisional lines, a portion of the subdivision of sections 25 and 26 within the Myton Townsite, the location of certain intersections of the centerlines of certain streets within the Myton Townsite, and the location of certain lot lines within Blocks 15, 24, 25, 26, 27, 36, 38, 39, 40, 41, 46, 51, 60, 61, 70, 71, 72, 73 and 74, within Myton Townsite, T. 3 S., R. 2 W., Uintah Special Meridian, Utah.

History of Surveys

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY			
All	D.G. Major	1882	
All			J.R. & A.J. Stewart 1904
Portion			R. Gentry 1919-22
EAST BOUNDARY			
Portion	C.L. DuBois	1875	
Portion	D.G. Major	1882	
Portion			R.E.L. Collier & H. Rager 1903
Portion			A.D. Kidder & D.B. Miller 1905
WEST BOUNDARY			
All	D.G. Major	1882	
All			R. Gentry 1919-22
Portion			J.L. Thomas 1998-99
NORTH BOUNDARY			
All	D.G. Major	1882	
Portion			R. Gentry 1919-22
Portion			J.L. Thomas 1999
SUBDIVISION			
All	D.G. Major	1882	
Portion			A.D. Kidder & D.B. Miller 1905
Portion			R. Gentry & H.W. Miller 1918
Portion			R. Gentry 1919-22
Portion			J.L. Thomas 1999

RECORDED LOCAL RECORDS

Myton Townsite
 Myton City Plats, Pages 1-16
 Duchesne County Survey File #78
 Duchesne County Survey File #146
 Duchesne County Survey File #363
 Duchesne County Survey File #439
 Duchesne County Survey File #441
 Duchesne County Survey File #463

TOWNSHIP 3 SOUTH, RANGE 2 WEST, UINTAH SPECIAL MERIDIAN, UTAH.

Duchesne County Survey File #475
 Duchesne County Survey File #765
 Duchesne County Survey File #767
 Duchesne County Survey File #845
 Duchesne County Survey File #879
 Duchesne County Survey File #1012
 Duchesne County Survey File #1167
 Duchesne County Survey File #1239

Duchesne County Survey Monument Records in T. 3 S., R. 2 W., U.S.M., Utah

Duchesne County Survey Monument Record dated October 14, 1986
 Duchesne County Survey Monument Record dated April 28, 1989
 Duchesne County Survey Monument Record dated December 3, 2002

UNRECORDED LOCAL RECORDS

Myton City Plat - Larry Zufelt
 Myton City Plat - C. DeNile McKenna

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1003, dated July 6, 2005.

The direction of the lines were determined by mean geodetic inverse between corners. Global Positioning System (GPS) utilizing Real-time kinematic (RTK) was used throughout the survey. Cadastral Measurement Management (CMM) was utilized during the course of the survey.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the E 1/16 section corner of sections 26 and 35, T. 3 S., R. 2 W., as determined by a tie to the National Geodetic Survey Control Station "SWALE", utilizing GPS, using RTK techniques, is as follows:

Latitude: 40°11'09.555" N. Longitude: 110°04'18.469" W.
 N.A.D. 1983 (1994) ELEV. 4921 ft.

The geographic position of National Geodetic Survey Control Station "SWALE" is as follows:

Latitude: 40°09'30.59839" N. Longitude: 110°06'35.36427" W.
 N.A.D. 1983 (1994) N.A.V.D. 1988 5347 feet.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

Dependent Resurvey of a Portion of the East Boundary,
T. 3 S., R. 2 W., Uintah Special Meridian, Utah.

Reestablishment of the Survey Executed by
D. G. Major in 1882

Beginning at the point for the cor. of secs. 25, 30, 31 and 36,
hereinafter described.

N. 0°02.2' E., bet. secs. 25 and 30.

19.992 Point for the S 1/16 sec. cor. of secs. 25 and 30, at
(1319.5) proportionate dist., utilizing irregular boundary adjustment;
there is no remaining evidence of the original cor.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in
the ground, with aluminum cap mkd.

S1/16
S25|S30
2005

Cor. is located in a swamp, under fence bears E-W, and 15 1/2
feet west of a North bearing fence.

39.984 Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate
(2638.9) dist., utilizing irregular boundary adjustment; there is no
remaining evidence of the original cor.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in
the ground, with magnet at base, with aluminum cap mkd.

T3S
R2W R1W
1/4
S25|S30
2005

Drive a steel fence post along north side of aluminum post.

Cor. is located on south bank of irrigation ditch, 12 ft. South
of center of irrigation ditch, flows East, 41 ft. South of the
intersection of the centerlines of currently named Street 3000
West and 7500 South.

Reestablishment of the Survey Executed by
A. D. Kidder and D. B. Miller in 1905

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

N. 0°00.8' W., beginning new measurement.

20.002 Point for the N 1/16 sec. cor. of secs. 25 and 30, at
(1320.1) proportionate dist., utilizing irregular bdy. adjustment; there
is no remaining evidence of the original cor.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., flush with
the ground, with aluminum cap mkd.

T3S
R2W R1W
N1/16
S25|S30
2005

Deposit a 5/8' rebar inside the aluminum post.

Cor. is located in grass, near a paved street, bears E-W.

N. 0°00.2' E., beginning new measurement.

19.952 The cor. of secs. 19, 24, 25 and 30, monumented with a recorded
(1316.8) aluminum post, 2 1/2 ins. diam., firmly set, 10 ins. below
ground, with aluminum cap mkd. T3S R2W R1W S24 S19 S25 S30 2002,
as recorded by Jerry D. Allred, P.L.S. 148951 on December 26,
2002, Duchesne County Recorders office, and is accepted as the
best available evidence of the original cor.

from which the local reference objects

A cedar gate post, 5 ins. diam., bears N. 58 1/2° E., 10.7
ft. dist., to face of gate post.

A power pole, 14 ins. diam., bears S. 61 3/4° E., 86.1 ft.
dist., to nail and washer on southwest side of power pole.

A cedar loading chute post, 5 ins. diam., bears
S. 40 1/4° W., 18.1 ft. dist., to southeast side of post. No
remains of local nail washer were recovered.

A cedar loading chute post, 5 ins. diam., bears
S. 85 1/4° W., 11.9 ft. dist., to south side of loading chute
post.

A cedar fence post, 5 ins. diam., bears N. 81° W., 18.0 ft.
dist., to nail and washer on south side of fence post.

A cedar fence post, 5 ins. diam., bears N. 72° W., 12.1 ft.
dist., to southeast face of fence post.

Cor. is located at end of gravel road, near gate entrance to
alfalfa field.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

Dependent Resurvey of a Portion of the Subdivisional Lines

Reestablishment of the Survey Executed by D. G. Major in
1882 and the Resurveys Executed by A. D. Kidder and
D. B. Miller in 1905 and R. Gentry and H. W. Miller
in 1918.

From the point for cor. of secs. 25, 26, 35 and 36, at 1918
record bearing and dist. from the E 1/16 sec. cor. of secs. 26
and 35, hereinafter described, falls on paved surface, bears
South and on a curve concave to the northeast. This point is in
agreement with recovered original evidence of the 1918 resurvey
record and local survey records.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

from which the reference objects

A Mag Nail bears S. 36°47' E., 51.4 ft. dist., to railroad
tie fence post.

A nail and shiner, bears N. 32°22' E., 52.8 ft. dist., on
westerly side of power pole, 12 ins. diam.

N. 89°50.5' E., bet. secs. 25 and 36, identical with the south
bdy. of Myton Townsite.

20.191 Point for the W 1/16 sec. cor. of secs. 25 and 36, at 1918 record
(1332.6) bearing and dist. from the cor. of secs. 25, 26, 35 and 36. This
point is in agreement with recovered original evidence of the
1918 resurvey record.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in
the ground, with magnet at base, in a collar of stone, with
aluminum cap mkd.

S25
W1/16———
S36
2005

Cor. is located on a flat in grass and Russian olive, 40 ft.
North of the intersection of fences, bears E-W, and S.

N. 89°33.5' E., beginning new measurement, identical with the
south bdy. of Myton Townsite.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS

(FEET)

19.861 Point for the 1/4 sec. cor. of secs. 25 and 36, at 1918 record
(1310.8) bearing and dist., from the W 1/16 sec. cor. of secs. 25 and 36,
falls on paved surface, bears E - W. This point is in agreement
with recovered original evidence of the 1918 resurvey record.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

from which the reference objects

A Mag Nail, bears S. 7°07' E., 32.3 ft. dist., on a railroad
tie fence post.

A Mag Nail, bears S. 48°02' W., 47.3 ft. dist., on a railroad
tie fence post.

N. 89°45.0' E., beginning new measurement, identical with the
south bdy. of Myton Townsite.


20.000 Point for the E 1/16 sec. cor. of secs. 25 and 36, at 1918 record
(1320.0) bearing and dist., from the 1/4 sec. cor. of secs. 25 and 36,
falls on paved surface, bears E - W. This point is in agreement
with recovered original evidence of the 1918 resurvey record.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

from which the reference object

A Mag Nail, 2 ins. long, 1/2 in. diam. top, bears
S. 3°10' W., 30.2 ft. dist., on a cedar fence post, 4 ins.
diam., at intersection of fences, bears S and W.

From this point the intersection of the centerlines of East
Boundary Street and South Boundary Street, bears N. 7°08.1' W.,
158.5 ft. dist. Set an aluminum drive-in monument, 30 ins. long,
3/4 in. diam., 24 ins. in the ground, with 2 ins. diam. aluminum
cap mkd.



Cor. is located in a swamp bog, 15 ft. West of a fence, bears
N-S.

N. 89°45.0' E., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

20.020 Point for the cor. of secs. 25, 30, 31 and 36, at 1905 record
(1321.3) bearing and dist., from the E 1/16 sec. cor. of secs. 25 and 36,
falls on paved surface, bears E-W, and in line with fence lines
to the N and S. This point is in agreement with recovered
original evidence of the 1905 and 1918 resurvey records.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

from which the reference object

A Mag Nail, bears S. 3°10' W., 30.2 ft. dist., on fence post,
4 ins. diam., at intersection of fences, bearing S and W.

From the cor. of secs. 25, 26, 35 and 36.

N. 0°46.9' W., bet. secs. 25 and 26.

2.724 Point of intersection with the centerline of South Boundary
(179.8) Street.

19.962 The point for S 1/16 sec. cor. of sections 25 and 26, at
(1317.5) proportionate dist., no remaining evidence of original cor. Not
monumented.

21.055 Point of intersection with the centerline of I Street.
(1439.6)

33.792 Point of intersection with the centerline of G Street.
(2280.2)

39.924 The 1/4 sec. cor. of secs. 25 and 26, monumented with a
(2635.0) galvanized iron pipe, 2 3/4 ins. diam., firmly set, projecting 12
ins. above ground, in a collar of stone, with unmarked galvanized
iron cap. The galvanized iron pipe is in agreement with
recovered original evidence of the 1905 and 1918 resurvey records
and is accepted as the best available evidence of the original
cor.

Reestablishment of the Resurvey, Executed by R. Gentry in 1919-22

N. 0°46.9' W., beginning new measurement.

0.989 Point of intersection with the centerline of F Street.
(65.3)

13.716 Point of intersection with the centerline of D Street.
(905.4)

19.986 Point for the N 1/16 sec. cor. of secs. 25 and 26, at
(1319.1) proportionate dist.; there is no remaining evidence of the
original cor. Not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

N. 0°46.9' W., beginning new measurement.

0.094 Point of intersection with the centerline of C Street.
(6.2)

19.986 Point for the cor. of secs. 23, 24, 25 and 26, at proportionate
(1319.1) dist., utilizing bearing-bearing intersection. The control to the east was determined from an inverse from the witness cor. for the E 1/16 sec. cor. of secs. 24 and 25, to the 1/4 sec. cor. of secs. 24 and 25, S. 89°47.1' W. This inverse bearing was then projected to the intersection with the projected sec. line bet. secs. 25 and 26. The control to the south was determined from an inverse from the cor. of secs. 25, 26, 35 and 36 to the 1/4 sec. cor. of secs. 25 and 26. This inverse bearing was then projected to the intersection with the projected inverse sec. line bet. secs. 24 and 25. The 1919-22 resurvey record indicates that the "course as recorded in the returns of the Myton Townsite survey" was used to determine a "point of intersection with line S. 89°45' W., from the 1/4 sec. cor. bet. secs. 24 and 25 which is visible." This method of cor. restoration was determined to be in the best agreement with existing monumentation of the 1904 Myton Townsite survey and the 1919-22 resurvey record.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with magnet at base, with aluminum cap mkd.

T3S R2W

S23	S24
S26	S25

2005

From this point, an unrecorded rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, with plastic cap mkd. W.E.C. RLS145764 (Ralph Evans Watson), bears N. 31°45.7' W., 8.6 ft. dist., and is not utilized during the course of this resurvey.

Cor. is located 7 ft. East of guard rail for paved road.

From the cor. of secs. 19, 24, 25 and 30.

S. 89°26.2' W., bet. secs. 24 and 25.

20.286 True point for the E 1/16 sec. cor. of secs. 24 and 25, falls in
(1338.9) an old channel of the Duchesne River. Not monumented.

S. 89°45.0' W., beginning new measurement, identical with north bdy. of Myton Townsite.

1.950 Witness cor. to the E 1/16 sec. cor. of secs. 24 and 25,

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS

(FEET)

(128.7) monumented with an aluminum post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with aluminum cap mkd. T3S R2W S24 E 1/16 S25 WC 1989, as recorded on April 28, 1989, by Jerry D. Allred LS3817 on Duchesne County Survey Monument Record, in Duchesne County Recorders office, with a washed granite, 14 ins. in the ground, clearly mkd. WC 1/16, alongside, and is accepted as a careful and faithful perpetuation of the original cor.

S. 89°47.1' W., beginning new measurement., identical with north bdy. of Myton Townsite.

18.384 The 1/4 sec. cor. of secs. 24 and 25, monumented with a red
(1213.3) granite, 19X9X5 ins., firmly set, clearly mkd. 1/4 on north face.

At the cor. point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with magnet at base, with aluminum cap mkd.

T3S R2W
S24
1/4———
S25
2005

Bury mkd. stone on west side of aluminum post.

Cor. is located in old fence, bears E-W.

S. 89°47.1' W., beginning new measurement, identical with north bdy. of Myton Townsite.

20.274 Point for the W 1/16 sec. cor of secs. 24 and 25, at
(1338.1) proportionate distance, there is no remaining evidence of the original cor. Not monumented.

40.548 The cor. of secs. 23, 24, 25 and 26.
(2676.2)

From the cor. of secs. 25, 26, 35 and 36.

S. 89°50.0' W., bet. secs. 26 and 35, identical with south bdy. of Myton Townsite.

20.040 The E 1/16 sec. cor. of secs. 26 and 35, monumented with an iron
(1322.6) post, 2 ins. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. as described in the field notes of the 1918 resurvey record, with a sandstone, 21X8X6, clearly mkd. 1/16 on one side, along north side of iron post.

Cor. is located 1 ft. East and 2 ft. North of the intersection of fences, bears N and W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

From this corner, National Geodetic Survey Control Station "SWALE", monumented with a standard brass disk set projecting 4 inches above ground in concrete, with the disk marked, SWALE 1947, bears S. 46°42.8" W., forward bearing, and N. 46°41.3 E., back bearing for a distance of 221.289 chains.

From the cor. of secs. 23, 24, 25 and 26.

N. 89°50.9' W., bet. secs. 23 and 26, identical with north bdy. of Myton Townsite.

19.476
(1285.4) True point for the E 1/16 sec. cor. of secs. 23 and 26, falls within the flood zone of the Duchesne River where it is unsafe to monument, at proportionate dist.; utilizing bearing-bearing intersection. The control to the east was determined to be the inverse bearing from the 1/4 sec. cor. of secs. 24 and 25 to the cor. of secs. 23, 24, 25 and 26. This results in a rotation factor of 0°02.1' in a clockwise direction. The 1919-22 resurvey record bearing (from the cor. of secs. 23, 24, 25 and 26 to the E 1/16 cor. of sec. 23 and 26) is N. 89°53' W. Applying the rotation factor results in a bearing of N. 89°50.9' W. The control to the south was determined from an inverse from the E 1/16 sec. cor. of secs. 26 and 35 to the center E 1/16 sec. cor. of sec. 26. This inverse bearing was then projected to the intersection with the rotated sec. line bearing bet. secs. 23 and 26. The 1919-22 resurvey record indicates that "From the re-established cor. of secs. 23, 24, 25 and 26. Thence, on recorded course as returned in the Myton Townsite survey, determining the course by deflection angles turned from a meridian established by observations on Polaris". This method of cor. restoration was determined to be in the best agreement with existing monumentation of the 1904 Myton Townsite survey and the 1919-22 resurvey record.

N. 89°50.8' W., beginning new measurement.

19.460
(1284.4) The 1/4 sec. cor. of secs. 23 and 26, monumented with an iron post, 1 ins. diam., firmly set, in poor condition, 12 ins. below ground, with brass cap mkd. as described in the field notes of the 1919-22 resurvey record.

At the cor. point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T3S R2W
S23
1/4—
S26
2005

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

The iron post has rusted into two pieces. The brass cap and a 12 ins. section of the iron post were removed from the area. The aluminum post was placed over the remains of the iron post.

Cor. is located 1 1/2 ft. South of the intersection of fences, E-W, and N.

Resurvey of a Portion of the Survey of the Subdivision
of Section 25.

Reestablishment of the Survey Executed by D. G. Major in
1882, and the Resurvey Executed by A. D. Kidder and
D. B. Miller in 1905

From the 1/4 sec. cor. of secs. 25 and 26.

N. 89°46.9' E., on the E-W centerline of sec. 25.

- | | |
|--------------------|--|
| 2.115
(139.6) | Point of intersection with the centerline of Eighth Street. |
| 9.388
(619.6) | Point of intersection with the centerline of Seventh Street. |
| 16.662
(1099.7) | Point of intersection with the centerline of Sixth Street. |
| 20.156
(1330.3) | Point for the center W 1/16 sec. cor. of sec. 25, at proportionate dist., there is no remaining evidence of the original cor. Not monumented. |
| 23.933
(1579.6) | Point of intersection with the centerline of Fifth Street. |
| 38.483
(2539.9) | Point of intersection with the centerline of Third Street. |
| 40.312
(2660.6) | Point for the center 1/4 sec. cor. of sec. 25, at proportionate dist., there is no remaining evidence of the original cor. Not monumented. |
| 45.744
(3019.7) | Point of intersection with the centerline of Second Street. |
| 53.017
(3499.8) | Point of intersection with the centerline of First Street. |
| 60.468
(3990.9) | The center E 1/16 sec. cor. of sec. 25, monumented with an iron post, 2 ins. diam., firmly set, 6 ins. below ground, with brass cap mkd. as described in the field notes of the 1918 R. Gentry and H. W. Miller resurvey record for the resurvey of Myton Townsite. This 1918 iron post is a remonumentation of the center |

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 25,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

E 1/16 sec. cor. of sec. 25 reestablished in 1905 Arthur D. Kidder and Daniel B. Miller resurvey of Myton Townsite.

N. 89°23.3' E., beginning new measurement.

20.164 The 1/4 sec. cor. of secs. 25 and 30.
(1330.8)

From the E 1/16 sec. cor. of secs. 25 and 36.

N. 0°10.4' W., on the N-S centerline of the SE 1/4 of sec. 25, identical with the east bdy. of Myton Townsite.

2.382 Point for the projected intersection of South Boundary Street.
(157.2) Not monumented.

From which the intersection of South Boundary Street and East Boundary Street, hereinafter described, bears N.89°56.0'W., 19.2 feet distance.

8.753 Point for the projected intersection of K Street.
(577.7) Not monumented.

From which the intersection of K Street and East Boundary Street, hereinafter described, bears N.89°56.8'W., 17.9 feet distance.

15.124 Point for the projected intersection of J Street.
(998.2) Not monumented.

From which the intersection of J Street and East Boundary Street, hereinafter described, bears N.89°55.8'W., 16.5 feet distance.

19.928 Point for the SE 1/16 sec. cor. of sec. 25, at proportionate
(1315.2) dist., there is no remaining evidence of the original cor. Not monumented.

21.496 Point for the projected intersection of I Street.
(1418.7) Not monumented.

From which the intersection of I Street and East Boundary Street, hereinafter described, bears N.89°59.0'W., 15.2 feet distance.

27.867 Point for the projected intersection of H Street.
(1839.2) Not monumented.

From which the intersection of H Street and East Boundary Street, hereinafter described, bears N.89°59.0'W., 13.9 feet distance.

34.238 Point for the projected intersection of G Street.
(2259.7) Not monumented.

From which the intersection of G Street and East Boundary Street, hereinafter described, bears N.89°57.7'W., 12.5 feet distance.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 25,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

39.856 The center E 1/16 sec. cor. of sec. 25.
(2630.5)

N. 0°11.5' W., on the N-S centerline of the NE 1/4 of sec. 25,
identical with the east bdy. of Myton Townsite.

0.754 Point for the projected intersection of F Street.
(49.7) Not monumented.

From which the intersection of F Street and East Boundary Street,
hereinafter described, bears N.89°58.6'W., 11.2 feet distance.

20.114 Point for the NE 1/16 sec. cor. of sec. 25, at
(1327.5) proportionate dist., there is no remaining evidence of the
original 1882 cor. Not monumented.

24.166 The 1905 witness cor. to the E 1/16 sec. cor. of secs. 24 and 25,
(1595.0) monumented with a washed flint, 6X9X8 ins. above ground, clearly
mkd. WC 1/16 on west face. The marked stone is near the base of
a Russian olive tree. One of the branches has grown over and
around the portion of the marked stone above ground. No
improvements made.

From which the reference monument bears N. 83°43.8' W., 28.6 feet
distance, set an aluminum post 30 ins. long 2 1/2 ins. diam., 24
ins in the ground, with magnet at base, with aluminum cap mkd.

RM WC

28.6 FT
S25 •————→

2006

Corner set 1 1/2 feet east of a power pole. Set a steel fence
post along side.

N. 0°10.1'W., beginning new measurement, identical with the east
bdy. of Myton Townsite.

15.800 True point for the E 1/16 sec. cor. of secs. 24 and 25.
(1042.8)

Resurvey of a Portion of the Survey of the
Subdivision of Section 26.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 26,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)

Reestablishment of the Survey Executed by D. G. Major
in 1882, and the Resurvey Executed by A. D. Kidder
and D. B. Miller in 1905

From the 1/4 sec. cor. of secs. 25 and 26.

S. 89°49.2' W., on the E-W centerline of sec. 26.

- 5.159 Point of intersection with the centerline of Ninth Street.
(340.5)
- 12.424 Point of intersection with the centerline of Tenth Street.
(820.0)
- 19.759 The center E 1/16 sec. cor. of sec. 26, monumented with an
(1304.1) aluminum post, 2 1/2 ins. diam., firmly set, projecting 5 ins.
above ground, with aluminum cap mkd. E1/16 + S26 1986 by Jerry
D. Allred LS3817 on October 14, 1986 on Duchesne County Survey
Monument Record, in Duchesne County Recorder's office, and is
accepted as a careful and faithful perpetuation of the original
cor.
- Cor. is located on fill bank of F Street currently known as (100
South), 25 ft. South of the center of F Street.
-
- From the E 1/16 sec. cor. of secs. 26 and 35.
- N. 0°22.8' W., on the N-S centerline of the SE 1/4 of sec. 26,
identical with the west bdy. of Myton Townsite.
- 2.779 True point for the intersect with the centerline of South
(183.4) Boundary Street, hereinafter described.
- 9.144 True point for the intersect with the centerline of K Street,
(603.5) hereinafter described.
- 15.508 Point for the intersect with the centerline of J Street,
(1023.5) hereinafter described.
- 19.960 Point for the SE 1/16 sec. cor. of sec. 26, at
(1317.3) proportionate dist., there is no remaining evidence of the
original cor. Not monumented.
- 21.876 Point for the intersect with the centerline of I Street,
(1443.8) hereinafter described.
- 28.240 Point for the intersect with the centerline of H Street,
(1863.8) hereinafter described.
- 34.599 Point for the intersect with the centerline of G Street,
(2283.5) hereinafter described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 26,
T. 3 S., R. 2 W., UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS
(FEET)


39.917 The center E 1/16 sec. cor. of sec. 26.
(2634.5)

Reestablishment of the Survey Executed by
R. Gentry in 1919-22

N. 0°22.8' W., on the N-S centerline of the NE 1/4 of sec. 26.

- 1.050 Point for the intersect with the centerline of F Street,
(69.3) hereinafter described.
- 20.043 Point for the NE 1/16 sec. cor. of sec. 26, at
(1322.8) proportionate dist., there is no remaining evidence of the
original cor. Not monumented.
- 37.776 Point selected for the witness cor. to the E 1/16 sec. cor. of
(2493.1) secs. 23 and 26.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in
the ground, with magnet at base, with aluminum cap mkd.



Drive a steel fence post along southeast side of aluminum post.

Cor. is located on a gravel bed, approximately 70 ft. South of
the center of the Duchesne River, flows easterly.

40.086 True point for the E 1/16 sec. cor. of secs. 23 and 26.
(2645.7)

Metes-and-Bounds Resurvey of the centerline of South Boundary
Street, of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

FEET

Reestablishment of the Surveys Executed by A.D. Kidder,
Etal., in 1905 and R. Gentry, Etal., in 1917.

From the intersection of the centerlines of East Boundary Street
and South Boundary Street, hereinbefore described.

N. 89°56.0' W., along the centerline of South Boundary Street, to
the controlling cor. point at the intersection of Sixth Street
and South Boundary Street.


METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

479.9

Point for the intersection of the centerlines of First Street and South Boundary Street at proportionate dist.

Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 23 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




Cor. is located in a swamp bog.

959.8

The point for the intersection of the centerlines of Second Street and South Boundary Street, at proportionate dist.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with magnet at base, with aluminum cap mkd.




Cor. is located in an alkali flat.

1439.7

The point for the intersection of the centerlines of Third Street and South Boundary Street, at proportionate dist.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.



Cor. is located in an alkali flat.

1919.6


The point for the intersection of the centerlines of Fourth Street and South Boundary Street, at proportionate dist., falls on paved surface.

Set a PK nail, 2 ins. long, 1/2 in. diam. top, flush with paved surface.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET


From this point, the southwest cor. of Lot 9, Block 129, bears N. 38°40.0' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located on an alkali flat in swamp grass and Russian olive.

From this same point, the southeast cor. of Lot 16, Block 128, bears N. 38°43.2' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Cor. is located on an alkali flat in swamp grass and Russian olive.

2399.5 The point for the intersection of the centerlines of Fifth Street and South Boundary Street, determined by projecting the bearing of S. 0°03.2' E., as derived from the inverse of the points at the intersections of the centerlines of Fifth Street and J Street and Fifth Street and K Street. And at record 420.0 feet dist., as determined from the 1919 Myton Townsite survey.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.




2005


From this point, the southwest cor. of Lot 9, Block 128, bears N. 38°48.6' E., 65.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET




From this same point, the southeast cor. of Lot 16, Block 127, bears N. 37°33.9' W., 63.0 ft. dist., monumented with a wood post, firmly set, in poor condition, with no marks visible. At the cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2879.4 Point for the intersection of the centerlines of Sixth Street and South Boundary Street, at the projected bearing of S. 0°03.6' E., as derived from the inverse of the points at the intersections of the centerlines of Sixth Street and J Street and Sixth Street and K Street. And at record, 420.0 feet dist., as determined from the 1919 Myton Townsite survey.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to solid rock, with magnet at base, with aluminum cap mkd.



Cor. is located in an alkali area and gravel bed.

From the intersection of the centerlines of Sixth Street and South Boundary Street.


S. 89°58.8' W., on the centerline of South Boundary Street, to the controlling cor. point at the intersection of the projected bearing to the south from the westerly side of Block 122.

480.1 Point for the intersection of the centerlines of Seventh Street and South Boundary Street, at proportionate dist.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with magnet at base, with aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.


F E E T



Cor. is located 5 ft. South of old irrigation ditch, in thick Russian olive.


- 960.2 Point for the intersection of the centerlines of Eighth Street and South Boundary Street, at proportionate dist.

Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 19 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




- 1440.3 Point for the intersection of the centerlines of Ninth Street and South Boundary Street at proportionate dist.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.



From this point, the southeast cor. of Lot 16, Block 123, bears N. 38°49.0' W., 63.8 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




Cor. is located on an alkali flat in grass and scattered greasewood.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.


FEET
1920.4

Point for the intersection of the centerlines of Tenth Street and South Boundary Street, at proportionate dist.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.



From this point, the southwest cor. of Lot 9, Block 123, bears N. 38°47.4' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




Cor. is located on a hard gravel bed.

2388.3

Point for the intersection of the centerline of South Boundary Street and the west bdy. of Myton Townsite, identical with the N-S centerline of the SE 1/4 of Sec. 26., falls in the middle of a tree, 1 foot east of a N-S fence line, where it can not be monumented.

From which the witness corner bears N. 58°51.6' E., 36.8 feet distance. Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with magnet at base, with aluminum cap mkd.



Set a steel fence post along side the witness cor.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SOUTH BOUNDARY STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Metes-and-Bounds Resurvey of the centerline of K Street,
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the point at the intersection of the centerlines of East Boundary Street and K Street, at proportionate distance.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

K ST	ST
	E BDY

2006

Cor. is located in swamp grass.

From this point, the southeast cor. of Lot 16, Block 111, bears N. 38°41.9' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B111
L16
SE

2006

From the intersection of the centerline of East Boundary Street and K Street.

N. 89°56.8' W., on the centerline of K Street, to the controlling cor. point at the intersection of centerlines of Sixth Street and K Street.

479.8 Point for the intersection of the centerline of First Street and K Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

K	ST	ST
	1ST	


2006

959.6 Point for the intersection of the centerlines of Second Street and K Street, at bearing-bearing intersection.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF K STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET


Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.



2006

- 1439.4 Point for the intersection of the centerlines of Third Street and
K Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.




2005

Cor. is located on a gravel bed in Russian olive.

- 1919.2 Point for the intersection of the centerlines of Fourth Street
and K Street, at bearing-bearing intersection.

Set a PK nail, 2 ins. long, 1/2 in. diam. top, flush with paved
surface.


From this point, the southwest cor. of Lot 9, Block 114, bears
N. 38°39.4' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8
in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap
mkd.



2005

Cor. is located on an alkali flat in grass and greasewood.

From this same point, the northwest cor. of Lot 8, Block 129,
bears S. 38°39.8' E., 64.0 ft. dist. Set a rebar, 18 ins. long,
5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum
cap mkd.




2005

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF K STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

F E E T

Cor. is located on an alkali flat in swamp grass and greasewood.

From this same point, the northeast cor. of Lot 1, Block 128, bears S. 38°39.3' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005


Cor. is located on an alkali flat in grass and greasewood.

From this same point, the southeast cor. of Lot 16, Block 115, bears N. 38°09.6' W., 65.7 ft. dist., monumented with an unrecorded steel fence post, firmly set, projecting 15 ins. above ground and is accepted as a faithful and careful perpetuation of the original cor. The partial remains of the original wood post were recovered near the steel fence post. Lay wood post alongside steel fence post.

Cor. is located on a gravel bed.

2399.0 Point for the intersection of the centerlines of Fifth Street and K Street, at bearing-bearing intersection.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.




2005

Cor. is located on nearly level ground in scattered greasewood.

2878.8 Point for the intersection of the centerlines of Sixth Street and K Street, at midpoint bet. the intersection of the centerlines of Sixth Street and South Boundary Street, and the intersection of the centerlines of Sixth Street and J Street.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 19 ins. in the ground to solid rock, with magnet at base, with aluminum cap mkd.



2005

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF K STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Cor. is located on a flat in sagebrush.


From this point, the southeast cor. of Lot 16, Block 117, bears N. $38^{\circ}35.6'$ W., 64.1 ft. dist., monumented with an unrecorded steel fence post, firmly set, projecting 14 ins. above ground, accepted as a faithful and careful reestablishment of the original cor.

From the intersection of the centerlines of Sixth Street and K Street.

S. $89^{\circ}59.6'$ W., on the centerline of K Street, to the controlling cor. point at the intersection of the centerline of K Street and the easterly right-of-way of West Boundary Street at mid-point between block cors. of Blocks 121 and 122.

480.0 Point for the intersection of the centerlines of Seventh Street and K Street, at bearing-bearing intersection.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.




2005

Cor. is located on nearly level ground in scattered greasewood.

960.0 Point for the intersection of the centerlines of Eighth Street and K Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005


Cor. is located on a gravel bed in greasewood and sagebrush.

1440.0 Point for the intersection of the centerlines of Ninth Street and K Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.


METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF K STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



Cor. is located on a flat gravel bed.


From this point, the southwest cor. of Lot 9, Block 119, bears N. 38°11.0' E., 64.1 ft. dist., monumented with a wood post, 3 ins. square, in poor condition. At the corner point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Lay wood post alongside rebar and aluminum cap.

Cor. is located on an alkali flat in grass.

1920.0 Point for the intersection of the centerlines of Tenth Street and K Street, at bearing-bearing intersection.




Cor. is located in a gravel bed and weeds.

2390.6 Point for the intersection of the centerline of K Street and the west bdy. of Myton Townsite, identical with the N-S centerline of the SE 1/4 of Sec. 26., falls in a canal where it cannot be monumented.

From which the witness corner bears S. 39°59.7' E., 31.4 feet distance. Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF K STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET




Set a steel fence post along side the witness cor.

Metes-and-Bounds Resurvey of the centerline of J Street, of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the point at the intersection of the centerlines of East Boundary Street and J Street, at proportionate dist.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam., aluminum cap mkd.




Cor. is located on an alkali flat in grass and greasewood, 10 ft. west of a fence bears N-S.

From the intersection of the centerlines of East Boundary Street and J Street.

N. 89°55.8' W., on the centerline of J Street, to the controlling cor. point at the intersection of the centerlines of Fifth Street and J Street.

479.8 Point for the intersection of the centerlines of First Street and J Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




Cor. is located on an alkali flat in grass and greasewood.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF J STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET
959.7

Point for the intersection of the centerlines of Second Street and J Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam., aluminum cap mkd.




2005

Cor. is located on an alkali flat in grass and greasewood.

1439.4 Point for the intersection of the centerlines of Third Street and J Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Cor. is located on a gravel bed in swamp grass.

1919.2 Point for the intersection of the centerlines of Fourth Street and J Street, at bearing-bearing intersection, falls on paved surface.

Set a PK nail, 2 ins. long, 1/2 in. diam. top, flush with paved surface.

From this point, the southwest cor. of Lot 9, Block 107, bears N. 38°39.3' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Cor. is located on a gravel bed in grass.

From this same point, the northwest cor. of Lot 8, Block 114, bears S. 38°39.9' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 4 ins. in the ground to solid rock, in a collar of stone, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF J STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



2005

Cor. is located on a gravel bed in grass.

From this same point, the northeast cor. of Lot 1, Block 115, bears S. 38°49.6' W., 64.3 ft. dist., monumented with an unrecorded steel fence post and is accepted as a careful and faithful reestablishment of the position of the original cor.

Cor. is located in a gravel bed and Russian olive.

From this same point, the southeast cor. of Lot 16, Block 106, bears N. 38°39.8' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located on a gravel bed in weeds.


2399.7 The intersection of the centerlines of Fifth Street and J Street, determined at distance-distance intersection from the northwest cor. of Lot 8, Block 115 and the southeast cor. of Lot 16, Block 105.

From this point, the northwest cor. of Lot 8, Block 115, bears S. 38°38.4' E., 64.0 ft. dist., monumented with an unrecorded steel fence post and is accepted as a careful and faithful reestablishment of the position of the original cor.

From this same point, the southeast cor. of Lot 16, Block 105, bears N. 38°34.8' W., 64.0 ft. dist., monumented with an unrecorded steel fence post and is accepted as a careful and faithful reestablishment of the position of the original cor.

At the intersect point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with magnet at base, with aluminum cap mkd.



2005

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF J STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Cor. is located in a swamp bog.

From the intersection of the centerlines of Fifth Street and J Street.

S. 89°54.6' W., on the centerline of J Street to the controlling cor. of Sixth Street and J Street.


- 480.4 Point for the intersection of the centerlines of Sixth Street and J Street, at distance-distance intersection from the northwest cor. of Lot 8, Block 116 and the northeast cor. of Lot 1, Block 117.

From this point, the northwest cor. of Lot 8, Block 116, bears S. 38°43.6' E., 64.0 ft. dist., monumented with an unrecorded steel fence post and is accepted as a careful and faithful reestablishment of the position of the original cor.

From this same point, the northeast cor. of Lot 1, Block 117, bears S. 38°41.1' W., 64.0 ft. dist., monumented with an unrecorded steel fence post and is accepted as a careful and faithful reestablishment of the position of the original cor.

At the intersect point

Set an aluminum drive in monument, 30 ins. long, 3/4 in. diam., 20 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located in a gravel pit in tules.

From the intersection of the centerlines of Sixth Street and J Street.


S. 89°59.5' W., on the centerline of J Street, to the controlling cor. point at the intersection of the centerline of J Street and the easterly right-of-way of West Boundary Street at mid-point between block cors. of Blocks 100 and 121.

- 480.0 Point for the intersection of the centerlines of Seventh Street and J Street, at bearing-bearing intersection.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with magnet at base, with aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF J STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.


FEET



Cor. is located in swamp bog, approximately 50 ft. West of paved road.

- 960.0 Point for the intersection of the centerlines of Eighth Street and J Street, at bearing-bearing intersection.


Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Cor. is located on an alkali flat in grass.

- 1440.0 Point for the intersection of the centerlines of Ninth Street and J Street, at bearing-bearing intersection.


Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 25 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Cor. is located in a swamp bog.

- 1920.0 Point for the intersection of the centerlines of Tenth Street and J Street, at bearing-bearing intersection.


Set an aluminum drive-in rod, 30 ins. long, 3/4 in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Cor. is located on flat land in grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET




Cor. is located in swamp grass.

- 959.7** Point for the intersection of the centerlines of Second Street and I street, at bearing-bearing intersection.

At the intersect point,

Set a rebar 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam., aluminum cap mkd.




Cor. is located on gravel bed in Russian olive.

- 1439.4** Point for the intersection of the centerlines of Third Street and I street, at bearing-bearing intersection.

At the intersect point,

Set a rebar 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam., aluminum cap mkd.



Cor. is located on a gravel bed and alkali flat.

- 1919.2** Point for the intersections of the centerlines of Fourth Street and I Street, at bearing-bearing intersection, falls on paved surface

At the intersect point,

Set a PK nail, 2 ins. long, 1/2 in. top, flush with paved surface.

From this point, the southwest cor. of Lot 9, Block 92, bears

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. $38^{\circ}39.4'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, $5/8$ in. diam., 16 ins. in the ground, with 2 ins. diam, aluminum cap mkd.

B92
L9
SW

2005

Cor. is located on a gravel bed in greasewood.

From this same point, the northwest cor. of Lot 8, Block 107, bears S. $38^{\circ}39.8'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, $5/8$ in. diam., 14 ins. in the ground, with 2 ins. diam., aluminum cap mkd.

B107
L8
NW

2005

Cor. is located in a gravel bed in road fill.

From this same point, the northeast cor. of Lot 1, Block 106, bears S. $38^{\circ}39.3'$ W., 64.0 ft. dist. Set rebar, 18 ins. long, $5/8$ in. diam., 14 ins., in the ground, with 2 ins. diam., aluminum cap mkd.

NE
L1
B106

2005

From this same point, the southeast cor. of Lot 16, Block 93, bears N. $38^{\circ}38.9'$ W., 64.0 ft. dist. Set a rebar, 18 ins. long, $5/8$ in. diam., 16 ins. in the ground, with 2 ins. diam., aluminum cap mkd.

B93
L16
SE

2005

Cor. is located on a gravel bed in scattered weeds.


2399.6 Point for the intersection of the centerlines of Fifth Street and I Street, at bearing-bearing intersection.

At the intersect point,

Set a rebar, 18 ins. long, $5/8$ in. diam., 14 ins. in the ground, with 2 ins. diam., aluminum cap mkd.


METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



Cor. is located on a gravel bed.

From this point, the southeast cor. of Lot 16, Block 94, bears N. $38^{\circ}04.0'$ W., 64.9 ft. dist., monumented with a wood post 3 ins. square in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, $5/8$ in. diam., 18 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Lay wood post alongside rebar and aluminum cap.


Cor. is located on a alkali flat in weeds and scattered Russian olive.

2879.9 Point for the intersection of the centerlines of Sixth Street and I street, at bearing-bearing intersection.

At the intersect point,

Set a PK nail, 2 ins. long, $1/2$ in. top, flush with paved surface.

From this point, the southwest cor. of Lot 9, Block 94, bears N. $38^{\circ}39.3'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, $5/8$ in. diam., 16 ins. in the ground, with 2 ins. diam., aluminum cap mkd.



Cor. is located on a alkali flat in grass.

From this same point, the northwest cor. of Lot 8, Block 105, bears S. $39^{\circ}26.8'$ E., 63.5 ft. dist., monumented with a wood post 2 ins. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the corner point, set a rebar, 18 ins.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam.
aluminum cap mkd.

NW
L8
B105

2005

Lay wood post alongside the rebar and cap.

Cor. is located on a alkali flat in swamp grass.

From this same point, the northeast cor. of Lot 1, Block 104,
bears S. 38°39.2' W., 64.0 ft. dist. Set an aluminum drive in
monument, 30 ins. long, 3/4 in. diam., 22 ins. in the ground,
with no aluminum cap.

Cor. is located in a drainage ditch, bears N-S, in 12 inches of
water.

From this same point, the southeast cor. of Lot 16, Block 95,
bears N. 38°39.9' W., 64.0 ft. dist. At the corner point, set a
rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2
ins. diam., aluminum cap mkd.

B95
L16
SE

2005

Cor. is located in swamp grass and Russian olive.

3359.7 Point for the intersection of the centerlines of Seventh Street
and I street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground,
with 2 ins. diam., aluminum cap mkd.

I	ST	ST
	7TH	

2005


Cor. is located in a alkali flat in swamp grass.

From this point, the southwest cor. of Lot 9, Block 95, bears
N. 38°17.0' E., 64.6 ft. dist., monumented with a wood post 2
ins. square, firmly set, in poor condition, with no marks
visible, as described in the field notes of the 1905 resurvey
record for the Townsite Myton, Utah. At the corner point, set a

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

rebar, 16 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Lay wood post alongside the rebar and cap.

Cor. is located on a alkali flat and swamp grass.

3839.7 Point for the intersection of the centerlines of Eighth Street and I street, at bearing-bearing intersection.


Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam., aluminum cap mkd.



2005

Cor. is located on an alkali flat in grass.

From this point the southwest cor. of Lot 9, Block 96, bear N. 38°12.1' E., 64.4 ft. dist., monumented with a wood post, 3 ins. square, in poor condition, firmly set, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Lay wood post alongside the rebar and cap.


Cor. is located on an alkali flat in grass.

4319.8 Point for the intersection of the centerlines of Ninth Street and I street, at bearing-bearing intersection.

Set an aluminum drive in monument, 30 ins. long, 3/4 in. diam., 22 ins. in the ground, with 2 ins. diam., aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



2005

From this point, the southwest cor. of Lot 9, Block 97, bears N. 38°18.7' E., 64.3 ft. dist., monumented with a wood post, 2 ins. square, in poor condition, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the corner point, set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Lay wood post alongside the rebar and cap.

Cor. is located in alkali flat and grass.

From this same point, the northeast cor. of Lot 1, Block 101, bears S. 39°11.6' W., 63.9 ft. dist., monumented with a wood post, 2 ins. square, badly deteriorated, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the corner point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005


Lay wood post alongside the rebar and cap.

Cor. is located on alkali flat in grass.

From this same point, the southeast cor. of Lot 16, Block 98, bears N. 38°41.7' W., 64.7 ft. dist., monumented with a wood post, 2 ins. square, firmly set, badly deteriorated, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the corner point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF I STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



2005

Lay wood post alongside the rebar and cap.


Cor. is located on a alkali flat in grass.

From the intersection of the centerlines of Ninth Street and I Street.

N. 89°58.0' W., on the centerline of I street.

479.9 Point for the intersection of the centerlines of Tenth Street and I street, at bearing-bearing intersection.


Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam., aluminum cap mkd.



2005

Cor. is located on an alkali flat in grass.

From this point the southwest cor. of Lot 9, Block 98, bears N. 38°13.2' E., 63.9 ft. dist., monumented with a wood post, 2 ins. square, firmly set, projecting 6 ins. above ground, with scribe marks BK visible on one side, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the corner point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Wood post was removed from the project area.


Cor. is located on a alkali flat in grass.

From this same point, the southeast cor. of Lot 16, Block 99, bears N. 38°56.8' W., 64.6 ft. dist., monumented with a wood post 3 ins. by 2 ins. square, badly deteriorated, loosely set, projecting 5 ins. above ground, as described in the field notes

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From this point, the northeast cor. of Lot 1, Block 89, bears S. 38°54.0' W., 62.8 ft. dist., monumented with a wood post, 2 ins. square, flush with base of swamp grass, with rotted remains of wood post alongside with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Lay remains of wood post alongside of rebar and aluminum cap.

Cor. is located in swamp grass and Russian olive.

From this same point, the southeast cor. of Lot 16, Block 88, bears N. 37°37.4' W., 64.7 ft. dist., monumented with a wood post, 2 ins. square, firmly set, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Lay wood post alongside rebar and aluminum cap.


Cor. is located on an alkali flat in swamp grass.

From the intersection of the centerlines of East Boundary Street and H Street.

N. 89°59.0' W., on the centerline of H Street.

479.8 Point for the intersection of the centerlines of First Street and H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located on al alkali flat in swamp grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From this point, the southwest cor. of Lot 9, Block 88, bears N. $38^{\circ}30.3'$ E., 65.1 ft. dist., monumented with a wood post, 2 ins. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 18 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B88
┌
L9
└
SW

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located in swamp grass.

From this same point, the southeast cor. of Lot 16, Block 87, bears N. $37^{\circ}33.6'$ W., 64.6 ft. dist., monumented with a wood post, 2 ins. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. Set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam., aluminum cap mkd.

B87
┌
L36
└
SE

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located in swamp grass.

959.8 Point for the intersection of the centerlines of Second Street and H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

H	ST	ST
2ND		

2005

Cor. is located on an alkali flat in greasewood and Russian olive.

From this point, the northwest cor. of Lot 8, Block 90, bears S. $39^{\circ}12.3'$ E., 63.4 ft. dist., monumented with a wood post, 2 ins. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NW
L8
B90

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located in an alkali flat and Russian olive.

From this same point, the northeast cor. of Lot 1, Block 91, bears S. 39°00.1' W., 63.1 ft. dist., monumented with a wood post, 2 ins. square, firmly set, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NE
L1
B91

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located on an alkali flat in Russian olive.

1439.5 Point for the intersection of the centerlines of Third Street and H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

H	ST	ST
	3RD	

2005

Cor. is located on a gravel bed in greasewood.

From this point, the northeast cor. of Lot 1, Block 92, bears S. 39°11.5' W., 63.3 ft. dist., monumented with a wood post, 2 ins. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

NE
L1
B92

2005

Lay the wood post alongside rebar and aluminum cap.

- 1919.4 Point for the intersection of the centerlines of Fourth Street and H Street, at bearing-bearing intersection, falls on paved surface.

Set a PK nail, 2 ins. long, 1/2 in. diam. top, flush with paved surface.

From this point, the southwest cor. of Lot 9, Block 85, bears N. $38^{\circ}39.3'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B85
L9
SW

2005

Cor. is located on a gravel bed in swamp grass.

From this same point, the northwest cor. of Lot 8, Block 92, bears S. $38^{\circ}39.9'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NW
L8
B92

2005

Cor. is located on a gravel bed in swamp grass and Russian olive.

From this same point, the northeast cor. of Lot 1, Block 93, bears S. $38^{\circ}39.4'$ W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam., aluminum cap mkd.

NE
L1
B93

2005


Cor. is located on a gravel bed in swamp grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From this point, the southeast cor. of Lot 16, Block 84, bears
N. 38°39.8' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8
in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap
mkd.

B84
L16
SE




2005

- 2399.7 Point for the intersection of the centerlines of Fifth Street and
H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.

H ST
ST




2005

Cor. is located on an alkali flat in grass and dense Russian
olive.

From this point, the southeast cor. of Lot 16, Block 83, bears
N. 38°06.6' W., 64.7 ft. dist., monumented with a wood post, 2
ins. square, firmly set, in poor condition, with no marks
visible, as described in the field notes of the 1905 resurvey
record for the Townsite Myton, Utah. At the Cor. point, set a
rebar, 18 ins. long, 5/8 in. diam. 16 ins. in the ground, with 2
ins. diam. aluminum cap mkd.

B83
L16
SE



2005

Lay wood post alongside rebar and aluminum cap.

- 2880.0 Point for the intersection of the centerlines of Sixth Street and
H Street, at bearing-bearing intersection, falls on paved
surface.

Set a PK nail, 2 ins. long, 1/2 in. diam., flush with paved
surface.

From this point, the southwest cor. of Lot 9, Block 83, bears
N. 38°39.2' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8
in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap
mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

	B83
	L9
	SW

2005

Cor. is located on an alkali flat in greasewood.

From this same point, the northwest cor. of Lot 8, Block 94, bears S. 38°39.9' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NW	
L8	
B94	

2005

Cor. is located on an alkali flat in greasewood.

From this same point, the northeast cor. of Lot 1, Block 95, bears S. 38°39.2' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NE	
L1	
B95	

2005

Cor. is located in a fill ditch, bears N-S.

From this same point, the southeast cor. of Lot 16, Block 82, bears N. 38°40.0' W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B82	
L16	
SE	

2005


Cor. is located on west side of fill ditch, bears N-S.

3359.9 Point for the intersection of the centerlines of Seventh Street and H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

F E E T



2005

Cor. is located in an alkali flat in grass and greasewood.

From this point, the southwest cor. of Lot 9, Block 82, bears N. 38°59.0' E., 63.5 ft. dist., monumented with a wood post, 2 ins. square, loosely set, in poor condition, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located in an alkali flat in grass and greasewood.


From this same point, the northwest cor. of Lot 8, Block 95, bears S. 38°40.3' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located on an alkali flat in greasewood.

From this same point, the northeast cor. of Lot 1, Block 96, bears S. 40°05.0' W., 64.7 ft. dist., monumented with a wood post, 2 ins. square, loosely set, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam. 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Lay wood post alongside rebar and aluminum cap.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Cor. is located in an alkali flat in grass and greasewood.

From this same point, the southeast cor. of Lot 16, Block 81, bears N. 38°23.2' W., 64.6 ft. dist., monumented with a wood post, 2 ins. square, firmly set, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam. 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B81
L16
SE

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located on an alkali flat in grass and greasewood.

3839.9 Point for the intersection of the centerlines of Eighth Street and H Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. brass cap mkd.

H	ST	ST
H	ST	ST

2005

Cor. is located on an alkali flat in grass.

From this point, the southwest cor. of Lot 9, Block 81, bears N. 38°10.0' E., 64.4 ft. dist., monumented with a wood post, 3 ins. square, firmly set, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B81
L9
SW

2005

Lay wood post alongside rebar and aluminum cap.


Cor. is located on an alkali flat in grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF H STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

4320.0 Point for the intersection of the centerlines of Ninth Street and H Street, at bearing-bearing intersection, falls in a bog.


Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

4799.9 The intersection of the centerlines of Tenth Street and H Street, at bearing-bearing intersection.

Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.




2005

Cor. is located in an alkali flat.

5278.6 Point for the intersection of the centerline of H Street, and the west bdy. of Myton Townsite, identical with the N-S centerline of the SE 1/4 of sec. 26.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with magnet at base, with aluminum cap mkd.



2006

Cor. is located on an alkali flat in swamp grass and scattered Russian olive trees, 1 foot east of a N-S fence line.

Set a steel fence post along side the cor.


METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Metes-and-Bounds Resurvey of the centerline of G Street,
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the point at the intersection of the centerlines of East
Boundary Street and G Street, at proportionate dist.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.




Cor. is located on an alkali flat in greasewood, 15 ft. west of a
fence, bears N-S.

From the intersection of the centerlines of East Boundary Street
and G Street.

N. 89°57.7' W., on the centerline of G Street, to the controlling
cor. point at the intersection of the centerlines of Third Street
and G Street.

479.9 Point for the intersection of the centerlines of First Street and
G Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.




Cor. is located on an alkali flat in grass.

959.9 Point for the intersection of the centerlines of Second Street
and G Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 18 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET



2005

Cor. is located on an alkali flat in greasewood.

- 1439.6 The intersection of the centerlines of Third Street and G Street, monumented with an iron post, 2 ins. diam., firmly set, 24 ins. below ground, with illegible marks on brass cap, as described on the plat approved on September 13, 1905, for the Townsite of Myton, Utah. Not remonumented.

From this point, the southeast cor. of Lot 16, Block 70, bears N. $39^{\circ}07.2'$ W., 64.1 ft. dist., not monumented.

From the intersection of the centerlines of Third Street and G Street.


N. $89^{\circ}59.4'$ W., on the centerline of G Street, to the controlling cor. point at the intersection of centerlines of Fifth Street and G Street.

- 479.9 Point for the intersection of the centerlines of Fourth Street and G Street, at bearing-bearing intersection, falls on paved surface.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point, the southwest cor. of Lot 9, Block 70, bears N. $38^{\circ}31.6'$ E., 63.2 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 8, Block 85, bears S. $38^{\circ}38.4'$ E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located on a gravel bed in weeds, 4 ft. North of a fence, bears E-W.

From this same point, the northeast cor. of Lot 1, Block 84, bears S. $38^{\circ}40.5'$ W., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 12 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

NE
L1
B84

2005

Cor. is located on a gravel bed in grass and scattered Russian olive.

From this same point, the southeast cor. of Lot 16, Block 71, bears N. 38°41.2' W., 64.1 ft. dist., hereinafter described.

- 960.1 The intersection of the centerlines of Fifth Street and G Street, monumented with an iron post, 2 ins. diam., firmly set, 36 ins. below ground, with illegible marks on brass cap, as described on the plat approved on September 13, 1905, for the Townsite of Myton, Utah. Not remonumented.

From this point, the southeast cor. of Block 72, bears N. 39°12.5' W., 64.0 ft. dist., hereinafter described.

From this same point, the southwest cor. of Lot 9, Block 71, bears N. 38°26.4' E., 63.7 ft. dist., hereinafter described.

From the intersection of the centerlines of Fifth Street and G Street.

S. 89°58.9' W., on the centerline of G Street, to the controlling cor. point at the intersection of Seventh Street and G Street.

- 480.3 Point for the intersections of the centerlines of Sixth Street and G Street, at bearing-bearing intersection, falls on paved surface.

At the intersect point,

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point, the southwest cor. of Block 72, bears N. 38°39.2' E., 64.0 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 8, Block 83, bears S. 38°40.0' E., 64.0 ft. dist. Set a rebar, 18 ins. long, 5/8 in. diam., 14 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NW
L8
B83

2005

Cor. is located on an alkali flat in grass and greasewood.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From this point, the northeast cor. of Lot 1, Block 82, bears S. $38^{\circ}39.3'$ W., 64.0 ft. dist. Set a rebar, 18 ins. long, $5/8$ in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NE
L1
B82

2005

Cor. is located on an alkali flat in swamp grass.

From this same point, the southeast cor. of Lot 16, Block 73, bears N. $38^{\circ}39.9'$ W., 64.0 ft. dist., hereinafter described.

960.3 The intersection of the centerlines of Seventh Street and G Street, monumented with an iron post, 2 ins. diam., firmly set, 12 ins. below ground, with illegible marks on brass cap, as described on the plat approved on September 13, 1905, for the Townsite of Myton, Utah. Not remonumented.

From this point, the southwest cor. of Lot 9, Block 73, bears N. $37^{\circ}28.7'$ E., 62.9 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 8, Block 82, bears S. $38^{\circ}30.5'$ E., 64.2 ft. dist., monumented with a wood post, 2 ins. square, loosely set, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, $5/8$ in. diam., 11 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

NW
B82
L8

2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located on a alkali flat, on the north side of a Russian olive.

From this same point, the southeast cor. of Lot 16, Block 74, bears N. $39^{\circ}54.5'$ W., 65.1 ft. dist., hereinafter described.

From the intersection of the centerlines of Seventh Street and G Street.


METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. 89°59.3' W., on the centerline of G Street, to the controlling cor. point at the intersection of the centerlines of Ninth Street and G Street.

480.0 Point for the intersection of the centerlines of Eighth Street and G Street, at bearing-bearing intersection.


Set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

Cor. is located in alkali flat in grass.

From this point, the northwest cor. of Lot 8, Block 81, bears S. 38°37.3' E., 63.8 ft. dist., monumented with a wood post, 2 ins. square, firmly set, projecting 4 ins. above ground, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite of Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 16 ins. in the ground, with 2 ins. diam., aluminum cap mkd.




2005

Lay wood post alongside rebar and aluminum cap.

Cor. is located on an alkali flat in grass.

960.1 The intersection of the centerlines of Ninth Street and G Street at the projected bearing from the intersection of the centerlines of Ninth Street and F Street, and an unrecorded bathey bar, at midpoint bet. the southwest cor. of Lot 9, Block 75, and the southeast cor. of Lot 16, Block 76.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to solid rock, with magnet at base, with aluminum cap mkd.



2005

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Cor. is located in a swamp.

From this point, the southwest cor. of Lot 9, Block 75, bears N. $38^{\circ}35.4'$ E., 64.0 ft. dist., monumented with a wood post, 2 ins. square, firmly set, projecting 4 ins. above ground, with the mark B and other illegible scribe marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with magnet at base, with aluminum cap mkd.

B75
┌
L9
└
SW

2005

Bury wood post alongside aluminum post.

From the intersection of the centerlines of Ninth Street and G Street.

S. $89^{\circ}58.9'$ W., on the centerline of G Street.

479.9 Point for the intersection of the centerlines of Tenth Street and G Street, at bearing-bearing intersection.

Set an aluminum drive-in monument, 36 ins. long, $\frac{5}{8}$ in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

G ST ST
┌
10TH
└

2005

Cor. is located in an alkali flat.

From this point, the northwest cor. of Lot 8, Block 79, bears S. $38^{\circ}23.0'$ E., 63.7 ft. dist., monumented with a wood post, 1 in. square, in poor condition, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, $\frac{5}{8}$ in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap mkd.

B79
┌
L8
└
NW


2005

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF G STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Lay wood post alongside rebar and aluminum cap.


From this same point, the northeast cor. of Lot 1, Block 78, bears S. 39°00.6' W., 64.3 ft. dist., monumented with a wood post, badly decomposed, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set a rebar, 18 ins. long, 5/8 in. diam., 17 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Lay remains of wood post alongside rebar and aluminum cap.

Cor. is located in an alkali flat in grass.


From this same point, the southeast cor. of Lot 16, Block 77, bears N. 38°57.5' W., 64.5 ft. dist., monumented with a wood post, 2 ins. square, firmly set, with no marks visible, as described in the field notes of the 1905 resurvey record for the Townsite Myton, Utah. At the Cor. point, set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Cor. is located in an alkali flat.

961.3 Point for the intersection of the centerline of G Street, and the west bdy. of Myton Townsite, identical with the N-S centerline of the SE 1/4 of sec. 26.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with magnet at base, with aluminum cap mkd.



Cor. is located on an alkali flat in swamp grass, 1 foot west of a N-S fence line.

Set a steel fence post along side the cor.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF F STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

Metes-and-Bounds Resurvey of the centerline of F Street
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the intersection of the centerlines of East Boundary Street and F Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

N. 89°58.6' W., on the centerline of F Street, to controlling cor. at the intersection of Fourth Street and F Street.

479.9 Point for the intersection of the centerlines of First Street and F Street, at bearing-bearing intersection.

Set a Mag Nail, 2 ins. long, 1/2 in. diam. top, flush with paved surface.

960.0 Point for the intersection of the centerlines of Second Street and F Street, at bearing-bearing intersection.

Set a Mag Nail, 2 ins. long, 1/2 in. diam., top, flush with paved surface.

1439.8 Point for the intersection of the centerlines of Third Street and F Street, at bearing-bearing intersection.

Set a Mag Nail, 2 ins. long, 1/2 in. diam., top, flush with paved surface.

From this point, the northeast cor. of Lot 1, Block 70, bears S. 38°39.4' W., 64.0 ft. dist., hereinafter described.

1919.8 The intersection of the centerlines of Fourth Street and F Street, monumented with an unrecorded PK nail, firmly set, flush with paved surface, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the northwest cor. of Lot 8, Block 70, bears S. 39°01.8' E., 62.5 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 71, bears S. 38°39.4' W., 64.0 ft. dist., hereinafter described.

S. 89°56.6' W., on the centerline of F Street.

480.2 The intersection of the centerlines of Fifth Street and F Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF F STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From this point, the southeast cor. of Lot 32, Block 61, bears
N. 38°39.9' W., 64.0 ft. dist., hereinafter described.

From the intersection of the centerlines of Fifth Street and F
Street.

N. 89°58.8' W., on the centerline of F Street.

- 479.9** The intersection of the centerlines of Sixth Street and F Street,
monumented with an unrecorded PK nail, firmly set, flush with
paved surface, and is accepted as a careful and faithful
determination of the position of the cor.

At the PK nail, set a railroad spike, 6 1/2 ins. long, 1 3/4 ins.
diam. top, flush with paved surface.

From this point, the southeast cor. of Lot 32, Block 60, bears
N. 38°45.0' W., 63.9 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 73,
bears S. 38°39.2' W., 64.0 ft. dist., hereinafter described.

From this same point, the northwest cor. of Block 72, bears
S. 39°46.7' E., 65.1 ft. dist., hereinafter described.

From the intersection of the centerlines of Sixth Street and F
Street.

S. 89°59.6' W., on the centerline of F Street, to the controlling
cor. point at the intersections of the centerlines of Ninth
Street and F Street.

- 480.1** Point for the intersection of the centerlines of Seventh Street
and F Street, at bearing-bearing intersection.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

From this point, the northeast cor. of Lot 1, Block 74, bears
S. 38°39.1' W., 64.0 ft. dist., hereinafter described.

- 960.1** Point for the intersection of the centerlines of Eighth Street
and F Street, at bearing-bearing intersection.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top,
flush with paved surface.

- 1100.6** Intersect the section line of section 25 and 26.

- 1440.2** The intersection of the centerlines of Ninth Street and F Street,
monumented with an unrecorded cotton spindle, firmly set, flush
with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF F STREET, OF MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.


FEET

From the intersection of the centerlines of Ninth Street and F Street.

S. 89°59.0' W., on the centerline of F Street.

479.9 Point for the intersection of the centerlines of Tenth Street and F Street, at bearing-bearing intersection.


Set an aluminum drive-in monument, 30 ins. long, 3/4 in. diam., 26 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



Cor. is located in an alkali flat.

964.0 Point for the intersection of the centerline of F Street, and the west bdy. of Myton Townsite, identical with the N-S centerline of the NE 1/4 of sec. 26.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with magnet at base, with aluminum cap mkd.



Set a steel fence post along side the cor.

Metes-and-Bounds Resurvey of portion of the centerline of E Street of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the intersection of the centerlines of First Street and E Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

Form this point the southeast cor. of Block 46, bears N. 38°39.0' W., 64.0 ft. dist. Not monumented.

S. 89°59.4' W., on the centerline of E Street.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF E STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

F E E T

480.1

The intersection of the centerlines of Second Street and E Street, monumented with an unrecorded cotton spindle, firmly set, 4 ins. below paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

At the intersection of the centerlines of Sixth Street and E Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the southeast cor. of Lot 32, Block 51, bears N. 38°40.0' W., 64.0 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 60, bears S. 38°41.1' W., 63.9 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 16, Block 61, bears S. 38°46.2' E., 64.0 ft. dist., hereinafter described.

N. 89°58.9' W., on the centerline of E Street.

480.0

The intersection of the centerlines of Seventh Street and E Street, monumented with a recorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, as recorded by Jerry D. Allred, P.L.S. 148951, in Duchesne County Survey File #1012, Duchesne County Recorders office and is accepted as a careful and faithful determination of the position of the cor.

S. 89°58.7' W., on the centerline of E Street.

480.0

The intersection of the centerlines of Eighth Street and E Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

N. 89°59.0' W., on the centerline of E Street.

146.1

Intersect the section line of sections 25 and 26.

480.0

The intersection of the centerlines of Ninth Street and E Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

S. 89°59.6' W., on the centerline of E Street.

480.0

The intersection of the centerlines of Tenth Street and E Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF E STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

accepted as a careful and faithful determination of the position
of the cor.

Metes-and-Bounds Resurvey of the centerline of D Street
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

At the intersection of the centerlines of First Street and D
Street, monumented with an unrecorded cotton spindle, firmly set,
flush with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

N. 89°59.3' W., on the centerline of D Street.

480.0 The intersection of the centerlines of Second Street and D
Street, monumented with an unrecorded cotton spindle, firmly set,
flush with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

From this point the northwest cor. of Block 46, bears
S. 38°43.0' E., 64.0 ft. dist. Not monumented.

N. 89°58.6' W., on the centerline of D Street.

480.0 The intersection of the centerlines of Third Street and D Street,
monumented with an unrecorded cotton spindle, firmly set, flush
with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

From this point, the southeast cor. of Lot 32, Block 41, bears
N. 38°43.4' W., 63.9 ft. dist., hereinafter described.

From the intersection of the centerlines of Third Street and D
Street.

N. 89°56.3' W., on the centerline of D Street.

479.8 The intersection of the centerlines of Fourth Street and D
Street, monumented with an unrecorded cotton spindle, firmly set,
flush with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

From this point, the southeast cor. of Lot 32, Block 40, bears
N. 38°43.5' W., 63.9 ft. dist., hereinafter described.

From this same point, the southwest cor. of Lot 17, Block 41,
bears N. 38°42.6' E., 64.0 ft. dist., hereinafter described.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF D STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

From the intersection of the centerlines of Fourth Street and D Street.

S. 89°56.6' W., on the centerline of D Street.

- 480.2** The intersection of the centerlines of Fifth Street and D Street, monumented with a cotton spindle, firmly set, flush with paved surface, with tip marked SURVEY MARKER, as recorded by Jerry D. Allred, P.L.S. 148951 on July 18, 1994, in Duchesne County Survey File #363, Duchesne County Records office, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the southeast cor. of Lot 32, Block 39, bears N. 38°43.6' W., 63.9 ft. dist., hereinafter described.

From the intersection of the centerlines of Fifth Street and D Street.

N. 89°58.8' W., on the centerline of D Street.

- 480.1** The intersection of the centerlines of Sixth Street and D Street, monumented with a cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, as recorded by Jerry D. Allred, P.L.S. 148951 on October 2, 2000, in Duchesne County Survey File #1012, Duchesne County Records office, and is accepted as a careful and faithful determination of the position of the cor.

No remains of the PK nail as recorded on April 24, 1998 by Clinton S. Peatross, R.L.S. 155666, in Duchesne County Survey File #363, Duchesne County Records office was recovered.

From this point, southeast cor. of Lot 32, Block 38, bears N. 38°34.5' W., 63.4 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 51, bears S. 38°39.2' W., 64.0 ft. dist., hereinafter described.

From the intersection of the centerlines of Sixth Street and D Street.

S. 89°58.8' W., on the centerline of D Street.

- 480.1** The intersection of the centerlines of Seventh Street and D Street, monumented with a recorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, as recorded by Jerry D. Allred, P.L.S. 148951 on October 2, 2000, in Duchesne County Survey File #1012, Duchesne County Records office and is accepted as a careful and faithful determination of the position of the cor.

From the intersection of the centerlines of Seventh Street and D Street.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF D STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. 89°58.9' W., on the centerline of D Street.

- 480.0 The intersection of the centerlines of Eighth Street and D Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

From the intersection of the centerlines of Eighth Street and D Street.

S. 89°58.7' W., on the centerline of D Street.

- 151.9 Intersect the section line of sections. 25 and 26.

- 480.1 The intersection of the centerlines of Ninth Street and D Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

Metes-and-Bounds Resurvey of a portion of the centerline of
C Street of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.


The intersection of the centerlines of First Street and C Street, monumented with an unrecorded rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, and is accepted as a careful and faithful reestablishment of the position of the original cor. The rebar is shown on an unrecorded plat for Uintah-Ouray Indian Tribe by C. DeNile McKenna LS4947.

From this point, the southeast cor. of Lot 32, Block 24, bears N. 38°32.1' W., 64.2 ft. dist., hereinafter described.

N. 89°59.6' W., on the centerline of C Street, to the controlling cor. point at the intersection of Sixth Street and C Street.

- 480.1 Point for the intersection of the centerlines of Second Street and C Street, at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground, with 2 ins. diam. aluminum cap mkd.



2005

The corner falls in swamp grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF C STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.


FEET

From this point the southwest cor. of Lot 17, Block 24, bears
N. 38°39.5' E., 64.0 ft. dist., hereinafter described.

From this point the southeast cor. of Lot 32, Block 25, bears
N. 38°39.0' W., 64.0 ft. dist., hereinafter described.

- 960.1** Point for the intersection of the centerlines of Third Street and
C Street, at bearing-bearing intersection

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.



2005


From this same point, the southwest cor. of Lot 17, Block 25,
bears N. 38°45.6' E., 63.9 ft. dist., hereinafter described.

From this point, the northeast cor. of Lot 1, Block 41, bears
S. 38°39.8' W., 64.0 ft. dist., hereinafter described.

From this same point, the southeast cor. of Lot 32, Block 26,
bears N. 38°44.9' W., 63.9 ft. dist., hereinafter described.

- 1440.0** Point for the intersection of the centerlines of Fourth Street
and C Street at bearing-bearing intersection.

Set a rebar, 18 ins. long, 5/8 in. diam., 15 ins. in the ground,
with 2 ins. diam. aluminum cap mkd.



2005

From this point, the southwest cor. of Lot 17, Block 26, bears
N. 38°40.7' E., 64.0 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 16, Block 41,
bears S. 38°47.7' E., 63.5 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 40,
bears S. 38°48.7' W., 64.0 ft. dist., hereinafter described.

From this same point, the southeast cor. of Lot 32, Block 27,
bears N. 38°39.7' W., 64.0 ft. dist., hereinafter described.

Cor. is located on a alkali flat in grass.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF C STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

1920.1 Point for the intersection of the centerlines of Fifth Street and C Street at bearing-bearing intersection.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point, the southwest cor. of Lot 17, Block 27, bears N. 38°34.6' E., 64.1 ft. dist., hereinafter described.

From this same point, the northwest cor. of Lot 16, Block 40, bears S. 38°37.7' E., 64.0 ft. dist., hereinafter described.

From this same point, the northeast cor. of Lot 1, Block 39, bears S. 38°40.9' W., 64.1 ft. dist., hereinafter described.

2400.0 The intersection of the centerlines of Sixth Street and C Street, monumented with an unrecorded cotton spindle, firmly set, 1 in. below paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the northeast cor. of Lot 1, Block 38, bears S. 39°04.5' W., 63.9 ft. dist., hereinafter described.

From the intersection of the centerlines of Sixth Street and C Street.

N. 89°59.5' W., on the centerline of C Street.

480.1 Point for the intersection of the centerlines of Seventh Street and C Street, at bearing-bearing intersection, falls on paved surface.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

960.1 Point for the intersection of the centerlines of Eighth Street and C Street, at bearing-bearing intersection, falls on paved surface.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point, the northeast cor. of Block 36, bears S. 38°35.0' W., 64.1 ft. dist., hereinafter described.

From the intersection of the centerlines of Eighth Street and C Street.

N. 89°59.8' W., on the centerline of C Street.

157.6 Intersect the section line of sections 25 and 26.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF C STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

480.2 Point for the intersection of the centerlines of Ninth Street and C Street, at bearing-bearing intersection, falls on paved surface.

No remains of the rebar shown on an unrecorded plat for Uintah-Ouray Indian Tribe by C. DeNile McKenna LS4947 was recovered.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

Metes-and-Bounds Resurvey of a portion of the centerlines of B Street of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

Point for the intersection of the centerlines of First Street and B Street, at midpoint bet. the intersection of the centerlines of First Street and C Street, and the intersection of centerlines of First Street and A Street.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

from which the reference objects

A wood post, 6 ins. diam., bears N. 39°36.5' E., 65.0 ft. dist., to a Mag Nail.

A wood post, 6 ins. diam., bears N. 12°49.6' W., 52.2 ft. dist., to a Mag Nail.

From this point, the northeast cor. of Lot 1, Block 24, bears S. 38°29.0' W., 64.2 ft. dist., hereinafter described.

N. 89°59.7' W., on the centerline of B Street.

480.0 Point for the intersection of the centerlines of Second Street and B Street, monumented with an unrecorded rebar, 1/2 in. diam., firmly set, flush with paved surface, and is accepted as a careful and faithful determination of the position of the cor.

N. 89°59.7' W., beginning new measurement, to the controlling cor. point at the intersection of Fifth Street and B Street.

480.0 Point for the intersection of the centerlines of Third Street and B Street at bearing-bearing intersection.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point the northwest cor. of Lot 16, Block 25, bears S. 38°34.5' E., 64.1 ft. dist., hereinafter described.

From this same point the northeast cor. of Lot 1, Block 26, bears S. 38°33.7' E., 64.2 ft. dist., hereinafter described.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF B STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

- 960.0 Point for the intersection of the centerlines of Fourth Street and B Street at bearing-bearing intersection.
- Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.
- 1440.0 The intersection of the centerlines of Fifth Street and B Street, monumented with an unrecorded rebar, diam. indeterminate, with plastic cap, with illegible marks, and is accepted as a careful and faithful determination of the position of the cor.

From this point the northwest cor. of Lot 16, Block 27, bears S. 38°43.6' E., 63.9 ft. dist., hereinafter described.

At the intersection of the centerlines of Seventh Street and B Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the southeast cor. of Lot 11, Block 15, bears N. 38°29.8' W., 64.2 ft. dist., hereinafter described.

N. 89°58.9' W., beginning new measurement, on the centerline of B Street.

- 480.1 The intersection of the centerlines of Eighth Street and B Street, monumented with an unrecorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, and is accepted as a careful and faithful determination of the position of the cor.

From this point, the southwest cor. of Lot 4, Block 15, bears N. 38°45.0' E., 63.9 ft. dist., hereinafter described.

Metes-and-Bounds Resurvey of the centerline of East Boundary Street of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the corner at the intersect of the centerlines of South Boundary and East Boundary Street.

N. 0°00.5' E., on the centerline of East Boundary Street, to the controlling cor. point at the intersection of centerlines of East Boundary Street and F Street.

- 420.5 The intersection of the centerlines of East Boundary Street and K Street.
- 841.0 The intersection of the centerlines of East Boundary Street and J Street.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF B STREET, OF MYTON
TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

- 1261.5 The intersection of the centerlines of East Boundary Street and I Street.
- 1682.0 The intersection of the centerlines of East Boundary Street and H Street.
- 2102.5 The intersection of the centerlines of East Boundary Street and G Street.
- 2523.0 The intersection of the centerlines of East Boundary Street and F Street.

Metes-and-Bounds Resurvey of the centerline of First Street
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the corner at the intersect of the centerlines of South Boundary Street and First Street.

N. 0°00.3' E., on the centerline of First Street.

- 420.4 The intersection of the centerlines of First Street and K Street.
- 841.0 The intersection of the centerlines of First Street and J Street.
- 1261.1 The intersection of the centerlines of First Street and I Street.
- 1681.4 The intersection of the centerlines of First Street and H Street.
- 2102.3 The intersection of the centerlines of First Street and G Street.
- 2522.7 The intersection of the centerlines of First Street and F Street.
- 2942.5 The monument at the intersection of the centerlines of First Street and E Street.

N. 0°00.5' E., beginning new measurement, on the centerline of First Street.

- 420.0 The monument at the intersection of the centerlines of First Street and D Street.

At the intersection of the centerlines of First Street and C Street, hereinbefore described.

N. 0°00.6' W., beginning new measurement, on the centerline of First Street.

- 420.0 The cor. at the intersection of the centerlines of First Street and B Street.
- 840.0 Point for the intersection of the centerlines of First Street and A Street, at projected local record dist. (298.0 ft.) from

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF FIRST STREET, OF
MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

recovered local monument at the southwest cor. of lot referred to as "Book a-220, Page 435", recorded for Jerry D. Allred PLS148951, in Duchesne County Surveyor's File No. 1239, Duchesne County Recorder's Office, and the intersection of the centerlines of First Street and C Street, falls on paved surface, there is no remaining evidence of the rebar as referred to on Duchesne County Surveyor's File No. 1239, Duchesne County Recorder's Office at the intersection of the centerlines of First Street and A Street.

Set a railroad spike, 6 1/2 ins. long, 1 3/4 ins. diam. top, flush with paved surface.

From this point, a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with plastic cap mkd. PLS148951, bears N. 0°00.6'W., 298.0 ft. dist.

Metes-and-Bounds Resurvey of the centerline of Second Street of
Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the corner at the intersect of the centerlines of South Boundary and Second Street.

N. 0°00.2' W., on the centerline of Second Street, to the controlling corner at the intersection of Second Street and E Street.

- 420.3 The monument at the intersection of the centerlines of Second Street and K Street.
- 841.1 The monument at the intersection of the centerlines of Second Street and J Street.
- 1260.7 The monument at the intersection of the centerlines of Second Street and I Street.
- 1681.1 The monument at the intersection of the centerlines of Second Street and H Street.
- 2102.0 The monument at the intersection of the centerlines of Second Street and G Street.
- 2522.3 The monument at the intersection of the centerlines of Second Street and F Street.
- 2942.8 The monument at the intersection of the centerlines of Second Street and E Street.

N. 0°00.7' E., on the centerline of Second Street, to the controlling corner at the intersection of Second Street and D Street.

- 420.2 The monument at the intersection of the centerlines of Second Street and D Street.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF SECOND STREET, OF
MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. 0°00.5' E., on the centerline of Second Street, to the
controlling corner at the intersection of Second Street and B
Street.

420.0 The monument at the intersection of the centerlines of Second
Street and C Street.

840.0 The monument at the intersection of the centerlines of Second
Street and B Street.

Metes-and-Bounds Resurvey of the centerline of Third Street
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the corner at the intersection of the centerlines of South
Boundary Street and Third Street.

N. 0°00.1' W., on the centerline of Third Street, to the
controlling corner point at the intersection of Third Street and
G Street.

420.2 The monument at the intersection of the centerlines of Third
Street and K Street.

841.1 The monument at the intersection of the centerlines of Third
Street and J Street.

1260.3 The monument at the intersection of the centerlines of Third
Street and I Street.

1680.7 The monument at the intersection of the centerlines of Third
Street and H Street.

2101.8 The monument at the intersection of the centerlines of Third
Street and G Street.

N. 0°01.2' W., on the centerline of Third Street, to the
controlling corner point at the intersection of Third Street and
E Street.

420.1 The monument at the intersection of the centerlines of Third
Street and F Street.

839.3 The intersection of the centerlines of Third Street and E Street,
monumented with an unrecorded cotton spindle, firmly set, flush
with paved surface, with top marked SURVEY MARKER, and is
accepted as a careful and faithful determination of the position
of the cor.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF THIRD STREET, OF
MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. 0°00.4' E., on the centerline of Third Street, to the
controlling corner point at the intersection of Third Street and
D Street.

420.5 The monument at the intersection of the centerlines of Third
Street and D Street.

N. 0°00.2' E., on the centerline of Third Street, to the
controlling corner point at the intersection of Third Street and
B Street.

419.9 The monument at the intersection of the centerlines of Third
Street and C Street.

839.9 The monument at the intersection of the centerlines of Third
Street and B Street.

Metes-and-Bounds Resurvey of the centerline of Fourth Street
of Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the corner at the intersection of the centerlines of South
Boundary Street and Fourth Street.

N. 0°00.4' W., on the centerline of Fourth Street, to the
controlling corner point at the intersection of Fourth Street and
D Street.

420.1 The monument at the intersection of the centerlines of Fourth
Street and K Street.

841.1 The monument at the intersection of the centerlines of Fourth
Street and J Street.

1259.9 The monument at the intersection of the centerlines of Fourth
Street and I Street.

1680.2 The monument at the intersection of the centerlines of Fourth
Street and H Street.

2101.5 The monument at the intersection of the centerlines of Fourth
Street and G Street.

2521.5 The monument at the intersection of the centerlines of Fourth
Street and F Street.

From which the cor. at the intersect at the centerline of Fourth
Street and D Street bears N. 0°00.4' E., 839.9 ft. dist.

At the intersection of the Fourth Street and D Street, to the
controlling corner at the intersection of Fourth Street and B
Street.

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF FOURTH STREET, OF
MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

N. 0°00.6' W., beginning new measurement, on the centerline of Fourth Street.

- 419.4 The monument at the intersection of the centerlines of Fourth Street and C Street.
- 839.4 The monument at the intersection of the centerlines of Fourth Street and B Street.

Metes-and-Bounds Resurvey of the centerline of Fifth Street of
Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the cor. at the intersect of South Boundary Street and Fifth Street.

N. 0°03.2' W., on the centerline of Fifth Street, to the controlling corner at the intersect of Fifth Street and J Street.

- 420.0 The monument at the intersection of the centerlines of Fifth Street and K Street.
- 841.2 The monument at the intersection of the centerlines of Fifth Street and J Street.
-
- N. 0°00.2' E., on the centerline of Fifth Street, to the controlling corner at the intersection of Fifth Street and G Street.
- 418.4 The monument at the intersection of the centerlines of Fifth Street and I Street.
- 838.7 The monument at the intersection of the centerlines of Fifth Street and H Street.
- 1259.6 The monument at the intersection of the centerlines of Fifth Street and G Street.

N. 0°02.5' W., on the centerline of Fifth Street.

- 419.8 The monument at the intersection of the centerline of Fifth Street and F Street.

N. 0°00.1' W., on the centerline of Fifth Street.

- 419.8 The monument at the intersection of the centerlines of Fifth Street and E Street, monumented with a recorded cotton spindle, firmly set, flush with paved surface, with top marked SURVEY MARKER, as recorded by Jerry D. Allred, P.L.S. 148951, in Duchesne County Survey File #1012, Duchesne County Recorders

METES-AND-BOUNDS RESURVEY OF THE CENTERLINE OF FIFTH STREET, OF
MYTON TOWNSITE, T. 3 S., R. 2 W., U.S.M., UTAH.

FEET

office and is accepted as a careful and faithful determination of the position of the cor.

From this point, the northeast cor. of Lot 1, Block 61, bears S. 38°39.3' W., 64.0 ft. dist. Not monumented.

- 839.7 The monument at the intersection of the centerlines of Fifth Street and D Street.
- 1259.6 The monument at the intersection of the centerlines of Fifth Street and C Street.
- 1679.6 The monument at the intersection of the centerlines of Fifth Street and B Street.

Metes-and-Bounds Resurvey of the centerline of Sixth Street of
Myton Townsite, T. 3 S., R. 2 W., U.S.M., Utah.

From the cor. at the intersect of South Boundary Street and Sixth Street

N. 0°03.6' W., on the centerline of Sixth Street.

- 420.0 The monument at the intersection of the centerlines of Sixth Street and K Street.
- 839.9 The monument at the intersection of the centerlines of Sixth Street and J Street.
-
- N. 0°00.4' E., on the centerline of Sixth Street.
- 419.3 The monument at the intersection of the centerlines of Sixth Street and I Street.
- 839.5 The monument at the intersection of the centerlines of Sixth Street and H Street.
- 1260.1 The monument at the intersection of the centerlines of Sixth Street and G Street.
- 1680.2 The monument at the intersection of the centerlines of Sixth Street and F Street.

N. 0°01.0' W., on the centerline of Sixth Street.

- 419.8 The monument at the intersection of the centerlines of Sixth Street and E Street.

N. 0°00.4' E., on the centerline of Sixth Street.