

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SOUTH BOUNDARY,
(SIXTH STANDARD PARALLEL SOUTH),

A PORTION OF THE NORTH BOUNDARY,

A PORTION OF THE FORT CAMERON WOOD
AND TIMBER RESERVE BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 17, 18, AND 30,

IN

TOWNSHIP 30 SOUTH RANGE 6 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

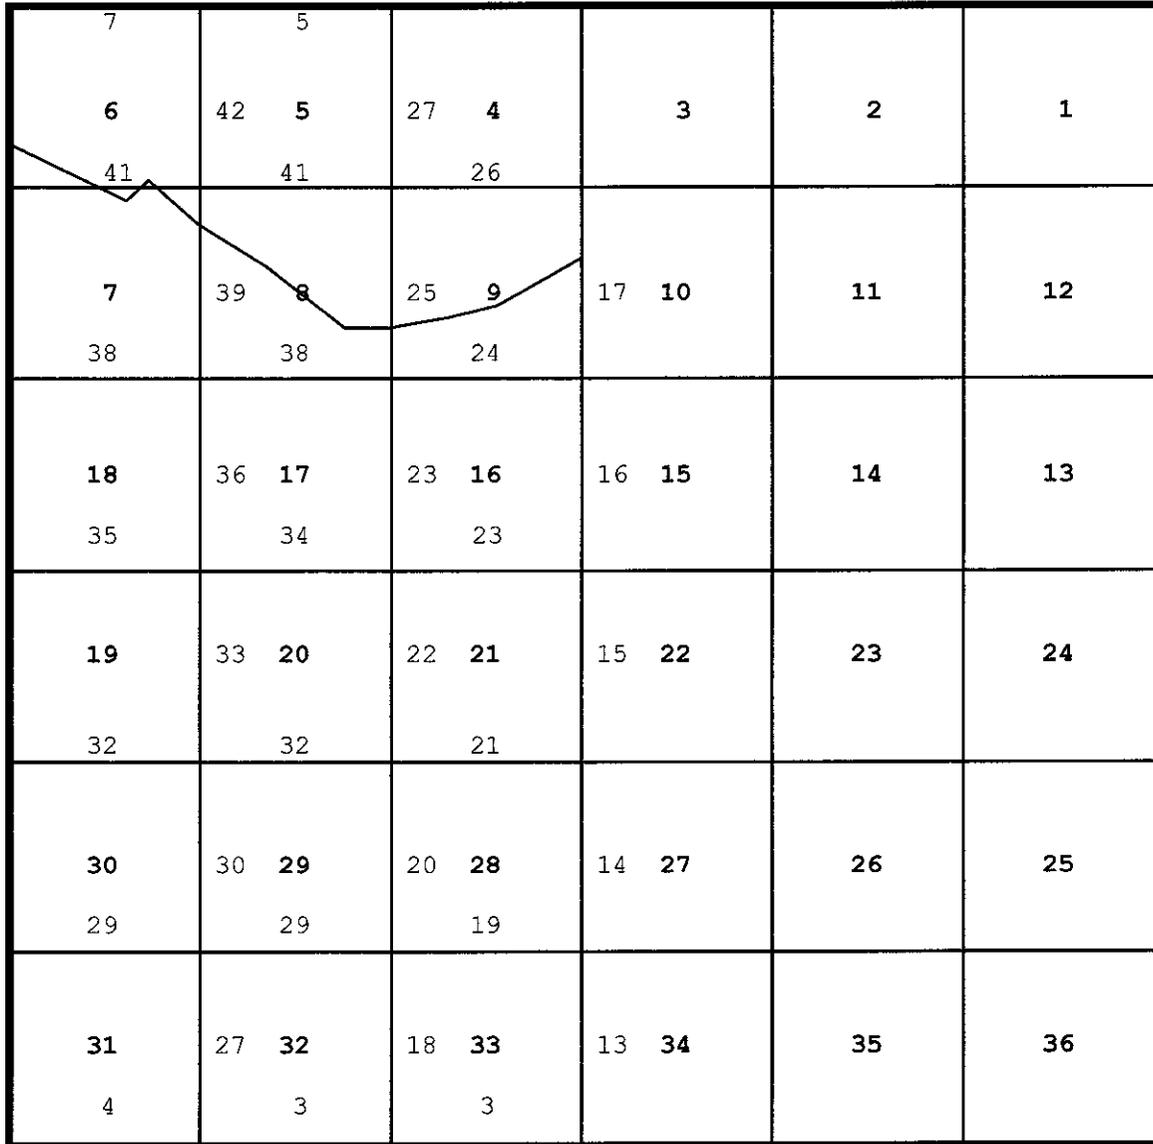
Jeremy D. Davis
Cadastral Surveyor
under the supervision of
Ronald K. Baugh
Supervisory Cadastral Surveyor

Under special instructions dated *June 12, 2006*, approved *June 12, 2006*, which provided for the surveys included under Group Number *1022*, and assignment instructions dated *June 12, 2006*, and reassignment instructions dated *July 20, 2007*.

Survey commenced *July 20, 2006*
Survey completed *August 22, 2007*

INDEX DIAGRAM

Township 30 South, Range 6 West



Fort Cameron Wood and Timber Reserve Boundary.....	8
The subdivision of section 17.....	43
The subdivision of section 18.....	44
The subdivision of section 30.....	47

TOWNSHIP 30 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of a portion of the south boundary (Sixth Standard Parallel South), a portion of the north boundary, a portion of the Fort Cameron Wood and Timber Reserve Boundary, a portion of the subdivisional lines, and the subdivision of sections 17, 18 and 30, in T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

History of Surveys

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY (Sixth Standard Parallel South)			
All	J. Gorlinski	1871	
All			H. Fitzhugh 1882
All			J.R. & Q. Stewart 1910
WEST BOUNDARY (Guide Meridian)			
All	J. Bausman	1869-70	
All			H. Fitzhugh 1882
Portion			E.W. Koeber 1890
Portion			J.D. Davis & R.K. Baugh 2006
EAST BOUNDARY			
Portion	H. Fitzhugh	1882	
Portion	E.W. Koeber	1890	
All			Page & Swan 1900
NORTH BOUNDARY			
All	E.W. Koeber	1890	
Portion			R.D. Snyder & et al. 1969
SUBDIVISION			
Portion	H. Fitzhugh	1882	
Portion	E.W. Koeber	1890	E.W. Koeber 1890
FORT CAMERON WOOD AND TIMBER RESERVATION BOUNDARY			
All	H. Fitzhugh	1882	
All			E.W. Koeber 1890

T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1022, dated June 12, 2006.

The true meridian direction and length of all lines were determined by Global Positioning System (GPS) utilizing Real-Time Kinematics (RTK) observations using the Trimble 5700 model receiver.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and their calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from Beaver County Survey Station "BILL GILLIS", with the published data as follows:

Latitude: 38° 15'22.0617" N. Longitude: 112° 38'29.0575" W.
N.A.D. 1983, Elevation 6032 feet.

The geographic position of the standard corner of sections 33 and 34, on the south boundary of the Township, determined by using RTK methods from Beaver County Survey Station "BILL GILLIS", is as follows:

Latitude: 38° 08'50.744" N. Longitude: 112° 31'42.740" W.
N.A.D. 1983 Network accuracy = 0.200 meters at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
 (SIXTH STANDARD PARALLEL SOUTH),
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Dependent Resurvey of a Portion of the South Boundary
 (Sixth Standard Parallel South),
 T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by J. Gorlinski in
 1871, and the Resurveys Executed by H. Fitzhugh in 1882, and
 J.R. & Q. Stewart in 1910.

From the standard corner of sections 33 and 34, monumented
 with an iron post, 3 inches diameter, firmly set, in a mound
 of stone 3 ft. base, to top, with brass cap, marked as
 described in the official record of the 1910 resurvey.

Corner falls at the corner of fences projecting north and
 west, in piñon and juniper growth.

N. 89°52.8' W., on the south boundary of section 33.

23.263 The closing corner of sections 3 and 4, T. 31 S., R. 6 W.,
 bears South, 0.086 chains distance, monumented with an iron
 post, 2 inches diameter, projecting 16 inches above a small
 mound of stone, with brass cap marked as described in the
 official record of the 1910 resurvey.

Corner falls at the corner of fences projecting south, east
 and west.

40.151 The standard 1/4 section corner of section 33, monumented with
 an iron post, 1 inch diameter, firmly set, projecting 18
 inches above ground, with brass cap marked as described in the
 official record of the 1910 resurvey.

Corner falls in a fence line projecting east and west, in
 piñon and juniper growth.

S. 89°32.5' W., beginning new measurement.

40.043 The standard corner of sections 32 and 33, monumented with an
 iron post, 3 inches diameter, firmly set, projection 16 inches
 above a small mound of stone, with brass cap marked as
 described in the official record of the 1910 resurvey.

Corner falls in a fence line projecting east and west, on flat
 open ground.

N. 88°58.8' W., on the south boundary of section 32.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
 (SIXTH STANDARD PARALLEL SOUTH),
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

23.045 The closing corner of sections 4 and 5, T. 31 S., R. 6 W., bears South, 0.015 chains distance, monumented with an iron post, 2 inches diameter, firmly set in a mound of stone 2 ft. base, to top, with brass cap marked as described in the official record of the 1910 resurvey.

No remaining evidence of the 1882 bearing trees was found.

Corner falls in a fence line projecting east and west, and on the south edge of dirt road, bearing east and west, on flat ground in sagebrush.

40.106 The standard 1/4 section corner of section 32, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone 2 ft. base, to top, with brass cap marked as described in the official record of the 1910 resurvey.

No remaining evidence of the 1882 bearing trees was found.

Corner falls in a fence line projecting east and west, and on the south edge of a dirt road, bearing east and west, on flat ground in sagebrush.

N. 89°24.0' W., beginning new measurement.

40.059 The standard corner of sections 31 and 32, monumented with an iron post, 3 inches diameter, firmly set, in a small mound of stone, with brass cap marked as described in the official record of the 1910 resurvey.

from which the 1910 bearing tree

A piñon limb, 4 ins. diam., bears N. 45° W., 174 links distance, with scribe marks S31 T30S R6W, visible on an open blaze. (Record; N. 41° W., 158 links distance)

No remaining evidence of the NE bearing tree was found.

Witnessed with a steel fence post alongside.

Corner falls in an east west fence line, on flat ground in sagebrush and scattering piñon and juniper growth and on the south edge of a dirt road, bears east and west.

N. 89°48.0' W., on the south boundary of section 31.

22.683 The closing corner of sections 5 and 6, T. 31 S., R. 6 W., bears South, 0.010 chains distance, monumented with an iron post, 1 inch diameter, firmly set in a mound of stone 3 ft. base, to top, with brass cap marked as described in the official record of the 1910 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
 (SIXTH STANDARD PARALLEL SOUTH),
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

from which the 1910 bearing trees

A juniper, 12 inches diameter, bears S. 50° E., 32.6 links distance, with illegible scribe marks.

A juniper, 12 inches diameter, bears S. 30° W., 30.3 links distance, with scribe marks visible on an open blaze.
 (Record; S. 29° W., 27 links distance)

Corner falls in a fence line projecting east and west on gradual west slope in piñon and juniper.

40.216 The standard 1/4 section corner of section 31, monumented with an iron post, 1 inch diameter, firmly set in a mound of stone 4 ft. base, to top, with brass cap, marked as described in the official record of the 1910 resurvey.

Corner falls in a fence line projecting east and west on a gradual rocky east slope in dense piñon and juniper growth.

N. 87°17.0' W., beginning new measurement.

40.532 The standard corner of Township 30 South, Ranges 6 and 7 West, monumented with an iron post, 3 inches diameter, firmly set, in a small mound of stone, with brass cap marked as described in the official record of the 1910 resurvey.

Dependent Resurvey of a Portion of the North Boundary,
 T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by
 E.W. Koeber in 1890.

From the corner of sections 4, 5, 32, and 33, monumented with a trachyte stone, 20x10x6 inches, firmly set, clearly marked 4 notches on east and 2 notches on west edges, and witnessed with a mound of stone to the west. (Record; granite stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T29S
 S32 | S33
 S5 | S4
 T30SR6W
 2006

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 8.6 ft. east of a fence line projecting north and south on a steep rocky east slope in piñon and juniper growth.

N. 89°00.4' W., between section 5 and 32.

- 38.974 The 1/4 section corner of sections 5 and 32, monumented with a granite stone, 16x12x6 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the north. (Record; sandstone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T29S
S32
1/4 —
S5
T30SR6W
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep south slope in piñon and juniper growth.

N. 89°50.7' W., beginning new measurement.

- 39.889 The corner of sections 5, 6, 31, and 32, monumented with a sandstone, 16x8x8 inches, firmly set, clearly marked 5 notches on east and 1 notch on west edges, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground, to solid rock, in a mound of stone 5 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T29S
S31|S32
S6|S5
T30SR6W
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat rocky ground in dense piñon and juniper growth.

N. 89°07.1' W., between sections 6 and 31.

39.537

The 1/4 section corner of sections 6 and 31, monumented with a trachyte stone, 12x6x4 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the north. (Record; stationary granite stone 3x3x2.5 feet)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T29S
S31
1/4 —
S6
T30SR6W
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in piñon and juniper growth and in a slight wash drains north.

N. 86°03.3' W., beginning new measurement.

35.432

The corner of Townships 29 and 30 South, Ranges 6 and 7 West monumented with an iron post, 2 1/2 inches diameter, firmly set in a mound of stone 3 ft. base, to top, with brass cap marked as described in the official record of the G.E. Reynolds' 1988 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

From this corner, Beaver County Survey Station "BILL GILLIS", monumented with an iron post, 2 inches diameter, firmly set in concrete, with a 3 1/4 inch diameter brass cap attached and marked BILL GILLIS 1997, bears N. 65°15'00" W., forward bearing and S. 65°17'00" E., back bearing for a distance of 277.001 chains distance.

Dependent Resurvey of a Portion of the
Fort Cameron Wood and Timber Reserve Boundary,
T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by
H. Fitzhugh in 1882, and the Resurvey Executed by
E.W. Koeber in 1890.

From the meander corner of sections 1 and 6, identical with Angle Point No. 3, of the Fort Cameron Wood and Timber Reserve Boundary, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 West.

S. 67°51.0' E., along the 3rd mile of the Fort Cameron Wood and Timber reserve boundary.

38.580 Point for the 3 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

S. 67°51.0' E., along the 4th mile, beginning new measurement.

7.670 Point for angle point No. 4, identical with the closing corner of sections 6 and 7, reestablished by projecting a line from the corner of section 1, 6, 7, and 12 on the west boundary of the township, through the 1/4 section corner of sections 6 and 7, at record distance from the 1/4 section corner of sections 6 and 7, there is no remaining evidence of the 1882 or 1890 original corners.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
AP-4
FCWR
S6
CC /
S7
2007

DEPENDENT RESURVEY OF A PORTION OF THE
 FORT CAMERON WOOD AND TIMBER RESERVE BOUNDARY,
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on north bank of birch creek, flowing west, in oak brush and cotton wood growth.

Note: The following corner positions were determined by the Grant Boundary Adjustment method.

S. 68° 20.0' E., beginning new measurement.

7.318 Point for angle point No. 5, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

N. 75°25.0' E., beginning new measurement.

11.030 Intersect the section line between sections 6 and 7, there is no remaining evidence of the original closing corner, not monumented.

13.822 Point for angle point No. 6, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

S. 47°20.0' E., beginning new measurement.

1.015 Intersect the section line between sections 6 and 7, there is no remaining evidence of the original closing corner, not monumented.

11.718 Point for the 3 1/2 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

23.375 Angle point No. 7, identical with the closing corner of sections 7 and 8, monumented with a granite stone, 14x10x6 inches, firmly set, dimly marked CC on south face, and witnessed with a mound of stone to the west.

At the corner point .

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE
FORT CAMERON WOOD AND TIMBER RESERVE BOUNDARY,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
AP-7
FCWR
S7 + S8
CC
2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on south rim of Birch Creek in piñon and juniper growth.

S. 58°43.1 E., beginning new measurement.

28.996 Point for the 4 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

S. 58°43.1' E., along the 5th mile, beginning new measurement.

40.563 Point for the 4 1/2 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

44.180 Point for angle point No. 8, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

S. 89°13.0' E., beginning new measurement.

18.599 Angle point No. 9, identical with the closing corner of sections 8 and 9, monumented with a granite stone, 20x11x6 inches, firmly set, clearly marked CC on south face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE
 FORT CAMERON WOOD AND TIMBER RESERVE BOUNDARY,
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
 AP-9
 FCWR
 S8 + S9
 CC
 2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on south bank of Birch Creek at the edge of piñon and juniper growth.

N. 79°57.7' E., beginning new measurement.

18.222 Point for the 5 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

N. 79°57.7' E., along the 6th mile, beginning new measurement.

25.758 Point for angle point No. 10, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

N. 60°57.7' E., beginning new measurement.

14.223 Point for the 5 1/2 mile corner, at proportionate distance; there is no remaining evidence of the original corner, not monumented.

42.980 Angle point No. 11, identical with the closing corner of sections 9 and 10, monumented with a granite stone, 16x10x4 inches, firmly set, clearly marked CC on south face, and witnessed with a mound of stone to the east.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE
 FORT CAMERON WOOD AND TIMBER RESERVE BOUNDARY,
 T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
 AP-11
 FCWR
 S9 + S10
 CC
 2007

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside.

Corner falls on the south bank of Birch Creek flowing northwest, and in the corner of fences projecting north, east and south.

From this corner point, angle point No. 14, identical with the closing corner of sections 10 and 11, monumented with a trachyte stone, 16x10x4 inches, firmly set, clearly marked CC on south face, bears N. 86°02.6' E., 79.482 chains distance. (In the 1882 record, Fitzhugh set a granite stone, 24x10x6 inches.) Alongside the trachyte was found a lava stone, 12x12x8 inches, firmly set, clearly marked <OMR on west face. (In the 1890 record, Koeber set a sandstone, 20x10x8 inches.)

No remaining evidence of the 1882 bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 2 ft. base, to top, with aluminum cap marked:

AP-14
 FCWR
 S10 + S11
 CC
 2007

Deposit both marked stones alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground on the north bank of Birch Creek flowing west, and 42 ft. south of a road bearing east and west.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by
H. Fitzhugh in 1882.

From the standard corner of sections 33 and 34, on the south boundary of the township, hereinbefore described.

N. 0°08.3' E., between sections 33 and 34.

40.224 The 1/4 section corner of sections 33 and 34, monumented with a sandstone, 20x10x5 inches, firmly set, plainly marked 1/4 on west face, and witnessed with a mound of stone to the west.

from which the original bearing tree

A juniper, 8 ins. diam., bears N 76° E., 22 links distance, with a healed blaze. (Record; N. 62° E.)

No remaining evidence of the SW bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, to top, with aluminum cap marked:

T30SR6W
1/4
S33|S34
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 55 ft. east of a fence line projecting north and south.

N. 0°14.6' E., beginning new measurement.

40.110 The corner of sections 27, 28, 33, and 34, monumented with a trachyte stone, 22x15x8 inches, firmly set, clearly marked 3 notches on east and 2 notches on south edges, and witnessed with a mound of stone to the north. (Record; 1 notch on south edge.)

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
22 inches in the ground, with aluminum cap marked:

T30SR6W
S28|S27
S33|S34
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 2 ft. high,
west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 30 ft. east of a fence line projecting north and
south in open piñon and juniper growth.

N 0°07.6' E., between sections 27 and 28.

40.170

The 1/4 section corner of sections 27 and 28, monumented with
a trachyte stone, 16x8x4 inches, firmly set, in a mound of
stone, clearly marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

T30SR6W
1/4
S28|S27
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 1 ft. high,
west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in a fence line projecting north and south on
flat ground in sagebrush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°39.4' E., beginning new measurement.

- 39.706** The corner of sections 21, 22, 27, and 28, monumented with a trachyte stone, 16x8x8 inches, firmly set, clearly marked 3 notches on east and 2 notches on south edges, and witnessed with a mound of stone to the south.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S21 S22
S28 S27
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in a fence line projecting north and south on flat ground in sagebrush and scattering piñon and juniper growth.

N. 0°45.4' E., between sections 21 and 22.

- 41.739** Point for the 1/4 section corner of sections 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S21 S22
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls east of a fence line projecting north and south in piñon and juniper growth.

- 83.478** The corner of sections 15, 16, 21, and 22, monumented with a granite stone, 18x22x6 inches, firmly set, in an embedded

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

mound of stone, dimly marked 3 notches on south edge, no other marks visible. (Record; 3 notches on south and east edges.)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T30SR6W
S16|S15
S21|S22
2006

Deposit the marked stone at the base of the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 3 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 18 ft. east of a fence line projecting north and south on top of ridge extending east and west in piñon and juniper growth.

N. 0°21.8' E., between sections 15 and 16.

39.720

Point for the 1/4 section corner of sections 15 and 16, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S16|S15
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 29 ft. west of a fence line projecting north and south on a north slope in piñon and juniper growth.

79.440

The corner of sections 9, 10, 15, and 16, monumented with a granite stone, 12x11x6 inches, firmly set, clearly marked 4 notches on the south and 3 notches on the east edges, and witnessed with a mound of stone to the south.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S9|S10
S16|S15
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 1 ft. east of a fence line projecting north and south on a gradual rocky north slope in piñon and juniper growth.

N. 0°13.0' W., between sections 9 and 10.

42.182 The 1/4 section corner of sections 9 and 10, monumented with a granite stone, 20x10x8 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the south.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 2 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S9|S10
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in a fence line projecting north and south on flat rocky ground in sagebrush, piñon, and juniper growth.

N. 0°05.1' E., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

- 13.407 The closing corner of sections 9 and 10, identical with angle point No. 11, hereinbefore described.

Reestablishment of the Survey Executed by
E.W. Koeber in 1890.

N. 1°46.0' W., beginning new measurement.

- 24.394 The corner of sections 3, 4, 9, and 10, monumented with a granite stone, 18x12x5 inches, firmly set, clearly marked 5 notches on south and 3 notches on east edges, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S4|S3
S9|S10
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush.

Reestablishment of the Survey Executed by
H. Fitzhugh in 1882.

From the standard corner of sections 32 and 33, on the south boundary of the township, hereinbefore described.

N. 0°09.0' E., between sections 32 and 33.

- 40.112 The 1/4 section corner of sections 32 and 33, monumented with a granite stone, 16x10x10 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
1/4
S32|S33
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

N. 0°12.4' E., beginning new measurement.

40.308 The corner of sections 28, 29, 32, and 33, monumented with a granite stone, 15x11x5 inches, firmly set, clearly marked 4 notches on east and 1 on south edges, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked:

T30SR6W
S29|S28
S32|S33
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 2 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 75 ft. north of dirt road, bears NW and SE on flat ground in sagebrush.

From the corner of sections 27, 28, 33, and 34.

S. 89°53.6' W., between sections 28 and 33.

40.082 The 1/4 section corner of sections 28 and 33, monumented with a trachyte stone, 12x8x8 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the north.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S28
1/4 —
S33
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush, scattering piñon and juniper growth.

S. 89°53.6' W., beginning new measurement.

40.112 The corner of sections 28, 29, 32, and 33.

N. 0°13.0' E., between sections 28 and 29.

40.001 Point for the 1/4 section corner of sections 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S29|S28
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush.

80.002 Point for corner of sections 20, 21, 28, and 29, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
28 inches in the ground, with aluminum cap marked:

T30SR6W
S20|S21
S29|S28
2006

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a small mound of stone to the SE of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on the north bank of a wash 10 ft. wide, 6 ft.
deep, drains west.

From the corner of sections 21, 22, 27, and 28.

S. 89°46.9' W., between sections 21 and 28

40.002 The 1/4 section corner of sections 21 and 28, monumented with
a trachyte stone, 12x8x4 inches, dimly marked 1/4 on north
face, and witnessed with a mound of stone to the south.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
20 inches in the ground to solid rock, in a mound of stone 3
ft. base, to top, with aluminum cap marked:

T30SR6W
S21
1/4 —
S28
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush, scattered piñon and
juniper growth.

N. 89°48.8' W., beginning new measurement.

40.419 The corner of sections 20, 21, 28, and 29.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°18.2' E., between sections 20 and 21.

40.001 The 1/4 section corner of sections 20 and 21, monumented with a granite stone, 12x11x4 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T30SR6W
1/4
S20|S21
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush, piñon and juniper growth.

N. 0°10.1' E., beginning new measurement.

39.990 The corner of sections 16, 17, 20, and 21, monumented with a trachyte stone, 20x8x8 inches, firmly set, clearly marked 4 notches on east and 3 notches on south edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
S17|S16
S20|S21
2006

Deposit the marked stone at the base of the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 5 ft. by 3 ft. base, by 1 ft. high, west of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual south slope in piñon and juniper growth.

From the corner of sections 15, 16, 21, and 22.

S. 85°06.3' W., between sections 16 and 21.

41.066 The 1/4 section corner of sections 16 and 21, monumented with a granite stone, 20x18x6 inches, firmly set, dimly marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked:

T30SR6W
S16
1/4 —
S21
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 3 ft. high, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on SW slope in piñon and juniper growth.

N. 89°59.5' W., beginning new measurement.

40.262 The corner of sections 16, 17, 20, and 21.

N. 0°52.6' E., between sections 16 and 17.

43.126 The 1/4 section corner of sections 16 and 17, monumented with a granite stone, 16x10x4 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
1/4
S17|S16
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat open ground in piñon and juniper growth.

N. 0°15.0' E., beginning new measurement.

40.087 The corner of sections 8, 9, 16, and 17, monumented with a trachyte stone, 16x10x6 inches, firmly set, clearly marked 4 notches on east and south edges, and witnessed with a mound of stone to the south. (Record; granite stone, 20x20x5 inches)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
S8|S9
S17|S16
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper.

From the corner of sections 9, 10, 15, and 16.

N. 89°07.3' W., between sections 9 and 16.

40.249 The 1/4 section corner of sections 9 and 16, monumented with a granite stone, 24x14x10 inches, firmly set, in a mound of stone 2 ft. base, clearly marked 1/4 on north face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
12 inches in the ground, to solid rock, in a mound of stone 3
ft. base, to top, with aluminum cap marked:

T30SR6W
S9
1/4 —
S16
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual NW slope in piñon and juniper
growth.

S. 89°30.9' W., beginning new measurement.

40.587 The corner of sections 8, 9, 16, and 17.

N. 0°25.9' W., between sections 8 and 9.

26.787 The closing corner of sections 8 and 9, identical with angle
point No. 9, hereinbefore described.

Reestablishment of the Survey Executed by
E.W. Koeber in 1890.

N. 0°49.9' W., beginning new measurement.

13.261 Point for the 1/4 section corner of sections 8 and 9, at
proportionate distance; there is no remaining evidence of the
original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
10 inches in the ground to solid rock, in a mound of stone 4
ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S8|S9
2006

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on a steep rocky south slope in scattering piñon, juniper, and oak brush growth.

53.083

The corner of sections 4, 5, 8, and 9, monumented with a sandstone 16x10x6 inches, firmly set, dimly marked 5 notches on south and 4 notches on east edges.

Found a piñon, 4 ins. diam., down and dead, with scribe marks visible on an open blaze, not remeasured.

Found a piñon, 8 ins. diam., down and dead, with faint scribe marks visible on an open blaze, not remeasured.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 4 ft. base, to top, with aluminum cap marked:

T30SR6W
S5|S4
S8|S9
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Corner falls on flat rocky ground in piñon and juniper growth.

From the corner of sections 3, 4, 9, and 10.

N. 89°52.9' W., between sections 4 and 9.

40.447

Point for the 1/4 section corner of sections 4 and 9, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 4 ft. base, to top, with aluminum cap marked:

T30SR6W
S4
1/4 —
S9
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual rocky SE slope in grass, among scattering juniper and oak brush growth.

80.894 The corner of sections 4, 5, 8, and 9.

N. 4°56.3' W., between sections 4 and 5.

38.718 Point for the 1/4 section corner of sections 4 and 5, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 14 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S51S4
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a moderate north slope in dense piñon and juniper growth.

77.292 The corner of sections 4, 5, 32, and 33, on the north boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by
H. Fitzhugh in 1882.

From the standard corner of sections 31 and 32, on the south boundary of the township, hereinbefore described.

N. 0°07.4' E., between sections 31 and 32.

40.058 The 1/4 section corner of sections 31 and 32, monumented with a granite stone, 12x8x4 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west.

from which the original bearing tree

A piñon, 18 ins. diam., bears N. 60° E., 99 links distance, with scribe marks 1/4 S BT visible on a mostly healed blaze. (Record; N. 44° E.)

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

No remaining evidence of the west bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

T30SR6W
1/4
S31|S32
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on the north edge of a dirt road, 9 ft. wide,
bears east and west on flat ground in sagebrush, scattering
piñon and juniper growth.

N. 0°02.8' W., beginning new measurement.

40.192

The corner of sections 29, 30, 31, and 32, monumented with a
trachyte stone, 18x8x6 inches, firmly set, clearly marked 5
notches on east and 1 notch on south edges, and witnessed with
a mound of stone to the west. (Record; granite stone)

from which the original bearing trees

A juniper, 16 ins. diam., bears S. 55° E., 148 links
distance, with a healed blaze. (Record; 145 links
distance.

A juniper, 12 ins. diam., bears N. 30° W., 124 links
distance, with scribe marks visible through a mostly
healed blaze.

No remaining evidence of the SW bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
20 inches in the ground to solid rock, in a mound of stone 3
ft. base, to top, with aluminum cap marked:

T30SR6W
S30|S29
S31|S32
2006

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 57 ft. south of a wash, drains S. 80° W on flat ground in piñon and juniper growth.

From the corner of sections 28, 29, 32, and 33.

N. 89°02.6' W., between sections 29 and 32.

40.034 The 1/4 section corner of sections 29 and 32, monumented with a trachyte stone, 15x10x6 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the north.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked:

T30SR6W
S29
1/4 ———
S32
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls in piñon and juniper growth.

N. 89°34.9' W., beginning new measurement.

40.310 The corner of sections 29, 30, 31, and 32.

N. 89°50.3' W., between sections 30 and 31.

20.123 Point for the E 1/16 section corner of sections 30 and 31, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

40.246 The 1/4 section corner of sections 30 and 31, monumented with a trachyte stone, 12x10x4 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the north. (Record; granite stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
S30
1/4 ———
S31
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 1 ft. high, north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual west slope in sagebrush and dense piñon and juniper growth.

N. 85°51.2' W., beginning new measurement.

40.435 The corner of sections 25, 30, 31, and 36, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 West.

From the corner of sections 29, 30, 31, and 32.

N. 0°02.6' E., between sections 29 and 30.

20.109 Point for the S 1/16 section corner of sections 29 and 30, not monumented.

40.218 The 1/4 section corner of sections 29 and 30, monumented with a granite stone, 12x12x4 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west. (Record; trachyte stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
1/4
S30|S29
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush and scattering piñon and juniper growth.

N. 0°04.7' E., beginning new measurement.

40.151 The corner of sections 19, 20, 29, and 30, monumented with a granite stone, 18x12x4 inches, firmly set, clearly marked 5 notches on east and 2 notches on south edges. (Record; sandstone)

from which the original bearing trees

A juniper, 16 ins. diam., bears N. 34° E., 149 links distance, with no scribe marks visible on a mostly healed blaze. (Record; 140 links distance)

A piñon limb, 12 ins. diam., bears S. 88° W., 114 links distance, with no scribe marks visible on a healed blaze. (Record; S. 20° W., 109 links distance)

No remaining evidence of the NW bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
S19|S20
S30|S29
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 3 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner falls on flat ground in piñon and juniper growth.

From the corner of sections 20, 21, 28, and 29.

N. 88°22.0' W., between sections 20 and 29.

40.263

The 1/4 section corner of sections 20 and 29, determined at record bearing and distance from the original bearing tree:

A juniper, 16 ins. diam., bears S. 50° E., 64 links distance, with faint scribe marks visible on a partially healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T30SR6W
S20
1/4 —
S29
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 27 ft. north of wash 15 ft. wide, 2 ft. deep, drains S. 76° W on flat sandy ground in sagebrush, and scattering piñon and juniper growth.

N. 89°44.3' W., beginning new measurement.

40.293

The corner of sections 19, 20, 29, and 30.

N. 89°38.9' W., between sections 19 and 30.

20.077

Point for the E 1/16 section corner of sections 19 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

S19
E 1/16 —
S30
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

- 40.154 Point for the 1/4 section corner of sections 19 and 30, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W
S19
1/4 —
S30
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 3 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush, scattering piñon and juniper growth.

- 80.810 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 West.

From the corner of sections 19, 20, 29, and 30.

N. 0°04.0' E., between sections 19 and 20.

- 40.153 The 1/4 section corner of sections 19 and 20, monumented with a granite stone, 10x10x3 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the west. (Record; sandstone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with aluminum cap marked:

T30SR6W
1/4
S19|S20
2006

Deposit the marked stone alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 2 ft. base, by 1 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on the west edge of a dirt road 8 ft. wide, bears S. 20° E., and N. 20° W.

N. 0°09.5' E., beginning new measurement.

40.160

The corner of sections 17, 18, 19, and 20, monumented with a trachyte stone, 16x12x8 inches, firmly set, clearly marked 5 notches on east edge and 3 grooves on south face, and witnessed with a mound of stone to the west. (Record; 3 notches on south edge)

No remaining evidence of the original bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W	
S18	S17
S19	S20
2006	

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 4 ft. by 3 ft. base, by 2 ft. high, west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush and scattering piñon and juniper growth.

From the corner of sections 16, 17, 20, and 21.

S. 89°35.5' W., between sections 17 and 20.

39.817

The 1/4 section corner of sections 17 and 20, monumented with a trachyte stone, 8x8x4 inches, firmly set, clearly marked 1/4 on north face, and witnessed with a mound of stone to the south. (Record; granite stone, 12x12x10 inches)

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
26 inches in the ground, with aluminum cap marked:

T30SR6W
S17
1/4 —
S20
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 1 ft. high,
north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat rocky ground in piñon and juniper growth.

N. 87°17.2' W., beginning new measurement.

20.462 Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
28 inches in the ground, with aluminum cap marked:

S17
W 1/16 —
S20
2006

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in piñon and juniper growth.

40.924 The corner of sections 17, 18, 19, and 20.

N. 89°37.3' W., between sections 18 and 19.

40.165 The 1/4 section corner of sections 18 and 19, monumented with
a granite stone, 15x8x4 inches, firmly set, clearly marked 1/4
on north face, and witnessed with a mound of stone to the
north. (Record; limestone)

No remaining evidence of the original bearing trees was found.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

T30SR6W
S18
1/4 —
S19
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Raise a small mound of stone north of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in sagebrush and scattering
juniper growth.

N. 89°47.2' W., beginning new measurement.

40.467 The corner of sections 13, 18, 19, and 24, on the west
boundary of the township, described in the concurrent resurvey
of the east boundary of Township 30 South, Range 7 West.

From the corner of sections 17, 18, 19, and 20.

N. 0°18.7' E., between sections 17 and 18.

20.539 Point for the S 1/16 section corner of sections 17 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
14 inches in the ground, to solid rock in a mound of stone 3
ft. base, to top, with aluminum cap marked:

S 1/16
S18|S17
2006

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gentle north slope in piñon and juniper
growth.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

- 41.078 The 1/4 section corner of sections 17 and 18, monumented with a trachyte stone, 12x12x8 inches, firmly set, clearly marked 1/4 on west face, and witnessed with a mound of stone to the east. (Record; granite stone)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 4 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S18|S17
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a cedar post, 6 inches diameter, alongside the aluminum post.

Corner falls on a gradual SE slope in piñon and juniper.

N. 0°29.0' W., beginning new measurement.

- 20.187 Point for the N 1/16 section corner of sections 17 and 18, not monumented.

- 40.374 The corner of sections 7, 8, 17, and 18, monumented with a granite stone, 24x10x10 inches, firmly set, clearly marked 5 notches on east and 4 notches on south edges, and witnessed with a mound of stone to the north.

from which the original bearing tree

A juniper, 20 ins. diam., bears S. 62° E., 262 links distance, with no visible scribe marks on an open blaze. (Record; 220 links distance)

No remaining evidence of the NE bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, in a mound of stone 4 ft. base, to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
 $\frac{S7}{S18} | \frac{S8}{S17}$
 2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

From the corner of sections 8, 9, 16, and 17.

S. 89°55.6' W., between sections 8 and 17.

40.814 Point for the 1/4 section corner of sections 8 and 17, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
 S8
 $\frac{1}{4}$ ———
 S17
 2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gentle south slope.

81.628 The corner of sections 7, 8, 17, and 18.

N. 89°53.4' W., between sections 7 and 18.

20.212 Point for the E 1/16 section corner of sections 7 and 18, not monumented.

40.424 The 1/4 section corner of sections 7 and 18, monumented with a granite stone, 15x9x6 inches, firmly set, dimly marked 1/4 on north face, and witnessed with a mound of stone to the east.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W.; SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S7
1/4 —
S18
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 70 ft. south of a fence line projecting east and west on flat ground in piñon and juniper growth.

S. 89°40.4' W., beginning new measurement.

40.109 The corner of sections 7, 12, 13, and 18, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 West.

From the corner of sections 7, 8, 17, and 18.

N. 0°21.5' E., between sections 7 and 8.

39.970 The 1/4 section corner of sections 7 and 8, determined at record distance from the original bearing trees:

A piñon, 12 ins. diam., bears N. 76° E., 50 links distance, with a healed blaze. (Record; N. 80° E.)

A piñon, 8 ins. diam., bears S. 10° E., 30 links distance, with scribe marks 1/4 S BT, visible on a partially healed blaze. (Record; S. 15° E.)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S7|S8
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual south slope in piñon and juniper growth.

N. 0°04.6' E., beginning new measurement.

25.173 The closing corner of sections 7 and 8, identical with angle point No. 7, hereinbefore described.

Reestablishment of the Survey Executed by
E.W. Koeber in 1890.

N. 0°23.9' E., beginning new measurement.

15.225 The corner of sections 5, 6, 7, and 8, monumented with a granite stone, 18x10x6 inches, firmly set, clearly marked 5 notches on east and south edges.

From which unrecorded bearing trees

A juniper, 12 ins. diam., bears N. 36° E., 103 links distance, with scribe marks S5 BT, visible on a partially healed blaze.

A juniper, 12 ins. diam., bears S. 10° E., 92 links distance, with scribe marks S8 BT, visible on an open blaze.

A juniper, 16 ins. diam., bears N. 80° W., 36 links distance, with scribe marks S6 BT, visible on a mostly healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T30SR6W

S6	S5
S7	S8

 2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Raise a mound of stone, 3 ft. by 3 ft. base, by 2 ft. high, west of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in dense piñon and juniper growth.

From the corner of sections 4, 5, 8, and 9.

N. 89°19.3' W., between sections 5 and 8.

- 39.946** The 1/4 section corner of sections 5 and 8, monumented with a granite stone, 12x10x8 inches, firmly set, clearly marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone 4 ft. base, to top, with aluminum cap marked:

T30SR6W
S5
1/4 —
S8
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual south slope in piñon and juniper growth.

S. 89°53.7' W., beginning new measurement.

- 40.307** The corner of sections 5, 6, 7, and 8.
-

S. 89°45.2 W., between sections 6 and 7.

- 16.547** The point for the closing corner of sections 6 and 7, at intersection with the Fort Cameron Wood and Timber Reserve Boundary; hereinbefore described.

- 19.996** The point for the closing corner of sections 6 and 7, at intersection with the Fort Cameron Wood and Timber Reserve Boundary; hereinbefore described.

- 37.471** The closing corner of sections 6 and 7, at intersection with the Fort Cameron Wood and Timber Reserve Boundary; identical with angle point No. 4, hereinbefore described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Reestablishment of the Survey Executed by
H. Fitzhugh in 1882.

N. 89°53.6' W., beginning new measurement.

3.250 The 1/4 section corner of sections 6 and 7, monumented with a granite stone, 18x13x5 inches, firmly set, clearly marked 1/4 on north face.

from which the original bearing tree

A piñon, 20 ins. diam., bears N. 75° W., 28 links distance, with a healed blaze. (Record; 40 links distance)

No remaining evidence of the SE bearing tree was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
S6
1/4 —
S7
2006

Deposit the marked stone alongside the aluminum post.

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

42.886 The corner of sections 1, 6, 7, and 12, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 West.

Reestablishment of the Survey Executed by
E.W. Koeber in 1890.

From the corner of sections 5, 6, 7, and 8,

N. 3°53.9' W., between sections 5 and 6.

38.832 Point for the 1/4 section corner of sections 5 and 6, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

T30SR6W
1/4
S6|S5
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a steep NW slope in piñon and juniper growth.

77.567 The corner of sections 5, 6, 31, and 32, on the north boundary of the township, hereinbefore described.

The Subdivision of Section 17,
T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 17 and 20.

N. 0°07.1' W., on the N - S center line of section 17.

21.605 Point for the center S 1/16 section corner of section 17, not monumented.

43.210 Point for the center 1/4 section corner, at intersection with the E - W center line of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, with aluminum cap marked:

T30SR6W
C1/4
S17
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

83.439 The 1/4 section corner of sections 8 and 17.

THE SUBDIVISION OF SECTION 17,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

From the 1/4 section corner of sections 16 and 17.

S. 89°43.5' W., on the E - W center line of section 17.

- 40.561 The center 1/4 section corner of section 17.
- 60.841 Point for the center W 1/16 section corner of section 17, not monumented.
- 81.121 The 1/4 section corner of sections 17 and 18.

From the W 1/16 section corner of sections 17 and 20.

N. 0°05.5' E., on the N - S center line of the SW 1/4 of section 17.

- 21.072 Point for the SW 1/16 section corner, at intersection with the E - W center line of the SW 1/4 of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 29 inches in the ground, with aluminum cap marked:

SW 1/16
S17
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a south edge of open flat pasture land.

- 42.144 The point for the center W 1/16 section corner of section 17.

From the point for the center S 1/16 section corner of section 17.

N. 88°46.5' W., on the E - W center line of the SW 1/4 of section 17.

- 20.364 The SW 1/16 section corner of section 17.
- 40.728 The S 1/16 section corner of sections 17 and 18.

The Subdivision of Section 18,
T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 18 and 19.

N. 0°16.3' W., on the N - S center line of section 18.

THE SUBDIVISION OF SECTION 18,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

20.351 Point for the center S 1/16 section corner of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

C
S 1/16|S18
C
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a rolling north slope.

40.702 Point for the center 1/4 section corner, at intersection with the E - W center line of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T30SR6W
C 1/4
S18
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls at the foot of a south slope.

60.983 Point for the center N 1/16 section corner of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

C
N 1/16|S18
C
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

81.264 The 1/4 section corner of sections 7 and 18.

THE SUBDIVISION OF SECTION 18,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

From the 1/4 section corner of sections 17 and 18.

S. 89°50.6' W., on the E - W center line of section 18.

20.288 Point for the center E 1/16 section corner of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

E 1/16
C—C
S18
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a moderate south slope.

40.576 The center 1/4 section corner of section 18.

80.863 The 1/4 section corner of sections 13 and 18, on the west boundary of the township, described in the concurrent resurvey of the east boundary of Township 30 South, Range 7 East.

From the center E 1/16 section corner of section 18.

N. 0°22.6' W., on the N - S center line of the NE 1/4 of section 18.

20.234 Point for the NE 1/16 section corner, at intersection with the E - W center line of the NE 1/4 of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, in a mound of stone 3 ft. base, to top, with aluminum cap marked:

NE 1/16
S18
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

40.468 The point for the E 1/16 section corner of sections 7 and 18.

THE SUBDIVISION OF SECTION 18,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

From the point for the N 1/16 section corner of sections 17 and 18.

S. 89°58.6' W., on the E - W center line of the NE 1/4 of section 18.

20.250 The NE 1/16 section corner of section 18.

40.500 The center N 1/16 section corner of section 18.

From the S 1/16 section corner of sections 17 and 18.

N. 89°53.4' W., on the E - W center line of the SE 1/4 of section 18.

40.370 The center S 1/16 section corner of section 18.

The Subdivision of Section 30,
T. 30 S., R. 6 W., Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 30 and 31.

N. 0°07.2' E., on the N - S center line of section 30.

20.241 Point for the center S 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, in a mound of stone 2 ft. base, to top, with aluminum cap marked:

C
S 1/16|S30
C
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a west slope in piñon and juniper growth.

40.482 Point for the center 1/4 section corner, at intersection with the E - W center line of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a mound of stone 2 ft. base, to top, with aluminum cap marked:

THE SUBDIVISION OF SECTION 30,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

T30SR6W
C 1/4
S30
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper with sagebrush undergrowth.

80.502 The 1/4 section corner of sections 19 and 30.

From the 1/4 section corner of sections 29 and 30.

N. 89°27.8' W., on the E - W center line of section 30.

20.094 Point for the center E 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

E 1/16
C — C
S30
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on the east bank of a large wash draining SW, in piñon and juniper growth.

40.188 The center 1/4 section corner of section 30.

80.766 The 1/4 section corner of sections 25 and 30, on the west boundary of the township, described in the concurrent dependent resurvey of the east boundary of Township 30 South, Range 7 West.

From the center E 1/16 section corner of section 30.

N. 0°06.0' E., on the N - S center line of the NE 1/4 of section 30.

40.085 The E 1/16 section corner of sections 19 and 30.

THE SUBDIVISION OF SECTION 30,
T. 30 S., R. 6 W., SALT LAKE MERIDIAN, UTAH.

CHAINS

From the point for the E 1/16 section corner of sections 30 and 31.

N. 0°04.9' E., on the N - S center line of the SE 1/4 of section 30.

20.175 Point for the SE 1/16 section corner, at intersection with the E - W center line of the SE 1/4 of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 29 inches in the ground, with aluminum cap marked:

SE 1/16
S30
2006

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on the east bank of a large wash draining SW, in piñon and juniper growth.

40.350 The center E 1/16 section corner of section 30.

From the point for the S 1/16 section corner of sections 29 and 30.

N. 89°39.0' W., on the E- W center line of the SE 1/4 of section 30.

20.109 The SE 1/16 section corner of section 30.

40.218 The center S 1/16 section corner of section 30.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
C. Scott Bishop	Cadastral Surveyor
Mike Mortensen	Survey Aid
D. Quade Johnson	Survey Aid

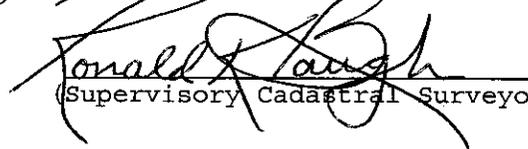
CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, under the supervision of *Ronald K. Baugh, Supervisory Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date *12th day of June, 2006*, we have executed a *dependent resurvey of a portion of the south boundary (Sixth Standard Parallel South), a portion of the north boundary, a portion of the Fort Cameron Wood and Timber Reserve Boundary, a portion of the subdivisional lines, and the subdivision of sections 17, 18 and 30, in Township 30 South, Range 6 West,*

of the *Salt Lake* meridian, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under the direction of *Ronald K. Baugh, supervisory Cadastral Surveyor*; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 11, 2008
Date

January 26, 2009
Date

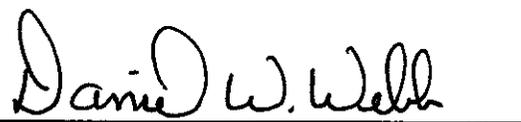

(Cadastral Surveyor)

(Supervisory Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the south boundary (Sixth Standard Parallel South), a portion of the north boundary, a portion of the Fort Cameron Wood and Timber Reserve Boundary, a portion of the subdivisional lines, and the subdivision of sections 17, 18 and 30, in Township 30 South, Range 6 West,* executed by *Jeremy D. Davis, Cadastral Surveyor*, under the supervision of *Ronald K. Baugh, Supervisory Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

April 13, 2009
Date


(Chief Cadastral Surveyor for Utah)