

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE WEST BOUNDARY (ASHLEY GUIDE MERIDIAN),
OF TOWNSHIP 2 NORTH, RANGE 23 EAST,
A PORTION OF THE SUBDIVISIONAL LINES,
A PORTION OF THE LEFT BANK MEANDERS OF THE GREEN RIVER
AND THE SUBDIVISION OF SECTIONS 13 AND 14,

IN

TOWNSHIP 2 NORTH, RANGE 22 EAST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Daniel T. Gillins
Cadastral Surveyor

Under the supervision of


Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated and approved *July 10, 2007*, which
provided for the surveys included under *Group Number 1027*, and
Assignment Instructions dated *July 10, 2007*.

Survey Commenced *July 31, 2007*
Survey Completed *August 16, 2007*

INDEX DIAGRAM

Township 2 North, Range 22 EAST

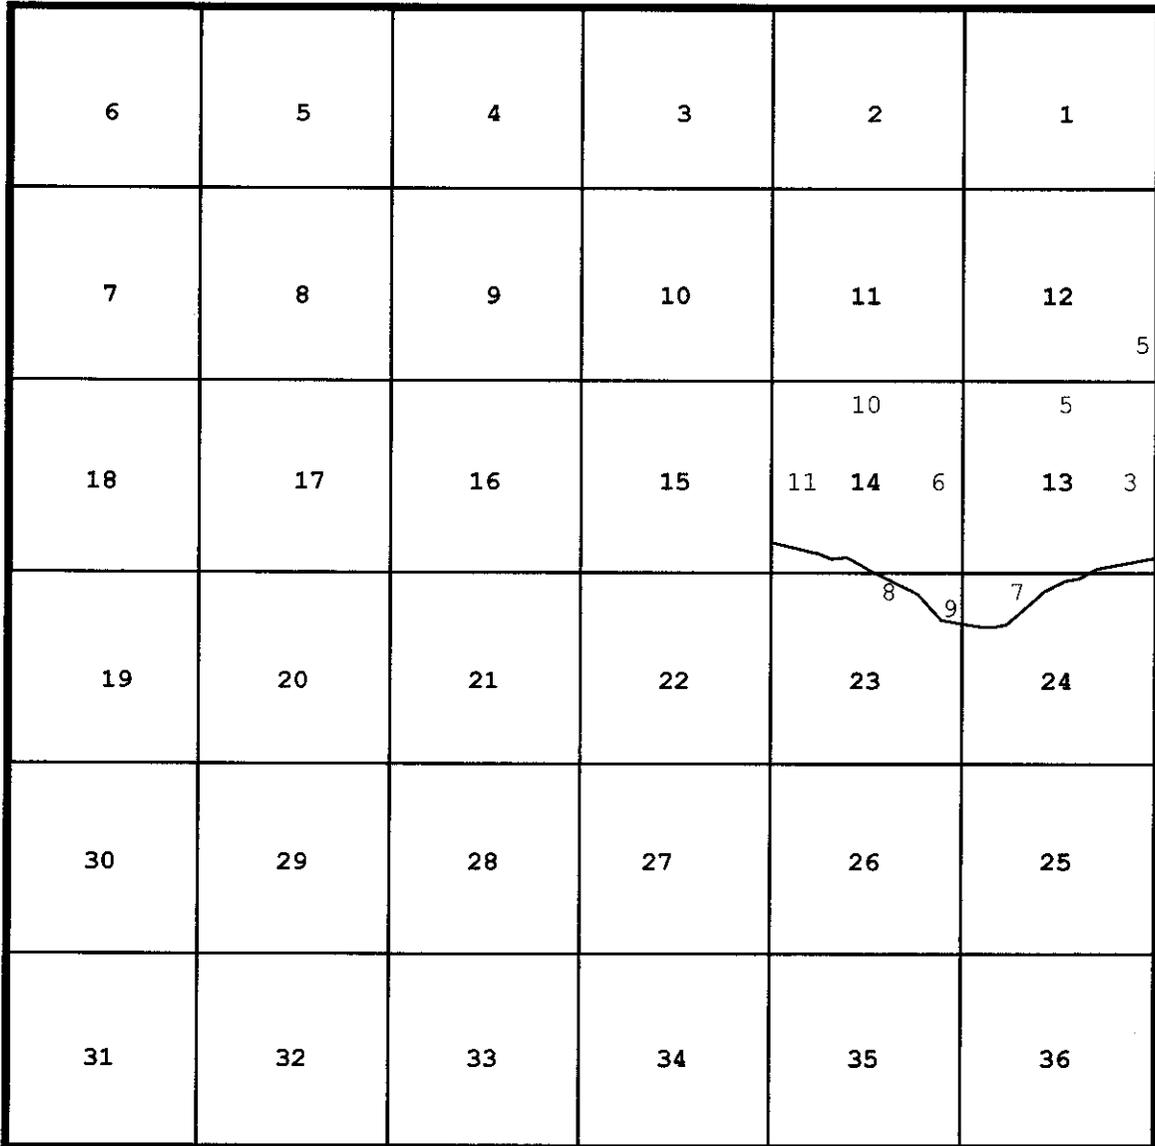

The subdivision of section 13.....	12
The subdivision of section 14.....	13
The dependent resurvey of the meanders of the left bank of the Green River.....	14

TOWNSHIP 2 NORTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the west boundary (Ashley Guide Meridian), of Township 2 North, Range 23 East, a portion of the subdivisional lines, a portion of the left bank meanders of the Green River, and the subdivision of sections 13 and 14 in Township 2 North, Range 22 East, Salt Lake Meridian, Utah.

History of Surveys

Surveyed by	Retr. or Resurveyed by
SOUTH BOUNDARY	
All J. C. Clark	1938
EAST BOUNDARY (Ashley Guide Meridian)	
All S.P. & A.J. Stewart	1906
Portion	J. C. Clark 1938
Portion	G.D. Voorhees 1958-59
WEST BOUNDARY	
Portion S.P. & A.J. Stewart	1906
Portion J. C. Clark	1938
NORTH BOUNDARY	
All S.P. & A.J. Stewart	1906
Portion	G.D. Voorhees 1958-59
Portion	J.L. Thomas & R.L. Houston 1996-97
SUBDIVISION	
Portion S.P. & A.J. Stewart	1906
Portion J. C. Clark	1938
Portion	G. D. Voorhees 1958-59
Portion	J.L. Thomas & R.L. Houston 1996-97
MEANDERS OF THE GREEN RIVER	
Left Bank S.P. & A.J. Stewart	1906
Right Bank J. C. Clark	1938
HOMESTEAD ENTRY SURVEYS	
Portion J. C. Brown	1913
Portion J. C. Clark	1938
DUTCH JOHN TOWNSITE	
All G. D. Voorhees	1958-59
Portion	J.L Thomas & R.L. Houston 1996-97
REMONUMENTATION	
Portion A. Nelson	1961

TOWNSHIP 2 NORTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1027, dated July 10, 2007.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for the project calculations.

Preliminary to the resurvey, the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

Cadastral Control Network was derived by GPS observations from the 1996 B.L.M. Control Station No. 2. The published geographic position of B.L.M. Control Station No. 2, from the official record of the 1996-97 resurvey, is as follows:

Latitude: 40°55'53.7982" N. Longitude: 109°23'31.3333" W.
(N.A.D. 1983)

The geographic position of the corner of sections 11, 12, 13, and 14, as determined by direct RTK methods from B.L.M. Control Station No. 2 is as follows:

Latitude: 40°55'04.707" N. Longitude: 109°23'43.127" W.,
(N.A.D. 1983)

DEPENDENT RESURVEY OF A PORTION OF
THE WEST BOUNDARY (ASHLEY GUIDE MERIDIAN),
T. 2 N., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of
the West Boundary (Ashley Guide Meridian),
T. 2 N., R. 23 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
S. P. & J. R. Stewart in 1906

Beginning at the meander corner of sections 13 and 18 on the right bank of the Green River, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, 4 inches high, with brass cap marked as described in the official record of the 1938 survey.

Corner is located on steep, north facing, rocky slope between two boulders.

N. 0°26.2' W., on the west boundary of section 18.


- 3.711 The meander corner of sections 13 and 18 on the left bank of the Green River, determined by record distances from the 1906 bearing trees:

A burnt pine, 24 inches diameter, bears N. 24° E., 22 links distance, with open blaze. (Record: N. 21°30' E.)

A burnt pine, 20 inches diameter, bears N. 39° W., 72 links distance, with mostly healed blaze.
(Record: N. 42°30' W.)

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 4 inches in the ground to solid rock, in a large mound of stone, 4 ft. base to top of aluminum cap marked:

T2N	
R22E	R23E
S13	S18
	
MC	
2007	

N. 0°13.0' W., beginning new measurement.

- 21.629 The 1/4 section corner of section 18 only, determined from the 1906 bearing trees:

A piñon pine, 10 inches diameter, bears N. 12° E., 6 links distance, with visible scribing on a blaze.

DEPENDENT RESURVEY OF A PORTION OF
THE WEST BOUNDARY (ASHLEY GUIDE MERIDIAN),
T. 2 N., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

A cedar leaning downhill, 15 inches diameter, bears S. 80° W., 16 links distance, with visible scribing on a blaze.

At the corner point

Set a rebar, 3/4 inch diameter, 9 inches long, in cement bond, 3 inches into a drill hole in solid sandstone ledge rock projecting 10 x 5 x 1/2 ft. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with a 3 1/4 inch diameter aluminum cap marked:

T2N
R22E | R23E
 | 1/4
 | S18
 |
 2007

Corner is located on a very steep, rocky, south facing slope.

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, 2 links east of corner.

N. 0°17.0' W., beginning new measurement.

- 9.452 Point for the 1/4 section corner of section 13 only, T. 2 N., R. 22 E., at proportionate distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T2N
R22E | R23E
 | 1/4
 | S13
 |
 2007

Set an aluminum u-channel post along the southeast side of the aluminum post.

- 40.027 The corner of sections 7 and 18 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1958-59 resurvey, with a mound of stone 2 links west, and an aluminum u-channel post set 2 links north. There is no remaining evidence of the 1906 bearing trees.

Corner is located on flat ground, surrounded by dead piñons.

DEPENDENT RESURVEY OF A PORTION OF
THE WEST BOUNDARY (ASHLEY GUIDE MERIDIAN),
T. 2 N., R. 23 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Reestablishment of the Survey Executed by S. P. & J. R. Stewart
in 1906, and the Resurvey Executed by G. D. Voorhees in 1958-59

N. 0°44.5' W., on the west boundary of section 7.

- 9.701 The closing section corner of sections 12 and 13, T. 2 N., R. 22 E., monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 1/2 ft. base, 1 ft. high to top of brass cap marked as described in the official record of the 1958-59 resurvey. There is no remaining evidence of the 1906 bearing trees.

Corner is located on a gentle north facing slope, surrounded by sandstone outcroppings, dead cedars, and dead piñons.

- 39.860 The 1/4 section corner of section 7 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a large mound of stone, 4 ft. base, 30 inches high to top of brass cap marked as described in the official record of the 1958-59 resurvey.

Corner is located on top of a large slab of rock.

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 2 N. R. 22 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by S. P. and J. R. Stewart
in 1906, and Resurvey Executed by G. D. Voorhees in 1958-59

From the corner of sections 11, 12, 13, and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1958-89 resurvey, with an aluminum u-channel post set 3 links north. There is no remaining evidence of the 1906 bearing trees.

Corner is located on a gentle, southwest facing slope, and approximately 15 links southwest of the centerline of a two track dirt road, bears northwest and southeast.

From this corner, the 1996 B.L.M. Control Station No. 2 bears N. 10°19.6' E., 76.541 chains distance, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of the 1996-97 resurvey.

N. 89°59.2' E., between sections 12 and 13.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

40.272 The 1/4 section corner of sections 12 and 13, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1958-59 resurvey, with a mound of stone, 3 ft. base, 3 ft. high, 2 links north of iron post.

Corner is located on flat ground. The USFS/BLM helipad is northwest of the corner.

S. 89°55.4' E., beginning new measurement.

40.121 The closing corner of sections 12 and 13, on the east boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by
S. P. and J. R. Stewart in 1906

From the corner of sections 11, 12, 13, and 14,

S. 0°07.6' E., between sections 13 and 14.

39.739 The 1/4 section corner of sections 13 and 14, monumented with a sandstone 13 x 7 x 3 inches, loosely set, marked 1/4 on west face. There is no remaining evidence of the 1906 bearing trees.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T2N R22E
1/4
S14 | S13
2007

Bury the marked stone alongside the aluminum post.

Corner is located on flat, rocky ground on the east edge of a small clearing.

S. 0°01.3' E., beginning new measurement.

39.921 The corner of sections 13, 14, 23, and 24, monumented with a dim cross chiseled in a flat sandstone boulder projecting 6 x 3 x 2 ft. above ground, from which the remaining 1906 bearing tree:

A long leaf pine, 17 inches diameter, bears N. 28°30' E.,
53 links distance, with visible scribing on an open blaze.
(Record: N. 24°30' E.)

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a brass tablet, 3 1/4 inch diameter, with a 3 1/2 inch stem, flush into center of cross, in cement bond, into a drill hole on solid rock marked:

T2N	R22E
S14	S13
S23	S24
2007	

S. 89°30.6' E., between sections 13 and 24.

- 39.818** The 1/4 section corner of sections 13 and 24, monumented with a dim cross chiseled on the top of a sandstone ledge projecting 6 x 2 x 2 ft. above ground, dimly marked 1/4 on north face. There is no remaining evidence of the 1906 bearing trees.

At the corner point

Set a brass tablet, 3 1/4 inch diameter, with a 3 1/2 inch stem, flush into center of cross, in cement bond, into a drill hole on solid rock marked:

T2N	R22E
$\frac{1}{4}$	— S13
	— S24
2007	

Corner is located on south facing bench. A cliff face bearing southwest and northeast is approximately 40 links north of corner.

N. 89°16.8' E., beginning new measurement

- 15.566** The meander corner of sections 13 and 24 on the left bank of the Green River, in a scattered mound of stone, at a point determined from the remaining 1906 bearing tree:

A cedar, 22 inches diameter, bears S. 85° W., 32 links distance, with visible scribing on an open blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 22 inches in the ground, in a mound of stone, 3 ft. base, 2 ft. high, with aluminum cap marked:

T2N	R22E
	S13
—	/ MC
S24	
2007	

from which

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

A yellow pine, 40 inches diameter, bears N. 53° E., 45 links distance, with scribing on an open blaze facing the corner. We believe this tree was marked during the 1938 survey and then incorrectly recorded as being the 1906 bearing tree in section 13 (which was a 10 inch diameter cedar at N. 10° W., 53 links distance, as per the official record of the 1906 survey, not a 30 inch diameter yellow pine as described in the official record of the 1938 survey). Did not find the 1906 bearing tree in section 13.

From this point, the meander corner of sections 13 and 24 on the right bank of the Green River, bears S. 89°05.1' E., 7.214 chains distance, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1938 survey. From which the 1938 bearing trees:

A yellow pine, 26 inches diameter, bears N. 83° E., 60 links distance, with a healed blaze. (Record: N. 79°45' E.)

A yellow pine, 14 inches diameter, bears S. 27° W., 60 links distance, with a partially healed blaze.

Corner is located on a steep north facing slope.

From the corner of sections 13, 14, 23, and 24,

West, between sections 14 and 23.

- 28.000 Point for the meander corner of sections 14 and 23 on the left bank of the Green River, determined at record bearing and distance, falls in east edge of river water where it is impracticable to establish a permanent monument; not monumented. There is no remaining evidence of the original corner.

Reestablishment of the Survey Executed by
J. C. Clark in 1938

S. 89°51.5' W., beginning new measurement.

- 7.793 The meander corner of sections 14 and 23 on the right bank of the Green River, monumented with an iron post, 1 inch diameter, firmly set, in a collar of stones, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1938 survey, from which the remaining 1938 bearing tree:

A Douglas fir, 16 inches diameter, bears S. 33°15' E., 32 links distance, with visible scribing on an open blaze.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 11, 12, 13, and 14.

S. 89°56.0' W., between sections 11 and 14.

20.035 Point for the E 1/16 section corner of sections 11 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

	S11
E 1/16	—————
	S14
	2007

Set an aluminum u-channel post along the southwest side of the aluminum post.

Raise a mound of stone 2 1/2 ft. base, 1 1/2 ft. high, 2 links west of corner.

40.070 The 1/4 section corner of sections 11 and 14, monumented with an iron post, 2 1/2 inches diameter, set in a mound of stone, 2 ft. base, 2 ft. high to top of brass cap marked as described in the official record of the 1958-59 resurvey, from which the remaining 1906 bearing tree:

A burnt and dead ponderosa pine, 13 inches diameter, bears S. 16° W., 26.5 links distance, with visible scribe marks 1/4 S14 BT on an open blaze. (Record: S. 46° W., 32 links)

Corner is located on a west facing slope, surrounded by large sandstone rocks, dead ponderosa pines, and dead piñons.

N. 89°39.2' W., beginning new measurement.

19.925 The W 1/16 section corner of sections 11 and 14, monumented with an iron post 2 1/2 inches diameter, set in a mound of stone, 2 ft. base, 2 ft. high to top of brass cap marked as described in the official record of the 1958-59 resurvey.

Set a steel u-channel post along the west side of the iron post.

Corner is located on a southwest facing slope.

39.850 The corner of sections 10, 11, 14, and 15, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone 2 ft. base, 2 ft. high to top of brass cap marked as described in the official record of the 1958-59 resurvey, from which the remaining 1906 bearing trees:

A long leaf pine, 19 inches diameter, bears N. 42°20' E., 51.5 links distance, marked T2N R22E S11 BT.
(Record: 50 links)

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

A dead piñon, 4 1/2 inches diameter, bears S. 51° W., 27 links distance, marked T2N R22E S15 BT. (Record: S. 54° W.)

A long leaf pine, 15 inches diameter, bears N. 42°30' W., 57 links distance, marked T2N R22E S10 BT.

Corner is located on a west facing slope, surrounded by piñons and long leaf pines. The corner is approximately 230 links east of the centerline of Federal Highway No. 191.

Reestablishment of the Survey Executed by
S. P. and J. R. Stewart in 1906

S. 0°03.6' E., between sections 14 and 15.

- 40.003 The 1/4 section corner of sections 14 and 15, monumented with a sandstone 19 x 8 x 4 inches, loosely set, plainly marked 1/4 on west face. There is no remaining evidence of the 1906 bearing trees.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 24 inches in the ground, with aluminum cap marked:

T2N R22E
1/4
S15 | S14
2007

Bury the marked stone alongside the aluminum post.

Corner is located on a southeast facing slope, approximately 90 links west of the bottom of wash, drains southwest, and 117 links south of the centerline of Federal Highway No. 191.

S. 0°29.2' W., beginning new measurement

- 17.894 The meander corner of sections 14 and 15 on the left bank of the Green River, monumented with a dim cross chiseled on a large, stationary ledge rock projecting 7 x 2 1/2 x 10 ft. above ground, from which the remaining 1906 bearing tree:

A cedar, 12 inches diameter, bears N. 74° E., 14 links distance, marked T2N R22E S14 BT MC.

At the corner point

Set a brass tablet, 3 1/4 inch diameter, with a 3 1/2 inch stem, flush into center of cross, in cement bond, into a drill hole on solid rock marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

T2N R22E
S15 S14
MC
2007

from which

Set a railroad spike, 6 1/2 inches long, with a 1 3/4 inch diameter top, flush with ground surface; bears N. 22°18.6' W., 0.118 chains distance.

From this point, the meander corner of sections 14 and 15 on the right bank of the Green River, bears S. 13°16.0' E., 3.853 chains distance, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above a mound of stone, 4 ft. base, 2 ft. high, marked as described in the official record of the 1938 survey. Corner is located on a north facing slope, surrounded by brush.

The Subdivision of Section 13,
T. 2 N., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 13 and 24.

N. 0°15.5' E., on the N-S centerline of section 13.

39.976 Point for the center 1/4 section corner of section 13, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 27 inches in the ground with aluminum cap marked:

T2N R22E

C1/4 S13

2007

Set an aluminum u-channel post along the east side of the aluminum post.

80.011 The 1/4 section corner of sections 12 and 13.

From the 1/4 section corner of section 13 only, on the east boundary of the township, hereinbefore described.

N. 89°35.2 W., on the E-W centerline of section 13.

40.582 The center 1/4 section corner of section 13.

80.591 The 1/4 section corner of sections 13 and 14.

THE SUBDIVISION OF SECTION 14,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 14,
T. 2 N., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 11 and 14.


S. 0°01.0' W., on the N-S centerline of section, determined by averaging the bearings of the east and west boundaries of fractional section 14 north of the Green River.

- 39.725 Point for the center 1/4 section corner of section 14, at the intersection with the E-W centerline, falls on a piñon tree, 16 inches diameter.

Marked said tree "C 1/4 S 14" on blazed south face.

from which

Set a reference monument, S. 0°01.0' W, 8.1 links distance, monumented with an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 27 inches in the ground, with aluminum cap marked:




Set an aluminum u-channel post along the east side of the aluminum post.

Corner is located on a northwest facing slope, approximately 3 chains south of a dirt road, bears east and west.

- 71.874 Intersect the meander line of left bank of the Green River; point for special meander corner on the meridional centerline of section 14.

Set a brass tablet, 3 1/4 inch diameter, with a 3 1/2 inch stem, flush with top of a quartzite boulder projecting 4 x 2 1/2 x 1 1/2 ft. above ground, in cement bond, into a drill hole on solid rock, marked:



Corner is located 7.5 links north of edge of river water.

THE SUBDIVISION OF SECTION 14,
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 13 and 14.

S. 89°57.0' W., on the E-W centerline of section.

20.087 Point for the center E 1/16 section corner of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 18 inches in the ground, in a mound of stone, 3 ft. base to top of aluminum cap marked:

E 1/16
C—————C
S14
2007

Set an aluminum u-channel post along the southwest side of the aluminum post.

Corner is located at the top of small ridge, approximately 4.5 chains west of 2 track dirt road, bears N-S.

40.174 The center 1/4 section corner of section 14.

79.973 The 1/4 section corner of sections 14 and 15.

From the center E 1/16 section corner of section 14.

N. 0°03.3' W., on the N-S centerline of the NE 1/4 of section.

39.732 The E 1/16 section corner of sections 11 and 14.

Dependent Resurvey of a portion of the
Left Bank Meanders of the Green River,
T. 2 N., R. 22 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
S. P. & J. R. Stewart in 1906.

Since the Green River has not moved much in these sections since the left bank was meandered in 1906, we decided to determine the meanders by performing a Broken Boundary (Compass Rule) Adjustment of the 1906 meanders.

From the meander corner of sections 13 and 18 on the east boundary of the township (Ashley Guide Meridian), and the left bank of the Green River, hereinbefore described.

Thence, upstream with the meanders of the left bank of the river, in section 13.

S. 72°36.0' W., 25.198 chains.

THE DEPENDENT RESURVEY OF A PORTION OF THE
LEFT BANK MEANDERS OF THE GREEN RIVER IN
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

S. 55°57.9' W., 1.549 chains. The meander corner of
sections 13 and 24.

Thence in section 24.

S. 55°45.3' W., 1.493 chains.

S. 71°19.3' W., 9.566 chains.

S. 57°15.8' W., 6.170 chains.

S. 63°47.5' W., 4.481 chains.

S. 49°13.3' W., 19.892 chains.

S. 73°19.7' W., 2.990 chains.

N. 89°37.8' W., 4.493 chains.

N. 79°52.3' W., 12.495 chains.

N. 57°38.5' W., 1.303 chains. The meander corner of
sections 23 and 24.

Thence in section 23.

N. 58°15.3' W., 8.399 chains.

N. 40°14.4' W., 12.182 chains.

N. 63°15.2' W., 14.604 chains. The point for the meander
corner of sections 14 and 23.

Thence in section 14.

N. 66°51.5' W., 4.984 chains.

N. 52°49.1' W., 9.564 chains. The special meander corner,
on the meridional centerline
of sec. 14.

N. 52°49.1' W., 6.297 chains.

N. 61°50.5' W., 3.091 chains.

N. 76°13.4' W., 4.683 chains.

THE DEPENDENT RESURVEY OF A PORTION OF THE
LEFT BANK MEANDERS OF THE GREEN RIVER IN
T. 2 N., R. 22 E., SALT LAKE MERIDIAN, UTAH

S. $84^{\circ}17.2'$ W., 6.673 chains.

N. $76^{\circ}08.3'$ W., 4.683 chains.

N. $65^{\circ}51.3'$ W., 18.043 chains. The meander corner of
sections 14 and 15.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
R. Keith Batty	Survey Technician
Adrian Kurip	Survey Technician
Calvert C. Norton	Survey Technician

CERTIFICATE OF SURVEY

We, **Ronald K. Baugh, Supervisory Cadastral Surveyor, and Daniel T. Gillins, Cadastral Surveyor**, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing the date of the **10th day of July, 2007**, we have **dependently resurveyed a portion of the west boundary (Ashley Guide Meridian), of T. 2 N., R. 23 E., a portion of the subdivisional lines, a portion of the left bank meanders of the Green River, and subdivided sections 13 and 14 in T. 2 N., R 22 E., of the Salt Lake meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 24, 2009
Name

Ronald K. Baugh
(Supervisory Cadastral Surveyor)

June 24, 2009
Name

Daniel T. Gillins
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the west boundary (Ashley Guide Meridian), of T. 2 N., R. 23 E., a portion of the subdivisional lines, a portion of the left bank meanders of the Green River, and the subdivision of sections 13 and 14 in T. 2 N., R 22 E., Salt Lake Meridian, Utah**, executed by **Daniel T. Gillins, Cadastral Surveyor** under the supervision of **Ronald K. Baugh, Supervisory Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

July 21, 2009
Date

Daniel W. Webb
(Chief Cadastral Surveyor for Utah)

