

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE WEST BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES, THE
SURVEY AND RESURVEY OF MINERAL SURVEY NUMBER 7371,
AND THE SUBDIVISION OF SECTION 18

IN

TOWNSHIP 13 NORTH, RANGE 13 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

RONALD K. BAUGH
Supervisory Cadastral Surveyor

&
TYLER G. TRUJILLO
Cadastral Surveyor

Under special instructions dated and approved **November 16, 2006**, which provided for the surveys included under Group Number **1039**, and assignment instructions dated **November 16, 2006**

Survey commenced **November 20, 2006**
Survey completed **March 21, 2007**

INDEX DIAGRAM

Township 13 North, Range 13 West

6	5	4	3	2	1
7	8	9	10	11	12
3 6	5				
3 18	5 17	16	15	14	13
2 4	4				
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 18.....Page 7
 Dependent Resurvey of Turquoise Stone Placer Millsite Claim.....Page 7
 Survey & Resurvey of Turquoise Stone Placer Mining Claim.....Page 10

TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of a portion of the West boundary, a portion of the subdivisional lines, the survey and resurvey of Mineral Survey Number 7371, and the subdivision of section 18, in T. 13 N., R. 13 W., Salt Lake Meridian, Utah.

History of Surveys

Surveyed by	Retr. or Resurveyed by
SOUTH BOUNDARY	
All G.V.M. Boutelle	1872
Portion	F.C. Profaizer 1983
EAST BOUNDARY	
Portion G.V.M. Boutelle	1872
Portion A.P. Hanson	1893
WEST BOUNDARY	
Portion G.V.M. Boutelle	1872
Portion A.P. Hanson	1893
Portion	R.A. Zaninovich 1989
NORTH BOUNDARY	
All A.P. Hanson	1893
SUBDIVISION	
Portion G.V.M. Boutelle	1872
Portion A.P. Hanson	1893
Portion	R.A. Zaninovich 1989

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1039, dated November 16, 2006.

TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

The true meridian direction and length of all lines were determined by Global Positioning System (GPS) utilizing Real-Time Kinematics (RTK) observations using the Trimble 5700 model receiver.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and their calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from Global Positioning System (GPS) static observations, post processed by National Geodetic Survey, Online Positioning User Service, (OPUS), Utilizing Continuously Operating Reference Stations; (CORS) HNSLVALLY, HILL72, and CNRSPRNGS. The N.A.D. 1983 (CORS96) geographic position of the corner of sections 17, 18, 19, and 20 is as follows:

Latitude: 41°50'45.828" N. Longitude: 113°22'07.451" W.

N.A.D. 83, Network Accuracy = 0.200 Meters at 95% confidence interval.

N.A.V.D. 1988 Elevation: 6316 ft.

Dependent Resurvey of a portion of the west boundary
Township 13 North, Range 13 West, Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by
A.P. Hanson in 1893

Beginning at the corner of sections 13, 18, 19, and 24, monumented with a Quartzite stone, 15x10x6 inches, plainly marked with 3 notches on the north and south edges.

At the corner point

Set an aluminum post, 30 inches long, 5 inches in ground, to solid rock, with magnet at base, and in a mound of stone, 3 ft. base, to top of aluminum cap marked:

T13N	
R14W	R13W
<u>S13</u>	<u>S18</u>
S24	S19
2006	

Corner is located at the intersection of fences running north-south, and east.

N. 0° 05.1' W., between sections 13 and 18.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

40.204

The 1/4 section corner of sections 13 and 18, monumented with a Quartzite 16x8x6 inches, firmly set, and plainly marked 1/4 on west face, with a 3x2 ft. mound of stone to the south.

At the corner point

Set an aluminum post, 30 inches long, 18 inches in ground, to solid rock, with magnet at base, and in a mound of stone, 3 ft. base, to top of aluminum cap marked:

T13N
R14W R13W
1/4
S13 | S18
2006

Corner is located in fence line running north-south.

N. 0° 04.2' E., beginning new measurement.

39.667

The corner of sections 7, 12, 13, and 18, monumented with an aluminum post, 2 1/2 inches in diameter, projecting 14 inches above a mound of stone, 4 ft. base, 2 ft. high, with aluminum cap marked:

MINERAL SURVEY
T13N
12 | 7
13 | 18
R14W R13W
1991
NO. 7371A
RM-TS-6-7381-COR-1-1993

Found a 4 inch diameter P.V.C. pipe projecting 5 ft. above ground in mound of stone.

Corner is located on a southeasterly slope.

Dependent Resurvey of a portion of the subdivisional lines,
Township 13 North, Range 13 West, Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by
G.V.M. Boutelle in 1872

From the corner of sections 17, 18, 19, and 20, monumented with a Granite stone, 16x12x8 inches, firmly set, with 5 notches on east, and 3 on the south edges.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 7 inches in ground, to solid rock, with magnet at base, in a mound of stone, 4 ft. base, to top of aluminum cap marked:

T13NR13W
S18 | S17
S19 | S20
2006

Set a T-post alongside.

Corner is located in scattered sage and grasses.

S. 87° 24.6' W., between sections 18 and 19.

- 39.667 Point for the 1/4 section corner of sections 18 and 19, at proportionate distance there is no remaining evidence of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 18 inches in ground, to solid rock, with magnet at base, in a mound of stone, 4 ft. base, to top of aluminum cap marked:

T13NR13W
S18
1/4 ———
S19
2007

Set a T-post alongside.

- 79.631 The corner of sections 13, 18, 19, and 24, on the west boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by
A.P. Hanson in 1893

From the corner of sections 17, 18, 19, and 20.

N. 0° 59.0' W., between sections 17 and 18.

- 40.402 The 1/4 section corner of sections 17 and 18, monumented with a 1/2 inch rebar projecting 10 inches above ground, with 1 inch plastic cap marked:

PEARSON

ULS5754

This is accepted as the best available evidence of the original corner location.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Found a 1 inch square wood post with placer claim information attached in a plastic container.

At the corner point

Set an aluminum post, 30 inches long, 15 inches in ground, to solid rock, with magnet at base, and in a mound of stone 3 ft. base to top of aluminum cap marked:

T13NR13W
1/4
S18 | S17
2007

Place 1/2 inch rebar in aluminum post.

N. 0° 56.3' W., beginning new measurement.

40.406 The corner of sections 7, 8, 17, and 18, monumented with a scattered mound of stone, a T-post, and a 2 inch stake 16 inches long, and is accepted as the best available evidence of the original corner location.

At the corner point

Set an aluminum post, 30 inches long, 5 inches in ground, to solid rock, with magnet at base, in a mound of stone, 5 ft. base, to top of aluminum cap marked:

T13NR13W
S7 | S8
S18 | S17
2007

Corner is located on a steep southerly slope.

S. 88° 47.8' W., between section 7 and 18.

38.970 The 1/4 section corner of section 7 and 18, monumented with a Quartzite stone, 15x9x4 inches firmly set in a mound of stone, plainly marked 1/4, with a T-post and 4 inch P.V.C. pipe, projecting 4 ft. above ground alongside.

At the corner point

Set an aluminum post, 30 inches long, 16 inches in ground, to solid rock, with magnet at base, in a mound of stone, 3 ft. base, to top of aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

T13NR13W
S7
1/4 ———
S18
2006

Corner is located on a southerly slope.

S. 84° 37.4' W., beginning new measurement.

- 11.944 Intersect Mineral Survey No. 7371, monumented with an aluminum post, 2 1/2 inches diameter, projecting 12 inches above ground, in a mound of stone 3 ft. base, 2 ft. high, with aluminum cap marked:

MINERAL SURVEY
7
TRQ | 18
1991
NO. 7371A

Corner is located on a southerly slope.

- 22.537 Point for the corner of Mineral Survey No. 7371 C, D, E, F, H, and T.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 2 inches in ground, to solid rock, with magnet at base, in mound of stone 4 ft. base, to top of aluminum cap marked:

T13NR13W
7371
C
S7 D F
S18 E H
T
2006

Corner is located on a rock outcrop on a westerly slope.

- 30.954 Intersect Mineral Survey No. 7371, monumented with an aluminum post, 2 1/2 inches diameter, projecting 16 inches above a mound of stone 2 ft. base, 2 ft. high, cemented together, and 3 inch aluminum cap marked:

MINERAL SURVEY
TS-6-7371-
COR-3-1993
7
18 / TRQ
1991
NO. 7371A

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on a rock outcrop on a westerly slope.

S. 84° 32.2' W., beginning new measurement.

- 8.451 The corner of sections 7, 12, 13, and 18 on the west boundary of the township, hereinbefore described.

The Subdivision of Section 18
T. 13 N., R. 13 W., Salt Lake Meridian Utah

From the 1/4 section corner of sections 18 and 19.

N. 0° 29.3' W., along the north-south centerline of section 18.

- 40.303 Point for the center 1/4 section corner of section 18, at intersection with the east-west centerline of section 18, not monumented.
- 51.519 Intersect Mineral Survey No. 7371.
- 55.862 Intersect Mineral Survey No. 7371.
- 59.528 Intersect Mineral Survey No. 7371.
- 81.772 The 1/4 section corner of sections 7 and 18.

From the 1/4 section corner of sections 17 and 18.

S. 87° 15.0' W., along the east-west centerline of section 18.

- 39.318 The point for the center 1/4 section corner of section 18.
- 79.000 The 1/4 section corner of sections 13 and 18, on the west boundary of the township, hereinbefore described.


Dependent Resurvey of the Turquoise Stone Placer Millsite Claim
M.S. No. 7371 S, T. 13 N., R. 13 W., Salt Lake Meridian, Utah

FEET

From the southeast corner of the Turquoise Stone Placer Mining Claim, M.S. No. 7371 AA, on the west boundary of the Millsite Claim, monumented with an aluminum post, 2 1/2 inches diameter, projecting 12 inches above a mound of cement, with aluminum cap marked:

DEPENDENT RESURVEY OF THE TURQUOISE STONE PLACER
MILLSITE CLAIM, M.S. No. 7371 S,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.


FEET




N. 25° 58.6' W., between the Turquoise Stone Placer Millsite Claim and Mining Claim.

- 265.95 Intersect the north-south centerline of section 18.
- 402.64 Point selected for the reference monument to the northeast corner of M.S. No. 7371 AA.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in ground, with magnet at base, and in a collar of stone, with aluminum cap marked:



- 432.64 True point for the northeast corner of M.S. No. 7371 AA, which is also the southeast corner of M.S. No. 7371 Z, located on side of large pile of crushed rock, where it is impracticable to establish a permanent monument.
- 648.96 Point for the northeast corner of M.S. No. 7371 Z, which is also the southeast corner of M.S. No. 7371 N, not monumented.
- 1164.38 Corner No. 2 of the Turquoise Stone Placer Millsite Claim, monumented with an aluminum post, 2 1/2 inches diameter, projecting 12 inches above ground, in a mound of stone, 3 ft. base, 2 ft. high, with aluminum cap marked:



Corner is located on a rocky southeasterly slope.

DEPENDENT RESURVEY OF THE TURQUOISE STONE PLACER
MILLSITE CLAIM, M.S. NO. 7371 S,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET


S. 34° 40.9' E., beginning new measurement.

687.95 Intersect the north-south centerline of section 18.

888.53 Corner No. 3 of the Turquoise Stone Placer Millsite Claim,
monumented with an aluminum post, 2 1/2 inches diameter, projecting
18 inches above a mound of cement, with aluminum cap marked:

MINERAL SURVEY

TS2
COR5



COR3
M.S.
1991
NO. 7371 B

N. 38° 46.0' E., beginning new measurement.

68.69 Corner No. 4 of the Turquoise Stone Placer Millsite Claim,
monumented with an iron post, 1 1/2 inches diameter, projecting 8
inches above a mound of cement, with no cap attached.

Corner is located on a southwesterly slope.

S. 31° 33.6' E., beginning new measurement.

392.09 Corner No. 5 of the Turquoise Stone Placer Millsite Claim,
monumented with an aluminum post, 2 1/2 inches diameter, projecting
3 inches above ground, in a cement mound 2 ft. base, 2 ft. high,
with aluminum cap marked:

MINERAL SURVEY

MS



COR5

1991
NO. 7371 B

S. 63° 59.9' W., beginning new measurement.

234.54 Corner No. 6 of the Turquoise Stone Placer Millsite Claim,
monumented with an aluminum post, 2 1/2 inches diameter, projecting
10 inches above ground, in a mound of stone cemented together, 3 ft.
base, 2 ft. high, with aluminum cap marked:

DEPENDENT RESURVEY OF THE TURQUOISE STONE PLACER
MILLSITE CLAIM, M.S. No. 7371 S,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET

MINERAL SURVEY

MS
COR6

TS2-COR3
1991
NO. 7371 B

N. 26° 08.0' W., beginning new measurement.

- 74.96 The southeast corner of the Turquoise Stone Placer Mining Claim, M.S. No. 7371 AA, on the west boundary of the Millsite Claim, hereinbefore described.

The Survey and Dependent Resurvey of the
Turquoise Stone Placer Mining Claim M.S. No. 7371,
T. 13 N., R. 13 W., Salt Lake Meridian, Utah

From the southeast corner of the Turquoise Stone Placer Mining Claim, M.S. No. 7371 AA, hereinbefore described.

- S. 67° 22.2' W., along the south boundary of the mining claim.
- 123.57 Intersect the north-south centerline of section 18, at a point N. 0° 29.3' W., for a distance of 740.24 ft. distance from the center 1/4 of section 18.
- 724.94 The corner of M.S. No. 7371 AA and P, monumented with a 1/2 inch rebar, projecting 14 inches above ground, with a 1 inch aluminum cap marked:

U.S.M.S.
7371

4.Q

LS 1798


S. 67° 29.9' W., beginning new measurement.

- 723.56 Corner No. 2 of the Turquoise Stone Placer Mining Claim, which is also the southwest corner of M.S. No. 7371 P, monumented with an aluminum post, 2 1/2 inches diameter, projecting 15 inches above ground, in a mound of stone 4 ft. base, to top of aluminum cap marked:

THE SURVEY AND RESURVEY OF THE
 TURQUOISE STONE PLACER MINING CLAIM M.S. NO. 7371,
 TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET

MINERAL SURVEY



N. 22° 26.5' W., along the west boundary of the mining claim.


1233.86 The corner of M.S. No. 7371 K, X, and Y, monumented with a 1/2 inch rebar, projecting 24 inches above ground, with no cap attached.

Found a 1/2 inch rebar, projecting 24 inches above ground, and a 5/8 inch rebar projecting 4 1/2 ft. above ground alongside.

Corner is located 30 ft. south of a dirt road bearing northeast-southwest.

N. 22° 26.7' W., beginning new measurement.


650.20 The corner of M.S. No. 7371 K and U, monumented with a 3/8 inch rebar, projecting 15 inches above ground, in a mound of stone 2 ft. base, 1 ft. high, with 1 inch aluminum cap marked:



N. 22° 20.8' W., beginning new measurement.

192.81 Point for the corner of M.S. No. 7371 T and U.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in ground, to solid rock, with magnet at base, and in a mound of stone 3 ft. base to top of aluminum cap marked:




Corner is located on a southeasterly slope.

550.14 Corner No. 3 of the Turquoise Stone Placer Mining Claim, which is also the northwest corner of M.S. No. 7371 E, monumented with an

THE SURVEY AND RESURVEY OF THE
TURQUOISE STONE PLACER MINING CLAIM M.S. NO. 7371,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET


aluminum post, 2 1/2 inches diameter, projecting 10 inches above a mound of cement, with aluminum cap marked:



Corner is located on a white granite boulder 15 ft. x 10 ft., on a southeasterly slope.

N. 57° 54.2' E., along the north boundary of the mining claim.

- 119.11 Intersect the line between sections 7 and 18, monumented with an aluminum post, 2 1/2 inches diameter, projecting 16 inches above ground, in a mound of stone 2 ft. base, 2 ft. high, cemented together, with aluminum cap marked:



N. 57° 27.9' E., beginning new measurement.


- 529.74 Point for the corner of M.S. No. 7371 C and D, not monumented.
- 1171.82 Corner No. 4 of the Turquoise Stone Placer Mining Claim, which is also the northeast corner of M.S. No. 7371 C, monumented with a wood stake, projecting 8 inches above ground, in a mound of stone 3 ft. base, 2 ft. high, and is accepted as the best available evidence of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in ground, to solid rock, with magnet at base, in a mound of stone, 3 ft. base, to top of aluminum cap marked:


THE SURVEY AND RESURVEY OF THE
TURQUOISE STONE PLACER MINING CLAIM M.S. NO. 7371,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET



S. 26° 59.4' E., along the east boundary of the mining claim.

- 575.63 Intersect the line between sections 7 and 18, monumented with an aluminum post, 2 1/2 inches diameter, projecting 12 inches above a mound of stone, 4 ft. base, 3 ft. high, with aluminum cap marked:




Corner is located on a southerly slope.

S. 26° 06.4' E., beginning new measurement.

- 805.90 Point for the corner of M.S. No. 7371 N, V, and W.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, 8 inches in ground, to solid rock, with magnet at base, and in a mound of stone, 4 ft. base, to top of aluminum cap marked:



Corner is located on the north edge of a westerly sloping trail running east-west.

- 922.29 Corner No. 2 of the Turquoise Stone Placer Millsite Claim, hereinbefore described.

From the corner of M.S. No. 7371 AA and P, on the south boundary of the mining in claims.


N. 24° 15.1' W., between M.S. No. 7371 AA and P.

THE SURVEY AND RESURVEY OF THE
 TURQUOISE STONE PLACER MINING CLAIM M.S. No. 7371,
 TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET

625.06 Point for the corner of M.S. No. 7371 AA, N, P, X, Y, AND Z, at proportionate distance, there is no remaining evidence of the original corner.

Set a rebar, 15 inches long, 5/8 inch diameter, 10 inches in ground, to solid rock, with 3 inch aluminum cap marked:



Corner is located on north edge of dirt road running east-west.


From which:

3 rebars, 1/2 inch diameter, projecting 12 inches above ground, bears N. 11° 43.8' W, for a distance of 22.48 ft., not accepted as corner location.

N. 82° 25.3' E., between M.S. No. 7371 AA and Z.

637.86 Point selected for the reference monument to the northeast corner of M.S. No. 7371 AA.

Set a rebar, 24 inches long, 5/8 inch diameter, 12 inches in ground, to solid rock, with 3 inch aluminum cap marked:



Corner is located on south edge of quarry.

742.86 True point for the northeast corner of M.S. No. 7371 AA, which is also the southeast corner of M.S. No. 7371 Z, located on side of large pile of crushed rock, where it is impracticable to establish a permanent monument.

From the point for the northeast corner of M.S. No. 7371 Z, which is also the southeast corner of M.S. No. 7371 N, hereinbefore described.

S. 65° 29.9' W., between M.S. No. 7371 N and Z.

THE SURVEY AND RESURVEY OF THE
TURQUOISE STONE PLACER MINING CLAIM M.S. No. 7371,
TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET

705.12

The corner of M.S. No. 7371 AA, N, P, X, Y, AND Z.

N. 71° 36.1' W., between M.S. No. 7371 X and Y.


930.28

The corner of M.S. No. 7371 K, X, and Y.

N. 65° 46.0' E., between M.S. No. 7371 K and X.

684.22

The corner of M.S. No. 7371 K, N, W, and X, monumented with a rebar, 3/8 inch diameter, placed in a drill hole, projecting 12 inches above a granite boulder, with 1 inch aluminum cap marked:



Corner is located on a rocky southeasterly slope.

S. 24° 15.1' E., between M.S. No. 7371 N and X.

630.06

The corner of M.S. No. 7371 AA, N, P, X, Y, AND Z.

From the corner of M.S. No. 7371 K, N, W, and X.

N. 65° 22.0' E., between M.S. No. 7371 N and W.


685.83

The corner of M.S. No. 7371 N, V, and W.

N. 70° 58.9' W., between M.S. No. 7371 V and W.

941.84

The corner of M.S. No. 7371 H, K, U, V, and W, monumented with a rebar, 1/2 inch diameter, projecting 1 inch above ground, with 1 inch aluminum cap marked:



S. 24° 15.0' E., between M.S. No. 7371 K and W.

650.13

The corner of M.S. No. 7371 K, N, W, and X.

THE SURVEY AND RESURVEY OF THE
 TURQUOISE STONE PLACER MINING CLAIM M.S. No. 7371,
 TOWNSHIP 13 NORTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH.

FEET


From the corner of M.S. No. 7371 H, K, U, V, and W.

N. 24° 32.2' W., between M.S. No. 7371 H and U.

192.94 Point for the corner of M.S. No. 7371 T and U.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in ground, with magnet at base, in a mound of stone, 3 ft. base, to top of aluminum cap marked:

T13NR13W



2006

Corner is located on a southwesterly slope.

385.88 Intersect the line between sections 7 and 18, hereinbefore described.

642.38 The point for the corner of M.S. No. 7371 C and D.

From the corner of M.S. No. 7371 H, K, U, V, and W.

S. 65° 44.7' W., between M.S. No. 7371 K and U.

663.71 The corner of M.S. No. 7371 K and U, on the west boundary of the mining claim.

From the corner of M.S. No. 7371 T and U.

S. 65° 43.4' W., between M.S. No. 7371 T and U.

656.33 The corner of M.S. No. 7371 T and U, on the west boundary of the mining claim.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


FIELD ASSISTANTS

Name	Capacity
Glen B. Hatch	Cadastral Surveyor


CERTIFICATE OF SURVEY

I, **Ronald K. Baugh, Supervisory Cadastral Surveyor, and Tyler G. Trujillo, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date **16th day of November, 2006**, have executed a **dependent resurvey of a portion of the west boundary, a portion of the Subdivisional Lines, and the Survey and Resurvey of Mineral Survey Number 7371, and the subdivision of section 18, in Township 13 North, Range 13 West**, of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Sept. 27, 2007
Date

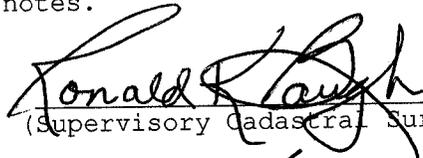
(Supervisory Cadastral Surveyor)

Sept. 27, 2007
Date


(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the west boundary, a portion of the Subdivisional Lines, and the Survey and Resurvey of Mineral Survey Number 7371, and the subdivision of section 18, in Township 13 North, Range 13 West, Salt Lake Meridian, Utah**, executed by **Ronald K. Baugh, Supervisory Cadastral Surveyor, and Tyler G. Trujillo, Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

September 28, 2007
Date


(Chief Cadastral Surveyor for Utah)