

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF A PORTION OF
THE SOUTHEAST BOUNDARY OF THE UINTAH INDIAN RESERVATION,
AND THE SOUTH BOUNDARY (FIRST STANDARD PARALLEL SOUTH)

IN

TOWNSHIP 4 SOUTH, RANGE 3 EAST

THE DEPENDENT RESURVEY OF A PORTION OF
THE SOUTHEAST BOUNDARY OF THE UINTAH INDIAN RESERVATION,
THE WEST BOUNDARY, THE SUBDIVISIONAL LINES,
THE SUBDIVISION OF SECTIONS 5, 6, 7, AND 8
BY THE THREE MILE METHOD, A PORTION OF THE MEANDERS
OF THE MAIN AND NORTH CHANNELS OF THE GREEN RIVER, AND THE SURVEY OF A
PORTION OF THE SUBDIVISION OF SECTIONS 6 AND 7,

IN

TOWNSHIP 5 SOUTH, RANGE 3 EAST

OF THE UINTAH SPECIAL MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY


Michael L. Thompson
Cadastral Surveyor

Under special instructions dated and approved **August 21, 2007**, which
provided for the surveys included under Group Number **1040**, and
assignment instructions dated **August 21, 2007**.

Survey commenced **September 5, 2007**
Survey completed **November 5, 2008**

INDEX DIAGRAM

Township 5 South, Range 3 East

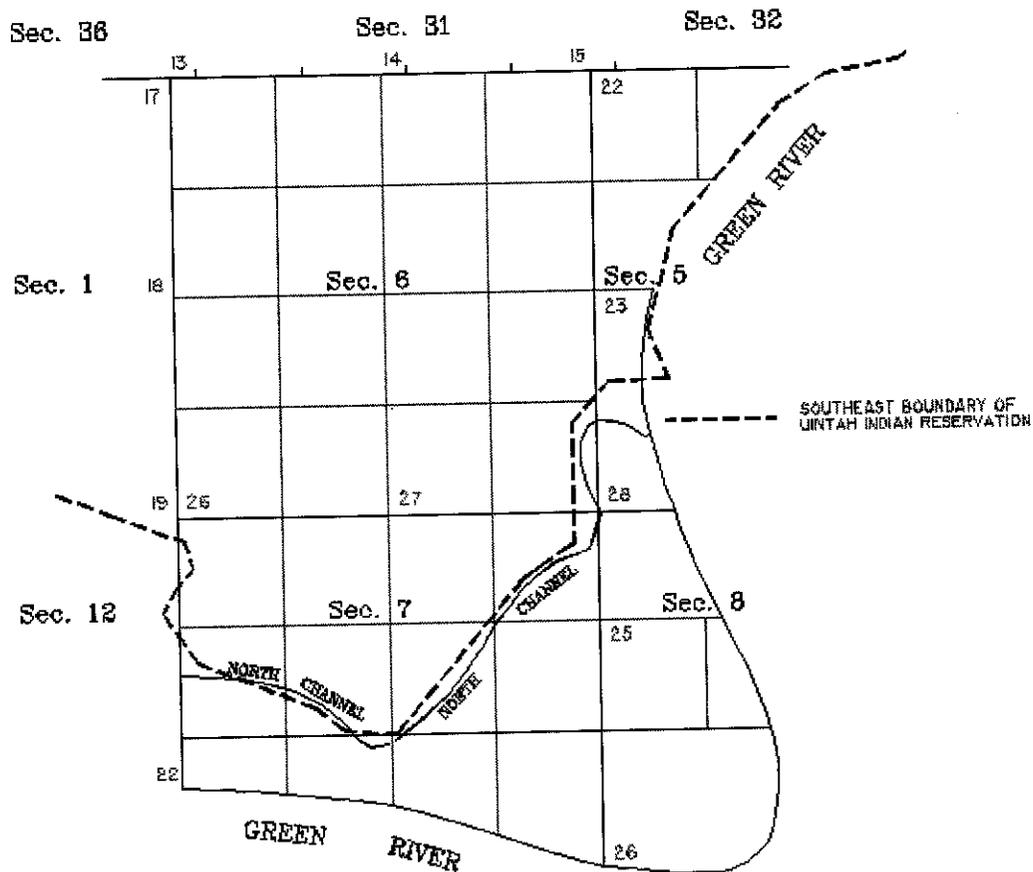

Dependent Resurvey of a Portion of the Southeast Boundary of the Uintah Indian Reservation.....	Pg. 3
Dependent Resurvey of the Subdivision of Section 5.....	Pg. 28
Dependent Resurvey of the Subdivision of Section 6.....	Pg. 29
Survey of a Portion of the Subdivision of Section 6.....	Pg. 34
Dependent Resurvey of the Subdivision of Section 7.....	Pg. 35
Survey of a Portion of the Subdivision of Section 7.....	Pg. 39
Dependent Resurvey of the Subdivision of Section 8.....	Pg. 41
Survey of a Portion of the Present Meanders of the Main and North Channels of the Green.....	Pg. 43

TOWNSHIP 5 SOUTH, RANGE 3 EAST, UINTAH SPECIAL MERIDIAN, UTAH

The following field notes describe the dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, the south boundary (First Standard Parallel South), in **Township 4 South, Range 3 East**. The dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, the west boundary, the subdivisional lines, the subdivision of sections 5, 6, 7, and 8 by the Three Mile Method, a portion of the present meanders of the Main and North channels of the Green River, and the survey of a portion of the subdivision of sections 6 and 7, in **Township 5 South, Range 3 East**, Uintah Special Meridian, Utah.

History of Surveys

Surveyed by	Retraced or Resurveyed by
NORTH BOUNDARY (First Standard Parallel South)	
All D.G. Major	1882
WEST BOUNDARY	
All D.G. Major	1882
SUBDIVISION	
All D.G. Major	1882
UINTAH INDIAN RESERVATION BOUNDARY	
Portion	A.H. & F.M. Brown 1903
MEANDERS	
All D.G. Major	1882
Portion	A.H. & F.M. Brown 1903

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1040, Utah, dated August 21, 2007.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

TOWNSHIP 5 SOUTH, RANGE 3 EAST, UINTAH SPECIAL MERIDIAN, UTAH

The true geodetic mean bearings and the true horizontal ground distances of all lines were determined by inverting between the established corners using Global Positioning System (GPS) methods with Real-Time Kinematic (RTK) observations derived from a Trimble 5700 model receiver.

Geodetic control was derived from GPS static observation of the 1/4 section corner of sections 5 and 6, T. 5 S., R. 3 E.; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continually Operating Reference Stations (CORS), CARBON COUNTY, MYTON1, and RIFLE_GCL. The geographic position of the 1/4 section corner of sections 5 and 6, T. 5 S., R. 3 E., is as follows:

Latitude: $40^{\circ} 04' 44.144''$ N., Longitude: $109^{\circ} 41' 21.412''$ W.,
NAD 1983, Network Accuracy = 0.100 meters at 95% confidence.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Dependent Resurvey of the Southeast Boundary
 of the Uintah Indian Reservation ,
 T. 4 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
 A.H. Brown in 1903

Note: All bearings and distances of the southeast boundary of the Uintah Indian Reservation from the initial point, in T. 4 S., R. 3 E., UIR, to the angle point 16, in T. 5 S., R. 3 E., UIR, then to angle point 27, in T. 5 S., R. 2 E., UIR, were adjusted using the Broken Boundary method.

Beginning at the initial point of the southeast boundary of the Uintah Indian Reservation, is determined at the intersection of fences extending N. 23° W. and S. 67° E., is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground with rock collar, with magnet at base, and aluminum cap marked:

INITIAL

T4S POINT T8S

R3E UIR R20E

USM SLM

2008

From this point, the one mile corner on the northeast boundary of the Uintah Indian Reservation, bears **N. 23°07.8' W., 79.710** chains distance, monumented with an aluminum post, 2 1/2 inches diameter, firmly set in collar of stone, projecting 6 inches above ground, with aluminum cap marked as described in the official record of the 1998 resurvey.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From this same point, a 5/8 inch iron rebar, set in a mound of stone, 2 foot base, 1 foot high, bears
S. 24°38.8' E., 0.287 chains distance.

S. 67° 14.1' E., on the Uintah Indian Reservation boundary.

32.918 Point for angle point 1, falls in the flood plain of the Green River with numerous downed trees. There is no remaining evidence of the original corner. Not monumented.

S. 24° 38.5' W., on the Uintah Indian Reservation boundary.

7.002 Point for the 1/2 mile corner, falls in the flood plain of the Green River. There is no remaining evidence of the original corner. Not monumented.

15.005 Point for angle point 2, falls in the flood plain of the Green River in dense trees and undergrowth. There is no remaining evidence of the original corner. Not monumented.

S. 35° 24.8' E., on the Uintah Indian Reservation boundary.

24.951 Point for the one mile corner, falls in the Green River. There is no remaining evidence of the original corner. Not monumented.

S. 73° 45.1' E., on the Uintah Indian Reservation boundary.

22.344 Point for angle point 3, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

S. 27° 23.9' E., on the Uintah Indian Reservation boundary.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 14.874** Point for angle point 4, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 3° 53.3' W.**, on the Uintah Indian Reservation boundary.
- 2.699** Point for the 1 1/2 mile corner, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
- 7.396** Point for angle point 5, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 32° 09.4' E.**, on the Uintah Indian Reservation boundary.
- 15.670** Point for angle point 6, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 35° 53.1' W.**, on the Uintah Indian Reservation boundary.
- 11.709** Point for angle point 7, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 69° 50.2' W.**, on the Uintah Indian Reservation boundary.
- 7.916** Point for the 2 mile corner, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 23.347** Point for angle point 8, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 48° 37.3' W.**, on the Uintah Indian Reservation boundary.
- 12.617** Point for angle point 9, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 82° 13.6' W.**, on the Uintah Indian Reservation boundary.
- 6.316** Point for angle point 10, falls in the flood plain of the Green River in open fields of wild grasses with scattered cottonwoods and black willow. There is no remaining evidence of the original corner. Not monumented.
-
- S. 87° 17.9' W.**, on the Uintah Indian Reservation boundary.
- 5.713** Point for the 2 1/2 mile corner, falls in the flood plain of the Green River in scattered willow and cottonwoods. There is no remaining evidence of the original corner. Not monumented.
- 27.163** Point for angle point 11, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 53° 36.9' W.**, on the Uintah Indian Reservation boundary.
- 3.846** Intersect the First Standard Parallel South at a point from which the standard corner of sections 31 and 32, T. 4 S., R. 3 E., bears **West, 51.334** chains distance. Not monumented.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 4.607** Point for angle point 12, in T. 5 S., R. 3 E., falls on the right bank of the Green River. Supporting foundation for a gas line across the Green River bears northwest at approximate distance of 10 feet. There is no remaining evidence of the original corner. Not monumented.
-
- S. 81° 03.7' W.**, on the Uintah Indian Reservation boundary.
- 14.031** Point for the 3 mile corner, falls at the intersection of the left bank of the Duchesne River, and the right bank of the Green with stands of willow and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 60° 51.2' W.**, on the Uintah Indian Reservation boundary.
- 10.017** Point for angle point 13, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 43° 37.7' W.**, on the Uintah Indian Reservation boundary.
- 30.034** Point for the 3 1/2 mile corner, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- S. 16° 38.6' W.**, on the Uintah Indian Reservation boundary.
- 19.000** Point for angle point 14, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-


DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 9.585** S. 21° 38.3' E., on the Uintah Indian Reservation boundary.
 Point for angle point 15, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- 11.427** S. 88° 47.7' W., on the Uintah Indian Reservation boundary.
 Point for the 4 mile corner, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- 1.575** S. 45° 07.5' W., on the Uintah Indian Reservation boundary.
 Intersect the section line of sections 5 and 6, T. 5 S., R. 3 E., at a point from which the 1/4 section corner, bears **North, 18.446** chains distance, hereinafter described. Not monumented.
- 3.809** Intersect the E-W centerline of the S 1/2 of section 6, T. 5 S., R. 3 E., at a point from which the S 1/16 section corner of sections 5 and 6, bears **N. 89° 09.0' E., 1.583** chains distance, hereinafter described. Not monumented.
- 10.012** Angle point 16, monumented with a sandstone 19 x 10 x 5 inches, lying on the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position. A scattered mound of stone lies 2 foot northeast of corner stone.
- At the corner point
- Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base in a mound of stones 2 foot base to top of aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS



Deposit the sandstone alongside of aluminum post.

Corner falls at top of small rise approximately 45 feet southwest of thick willow undergrowth extending north and south.

Set a steel fence post next to monument.

S. 1° 14.7' W., on the Uintah Indian Reservation boundary.

15.754 Intersect the section line of sections 6 and 7, T. 5 S., R. 3 E., at a point from which the E 1/16 section corner, bears **S. 88°38.6' W.**, **13.181** chains distance, hereinafter described. Not monumented.

21.623 Point for angle point 17, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

S. 57° 41.8' W., on the Uintah Indian Reservation boundary.

8.404 Point for the 4 1/2 mile corner, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

11.305 Point for angle point 18, falls in the flood plain of the Green River in dense stands of willow, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

S. 42° 42.3' W., on the Uintah Indian Reservation boundary.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 11.263** Intersect the E-W centerline of the N 1/2 of section 7, T. 5 S., R. 3 E., at a point from which the CN 1/16 section corner, bears **S. 89°11.3' W., 15.494** chains distance, hereinafter described. Not monumented.
- 34.835** Intersect the N-S centerline of section 7, T. 5 S., R. 3 E., at a point from which the C 1/4 section corner, bears **S. 1°38.6' W., 2.862** chains distance, hereinafter described. Not monumented.
- 37.127** Point for the 5 mile corner, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 84° 18.6' W.,** on the Uintah Indian Reservation boundary.
- 9.698** Point for angle point 19, falls in the flood plain of the Green River in dense stands of willow with scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 52° 02.8' W.,** on the Uintah Indian Reservation boundary.
- 7.295** Point for angle point 20, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 68° 03.3' W.,** on the Uintah Indian Reservation boundary.
- 22.129** Intersect the section line of sections 7 and 12, T. 5 S., R. 2 & 3 E., at a point from which the N 1/16 section corner, bears **North, 4.637** chains distance, hereinafter described. Not monumented.

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 5 S., R. 2 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 22.989** Point for the 5 1/2 mile corner, T. 5 S., R. 2 E., falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 34° 31.9' W.**, on the Uintah Indian Reservation boundary.
- 10.990** Point for angle point 21, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 30° 02.1' E.**, on the Uintah Indian Reservation boundary.
- 4.996** Point for angle point 22, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 42° 17.7' E.**, on the Uintah Indian Reservation boundary.
- 4.996** Point for angle point 23, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-
- N. 15° 45.8' W.**, on the Uintah Indian Reservation boundary.
- 4.995** Point for angle point 24, falls in the flood plain of the Green River in dense stands of willow, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.
-

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION,
T. 5 S., R. 2 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

N. 68° 18.3' W., on the Uintah Indian Reservation boundary.

13.994 Point for the 6 mile corner, falls in the flood plain of the Green River with dense willow undergrowth. There is no remaining evidence of the original corner. Not monumented.

30.986 Point for angle point 25, falls in the flood plain of the Green River with dense willow undergrowth, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

N. 84° 33.6' W., on the Uintah Indian Reservation boundary.

22.996 Point for the 6 1/2 mile corner, falls in the flood plain of the Green River with dense willow undergrowth, and scattered cottonwoods. There is no remaining evidence of the original corner. Not monumented.

29.495 Point for angle point 26, falls in the flood plain of the Green River with scattered willow and cottonwoods. There is no remaining evidence of the original corner. Not monumented.

N. 70° 48.4' W., on the Uintah Indian Reservation boundary.

9.496 The point for angle point 27, is determined at record bearing and distance from the bearing object

A sandstone ledge, 15 feet high, bears **N. 31° W.**,
330 links distance, marked +BO \sphericalangle UIR.


No other bearing objects found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTHEAST BOUNDARY
 OF THE UINTAH INDIAN RESERVATION,
 T. 5 S., R. 2 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
 AP27
 S 1
 UIR 
 2008

Corner falls between the right bank of the Green River
 and a sandstone ledge 15 feet high.

Set a steel fence post next to monument.

Dependent Resurvey of the (First Standard Parallel
 South), on the South Boundary,
 T. 4 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
 D.G. Major in 1882

From the standard corner of sections 31 and 36 on the
 First Standard Parallel South, T. 4 S., R. 2 and 3 E.,
 monumented with a sandstone 18 x 8 x 5 inches, set on
 top of ground, and marks have been obliterated.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches
 diameter, 26 inches in the ground, with magnet at
 base, and aluminum cap marked:

S C
 T 4 S
 R 2 E | R 3 E
 S 36 | S 31

 2007

Deposit the sandstone alongside the aluminum post.

Corner is located at corner of barbed wire fences
 extending north and east.

DEPENDENT RESURVEY OF THE (FIRST STANDARD PARALLEL
SOUTH), ON THE SOUTH BOUNDARY,
T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set a steel fence post next to monument.

East, on the south boundary of section 31.

20.000

Point for the standard W 1/16 section corner of section 31 at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, in collar of stone, and aluminum cap marked:

S C
T 4 S R 3 E
W 1/16 S 31

2007

Corner is located 18 feet south of barbed wire fence extending east and west.

Set a steel fence post next to monument.

32.710

Point for the 1/4 section corner of section 6, T. 5 S., R. 3 E. at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, in collar of stone, and aluminum cap marked:

T 4 S R 3 E

1/4 S 6
T 5 S R 3 E
2007

Corner is located 42 feet, S 55° E of barbed wire fences extending south and west. A two-track dirt road extending north and south bears east 10 feet.

Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE (FIRST STANDARD PARALLEL
SOUTH), ON THE SOUTH BOUNDARY,
T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

40.000

Point for the standard 1/4 section corner of section 31 at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, in collar of stone, and aluminum cap marked::

S C
T 4 S R 3 E
1/4 S 31

2007

Corner is located in hollow at base of west facing hill approximately 20 feet high. Raise a rock cairn north, 3 feet distance.

Set a steel fence post next to monument.

52.710

Point for the E 1/16 section corner of section 6, T. 5 S., R. 3 E. at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, in collar of stone, and aluminum cap marked:

T 4 S R 3 E

E 1/16 S 6

T 5 S R 3 E

2007

Corner is located 50 feet west of steep east facing cliff.

Set a steel fence post next to monument.

60.000

Point for the standard E 1/16 section corner of section 31, at record bearing and distance. There is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF THE (FIRST STANDARD PARALLEL
SOUTH), ON THE SOUTH BOUNDARY,
T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located on steep, heavily eroded east facing slope of loose rock. Corner not monumented due to the high probability of destruction by continuing erosion.

72.710

Point for the closing corner of sections 5 and 6, T. 5 S., R. 3 E., at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T 4 S R 3 E			

S 6		S 5	
C		C	
T 5 S R 3 E			
2007			

Corner is located in flood plain of Green River with scattered Russian olive and Cottonwood trees.

Set a steel fence post next to monument.

80.000

Point for the standard corner of sections 31 and 32 on the First Standard Parallel South, at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

S C			

T 4 S		R 3 E	
S 31		S 32	

C C			
2007			

Corner is located in flood plain of the Green River in dense stands of greasewood, cottonwood, and Russian olive trees.

Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE (FIRST STANDARD PARALLEL
SOUTH), ON THE SOUTH BOUNDARY,
T. 4 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From this point, the intersection of the southeast
boundary of the Uintah Indian Reservation bears **East,**
51.334 chains distance.

Dependent Resurvey of the West Boundary,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
D.G. Major in 1882

From the closing corner of sections 1 and 6, T. 5 S.,
R. 2 and 3 E., monumented with a sandstone 20 x 8 x 6
inches, firmly set, and clearly marked CC with T 5 S
on south face of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches
diameter, 27 inches in the ground, with magnet at
base, in collar of stone, and aluminum cap marked:

T 4 S	R 2 E
S 36	
S 1	S 6
R 2 E	R 3 E
T 5 S	C C
2007	

Deposit the marked stone alongside of aluminum post.

Set a steel fence post next to monument.

From this point the standard corner of sections 31 and
36, T. 4 S., R. 2 and 3 E., bears **N. 89°29.6' E.,**
4.890 chains distance, hereinbefore described.

S. 0°20.7' E., between sections 1 and 6.

20.077

Point for the N 1/16 section corner of sections 1 and
6, at proportionate distance. There is no remaining
evidence of the original corner.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, in collar of stone, and aluminum cap marked:

T 5 S
N 1/16
R 2 E | R 3 E
S 1 | S 6
2007

Corner is located in slight depression with sagebrush, grasses, and cacti ground cover.

Set a steel fence post next to monument.

40.154

The 1/4 section corner of sections 1 and 6, monumented with a sandstone 15 x 6 x 5 inches, firmly set, and clearly marked 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T 5 S
1/4
R 2 E | R 3 E
S 1 | S 6
2007

Deposit the marked stone alongside of aluminum post.

Set a steel fence post next to monument.

S. 0°43.8' E., beginning new measurement.

20.009

The S 1/16 section corner of sections 1 and 6, monumented with a sandstone 14 x 8 x 6 inches, firmly set and clearly marked 1/16 on north face.

At the corner point

DEPENDENT RESURVEY OF THE WEST BOUNDARY,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T 5 S	
S 1/16	
R 2 E	R 3 E
S 1	S 6

2007

Deposit the marked stone alongside of aluminum post.

Corner is located in barbed wire fence extending east and west.

S. 0°45.1' E., beginning new measurement.

20.010

The corner of sections 1, 6, 7, and 12, monumented with a sandstone 22 x 10 x 6 inches, firmly set and faintly marked with notches on north face. An iron rebar is located next to stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T 5 S	
R 2 E	R 3 E
S 1	S 6

S 12	S 7

2007

Deposit the marked stone and rebar alongside of aluminum post.

Corner is located next to low sandy bench.


Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 30.215** True point for the meander corner of the present right bank of the North Channel of the Green River, bank 3 feet high. The North Channel of the Green River is dried up with no water. Not monumented.
- 30.480** True point for the thread of the North Channel of the Green River. The North Channel of the Green River is dried up with no water. Not monumented.
- 30.858** True point for the meander corner of the present left bank of the North Channel of the Green River, bank 3 feet high. Not monumented.
- 31.982** Point selected for the witness corner to the meander corner of the present left bank of the North Channel of the Green River.


Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

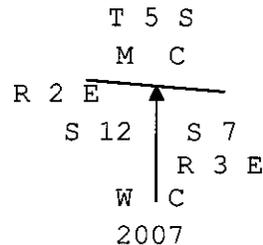

Corner is located in flood plain of Green River within small clearing in dense stands of Russian olive and cottonwood trees.

- 40.000** Point for the 1/4 section corner of sections 7 and 12, at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



DEPENDENT RESURVEY OF THE WEST BOUNDARY,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH


CHAINS

Corner is located in flood plain of Green River with scattered cottonwood trees.

Set a steel fence post next to monument.

45.536 Point selected for the witness corner to the meander corner of the present right bank of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

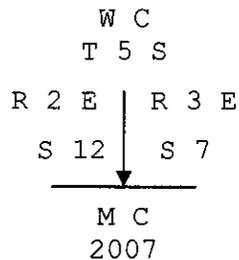

Corner is located on low rise at west side of open meadow at easterly edge of dense cottonwood trees.

Set a steel fence post next to monument.

49.442 True point for the meander corner of the present right bank of the Green River, course west, bank 5 feet high. Not monumented.

Dependent Resurvey of the Subdivisional Lines,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
D.G. Major in 1882

From the closing corner of sections 5 and 6, on the north boundary of the township, hereinbefore described.

S. 0°05.9' E., between sections 5 and 6.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

19.174 The N 1/16 section corner of sections 5 and 6, monumented with a sandstone 16 x 11 x 8 inches, firmly set and clearly marked 1/61 with number '61' incorrectly marked as mirror image.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, in mound of stone, 2 feet base, to top of aluminum cap marked:

N 1/16
S 6 | S 5
2007

Deposit the marked stone on the east side of mound.

From which a boulder 8 x 4 x 4 feet marked with 'X' as bearing object, bears N 45° W, 28.2 links distance.

Corner is located on steep east facing slope.

Set a steel fence post next to monument.

S. 0°37.5' E., beginning new measurement.

20.064 The 1/4 section corner of sections 5 and 6, monumented with a sandstone 14 x 8 x 8 inches, firmly set and faintly marked '4' on south face of stone. A 30 inch iron rebar with 1 1/2 inch aluminum cap was located next to stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, with 2 feet diameter rock collar, and aluminum cap marked:

T5SR3E
1/4
S 6 | S 5
2007

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Deposit the marked stone on north side of rock collar,
and buried rebar alongside of aluminum post.

Corner is located near top of steep east facing slope.
View of bridge crossing Green River, bears N 40° E,
3/4 miles distance.

Set a steel fence post next to monument.

South, beginning new measurement.

18.446 Point for the intersection of the southeast boundary
of the Uintah Indian Reservation. Not monumented.

20.000 Point for the S 1/16 section corner of sections 5 and
6, at record bearing and distance. There is no
remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches
diameter, 27 inches in the ground, with magnet at
base, and aluminum cap marked:

$$\begin{array}{c} \text{S } 1/16 \\ \text{S } 6 \quad | \quad \text{S } 5 \\ 2007 \end{array}$$

Corner is located at north edge of dense stands of
Russian olive, cottonwood, and greasewood trees. A
barbed wire fence and corral bear northeast 8 feet
distance.


Set a steel fence post next to monument.

22.559 Point selected for the witness corner to the meander
corner of the North Channel of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches
diameter, 26 inches in the ground, with magnet at
base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS




Set a steel fence post next to monument.

- 23.378** True point for the meander corner of the present right bank of the North Channel of the Green River, bank 4 feet high. Not monumented.
- 23.559** True point for the thread of the North Channel of the Green River. The North Channel of the Green River is dried up with no water. Not monumented.
- 23.706** True point for the meander corner of the present left bank of the North Channel of the Green River, bank 4 feet high. Not monumented.
- 40.000** Point for the corner of sections 5, 6, 7, and 8, at record bearing and distance. Not monumented.

South, between sections 7 and 8.

- 20.000** Point for the N 1/16 section corner of sections 7 and 8, at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post next to monument.

- 40.000** Point for the 1/4 section corner of sections 7 and 8, at record bearing and distance. There is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR3E
1/4
S 7 | S 8
2007

Corner is located in flood plain of the Green River.

Set a steel fence post next to monument.

60.000 Point for the S 1/16 section corner of sections 7 and 8, at record bearing and distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

S 1/16
S 7 | S 8
2007

Corner is located 2 feet south of a Russian olive tree.

Set a steel fence post next to monument.

64.756 True point for the meander corner of the present right bank of the Green River, course N. 74° W., bank 6 feet high. Not monumented.

From the corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.

N. 89°16.4' E., between sections 6 and 7.

17.626 The W 1/16 section corner of sections 6 and 7, monumented with a sandstone 14 x 8 x 6 inches, firmly set and faintly marked with '16' on south face.

At the corner point

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, with rock collar, and aluminum cap marked:

T5SR3E
S 6
W 1/16 ———
S 7
2007

Deposit the marked stone alongside the aluminum post.

Corner is located 80 feet north of a grove of trees.

Set a steel fence post next to monument.

N. 89°13.7' E., beginning new measurement.

19.994

The 1/4 section corner of sections 6 and 7, monumented with a sandstone 18 x 10 x 7 inches, firmly set 4 inches in the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, with rock collar, and aluminum cap marked:

T5SR3E
S 6
1/4 ———
S 7
2007

Deposit the sandstone alongside the aluminum post.

Corner is located on level sandy ground within a mix of sagebrush, cacti, and grasses.

Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

N. 89°54.2' E., beginning new measurement.

- 19.992** The E 1/16 section corner of sections 6 and 7, monumented with a sandstone 15 x 12 x 6 inches, firmly set 14 inches in the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

	S 6
E 1/16	—————
	S 7
	2007

Deposit the sandstone alongside the aluminum post.

Corner is located 6 feet north of two-track dirt road.

Set a steel fence post next to monument.

N. 88°38.6' E., beginning new measurement.

- 13.181** Point for the intersection of the southeast boundary of the Uintah Indian Reservation. Not monumented.
- 19.502** The point for the corner of sections 5, 6, 7, and 8.

Dependent Resurvey of the Subdivision of
Section 5 by the Three Mile Method,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
D.G. Major in 1882

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 5 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS


From the 1/4 section corner of sections 5 and 6.

East, on the E-W centerline of section 5.

10.815

Point selected for the witness corner to the meander corner of the present right bank of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located in dense thickets of Russian olive, and cottonwood trees.

Set a steel fence post next to monument.

11.245

True point for the meander corner of the present right bank of the Green River. Not monumented.

Dependent Resurvey of the Subdivision of
Section 6 by the Three Mile Method,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
D.G. Major in 1882

From the S 1/16 section corner of sections 5 and 6,
T. 5 S., R. 3 E.

S. 89°09.0' W., on the E-W centerline of the S 1/2 of
section 6.

1.583

Point for the intersection of the southeast boundary
of the Uintah Indian Reservation. Not monumented.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 6 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

19.779

The SE 1/16 section corner of section 6, monumented with a sandstone 16 x 10 x 6 inches, firmly set 12 inches in the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

SE $\frac{1}{16}$ S 6
2007

Deposit the sandstone alongside the aluminum post.

Corner is located 40 feet south of two-track dirt road extending east and west.

Set a steel fence post next to monument.

S. 88°53.5' W., beginning new measurement.

20.024

The C-S 1/16 section corner of section 6, determined at corner of barbed wire fences extending north and west, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

C
S 1/16 | S 6
C
2007

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 6 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located 20 feet north of two-track dirt road extending northeast and southwest.

Set a steel fence post next to monument.

S. 89°37.3' W., beginning new measurement.

19.946

The SW 1/16 section corner of section 6, monumented with a sandstone 22 x 10 x 8 inches, firmly set 10 inches in the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

SW $\frac{1}{16}$ S 6
2007

Deposit the sandstone alongside the aluminum post.

Corner is located in barbed wire fence extending east and west.

Set a steel fence post next to monument.

S. 89°27.5' W., beginning new measurement.

17.623

The S 1/16 section corner of sections 1 and 6, on the west boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 5 and 6.

S. 89°25.3' W., on the E-W centerline of section 6.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 6 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

19.984 The C- E 1/16 section corner of section 6, monumented with a sandstone 13 x 8 x 6 inches, firmly set 8 inches in the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

E 1/16
C ————— C
S 6
2007

Deposit the sandstone alongside of aluminum post.

Set a steel fence post next to monument.

S. 89°15.4' W., beginning new measurement.

20.025 Point for the C 1/4 section corner of section 6, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

T5SR3E
C 1/4
S 6
2007

Corner is located 8 feet east of barbed wire fence extending north and south.

Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 6 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

40.050

The C-W 1/16 section corner of section 6, monumented with a sandstone 12 x 12 x 6 inches, set on top of the ground, marks have been obliterated, is harmoniously related with identified original corners, and is accepted as the best available evidence of the original corner position.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

T5SR3E
W 1/16
C ————— C
S 6
2008

Deposit the sandstone alongside the aluminum post.

Set a steel fence post next to monument.

From the N 1/16 section corner of sections 5 and 6.

S. 89°17.7' W., on the E-W centerline of the N 1/2 of section 6.

20.018

Point for the NE 1/16 section corner of section 6 at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

NE $\frac{1}{16}$ S 6
2007

Corner is located 40 feet south of two-track dirt road extending east and west.

Set a steel fence post next to monument.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 6 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

40.036

The C-N 1/16 section corner of section 6, monumented with a sandstone 14 x 10 x 6 inches, firmly set 11 inches in the ground, and plainly marked 1/16 on south face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, set in a collar of stone, with magnet at base, and aluminum cap marked:

	C	
N 1/16		S 6
	C	
	2007	

Deposit the marked stone alongside the aluminum post.

Corner is located 13 feet east of barbed wire fence extending north and south.

Set a steel fence post next to monument.

Survey of a Portion of the Subdivision of Section 6,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

From the 1/4 section corner of section 6, on the north boundary of the township, hereinbefore described.

S. 0°00.7' W., on the N-S centerline of section 6.

19.663

The C-N 1/16 section corner of section 6, hereinbefore described.

S. 0°43.9' E., beginning new measurement.

20.033

The C 1/4 corner of section 6, hereinbefore described.

S. 0°35.4' E., beginning new measurement.

THE SURVEY OF THE SUBDIVISION OF SECTION 6,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 20.219** The C-S 1/16 section corner of section 6, hereinbefore described.

Dependent Resurvey of the Subdivision of
Section 7 by the Three Mile Method,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
D.G. Major in 1882

From the 1/4 section corner of sections 7 and 8.

S. 89°16.2' W., on the E-W centerline of section 7.

- 19.853** Point for the C-E 1/16 section corner of section 7, at proportionate distance. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

E 1/16
C ————— C
S 7
2007

Corner is located in flood plain of Green River.

Set a steel fence post next to monument.

- 31.209** Point for the meander corner of the left bank of the North Channel of the Green River, at proportionate distance. There is no remaining evidence of the original corner. Not monumented.
- 33.580** True point for the thread of the North Channel of the Green River. The North Channel of the Green River is dried up with no water. Not monumented.
- 39.706** Point for the C 1/4 section corner of section 7, at proportionate distance.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 7 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR3E

C 1/4

S 7

2007

Corner is located in flood plain of the Green River in dense stands of greasewood, cottonwood, and Russian olive trees.

Set a steel fence post next to monument.

- 57.574** Point for the meander corner of the left bank of the North Channel of the Green River, at proportionate distance. There is no remaining evidence of the original corner. The North Channel of the Green River is dried up with no water. Not monumented.
- 59.559** Point for the C-W 1/16 section corner of section 7, at proportionate distance. There is no remaining evidence of original corner. Not monumented.
- 77.119** The 1/4 section corner of sections 7 and 12, on the west boundary of the township, hereinbefore described.

From the N 1/16 section corner of sections 7 and 8.


S. 89°11.3' W., on the E-W centerline of the N 1/2 of section 7.

- 17.004** Point selected for the witness corner to the present meander corner of the left bank of the North Channel of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 7 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS




Corner is located in dense thicket of cottonwood, Russian olive, and young willow.

Set a steel fence post next to monument.

- 20.049** True point for the meander corner of the present left bank of the North Channel of the Green River, bank 3 feet high. Not monumented.
- 20.302** True point for the thread of the North Channel of the Green River. Not monumented.
- 20.518** True point for the meander corner of the present right bank of the North Channel of the Green River, bank 3 feet high. Not monumented.
- 21.407** Point selected for the witness corner to the present meander corner of the right bank of the North Channel of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located in small clearing with dense thickets of cottonwood, Russian olive, and young willow surrounding corner.

Set a steel fence post next to monument.

- 23.638** Point for the intersection of the southeast boundary of the Uintah Indian Reservation. Not monumented.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 7 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

S. 89°24.0' W., beginning new measurement.

- 17.974 The N 1/16 section corner of sections 7 and 12, on the west boundary of the township, hereinbefore described.

Survey of a Portion of the Subdivision of Section 7,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

From the C-N 1/16 section corner of section 7.

S. 1° 38.6' W., on the N-S centerline of section 7.


- 17.099 Point for the intersection of the southeast boundary of the Uintah Indian Reservation. Not monumented.

- 19.961 The C 1/4 section corner of section 7.

South, beginning new measurement.

- 3.941 Point selected for the witness corner to the meander corner of the present right bank of the North Channel of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located in dense thicket of cottonwood, and Russian olive.


Set a steel fence post next to monument.

SURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 7,
T. 5 S., R. 3 E., UINAH SPECIAL MERIDIAN, UTAH

CHAINS

- 4.440** True point for the meander corner of the present right bank of the North Channel of the Green River, bank 4 feet high. The North Channel of the Green River is dried up with no water. Not monumented.
- 4.700** True point for the thread of the North Channel of the Green River. The North Channel of the Green River is dried up with no water. Not monumented.
- 5.141** True point for the meander corner of the present left bank of the North Channel of the Green River, bank 4 feet high. Not monumented.
- 5.333** Point selected for the witness corner to the meander corner of the present left bank of the North Channel of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:




Corner is located in small clearing above left bank.

Set a steel fence post next to monument.

- 8.324** Point selected for the witness corner to the meander corner of the present right bank of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:



SURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 7,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located north of dense thicket of cottonwood trees.

Set a steel fence post next to monument.

13.225

True point for the meander corner of the present right bank of the Green River. Not monumented.

Set a steel fence post to mark boundary.

Dependent Resurvey of the Subdivision of
Section 8 by the Three Mile Method,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

From the 1/4 section corner of sections 7 and 8.

East, on the E-W centerline of section 8.

20.000

Point for the C-W 1/16 section corner of section 8 at record bearing and distance. There is no remaining evidence of the original monument.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

W 1/16
C ————— C
S 8
2007

Corner is located in flood plain of Green River with scattered cottonwood trees.

Set a steel fence post next to monument.

32.428

True point for the meander corner of the present right bank of the Green River. Not monumented.

From the N 1/16 section corner of sections 7 and 8.

East, on the E-W centerline of the NW 1/4 of section 8.

DEPENDENT RESURVEY OF THE SUBDIVISION OF
SECTION 8 BY THE THREE MILE METHOD,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

20.000

Point for the NW 1/16 section corner of section 8 at record bearing and distance. There is no remaining evidence of the original monument.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR3E
NW 1 / S 8
16
2007

Corner is located in dense stands of cottonwood trees, with a significant number of downed trees from periodic flooding by the Green River.

Set a steel fence post next to monument.

23.243

Point selected for the witness corner to the meander corner of the present right bank of the Green River.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR3E
NW 1/16 WC /
C → MC
S 8
2007

Corner is located in dense thicket of Cottonwood trees.

Set a steel fence post next to monument.

23.480

True point for the meander corner of the present right bank of the Green River. Not monumented.

SURVEY OF A PORTION OF THE PRESENT MEANDERS OF THE MAIN
AND NORTH CHANNELS OF THE GREEN RIVER,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Survey of a Portion of the Present Meanders of the Main
and North Channels of the Green River,
T. 5 S., R. 3 E., Uintah Special Meridian, Utah

Reestablishment of the Surveys Executed by
D.G. Major in 1882, and A.H. & F.M. Brown in 1903

From the true point for the meander corner of the
right bank of the Green River, on the E-W centerline
of section 5.

Downstream with the meanders of the right bank of the
Green River, in section 5, along a well defined cut
bank, 6 to 10 feet high, through heavy timber.

S. 19°41.1' W., 2.07 chs.
S. 10°58.1' W., 5.43 chs.
S. 5°00.4' W., 9.48 chs.
S. 4°32.6' E., 3.65 chs.
S. 8°14.1' E., 6.24 chs. At end of course, thread of
North Channel of Green
River, 12 links wide.

Downstream with the thread of the North Channel of the
Green River, in section 5. The North Channel of the
Green River is dried up with no water.

S. 73°26.4' W., 0.80 chs.
N. 41°36.4' W., 3.18 chs.
N. 63°55.3' W., 2.69 chs.
S. 86°54.4' W., 3.60 chs.
S. 80°43.6' W., 0.99 chs. At end of course, true
point for the thread of the
stream of sections 5 and 6.

SURVEY OF A PORTION OF THE PRESENT MEANDERS OF THE MAIN
AND NORTH CHANNELS OF THE GREEN RIVER,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From the true point for the meander corner of the right bank of the Green River, on the E-W centerline of the N 1/2 of section 8.

Downstream with the meanders of the right bank of the Green River, in section 8, along a well defined cut bank, 2 to 10 feet high.

S. 19°36.7' E., 8.97 chs.

S. 29°37.4' E., 8.34 chs.

S. 23°36.8' E., 4.70 chs. True point for the meander corner on the E-W centerline of section 8.

S. 23°36.8' E., 2.38 chs.

S. 6°41.2' E., 11.71 chs.

S. 25°01.0' W., 7.74 chs.

S. 55°46.9' W., 8.34 chs.

S. 76°23.0' W., 6.98 chs.

S. 85°03.1' W., 7.74 chs.

N. 77°03.2' W., 11.09 chs.

N. 74°27.8' W., 1.50 chs. True point for the meander corner of sections 7 and 8.

Downstream with the meanders of the right bank of the Green River in Section 7, along a well defined cutbank, 2 to 10 feet high.

N. 74°04.7' W., 17.37 chs.

N. 76°37.0' W., 3.24 chs.

N. 75°18.6' W., 14.62 chs.

N. 72°05.5' W., 6.02 chs. At end of course, the true point for the meander corner on the N-S centerline of section 7.

From the point for the thread of the North Channel of the Green River, on the E-W centerline of the NE 1/4 of section 7.

SURVEY OF A PORTION OF THE PRESENT MEANDERS OF THE MAIN
AND NORTH CHANNELS OF THE GREEN RIVER,
T. 5 S., R. 3 E., UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Downstream with the thread of the North Channel of the Green River in section 7. The North Channel of the Green River is dried up with no water.

S. 34°14.5' W., 3.39 chs.

S. 36°26.9' W., 3.88 chs.

S. 29°57.5' W., 4.06 chs.

S. 45°01.5' W., 3.27 chs.

S. 25°15.4' W., 4.88 chs.

S. 33°28.8' W., 5.56 chs. True point for the thread of the North Channel of the Green River, on the E-W centerline of Section 7.

S. 44°03.5' W., 2.30 chs.

S. 54°53.5' W., 3.67 chs.

S. 72°01.4 W' ., 1.16 chs. At end of course, the true point for the thread of the stream on the N-S centerline of section 7.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Daniel Webb	Chief Cadastral Surveyor
Tyler Trujillo	Land Surveyor
Keith Batty	Land Surveyor
Glenn Hatch	Land Surveyor
Daniel Gillians	Survey Technician
Christopher May	Survey Technician

CERTIFICATE OF SURVEY

I, **Michael L. Thompson, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the **21st day of August, 2007**, I have **executed a dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, and the south boundary (First Standard Parallel South), in Township 4 South, Range 3 East. The dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, the west boundary, the subdivisional lines, the subdivision of sections 5, 6, 7, and 8 by the Three Mile Method, a portion of the meanders of the Main and North channels of the Green River, and the survey of a portion of the subdivision of sections 6 and 7, in Township 5 South, Range 3 East, of the Uintah Special Meridian, in the State of Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Jan 28, 2009

Date

Michael J. Thompson

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, and the south boundary (First Standard Parallel South), in Township 4 South, Range 3 East. The dependent resurvey of a portion of the southeast boundary of the Uintah Indian Reservation, the west boundary, the subdivisional lines, the subdivision of sections 5, 6, 7, and 8 by the Three Mile Method, a portion of the meanders of the Main and North channels of the Green River, and the survey of a portion of the subdivision of sections 6 and 7, in Township 5 South, Range 3 East, of the Uintah Special Meridian, in the State of Utah**, executed by **Michael L. Thompson, Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

February 13, 2009

Date

Daniel W. Webb

(Chief Cadastral Surveyor for Utah)