

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE SUBDIVISIONAL LINES,
AND
THE SUBDIVISION OF SECTIONS 21, 28, and 29,
IN

TOWNSHIP 32 SOUTH, RANGE 19 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

under the supervision of

Ronald K. Baugh
Supervisory Cadastral Surveyor

Under special instructions dated **February 20, 2008**, approved **February 20, 2008**, which provided for the surveys included under Group Number **1072**, and assignment instructions dated **February 20, 2008**.

Survey commenced **February 21, 2008**
Survey completed **June 9, 2008**

INDEX DIAGRAM

Township 32 South, Range 19 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16 9	15	14	13
19	20 8 12	21 5 7	22	23	24
30 11	29 6 10	28 3 5	27	26	25
31	32	33	34	35	36

The subdivision of section 21..... 13
 The subdivision of section 28..... 15
 The subdivision of section 29..... 17

TOWNSHIP 32 SOUTH, RANGE 19 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of sections 21, 28, and 29, in T. 32 S., R. 19 W., Salt Lake Meridian, Utah.

History of Surveys

Surveyed by	Retr. or Resurveyed by
SOUTH BOUNDARY	
All R. Gentry	1911
EAST BOUNDARY	
All R.E.L. Collier	1910
WEST BOUNDARY	
All R. Gentry	1911
NORTH BOUNDARY	
All R. Gentry	1911
SUBDIVISION	
All R. Gentry	1911

T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1072, dated February 20, 2008.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using GPS Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and their calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Cadastral Control Network was derived from GPS static observations, post processed by the National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS), ECHO ECHO_BRGN_NV1999 CORS ARP, FRED FREDONIA CORS ARP, MARYSVALE_UT2006 CORS ARP.

The geographic position of the corner of sections 27, 28, 33, and 34, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: 37°59'01.745" N. Longitude: 113°58'10.706" W. N.A.D. 83.
Elevation: 6713 feet, N.A.V.D. 1988.
Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 32 S., R. 19 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
R. Gentry in 1911

Beginning at the corner of sections 27, 28, 33, and 34,
determined from the original remaining 1911 bearing trees.

A juniper, 18 ins. diam., bears N. 28°15' E., 116 links
distance, scribed T32S R19W S27 BT, on a weathered open
blaze.

A juniper, 18 ins. diam., bears S. 25°50' W., 66 links
distance, scribed T32S R19W S33 BT, on a partially
healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, in a small mound of stone, with
aluminum cap marked:

T32SR19W			
S28	S27		
S33	S34		
2008			

The NW 1911 bearing tree, a juniper, down and dead, 16 ins.
diam., bears N. 40° W., with visible scribe marks, not
remeasured. (Record; N. 44° W.)

No remaining evidence of the SE 1911 bearing tree was found.

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set two steel fence posts alongside the aluminum post.

Corner falls in an east-west fence line, on flat ground.

From this corner, a disturbed iron post, 2 inches diameter,
projecting 28 inches above the ground and tied with steel wire
to the corner of fences projecting east and south, with brass
cap marked as described in the official record of the 1911
survey, bears S 89°31' W, 0.256 chains distance.

Due to monument being disturbed, remove the iron post from the
project area.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°01.8' W., between sections 27 and 28.

20.018 Point for the S 1/16 section corner of sections 27 and 28, not monumented.

40.036 The 1/4 section corner of sections 27 and 28, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the remaining 1911 bearing tree

A juniper, 12 ins. diam., bears S. 54°55' W., 96 links distance, with a healed blaze.

No remaining evidence of the SE 1911 bearing tree was found.

Corner falls 2.3 ft. north of a fence line extending east and west, on flat ground in sagebrush.

N. 0°00.4' W., beginning new measurement.

40.024 The corner of sections 21, 22, 27, and 28, monumented with an iron post, 2 inches diameter, broken off 8 inches below ground surface, in an embedded mound of stone, no remaining evidence of the brass cap was found.

From which the remaining 1911 bearing tree

A juniper, 16 ins. diam., bears S. 31°40' W., 150 links distance, scribed T32S R19W S28 BT, on an open blaze.

No remaining evidence of the NE, SE, and NW 1911 bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T32SR19W

S21|S22

S28|S27

2008

Deposit two magnets enclosed in plastic cases at the base of the aluminum post.

Set two steel fence posts alongside the aluminum post.

Corner falls in the intersection of dirt roads projecting north, south, and east, on flat ground.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. $0^{\circ}02.0'$ W., between sections 21 and 22.

40.012 Point for the 1/4 section corner of sections 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.

Set a Bathy brand T-iron, 24 inches long, driven 1 ft. below road surface.

from which new bearing trees

A juniper, 10 ins. diam., bears S. $49^{\circ}46'$ E., 125 links distance, scribed 1/4 S22 BT.

A juniper, 12 ins. diam., bears S. $88^{\circ}02'$ W., 167 links distance, scribed 1/4 S21 BT.

Deposit a magnet enclosed in a plastic case alongside the T-iron.

Corner falls in main dirt road, extending north and south.

80.024 The corner of sections 15, 16, 21, and 22, determined from the remaining original 1911 bearing tree.

A juniper, 16 ins. diam., bears N. $47^{\circ}30'$ W., 100 links distance, scribed T32S R19W S16 BT, on a partially healed blaze.

At the corner point

Set a Bathy brand T-iron, 24 inches long, driven 1 ft. below road surface.

No remaining evidence of the NE, SE, and SW 1911 bearing trees was found.

Deposit a magnet enclosed in a plastic case alongside the T-iron.

Corner falls in main dirt road extending north and south.

From the 1/4 section corner of sections 28 and 33, monumented with an iron post, 1 inch diameter, firmly set, projecting 15 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

The SW 1911 bearing tree, a juniper, 10 ins. diam., was found down and dead and rotting, scribed 1/4 S33 BT, not remeasured.

No remaining evidence of the NE 1911 bearing tree was found.

Set a steel fence post alongside the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner falls on the north side of a two-track dirt road extending east and west, on flat ground in scattering piñon and juniper growth.

S. $89^{\circ}59.5'$ W., between sections 28 and 33.

20.046 Point for the W 1/16 section corner of sections 28 and 33, not monumented.

40.092 The corner of sections 28, 29, 32, and 33, monumented with an iron post, 2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the remaining 1911 bearing tree

A juniper, 12 ins. diam., bears S. $24^{\circ}15'$ E., 46 links distance, with a burnt out blaze.

No remaining evidence of the NE, SW, and NW 1911 bearing trees was found.

Corner falls in corner of fences projecting south and west, on flat ground in juniper growth.

N. $0^{\circ}05.1'$ W., between sections 28 and 29.

19.991 Point for the S 1/16 section corner of sections 28 and 29, not monumented.

39.982 The 1/4 section corner of sections 28 and 29, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base to top of brass cap marked as described in the official record of the 1911 survey.

No remaining evidence of the 1911 bearing trees was found.

Found a steel fence post 1.5 ft. south of the iron post.

Corner falls on flat ground in old burn.

N. $0^{\circ}03.4'$ E., beginning new measurement.

20.015 Point for the N 1/16 section corner of sections 28 and 29, not monumented.

40.030 The corner of sections 20, 21, 28, and 29, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 3 ft. base to top of brass cap marked as described in the official record of the 1911 survey.

from which the 1911 bearing trees

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 7 ins. diam., bears N. 41°25' E., 82 links distance, with illegible marks on a burnt blaze. (Record; 98 links)

A juniper, 12 ins. diam., bears S. 43°55' W., 19 links distance, with illegible marks on a burnt blaze.

A juniper, 18 ins. diam., bears N. 28°55' W., 85 links distance, with illegible marks on a burnt blaze. (Record; 83 links)

No remaining evidence of the SE 1911 bearing tree was found.

Found a steel fence post alongside the iron post.

Corner falls at corner of fences projecting east and north, on flat ground in burn.

From the corner of sections 21, 22, 27, and 28.

S. 89°57.9' W., between sections 21 and 28.

40.056

The 1/4 section corner of sections 21 and 28, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the 1911 bearing trees

A juniper, 16 ins. diam., bears N. 63°50' E., 147 links distance, scribed 1/4 S21 BT, on a partially healed blaze.

A juniper, dead and standing, 12 ins. diam., bears S. 12°25' W., 87 links distance, with illegible scribe marks on an open blaze.

Raise a mound of stone, 3 ft. base to top of brass cap.

Corner falls on flat ground on north edge of old burn, in piñon and juniper growth.

S. 89°57.3' W., beginning new measurement.

20.018

Point for the W 1/16 section corner of sections 21 and 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

S21
W 1/16 —
S28
2008

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

40.036 The corner of sections 20, 21, 28, and 29.

N. 0°02.7' W., between sections 20 and 21.

20.009 Point for the S 1/16 section corner of sections 20 and 21, not monumented.

40.018 The 1/4 section corner of sections 20 and 21, monumented with an iron post, 1 inch diameter, firmly set, bent 90 degrees to ground, with brass cap missing. The iron post is broken off at 90 degree bend.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, over the iron post, still firmly set in the ground, with aluminum cap marked:

T32SR19W
1/4
S20|S21
2008

from which the remaining 1911 bearing tree

A cottonwood stump, 4 ft. high, 16 ins. diam., bears S 81°15' E., 162 links distance, with scribe marks visible on a partially healed blaze.

No remaining evidence of the NW 1911 bearing tree was found.

Set a steel fence post alongside the aluminum post.

Corner falls 4 ft. east of a fence line extending north and south, on flat ground in sagebrush and cottonwood growth.

From this corner, an unrecorded rebar, 5/8 inch diameter, with no cap attached, bears S. 86°39' W., 0.061 chains distance.

N. 0°02.4' W., beginning new measurement.

20.007 Point for the N 1/16 section corner of sections 20 and 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base to top of aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N 1/16
S20|S21
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in dense juniper growth.

From this corner, an unrecorded rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, bears, S. 79°00' W., 0.036 chains distance.

40.014 The corner of sections 16, 17, 20, and 21, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with the brass cap marked as described in the official record of the 1911 survey.

from which the remaining 1911 bearing tree

A juniper, 12 ins. diam., bears N. 17°50' W., 109 links distance, scribed T32S R19W S17 BT, on a partially healed blaze.

No remaining evidence of the NE, SE, and SW 1911 bearing trees was found.

Found a steel fence post alongside the iron post.

Corner falls next to the southeast corner of dirt roads extending north and east, on flat ground in piñon and juniper growth.

From the corner of sections 15, 16, 21 and 22.

S. 89°58.1' W., between sections 16 and 21.

39.930 The 1/4 section corner of sections 16 and 21, monumented with an iron post, 1 inch diameter, firmly set, bent, with the brass cap marked as described in the official record of the 1911 survey.

Straighten the iron post in place, and place a magnet enclosed in a plastic case at the base of the iron post.

There is no remaining evidence of the 1911 bearing trees

Raise a mound of stone 2 ft. base around the iron post.

Corner falls on north edge of dirt road extending east and west.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. $89^{\circ}57.7'$ W., beginning new measurement.

40.159 The corner of sections 16, 17, 20, and 21.

From the corner of sections 28, 29, 32, and 33.

S. $89^{\circ}52.3'$ W., between sections 29 and 32.

20.081 Point for the E 1/16 section corner of sections 29 and 32.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

S29
E 1/16 —
S32
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Corner falls in the corner of fences projecting north, east, and west, on flat ground in chaining.

40.162 The 1/4 section corner of sections 29 and 32, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with the brass cap marked as described in the official record of the 1911 survey.

from which the 1911 bearing trees

A juniper, 8 ins. diam., bears North, 15 links distance, with a burned out blaze. (Record; N. $40^{\circ}05'$ E., 17 links)

A piñon, burned and standing, bears S. $7^{\circ}15'$ W., 18 links distance, with scribe marks 1/4 S33 BT visible on a burnt blaze.

Corner falls on flat ground in old burn.

S. $89^{\circ}56.8'$ W., beginning new measurement.

39.727 The corner of sections 29, 30, 31, and 32, monumented with an iron post, 2 inches diameter, firmly set, projecting 3 inches above a mound of stone, 2 ft. base, with the brass cap marked as described in the official record of the 1911 survey.

from which the remaining 1911 bearing tree

A piñon, 20 ins. diam., bears N. $81^{\circ}35'$ W., 197 links distance, with a healed blaze.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The SE 1911 bearing tree, a piñon, down and dead, 14 ins., diam., scribed T32S R19W S32 BT, on an open blaze was not remeasured.

No remaining evidence of the NE or SW 1911 bearing trees was found.

Found a steel fence post alongside the iron post.

Corner falls on a gradual northwest slope in scattering piñon and juniper growth.

N. 0°07.0' W., between sections 29 and 30.

20.007 Point for the S 1/16 section corner of sections 29 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

S 1/16
S30|S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

40.014 The 1/4 section corner of sections 29 and 30, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with the brass cap marked as described in the official record of the 1911 survey.

from which the 1911 bearing trees

A juniper, 18 ins. diam., bears S. 22° E., 37 links distance, scribed 1/4 S29 BT, on an open blaze.

A juniper, 14 ins. diam., bears S. 50° W., 31 links distance, scribed 1/4 S30 BT, on an open blaze. (Record; S. 43°10' W.)

Set a steel fence post alongside the iron post.

Corner falls on flat ground in piñon and juniper growth.

N. 0°02.3' E., beginning new measurement.

20.056 Point for the N 1/16 section corner of sections 29 and 30, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

40.112 The corner of sections 19, 20, 29, and 30, determined from two of the 1911 bearing trees.

A juniper, 10 ins. diam., bears S. 50°20' E., 52 links distance, scribed T32S R19W S29 BT, on an open blaze.

A juniper, 16 ins. diam., bears S. 59°10' W., 51 links distance, scribed T32S R19W S30 BT, on a partially healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, in a small mound of stone to top of aluminum cap marked:

T32SR19W	
S19	S20
S30	S29
2008	

from which (the field notes erroneously stated the distances of the remaining 1911 bearing trees.)

A juniper, 10 ins. diam., bears N. 62°05' E., 118 links distance, scribed T32S R19W S20 BT, on an open blaze. (Record; 127 links)

A juniper, 16 ins. diam., bears N. 62°25' W., 127 links distance, with a healed blaze. (Record; 52 links)

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat open ground.

From the corner of sections 20, 21, 28, and 29.

S. 89°57.7' W., between sections 20 and 29.

19.977 Point for the E 1/16 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a small mound of stone, with aluminum cap marked:

S20	
E 1/16	—
S29	
2008	

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

- 39.954** The 1/4 section corner of sections 20 and 29, monumented with an iron post, firmly set, projecting 10 inches above a mound of stone, with the brass cap marked as described in the official record of the 1911 survey.

from which the 1911 bearing trees

A juniper, 14 ins. diam., bears S. 14°45' W., 59 links distance, scribed 1/4 S29 BT, on a partially healed blaze.

A juniper, 12 ins. diam., bears N. 13°50' W., 25 links distance, scribed 1/4 S20 BT, on a partially healed blaze.

Corner falls on flat ground in piñon and juniper growth.

N. 89°58.8' W., beginning new measurement.

- 19.977** Point for the W 1/16 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 2 ft. base to top of aluminum cap marked:

S20
W 1/16 —
S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual east slope in dense piñon and juniper growth.

- 39.954** The corner of sections 19, 20, 29, and 30.

Subdivision of Section 21,
T. 32 S., R. 19 W., Salt Lake Meridian, Utah

SUBDIVISION OF SECTION 21,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 21 and 28.

N. 0°03.1' E., along the N - S centerline of section 21.

20.005 Point for the center S 1/16 section corner of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

C
S 1/16|S21
C
2008

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

40.010 Point for the center 1/4 section corner, at intersection with
the E - W centerline of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,
24 inches in the ground, with aluminum cap marked:

T32SR19W
C 1/4
S21
2008

Deposit a magnet enclosed in a plastic case at the base of the
aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in juniper growth.

60.018 Point for the center N 1/16 section corner of section 21, not
monumented.

80.026 The 1/4 section corner of sections 16 and 21.

From the 1/4 section corner of sections 21 and 22.

S. 89°57.8' W., along the E - W centerline of section 21.

39.993 The center 1/4 section corner of section 21.

60.043 Point for the center W 1/16 section corner of section 21, not
monumented.

80.093 The 1/4 section corner of sections 20 and 21.

SUBDIVISION OF SECTION 21,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the W 1/16 section corner of sections 21 and 28.

N. 0°00.2' E., along the N - S centerline of the SW 1/4 of section 21.

20.007 Point for the SW 1/16 section corner, at intersection with the E - W centerline of the SW 1/4 of section 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SW 1/16
S21
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

40.014 The point for the center W 1/16 section corner of section 21.

From the center S 1/16 section corner of section 21.

S. 89°57.5' W., along the E - W centerline of the SW 1/4 of section 21.

20.034 The SW 1/16 section corner of section 21.

40.068 The point for the S 1/16 section corner of sections 20 and 21.

From the point for the center N 1/16 section corner of section 21.

S. 89°57.8' W., along the E - W centerline of the NW 1/4 of section 21.

40.129 The N 1/16 section corner of sections 20 and 21.

Subdivision of Section 28,
T. 32 S., R. 19 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 28 and 33.

N. 0°02.9' W., along the N - S centerline of section 28.

20.004 Point for the center S 1/16 section corner of section 28, not monumented.

SUBDIVISION OF SECTION 28,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS
40.008

Point for the center 1/4 section corner, at intersection with the E - W centerline of section 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T32SR19W
C 1/4
S28
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls 1 ft. north of a fence line, extending east and west, on flat ground.

80.039 The 1/4 section corner of sections 21 and 28.

From the 1/4 section corner of sections 27 and 28.

S. 89°57.3' W., along the E - W centerline of section 28.

40.031 The center 1/4 section corner of section 28.

60.088 Point for the center W 1/16 section corner of section 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

W 1/16
C — C
S28
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls N. 60° E., 1.5 ft. from corner of fences projecting east and south, on flat ground.

From this corner, an unrecorded rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, bears N. 77°00' W., 0.044 chains distance.

80.145 The 1/4 section corner of sections 28 and 29.

SUBDIVISION OF SECTION 28,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the point for the W 1/16 section corner of sections 28 and 33.

N. 0°04.0' W., along the N - S centerline of the SW 1/4 of section 28.

19.998 Point for the SW 1/16 section corner, at intersection with the E - W centerline of the SW 1/4 of section 28, not monumented.

39.996 The center W 1/16 section corner of section 28.

From the point for the center S 1/16 section corner of section 28.

S. 89°59.4' W., along the E - W centerline of the SW 1/4 of section 28.

20.051 The point for the SW 1/16 section corner of section 28.

40.102 The point for the S 1/16 section corner of sections 28 and 29.

Subdivision of Section 29,
T. 32 S., R. 19 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 29 and 32.

N. 0°07.7' E., along the N - S centerline of section 29.

20.013 Point for the center S 1/16 section corner of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked:

C
S 1/16 | S29
C
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

40.026 Point for the center 1/4 section corner, at intersection with the E - W centerline of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SUBDIVISION OF SECTION 29,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T32SR19W
C 1/4
S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in chaining.

From this corner, a nail, flush with ground, with a steel fence post alongside, bears S. 63°00' E., 0.126 chains distance.

60.052 Point for the center N 1/16 section corner of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

C
N 1/16 | S29
C
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground in old burn.

80.078 The 1/4 section corner of sections 20 and 29.

From the 1/4 section corner of sections 28 and 29.

S. 89°55.9' W., along the E - W centerline of section 29.

20.004 Point for the center E 1/16 section corner of section 29, not monumented.

40.008 The center 1/4 section corner of section 29.

59.955 Point for the center W 1/16 section corner of section 29, not monumented.

79.902 The 1/4 section corner of sections 29 and 30.

From the point for the center E 1/16 section corner of section 29.

N. 0°05.6' E., along the N - S centerline of the NE 1/4 of section 29.

SUBDIVISION OF SECTION 29,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

20.021 Point for the NE 1/16 section corner, at intersection with the E - W centerline of the NE 1/4 of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

NE 1/16
S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on flat ground at edge of chaining.

40.042 The E 1/16 section corner of section 20 and 29.

From the point for the N 1/16 section corner of sections 28 and 29.

S. 89°56.8' W., along the E - W centerline of the NE 1/4 of section 29.

19.990 The NE 1/16 section corner of section 29.

39.980 The center N 1/16 section corner of section 29.

From the E 1/16 section corner of sections 29 and 32.

N. 0°01.3' E., along the N - S centerline of the SE 1/4 of section 29.

20.002 Point for the SE 1/16 section corner, at intersection with the E - W centerline of the SE 1/4 of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SE 1/16
S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls S. 52° W., 6 ft. from corner of fences projecting east and south, on flat ground.

SUBDIVISION OF SECTION 29,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From this corner, an unrecorded rebar, 5/8 inch diameter, firmly set, projecting 4 inches above the ground, bears N. 77°34' E., 0.174 chains distance.

40.004 The point for the center E 1/16 section corner of section 29.

From the point for the S 1/16 section corner of sections 28 and 29.

S. 89°54.1' W., along the E - W centerline of the SE 1/4 of section 29.

20.042 The SE 1/16 section corner of section 29.

40.084 The center S 1/16 section corner of section 29.

From the center S 1/16 section corner of section 29.

S. 89°56.4' W., along the E - W centerline of the SW 1/4 of section 29.

39.811 The S 1/16 section corner of sections 29 and 30.

From the point for the center W 1/16 section corner of section 29.

N 0°05.0' E., along the N - S centerline of the NW 1/4 of section 29.

20.041 Point for the NW 1/16 section corner, at intersection with the E - W centerline of the NW 1/4 of section 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base to top of aluminum cap marked:

NW 1/16
S29
2008

Deposit a magnet enclosed in a plastic case at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest slope in dense piñon and juniper growth.

40.082 The W 1/16 section corner of sections 20 and 29.

SUBDIVISION OF SECTION 29,
T. 32 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the center N 1/16 section corner of section 29.

S. $89^{\circ}58.5'$ W., along the E - W centerline of the NW 1/4 of section 29.

19.962 The NW 1/16 section corner of section 29.

39.924 The point for the N 1/16 section corner of sections 29 and 30.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

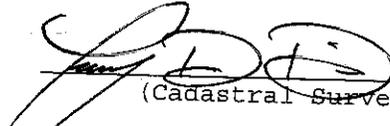
Name	Capacity
Quade Johnson	Survey Technician

CERTIFICATE OF SURVEY

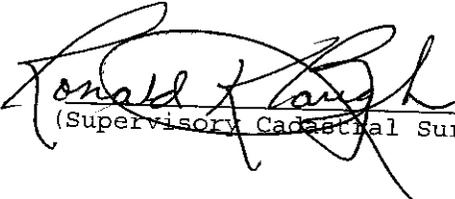
I, *Jeremy D. Davis*, Cadastral Surveyor, under the supervision of *Ronald K. Baugh*, Supervisory Cadastral Surveyor hereby certify upon honor that, in pursuance of Special Instructions bearing the date *20th day of February, 2008*, I have executed a *dependent resurvey* of a portion of the *subdivisional lines*, and the subdivision of sections 21, 28, and 29, in Township 32 South, Range 19 West,

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 1, 2009
Date


(Cadastral Surveyor)

April 1, 2009
Date


(Supervisory Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the *dependent resurvey* of a portion of the *subdivisional lines*, and the subdivision of sections 21, 28, and 29, in Township 32 South, Range 19 West, Salt Lake Meridian, Utah,

executed by *Jeremy D. Davis*, Cadastral Surveyor, under the supervision of *Ronald K. Baugh*, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

June 17, 2009
Date


(Chief Cadastral Surveyor for Utah)