

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE WEST AND NORTH BOUNDARIES,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 5, 6, 7, 9, 17, 18 AND 20,

IN

TOWNSHIP 9 SOUTH, RANGE 22 EAST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Ronald K. Batty
Survey Technician

Under the supervision of

Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated and approved **June 19, 2008**, which provided for the surveys included under Group No. **1074**, and Assignment Instructions dated **June 19, 2008**.

Survey Commenced **July 3, 2008**
Survey Completed **December 5, 2008**

INDEX DIAGRAM

Township 9 South, Range 22 East

5	4				
6	21 5	12 4	3	2	1
20	19	11			
3 7	18 8	10 9	10	11	12
17	16	9			
18	15 17	8 16	15	14	13
15	14	8			
19	13 20	7 21	22	23	24
		6			
30	29	28	27	26	25
31	32	33	34	35	36

The subdivision of Section 5..... Page 22
 The subdivision of Section 6.....Page 23
 The subdivision of Section 7.....Page 27
 The subdivision of Section 9.....Page 30
 The subdivision of Section 17.....Page 32
 The subdivision of Section 18.....Page 34
 The subdivision of Section 20.....Page 35

TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5, 6, 7, 9, 17, 18 and 20, in Township 9 South, Range 22 East, Salt Lake Meridian, Utah.

History of Earlier Surveys

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY			
All	D. G. Major	1882	
All			A.R. Talamantes & H.D. Heist 1904
All			J.L. Thomas, et al. 1977
EAST BOUNDARY			
All	D. G. Major	1882	
All			A.R. Talamantes & H.D. Heist 1904
All			J.L. Thomas, et al. 1977
WEST BOUNDARY			
All	D.G. Major	1882	
All			A.R. Talamantes & H.D. Heist 1904
Portion			J.L. Thomas, et al. 1977
Portion			M.R. Workman & R.K. Batty 2006
NORTH BOUNDARY			
All	D. G. Major	1882	
All			A.R. Talamantes & H.D. Heist 1904
All			C. P. Sylvester 1967
Portion			M.R. Workman & R.K. Batty 2006
SUBDIVISION			
All	D. G. Major	1882	
All			A.R. Talamantes & H.D. Heist 1904
Portion			J.L. Thomas, et al. 1977

TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1074, dated June 19, 2008.

The directions of the lines were determined by references to the true meridians, established by the Global Positioning System (GPS) utilizing Real-time Kinematics (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the Standards and Guidelines for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for the project calculations.

Preliminary to the resurvey, the lines of the original surveys were retraced and a diligent search was made for any evidence of the original field note record. The retracement data were thoroughly verified and only the true line notes are given herein.

Geodetic control was derived from Global Positioning System (GPS) static observations, post processed by National Geodetic Survey, Online Positioning User Service, the NAD83 (CORS96) geographic position, determined by direct RTK methods of the section corner of sections 4, 5, 8 and 9, is as follows:

Latitude: 40°03'28.044" N. Longitude: 109°27'15.935" W.
N.A.D. 1983, Network Accuracy=0.200 meters at 95 % confidence.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the West Boundary,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by D. G. Major in 1882,
and the Resurveys Executed by A. R. Talamantes & H. D. Heist
in 1904, and M.R. Workman & R.K. Batty in 2006.

Beginning at the 1/4 section corner of sections 7 and 12, on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 2 inches above a mound of stone, 2 feet base, 1/2 foot high, with aluminum cap marked as described in the official record of the 2006 resurvey.

Corner is located in the middle of a wide draw draining east.

N. 0°02.9' W., between sections 7 and 12 on the west boundary of the township.

20.034 Point for the N 1/16 section corner of sections 7 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 8 inches in the ground to solid rock, in a mound of stone, 4 feet base to top, with aluminum cap marked:

T9S
R21E N1/16 R22E
S12 | S7
2008

Set a T-post alongside the corner.

Corner is located on the northern edge of a small drainage, draining east.

40.068 The corner of sections 1, 6, 7 and 12, monumented with an aluminum post, 2 1/2 inches in diameter, firmly set, projecting 1 inch above the ground, with aluminum cap marked as described in the official record of the 2006 resurvey.

Corner is located on northwest facing, gentle slope. A two-track road bearing east and west is approximately 20 feet north of corner.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the North Boundary,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by D. G. Major in 1882,
and the Resurveys Executed by A. R. Talamantes & H. D. Heist in
1904, and C. P. Sylvester, et al. in 1968.

From the corner of sections 4, 5, 32 and 33, on the north
boundary of the township, monumented with an iron post, 2 1/2
inches in diameter, firmly set, projecting 8 inches above the
ground, with brass cap marked as described in the official record
of the 1967 resurvey.

Corner is located on flat sandy ground. The centerline of a road
bearing northeast and southwest is approximately 150 feet
southwest of the corner.

N. 89°38.3' W., between sections 5 and 32 on the north boundary
of the township.

- 39.693** The 1/4 section corner of sections 5 and 32, monumented with an
iron post, 2 1/2 inches in diameter, firmly set, projecting 6
inches above the ground, with brass cap marked as described in
the official record of the 1967 resurvey.

Corner is located on flat, sandy ground, at the intersection of
fences bearing south and east. Corner is also the northwest
corner of the enclosure containing evaporation ponds.

N. 89°38.1' W., beginning new measurement.

- 20.132** Point for the W 1/16 section corner of sections 5 and 32.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over
a magnet, 27 inches in the ground with aluminum cap marked:

T8SR22E
S32
W1/16 —————
S5
T9S
2008

Set a steel T-post alongside.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on flat sandy ground, surrounded by sparse greasewood.

- 40.264** The corner of sections 5, 6, 31 and 32, monumented with an iron post, 2 1/2 inches diameter, firmly set, flush with the ground, with brass cap marked as described in the official record of the 1967 resurvey.

Corner is located on flat ground. A galvanized steel post, 2 1/2 inches in diameter, is 1 1/2 feet west of corner.

Reestablishment of the Survey Executed by D.G. Major in 1982,
and the Resurveys Executed by A.R. Talamantes & H.D. Heist
in 1904, C.P. Sylvester et al. in 1968,
and M.R. Workman & R.K. Batty in 2006.

N. 89°41.9' W., between sections 6 and 31.

- 19.956** Point for the E 1/16 section corner of sections 6 and 31, on the north boundary of the township.

Set an aluminum post 30 inches long, 2 1/2 inches in diameter, over a magnet, 24 inches in the ground to solid rock, with cap marked.

	T8SR22E
	S31
E1/16	—————
	S6
	T9S
	2008

A steel fence post in a PVC pipe is 2 feet east of corner.

Corner is located on flat, open ground. A road bearing northwest and southeast is 250 feet east of corner.

- 39.912** The 1/4 section corner of sections 6 and 31, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 1 inch above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

Corner is located on flat open ground. A steel T-post is 1 foot east of the corner.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Reestablishment of the Survey Executed by D. G. Major in 1882,
and the Resurveys Executed by A. R. Talamantes & H. D. Heist in
1904, J.L. Thomas et al. in 1977.

From the corner of sections 21, 22, 27 and 28, monumented with an
iron post, 2 1/2 inch diameter, firmly set, projecting 14 inches
above the ground, with the brass cap marked as described in the
official record of the 1977 resurvey.

Corner is located on the west edge of a road bearing northeast
and southwest, in a fence line bearing north and southeast. The
intersection of a fence bearing north, south, and west is 15 feet
north of corner.

N. 89°53.8' W., between sections 21 and 28.

- 40.115 Point for the 1/4 section corner of sections 21 and 28 at
proportionate distance; there is no remaining evidence of the
original corner. This corner was never remonumented in 1977.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
S21
1/4 —————
S28
2008

Set a T-post alongside the corner.

Corner is located on sandy ground in the White River bottoms.

- 42.416 Point for the witness corner of 1/4 section corner of sections 21
and 28, at proportionate distance, there is no remaining evidence
of the original witness corner. Not remonumented.

- 80.230 The corner of sections 20, 21, 28 and 29, monumented with an iron
post, 2 1/2 inches in diameter, firmly set, projecting 6 inches
above the ground, with brass cap marked as described in the
official record of the 1977 resurvey.

Corner is located in an east and west fence on the southeast edge
of the top of a hill. A mound of stone, 3 feet base, 1 foot
high, is west of corner.

Reestablishment of the Survey Executed by D.G. Major in 1882, and
the Resurveys Executed by A.R. Talamantes & H.D. Heist in 1904.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 1°53.3' W., between sections 20 and 21.

- 38.506** The 1/4 section corner of sections 20 and 21, monumented with a sandstone, 23 x 13 x 3 inches (record; 24 x 8 x 3 inches), marked 1/4 on west face, loosely set, with a 5/8 inch rebar with Uintah Engineering and Land Surveying aluminum cap set alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E		
1/4		
S20		S21
2008		

Deposit the marked stone and rebar alongside the corner.

Set a T-post alongside the corner.

Corner is located on a gentle, southwest facing slope on the north edge of the White River bottoms.

N. 1°57.2' E., beginning new measurement.

- 41.478** The corner of sections 16, 17, 20 and 21, monumented with a sandstone, 18 x 8 x 6 inches (record; 20 x 8 x 6 inches), 4 notches on the east side, 3 notches on the south side, loosely set, in a mound of stone, 2 feet base, 1 1/2 feet high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inch diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E		
S17		S16
S20		S21
2008		

Deposit the marked stone and set a T-post alongside corner.

Corner is located on gentle northeast facing slope.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of section 15, 16, 21 and 22, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1977 resurvey.

Corner is located on a small rise, in a north and south fence, on the west edge of an oil drilling pad. A mound of stone, 2 feet base, 1/2 feet high, is west of corner.

N. 89°52.5' W., between sections 16 and 21.

- 39.816 The 1/4 section corner of sections 16 and 21, monumented with a sandstone, 12 x 8 x 5 inches (record; 16 x 6 x 5 inches), 1/4 marked on north side, loosely set in a mound of stone, 2 feet base, 1 foot high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 12 inches in the ground to solid rock, in a mound of stone, 3 feet base to top, with aluminum cap marked:

T9SR22E
S16
1/4 —————
S21
2008

Deposit the marked stone alongside corner.

Corner is located in the bottoms of a small hollow draining northwest.

S. 89°57.4' W., beginning new measurement.

- 40.369 The corner of sections 16, 17, 20, and 21.

N. 0°05.2' W., between sections 16 and 17.

- 40.042 Point for the 1/4 section corner of sections 16 and 17, at proportionate distance, falls within the Questar Gas Mon. Stagecoach project, which was constructed within the year before this survey was executed; corner was either removed or destroyed at the time. There is no remaining evidence of the original corner. Not monumented.

- 60.063 Point for the N 1/16 section corner of sections 16 and 17.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

	N1/16	
S17		S16
	2008	

Corner is located on the north edge of a dirt road running
between the Questar Fidlar Station and the Bridge Compressor
Station. The southeast fence corner of Bridge Compressor Station
is 17 inches north. The northwest fence corner of Questar Fidlar
station is 25 feet south.

- 80.084** The corner of sections 8, 9, 16 and 17, monumented with a 5/8
inch rebar with aluminum cap marked: "UE Land Survey NJM 138391"
No other evidence remains, and is accepted as the best available
evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 27 inches in the ground, with aluminum cap marked:

	T9SR22E	
S8		S9
S17		S16
	2008	

A T-post is 4 inches southwest of corner.

Deposit the rebar alongside the corner.

Corner is located in a small hollow, on the north edge of a
retention wall.

From the corner of sections 9, 10, 15 and 16, monumented with an
iron post, 2 1/2 inches in diameter, firmly set, projecting 4
inches from a mound of stone, 4 feet base, with brass cap marked
as described in the official record of the 1977 resurvey.

Corner is located on a steep east facing slope, in a north and
south fence. A road bearing east and west is 150 feet south of
corner.

N. 89°52.4' W., between sections 9 and 16.

- 40.089** The 1/4 section corner of sections 9 and 16, monumented with a
trachyte, 24 x 8 x 4 inches (record; 14 x 10 x 5 inches), firmly
set, dimly marked 1/4 on N face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
S9
1/4 ———
S16
2008

Corner is located on a southwest facing slope. A road bearing
southwest is 15 feet south of corner.

S. 89°48.0' W., beginning new measurement.

40.166 The corner of sections 8, 9, 16 and 17.

N. 0°01.0' E., between sections 8 and 9.

20.063 Point for the south 1/16 section corner of sections 8 and 9.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 25 inches in the ground, with aluminum cap marked:

S1/16
S8 | S9
2008

Set a T-post alongside the corner.

Corner is located on flat, barren ground. The centerline of an
oil access road is 510 feet south of corner. County Road #3620
(Glen Bench Road) is 460 feet west of corner.

40.126 The 1/4 section corner of sections 8 and 9, monumented with a 5/8
inch rebar, and is accepted as the best available evidence of the
original corner position.

At the corner point

Set aluminum post, 30 inches long, 2 1/2 inches in diameter, over
a magnet, 26 inches in the ground with aluminum cap marked:

T9SR22E
1/4
S8 | S9
2008

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a T-post alongside the corner.

Corner is located on flat sandy ground with a fence bearing north and south approximately 2 feet east of corner.

N. 0°01.4' E., beginning new measurement.

- 40.130** The corner of sections 4, 5, 8 and 9, monumented with a copper weld, 19 inches long, 1/2 inches in diameter, projecting 4 inches above the ground, with copper cap marked: "Uintah County Surveyor." This position is harmoniously related to existing corners and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E	
S5	S4
S8	S9
2008	

Deposit the copper weld alongside the corner.

Corner is located on flat ground. A fence intersection, bearing east and west is 16 inches southeast of corner.

From the corner of sections 3, 4, 9 and 10, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 1 inch above the ground, with a brass cap marked as described in the official record of the 1977 resurvey.

Corner is located on a northeast facing slope in a north and south fence line.

S. 89°58.7' W., between sections 4 and 9.

- 40.015** The 1/4 section corner of sections 4 and 9, monumented with a 1/2 inch rebar with cap, and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

T9SR22E
S4
1/4 ———
S9
2008

Deposit the rebar alongside the corner.

Corner is located on a gentle, sandy slope facing south. A fence intersection is 10 inches southwest of corner, fence bears south and west.

S. 89°58.9' W., beginning new measurement.

40.025 The corner of sections 4, 5, 8 and 9.

N. 0°01.2' E., between sections 4 and 5.

40.144 The 1/4 section corner of sections 4 and 5, monumented with a copper weld, 19 inches long, 1/2 inch diameter, projecting 4 inches above the ground, with copper cap marked: "Uintah County Surveyor." This position is harmoniously related to existing corners and is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
1/4
S5 | S4
2008

Deposit the copper weld alongside the corner.

Corner is located on flat ground. A T-post is 40 inches north of corner. A fence intersection, bearing north and west, is 12 feet northwest of corner.

N. 0°01.3' W., beginning new measurement.

40.635 The corner of sections 4, 5, 32 and 33, on the north boundary of the township, hereinbefore described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 19, 20, 29 and 30, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 2 inches above a mound of stone 3 feet base, 2 feet high, with brass cap marked as described in the official record of the 1977 resurvey.

Corner is located in an east and west fence. The intersection of a road bearing east and west is 45 feet north of corner.

N. 0°03.7' W., between sections 19 and 20.

- 40.096 The 1/4 section corner of sections 19 and 20, monumented with a sandstone, 20 X 6 X 6, marked 1/4 on the west face, loosely set, with a mound of stone, 2 foot base, 1 foot high, on the east side of corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over an X on solid rock, over a magnet, 2 inches in the ground, in a mound of stone, 4 foot base, 2 feet high, with cap marked:

T9SR22E
1/4
S19 | S20
2008

Set the original stone alongside at the base of the mound of stone.

Corner is located on the top of a small mesa.

N. 0°01.0' W., beginning new measurement.

- 39.929 The corner of sections 17, 18, 19, and 20, monumented with a trachyte, 18 x 10 x 5 inches, loosely set in a mound of stones.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
S18 | S17
S19 | S20
2008

Deposit the marked stone alongside the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on the north edge of a drainage descending west, at the base of a steep, rocky, south facing.

From the corner of sections 16, 17, 20 and 21.

N. 89°55.3' W., between sections 17 and 20.

20.058 Point for the E 1/16 section corner of sections 17 and 20.

Set an aluminum post, 20 inches long, 2 1/2 inches in diameter, over a magnet, 8 inches in the ground to solid rock, in a mound of stone, 4 feet base to top, with cap marked:

S17
E1/16 ———
S20
2008

Set a T-post alongside the corner.

Corner is located on flat ground. The centerline of a road bearing northwest and southeast is 298 feet east of corner.

36.945 Point selected for the witness corner to the 1/4 section corner of sections 17 and 20.

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, over a magnet, flush with sandstone, cemented into a drill hole in solid rock marked:

WC
S17
1/4 <———
S20
2008

Witness corner is located on a sandstone ledge, bearing north and south, the right bank of the White River is 20 feet west of corner.

40.116 Point for the 1/4 section corner of sections 17 and 20, at proportionate distance, falls in the middle of the White River. There is no remaining evidence of the original corner and appears to have been washed out.

60.174 Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 9 inches in the ground to solid rock, in a mound of stone, 3 feet base to top, with cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

S17
W1/16

 S20
2008

Corner is located on a south facing slope.

80.232 The corner of sections 17, 18, 19 and 20.

S. 89°50.3' W., between sections 18 and 19.

40.007 The 1/4 section corner of sections 18 and 19, monumented with a 1/2 inch diameter rebar, firmly set, in the center of a scattered mound of stone, and is accepted as the best available evidence of the original corner position.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, over a magnet, flush with sandstone, cemented into a drill hole on solid rock marked:

T9SR22E
S18
1/4

 S19
2008

Built a mound of stone, 3 feet base, 1 foot high, north of corner.

Corner is located on gentle north facing slope on a sandstone rock face. The centerline of Glen Bench Road (County Road #3620) is 154 feet north of corner.

S. 89°52.3' W., beginning new measurement.

33.788 The corner of sections 13, 18, 19 and 24, on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches diameter, projecting 6 inches above ground with an aluminum cap marked as described in the official record of the 2006 resurvey.

From the corner of sections 17, 18, 19 and 20.

N. 0°02.7' W., between sections 17 and 18.

40.013 Point for the 1/4 section corner of sections 17 and 18, at proportionate distance, there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
26 inches in the ground, over a magnet, with aluminum cap marked:

T9SR22E
1/4
S18 | S17
2008

Set a T-post alongside the corner.

- 80.026** The corner of sections 7, 8, 17 and 18, monumented with a
trachyte 18 x 9 x 4 inches, firmly set, 4 notches on the south
side, 5 notches on the east side, a 5/8 inch rebar set alongside.

At the corner point

Set an aluminum post 30 inches long, 2 1/2 inches in diameter,
over a magnet, 24 inches in the ground, with aluminum cap marked:

T9SR22E
S7 | S8
S18 | S17
2008

Deposit the marked stone and rebar alongside the corner.

Corner is located on flat, sandy ground.

From the corner of sections 8, 9, 16 and 17.

N. 89°57.8'W., between sections 8 and 17.

- 40.078** The 1/4 section corner of sections 8 and 17, monumented with a
sandstone, 20 x 9 x 7 inches (record; 18 x 10 x 6 inches), firmly
set, marked 1/4 on the north face, projecting 2 inches above the
ground.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
S8
1/4 ———
S17
2008

Deposit the marked stone alongside the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a T-post alongside the corner.

Corner is located in a small hollow, on the south edge of an oil access road.

N. 89°57.7' W., beginning new measurement.

20.039 Point for the W 1/16 section corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

S8
W1/16 ———
S17
2008

Set a T-post alongside the corner.

Corner is located in a small hollow; oil well access road is approximately 40 feet south of corner.

40.078 The corner of sections 7, 8, 17 and 18.

S. 89°55.5' W., between sections 7 and 18.

20.037 Point for the E 1/16 corner of sections 7 and 18,

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 24 inches in the ground, with aluminum cap marked:

S7
E1/16 ———
S18
2008

Set a T-post alongside the corner.

Corner is located on gentle west facing slope.

40.074 Point for the 1/4 section corner of section 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet 26 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

T9SR22E
S7
1/4 ———
S18
2008

Set a T-post alongside the corner.

Corner is located on flat sandy ground in the White River bottoms.

- 73.827** The corner of sections 7, 12, 13 and 18, on the west boundary of the township, monumented with an aluminum post 2 1/2 inches diameter, projecting 4 inches above a mound of stone, 5 feet base, 2 feet high, with an aluminum cap marked as described in the official record of the 2006 resurvey.

From the corner of sections 7, 8, 17 and 18.

N. 0°02.9' W., between sections 7 and 8.

- 20.054** Point for the S 1/16 section corner of sections 7 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 40 inches in the ground, with top of cap 10 inches below ground, with aluminum cap marked:

S1/16
S7 | S8
2008

Corner is located in a dirt road bearing northwest and southwest, the east edge of the road is approximately 7 feet east of corner.

A gas pipeline bearing east and west is 4 1/2 feet north of corner.

- 40.108** The 1/4 sections corner of sections 7 and 8, monumented with a sandstone, 17 x 5 x 5 inches (record; 18 x 10 x 6 inches), firmly set, dimly marked 1/4 on W face

At the corner point

Set and aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
1/4
S7 | S8
2008

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit the marked stone alongside the corner.

Set T-post alongside the corner.

Corner is located on the south edge of Coyote Wash near the northern base of a low hill.

N. 0°03.9' W., beginning new measurement.

19.979 Point for the N 1/16 section corner of sections 7 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

N1/16		
S7		S8
2008		

Set a T-post alongside the corner.

Corner is located on flat ground surrounded by sparse greasewood and sagebrush.

39.958 The corner of sections 5, 6, 7, and 8, monumented with a sandstone, 12 x 12 x 3 inches (record; 24 x 12 x 3 inches), dimly marked, loosely set, with a 5/8 inch rebar set alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 25 inches in the ground, with aluminum cap marked:

T9SR22E		
S6		S5
S7		S8
2008		

Deposit the marked stone and rebar alongside the corner.

Set T-post alongside the corner.

Corner is located on flat sandy ground.

From the corner of sections 4, 5, 8 and 9.

S. 89°54.0' W., between sections 5 and 8.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.123** Point for the 1/4 section corner of sections 5 and 8 at proportionate distance; there is no remaining evidence of the original corner.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, over a magnet, flush with sandstone and cemented into a drill hole on solid rock marked:

T9SR22E
S5
1/4 ———
S8
2008

Corner is located on a south facing slope.

from this corner

A 1/2 inch steel rod bears S. 12°39.4' E., 0.221 chains distance.

- 80.246** The corner of sections 5, 6, 7 and 8.

S. 89°58.8' W., between sections 6 and 7.

- 20.051** Point for the E 1/16 section corner of sections 6 and 7.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

S6
E1/16 ———
S7
2008

Set a T-post alongside the corner.

Corner is located on flat, sandy ground.

- 40.102** Point for the 1/4 section corner of section 6 and 7, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
S6
1/4 ———
S7
2008

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a T-post alongside the corner.

Corner is located on flat ground, surrounded by sage brush. A fence line bearing north and south is 6 feet east of corner.

- 60.153 Point for the W 1/16 section corner of sections 6 and 7. Not monumented.
- 73.797 The corner of sections 1, 6, 7 and 12, on the west boundary of the township, hereinbefore described.

From the corner of sections 5, 6, 7 and 8.

N. 0°11.5' E., between sections 5 and 6.

- 40.072 Point for the 1/4 section corner of sections 5 and 6, at proportionate distance; there is no evidence remaining of the original corner. Point falls in the center of County Road #3310 (Watson Road).

Set a PK nail.

from which

An aluminum post 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, for a reference monument, bears N. 45°39.0' E., 69.7 links distance, with aluminum cap marked S5 RM 46.02 2008, and an arrow pointing to the true corner point.

An aluminum post 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, for a reference monument, bears N. 43°30.1' W., 79.7 links distance with aluminum cap marked S6 RM 52.63 2008, and an arrow pointing to the true corner point,.

Set T-posts alongside reference monuments.

- 60.108 Point for the N 1/16 section corners of sections 5 and 6.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with cap marked:

N1/16
S6 | S5
2008

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 81.426 The corner of sections 5, 6, 31, and 32 on the north boundary of the township, hereinbefore described.

The Subdivision of Section 5,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 5 and 8.

N. 0°17.8' E., on the N-S centerline of section 5.

- 40.109 Point for the center 1/4 section corner of section 5, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T9SR22E
C1/4 S5
2008

Corner is located on a small rise.

A fence intersection, bearing north and east, is 28 inches northwest of the corner.

- 60.132 Point for the center N 1/16 section corner of section 5.

Set an aluminum post 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

C
N1/16 | S5
C
2008

Set a steel fence post alongside the corner.

Corner is located on a low sandy hill. A fence bearing north and south is 21 inches east of corner.

- 81.101 The 1/4 section corner of sections 5 and 32 on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 4 and 5.

S. 89°50.9' W., on the E-W centerline of section 5.

THE SUBDIVISION OF SECTION 5,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

39.924 The center 1/4 section corner of section 5.

60.020 Point for the center W 1/16 section corner of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

W1/16
C-----C
S5
2008

Set a T-post alongside the corner.

Corner is located on flat ground draining northwest. County Road
3310 (Watson Road) is 185 feet south of corner.

80.116 The 1/4 section corner of sections 5 and 6.

From the center W 1/16 section corner of section 5.

N. 0°14.6' E., on the N-S centerline of the NW 1/4 of section 5.

20.030 Point for the NW 1/16 section corner of section 5, at the
intersection with the E-W centerline of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap marked:

NW1/16 S5
2008

Corner is located on flat ground.

41.173 The W 1/16 section corner of sections 5 and 32 on the north
boundary of the township, hereinbefore described.

From the center N 1/16 section corner of section 5.

S. 89°52.0' W., on the E-W centerline of the NW 1/4 of section 5.

20.114 The NW 1/16 section corner of section 5.

40.228 The N 1/16 section corner of sections 5 and 6.

The Subdivision of Section 6,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

THE SUBDIVISION OF SECTION 6,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 6 and 7.

N. 0°19.1' E., on the N-S centerline of section 6.

20.039 Point for the center S 1/16 section corner of section 6.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

C
S1/16 | S6
C
2008

Set T-post alongside the corner.

Corner is located in flat ground in the White River flood plain, A fence bearing north-south is 6 feet east of the corner.

40.078 Point for the center 1/4 section corner of section 6, at the intersection with the E-W centerline of the section.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 24 inches in the ground, with aluminum cap marked:

T9SR22E
C1/4 S6
2008

Set a T-post alongside the corner.

Corner is located on flat ground. A fence bearing north and south is 6.1 feet east of the corner. County Road #3310 (Watson Road) is approximately 180 feet north of corner.

60.137 Point for the center N 1/16 section corner of section 6. Not monumented.

81.650 The 1/4 section corner of sections 6 and 31 on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 5 and 6.

S. 89°59.3' W., on the E-W centerline of section 6.

20.004 Point for the center E 1/16 section corner of section 6.

THE SUBDIVISION OF SECTION 6,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

E1/16
C-----C
S6
2008

Set a T-post alongside the corner.

Corner is located on flat ground. County Road #3310 (Watson Road) is approximately 165 feet south of corner.

40.008 The center 1/4 section corner of section 6.

60.073 Point for the center W 1/16 section corner of section 6.

Set aluminum post, 30 inches long, 2 1/2 inches in diameter, over magnet, 26 inches in the ground, with aluminum cap marked:

W1/16
C-----C
S6
2008

Set a T-post alongside the corner.

Corner is located on the White River bottoms in copse of trees.

73.896 The 1/4 section corner of sections 1 and 6 on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches in diameter, firmly set, projecting 7 inches above the ground, with aluminum cap marked as described in the official record of the 2006 resurvey.

Corner is located on flat ground, surrounded by dense greasewood.

A T-post is 2 feet north of corner.

From the center E 1/16 section corner of section 6.

N. 0°15.3' E., on the N-S centerline of NE 1/4 of section 6.

20.048 Point for the NE 1/16 section corner of section 6, at the intersection with the E-W centerline of the NE 1/4.

THE SUBDIVISION OF SECTION 6,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 18 inches in the ground to bed rock, in a mound of stone, 2 feet base to top, with aluminum cap marked:

NE1/16 S6
2008

Corner is located on steep north facing slope of a spur descending east.

- 41.463 The E 1/16 section corner of sections 6 and 31 on the north boundary of the township, hereinbefore described.
-

From the N 1/16 section corner of sections 5 and 6.

N. 89°58.7' W., on the E-W centerline of the NE 1/4 of section 6.

- 19.981 The NE 1/16 corner of section 6.

- 39.962 The point for the center N 1/16 section corner of section 6.
-

From the E 1/16 section corner of sections 6 and 7.

N. 0°15.3' E., on the N-S centerline of the SE 1/4 of section 6.

- 40.075 The center E 1/16 section corner of section 6.
-

From the point for the W 1/16 section corner of sections 6 and 7.

N. 0°17.7' E., on the N-S centerline of the SW 1/4 of section 6.

- 20.040 Point for the SW 1/16 section corner of section 6, at the intersection with the E-W centerline of the SW 1/4 of section 6.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

SW1/16 S6
2008

Set a T-post alongside the corner.

Corner is located on flat ground, surrounded by sagebrush and tamarack.

THE SUBDIVISION OF SECTION 6,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

40.081 The center W 1/16 section corner of section 6.

From the center S 1/16 section corner of section 6.

S. 89°59.0' W., on the E-W centerline of the SW 1/4 of section 6.

20.058 The SW 1/16 section corner of section 6.

33.792 The S 1/16 section corner of sections 1 and 6 on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of the 2006 resurvey.

Corner is located on a gentle north facing slope. The left bank of the White River is approximately 100 feet north of the corner.

From the center W 1/16 section corner of section 6.

N. 0°20.1' E., on the N-S centerline of the NW 1/4 of section 6.

41.640 The W 1/16 section corner of section 31, T. 8 S., R. 22 E., monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 2006 resurvey.

This corner is also the W 1/16 section corner of section 6, which was established by the 1882 survey as a common corner.

Corner is located on flat ground, surrounded by sparse greasewood.

The Subdivision of Section 7,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 7 and 18.

N. 0°04.9' W., on the N-S centerline of section 7.

20.043 Point for the center S 1/16 section corner of section 7.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with cap marked:

THE SUBDIVISION OF SECTION 7,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

C
S1/16 | S7
C
2008

Set a T-post alongside the corner.

Corner is located on flat, sandy ground on a western edge of a low rise.

- 40.086** Point for the center 1/4 section corner of section 7, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with an aluminum cap marked:

T9SR22E
C1/4 S7
2008

Set a T-Post alongside the corner.

Corner is located in the center of Coyote Wash, surrounded by dense tamarack, greasewood, and sagebrush.

- 60.095** Point for the center N 1/16 section corner of section 7.

Set aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

C
N1/16 | S7
C
2008

Set a T-post alongside the corner.

Corner is located on flat sandy ground, surrounded by sagebrush and sparse cottonwoods.

- 80.104** The 1/4 section corner of sections 6 and 7.

From the 1/4 section corner of sections 7 and 8.

S. 89°53.6' W., on the E-W centerline of section 7.

THE SUBDIVISION OF SECTION 7,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

20.047 Point for the center E 1/16 section corner of section 7.

Set aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with cap marked:

$$\begin{array}{c} \text{E1/16} \\ \text{C} \text{-----} \text{C} \\ \text{S7} \\ \text{2008} \end{array}$$

Set a T-post alongside the corner.

Corner is located in the middle of Coyote Wash. A road bearing
northwest and southeast is 500 feet west of corner.

40.094 The center 1/4 section corner of section 7.

73.816 The 1/4 section corner of sections 7 and 12 on the west boundary
of the township, hereinbefore described.

From the center E 1/16 section corner of section 7.

N. 0°04.4' W., on the N-S centerline of the NE 1/4 of section 7.

19.994 Point for the NE 1/16 section corner of section 7, at the
intersection with the E-W centerline of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 28 inches in the ground, with aluminum cap
marked:

$$\begin{array}{c} \text{NE1/16 S7} \\ \text{2008} \end{array}$$

Set a T-post alongside the corner.

Corner is located on a gentle, south facing slope.

39.988 The E 1/16 section corner of sections 6 and 7.

From the N 1/16 section corner of sections 7 and 8.

S. 89°56.2' W., on the E-W centerline of the NE 1/4 of
section 7.

20.049 The NE 1/16 section corner of section 7.

40.098 The center N 1/16 section corner of section 7.

THE SUBDIVISION OF SECTION 7,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the E 1/16 section corner of sections 7 and 18.

N. 0°03.9' W., on the N-S centerline of the SE 1/4 of section 7.

- 20.048 Point for the SE 1/16 section corner of section 7, at the intersection with the E-W centerline of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with cap marked:

SE1/16 S7
2008

Set a T-post alongside the corner.

Corner is located on flat, sandy ground, sloping west.

- 40.096 The center E 1/16 section corner of section 7.
-

From the S 1/16 section corner of sections 7 and 8.

S. 89°54.6' W., on the E-W centerline in the SE 1/4 of section 7.

- 20.042 The SE 1/16 section corner of section 7.

- 40.084 The center S 1/16 section corner of section 7.
-

From the center N 1/16 section corner of section 7.

S. 89°56.2' W., on the E-W centerline of the NW 1/4 of section 7.

- 33.709 The N 1/16 section corner of sections 7 and 12 on the west boundary of the township, hereinbefore described.
-

The Subdivision of Section 9,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 9 and 16.

N. 0°04.5' W., on the N-S centerline of section 9.

- 20.003 Point for the center S 1/16 of section 9.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 8 inches in the ground, in a mound of stone 3 feet base to top, with cap marked:

THE SUBDIVISION OF SECTION 9,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

C
S1/16 | S9
C
2008

Set a T-post alongside the corner.

Corner is located on a small knoll. A gas well is approximately 350 feet northwest of corner.

- 40.006** Point for the center 1/4 section corner of section 9, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with an aluminum cap marked:

T9SR22E
C1/4 S9
2008

Set a T-Post alongside the corner.

Corner is located on flat ground, surrounded by sparse greasewood.

- 80.128** The 1/4 section corner of sections 4 and 9.
-

From the 1/4 section corner of sections 9 and 10, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1977 resurvey.

Corner is located on flat ground surrounded by greasewood, in a north and south fence. A cattle guard in a county road is approximately 460 feet north of corner.

S. 89°58.3' W., on the E-W centerline of section 9.

- 40.055** The center 1/4 section corner of section 9.

- 80.153** The 1/4 section corner of sections 8 and 9.
-

From the center S 1/16 section corner of section 9.

S. 89°53.1' W., on the E-W centerline of the SW 1/4 of section 9.

- 40.132** The S 1/16 section corner of sections 8 and 9.

THE SUBDIVISION OF SECTION 17,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 17,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the true point for the 1/4 section corner of sections 17
and 20.

N. 0°04.0' W., on the N-S centerline of section 17.

- 40.027** Point for the center 1/4 section corner of section 17, at the
intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 24 inches in the ground, with an aluminum cap
marked:

T9SR22E
C1/4 S17
2008

Set a T-Post alongside the corner.

Corner is located on a north facing slope.

- 60.040** Point for the center N 1/16 section corner of section 17.

Set aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap
marked:

C
N1/16 | S17
C
2008

Set a T-post alongside the corner.

Corner is located in the bottoms of the White River.

- 80.053** The 1/4 section corner of sections 8 and 17.

From the point for the 1/4 section corner of sections 16 and 17.

N. 89°56.5' W., on the E-W centerline of section 17.

- 20.048** Point for the center E 1/16 section corner of section 17.

THE SUBDIVISION OF SECTION 17,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

E1/16
C————C
S17
2008

Set a T-post alongside the corner.

Corner is located in the White River bottoms, surrounded by greasewood and sparse cottonwoods, A two track road bearing southeast and northwest is 110 feet west of the corner. The centerline of Glen Bench Road (County Road #3620) is approximately 435 feet west of corner.

40.096 The center 1/4 section corner of section 17.

60.144 Point for the center W 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

W1/16
C————C
S17
2008

Set a T-Post alongside the corner.

Corner is located in the bottoms of the White River, surrounded by thick tamarack.

80.192 The 1/4 section corner of sections 17 and 18.

From the N 1/16 section corner of sections 16 and 17.

N. 89°57.2' W., on the E-W centerline of the NE 1/4 of section 17.

40.087 The center N 1/16 section corner of section 17.

From the E 1/16 section corner of sections 17 and 20.

N. 0°04.6' W., on the N-S centerline of the SE 1/4 of section 7.

40.035 The center E 1/16 section corner of section 17.

THE SUBDIVISION OF SECTION 17,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the W 1/16 section corner of sections 17 and 20.

N. 0°03.3' W., on the N-S centerline of the SW 1/4 of section 17.

40.020 The center W 1/16 section corner of section 17.

N. 0°03.3' W., on the N-S centerline of the NW 1/4 of section 17.

40.020 The W 1/16 section corner of sections 8 and 17.

The Subdivision of Section 18,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of section 18 and 19.

N. 0°06.1' W., on the N-S centerline of section 18.

39.975 Point for the center 1/4 section corner of section 18, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 8 inches in the ground to solid rock, in a mound of stone, 4 feet base to top, with aluminum cap marked:

T9SR22E
C1/4 S18
2008

Set a T-post alongside the corner.

Corner is located on a steep south facing slope; an oil access road is approximately 30 feet southeast.

80.086 The 1/4 section corner of sections 7 and 18.

From the 1/4 section corner of sections 17 and 18.

S. 89°47.0' W., on the E-W centerline of section 18.

20.020 Point for the center E 1/16 section corner of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter, over a magnet, 16 inches in the ground to solid rock, in a mound of stone, 2 feet base to top, with aluminum cap marked:

THE SUBDIVISION OF SECTION 18,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

E1/16
C—————C
S18
2008

Set a T-post alongside the corner.

Corner is located on an east facing slope of a draw draining northeast.

- 40.040** The center 1/4 section corner of section 18.
- 73.904** The 1/4 section corner of sections 13 and 18, on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches in diameter, projecting 6 inches above the ground, firmly set, with aluminum cap marked as described in the official record of the 2006 resurvey.

Corner is located on flat ground. A dirt road, bearing northwest and southeast is approximately 290 feet east of corner. A dirt road, bearing east and west is approximately 320 feet north of corner.

From the center E 1/16 section corner of section 18.

N. 0°04.4' W., on the N-S centerline in the NE 1/4 of section 18.

- 40.062** The E 1/16 section corner of sections 7 and 18.

The Subdivision of Section 20,
T. 9 S., R. 22 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 20 and 29, monumented with an iron post, 2 1/2 inches in diameter, firmly set, projecting 10 inches above a mound of stone 4 feet base, 2 feet high, with brass cap marked as described in the official record of the 1977 resurvey.

Corner is located in an east and west fence at the top of a steep west facing slope.

N. 0°02.6' E., on the N-S centerline of section 20.

- 39.270** Point for the center 1/4 section corner of section 20, at the intersection with the E-W centerline, falls in the center of the White River. Not monumented.

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

79.976 The true point for the 1/4 section corner of sections 17 and 20.

From the 1/4 section corner of sections 20 and 21.

N. 88°48.7' W., on the east-west centerline of section 20.

19.372 Point for the center E 1/16 section corner of section 20.

Set aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 28 inches in the ground, with aluminum cap
marked:

$$\begin{array}{c} \text{E1/16} \\ \text{C} \text{-----} \text{C} \\ \text{S20} \\ \text{2008} \end{array}$$

Set a T-post alongside the corner.

Corner is located on a gentle, sandy slope facing south, in the
White River bottoms.

38.744 Point for the center 1/4 section corner of section 20.

58.786 Point for the center W 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches in diameter,
over a magnet, 26 inches in the ground, with aluminum cap
marked:

$$\begin{array}{c} \text{W1/16} \\ \text{C} \text{-----} \text{C} \\ \text{S20} \\ \text{2008} \end{array}$$

Set a steel fence post alongside.

Corner is located on a gentle, south facing slope of a ridge
bearing east and west.

78.828 The 1/4 section corner of sections 19 and 20.

From the center E 1/16 section corner of section 20.

N. 1°00.5' E., on the N-S centerline of the NE 1/4 of
section 20.

41.086 The E 1/16 section corner of sections 17 and 20.

THE SUBDIVISION OF SECTION 20,
TOWNSHIP 9 SOUTH, RANGE 22 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the center W 1/16 section corner of section 20.

N. 0°00.8' E., on the N-S centerline of the NW 1/4 of
section 20.

40.317 The W 1/16 section corner of sections 17 and 20.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

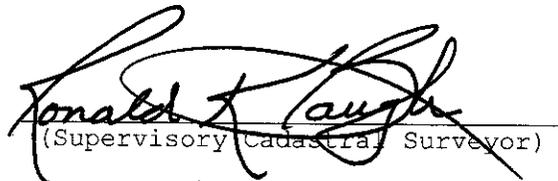
FIELD ASSISTANTS

Name	Capacity
Michael Thompson	Cadastral Surveyor
Daniel Gillins	Cadastral Surveyor
Matthew Gillins	Survey Technician
Christopher May	Survey Technician

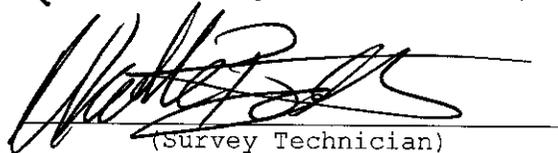
CERTIFICATE OF SURVEY

We, **Ronald K. Baugh, Supervisory Cadastral Surveyor**, and **Ronald K. Batty, Survey Technician**, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing the date of the **19th day of June, 2008**, have **executed a dependent resurvey of a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5, 6, 7, 9, 17, 18 and, 20 in T. 9 S., R. 22 E., of the Salt Lake meridian, in the State of Utah**, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Sept. 10, 2009
Date


(Supervisory Cadastral Surveyor)

Sept. 8, 2009
Date

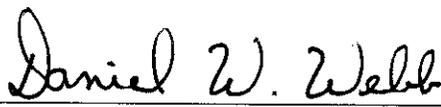

(Survey Technician)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5, 6, 7, 9, 17, 18 and 20, in T. 9 S., R. 22 E., Salt Lake Meridian, Utah**, executed by **Ronald K. Baugh, Supervisory Cadastral Surveyor** and **Ronald K. Batty, Survey Technician**, having been critically examined and found correct, are hereby approved.

September 17, 2009
Date


(Chief Cadastral Surveyor for Utah)