

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY

(GREEN RIVER GUIDE MERIDIAN),

A PORTION OF THE SOUTH BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS 19, 30 AND 31,

AND THE METES AND BOUNDS SURVEY OF THE CEMETERY,

IN

**TOWNSHIP 11 SOUTH, RANGE 21 EAST**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

**Ronald K. Batty,**  
**Survey Technician,**

Under the supervision of

**Ronald K. Baugh,**  
**Supervisory Cadastral Surveyor**

Under Special Instructions dated and approved **May 30, 2008**, which provided for the surveys included under Group Number **1075**, and assignment instructions dated **May 30, 2008**.

Survey Commenced **June 10, 2008**  
Survey Completed **July 24, 2008**

## INDEX DIAGRAM

Township 11 South, Range 21 East

6	5	4	3	2	1
7	8	9	10	11	12
18 <i>11</i>	17	16	15	14	13
<i>3</i> 19 <i>11</i> <i>10</i>	20	21	22	23	24
<i>4</i> 30 <i>10</i> <i>9</i>	29	28	27	26	25
<i>6</i> 31 <i>9</i> <i>8</i>	32	33	34	35	36

The Subdivision of Section 19.....Page 12  
 The Subdivision of Section 30.....Page 14  
 The Subdivision of Section 31.....Page 16  
 Metes and Bounds Survey of the Cemetery.....Page 16

## TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the west boundary (Green River Guide Meridian), a portion of the south boundary, a portion of the subdivisional lines, the subdivision of sections 19, 30 and 31, and the metes and bounds survey of the cemetery, in Township 11 South, Range 21 East, Salt Lake Meridian, Utah.

**History of Earlier Surveys**

	<b>Surveyed by</b>		<b>Retr. or Resurveyed by</b>	
<b>SOUTH BOUNDARY</b>				
All	Nelson and Hodges	1923		
<b>EAST BOUNDARY</b>				
All	A. Nelson	1923		
<b>WEST BOUNDARY (Green River Guide Meridian)</b>				
All	D.G. Major	1881		
All			S.P. & J.R. Stewart	1901
Portion			Nelson and Hodges	1923
<b>NORTH BOUNDARY (Second Standard Parallel South)</b>				
Portion	A.D. Ferron	1879		
All	D. G. Major	1881	D. G. Major	1881
Portion			J.L. Thomas	1977
<b>SUBDIVISION</b>				
All	Nelson and Hodges	1923		

## TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special instructions for Group No. 1075, dated May 30, 2008.

The direction of the lines was determined by references to true meridians, established by the Global Positioning System (GPS), utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using GPS Methods*. Trimble model 5700 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and their calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations of the corner of sections 17, 18, 19 and 20, T. 11 S., R. 21 E.; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); WANSHP\_UT2004 CORS ARP, MYTON 1 CORS ARP and RIFLE\_GCL\_CO2006 CORS ARP. The geographic position of the section corner of sections 17, 18, 19 and 20, is as follows:

Latitude: 39°51'11.722" N.                      Longitude: 109°36'02.162 W.  
N.A.D. 1983, Network Accuracy = 0.100 meters at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
 (GREEN RIVER GUIDE MERIDIAN),  
 TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a portion of the West Boundary  
 (Green River Guide Meridian),  
 T. 11 S., R. 21 E., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by D. G. Major in 1881, and the Dependent Resurveys Executed by S.P. and J.R. Stewart in 1901, and A. Nelson and R.W. Hodges in 1923.

Beginning at the corner of sections 13, 18, 19 and 24, on the west boundary of the township, monumented with a sandstone 20X9X4 inches (record: limestone 22X10X6 inches), firmly set, projecting 14 inches from the ground, marked with 3 grooves on the south face and 3 notches on the north face. A mound of stone, 3 ft. base, 2 ft. high, is north of corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 24 inches in the ground, with aluminum cap marked:

T11S	
R20E	R21E
S13	S18
S24	S19
2008	

Bury the marked stone alongside the aluminum post.

Corner is located on a northwest facing slope, surrounded by sparse sagebrush.

S. 0°02.0' W. between sections 19 and 24.

**39.890** Point for the 1/4 section corner of sections 19 and 24, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T11S	
R20E 1/4	R21E
S24	S19
2008	

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
 (GREEN RIVER GUIDE MERIDIAN),  
 TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a T-post alongside the aluminum post.

Corner is located on the east edge of a field. A fence bearing north and south is 20 feet east. A road, bearing north and south, is approximately 350 feet east of the corner.

59.835 Point for the S 1/16 section corner of sections 19 and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T11S  
 R20E S1/16 R21E  
 S24 | S19  
 2008

Set a T-post alongside the aluminum post.

Corner is located on flat terrain, surrounded by greasewood and sagebrush. A fence intersection bearing north, south, west, and southwest is 4 feet northeast of the corner.

79.780 The corner of sections 19, 24, 25 and 30, monumented with a decayed limestone, 24X9X3 inches(record, 60X9X5 inches), dimly marked with 2 notches on the south edge, 4 notches on north edge, firmly set, projecting 5 inches above the ground.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T11S  
 R20E | R21E  
 S24 | S19  
 S25 | S30  
 2008

Bury the marked stone and set a T-post alongside the aluminum post.

Corner is located in flat sandy area surrounded by sagebrush and greasewood, in the remnants of a fence extending north and south. A two track road is approximately 400 feet west of the corner.

---

S. 0°00.1'E., between sections 25 and 30.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
(GREEN RIVER GUIDE MERIDIAN),  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

**20.023** Point for the N 1/16 section corner of sections 25 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

T11S  
N1/16  
R20E | R21E  
S25 | S30  
2008

Set a T-post alongside the aluminum post.

Corner is located on flat, sandy ground, surrounded by dense greasewood. A two-track road, bearing northwest and southeast, is approximately 80 feet west of the corner.

**40.046** The 1/4 section corner of sections 25 and 30, monumented with a limestone, 30X5X4 inches (record, 36X6X6 inches), marked 1/4 on west face, loosely set, with mound of stone, 3 ft. base, 1 ft. high, west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 14 inches in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

T11S  
R20E 1/4 R21E  
S25 | S30  
2008

Bury the marked stone alongside the aluminum post

Corner is located on the northern edge of a small rise. A two track road, bearing north and south, is approximately 500 feet east of the corner.

---

**S. 0°01.6'W.**, beginning new measurement.

**39.914** The corner of sections 25, 30, 31 and 36, monumented with a mound of stone, with a T-post set in the center. No evidence remains of the original stone reset in 1923.

At the corner point (center of mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the round, in a mound of stone, 2 ft. base to top, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
 (GREEN RIVER GUIDE MERIDIAN),  
 TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T11S  
 R20E R21E  
S25 | S30  
S36 | S31  
 2008

Set a T-post alongside the aluminum post.

Corner is located at the northern edge of the top of a ridge bearing northeast and southwest.

S.0°00.1'W., between sections 36 and 31.

- 40.007 Point for the 1/4 section corner of sections 31 and 36, at proportionate distance; there is no remaining evidence of the original corner

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 24 inches in the ground, in a mound of stone, 2 feet base to top, with aluminum cap marked:

T11S  
 R20E 1/4 R21E  
 S36 | S31  
 2008

Set a T-Post alongside the aluminum post.

Corner is located on a slope facing southeast

- 80.014 Point for the corner of Tps. 11 and 12 S. Rs. 20 and 21 E., at proportionate distance; there is no remaining evidence of the original corner position. The original stone was found hanging upside down in a fence line, 25 feet to the north.

Set an aluminum post 30 inches long, 2 1/2 inches diameter, over a magnet, 23 inches in the ground, with aluminum cap marked:

T11S  
 R20E R21E  
S36 | S31  
S1 | S6  
 T12S  
 2008

Identifying marks were destroyed on original stone and left in fence line.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
 (GREEN RIVER GUIDE MERIDIAN),  
 TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on west facing slope.

From this corner

The 1/4 section corner of sections 1 and 36, on the south boundary of T. 11 S., R. 20 E., monumented with a limestone, 21X4X3 inches (record: 20X5X4 inches), dimly marked, loosely set, with a mound of stone, 2 ft. base, 1 ft. high, on the north side of corner, bears S89°56.8'W., 39.919 chains distance.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, over a magnet, in a mound of stone, 2 ft. base, 6 inches high, with aluminum cap marked:

T11SR20E  
 S36  
 1/4—  
 S1  
 T12S  
 2008

Bury the marked stone and set a T-post alongside the aluminum post.

Corner is located on a west edge of a hollow, draining north.

From this same corner

The 1/4 section corner of sections 7 and 12, on the east boundary of the T. 12 S., R. 20 E., monumented with a limestone, 18X9X8 inches, firmly set, projecting 5 inches above the ground, dimly marked 1/4 on the west face, a scattered mound of stone is on the west side of corner, bears S. 0°05.3'W., 120.021 chains distance.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground, over a magnet, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with aluminum cap marked:

T12S  
 R20E 1/4 R21E  
 S12 | S7  
 2008

Bury the marked stone and set a T-post alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
 (GREEN RIVER GUIDE MERIDIAN),  
 TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on a steep, northeast facing slope.

The intervening corners were searched for and not found.

Dependent Resurvey of a portion of the South Boundary,  
 T. 11 S., R. 21 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by  
 A. Nelson and R.W. Hodges in 1923.

From the corner of sections 5, 6, 31 and 32, on the south boundary of the township, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above a mound of stone, 5 ft. base, 2 1/2 ft. high, with brass cap marked as described in the official record of the 1923 survey.

Set a T-post alongside iron post.

Corner is located on a clay spur, running northwest and southeast.

S. 89°55.3'W., between sections 6 and 31.

**39.953** The 1/4 section corner of section 6 and 31, monumented with an iron post, 1 inch diameter, firmly set, projecting 20 inches above the ground in a mound of stone, 3 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1923 survey.

Corner is located on west facing slope, the center line of a road bearing southwest and northeast is 103 feet southwest of the corner.

S. 89°59.4' W., beginning new measurement.

**19.960** Point for the W 1/16 section corner of sections 6 and 31.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 23 inches in the ground, with aluminum cap marked:

T11SR21E  
 S31  
 W1/16 ———  
 S6  
 T12S  
 2008

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a T-Post alongside the aluminum post.

Corner is located in the middle of a field.

- 36.077** The corner of Tps. 11 and 12 S., Rs. 20 and 21 E.,  
hereinbefore described.

---

Dependent Resurvey of a portion of the Subdivisional Lines,  
T. 11 S., R. 21 E., Salt Lake Meridian

---

Reestablishment of the Survey Executed by  
A. Nelson and R.W. Hodges in 1923.

---

From the corner of sections 5, 6, 31 and 32, on the south  
boundary of the township.

**N.0°04.7'W.**, between sections 31 and 32.

- 40.006** The 1/4 section corner of sections 31 and 32, monumented with  
an iron post, 1 inch diameter, firmly set, projecting 4  
inches above the ground, with brass cap marked as described  
in the official record of the 1923 survey.

A mound of stone, 2 ft base, 1 1/2 ft. high, is west of the  
corner.

Set a T-post alongside the iron post.

Corner is located on a gentle north slope of the south edge  
of a draw bearing east-west.

---

**N.0°04.6'W.**, beginning new measurement.

- 39.961** The corner of sections 29, 30, 31 and 32, monumented with an  
iron post, 2 inches diameter, firmly set, projecting 10  
inches above the ground, with brass cap marked as described  
in the official record of the 1923 survey.

Set a T-post alongside the iron post.

A mound of stone, 4 ft. base, 1 ft. high is north of the  
corner.

Corner is located on a north facing slope of a ridge bearing  
east and west.

---

**S.89°59.8'W.**, between sections 30 and 31.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH.  
CHAINS

- 40.008** The 1/4 section corner of section 30 and 31, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1923 survey.

Corner is located near the bottom of a small draw. A mound of stone, 1 ft base, 6 inches high is west of the corner. A road bearing north and south is 500 feet west of the corner.

---

**S. 89°58.9'W.**, beginning new measurement.

- 35.896** The corner of sections 25, 30, 31 and 36, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 29, 30, 31 and 32.

**N. 0°04.6'W.**, between sections 29 and 30.

- 39.999** The 1/4 section corner of sections 29 and 30, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above a mound of stone, 5 ft. base, 2 ft. high, with brass cap marked as described in the official record of the 1923 survey.

Set a T-post alongside the iron post.

Corner is located on a south facing slope of a ridge running southwest and northeast.

---

**N. 0°05.1'W.**, beginning new measurement.

- 39.835** The corner of sections 19, 20, 29 and 30, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1923 survey.

Corner is located on a west facing slope of a ridge, approximately 15 feet from the top.

---

**N. 89°57.7'W.**, between sections 19 and 30,

- 39.946** The 1/4 section corner of section 19 and 30, monumented with an iron post, 1 inch diameter, firmly set, projecting 20 inches above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1923 survey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on a south facing slope of a ridge descending southwest. The top of a ridge is approximately 35 feet north of the corner.

---

**N.89°51.7'W.**, beginning new measurement.

- 19.996** Point for the W 1/16 section corner of sections 19 and 30 falls in Willow Creek Road.

Set a 16 penny nail, 6 inches below the surface of the road.

Impractical to set reference monuments.

Corner is located on the eastern edge of Willow Creek Road, bearing north-south.

- 35.813** The corner of sections 19, 24, 25 and 30, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 19, 20, 29 and 30.

**N.0°05.3'W.**, between sections 19 and 20.

- 40.022** The 1/4 section corner of section 19 and 20, monumented with an iron post, 1 inch diameter, firmly set, projecting 24 inches above the ground, in a mound of stone, 2 ft. base, 2 ft. high, with brass cap marked as described in the official record of the 1923 survey.

Corner is located in small hollow, surrounded by sage brush.

---

**N.0°04.0'W.**, beginning new measurement

- 40.046** The corner of sections 17, 18, 19 and 20, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above a mound of stone 4 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1923 survey.

Corner is located on gentle west facing slope, a road bearing northwest and southeast is approximately 150 feet east of corner.

---

**S.89°54.6'W.**, between sections 18 and 19.

- 40.031** The 1/4 section corner of sections 18 and 19, monumented with an iron post, 1 inch diameter, firmly set, projecting 18 inches above a mound of stone, 3 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1923 survey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH.  
CHAINS

Corner is located on west facing slope, a gulch draining north is approximately 50 feet west of corner. The top of a rocky spur is approximately 45 feet east of the corner.

---

S.89°49.4'W., beginning new measurement

- 35.558 The corner of sections 13, 18, 19 and 24, on the west boundary of the township, hereinbefore described.

---

The Subdivision of Section 19,  
T. 11 S., R. 21 E., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 19 and 30.

N.0°08.7'W., on the N-S center line of section 19.

- 19.993 Point for the center S 1/16 section corner of section 19.

Set a railroad spike

from which

An aluminum post, 30 inches long, 2 1/2 inch diameter, set over a magnet, 24 inches in the ground, for reference monument, bears S.19°49.0'E., 44.7 links distance, with aluminum cap marked S1/16 S19 RM 2008 29.5 ft. and an arrow pointing to the corner.

Set a T-Post alongside the aluminum post.

- 39.986 Point for the C 1/4 section corner of section 19, at the intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 3 inches in the ground to bedrock, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

T11SR21E  
C1/4 S19  
2008

Set a T-post alongside the aluminum post.

Corner is located on a southwest facing slope.

- 79.978 The 1/4 section corner of sections 18 and 19.

---

From the 1/4 section corner of sections 19 and 20.

THE SUBDIVISION OF SECTION 19,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

## CHAINS

S. 89°59.2'W., on E-W center line of section 19.

39.981 The C 1/4 section corner of section 19.

59.962 Point for the center W 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 10 inches in the ground to bedrock, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

W1/16  
C—————C  
S19  
2008

Set a T-post alongside the aluminum post.

Corner is located on the northwest facing slope of a draw draining southwest.

75.667 The 1/4 section corner of sections 19 and 24, on the west boundary of the township, hereinbefore described.

From the W 1/16 section corner of sections 19 and 30.

N.0°07.5'W., on the N-S center line of the SW 1/4 of section 19.

19.966 Point for the SW 1/16 section corner of section 19 at the intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 16 inches in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

SW 1/16 S19  
2008

Set a T-post alongside the aluminum post.

Corner is set on a north facing slope.

39.932 The center W 1/16 section corner of section 19.

From the center S 1/16 section corner of section 19.

N. 89°56.3'W., on the E-W center line of the SW 1/4 of section 19.

THE SUBDIVISION OF SECTION 19,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 19.989** The SW 1/16 corner of section 19.
- 30.750** The S 1/16 section corner of sections 19 and 24, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 30,  
T. 11 S., R. 21 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 30 and 31.

**N.0°02.5'W.**, on the N-S center line of section 30.

- 39.949** Point for the C 1/4 section corner of section 30, at the intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 8 inches in the ground to bedrock, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

T11SR21E  
C1/4 S30  
2008

Set a T-post alongside the aluminum post.

Corner is located on steep southwest facing slope.

- 59.906** Point for the center N 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 25 inches in the ground, with aluminum cap marked:

C  
N1/16 | S30  
C  
2008

Set a T-post alongside the aluminum post.

Corner is located on a south facing slope.

- 79.863** The 1/4 section corner of sections 19 and 30.

From the 1/4 section corner of sections 29 and 30.

**S. 89°55.5'W.**, on the E-W center line of section 30.

- 39.980** The C 1/4 section corner of section 30.

THE SUBDIVISION OF SECTION 30,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

## CHAINS

**59.980** Point for the center W 1/16 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 27 inches in the ground, with aluminum cap marked:

W1/16  
C-----C  
S30  
2008

Set a T-post alongside the aluminum post.

Corner is located on the western edge of an open field.

**75.825** The 1/4 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

---

From the center W 1/16 section corner of section 30.

**N.0°02.3'W.**, on the N-S center line of the NW 1/4 of section 30.

**19.994** Point for the NW 1/16 section corner of sections 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 25 inches in the ground, with aluminum cap marked:

NW1/16 S30  
2008

Set a T-post alongside the aluminum post.

Corner is located on flat, sandy ground, just beyond the northeastern edge of an open field, surrounded by dense greasewood.

**39.988** The W 1/16 section corner of sections 19 and 30.

---

From the center N 1/16 section corner of section 30.

**N.89°58.1'W.**, on the E-W center line of the NW 1/4 of section 30.

**19.998** The NW 1/16 section corner of section 30.

**35.829** The N 1/16 section corner of sections 25 and 30, on the west boundary of the township, hereinbefore described.

CHAINS THE SUBDIVISION OF SECTION 31,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

The Subdivision of Section 31,  
T. 11 S., R. 21 E., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 6 and 31, on the south boundary of the township, hereinbefore described.

**N.0°07.4'W.**, on the N-S center line of section 31.

- 40.029** Point for the C 1/4 section corner of section 31, at the intersection with the E-W center line.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with an aluminum cap marked:

T11SR21E  
C1/4 S 31  
2008

Set a T-Post alongside the aluminum post.

- 80.019** The 1/4 section corner of sections 30 and 31.

From the 1/4 section corner of sections 31 and 32.

**S.89°57.3'W.**, on the E-W center line of section 31.

- 39.980** The C 1/4 section corner of section 31.

- 75.967** The 1/4 section corner of sections 31 and 36, on the west boundary of the township, hereinbefore described.

Survey of the Cemetery,  
Located Within Original Lot 4, Section 31,  
T. 11 S., R. 21 E., Salt Lake Meridian, Utah

Established from the Warranty Deed dated April 26, 1963,  
Instrument # 687-693, as recorded in the Uintah County  
Recorder's Office, and as evidenced by occupation lines.

Point for Angle Point No. 1, determined by running 35 feet west from the corner of fences (AP4) extending north and west.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, over a magnet, 26 inches in the ground, with aluminum cap marked:

THE SURVEY OF THE CEMETERY,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS  
(FEET)

T11SR21E



AP1  
2008

The corner of fences extending north and east, bears  
N.  $56^{\circ}31'21''$  E., 0.60 feet distance.

Corner is located on a low hill.

From this corner, the corner of Tps. 11 and 12 S., Rs. 20 and  
21 E., bears S.  $35^{\circ}18.2'$  W., 17.314 chains distance, (1142.72  
feet distance) (record S.  $54^{\circ}30'$  W., 1156 feet distance).

**North**, on line 1-2.

**0.530** Point for Angle Point No. 2.  
**(35.00)**

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
over a magnet, 26 inches in the ground, with aluminum cap  
marked:

T11SR21E

AP2



2008

Set a T-post alongside the aluminum post.

The corner of fences extending south and east, bears  
S.  $86^{\circ}17.28''$  E., 3.96 feet distance.

**East**, on line 2-3.

**0.530** Point for Angle Point No. 3.  
**(35.00)**

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
over a magnet, 26 inches in the ground, with aluminum cap  
marked:

T11SR21E

AP3



2008

The corner of fences extending east and west, bears  
N.  $35^{\circ}08'54''$  W., 0.53 feet distance.

THE SURVEY OF THE CEMETERY,  
TOWNSHIP 11 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

CHAINS  
(FEET)

**South**, on line 3-4.

**0.530** Point for Angle Point No. 4, at the intersection of fences,  
**(35.00)** extending north and west.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter,  
over a magnet, 26 inches in the ground, with aluminum cap  
marked:

T11SR21E



AP4  
2008

Corner is located on the southeast edge of the top of a small,  
low hill.

---

**West**, on line 4-1.

**0.530** Angle Point No. 1, and point of beginning.  
**(35.00)**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

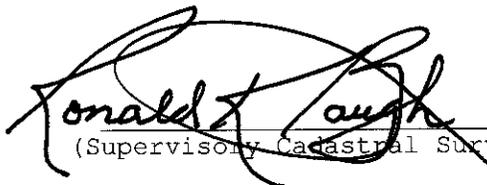
**FIELD ASSISTANTS**

<b>Name</b>	<b>Capacity</b>
Adrian Kurip	Survey Technician
Matthew Gillins	Survey Technician

## CERTIFICATE OF SURVEY

We, **Ronald K. Batty, Survey Technician** under the supervision of **Ronald K. Baugh, Supervisory Cadastral Surveyor**, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the **30th day of May, 2008**, have **dependently resurveyed a portion of the west boundary (Green River Guide Meridian), a portion of the south boundary, a portion of the subdivisional lines, the subdivision of sections 19, 30, and 31, and the metes and bounds survey of the cemetery, in Township 11 South, Range 21 East**, of the **Salt Lake** meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 28, 2009  
Date

  
(Supervisory Cadastral Surveyor)

August 28, 2009  
Date

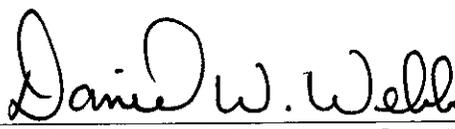
  
(Survey Technician)

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the west boundary (Green River Guide Meridian), a portion of the south boundary, a portion of the subdivisional lines, the subdivision of sections 19, 30, and 31, and the metes and bounds survey of the cemetery, in Township 11 South, Range 21 East, Salt Lake Meridian, Utah**, executed by **Ronald K. Batty, Survey Technician** under the supervision of **Ronald K. Baugh, Supervisory Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

September 1, 2009  
Date

  
(Chief Cadastral Surveyor for Utah)