

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
THE WEST BOUNDARY (SEVIER LAKE GUIDE MERIDIAN),

THE DEPENDENT RESURVEY AND SURVEY OF  
THE EAST BOUNDARY, NORTH BOUNDARY,  
AND THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 9 AND 10,

IN

TOWNSHIP 22 SOUTH, RANGE 12 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Daniel T. Gillins*  
*Cadastral Surveyor*

*And*

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved *June 29, 2009*, and Supplemental Special Instructions dated and approved *January 27, 2010*, which provided for the surveys included under Group Number *1113*, and Assignment Instructions dated *June 29, 2009*.

Survey commenced *July 9, 2009*  
Survey completed *February 12, 2010*

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
THE WEST BOUNDARY (SEVIER LAKE GUIDE MERIDIAN),

THE DEPENDENT RESURVEY AND SURVEY OF  
THE EAST BOUNDARY, NORTH BOUNDARY,  
AND THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 9 AND 10,

IN

TOWNSHIP 22 SOUTH, RANGE 12 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Daniel T. Gillins*  
*Cadastral Surveyor*

*And*

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved **June 29, 2009**, and Supplemental Special Instructions dated and approved **January 27, 2010**, which provided for the surveys included under Group Number **1113**, and Assignment Instructions dated **June 29, 2009**.

Survey commenced **July 9, 2009**  
Survey completed **February 12, 2010**

## INDEX DIAGRAM

Township 22 South, Range 12 West.

	12	12	13	13	14	14
5	6	41 5	17 4	32 3	29 2	24 1 10
4	7	39 8	17 9	31 10	27 11	23 12 9
4	18	38 17	16 16	18 15	27 14	22 13 8
4	19	36 20	16 21	30 22	26 23	22 24 8
3	30	34 29	15 28	29 27	25 26	21 25 7
3	31	19 32	15 33	29 34	24 35	20 36 5

The Subdivision of Section 9.....41  
 The Subdivision of Section 10.....41

## INDEX DIAGRAM

Township 22 South, Range 12 West.

	12	12	13	13	14	14
5	6	41 5	17 4	32 3	29 2	24 1 10
4	7	39 8	17 9	31 10	27 11	23 12 9
4	18	38 17	16 16	18 15	27 14	22 13 8
4	19	36 20	16 21	30 22	26 23	22 24 8
3	30	34 29	15 28	29 27	25 26	21 25 7
3	31	19 32	15 33	29 34	24 35	20 36 5

The Subdivision of Section 9.....41  
 The Subdivision of Section 10.....41

## TOWNSHIP 22 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of the west boundary (Sevier Lake Guide Meridian), the dependent resurvey and survey of the east boundary, the north boundary, and the subdivisional lines, and the subdivision of sections 9 and 10, in T. 22 S., R. 12 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>				
Portion	A.J. Stewart, Jr.	1882		
All	V.E. Lane et al.	1959	V.E. Lane et al.	1959
All			D.T. Gillins (concurrent)	2009-10
<b>EAST BOUNDARY</b>				
Portion	V.E. Lane et al.	1959		
<b>WEST BOUNDARY (Sevier Lake Guide Meridian)</b>				
All	A.J. Stewart, Jr.	1882		
All			W.W. Bandy	1925
<b>NORTH BOUNDARY</b>				
Portion	A.J. Stewart, Jr.	1882		
Portion			V.E. Lane et al.	1959
<b>SUBDIVISION</b>				
Portion	V.E. Lane et al.	1959		

## TOWNSHIP 22 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of the west boundary (Sevier Lake Guide Meridian), the dependent resurvey and survey of the east boundary, the north boundary, and the subdivisional lines, and the subdivision of sections 9 and 10, in T. 22 S., R. 12 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>				
Portion	A.J. Stewart, Jr.	1882		
All	V.E. Lane et al.	1959	V.E. Lane et al.	1959
All			D.T. Gillins (concurrent)	2009-10
<b>EAST BOUNDARY</b>				
Portion	V.E. Lane et al.	1959		
<b>WEST BOUNDARY (Sevier Lake Guide Meridian)</b>				
All	A.J. Stewart, Jr.	1882		
All			W.W. Bandy	1925
<b>NORTH BOUNDARY</b>				
Portion	A.J. Stewart, Jr.	1882		
Portion			V.E. Lane et al.	1959
<b>SUBDIVISION</b>				
Portion	V.E. Lane et al.	1959		

## TOWNSHIP 22 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The survey commenced in the summer of 2009, executed by Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1113, dated June 29, 2009. However, due to high amounts of rainfall in 2009, a portion of the Sevier Lake bed was so wet and muddy that corners could not be monumented prior to winter. In order to expedite field survey time, Trent J. Keenan, a principal of Diamondback Land Surveying of Las Vegas, Nevada (Utah Registered Land Surveyor No. 5790532) was contracted in 2010 to complete the monumentation of the said muddy portion of the Sevier Lake bed in the township, under the supervision of Daniel T. Gillins, Cadastral Surveyor of the Bureau of Land Management. The establishment and monumentation of corners in the Sevier Lake bed in 2010 was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Supplemental Special Instructions for Group No. 1113, dated January 27, 2010.

The directions of the lines were determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): EGAN\_BRGN\_NV1996 CORS ARP, DELTAMUNI\_UT2004 CORS ARP, and MARYSVALE\_UT2006 CORS ARP.

The geographic position of the corner of sections 5, 6, 31, and 32, on the north boundary of the township, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°56'08.395" N.**,  
 Longitude: **113°13'59.228" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,  
 Network Accuracy = 0.2 meter at 95% confidence

The geographic position of the corner of Townships 22 and 23 South, Range 12 West, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°50'55.182" N.**,  
 Longitude: **113°08'25.632" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,  
 Network Accuracy = 0.2 meter at 95% confidence

DEPENDENT RESURVEY OF THE WEST BOUNDARY  
 (SEVIER LAKE GUIDE MERIDIAN),  
 T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of the West Boundary  
 (Sevier Lake Guide Meridian),  
 T. 22 S., R. 12 W., Salt Lake Meridian, Utah

Reestablishment of the Independent Resurvey Executed by W.W.  
 Bandy in 1925 that Superseded the Survey Executed by A.J.  
 Stewart, Jr. in 1882.

From the corner of Townships 22 and 23 South, Ranges 12 and 13  
 West, monumented with an iron post as described in the official  
 record of the dependent resurvey of the west boundary of T. 23  
 S., R. 12 W., executed concurrently under Group No. 1112.

**N. 0°02.5' E.**, between sections 31 and 36.

- 39.988** The 1/4 section corner of sections 31 and 36, monumented with an  
 iron post, 1 inch diameter, firmly set, projecting 8 inches above  
 the ground, with brass cap marked as described in the official  
 record of the 1925 resurvey; with a mound of stone, 3 ft. base, 1  
 ft. high, 1 ft. west of corner.

Corner is located 63 ft. north of an easterly drainage.

**N. 0°03.8' E.**, beginning new measurement.

- 40.041** The corner of sections 25, 30, 31, and 36, monumented with an  
 iron post, 2 inches diameter, firmly set, projecting 2 inches  
 above a mound of stone, 3 ft. base, 2 ft. high, with brass cap  
 marked as described in the official record of the 1925 resurvey.

Corner is located 10 ft. south of a northeasterly drainage, on a  
 west facing slope.

**N. 0°03.2' E.**, between sections 25 and 30.

- 40.028** The 1/4 section corner of sections 25 and 30, monumented with an  
 iron post, 1 inch diameter, firmly set, projecting 6 inches above  
 the ground, with brass cap marked as described in the official  
 record of the 1925 resurvey; with a mound of stone, 3 ft. base,  
 1.5 ft. high, 2 ft. south of corner.

Corner is located on a steep, south facing slope.

**N. 0°03.8' E.**, beginning new measurement.

- 40.042** The corner of sections 19, 24, 25, and 30, monumented with an

DEPENDENT RESURVEY OF THE WEST BOUNDARY  
 (SEVIER LAKE GUIDE MERIDIAN),  
 T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

iron post, 2 inches diameter, firmly set, projecting 5 inches above a mound of stone, 4 ft. base, 2.5 ft. high, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located 4.8 ft. north of a southeasterly drainage.

---

N. 0°01.8' E., between sections 19 and 24.

- 40.012 The 1/4 section corner of sections 19 and 24, monumented with an iron post, 1 inch diameter, firmly set, projecting 2 inches above a mound of stone, 2.5 ft. base, 1 ft. high, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located on a north facing slope.

---

N. 0°01.7' E., beginning new measurement.

- 40.033 The corner of sections 13, 18, 19, and 24, monumented with an iron post, 2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 2 ft. base, 1 ft. high, 1 ft. west of corner.

Corner is located in sagebrush and grass.

---

N. 0°03.1' E., between sections 13 and 18.

- 40.009 The 1/4 section corner of sections 13 and 18, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located in sagebrush and grass.

---

N. 0°02.1' E., beginning new measurement.

- 40.009 The corner of sections 7, 12, 13, and 18, monumented with an iron post, 2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 2 ft. base, 1 ft. high, 1 ft. west of corner.

Corner is located in sagebrush and grass.

---

N. 0°00.4' W., between sections 7 and 12.

- 39.989 The 1/4 section corner of sections 7 and 12, monumented with an iron post, 1 inch diameter, firmly set, bent 45 degrees to the south, projecting 6 inches above the ground, with brass cap marked

DEPENDENT RESURVEY OF THE WEST BOUNDARY  
 (SEVIER LAKE GUIDE MERIDIAN),  
 T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

as described in the official record of the 1925 resurvey; with a mound of stone, 2 ft. base, 1 ft. high, 1 ft. west of corner.

Corner is located in sagebrush and grass.

---

N. 0°04.1' E., beginning new measurement.

- 40.019 The corner of sections 1, 6, 7, and 12, monumented with an iron post, 2 inches diameter, firmly set, projecting 2 inches above a mound of stone, 1.5 ft. base, 8 inches high, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located in sagebrush and grass.

---

N. 0°01.8' E., between sections 1 and 6.

- 40.011 The 1/4 section corner of sections 1 and 6, monumented with an iron post, 1 inch diameter, firmly set, projecting 7 inches above a mound of stone, 2 ft. base, 6 inches high, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located in sagebrush and grass.

---

N. 0°02.8' E., beginning new measurement.

- 40.024 The corner of Townships 21 and 22 South, Ranges 12 and 13 West, monumented with an iron post, 3 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 2.5 ft. base, 1 ft. high, 1 ft. southeast of corner.
- 

Dependent Resurvey of a Portion of the East Boundary of  
 Township 22 South, Range 12 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
 V.E. Lane Et al. in 1959.

---

From the corner of Townships 22 and 23 South, Range 12 West, monumented with a stainless steel post as described in the official record of the dependent resurvey of the east boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

**NORTH**, along the east boundary of section 36.

- 6.780 The closing township corner of Townships 22 and 23 South, Range 11 West, monumented with a stainless steel post as described in the official record of the dependent resurvey of the north

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

boundary of T. 23 S., R. 11 W., executed concurrently under Group No. 1112.

- 40.000 Point for the 1/4 section corner of section 36 only, determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, flush with the ground, with aluminum cap marked:

T22S  
R12W R11W  
1/4  
S36 |  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 46.971 Point for the 1/4 section corner of section 31 only, T. 22 S., R. 11 W.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22S  
R12W R11W  
1/4  
|S31  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.000 Point for the corner of sections 25 and 36 only, determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22S  
R12W R11W  
S25 |  
— | S31  
S36 |  
2010

Set a steel fence post alongside the aluminum drive rod.

SURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Survey of a Portion of the East Boundary of  
Township 22 South, Range 12 West, Salt Lake Meridian, Utah

**NORTH**, along the east boundary of section 25.

- 7.162** Point for the corner of sections 30 and 31 only, T. 22 S., R. 11 W., at a position West of the corner of sections 29, 30, 31 and 32, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  |
S25 | S30
    |———|
    | S31
    |
    2010
  
```

- 40.000** Point for the 1/4 section corner of section 25 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 66 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  |
1/4 |
S25 |
    |
    2010
  
```

- 47.162** Point for the 1/4 section corner of section 30 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
  R11W
  |
  | 1/4
  | S30
  |
  2010
  
```

- 80.000** Point for the corner of sections 24 and 25 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
S24 |
———| S30
S25 |
    |
    2010
  
```

SURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

**NORTH**, along the east boundary of section 24.

- 9.920 Point for the corner of sections 19 and 30 only, T. 22 S., R. 11 W., at a position West of the corner of sections 21, 22, 27, and 28, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  | S19
S24 |-----
  | S30
    2010
  
```

- 40.000 Point for the 1/4 section corner of section 24 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  1/4 |
S24  |
    2010
  
```

- 49.920 Point for the 1/4 section corner of section 19 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
  R11W
  | 1/4
  | S19
    2010
  
```

- 80.000 Point for the corner of sections 13 and 24 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
S13 |
-----| S19
S24 |
    2010
  
```

**NORTH**, along the east boundary of section 13.

SURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 9.920 Point for the corner of sections 18 and 19 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  | S18
S13 |-----
  | S19
    2010

```

- 40.000 Point for the 1/4 section corner of section 13 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 70 inches in the ground, with aluminum cap marked:

```

T22W
R12W
  1/4 |
S13 |
    2010

```

- 49.920 Point for the 1/4 section corner of section 18 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
  R11W
  | 1/4
  | S18
    2010

```

- 80.000 Point for the corner of sections 12 and 13 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
S12 |-----
-----| S18
S13 |
    2010

```

NORTH, along the east boundary of section 12.

- 9.920 Point for the corner of sections 7 and 18 only, T. 22 S., R. 11 W.

SURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  | S7
S12 ———
  | S18
    2010

```

**40.000** Point for the 1/4 section corner of section 12 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22W
R12W
  1/4 |
  S12 |
    2010

```

**49.920** Point for the 1/4 section corner of section 7 only, T. 22 S., R 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
  R11W
  | 1/4
  | S7
    2010

```

**80.000** Point for the corner of sections 1 and 12 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

```

T22S
R12W R11W
  S1 |
  ——— | S7
  S12 |
    2010

```

**NORTH**, along the east boundary of section 1.

**9.920** Point for the corner of sections 6 and 7 only, T. 22 S., R 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE EAST BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T22S  
R12W R11W  
S1 | S6  
— |  
S7  
2010

40.000 Point for the 1/4 section corner of section 1 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22S  
R12W  
1/4 |  
S1 |  
2010

49.920 Point for the 1/4 section corner of section 6 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22S  
R11W  
1/4 |  
S6 |  
2010

80.194 Point for the corner of Townships 21 and 22 South, Range 12 West, at a position East of the corner of sections 4, 5, 32, and 33, on the north boundary of the township.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21S  
R12W R11W  
S36 |  
— | S6  
S1 |  
T22S  
2010

From this corner, the corner of Townships 21 and 22 South, Range 11 West, bears **NORTH, 13.736 chains** distance, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under Group No. 1114.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

---

Reestablishment of the Independent Resurvey Executed by  
V.E. Lane et al. in 1959 that Superseded the Survey  
Executed by A.J. Stewart, Jr. in 1882

---

From the corner of Townships 21 and 22 South, Ranges 12 and 13  
West, hereinbefore described.

N. 89°59.5' E., between sections 6 and 31.

- 33.932 The 1/4 section corner of sections 6 and 31, monumented with an  
iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches  
above a mound of stone, 3 ft. base, 4 inches high, with brass cap  
marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

---

S. 89°57.1' E., beginning new measurement.

- 40.002 The corner of sections 5, 6, 31, and 32, monumented with an iron  
post, 2 1/2 inches diameter, firmly set, projecting 6 inches  
above a mound of stone, 3 ft. base, 6 inches high, with brass cap  
marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

---

S. 89°57.8' E., between sections 5 and 32.

- 39.970 The 1/4 section corner of sections 5 and 32, monumented with an  
iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches  
above a mound of stone, 3 ft. base, 4 inches high, with brass cap  
marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

---

S. 89°59.2' E., beginning new measurement.

- 40.005 The corner of sections 4, 5, 32, and 33, monumented with an iron  
post, 2 1/2 inches diameter, firmly set, projecting 12 inches  
above a collar of stone, 2.5 ft. base, with brass cap marked as  
described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

---

Independent Resurvey of a Portion of the North Boundary of  
T. 22 S., R. 12 W., Salt Lake Meridian, Utah

---

INDEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Superseding the Survey Executed by  
A.J. Stewart, Jr. in 1882

---

**EAST**, between sections 4 and 33.

- 39.505** Point for the 1/4 section corner of sections 4 and 33, at a position 40.000 chains West of the corner of sections 3, 4, 33, and 34, on the north boundary of the township.

Set an aluminum post, 30 inches long, 2/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S  
S33  
1/4 ———  
S4  
T22SR12W  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 79.505** Point for the corner of sections 3, 4, 33, and 34.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR12W  
S33|S34  
S4|S3  
T22S  
2010

---

Survey of a Portion of the North Boundary of  
T. 22 S., R. 12 W., Salt Lake Meridian, Utah

---

**EAST**, between sections 3 and 34.

- 40.000** Point for the 1/4 section corner of sections 3 and 34.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T21SR12W  
S34  
1/4 ———  
S3  
T22S  
2010

- 80.000** Point for the corner of sections 2, 3, 34, and 35.

SURVEY OF A PORTION OF THE NORTH BOUNDARY OF  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T21SR11W  
 $\frac{S34}{S3} | \frac{S35}{S2}$   
 2010

---

**EAST**, between sections 2 and 35.

**40.000** Point for the 1/4 section corner of sections 2 and 35.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR12W  
 S35  
 1/4 —————  
 S2  
 T22S  
 2010

**80.000** Point for the corner of sections 1, 2, 35, and 36.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR12W  
 $\frac{S35}{S2} | \frac{S36}{S1}$   
 T22S  
 2010

---

**EAST**, between sections 1 and 36.

**40.000** Point for the 1/4 section corner of sections 1 and 36.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR12W  
 S36  
 1/4 —————  
 S1  
 T22S  
 2010

**80.000** The corner of Townships 21 and 22 South, Range 12 West, hereinbefore described.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

in T. 22 S., R. 12 W., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
V.E. Lane et al. in 1959

---

From the corner of sections 4, 5, 32, and 33, on the south boundary of the township, monumented with an aluminum post as described in the official record of the dependent resurvey of the north boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

**NORTH**, between sections 32 and 33.

- 40.001** Point for the 1/4 section corner of sections 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8 ft. 7 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S32 | S33  
2010

- 80.002** Point for the corner of sections 28, 29, 32, and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S29 | S28  
S32 | S33  
2010

---

**NORTH**, between sections 28 and 29.

- 40.001** Point for the 1/4 section corner of sections 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S29 | S28  
2010

- 80.002** Point for the corner of sections 20, 21, 28, and 29, at

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S20|S21  
S29|S28  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

---

**NORTH**, between sections 20 and 21.

- 40.001** Point for the 1/4 section corner of sections 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S20|S21  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.002** The corner of sections 16, 17, 20, and 21, monumented with an iron post, 2 1/2 inches diameter, loosely set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post

Corner is located in Sevier Lake bed.

---

**N. 0°01.0' W.**, between sections 16 and 17.

- 40.008** The 1/4 section corner of sections 16 and 17, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

---

**N. 0°01.0' W.**, beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.987** The corner of sections 8, 9, 16, and 17, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 13 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

---

N. 0°01.5' W., between sections 8 and 9.

- 39.988** The 1/4 section corner of sections 8 and 9, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

Corner is located on southwest facing slope of a small hill.

From this corner, U.S. Coast & Geodetic Survey triangulation station "SEVIER LAKE 1957" bears N. 44°28.8' E., 24.002 chains distance, a brass tablet, 3 1/2 inches diameter, seated in a concrete monument, 6 inches square, projecting 1 inch above the ground.

---

N. 0°00.6' W., beginning new measurement.

- 39.992** The corner of sections 4, 5, 8, and 9, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

---

N. 0°00.2' W., between sections 4 and 5.

- 39.980** The 1/4 section corner of sections 4 and 5, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 15 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

---

N. 0°00.7' W., beginning new measurement.

- 40.199** The corner of sections 4, 5, 32, and 33, on the north boundary of the township, hereinbefore described.
- 

From the corner of sections 16, 17, 20, and 21.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°57.7' E., between sections 16 and 21.

- 40.000 Point for the 1/4 section corner of sections 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S16  
1/4 ———  
S21  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.000 Point for the corner of sections 15, 16, 21, and 22, determined by two-point control; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S16|S15  
S21|S22  
2010

N. 0°01.3' E., between sections 15 and 16.

- 40.000 Point for the 1/4 section corner of sections 15 and 16, at proportionate distance, falls alongside the wooden post monument which is decayed and lying on top of the lake bed.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S16|S15  
2009

Re-set the wooden post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.000 The corner of sections 9, 10, 15, and 16, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the iron post.

---

N. 89°57.7' W., between sections 9 and 16.

- 40.006 The 1/4 section corner of sections 9 and 16, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

---

N. 89°58.0' W., beginning new measurement.

- 40.032 The corner of sections 8, 9, 16, and 17.
- 

From the corner of sections 5, 6, 31, and 32, on the south boundary of the township, monumented with an iron post as described in the official record of the dependent resurvey of the north boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

N. 0°02.5' W., between sections 31 and 32.

- 40.000 Point for the 1/4 section corner of sections 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S31|S32  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.000 Point for the corner of sections 29, 30, 31, and 32, determined by two-point control; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S30|S29  
S31|S32  
2009

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located in Sevier Lake bed.

---

From the corner of sections 28, 29, 32, and 33.

N. 89°59.7' W., between sections 29 and 32.

- 40.000 Point for the 1/4 section corner of sections 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S29  
1/4 —————  
S32  
2010

- 80.000 The corner of sections 29, 30, 31, and 32.
- 

Survey of a Portion of the Subdivisional Lines in  
T. 22 S., R. 12 W., Salt Lake Meridian, Utah.

---

From the corner of sections 1, 2, 35, and 36, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the dependent resurvey of the north boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

N. 0°01.0' W., between sections 35 and 36.

- 40.000 Point for the 1/4 section corner of sections 35 and 36.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S35 | S36  
2010

- 80.000 Point for the corner of sections 25, 26, 35, and 36.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S26 | S25  
S35 | S36  
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 25 and 36 only, on the east boundary of the township, hereinbefore described.

N. 89°59.6' W., between sections 25 and 36.

39.983 Point for the 1/4 section corner of sections 25 and 36.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 66 inches in the ground, with aluminum cap marked:

T22SR12W  
S25  
1/4 ———  
S36  
2010

79.966 The corner of sections 25, 26, 35, and 36.

N. 0°01.0' W., between sections 25 and 26.

40.000 Point for the 1/4 section corner of sections 25 and 26.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S26 | S25  
2010

80.000 Point for the corner of sections 23, 24, 25, and 26.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22SR12W  
S23 | S24  
S26 | S25  
2010

From the corner of sections 24 and 25 only, on the east boundary of the township, hereinbefore described.

N. 89°59.6' W., between sections 24 and 25.

39.986 Point for the 1/4 section corner of sections 24 and 25.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
S24  
1/4 ———  
S25  
2010

79.972 The corner of sections 23, 24, 25, and 26.

---

N. 0°01.0' W., between sections 23 and 24.

40.000 Point for the 1/4 section corner of sections 23 and 24.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S23 | S24  
2010

80.000 Point for the corner of sections 13, 14, 23, and 24.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22SR12W  
S14 | S13  
S23 | S24  
2010

---

From the corner of sections 13 and 24 only, on the east boundary of the township, hereinbefore described.

N. 89°59.6' W., between sections 13 and 24.

39.990 Point for the 1/4 section corner of sections 13 and 24.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S13  
1/4 ———  
S24  
2010

79.980 The corner of sections 13, 14, 23, and 24.

---

N. 0°01.0' W., between sections 13 and 14.

40.000 Point for the 1/4 section corner of sections 13 and 14.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S14 | S13  
2010

80.000 Point for the corner of sections 11, 12, 13, and 14.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S11 | S12  
S14 | S13  
2010

From the corner of sections 12 and 13 only, on the east boundary of the township, hereinbefore described.

N. 89°59.6' W., between sections 12 and 13.

39.993 Point for the 1/4 section corner of sections 12 and 13.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S12  
1/4 ———  
S13  
2010

79.986 The corner of sections 11, 12, 13, and 14.

N. 0°01.0' W., between sections 11 and 12.

40.000 Point for the 1/4 section corner of sections 11 and 12.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S11 | S12  
2010

80.000 Point for the corner of sections 1, 2, 11, and 12.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
 $\frac{S2 | S1}{S11 | S12}$   
 2010

---

From the corner of sections 1 and 12 only, on the east boundary of the township, hereinbefore described.

N. 89°59.6' W., between sections 1 and 12.

39.997 Point for the 1/4 section corner of sections 1 and 12.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
 S1  
 1/4 ———  
 S12  
 2010

79.994 The corner of sections 1, 2, 11, and 12.

---

N. 0°01.0' W., between sections 1 and 2.

40.000 Point for the 1/4 section corner of sections 1 and 2.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
 1/4  
 $\frac{S2 | S1}{S11 | S12}$   
 2010

80.185 The corner of sections 1, 2, 35, and 36, on the north boundary of the township, hereinbefore described.

---

From the corner of sections 2, 3, 34, and 35, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the dependent resurvey of the north boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

N. 0°02.0' W., between sections 34 and 35.

40.000 Point for the 1/4 section corner of sections 34 and 35.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
1/4  
S34|S35  
2010

80.000 Point for the corner of sections 26, 27, 34, and 35.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S27|S26  
S34|S35  
2010

---

From the corner of sections 25, 26, 35, and 36.

N. 89°59.6' W., between sections 26 and 35.

39.983 Point for the 1/4 section corner of sections 26 and 35.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S26  
1/4 ———  
S35  
2010

79.966 The corner of sections 26, 27, 34, and 35.

---

N. 0°02.0' W., between sections 26 and 27.

40.000 Point for the 1/4 section corner of sections 26 and 27.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S27|S26  
2010

80.000 Point for the corner of sections 22, 23, 26, and 27.

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8.5 ft. in the ground, with aluminum cap marked:

T22SR12W  
S22|S23  
S27|S26  
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 23, 24, 25, and 26.

N. 89°59.6' W., between sections 23 and 26.

39.986 Point for the 1/4 section corner of sections 23 and 26.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S23  
1/4 ———  
S26  
2010

79.972 The corner of sections 22, 23, 26, and 27.

N. 0°02.0' W., between sections 22 and 23.

40.000 Point for the 1/4 section corner of sections 22 and 23.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S22|S23  
2010

80.000 Point for the corner of sections 14, 15, 22, and 23.

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8.5 ft. in the ground, with aluminum cap marked:

T22SR12W  
S15|S14  
S22|S23  
2010

From the corner of sections 13, 14, 23, and 24.

N. 89°59.6' W., between sections 14 and 23.

39.990 Point for the 1/4 section corner of sections 14 and 23.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
S14  
1/4 ———  
S23  
2010

79.980 The corner of sections 14, 15, 22, and 23.

---

N. 0°02.0' W., between sections 14 and 15.

40.000 Point for the 1/4 section corner of sections 14 and 15.

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8.5 ft. in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S15|S14  
2010

80.000 Point for the corner of sections 10, 11, 14, and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T22SR12W  
S10|S11  
S15|S14  
2009

---

From the corner of sections 11, 12, 13, and 14.

N. 89°59.6' W., between sections 11 and 14.

39.993 Point for the 1/4 section corner of sections 11 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S11  
1/4 ———  
S14  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

79.986 The corner of sections 10 11, 14, and 15.

---

N. 0°02.0' W., between sections 10 and 11.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

**40.000** Point for the 1/4 section corner of sections 10 and 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S10 | S11  
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

**80.000** Point for the corner of sections 2, 3, 10, and 11.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T22SR12W  
S3 | S2  
S10 | S11  
2010

From the corner of sections 1, 2, 11, and 12.

N. 89°59.6' W., between sections 2 and 11.

**39.997** Point for the 1/4 section corner of sections 2 and 11.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S2  
1/4 ———  
S11  
2010

**79.994** The corner of sections 2, 3, 10, and 11.

N. 0°02.0' W., between sections 2 and 3.

**40.000** Point for the 1/4 section corner of sections 2 and 3.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S3 | S2  
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 80.176 The corner of sections 2, 3, 34, and 35, on the north boundary of the township, hereinbefore described.
- 

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the dependent resurvey of the north boundary of T. 23 S., R. 12 W., executed concurrently under Group No. 1112.

N. 0°01.3' E., between sections 33 and 34.

- 39.993 Point for the 1/4 section corner of sections 33 and 34.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S33|S34  
2010

- 79.986 Point for the corner of sections 27, 28, 33, and 34.

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8 ft. 5 inches in the ground, with aluminum cap marked:

T22SR12W  
S28|S27  
S33|S34  
2010

---

From the corner of sections 26, 27, 34, and 35.

S. 89°59.8' W., between sections 27 and 34.

- 40.000 Point for the 1/4 section corner of sections 27 and 34.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S27  
1/4 ———  
S34  
2010

- 79.867 The corner of sections 27, 28, 33, and 34.
- 

N. 0°01.3' E., between sections 27 and 28.

- 39.993 Point for the 1/4 section corner of sections 27 and 28.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 9 ft. long, 3/4 inch diameter, 8.5 ft. in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S28 | S27  
2010

79.986 Point for the corner of sections 21, 22, 27, and 28.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S21 | S22  
S28 | S27  
2010

From the corner of sections 22, 23, 26, and 27.

S. 89°59.2' W., between sections 22 and 27.

40.000 Point for the 1/4 section corner of sections 22 and 27.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
S22  
1/4 ———  
S27  
2010

79.775 The corner of sections 21, 22, 27, and 28.

N. 0°01.3' E., between sections 21 and 22.

39.993 Point for the 1/4 section corner of sections 21 and 22.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S21 | S22  
2010

79.986 The corner of sections 15, 16, 21, and 22, hereinbefore described.

From the corner of sections 14, 15, 22, and 23.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°58.6' W., between sections 15 and 22.

40.000 Point for the 1/4 section corner of sections 15 and 22.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S15  
1/4 ———  
S22  
2010

79.683 The corner of sections 15, 16, 21, and 22.

---

From the corner sections 10, 11, 14, and 15.

S. 89°58.6' W., between sections 10 and 15.

40.000 Point for the 1/4 section corner of sections 10 and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S10  
1/4 ———  
S15  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground.

79.589 The corner of sections 9, 10, 15, and 16.

---

N. 0°11.5' W., between sections 9 and 10.

40.000 Point for the 1/4 section corner of sections 9 and 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S9|S10  
2009

Bury a magnet beneath the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in sagebrush.

80.000 Point for the corner of sections 3, 4, 9, and 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W	
S4	S3
S9	S10
2009	

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

---

From the corner of sections 2, 3, 10, and 11.

S. 89°58.6' W., between sections 3 and 10.

40.000 Point for the 1/4 section corner of sections 3 and 10.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W	
	S3
1/4	—
	S10
2009	

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

79.794 The corner of sections 3, 4, 9, and 10.

---

N. 0°11.5' W., between sections 3 and 4.

40.000 Point for the 1/4 section corner of sections 3 and 4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W	
	1/4
S4	S3
2009	

Set a steel fence post alongside the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located in Sevier Lake bed.

- 80.209 The corner of sections 3, 4, 33, and 34, on the north boundary of the township, hereinbefore described.
- 

From the corner of sections 27, 28, 33, and 34.

N. 89°59.0' W., between sections 28 and 33.

- 39.986 Point for the 1/4 section corner of sections 28 and 33.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 64 inches in the ground, with aluminum cap marked:

T22SR12W  
S28  
1/4 ———  
S33  
2010

- 79.972 The corner of sections 28, 29, 32, and 33.
- 

From the corner of sections 21, 22, 27, and 28.

N. 89°58.3' W., between sections 21 and 28.

- 39.993 Point for the 1/4 section corner of sections 21 and 28.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T22SR12W  
S21  
1/4 ———  
S28  
2010

- 79.986 The corner of sections 20, 21, 28, and 29.
- 

From the corner of sections 3, 4, 9, and 10.

N. 89°58.7' W., between sections 4 and 9.

- 40.000 Point for the 1/4 section corner of sections 4 and 9.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
S4  
1/4 ———  
S9  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

79.779 The corner of sections 4, 5, 8, and 9.

---

From the corner of sections 29, 30, 31, and 32.

N. 89°58.1' W., between sections 30 and 31.

40.000 Point for the 1/4 section corner of sections 30 and 31.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S30  
1/4 ———  
S31  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

74.405 The corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 29, 30, 31, and 32.

N. 0°01.0' W., between sections 29 and 30.

40.000 Point for the 1/4 section corner of sections 29 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S30 | S29  
2009

Set a steel fence post alongside the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located in Sevier Lake bed.

- 80.000 True point for the corner of sections 19, 20, 29, and 30, falls in a wash 3 ft. wide by 2 ft. deep, drains southeast, where it is impracticable to establish a permanent monument.

From this point, the point selected for an offline witness corner of sections 19, 20, 29, and 30, bears **N. 78°44.8' W., 0.260 chains** distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

```

T22SR12W
  S19|S20
  S30|S29
      ↘ WC
      2009
  
```

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Witness corner is located in flat ground in scattered sagebrush.

---

From the corner of sections 20, 21, 28, and 29.

**N. 89°59.8' W.**, between sections 20 and 29.

- 40.003 Point for the 1/4 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

```

T22SR12W
  S20
1/4 ———
  S29
  2009
  
```

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 80.006 True point for the corner of sections 19, 20 29, and 30.
- 

**N. 89°54.9' W.**, between sections 19 and 30.

- 40.000 Point for the 1/4 section corner of sections 19 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
S19  
1/4 ———  
S30  
2009

Raise a mound of stone 2 ft. base by 2 ft. high, north of the aluminum post.

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on east side of small wash, drains southeast.

- 74.285 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, hereinbefore described.
- 

From the true point for the corner of sections 19, 20, 29, and 30.

N. 0°01.0' W., between sections 19 and 20.

- 40.000 Point for the 1/4 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a collar of stone, with aluminum cap marked:

T22SR12W  
1/4  
S19 | S20  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in scattered sagebrush.

- 80.000 Point for the corner of sections 17, 18, 19, and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S18 | S17  
S19 | S20  
2009

Bury a magnet beneath the aluminum post.

Raise a mound of stone 3 ft. base, 1 ft. high, west of the

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

---

From the corner of sections 16, 17, 20, and 21.

N. 89°59.8' W., between sections 17 and 20.

40.006 Point for the 1/4 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S17  
1/4 ———  
S20  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

80.012 The corner of sections 17, 18, 19, and 20.

---

N. 89°52.8' W., between sections 18 and 19.

40.000 Point for the 1/4 section corner of sections 18 and 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a collar of stone, with aluminum cap marked:

T22SR12W  
S18  
1/4 ———  
S19  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

74.206 The corner of sections 13, 18, 19, and 24.

---

From the corner of sections 17, 18, 19, and 20.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°01.0' W., between sections 17 and 18.

40.000 Point for the 1/4 section corner of sections 17 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S18 | S17  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle, northeast facing slope in sagebrush.

80.000 Point for the corner of sections 7, 8, 17, and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S7 | S8  
S18 | S17  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat rolling ground in sagebrush.

From the corner of sections 8, 9, 16, and 17.

N. 89°59.6' W., between sections 8 and 17.

39.998 Point for the 1/4 section corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T22SR12W  
S8  
1/4 —  
S17  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located on flat ground in sagebrush.

79.996 The corner of sections 7, 8, 17, and 18.

---

N. 89°52.0' W., between sections 7 and 18.

40.000 Point for the 1/4 section corner of sections 7 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T22SR12W  
S7  
1/4 ———  
S18  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle, northeast facing slope in sagebrush.

74.108 The corner of sections 7, 12, 13, and 18, on the west boundary of the township, hereinbefore described.

---

From the corner of sections 7, 8, 17, and 18.

N. 0°01.0' W., between sections 7 and 8.

40.000 Point for the 1/4 section corner of sections 7 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S7|S8  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in sagebrush.

80.000 Point for the corner of sections 5, 6, 7, and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

## CHAINS

T22SR12W  
S6 | S5  
S7 | S8  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in sagebrush.

---

From the corner of sections 4, 5, 8, and 9.

N. 89°58.8' W., between sections 5 and 8.

39.990 Point for the 1/4 section corner of sections 5 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S5  
1/4 ———  
S8  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground.

79.980 The corner of sections 5, 6, 7, and 8.

---

N. 89°51.6' W., between sections 6 and 7.

40.000 Point for the 1/4 section corner of sections 6 and 7.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
S6  
1/4 ———  
S7  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in sagebrush.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN  
T. 22 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 74.026 The corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.
- 

From the corner of sections 5, 6, 7, and 8.

N. 0°01.0' W., between sections 5 and 6.

- 40.000 Point for the 1/4 section corner of sections 5 and 6.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T22SR12W  
1/4  
S6|S5  
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground in sagebrush.

- 80.186 The corner of sections 5, 6, 31, and 32, on the north boundary of the township, hereinbefore described.
- 

The Subdivision of Section 9,  
T. 22 S., R. 12 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 9 and 10.

N. 89°58.4' W., along the E-W center line of section 9.

- 79.914 The 1/4 section corner of sections 8 and 9.
- 

The Subdivision of Section 10,  
T. 22 S., R. 12 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 10 and 11.

S. 89°58.6' W., along the E-W center line of section 10.

- 79.692 The 1/4 section corner of sections 9 and 10.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

Name	Capacity
<b>2009 Bureau of Land Management Assistants:</b>	
Adrian M. Kurip	Survey Technician
Robert Robbins	Survey Aid
Vinnie Porter	Survey Aid
<b>2010 Diamondback Land Surveying Assistants:</b>	
Trent J. Keenan	Party Chief
Jeffrey C. Miller	Party Chief
Robert L. Carrington	Chainman
Verland K. Pierson	Chainman
Roger L. Berriman	Chainman
Doug Morlan	Chainman
Jason P. Justice	Chainman

## CERTIFICATE OF SURVEY

We, *Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *29<sup>th</sup> day of June, 2009*, and the Supplemental Special Instructions bearing the date of the *27<sup>th</sup> day of January, 2010*, We have *dependently resurveyed the west boundary (Sevier Lake Guide Meridian), dependently resurveyed and surveyed the east boundary, north boundary, and a portion of the subdivisional lines, and subdivided sections 9 and 10 in Township 22 South, Range 12 West, of the Salt Lake Meridian, in the State of Utah*, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions of the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 7, 2010  
Date

  
Cadastral Surveyor

June 25, 2010  
Date

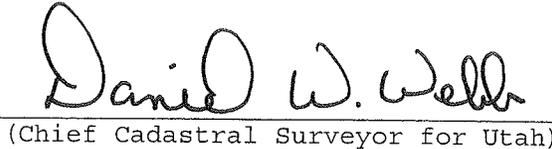
  
Cadastral Surveyor

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of *the dependent resurvey of the west boundary (Sevier Lake Guide Meridian) the dependent resurvey and survey of the east boundary, the north boundary, and the subdivisional lines, and the subdivision of sections 9 and 10, in Township 22 South, Range 12 West, Salt Lake Meridian, Utah*, executed by *Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors*, having been critically examined and found correct, are hereby approved.

June 30, 2010  
Date

  
(Chief Cadastral Surveyor for Utah)