

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY AND SURVEY OF

THE SOUTH BOUNDARY,

THE DEPENDENT RESURVEY OF

THE EAST BOUNDARY

AND A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

IN

TOWNSHIP 21 SOUTH, RANGE 11 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Daniel T. Gillins
Cadastral Surveyor

And

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved *July 24, 2009*, and Supplemental Special Instructions dated and approved *January 27, 2010*, which provided for the surveys included under Group Number *1114*, and Assignment Instructions dated *July 24, 2009*.

Survey commenced *July 26, 2009*
Survey completed *February 12, 2010*

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY AND SURVEY OF

THE SOUTH BOUNDARY,

THE DEPENDENT RESURVEY OF

THE EAST BOUNDARY

AND A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

IN

TOWNSHIP 21 SOUTH, RANGE 11 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Daniel T. Gillins
Cadastral Surveyor

And

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved *July 24, 2009*, and Supplemental Special Instructions dated and approved *January 27, 2010*, which provided for the surveys included under Group Number *1114*, and Assignment Instructions dated *July 24, 2009*.

Survey commenced *July 26, 2009*
Survey completed *February 12, 2010*

INDEX DIAGRAM

Township 21 South, Range 11 West.

6 39	5 32	4 28	3 23	2 18	1 12
38	38	32	28	23	18
7 37	8 31	9 27	10 23	11 17	12 11
37	37	31	27	22	17
18 36	17 31	16 26	15 22	14 16	13 11
36	36	30	26	21	16
19 35	20 30	21 26	22 21	23 15	24 10
35	34	30	25	20	15
30 34	29 29	28 25	27 20	26 14	25 9
33	33	29	24	19	14
31 33	32 28	33 24	34 19	35 13	36 8
7	7	6	4	3	3

INDEX DIAGRAM

Township 21 South, Range 11 West.

6 39	5 32	4 28	3 23	2 18	1 12
38	38	32	28	23	18
7 37	8 31	9 27	10 23	11 17	12 11
37	37	31	27	22	17
18 36	17 31	16 26	15 22	14 16	13 11
36	36	30	26	21	16
19 35	20 30	21 26	22 21	23 15	24 10
35	34	30	25	20	15
30 34	29 29	28 25	27 20	26 14	25 9
33	33	29	24	19	14
31 33	32 28	33 24	34 19	35 13	36 8
7	7	6	4	3	3

TOWNSHIP 21 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey and survey of the south boundary, dependent resurvey of the east boundary and a portion of the subdivisional lines, and the survey of a portion of the subdivisional lines in T. 21 S., R. 11 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY				
Portion	J. Gorlinski	1880		
Portion	V. E. Lane et al.	1959	V. E. Lane et al.	1959
EAST BOUNDARY				
All	J. Gorlinski	1880		
All			V. E. Lane et al.	1959
WEST BOUNDARY				
All	D.T. Gillins & J.D. Davis (concurrent)	2009-10		
NORTH BOUNDARY (Fourth Standard Parallel South)				
All	D.T. Gillins & C.C. Norton (concurrent)	2009-10		
SUBDIVISION				
Portion	V. E. Lane et al.	1959		

TOWNSHIP 21 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey and survey of the south boundary, dependent resurvey of the east boundary and a portion of the subdivisional lines, and the survey of a portion of the subdivisional lines in T. 21 S., R. 11 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY				
Portion	J. Gorlinski	1880		
Portion	V. E. Lane et al.	1959	V. E. Lane et al.	1959
EAST BOUNDARY				
All	J. Gorlinski	1880		
All			V. E. Lane et al.	1959
WEST BOUNDARY				
All	D.T. Gillins & J.D. Davis (concurrent)	2009-10		
NORTH BOUNDARY (Fourth Standard Parallel South)				
All	D.T. Gillins & C.C. Norton (concurrent)	2009-10		
SUBDIVISION				
Portion	V. E. Lane et al.	1959		

TOWNSHIP 21 SOUTH, RANGE 11 WEST, SALT LAKE MERIDIAN, UTAH

The survey commenced in the summer of 2009, executed by Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors, in accordance with the specification set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1114, dated July 24, 2009. However, due to high amounts of rainfall in 2009, a portion of the Sevier Lake bed was so wet and muddy that corners could not be monumented prior to winter. In order to expedite field survey time, Trent J. Keenan, a principal of Diamondback Land Surveying of Las Vegas, Nevada (Utah Registered Land Surveyor No. 5790532) was contracted in 2010 to complete the monumentation of the said muddy portion of the Sevier Lake bed in the township, under the supervision of Daniel T. Gillins, Cadastral Surveyor of the Bureau of Land Management. The establishment and monumentation of corners in the Sevier Lake bed in 2010 was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Supplemental Special Instructions for Group No. 1114, dated January 27, 2010.

The directions of the lines were determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): EGAN_BRGN_NV1996 CORS ARP, DELTAMUNI_UT2004 CORS ARP, and MARYSVALE_UT2006 CORS ARP.

The geographic position of the corner of Townships 21 and 22 South, Range 11 West, on the east boundary of the township, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°56'17.771" N.**,
 Longitude: **113°02'01.682" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,
 Network Accuracy = 0.2 meter at 95% confidence

The geographic position of the corner of sections 6 and 7 only, on the west boundary of the township, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **39°00'38.572" N.**,
 Longitude: **113°08'25.632" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,
 Network Accuracy = 0.2 meter at 95% confidence

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the South Boundary,
T. 21 S., R. 11 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by J. Gorlinski in 1880
and the Dependent Resurvey Executed by V.E. Lane et al. in 1959

Beginning at the corner of Townships 21 and 22 South, Range 11 West, on the east boundary of the township, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 ft. base, to top, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. east of the iron post.

Corner is located on a gradual southwest slope.

From this corner, the closing township corner of Townships 21 and 22 South, Range 10 West, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top, with brass cap marked as described in the official record of the 1959 survey, bears **S. 0°22.1' E., 4.627** chains distance.

Set a steel fence post alongside the iron post.

Corner is located on a gradual northwest slope in sagebrush.

S. 89°07.9' W., between sections 1 and 36.

- 40.021** The 1/4 section corner of sections 1 and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. northeast of the iron post.

Corner is located on flat rolling ground in sagebrush.

S. 89°55.2' W., beginning new measurement.

- 40.016** The corner of sections 1, 2, 35, and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. southwest of the iron post.

Corner is located on flat rolling ground in sagebrush.

S. 89°59.0' W., along the south boundary of section 35.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.989 The 1/4 section corner of sections 2 and 35, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. east of the iron post.

Corner is located on flat rolling ground in sagebrush.

Reestablishment of the Survey Executed by
V.E. Lane et al. in 1959.

WEST, beginning new measurement.

- 39.360 Point for the closing corner of sections 2 and 3, T. 22 S., R. 11 W., determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S
S35
S3|S2
CC
T22SR11W
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 40.000 Point for the corner of sections 34 and 35 only, determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap marked:

T21SR11W
S34|S35
T22S
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

WEST, along the south boundary of section 34.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.360** Point for the 1/4 section corner of section 3 only, T. 22 S., R. 11 W., at a position 40.000 chains West of the closing corner of sections 2 and 3, T. 22 S., R. 11 W.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S

1/4 S3
T22SR11W
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 40.000** Point for the 1/4 section corner of section 34 only, determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21SR11W

1/4 S34
T22S
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 78.421** Point for the corner of sections 3 and 4 only, T. 22 S., R 11 W., at a position North of the corner of sections 15, 16, 21, and 22, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21S

S34
S4|S3
T22SR11W
2010

- 80.000** Point for the corner of sections 33 and 34 only, determined at record bearing and distance; there is no remaining evidence of the original corner.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21SR11W
S33|S34
S4
T22S
2010

Set a steel fence post alongside the aluminum drive rod.

Survey of a Portion of the South Boundary of
T. 21 S., R. 11 W., Salt Lake Meridian, Utah

WEST, along the south boundary of section 33.

- 38.421** Point for the 1/4 section corner of section 4 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

1/4 S4
T22SR11W
2010

- 40.000** Point for the 1/4 section corner of section 33 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR11W
1/4 S33
2010

- 78.421** Point for the corner of sections 4 and 5 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T21S
S33
S5|S4
T22SR11W
2010

- 80.000** Point for the corner of sections 32 and 33 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21SR11W
S32 | S33
S5
T22S
2010

WEST, along the south boundary of section 32.

- 38.421** Point for the 1/4 section corner of section 5 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

1/4 S5
T22SR11W
2010

- 40.000** Point for the 1/4 section corner of section 32 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 69 inches in the ground, with aluminum cap marked:

T21SR11W
1/4 S32
2010

- 78.421** Point for the corner of sections 5 and 6 only, T. 22 S., R 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 67 inches in the ground, with aluminum cap marked:

T21S
S32
S6 | S5
T22SR11W
2010

- 80.000** Point for the corner of sections 31 and 32 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 70 inches in the ground, with aluminum cap marked:

T21SR11W
S31 | S32
S6
T22S
2010

WEST, along the south boundary of section 31.

SURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 38.421 Point for the 1/4 section corner of section 6 only, T. 22 S., R. 11 W.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

1/4 S6
T22SR11W
2010

- 40.000 Point for the 1/4 section corner of section 31 only.

Set an aluminum drive rod, 72 inches long, 3/4 inch diameter, 68 inches in the ground, with aluminum cap marked:

T21SR11W
1/4 S31
2010

- 59.743 The corner of Townships 21 and 22 South, Range 11 West, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

Dependent Resurvey of the East Boundary of
Township 21 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Independent Resurvey Executed by
V.E. Lane et al. in 1959 that Superseded the Survey
Executed by J. Gorlinski in 1880

From the corner of Townships 21 and 22 South, Range 11 West, hereinbefore described.

N. 0°01.1' W., along the east boundary of section 36.

- 35.503 The 1/4 section corner of section 31 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 5 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. east of iron post.

N. 0°04.6' E., beginning new measurement.

- 4.480 The 1/4 section corner of section 36 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 3 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the iron post.

N. 0°00.8' W., beginning new measurement.

- 35.215 The witness corner of sections 30 and 31 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. southeast of iron post.

- 35.515 True point for the corner of sections 30 and 31 only, T. 21 S., R. 10 W., at record distance from its witness corner, falls in bottom of wash where it is impracticable to establish a permanent monument.
-

N. 0°01.5' E., beginning new measurement.

- 4.477 The corner of sections 25 and 36 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. southwest of iron post.

N. 0°01.1' W., along the east boundary of section 25.

- 35.357 The 1/4 section corner of section 30 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base to top, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. west of iron post.

N. 0°00.8' W., beginning new measurement.

- 4.627 The 1/4 section corner of section 25 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 10 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. southwest of iron post.

N. 0°00.3' E., beginning new measurement.

- 35.373 The corner of sections 19 and 30 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a mound of stone, with brass cap

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. south of iron post.

N. 0°07.3' W., beginning new measurement.

- 4.629 The corner of sections 24 and 25 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 2 ft. northeast of iron post.

N. 0°00.4' W., along the east boundary of section 24.

- 35.357 The 1/4 section corner of section 19 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. south of iron post.

N. 0°08.3' W., beginning new measurement.

- 4.624 The 1/4 section corner of section 24 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. northeast of iron post.

N. 0°00.1' E., beginning new measurement.

- 35.370 The corner of sections 18 and 19 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 4 ft. base to top, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

N. 0°03.6' W., beginning new measurement.

- 4.613 The corner of sections 13 and 24 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 10 inches above ground, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°02.1' W., along the east boundary of section 13.

- 35.361 The 1/4 section corner of section 18 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

N. 0°04.1' E., beginning new measurement.

- 4.638 The 1/4 section corner of section 13 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. south of iron post.

N. 0°01.5' W., beginning new measurement.

- 35.371 The corner of sections 7 and 18 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. southwest of iron post.

N. 0°00.5' W., beginning new measurement.

- 4.619 The corner of sections 12 and 13 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 5 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

N. 0°02.2' W., along the east boundary of section 12.

- 35.372 The 1/4 section corner of section 7 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post 1 ft. south of iron post.

N. 0°04.0' W., beginning new measurement.

- 4.628 The 1/4 section corner of section 12 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above a collar of stone, with brass cap marked as described in

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

the official record of the 1959 resurvey.

Set a steel fence post 1 ft. southwest of iron post.

N. 0°02.2' W., beginning new measurement.

- 35.354 The corner of sections 6 and 7 only, T. 21 S., R. 10 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 3 inches above ground, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

N. 0°01.2' E., beginning new measurement.

- 4.636 The corner of sections 1 and 12 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1959 resurvey.

Set a steel fence post alongside the iron post.

N. 0°01.0' E., along the east boundary of section 1.

- 35.370 Point for the 1/4 section corner of section 6 only, T. 21 S, R. 10 W., at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

```

      T21S
    R11W R10W
      | 1/4
      | S6
    2009
  
```

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 40.000 Point for the 1/4 section corner of section 1 only, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S
R11W R10W
1/4 |
S1 |
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

- 56.070 The closing corner of Township 21 South, Ranges 10 and 11 West, on the Fourth Standard Parallel South, monumented with a stainless steel post as described in the official record of the dependent resurvey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

From this corner, the southeast township corner of Township 20 South, Range 11 West, bears **S. 89°59.8' E., 16.740** chains distance, monumented with a stainless steel post as described in the official record of the dependent resurvey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

The Dependent Resurvey of a Portion of the Subdivisional Lines in
Township 21 South, Range 11 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed
by V.E. Lane et al. in 1959

From the corner of sections 1, 2, 35, and 36, on the south boundary of the township, hereinbefore described.

N. 0°00.8' W., between sections 35 and 36.

- 40.541 The 1/4 section corner of sections 35 and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 survey.

Raise a mound of stone, 2 ft. base, around iron post to top.

Set a steel fence post 1 ft. northeast of iron post.

N. 0°02.3' W., beginning new measurement.

- 39.995 The corner of sections 25, 26, 35, and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 12 inches above a collar of stone, with brass cap marked as described in the official record of the 1959 survey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post 1 ft. southwest of iron post.

From the corner of sections 25 and 36 only, on the east boundary of the township, hereinbefore described.

N. 89°59.5' W., between sections 25 and 36.

- 40.058 The 1/4 section corner of sections 25 and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 4 ft. base to top, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post 1 ft. north of iron post.

S. 89°51.0' W., beginning new measurement.

- 39.984 The corner of sections 25, 26, 35, and 36.
-

Survey of a Portion of the Subdivisional Lines in
Township 21 South, Range 11 West, Salt Lake Meridian, Utah

N. 0°01.6' W., between sections 25 and 26.

- 40.000 Point for the 1/4 section corner of sections 25 and 26.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to solid rock, in a mound of stone, 4 ft. base, to top, with aluminum cap marked:

T21S R11W
1/4
S26 | S25
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

- 80.000 Point for the corner of sections 23, 24, 25, and 26.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R11W
S23 | S24
S26 | S25
2009

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Raise a mound of stone, 3 ft. base, 1.5 ft. high, west of corner.

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 24 and 25 only, on the east boundary of the township, hereinbefore described.

S. 89°56.4' W., between sections 24 and 25.

40.022 Point for the 1/4 section corner of sections 24 and 25.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R11W
S24
1/4 ———
S25
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

80.044 The corner of sections 23, 24, 25, and 26.

N. 0°01.6' W., between sections 23 and 24.

40.000 Point for the 1/4 section corner of sections 23 and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S23 | S24
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a west facing, rocky slope.

80.000 Point for the corner of sections 13, 14, 23, and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
S14 | S13
S23 | S24
2009

Set a steel fence post alongside the aluminum post.

Corner is located 32 ft. north of a drainage, course westerly.

From the corner of sections 13 and 24 only, on the east boundary of the township, hereinbefore described.

S. 89°57.9' W., between sections 13 and 24.

40.022 Point for the 1/4 section corner of sections 13 and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R11W
S13
1/4 ———
S24
2009

Set a steel fence post alongside the aluminum post.

Corner is located on top of a sandy knoll, 30 ft. east of a drainage, course northerly.

80.044 The corner of sections 13, 14, 23, and 24.

N. 0°01.6' W., between sections 13 and 14.

40.000 Point for the 1/4 section corner of sections 13 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S14 | S13
2009

Set a steel fence post alongside the aluminum post.

Corner is located on flat bench in scattered sagebrush and grasses.

80.000 Point for the corner of sections 11, 12, 13, and 14.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

T21S R11W
S11 | S12
S14 | S13
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

From the corner of sections 12 and 13 only, on the east boundary of the township, hereinbefore described.

S. 89°58.4' W., between sections 12 and 13.

40.016 Point for the 1/4 section corner of sections 12 and 13, falls in a wash, course westerly, where it is impracticable to establish a permanent monument.

40.266 Point selected for the witness corner to the 1/4 section corner of sections 12 and 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R11W
S12
1/4 ———> WC
S13
2009

Set a steel fence post alongside the aluminum post.

80.032 The corner of sections 11, 12, 13, and 14.

N. 0°01.6' W., between sections 11 and 12.

40.000 Point for the 1/4 section corner of sections 11 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S11 | S12
2009

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

80.000 Point for the corner of sections 1, 2, 11, and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R11W	
S2	S1
S11	S12
2009	

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

From the corner of sections 1 and 12 only, on the east boundary of the township, hereinbefore described.

S. 89°58.8' W., between sections 1 and 12.

40.002 Point for the 1/4 section corner of sections 1 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

T21S R11W	
S1	
1/4	—————
S12	
2009	

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

80.004 The corner of sections 1, 2, 11, and 12.

N. 0°01.6' W., between sections 1 and 2.

40.000 Point for the 1/4 section corner of sections 1 and 2.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
1/4
S2 | S1
2010

- 56.142** The corner of sections 1 and 2 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

From the corner of sections 34 and 35 only, hereinbefore described.

N. 0°02.3' W., between sections 34 and 35.

- 40.548** Point for the 1/4 section corner of sections 34 and 35.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S34 | S35
2009

Corner is located in Sevier Lake bed.

Set a steel fence post alongside aluminum post.

- 80.548** Intersect the sectional correction line.

Point for the corner of sections 26, 27, 34, and 35.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 2 ft. base to top, with aluminum cap marked:

T21S R11W
S27 | S26
S34 | S35
2009

Set a steel fence post alongside aluminum post.

Corner is located in Sevier Lake bed.

From the corner of sections 25, 26, 35, and 36.

WEST, between sections 26 and 35, on a sectional correction line.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

39.995 Point for the 1/4 section corner of sections 26 and 35.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R11W
S26
1/4 —————
S35
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

79.990 The corner of sections 26, 27, 34, and 35.

N. 0°02.3' W., between sections 26 and 27.

40.000 Point for the 1/4 section corner of sections 26 and 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S27 | S26
2009

Set a steel fence post alongside the aluminum post.

80.000 Point for the corner of sections 22, 23, 26, and 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R11W
S22 | S23
S27 | S26
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

From the corner of sections 23, 24, 25, and 26.

WEST, between sections 23 and 26.

39.995 Point for the 1/4 section corner of sections 23 and 26.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R11W
S23
1/4 —————
S26
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

79.990 The corner of sections 22, 23, 26, and 27.

N. 0°02.3' W., between sections 22 and 23.

40.000 Point for the 1/4 section corner of sections 22 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S22 | S23
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

80.000 Point for the corner of sections 14, 15, 22, and 23.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S15 | S14
S22 | S23
2010

From the corner of sections 13, 14, 23, and 24.

WEST, between sections 14 and 23.

39.995 Point for the 1/4 section corner of sections 14 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
S14
1/4 —————
S23
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

79.990 The corner of sections 14, 15, 22, and 23.

N. 0°02.3' W., between sections 14 and 15.

40.000 Point for the 1/4 corner of sections 14 and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S15 | S14
2010

80.000 Point for the corner of sections 10, 11, 14, and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S10 | S11
S15 | S14
2010

From the corner of sections 11, 12, 13, and 14.

WEST, between sections 11 and 14.

39.995 Point for the 1/4 section corner of sections 11 and 14.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S11
1/4 —————
S14
2010

79.990 The corner of sections 10, 11, 14, and 15.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°02.3' W., between sections 10 and 11.

40.000 Point for the 1/4 section corner of sections 10 and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S10 | S11
2010

80.000 Point for the corner of sections 2, 3, 10, and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
S3 | S2
S10 | S11
2010

From the corner of sections 1, 2, 11, and 12.

WEST, between sections 2 and 11.

39.995 Point for the 1/4 section corner of sections 2 and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S2
1/4 —————
S11
2010

79.990 The corner of sections 2, 3, 10, and 11.

N. 0°02.3' W., between sections 2 and 3.

40.000 Point for the 1/4 section corner of sections 2 and 3.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
1/4
S3 | S2
2010

- 56.168** The corner of sections 2 and 3 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

From the corner of sections 33 and 34 only, on the south boundary of the township, hereinbefore described.

N. 0°03.0' W., between sections 33 and 34.

- 40.548** Point for the 1/4 section corner of sections 33 and 34.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, flush with the ground, with aluminum cap marked:

T21S R11W
1/4
S33 | S34
2010

- 80.548** Intersect the sectional correction line.

Point for the corner of sections 27, 28, 33, and 34.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
S28 | S27
S33 | S34
2010

From the corner of sections 26, 27, 34, and 35.

WEST, between sections 27 and 34, on a sectional correction line.

- 40.000** Point for the 1/4 section corner of sections 27 and 34.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
S27
1/4 —————
S34
2009

Set a steel fence post alongside the aluminum post.

80.000 The corner of sections 27, 28, 33, and 34.

N. 0°03.0' W., between sections 27 and 28.

40.000 Point for the 1/4 section corner of sections 27 and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S28 | S27
2010

80.000 Point for the corner of sections 21, 22, 27, and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
S21 | S22
S28 | S27
2010

From the corner of sections 22, 23, 26, and 27.

WEST, between sections 22 and 27.

40.000 Point for the 1/4 section corner of sections 22 and 27.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S22
1/4 —————
S27
2010

80.000 The corner of sections 21, 22, 27, and 28.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°03.0' W., between sections 21 and 22.

40.000 Point for the 1/4 section corner of sections 21 and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S21 | S22
2010

80.000 Point for the corner of sections 15, 16, 21, and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S16 | S15
S21 | S22
2010

From the corner of sections 14, 15, 22, and 23.

WEST, between sections 15 and 22.

40.000 Point for the 1/4 section corner of sections 15 and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S15
1/4 ———
S22
2010

80.000 The corner of sections 15, 16, 21, and 22.

N. 0°03.0' W., between sections 15 and 16.

40.000 Point for the 1/4 section corner of sections 15 and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S16 | S15
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

80.000 Point for the corner of sections 9, 10, 15, and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W	
S9	S10
S16	S15
2010	

From the corner of sections 10, 11, 14, and 15.

WEST, between sections 10 and 15.

40.000 Point for the 1/4 section corner of sections 10 and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W	
S10	
1/4	—————
S15	
2010	

80.000 The corner of sections 9, 10, 15, and 16.

N. 0°03.0' W., between sections 9 and 10.

40.000 Point for the 1/4 section corner of sections 9 and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W	
1/4	
S9	S10
2010	

80.000 Point for the corner of sections 3, 4, 9, and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W	
S4	S3
S9	S10
2010	

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 2, 3, 10, and 11.

WEST, between sections 3 and 10.

40.000 Point for the 1/4 section corner of sections 3 and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S3
1/4 ———
S10
2010

80.000 The corner of sections 3, 4, 9, and 10.

N. 0°03.0' W., between section 3 and 4.

40.000 Point for the 1/4 section corner of sections 3 and 4.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S4 | S3
2010

56.109 The corner of sections 3 and 4 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

From the corner of sections 32 and 33 only, hereinbefore described.

N. 0°03.7' W., between sections 32 and 33.

40.548 Point for the 1/4 section corner of sections 32 and 33.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S32 | S33
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

80.548 Intersect the sectional correction line.

Point for the corner of sections 28, 29, 32, and 33.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W	
S29	S28
S32	S33
2010	

From the corner of sections 27, 28, 33, and 34.

WEST, between sections 28 and 33, on a sectional correction line.

40.000 Point for the 1/4 section corner of sections 28 and 33.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W	
S28	
1/4	———
S33	
2010	

80.000 The corner of sections 28, 29, 32, and 33.

N. 0°03.7' W., between sections 28 and 29.

40.000 Point for the 1/4 section corner of sections 28 and 29.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W	
1/4	
S29	S28
2010	

80.000 Point for the corner of sections 20, 21, 28, and 29.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W	
S20	S21
S29	S28
2010	

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 21, 22, 27, and 28.

WEST, between sections 21 and 28.

40.000 Point for the 1/4 section corner of sections 21 and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
S21
1/4 ———
S28
2010

80.000 Point for the corner of sections 20, 21, 28, and 29.

N. 0°03.7' W., between sections 20 and 21.

40.000 Point for the 1/4 section corner of sections 20 and 21.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S20 | S21
2010

80.000 Point for the corner of sections 16, 17, 20, and 21.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
S17 | S16
S20 | S21
2010

From the corner of sections 15, 16, 21, and 22.

WEST, between sections 16 and 21.

40.000 Point for the 1/4 section corner of sections 16 and 21.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
S16
1/4 —————
S21
2010

80.000 The corner of sections 16, 17, 20, and 21.

N. 0°03.7' W., between sections 16 and 17.

40.000 Point for the 1/4 section corner of sections 16 and 17.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S17 | S16
2010

80.000 Point for the corner of sections 8, 9, 16, and 17.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 65 inches in the ground, with aluminum cap marked:

T21S R11W
S8 | S9
S17 | S16
2010

From the corner of sections 9, 10, 15, and 16.

WEST, between sections 9 and 16.

40.000 Point for the 1/4 section corner of sections 9 and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 64 inches in the ground, with aluminum cap marked:

T21S R11W
S9
1/4 —————
S16
2010

80.000 The corner of sections 8, 9, 16, and 17.

N. 0°03.7' W., between sections 8 and 9.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

40.000 Point for the 1/4 section corner of sections 8 and 9.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S8 | S9
2010

80.000 Point for the corner of sections 4, 5, 8, and 9.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S5 | S4
S8 | S9
2010

From the corner of sections 3, 4, 9, and 10,

WEST, between sections 4 and 9.

40.000 Point for the 1/4 section corner of sections 4 and 9.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
S4
1/4 —————
S9
2010

80.000 The corner of sections 4, 5, 8, and 9.

N. 0°03.7' W., between sections 4 and 5.

40.000 Point for the 1/4 section corner of sections 4 and 5.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S5 | S4
2010

56.113 The corner of sections 4 and 5 only, on the Fourth Standard

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

From the corner of sections 31 and 32 only, on the south boundary of the township, hereinbefore described.

N. 0°04.4' W., between sections 31 and 32.

40.548 Point for the 1/4 section corner of sections 31 and 32.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S31 S32
2010

80.548 Intersect the sectional correction line.

Point for the corner of sections 29, 30, 31, and 32.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
S30 S29
S31 S32
2010

From the corner of sections 28, 29, 32, and 33.

WEST, between sections 29 and 32, on a sectional correction line.

40.000 Point for the 1/4 section corner of sections 29 and 32.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
S29
1/4 —————
S32
2010

80.000 The corner of sections 29, 30, 31, and 32.

WEST, between sections 30 and 31, on a sectional correction line.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

40.000 Point for the 1/4 section corner of sections 30 and 31.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
S30
1/4 —————
S31
2010

59.628 The corner of sections 30 and 31 only, on the west boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

From the corner of sections 29, 30, 31, and 32.

N. 0°04.4' W., between sections 29 and 30.

40.000 Point for the 1/4 section corner of sections 29 and 30.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S30 | S29
2010

80.000 Point for the corner of sections 19, 20, 29, and 30.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R11W
S19 | S20
S30 | S29
2010

From the corner of sections 20, 21, 28, and 29.

WEST, between sections 20 and 29.

40.000 Point for the 1/4 section corner of sections 20 and 29.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R11W
S20
1/4 —————
S29
2010

80.000 The corner of sections 19, 20, 29, and 30.

WEST, between sections 19 and 30.

40.000 Point for the 1/4 section corner of sections 19 and 30.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
S19
1/4 —————
S30
2010

59.513 The corner of sections 19 and 30 only, on the west boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

From the corner of sections 19, 20, 29, and 30.

N. 0°04.4' W., between sections 19 and 20.

40.000 Point for the 1/4 section corner of sections 19 and 20.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S19 | S20
2010

80.000 Point for the corner of sections 17, 18, 19, and 20.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W
S18 | S17
S19 | S20
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 16, 17, 20, and 21,

WEST, between sections 17 and 20.

40.000 Point for the 1/4 section corner of sections 17 and 20.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S17
1/4 ———
S20
2010

80.000 The corner of sections 17, 18, 19, and 20.

WEST, between sections 18 and 19.

40.000 Point for the 1/4 section corner of sections 18 and 19.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W
S18
1/4 ———
S19
2010

59.398 The corner of sections 18 and 19 only, on the west boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

From the corner of sections 17, 18, 19, and 20.

N. 0°04.4' W., between sections 17 and 18.

40.000 Point for the 1/4 section corner of sections 17 and 18.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S18 | S17
2010

80.000 Point for the corner of sections 7, 8, 17, and 18.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W	
S7	S8
S18	S17
2010	

From the corner of sections 8, 9, 16, and 17.

WEST, between sections 8 and 17.

40.000 Point for the 1/4 section corner of section 8 and 17.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R11W	
S8	
1/4	—————
S17	
2010	

80.000 The corner of section 7, 8, 17, and 18.

WEST, between sections 7 and 18.

40.000 Point for the 1/4 section corner of section 7 and 18.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R11W	
S7	
1/4	—————
S18	
2010	

59.283 The corner of sections 7 and 18 only, on the west boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

From the corner of sections 7, 8, 17, and 18.

N. 0°04.4' W., between sections 7 and 8.

40.000 Point for the 1/4 section corner of sections 7 and 8.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S7 | S8
2010

80.000 Point for the corner of sections 5, 6, 7, and 8.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S6 | S5
S7 | S8
2010

From the corner of sections 4, 5, 8, and 9.

WEST, between sections 5 and 8.

40.000 Point for the 1/4 section corner of sections 5 and 8.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S5
1/4 ———
S8
2010

80.000 The corner of sections 5, 6, 7, and 8.

WEST, between sections 6 and 7.

40.000 Point for the 1/4 section corner of sections 6 and 7.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
S6
1/4 ———
S7
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 21 S., R. 11 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 59.171 The corner of sections 6 and 7 only, on the west boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 21 S., R. 12 W., executed concurrently under this same group.

From the corner of sections 5, 6, 7, and 8.

N. 0°04.4' W., between sections 5 and 6.

- 40.000 Point for the 1/4 section corner of sections 5 and 6.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R11W
1/4
S6 | S5
2010

- 56.117 The corner of sections 5 and 6 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

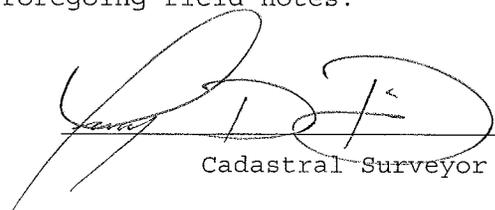
FIELD ASSISTANTS

Name	Capacity
2009 Bureau of Land Management Assistants:	
Adrian M. Kurip	Survey Technician
Calvert C. Norton	Survey Technician
Robert Robbins	Survey Aid
Vinnie Porter	Survey Aid
2010 Diamondback Land Surveying Assistants:	
Trent J. Keenan	Party Chief
Jeffrey C. Miller	Party Chief
Robert L. Carrington	Chainman
Verland K. Pierson	Chainman
Roger L. Berriman	Chainman
Doug Morlan	Chainman
Jason P. Justice	Chainman

CERTIFICATE OF SURVEY

We, *Daniel T. Gillins, Cadastral Surveyor*, and *Jeremy D. Davis, Cadastral Surveyor* HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *24th day of July, 2009*, and the Supplemental Special Instructions bearing the date of the *27th day of January, 2010*, we have *dependently resurveyed and surveyed the south boundary, dependently resurveyed the east boundary and a portion of the subdivisional lines, and surveyed a portion of the subdivisional lines, in Township 21 South, Range 11 West*, of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 28, 2010
Date


Cadastral Surveyor

June 29, 2010
Date


Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey and survey of the south boundary, dependent resurvey of the east boundary and a portion of the subdivisional lines, and the survey of a portion of the subdivisional lines in Township 21 South, Range 11 West, Salt Lake Meridian, Utah*,

Executed by *Daniel T. Gillins, Cadastral Surveyor*, and *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

June 30, 2010
Date


Chief Cadastral Surveyor for Utah