

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
THE WEST BOUNDARY (SEVIER LAKE GUIDE MERIDIAN)
AND A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SURVEY OF THE EAST BOUNDARY
AND A PORTION OF THE SUBDIVISIONAL LINES

IN

TOWNSHIP 21 SOUTH, RANGE 12 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Daniel T. Gillins
Cadastral Surveyor

And

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved *July 24, 2009*, and Supplemental Special Instructions dated and approved *January 27, 2010*, which provided for the surveys included under Group Number *1114*, and Assignment Instructions dated *July 24, 2009*.

Survey commenced *July 26, 2009*
Survey completed *February 12, 2010*

TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of the west boundary (Sevier Lake Guide Meridian) and a portion of the subdivisional lines, and the survey of the east boundary and a portion of the subdivisional lines in T. 21 S., R. 12 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY				
Portion	A. J. Stewart, Jr.	1882		
Portion			V. E. Lane et al.	1959
All	D.T. Gillins & J.D. Davis (concurrent)	2009-10	D.T. Gillins & J.D. Davis (concurrent)	2009-10
EAST BOUNDARY				
Unsurveyed				
WEST BOUNDARY				
All	A. J. Stewart, Jr.	1882		
All			W. W. Bandy	1925
Portion			V. E. Lane et al.	1959
NORTH BOUNDARY (Fourth Standard Parallel South)				
Portion	J. Gorlinski	1880		
Portion	A. J. Stewart, Jr.	1885	A. J. Stewart, Jr.	1885
Portion			V. E. Lane et al.	1959
All	D.T. Gillins & C.C. Norton (concurrent)	2009-10	D.T. Gillins & C.C. Norton (concurrent)	2009-10
SUBDIVISION				
Portion	V. E. Lane et al.	1959		

INDEX DIAGRAM

Township 21 South, Range 12 West.

5	6	38	5	9	4	31	3	25	2	21	1	15
	37		37		31		30		25		20	
4	7	36	8	8	9	30	10	24	11	20	12	14
	36		36		30		29		24		19	
4	18	35	17	8	16	29	15	23	14	19	13	13
	34		34		29		28		23		18	
4	19	33	20	7	21	28	22	23	23	18	24	12
	33		33		27		27		22		18	
3	30	32	29	7	28	27	27	22	26	17	25	11
	32											
			10		26		26		21		17	
3	31	9	32	6	33	25	34	21	35	16	36	10

TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The survey commenced in the summer of 2009, executed by Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors, in accordance with the specification set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1114, dated July 24, 2009. However, due to high amounts of rainfall in 2009, a portion of the Sevier Lake bed was so wet and muddy that corners could not be monumented prior to winter. In order to expedite field survey time, Trent J. Keenan, a principal of Diamondback Land Surveying of Las Vegas, Nevada (Utah Registered Land Surveyor No. 5790532) was contracted in 2010 to complete the monumentation of the said muddy portion of the Sevier Lake bed in the township, under the supervision of Daniel T. Gillins, Cadastral Surveyor of the Bureau of Land Management. The establishment and monumentation of corners in the Sevier Lake bed in 2010 was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Supplemental Special Instructions for Group No. 1114, dated January 27, 2010.

The directions of the lines were determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): EGAN_BRGN_NV1996 CORS ARP, DELTAMUNI_UT2004 CORS ARP, and MARYSVALE_UT2006 CORS ARP.

The geographic position of the corner of Townships 21 and 22 South, Range 12 West, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°56'08.373" N.**,
 Longitude: **113°08'25.632" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,
 Network Accuracy = 0.2 meter at 95% confidence

The geographic position of the corner of sections 1, 6, 7, and 12, on the west boundary of the township, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **39°00'29.248" N.**,
 Longitude: **113°15'00.773" W.**, N.A.D. 1983 (CORS 96), epoch 2002.00,
 Network Accuracy = 0.2 meter at 95% confidence

DEPENDENT RESURVEY OF THE WEST BOUNDARY
 (SEVIER LAKE GUIDE MERIDIAN),
 T. 21 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of the West Boundary
 (Sevier Lake Guide Meridian),
 T. 21 S., R. 12 W., Salt Lake Meridian, Utah

Reestablishment of the Independent Resurvey Executed
 by W.W. Bandy in 1925 that Superseded the Survey
 Executed by A.J. Stewart, Jr. in 1882.

Beginning at the corner of Townships 21 and 22 South, Ranges 12 and 13 West, monumented with an iron post as described in the official record of the dependent resurvey of the west boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°02.9' E., between sections 31 and 36.

- 40.003 The 1/4 section corner of sections 31 and 36, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 3 ft. base, 1 1/2 ft. high, west of corner.

Set a steel fence post alongside iron post.

N. 0°02.2' E., beginning new measurement.

- 39.989 The corner of sections 25, 30, 31, and 36, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above a mound of stone, 4 ft. base, 8 inches high, with brass cap marked as described in the official record of the 1925 resurvey.

Set a steel fence post alongside iron post.

N. 0°01.4' W., between sections 25 and 30.

- 39.972 The 1/4 section corner of sections 25 and 30, monumented with an iron post, 1 inch diameter, loosely set, projecting 8 inches above a mound of stone, 4 ft. base, 20 inches high, with brass cap marked as described in the official record of the 1925 resurvey.

Raise the mound of stone, 4 ft. base, around iron post to top.

Set a steel fence post 3 ft. east of iron post.

Corner is located in a wash, drains east-northeast.

N. 0°05.6' E., beginning new measurement.

DEPENDENT RESURVEY OF THE WEST BOUNDARY
 (SEVIER LAKE GUIDE MERIDIAN),
 T. 21 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.004 The corner of sections 19, 24, 25, and 30, monumented with an iron post, 2 inches diameter, firmly set, projecting 3 inches above a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap marked as described in the official record of the 1925 resurvey.

Set a steel fence post alongside iron post.

N. 0°01.7' E., between sections 19 and 24.

- 39.984 The 1/4 section corner of sections 19 and 24, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey.

Set a steel fence post alongside iron post.

N. 0°02.2' E., beginning new measurement.

- 40.016 The corner of sections 13, 18, 19, and 24, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey.

Set a steel fence post alongside iron post.

N. 0°01.2' E., between sections 13 and 18.

- 40.008 The 1/4 section corner of sections 13 and 18, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey.

N. 0°01.4' E., beginning new measurement.

- 39.983 The corner of sections 7, 12, 13, and 18, monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, 6 inches high, with brass cap marked as described in the official record of the 1925 resurvey.

Corner is located on south facing slope of small hill.

N. 0°02.4' E., between sections 7 and 12.

- 39.992 The 1/4 section corner of sections 7 and 12, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 2 ft. base, 1 ft. high, west of corner.
-

DEPENDENT RESURVEY OF THE WEST BOUNDARY
(SEVIER LAKE GUIDE MERIDIAN),
T. 21 S., R. 12 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°01.8' E., beginning new measurement.

- 39.974 The corner of sections 1, 6, 7, and 12, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey; with a mound of stone, 2 ft. base, 1 ft. high, west of corner.
-

N. 0°01.3' E., along the west boundary of section 6.

- 39.972 The 1/4 section corner of sections 1 and 6, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1925 resurvey.
-

Reestablishment of the Dependent Resurvey Executed
by V.E. Lane et al. in 1959 of the Independent Resurvey
Executed by W.W. Bandy in 1925 that Superseded the Survey
Executed by A.J. Stewart, Jr. in 1882.

N. 0°02.5' E., beginning new measurement.

- 18.113 The closing corner of Townships 20 and 21 South, Range 13 West, monumented with an iron post, 3 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1925 survey; with a mound of stone, 3 ft. base, 1 ft. high, west of corner.

Set a steel fence post alongside the iron post.

- 28.582 The monument originally set for the closing corner of Township 20 South, Ranges 12 and 13 West, in 1925, and amended in 1959; an iron post, 3 inches diameter, firmly set, projecting 5 inches above the ground, with brass cap marked as described in the official record of the 1959 resurvey; with a limestone, 19 x 6 x 5 inches, loosely set along west side of iron post, plainly marked with 6 notches on 3 edges, in a mound of stone, 3 ft. base, 1 ft. high.

- 28.740 The closing corner of Township 20 South, Range 13 West, and Township 21 South, Range 12 West, at the intersection with the Fourth Standard Parallel South, monumented with an iron post, 2 1/2 inches diameter, as described in the official record of the dependent resurvey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.

Set a steel fence post alongside iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines in
Township 21 South, Range 12 West, Salt Lake Meridian, Utah

Reestablishment of the Survey Executed
by V.E. Lane et al. in 1959

From the corner of sections 4, 5, 32, and 33, on the south boundary of the township, monumented with an iron post as described in the official record of the dependent resurvey of the north boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°01.6' W., between sections 32 and 33.

40.000 Point for the 1/4 section corner of sections 32 and 33, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S32 | S33
2009

Raise a small mound of stone, around iron post to top.

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

80.000 Point for the corner of sections 28, 29, 32, and 33, determined by two-point control, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
S29 | S28
S32 | S33
2009

Set a steel fence post alongside aluminum post.

Corner is located in Sevier Lake bed.

N. 0°01.0' E., between sections 28 and 29.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

- 40.004** Point for the 1/4 section corner of sections 28 and 29, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S29 | S28
2009

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

- 80.008** Point for the corner of sections 20, 21, 28, and 29, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
S20 | S21
S29 | S28
2009

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

N. 0°01.0' E., between sections 20 and 21.

- 40.004** Point for the 1/4 section corner of sections 20 and 21, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S20 | S21
2009

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

- 80.008** Point for the corner of sections 16, 17, 20, and 21, at proportionate distance, there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W	
S17	S16
S20	S21
2009	

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

N. 0°01.0' E., between sections 16 and 17.

- 40.004 Point for the 1/4 section corner of sections 16 and 17, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W	
1/4	
S17	S16
2009	

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

- 80.008 Point for the corner of sections 8, 9, 16, and 17, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W	
S8	S9
S17	S16
2009	

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

N. 0°01.0' E., between sections 8 and 9.

- 40.004 Point for the 1/4 section corner of sections 8 and 9, at proportionate distance, there is no remaining evidence of the

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S8 | S9
2009

Set a steel fence post alongside iron post.

Corner is located in Sevier Lake bed.

80.008 Point for the corner of sections 4, 5, 8, and 9, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R12W
S5 | S4
S8 | S9
2009

Set a steel fence post alongside iron post.

N. 0°01.0' E., between sections 4 and 5.

40.004 The 1/4 section corner of sections 4 and 5, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside the iron post.

N. 0°00.4' W., beginning new measurement.

30.381 The closing corner of sections 4 and 5, on the Fourth Standard Parallel South, monumented with an iron post as described in the official record of the dependent resurvey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.

From the corner of sections 5, 6, 31, and 32, on the south boundary of the township, monumented with an iron post as described in the official record of the dependent resurvey of the north boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°01.3' W., between sections 31 and 32.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

39.990 The 1/4 section corner of sections 31 and 32, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside iron post.

N. 0°01.5' W., beginning new measurement.

40.000 The corner of sections 29, 30, 31, and 32, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside iron post.

Corner is located 114 ft. east of a wash, drains northeast.

From the corner of sections 28, 29, 32, and 33.

N. 89°59.0' W., between sections 29 and 32.

39.970 The 1/4 section corner of sections 29 and 32, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1959 survey.

Set a steel fence post alongside iron post.

N. 89°59.1' W., beginning new measurement.

39.983 The corner of sections 29, 30, 31, and 32.

Survey of the East Boundary of
Township 21 South, Range 12 West, Salt Lake Meridian, Utah

From the corner of Townships 21 and 22 South, Range 12 West, monumented with an aluminum drive rod as described in the official record of the survey of the east boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

NORTH, along the east boundary of section 36.

13.736 Point for the corner of Townships 21 and 22 South, Range 11 West, at a position **WEST** of the 1/4 section corner of sections 2 and 35, on the south boundary of T. 21 S., R. 11 W.

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	R11W
S36	S31
	S6
2010	

40.000 Point for the 1/4 section corner of section 36 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	
1/4	
S36	
2010	

54.285 Point for the 1/4 section corner of section 31 only, T. 21 S., R. 11 W., at a position 40.000 chains South of the corner of sections 30 and 31 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R11W	
	1/4
	S31
2010	

80.000 Point for the corner of sections 25 and 36 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	R11W
S25	S31
S36	
2010	

NORTH, along the east boundary of section 25.

14.285 Point for the corner of sections 30 and 31 only, T. 21 S., R. 11 W., at a position **WEST**, on a sectional correction line, from the corner of sections 25, 26, 35, and 36, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, with aluminum cap marked:

T21S	
R12W	R11W
S25	S30
	S31
2010	

40.000 Point for the 1/4 section corner of section 25 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	
1/4	
S25	
2010	

54.285 Point for the 1/4 section corner of section 30 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R11W	
	1/4
	S30
2010	

80.000 Point for the corner of sections 24 and 25 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	R11W
S24	S30
S25	
2010	

NORTH, along the east boundary of section 24.

14.285 Point for the corner of sections 19 and 30 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S	
R12W	R11W
S24	S19
	S30
2010	

40.000 Point for the 1/4 section corner of section 24 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	
1/4	
S24	
2010	

54.285 Point for the 1/4 section corner of section 19 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R11W	
	1/4
	S19
2010	

80.000 Point for the corner of sections 13 and 24 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S	
R12W	R11W
S13	S19
S24	
2010	

NORTH, along the east boundary of section 13.

14.285 Point for the corner of sections 18 and 19 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S
R12W R11W
S13 | S18
 | S19
 |
 2010

40.000 Point for the 1/4 section corner of section 13 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S
R12W
1/4 |
S13 |
 |
 2010

54.285 Point for the 1/4 section corner of section 18 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S
R11W
 | 1/4
 | S18
 |
 2010

80.000 Point for the corner of sections 12 and 13 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S
R12W R11W
S12 | S18
S13 |
 |
 2010

NORTH, along the east boundary of section 12.

14.285 Point for the corner of sections 7 and 18 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

T21S
R12W R11W
S12 | S7
 | S18
 |
 2010

40.000 Point for the 1/4 section corner of section 12 only.

Set an aluminum drive rod, 3/4 inch diameter, 9 ft. long, 8 ft. 8 inches in the ground, with aluminum cap marked:

T21S
R12W
1/4 |
S12 |
 |
 2010

54.285 Point for the 1/4 section corner of section 7 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S
R11W
 | 1/4
 | S7
 |
 2010

80.000 Point for the corner of sections 1 and 12 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S
R12W R11W
 | S1 S7
 | S12
 |
 2010

NORTH, along the east boundary of section 1.

14.285 Point for the corner of sections 6 and 7 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

SURVEY OF THE EAST BOUNDARY OF
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S
R12W R11W
S1 | $\frac{S6}{S7}$
2010

40.000 Point for the 1/4 section corner of section 1 only.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S
R12W
1/4 |
S1 |
2010

54.285 Point for the 1/4 section corner of section 6 only, T. 21 S., R. 11 W.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S
R11W
| 1/4
| S6
2010

70.405 The corner of Township 21 South, Ranges 11 and 12 West, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 11 W., executed concurrently under Group No. 1115.

Survey of a Portion of the Subdivisional Lines in
Township 21 South, Range 12 West, Salt Lake Meridian, Utah

From the corner of sections 1, 2, 35, and 36, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the north boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°00.7' W., between sections 35 and 36.

40.000 Point for the 1/4 section corner of sections 35 and 36.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W
1/4
S35 | S36
2010

80.000 Point for the corner of sections 25, 26, 35, and 36.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
S26 | S25
S35 | S36
2010

From the corner of sections 25 and 36 only, on the east boundary of the township, hereinbefore described.

WEST, between sections 25 and 36.

40.000 Point for the 1/4 section corner of sections 25 and 36.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S25
1/4 ———
S36
2010

80.000 The corner of sections 25, 26, 35, and 36.

N. 0°00.7' W., between sections 25 and 26.

40.000 Point for the 1/4 section corner of sections 25 and 26.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S26 | S25
2010

80.000 Point for the corner of sections 23, 24, 25, and 26.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 65 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W	
S23	S24
S26	S25
2010	

From the corner of sections 24 and 25 only, on the east boundary of the township, hereinbefore described.

WEST, between sections 24 and 25.

40.000 Point for the 1/4 section corner of sections 24 and 25.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W	
S24	
1/4	—————
S25	
2010	

80.000 The corner of sections 23, 24, 25, and 26.

N. 0°00.7' W., between sections 23 and 24.

40.000 Point for the 1/4 section corner of sections 23 and 24.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W	
1/4	
S23	S24
2010	

80.000 Point for the corner of sections 13, 14, 23, and 24.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 65 inches in the ground, with aluminum cap marked:

T21S R12W	
S14	S13
S23	S24
2010	

From the corner of sections 13 and 24 only, on the east boundary of the township, hereinbefore described.

WEST, between sections 13 and 24.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

40.000 Point for the 1/4 section corner of sections 13 and 24.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
S13
1/4 —————
S24
2010

80.000 The corner of sections 13, 14, 23, and 24.

N. 0°00.7' W., between sections 13 and 14.

40.000 Point for the 1/4 section corner of sections 13 and 14,

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S14 | S13
2010

80.000 Point for the corner of sections 11, 12, 13, and 14,

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S11 | S12
S14 | S13
2010

From the corner of sections 12 and 13 only, on the east boundary of the township, hereinbefore described.

WEST, between sections 12 and 13.

40.000 Point for the 1/4 section corner of sections 12 and 13.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S12
1/4 —————
S13
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

80.000 The corner of sections 11, 12, 13, and 14.

N. 0°00.7' W., between sections 11 and 12.

40.000 Point for the 1/4 section corner of sections 11 and 12.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S11 | S12
2010

80.000 Point for the corner of sections 1, 2, 11, and 12,

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
S2 | S1
S11 | S12
2010

From the corner of sections 1 and 12 only, on the east boundary of the township, hereinbefore described.

WEST, between sections 1 and 12.

40.000 Point for the 1/4 section corner of sections 1 and 12.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S1
1/4 ———
S12
2010

80.000 The corner of sections 1, 2, 11, and 12.

N. 0°00.7' W., between sections 1 and 2.

40.000 Point for the 1/4 section corner of sections 1 and 2.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W
1/4
S2 | S1
2010

- 70.409 The corner of sections 1 and 2 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.

From the corner of sections 2, 3, 34, and 35, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the survey of the north boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°01.4' W., between sections 34 and 35.

- 40.000 Point for the 1/4 section corner of sections 34 and 35.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S34 | S35
2010

- 80.000 Point for the corner of sections 26, 27, 34, and 35.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S27 | S26
S34 | S35
2010

From the corner of sections 25, 26, 35, and 36.

WEST, between sections 26 and 35.

- 40.000 Point for the 1/4 section corner of sections 26 and 35.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W
S26
1/4 —————
S35
2010

80.000 The corner of sections 26, 27, 34, and 35.

N. 0°01.4' W., between sections 26 and 27.

40.000 Point for the 1/4 section corner of sections 26 and 27.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S27 | S26
2010

80.000 Point for the corner of sections 22, 23, 26, and 27.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
S22 | S23
S27 | S26
2010

From the corner of sections 23, 24, 25, and 26.

WEST, between sections 23 and 26.

40.000 Point for the 1/4 section corner of sections 23 and 26.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S23
1/4 —————
S26
2010

80.000 The corner of sections 22, 23, 26, and 27.

N. 0°01.4' W., between sections 22 and 23.

40.000 Point for the 1/4 section corner of sections 22 and 23.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S22 | S23
2010

80.000 Point for the corner of sections 14, 15, 22, and 23.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 65 inches in the ground, with aluminum cap marked:

T21S R12W
S15 | S14
S22 | S23
2010

From the corner of sections 13, 14, 23, and 24.

WEST, between sections 14 and 23.

40.000 Point for the 1/4 section corner of sections 14 and 23.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

T21S R12W
S14
1/4 ———
S23
2010

80.000 The corner of sections 14, 15, 22, and 23.

N. 0°01.4' W., between sections 14 and 15.

40.000 Point for the 1/4 section corner of sections 14 and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S15 | S14
2010

80.000 Point for the corner of sections 10, 11, 14, and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

inches in the ground, with aluminum cap marked:

T21S R12W	
S10	S11
S15	S14
2010	

From the corner of sections 11, 12, 13, and 14.

WEST, between sections 11 and 14.

40.000 Point for the 1/4 section corner of sections 11 and 14.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W	
S11	
1/4	—————
S14	
2010	

80.000 The corner of sections 10, 11, 14, and 15.

N. 0°01.4' W., between sections 10 and 11.

40.000 Point for the 1/4 section corner of sections 10 and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W	
1/4	
S10	S11
2010	

80.000 Point for the corner of sections 2, 3, 10, and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W	
S3	S2
S10	S11
2010	

From the corner of sections 1, 2, 11, and 12.

WEST, between sections 2 and 11.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

40.000 Point for the 1/4 section corner of sections 2 and 11.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
S2
1/4 —————
S11
2010

80.000 The corner of sections 2, 3, 10, and 11.

N. 0°01.4' W., between sections 2 and 3.

40.000 Point for the 1/4 section corner of sections 2 and 3.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S3 | S2
2010

70.413 The corner of sections 2 and 3 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, monumented with an aluminum drive rod as described in the official record of the independent resurvey of the north boundary of T. 22 S., R. 12 W., executed concurrently under Group No. 1113.

N. 0°02.1' W., between sections 33 and 34.

40.000 Point for the 1/4 section corner of sections 33 and 34.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S33 | S34
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

80.000 Point for the corner of sections 27, 28, 33, and 34.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W	
S28	S27
S33	S34
2010	

From the corner of sections 26, 27, 34, and 35.

WEST, between sections 27 and 34.

40.000 Point for the 1/4 section corner of sections 27 and 34.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W	
S27	
1/4	—————
S34	
2010	

80.000 The corner of sections 27, 28, 33, and 34.

WEST, between sections 28 and 33.

40.000 Point for the 1/4 section corner of sections 28 and 33.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W	
S28	
1/4	—————
S33	
2010	

79.476 The corner of sections 28, 29, 32, and 33.

From the corner of sections 27, 28, 33, and 34.

N. 0°02.1' W., between sections 27 and 28.

40.000 Point for the 1/4 section corner of sections 27 and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 67 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

T21S R12W
1/4
S28 | S27
2010

80.000 Point for the corner of sections 21, 22, 27, and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S21 | S22
S28 | S27
2010

From the corner of sections 22, 23, 26, and 27.

WEST, between sections 22 and 27.

40.000 Point for the 1/4 section corner of sections 22 and 27.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S22
1/4 ———
S27
2010

80.000 The corner of sections 21, 22, 27, and 28.

N. 89°59.6' W., between sections 21 and 28.

40.000 Point for the 1/4 section corner of sections 21 and 28.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S21
1/4 ———
S28
2010

79.389 The corner of sections 20, 21, 28, and 29.

From the corner of sections 21, 22, 27, and 28.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

N. 0°02.1' W., between sections 21 and 22.

40.000 Point for the 1/4 section corner of sections 21 and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S21 | S22
2010

80.000 Point for the corner of sections 15, 16, 21, and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
S16 | S15
S21 | S22
2010

From the corner of sections 14, 15, 22, and 23.

WEST, between sections 15 and 22.

40.000 Point for the 1/4 section corner of sections 15 and 22.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
S15
1/4 ———
S22
2010

80.000 The corner of sections 15, 16, 21, and 22.

N. 89°59.2' W., between sections 16 and 21.

40.000 Point for the 1/4 section corner of sections 16 and 21.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

T21S R12W
S16
1/4 —————
S21
2010

79.300 The corner of sections 16, 17, 20, and 21.

From the corner of sections 15, 16, 21, and 22.

N. 0°02.1' W., between sections 15 and 16.

40.000 Point for the 1/4 section corner of sections 15 and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S16 | S15
2010

80.000 Point for the corner of sections 9, 10, 15, and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 69 inches in the ground, with aluminum cap marked:

T21S R12W
S9 | S10
S16 | S15
2010

From the corner of sections 10, 11, 14, and 15.

WEST, between sections 10 and 15.

40.000 Point for the 1/4 section corner of sections 10 and 15.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S10
1/4 —————
S15
2010

80.000 The corner of sections 9, 10, 15, and 16.

N. 89°58.8' W., between sections 9 and 16.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

40.000 Point for the 1/4 section corner of sections 9 and 16.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S9
1/4 —————
S16
2010

79.212 The corner of sections 8, 9, 16, and 17.

From the corner of sections 9, 10, 15, and 16.

N. 0°02.1' W., between sections 9 and 10.

40.000 Point for the 1/4 section corner of sections 9 and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S9 | S10
2010

80.000 Point for the corner of sections 3, 4, 9, and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S4 | S3
S9 | S10
2010

From the corner of sections 2, 3, 10, and 11.

WEST, between sections 3 and 10.

40.000 Point for the 1/4 section corner of sections 3 and 10.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S3
1/4 —————
S10
2010

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

80.000 The corner of sections 3, 4, 9, and 10.

N. 89°58.5' W., between sections 4 and 9.

40.000 Point for the 1/4 section corner of sections 4 and 9.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 68 inches in the ground, with aluminum cap marked:

T21S R12W
S4
1/4 ———
S9
2010

79.124 The corner of sections 4, 5, 8, and 9.

From the corner of sections 3, 4, 9, and 10.

N. 0°02.1' W., between sections 3 and 4.

40.000 Point for the 1/4 section corner of sections 3 and 4.

Set an aluminum drive rod, 3/4 inch diameter, 72 inches long, 66 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S4 | S3
2010

70.417 The corner of sections 3 and 4 only, on the Fourth Standard Parallel South, monumented with an aluminum drive rod as described in the official record of the survey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.

From the corner of sections 29, 30, 31, and 32.

N. 89°58.5' W., between sections 30 and 31.

40.000 Point for the 1/4 section corner of sections 30 and 31.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W
S30
1/4 —————
S31
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

- 73.828** The corner of sections 25, 30, 31, and 36, on the west boundary of the township, hereinbefore described.

From the corner of sections 29, 30, 31, and 32.

N. 0°00.2' E., between sections 29 and 30.

- 40.000** Point for the 1/4 section corner of sections 29 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S29 | S30
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

- 80.000** Point for the corner of sections 19, 20, 29, and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
S19 | S20
S30 | S29
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 20, 21, 28, and 29.

N. 89°59.4' W., between sections 20 and 29.

- 39.978** Point for the 1/4 section corner of sections 20 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

inches in the ground, with aluminum cap marked:

T21S R12W
S20
1/4 —————
S29
2009

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

79.956 The corner of sections 19, 20, 29, and 30.

N. 89°59.6' W., between sections 19 and 30.

40.000 Point for the 1/4 section corner of sections 19 and 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
S19
1/4 —————
S30
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

73.768 The corner of sections 19, 24, 25, and 30, on the west boundary of the township, hereinbefore described.

From the corner of sections 19, 20, 29, and 30.

N. 0°00.2' E., between sections 19 and 20.

40.000 Point for the 1/4 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S19 | S20
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

80.000 Point for the corner of sections 17, 18, 19, and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R12W	
S18	S17
S19	S20
2009	

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 16, 17, 20, and 21.

N. 89°59.8' W., between sections 17 and 20.

39.980 Point for the 1/4 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W	
S17	
1/4	—————
S20	
2009	

Set a steel fence post alongside the aluminum post.

Corner is located in Sevier Lake bed.

79.960 The corner of sections 17, 18, 19, and 20.

N. 89°59.6' W., between sections 18 and 19.

40.000 Point for the 1/4 section corner of sections 18 and 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

T21S R12W	
S18	
1/4	—————
S19	
2009	

Bury a magnet beneath the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Set a steel fence post alongside the aluminum post.

- 73.711 The corner of sections 13, 18, 19, and 24, on the west boundary of the township, hereinbefore described.
-

From the corner of sections 17, 18, 19, and 20.

N. 0°00.2' E., between sections 17 and 18.

- 40.000 Point for the 1/4 section corner of sections 17 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

T21S R12W
1/4
S18 | S17
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle, southeast facing slope on Coyote Knolls.

- 80.000 Point for the corner of sections 7, 8, 17, and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground to solid rock, in a mound of stone, 3 ft. base to top, with aluminum cap marked:

T21S R12W
S7 | S8
S18 | S17
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 8, 9, 16, and 17.

S. 89°59.8' W., between sections 8 and 17.

- 39.981 Point for the 1/4 section corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T21S R12W
S8
1/4 —————
S17
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle, southwest facing slope.

79.962 The corner of sections 7, 8, 17, and 18.

WEST, between sections 7 and 18.

40.000 Point for the 1/4 section corner of sections 7 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R12W
S7
1/4 —————
S18
2009

Bury a magnet beneath the aluminum post.

73.670 The corner of sections 7, 12, 13, and 18, on the west boundary of the township, hereinbefore described.

From the corner of sections 7, 8, 17, and 18.

N. 0°00.2' E., between sections 7 and 8.

40.000 Point for the 1/4 section corner of sections 7 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S7 | S8
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

80.000 Point for the corner of sections 5, 6, 7, and 8.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R12W

S6	S5
S7	S8

 2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

From the corner of sections 4, 5, 8, and 9.

S. 89°59.4' W., between sections 5 and 8.

39.983 Point for the 1/4 section corner of sections 5 and 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked:

T21S R12W
 S5
 1/4 —————
 S8
 2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

79.966 The corner of sections 5, 6, 7, and 8.

S. 89°58.4' W., between sections 6 and 7.

40.000 Point for the 1/4 section corner of sections 6 and 7.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with aluminum cap marked:

T21S R12W
 S6
 1/4 —————
 S7
 2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 21 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

- 73.610 The corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.
-

From the corner of sections 5, 6, 7, and 8.

N. 0°00.2' E., between sections 5 and 6.

- 40.000 Point for the 1/4 section corner of sections 5 and 6.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with aluminum cap marked:

T21S R12W
1/4
S6 | S5
2009

Bury a magnet beneath the aluminum post.

Set a steel fence post alongside the aluminum post.

- 68.665 The closing corner of sections 5 and 6 on the Fourth Standard Parallel South, monumented with an aluminum post as described in the official record of the dependent resurvey of the south boundary of T. 20 S., R. 12 W., executed concurrently under Group No. 1115.
-

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

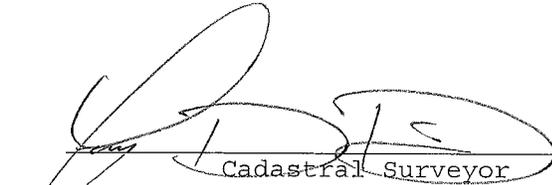
FIELD ASSISTANTS

Name	Capacity
2009 Bureau of Land Management Assistants:	
Adrian M. Kurip	Survey Technician
Calvert C. Norton	Survey Technician
Robert Robbins	Survey Aid
Vinnie Porter	Survey Aid
2010 Diamondback Land Surveying Assistants:	
Trent J. Keenan	Party Chief
Jeffrey C. Miller	Party Chief
Robert L. Carrington	Chainman
Verland K. Pierson	Chainman
Roger L. Berriman	Chainman
Doug Morlan	Chainman
Jason P. Justice	Chainman

CERTIFICATE OF SURVEY

We, *Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *24th day of July, 2009*, and the Supplemental Special Instructions bearing the date of the *27th day of January, 2010*, We have *dependently resurveyed the west boundary (Sevier Lake Guide Meridian) and a portion of the subdivisional lines, and surveyed the east boundary and a portion of the subdivisional lines, in Township 21 South, Range 12 West, of the Salt Lake Meridian, in the State of Utah*, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions of the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 28, 2010
Date


Cadastral Surveyor

June 29, 2010
Date

David T. Gill
Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of *the dependent resurvey of the west boundary (Sevier Lake Guide Meridian) and a portion of the subdivisional lines, and the survey of the east boundary and a portion of the subdivisional lines, in Township 21 South, Range 12 West, Salt Lake Meridian, Utah, executed by Daniel T. Gillins and Jeremy D. Davis, Cadastral Surveyors*, having been critically examined and found correct, are hereby approved.

June 30, 2010
Date

David W. Webb
(Chief Cadastral Surveyor for Utah)