

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 12, 14, 23, 25, AND 26,

IN

TOWNSHIP 23 SOUTH, RANGE 2 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated *May 14, 2010*, approved *May, 14, 2010*, which provided for the surveys included under Group Number *1145*, and Assignment Instructions dated *May 14, 2010*.

Survey Commenced, *May 24, 2010*  
Survey Completed, *July 13, 2010*

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 12, 14, 23, 25, AND 26,

IN

TOWNSHIP 23 SOUTH, RANGE 2 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated *May 14, 2010*, approved *May, 14, 2010*, which provided for the surveys included under Group Number *1145*, and Assignment Instructions dated *May 14, 2010*.

Survey Commenced, *May 24, 2010*  
Survey Completed, *July 13, 2010*

## INDEX DIAGRAM

Township 23 South, Range 2 West.

6	5	4	3	2	1
					11
7	8	9	10	11	10 12
				15	9
18	17	16	15	14 14	8 13
				13	8
19	20	21	22	13 23	7 24
				11	6
30	29	28	27	26	5 25
				5	4
31	32	33	34	35	36

The Subdivision of Section 12.....	16
The Subdivision of Section 14.....	18
The Subdivision of Section 23.....	19
The Subdivision of Section 25.....	22
The Subdivision of Section 26.....	24

## TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of sections 12, 14, 23, 25, and 26, in T. 23 S., R. 2 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>				
Portion	C. Mogo	1856		
Portion	A.D. Ferron	1876	A.D. Ferron	1876
Portion			H.D. Page & G.C. Swan	1897
Portion			C.P. Sylvester	1970
<b>EAST BOUNDARY</b>				
Portion	A.D. Ferron	1878		
Portion	J.T. Breckon	1896		
Portion			H.D. Page & G.C. Swan	1897
Portion			C.P. Sylvester	1967
Portion			J.D. Davis (concurrently)	2010
<b>WEST BOUNDARY</b>				
Portion	C. Mogo	1856		
Portion	J.T. Breckon	1896		
Portion			R.C. Yundt	1950
Portion			C.P. Sylvester	1967
<b>NORTH BOUNDARY</b>				
Portion	C. Mogo	1856		
Portion			A.D. Ferron	1876
Portion	J.T. Breckon	1896		
<b>SUBDIVISION</b>				
Portion	C. Mogo	1856		
Portion	A.D. Ferron	1876	A.D. Ferron	1876
Portion	J.T. Breckon	1896	J.T. Breckon	1896
Portion			R.C. Yundt	1950
Portion			C.P. Sylvester	1967

## COUNTY SURVEYS

The Sevier County Surveyor's Office has monumented some corners in the township, with Corner Perpetuation and Filing Records, along with plats dated 2004, 2007, and 2009, on file in the Sevier County Recorder's Office.

## PRIVATE SURVEYS

A survey was executed by Kary B. Monroe, L.S. 6295, Jones and DeMille Engineering, with a survey plat dated February 24, 1993, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a plat dated April 14, 1993, on file at the Sevier County Recorder's Office.

## TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

**PRIVATE SURVEYS CONTINUED**

A survey was executed by Walter Cunningham, L.S. 175205, with a record of survey plat dated November 12, 1996, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a survey plat dated August 12, 1996, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 154652, with a survey plat dated December 15, 1999, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 154652, with a record of survey plat dated June, 15, 2000, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a plat dated April 3, 2001, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 154652, with a survey plat dated October 16, 2001, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a survey plat dated May 12, 2003, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a plat dated March 3, 2005, on file at the Sevier County Recorder's Office.

A survey was executed by Ryan W. Savage, L.S. 183343, with a plat dated June 14, 2005, on file at the Sevier County Recorder's Office.

A survey was executed by Rodney K. Torgersen, L.S. 161712, Torgersen Engineering, with a plat dated May 30, 2006, on file at the Sevier County Recorder's Office.

A survey was executed by Rex W. Friant, L.S. 164652, with a survey plat dated May 15, 2007, on file at the Sevier County Recorder's Office.

A survey was executed by Rodney K. Torgersen. L.S. 161712, Torgersen Engineering, with a plat dated November 19, 2008, on file at the Sevier County Recorder's Office.

A survey was executed by Rodney K. Torgersen, L.S. 161712, Torgersen Engineering, with a plat dated July 30, 2009, on file at the Sevier County Recorder's Office.

## TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1145, dated May 14, 2010.

The directions of the lines were determined by references to true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS):  
FRED FREDONIA CORS ARP, P009 MARYSVALE\_UT2006 CORS ARP, PUC1 CARBON COUNTY COU CORS ARP.

The geographic position of the closing corner of sections 25 and 36 only, on the west boundary of T. 23 S., R. 1 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude:  $38^{\circ}45'55.072''$  N.,  
Longitude:  $111^{\circ}57'33.483''$  W., N.A.D. 1983,  
Network Accuracy = 0.200 meter at 95% confidence level.

The geographic position of the section corner of sections 1, 2, 11, and 12, T. 23 S., R. 2 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude:  $38^{\circ}49'27.471''$  N.,  
Longitude:  $111^{\circ}58'43.376''$  W., N.A.D. 1983,  
Network Accuracy = 0.200 meter at 95% confidence level.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by J.T. Breckon in 1896

Beginning at the closing corner of sections 25 and 36 only, on the west boundary of T. 23 S., R. 1 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

From this corner point, the section corner of sections 30 and 31 only, bears N. 0°58.4' W., 0.779 chains distance, as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

S. 89°52.5' W., between sections 25 and 36.

- 40.051 The 1/4 section corner of sections 25 and 36, monumented with a Sevier County survey monument, an iron pipe, 2 inches diameter, firmly set, projecting 4 inches above the ground, with a trachyte stone, 12x8x6 inches, marked 1/4 on face, set alongside iron pipe, with brass cap marked: SEVIER COUNTY 25 36.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Found a small mound of stone north of the iron pipe; with a steel fence post 3.2 feet northwest of the iron pipe.

Corner falls on level ground.

N. 87°53.5' W., beginning new measurement.

- 19.804 Point for the W 1/16 section corner of sections 25 and 36.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

S25  
W 1/16 ———  
S36  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.608 The corner of sections 25, 26, 35, and 36, monumented with a Sevier County survey monument, an iron pipe, 2 inches diameter, firmly set, in a concrete block, lying over, with brass cap marked: SEVIER COUNTY 25 26 35 36.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls on level ground.

Reestablishment of the Survey Executed by A.D. Ferron in 1876

S. 89°13.1' W., between sections 26 and 35.

- 20.073 Point for the E 1/16 section corner of sections 26 and 35. Not monumented.
- 40.146 The 1/4 section corner of sections 26 and 35, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with aluminum cap marked: SEVIER COUNTY 1/4 S26 S35 2004; with a steel fence post 9 inches east of aluminum cap.

from which

A power pole, with plate number 264000, bears N. 49°30' E., 91 links distance, to a PK nail at base.

Corner falls on level ground.

From the corner of sections 25, 26, 35, and 36.

N. 0°33.4' W., between sections 25 and 26.

- 20.154 Point for the S 1/16 section corner of sections 25 and 26.
- Set an aluminum post, 30 inches long,, 2 1/2 inches diameter, 5 inches in the ground, to solid rock, magnet at base, in a mound of stone, 4 feet base to top of aluminum cap marked:

S 1/16  
S26 | S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southeast-facing slope.

- 40.308 The 1/4 section corner of sections 25 and 26, monumented with a lava stone, 12x12x8 inches, firmly set, marked 1/4 on north face, with a mound of stone to the north. (Record: trachyte 15x7x6 inches)

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum post.

T23SR2W  
1/4  
S26|S25  
2010

Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on level ground.

---

N. 1°12.6' W., beginning new measurement.

20.013 Point for the N 1/16 section corner of sections 25 and 26.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, with aluminum cap marked:

N 1/16  
S26|S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope.

40.026 The corner of sections 23, 24, 25, and 26, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 feet base to top of brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located 1.5 feet north of the iron post.

Corner falls on level ground in tall sagebrush.

---

Reestablishment of the Survey Executed by A.D. Ferron in 1876,  
and the Resurveys Executed by John T. Breckon in 1896,  
and C.P. Sylvester in 1967

---

From the corner of sections 19, 24, 25, and 30, on the west boundary of T. 23 S., R. 1 W., as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

S. 89°47.4' W., between sections 24 and 25.

20.082 Point for the E 1/16 section corner of sections 24 and 25.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

S24  
E 1/16 —  
S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope.

- 40.164 The 1/4 section corner of sections 24 and 25, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 feet base to top of brass cap marked as described in the official record of the 1967 resurvey.

Corner falls on a steep east-facing slope.

---

S. 89°41.0' W., beginning new measurement.

- 40.120 The corner of sections 23, 24, 25, and 26.

---

N. 0°26.4' W., between sections 23 and 24.

- 20.069 Point for the S 1/16 section corner of sections 23 and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

S 1/16  
S23|S24  
2010

Raise a small mound of stone east of the aluminum post.

Corner falls in a wash, drains northwest.

- 40.138 The 1/4 section corner of sections 23 and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 feet base to top of brass cap marked as described in the official record of the 1967 resurvey.

Corner falls west of an ATV trail on clay hills.

---

N. 0°24.7' W., beginning new measurement.

- 40.081 The corner of sections 13, 14, 23, and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located alongside the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner falls on top of a berm, bears east and west, in the old Sevier County landfill.

---

Reestablishment of the Survey Executed by J.T. Breckon in 1896,  
and the Resurvey Executed by C.P. Sylvester in 1967

---

From the point for the closing corner of sections 13 and 24 only, on the west boundary of T. 23 S., R. 1 W., as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

N. 88°11.7' W., between sections 13 and 24.

- 0.030 The closing corner of sections 13 and 24 only, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

This corner now functions as the amended closing corner, add the marks AM 2010 to the brass cap.

Corner falls on level ground in sparse juniper growth.

- 40.279 The 1/4 section corner of sections 13 and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

Corner falls on a steep east-facing slope.

---

S. 88°09.3' W., beginning new measurement.

- 39.167 The corner of sections 13, 14, 23, and 24.
- 

N. 0°24.2' W., between sections 13 and 14.

- 41.062 The 1/4 section corner of sections 13 and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 feet base to top of brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located alongside the iron post.

Corner falls on a gradual southeast-facing slope.

---

N. 0°22.6' W., beginning new measurement.

- 20.218 Point for the N 1/16 section corner of sections 13 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground, magnet at base, in a mound of stone, 2 feet base to top of aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N 1/16  
S14 | S13  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on top of a small ridge, bears northeast and southwest.

- 40.436 The corner of sections 11, 12, 13, and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 feet base to top of brass cap marked as described in the official record of the 1967 resurvey.

Corner falls at the intersection of fences extending south and west, on a steep west-facing slope.

From the closing corner of sections 12 and 13 only, on the west boundary of T. 23 S., R. 1 W., monumented with an iron post, 2 1/2 inches diameter, firmly set, in a collar of stone, projecting 5 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located alongside the iron post.

Corner falls 35 feet west of the base of a steep hill in a wash.

N. 81°09.7' W., between sections 12 and 13.

- 39.442 The 1/4 section corner of sections 12 and 13, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 feet base to top of brass cap marked as described in the official record of the 1967 resurvey.

Corner falls approximately 166 feet east of a wash, drains northeast, on a steep northwest-facing slope.

S. 83°04.6' W., beginning new measurement.

- 20.239 Point for the W 1/16 section corner of sections 12 and 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

S12  
W 1/16 —  
S13  
2010

Corner falls on a gradual west-facing slope.

- 40.478 The corner of sections 11, 12, 13, and 14.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Reestablishment of the Survey Executed by A.D. Ferron in 1876,  
and the Resurveys Executed by J.T. Breckon in 1896,  
and C.P. Sylvester in 1967

---

N. 1°36.2' W., between sections 11 and 12.

- 20.495 Point for the S 1/16 section corner of sections 11 and 12. Not monumented.
- 40.990 The 1/4 section corner of sections 11 and 12, monumented with an iron post, 2 1/2 inches diameter, firmly set, leaning 45°, projecting 16 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey.

Due to the condition of the iron post, I re-set it in place, 22 inches in the ground, in a mound of stone, 2 feet base to top of brass cap.

Corner is located 9.5 feet east of the intersection of fences extending east, west, and south, at the east end of a pipe gate in the east/west fence.

NOTE: On June 29, 2010, I received a written statement from Jeff Anderson, the longtime owner of the adjacent property. He states that the corner was located at the intersection of north-south and east-west fences, but during the 1970's, the north-south fence was moved west to accommodate a pipe gate. He further states that he did not disturb the monument set by C. Sylvester in 1967 at the corner. Because this corner is 3 chains southeast of the record position, I conducted a field search at record bearing and distance from the section corner of sections 11, 12, 13, and 14, as shown on the 1967 plat, and was unable to find any evidence of the corner, or the fences extending north and west.

I find the statement by Jeff Anderson to be credible, and accept this corner as the best available evidence of the original corner position.

---

N. 1°01.4' W., beginning new measurement.

- 41.290 The corner of sections 1, 2, 11, and 12, monumented with a Sevier County survey monument, an iron pipe, 2 inches diameter, firmly set, projecting 6 inches above the ground, in a concrete block, with brass cap marked (rotated 180°): SEVIER COUNTY 1 2 11 12.

Found the iron post from the 1967 survey, and an unmarked stone, lying on the ground alongside the iron pipe.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 1, 6, 7, and 12, on the west boundary of T. 23 S., R. 1 W., as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

S. 89°32.5' W., between sections 1 and 12.

19.957 Point for the E 1/16 section corner of sections 1 and 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

S1  
E 1/16 —  
S12  
2010

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope to flat ground.

39.914 The 1/4 section corner of sections 1 and 12, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1967 resurvey; with a steel fence post located alongside the iron post.

A small mound of stone bears west of the iron post.

Corner falls online of an old fence extending north and south.

---

S. 89°27.7' W., beginning new measurement.

40.158 The corner of sections 1, 2, 11, and 12.

---

From the corner of sections 23, 24, 25, and 26.

S. 89°07.8' W., between sections 23 and 26.

20.078 Point for the E 1/16 section corner of sections 23 and 26.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, with aluminum cap marked:

S23  
E 1/16 —  
S26  
2010

Set a steel fence post alongside the aluminum post.

Corner falls in wetlands in tall salt grass.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 30.117 Point for the W-E 1/64 section corner of sections 23 and 26. Set an aluminum post, 30 inches long, 2 1/2 inches diameter, flush with ground, magnet at base, with aluminum cap marked:

W-E S23  
1/64 S26  
2010

Raise a small mound of stone west of the aluminum post.

Corner falls online of a fence extending east and west.

- 40.156 The 1/4 section corner of sections 23 and 26, monumented with a Sevier County survey monument, an iron pipe, 2 inches diameter, firmly set, flush with ground, with brass cap marked: SEVIER COUNTY 23 26; a sandstone, 8x8x6 inches, dimly marked 1/4 on face, is buried alongside.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls at the intersection of fences extending south, east, and west.

---

S. 89°01.6' W., beginning new measurement.

- 40.122 The corner of sections 22, 23, 26, and 27, monumented with a Sevier County monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 feet base to top of aluminum cap marked: SEVIER COUNTY T23SR2W S22 S23 S26 S27 2004.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls at the intersection of fences extending north, south, east, and west.

From this corner, the 1/4 section corner of sections 26 and 27, monumented with a granite stone, 16x10x8 inches, firmly set, marked 1/4 on west face, bears S. 0°52.6' E., 40.127 chains distance.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

T23SR2W  
1/4  
S27 | S26  
2010

Deposit the marked stone alongside the aluminum post.

Corner falls online of a fence extending north and south.

---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

N. 0°59.9' W., between sections 22 and 23.

- 40.720 Point for the 1/4 section corner of sections 22 and 23, monumented with a Sevier County monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, 2 inches above the ground, with aluminum cap marked: SEVIER COUNTY 1/4 S22 S23 2010; with a steel fence post alongside the aluminum pipe.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls on level, swampy ground.

---

N. 0°59.9' W., beginning new measurement.

- 40.720 True point for the corner of sections 14, 15, 22, and 23, determined from the witness corner, at record distance, hereinafter described. Point falls in a canal, where it is not suitable for permanent monumentation.

---

Reestablishment of the Survey Executed by J.T. Breckon in 1896

---

From the corner of sections 13, 14, 23, and 24.

S. 89°50.0' W., between sections 14 and 23.

- 20.269 Point for the E 1/16 section corner of sections 14 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a small mound of stone, to top of aluminum cap marked:

S14  
E 1/16 ———  
S23  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on level, open ground.

- 40.538 The 1/4 section corner of sections 14 and 23, monumented with a Ryan W. Savage monument, a rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, with a yellow cap attached marked: PLS 183343.

This monument, as set by Ryan W. Savage, is accepted as the best available evidence of the position of the original corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T23SR2W  
S14  
1/4 ———  
S23  
2010

Deposit the rebar and marked cap alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Raise a mound of stone, 2 feet base, 1 foot high, north of the aluminum post.

Corner falls on a gradual southwest-facing slope in sagebrush.

Reestablishment of the Survey Executed by A.D. Ferron in 1876

N. 89°56.5' W., beginning new measurement.

40.537 True point for the corner of sections 14, 15, 22, and 23.

Reestablishment of the Survey Executed by C. Mogo in 1856, and  
the Resurvey Executed by A.D. Ferron in 1876

With continuous measurement.

40.716 The witness corner of sections 14, 15, 22, and 23, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 8 inches above the ground, with aluminum cap marked: SEVIER COUNTY T23S R2W S14 S15 S22 S23 WC 11.8 2004, with an arrow pointing east.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls online of a fence extending east and west.

From the true point for the corner of sections 14, 15, 22, and 23.

N. 0°14.7' W., between sections 14 and 15.

39.687 The witness 1/4 section corner of sections 14 and 15, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, flush with ground, with aluminum cap marked: SEVIER COUNTY T23SR2W 1/4 S14 S15 WC 57 2009, with an arrow pointing north; with a steel fence post located 0.5 foot north of the aluminum pipe.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Corner falls on top of the north bank of the Sevier River, flows easterly.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

N. 0°14.8' W., beginning new measurement.

- 0.862 True point for the 1/4 section corner of sections 14 and 15. Point falls in a cultivated field, where it is not suitable for permanent monumentation.
- 41.409 True point for the corner of sections 10, 11, 14, and 15, determined from the witness corner, at record distance, hereinafter described. Point falls in the Sevier River, where it is not suitable for permanent monumentation.

Corner falls at the intersection of fences extending north and east.

---

Reestablishment of the Survey Executed by C. Mogo in 1856, and  
the Resurvey Executed by A.D. Ferron in 1876

---

From the corner of sections 11, 12, 13, and 14.

S. 89°39.1' W., between sections 11 and 14.

- 20.213 Point for the E 1/16 section corner of sections 11 and 14. Not monumented.
- 40.426 True point for the 1/4 section corner of sections 11 and 14, at proportionate distance; there is no remaining evidence of the original corner. Point falls in a cultivated field, where it is not suitable for permanent monumentation.

From the true point, the point selected for an offline witness corner for the 1/4 section corner of sections 11 and 14, bears N. 30°43.3' E., 0.490 chains distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked:

```

T23SR2W
  S11
1/4 —
  ↓ S14
   WC
   2010

```

Set a steel fence post alongside the aluminum post.

Corner falls online of a fence extending east and west.

- 80.852 The true point for the corner of sections 10, 11, 14, and 15.
- 

Reestablishment of the Survey Executed by C. Mogo in 1856

---

With continuous measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 81.504** The witness corner of sections 10, 11, 14, and 15, monumented with a Sevier County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, flush with ground, with aluminum cap marked: SEVIER COUNTY T23SR2W S10 S11 S14 S15 WC 43 2004; with an arrow pointing east.

This monument, as set by Sevier County, is accepted as the best available evidence of the position of the original corner.

Raise a mound of stone, over top of aluminum cap, in an attempt to protect aluminum pipe from flooding by Sevier River.

Corner falls online of a fence extending N. 50° E. and S. 50° W.

---

The Subdivision of Section 12,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 12 and 13.

N. 1°24.1' W., on the N-S centerline of section 12.

- 18.027** Point for the center S 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

C  
S 1/16 | S12  
C  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope.

- 36.054** Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a small mound of stone to top of aluminum cap marked:

T23SR2W  
C 1/4  
S12  
2010

Set a steel fence post alongside the aluminum post.

Corner falls in a gravel pit.

- 77.780** The 1/4 section corner of sections 1 and 12.
-

THE SUBDIVISION OF SECTION 12,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of section 12 only, on the east boundary, as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

N. 89°55.6' W. on the E-W centerline of section 12.

19.645 Point for the center E 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, magnet at base, in a mound of stone, 2 feet base to top of aluminum cap marked:

E 1/16  
C — C  
S12  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope below a spine of rocks.

39.290 The center 1/4 section corner.

59.512 Point for the center W 1/16 section corner of section 12. Not monumented.

79.734 The 1/4 section corner of sections 11 and 12.

From the center E 1/16 section corner of section 12

N. 0°58.0' W., on the N-S centerline of the NE 1/4.

41.905 The E 1/16 section corner of sections 1 and 12.

From the W 1/16 section corner of sections 12 and 13.

N. 1°30.5' W., on the N-S centerline of the SW 1/4 of section 12.

19.262 Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, on solid lava rock, marked with an X at the corner point, in a mound of stone, 3 feet base to top of aluminum cap marked:

SW 1/16  
S12  
2010

Set a steel fence post 3 feet northwest of the aluminum post.

Corner falls in a vast lava field on level ground.

THE SUBDIVISION OF SECTION 12,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

38.524 The point for the center W 1/16 section corner.

---

From the center S 1/16 section corner of section 12.

S. 86°34.4' W., on the E-W centerline of the SW 1/4 of section 12.

20.193 The SW 1/16 section corner.

40.386 The point for the S 1/16 section corner of sections 11 and 12.

---

The Subdivision of Section 14,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 14 and 23.

N. 0°19.1' W., on the N-S centerline of section 14.

40.884 Point for the center 1/4 section corner, at intersection with the E-W centerline. Point falls in a cultivated field, where it is not suitable for permanent monumentation. Not monumented.

61.129 Point for the center N 1/16 section corner. Not monumented.

81.374 The true point for the 1/4 section corner of sections 11 and 14.

---

From the 1/4 section corner of sections 13 and 14.

S. 89°34.9' W., on the E-W centerline of section 14.

20.236 Point for the center E 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 5 inches in the ground, to solid rock, magnet at base, in a mound of stone, 4 feet base to top of aluminum cap marked:

E 1/16  
C — C  
S14  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual rocky southwest-facing slope.

40.472 The point for the center 1/4 section corner.

80.954 The true point for the 1/4 section corner of sections 14 and 15.

---

From the center E 1/16 section corner of section 14.

N. 0°20.9' W., on the N-S centerline of the NE 1/4 of section 14.

THE SUBDIVISION OF SECTION 14,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 20.232 Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 2 feet base to top of aluminum cap marked:

NE 1/16  
S14  
2010

Deposit an aluminum can and glass bottle as a memorial at the base of the aluminum post.

Set a steel fence post alongside the aluminum post.

- 40.464 The point for the E 1/16 section corner of sections 11 and 14.

From the N 1/16 section corner of sections 13 and 14.

S. 89°37.3' W., on the E-W centerline of the NE 1/4 of section 14.

- 20.225 The NE 1/16 section corner.

- 40.450 The point for the center N 1/16 section corner.

From the E 1/16 section corner of sections 14 and 23.

N. 0°21.6' W., on the N-S centerline of the SE 1/4 of section 14.

- 40.973 The center E 1/16 section corner.

The Subdivision of Section 23,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 23 and 26.

N. 0°42.2' W., on the N-S centerline of section 23.

- 10.098 Point for the center S-S 1/64 section corner. Not monumented.

- 15.147 Point for the center N-S-S 1/256 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

C N S S 1/256  
S23  
2010

Corner falls 2.5 feet east of a fence, extending north and south.

THE SUBDIVISION OF SECTION 23,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

From this corner, a Walter M. Cunningham survey monument, a rebar, 5/8 inch diameter, firmly set, flush with ground surface, bears S. 13°30.5' W., 0.149 chains distance, with yellow cap attached marked: LS 175205

- 20.196 Point for the center S 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked;

C  
S 1/16 | S23  
C  
2010

Raise a small mound of stone west of the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner falls on level ground.

- 40.392 Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, with aluminum cap marked;

T23SR2W  
C 1/4  
S23  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on level ground.

- 80.714 The 1/4 section corner of sections 14 and 23.

---

From the 1/4 section corner of sections 23 and 24.

S. 89°29.6' W., on the E-W centerline of section 23.

- 20.168 Point for the center E 1/16 section corner. Not monumented.

- 40.336 The center 1/4 section corner.

- 80.665 The point for the 1/4 section corner of sections 22 and 23.

---

From the E 1/16 section corner of sections 23 and 26.

N. 0°34.4' W., on the N-S centerline of the SE 1/4 of section 23.

- 10.066 Point for the center S-SE 1/64 section corner. Not monumented.

THE SUBDIVISION OF SECTION 23,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 20.132 Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone, 3 feet base to top of aluminum cap marked:

SE 1/16  
S23  
2010

Corner falls on a gradual southeast slope near top of ridge, bears northeast and southwest.

- 40.264 The point for the center E 1/16 section corner.

From the S 1/16 section corner of sections 23 and 24.

S. 89°18.8' W., on the E-W centerline of the SE 1/4 of section 23.

- 20.124 The SE 1/16 section corner.  
30.186 Point for the center W-SE 1/64 section corner. Not monumented.  
40.248 The center S 1/16 section corner.

From the W-E 1/64 section corner of sections 23 and 26.

N. 0°38.3' W., on the N-S centerline of the SW 1/4 of the SE 1/4 of section 23.

- 10.082 Point for the SW-SE 1/64 section corner, at intersection with the E-W centerline of the SW 1/4 of the SE 1/4. Not monumented.  
15.123 Point for the center N-SW-SE 1/256 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

C-N-SW-SE 1/256  
S23  
2010

Corner falls on a gradual southwest-facing slope above a small wash, drains westerly.

- 20.164 The point for the center W-SE 1/64 section corner.

From the point for the center S-SE 1/64 section corner.

S. 89°13.4' W., on the E-W centerline of the SW 1/4 of the SE 1/4.

THE SUBDIVISION OF SECTION 23,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 10.050 The point for the SW-SE 1/64 section corner.  
20.100 The point for the center S-S 1/64 section corner.

---

From the center N-SW-SE 1/256 section corner of section 23.

S. 89°16.1' W., on the E-W centerline of the NW 1/4 of the SW 1/4 of the SE 1/4.

- 10.056 The center N-S-S 1/256 section corner.

---

The Subdivision of Section 25,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 25 and 36.

N. 0°28.7' W., on the N-S centerline of section 25.

- 20.722 Point for the center S 1/16 section corner. Not monumented.  
41.444 Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, with aluminum cap marked:

T23SR2W  
C 1/4  
S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on level ground.

- 61.725 Point for the center N 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

C  
N 1/16 | S25  
C  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on level ground.

- 82.006 The 1/4 section corner of sections 24 and 25.
-

THE SUBDIVISION OF SECTION 25,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the true point for the 1/4 section corner of section 25 only, on the east boundary, as described in the field notes of T. 23 S., R. 1 W., executed concurrently under this same group.

N. 89°32.1' W., on the E-W centerline of section 25.

19.994 Point for the center E 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, magnet at base, with aluminum cap marked:

E 1/16  
C — C  
S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on level, open ground.

39.988 The center 1/4 section corner.

59.797 Point for the center W 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a small mound of stone, to top of aluminum cap marked;

W 1/16  
C — C  
S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual northwest-facing slope.

79.606 The 1/4 section corner of sections 25 and 26.

---

From the center E 1/16 section corner of section 25.

N. 0°20.9' W., on the N-S centerline of the NE 1/4 of section 25.

40.797 The E 1/16 section corner of sections 24 and 25.

---

From the W 1/16 section corner of sections 25 and 36.

N. 0°31.0' W., on the N-S centerline of the SW 1/4.

20.438 Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18

THE SUBDIVISION OF SECTION 25,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

inches in the ground, to solid rock, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

SW 1/16  
S25  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southeast-facing slope.

40.876 The center W 1/16 section corner.

From the point for the center S 1/16 section corner of section 25.

N. 88°42.8' W., on the E-W centerline of the SW 1/4 of section 25.

19.803 The SW 1/16 section corner.

39.606 The S 1/16 section corner of sections 25 and 26.

From the center N 1/16 section corner of section 25.

N. 89°55.7' W., on the E-W centerline of the NW 1/4 of section 25.

39.869 The N 1/16 section corner of sections 25 and 26.

The Subdivision of Section 26,  
T. 23 S., R. 2 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 26 and 35.

N. 0°53.7' W., on the N-S centerline of section 26.

20.080 Point for the center S 1/16 section corner. Not monumented.

40.160 Point for the center 1/4 section corner, at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a small mound of stone, to top of aluminum cap marked:

T23SR2W  
C 1/4  
S26  
2010

Set a steel fence post alongside the aluminum post.

THE SUBDIVISION OF SECTION 26,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

Corner falls on east edge of cultivated field, and 1 foot east of a fence extending north and south.

60.215 Point for the center N 1/16 section corner. Not monumented.

80.270 The 1/4 section corner of sections 23 and 26.

---

From the 1/4 section corner of sections 25 and 26.

S. 89°00.4' W., on the E-W centerline of section 26.

20.190 Point for the center E 1/16 section corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, to solid rock, magnet at base, in a mound of stone, 2 feet base to top of aluminum cap marked:

E 1/16  
C — C  
S26  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest-facing slope.

40.380 The center 1/4 section corner.

80.520 The 1/4 section corner of sections 26 and 27.

---

From the center E 1/16 section corner of section 26.

N. 1°03.2' W., on the N-S centerline of the NE 1/4 of section 26.

20.034 Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

NE 1/16  
S26  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a moderate south-facing slope with large boulders.

40.068 The E 1/16 section corner of sections 23 and 26.

---

THE SUBDIVISION OF SECTION 26,  
TOWNSHIP 23 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the N 1/16 section corner of sections 25 and 26.

S. 89°04.1' W., on the E-W centerline of the NE 1/4 of section 26.

- 20.134 The NE 1/16 section corner.  
40.268 The point for the center N 1/16 section corner.
- 

From the point for the E 1/16 section corner of sections 26 and 35.

N. 0°43.8' W., on the N-S centerline of the SE 1/4 of section 26.

- 20.118 Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, to solid rock, magnet at base, in a mound of stone, 3 feet base to top of aluminum cap marked:

SE 1/16  
S26  
2010

Set a steel fence post alongside the aluminum post.

Corner falls on a gradual southwest-facing slope. This corner also serves as the northeast corner of the Holt property.

- 40.236 The center E 1/16 section corner.
- 

From the S 1/16 section corner of sections 25 and 26.

S. 89°06.0' W., on the E-W centerline of the SE 1/4 of section 26.

- 20.132 The SE 1/16 section corner.  
40.264 The point for the center S 1/16 section corner.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

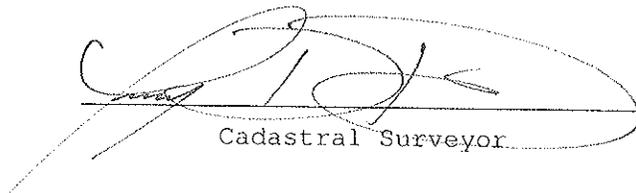
Name	Capacity
Ronald K. Baugh	Supervisory Cadastral Surveyor
Vincent Porter	Survey Aid
Jacob Murdock	Survey Aid

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis*, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the 14<sup>th</sup> day of May, 2010, I have *dependently resurveyed a portion of the subdivisional lines, and subdivided sections 12, 14, 23, 25, and 26, in Township 23 South, Range 2 West*, of the Salt Lake Meridian, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 10, 2011

Date

  
Cadastral Surveyor

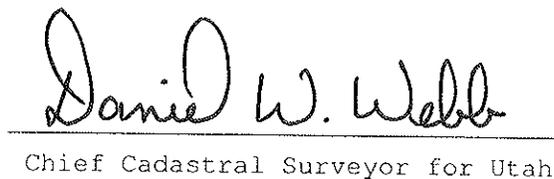
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the subdivisional lines, and the subdivision of sections 12, 14, 23, 25, and 26, in Township 23 South, Range 2 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

March 9, 2012

Date

  
Chief Cadastral Surveyor for Utah