

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

PORTIONS OF THE WEST AND NORTH BOUNDARIES,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 5 AND 6,

IN

TOWNSHIP 37 SOUTH, RANGE 13 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved **May 7, 2012**, which provided for the surveys included under Group Number **1195**, and Assignment Instructions dated **May 7, 2012**.

Survey Commenced, **May 14, 2012**
Survey Completed, **June 21, 2012**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
PORTIONS OF THE WEST AND NORTH BOUNDARIES,
A PORTION OF THE SUBDIVISIONAL LINES,
AND
THE SUBDIVISION OF SECTIONS 5 AND 6,
IN

TOWNSHIP 37 SOUTH, RANGE 13 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved **May 7, 2012**, which provided for the surveys included under Group Number **1195**, and Assignment Instructions dated **May 7, 2012**.

Survey Commenced, **May 14, 2012**
Survey Completed, **June 21, 2012**

INDEX DIAGRAM

TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

6	5				
3 6	11 5	8 4	3	2	1
10	9				
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 5.....12
 The Subdivision of Section 6.....14

TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5 and 6, in T. 37 S., R. 13 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY			
All	A.J. Stewart Jr.	1873	
All			H. Price & E. Bird 1918
Portion			A. Nelson & Etal. 1936
Portion			D.A. Graff 2008-09
EAST BOUNDARY (First Guide Meridian West)			
All	J. Bausman	1869-70	
All			J.W. Dougall 1916
Portion			R.A. Zaninovich 1990
Portion			D.A. Graff 2008-09
WEST BOUNDARY			
Portion	A.J. Stewart Jr.	1873	
Portion	A. Nelson	1936	A. Nelson 1936
NORTH BOUNDARY			
All	A.J. Stewart Jr.	1873	
Portion			A.D. Ferron 1911
Portion			A. Nelson & Etal. 1936
Portion			R.A. Zaninovich 1990
Portion			L.V. Judd 2004
SUBDIVISION			
Portion	A.J. Stewart Jr.	1873	
Portion	A. Nelson & Etal.	1936	A. Nelson & Etal. 1936
Remonum.			F.D. Reynolds 1968-69
Portion			L.V. Judd 2004

FOREST SERVICE SURVEYS

The Forest Service has monumented certain corners within the township, with plats on file at the Region 4 office located in Cedar City, UT.

PRIVATE SURVEYS

A survey was executed by M.H. Dalley, Iron County Surveyor, with field notes on file at the Iron County Engineers Office.

A survey was executed by Lynn R. Elam, L.S. 8516, R.L.S. 174826, Elam Surveying Service, with a survey plat dated August 17, 1996, on file at the Iron County Recorder's Office.

A survey was executed by Newell Brent Carter, R.L.S. 354372, New horizon, with a survey plat dated February 20, 2008, on file at the Iron County Recorder's Office.

TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1198, dated May 7, 2012.

The direction of each line is with reference to the true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys when using Global Navigation Satellite Systems (GNSS)* dated, February 23, 2009. Trimble model 3 R8 (GNSS) GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); ECHO ECHO_BRGN_NV1999 CORS ARP, NVPI PIOCHE CORS ARP, P009 MARYSVALE_UT2006 CORS ARP.

The geographic position of the corner of sections 4, 5, 8, and 9, T. 37 S., R. 13 W., is as follows:

Latitude: **37°36'11.788" N.**,
Longitude: **113°19'34.754" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,
Network Accuracy = 0.200 meter at 95% confidence.

The geographic position of the corner of Tps. 36 and 37 S., Rs. 13 and 14 W., is as follows:

Latitude: **37°37'06.158" N.**,
Longitude: **113°21'48.388" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,
Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the West Boundary,
T. 37 S., R. 13 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.J. Stewart Jr.
in 1873

Beginning at the corner of sections 1, 6, 7, and 12, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1936 resurvey.

from which the original bearing trees

A juniper, 25 inches diameter, bears N. 70°30' E., 59 links distance, with faint scribe marks on a partially healed blaze.

A piñon stump, 12 inches diameter, bears S. 75°15' E., 36 links distance, with no blaze or marks visible.

A juniper stump, 8 inches diameter, bears S. 55° W., 41 links distance, with no blaze or marks visible.

A juniper 20 inches diameter, bears N. 32°30' W., 18 links distance, with faint scribe marks on an open blaze.

A marked stone firmly set, marked 1 notch on north and 5 notches on south edges, located alongside.

Corner falls in a fence line extending east and west, on top of small knoll.

N. 0°35.7' E., between sections 1 and 6.

40.770 The 1/4 section corner of sections 1 and 6, monumented with an iron pipe, 2 inches diameter, firmly set, in concrete, projecting 12 inches above the ground, with an iron plate 2 1/4 inches square welded to top marked C.I.M. CO 1 + 6 1/4 COR.

from which the original bearing tree

A juniper, 20 inches diameter, bears N. 52 1/2° E., 28 links distance, with a healed blaze.

No remaining evidence of the southwest bearing tree was found.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Raise a mound of stone, 3 ft. base, to top of iron pipe.

Corner falls in a fence line extending east and west on flat ground in piñon and juniper.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°07.5' W., beginning new measurement.

20.432 Point for the N 1/16 section corner of sections 1 and 6.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

N 1/16
S1 | S6
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on flat ground in piñon and juniper.

From this corner point, a rebar, 1/2 inches diameter, firmly set, projecting 2 inches above the ground, with yellow cap attached marked BBE INC, bears N. 0°26.3' E., 9 links distance. This monument was not utilized during the course of this resurvey.

40.864 The corner of Tps. 36 and 37 S., Rs. 13 and 14 W., monumented with a rebar, 5/8 inch diameter, firmly set in a mound of stone 5 ft. base, with an aluminum cap 1 inch diameter attached marked R14W R13W 36 31 T36S 1 6 T37S RLS 174826.

from which the original bearing trees

A juniper stump, 12 inches diameter, bears N. 12 1/2° E., 22 links distance, with no blaze or marks visible.

A juniper, dead and standing, 18 inches diameter, bears West (Record; S. 80° W.), 6 links distance, with visible scribe marks on an open blaze.

A piñon, 12 inches diameter, down dead, with a rotting blaze, not remeasured.

A juniper, 12 inches diameter, bears N. 32° W., 40 links distance, with visible scribe marks visible on an open blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 5 ft. base, to top of aluminum cap marked

T36S
R14W R13W
S36 | S31
S1 | S6
T37S
2012

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A sandstone, 28x10x10 inches, lying in the mound of stone, plainly marked with 6 large notches on four edges, located alongside.

Set the marked stone, steel fence post alongside, and buried a magnet along with rebar and cap at base of aluminum post.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner falls on top of hill in piñon and juniper.

Dependent Resurvey of a Portion of the North Boundary,
T. 37 S., R. 13 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1873

From the corner of sections 32, 33, 4, and 5, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1936 resurvey.

from which the original bearing trees

A juniper, 10 inches diameter, bears N. 48° E., 25 links distance, with visible scribe marks on a partially healed blaze.

A juniper, 10 inches diameter, bears S. 21° E., 48 links distance, with visible scribe marks on a partially healed blaze.

A juniper, 25 inches diameter, bears N. 25° W., 160 links distance, with visible scribe marks on a partially healed blaze.

Corner falls on a slight north slope in dense undergrowth.

S. 88°32.9' W., between sections 5 and 32.

20.100 Point for the E 1/16 section corner of sections 5 and 32, not monumented.

40.200 Point for the 1/4 section corner of sections 32 and 5, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground, to solid rock, in a mound of stone, 5 ft. base, with aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T36SR13W
S32
1/4 —
S5
T37S
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on a steep slope in dense piñon, juniper, and oak bush.

80.400 The corner of sections 5, 6, 31, and 32, monumented with a drive rod, 1/2 inch diameter, firmly set, flush with ground surface, in a mound of stone 3 ft. base, with brass cap attached marked, T36SR13W 31 32 5 6 RLS 8516.

from which the original bearing tree

A juniper, 14 inches diameter, bears S. 5° E., 130 links, with faint scribe marks on an open blaze.

A sandstone, 11x8x6 inches, clearly marked 4 notches on east edge, and 1 notch on west edge, located alongside. The rock appears to be damaged with one notch missing on east edge.

This position is accepted as a careful and faithful perpetuation of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR13W
S31 | S32
S6 | S5
T37S
2012

Set marked stone, fence post, rod and cap alongside, and buried a magnet at the base of the aluminum post.

Corner falls on flat ground in piñon, juniper, and oak brush.

S. 87°45.1' W., between sections 6 and 31.

20.363 Point for the E 1/16 section corner of sections 6 and 31.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S31
E 1/16 —
S6
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls 27 ft. east of Comstock Road extending northeast and southwest, in sagebrush, scattering piñon and juniper.

- 40.726** The 1/4 section corner of sections 6 and 31, monumented with a granite stone, 18x11x3 inches, lying flat on ground, in a small mound of stone, marked 1/4 on north face.

No remaining evidence of the original bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR13W
S31
1/4 —
S6
T37S
2012

Deposit marked stone, set steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on flat ground in piñon and juniper.

From the corner point, an aluminum drive rod, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base, with an aluminum cap 3 1/4 inches diameter attached marked US DEPT OF AGRICULTURE T36SR13W SEC 31 1/4 SEC 6 T37SR13W 1986, bears N. 1°49.7' W., 254 links distance. This corner point was determined by Pug Urie at an unknown date, then perpetuated by the Forest Service in 1986, and L.R. Elam in 1995. This corner was not utilized during the course of this resurvey.

N. 84°55.0' W., beginning new measurement.

- 40.306** The corner of Tps. 36 and 37 S., Rs. 13 and 14 W., hereinbefore described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 37 S., R. 13 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.J. Stewart Jr. 1873,
and the Resurveys Executed by E. Bird in 1936,
and L.V. Judd in 2004

From the corner of sections 4, 5, 8, and 9, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone 4 ft. base, with brass cap marked as described in the official record of the 1936 resurvey.

from which the 1936 bearing trees

A juniper, 18 inches diameter, bears N. 84°04' E., 230 links distance, scribed T37S R13W S4 BT.

A juniper, 14 inches diameter, bears N. 28° W., 21 links distance, with visible scribe marks.

Corner falls on a northwest slope in piñon, juniper, and oak brush.

N. 1°07.8' W., between sections 4 and 5.

- 19.775** The S 1/16 section corner of sections 4 and 5, monumented with a sandstone, 18x8x6 inches, firmly set, marked with an "X". This corner was set by M.H. Dalley in 1894 for J.R. Woosley located in the NE1/4 SE1/4 of section 5.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base to top of aluminum cap marked

T37S R13W
S 1/16
S5 | S4
2012

Deposit magnet at base of aluminum post.

This position is accepted as a careful and faithful determination of the original corner position.

Corner falls a north slope near top of hill in piñon, juniper, and oak brush.

From this corner point, an aluminum pipe, 2 1/2 inches diameter, firmly set, in a mound of stone 2 ft. base, to top of aluminum cap marked as described in the official record of the 2004

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

resurvey, with two aluminum posts alongside, bears N. 61° E., 4 links distance, mark AM 2012, and bury in place.

This corner was not utilized in the course of this resurvey

N. 0°53.7' W., beginning new measurement.

- 19.785 The 1/4 section corner of sections 4 and 5, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base to top of brass cap marked as described in the official record of the 1936 resurvey.

from which the 1936 bearing trees

A juniper, 36 inches diameter, bears N. 38° E., 24 links distance, scribed 1/4 S4 BT, on a partially healed blaze.

A juniper, 24 inches diameter, bears S. 35°30' W., 114 links distance, scribed 1/4 S5 BT, on a partially healed blaze.

Corner falls at corner of fences extending south and east, on top of small ridge.

N. 1°20.0' W., beginning new measurement.

- 21.945 The N 1/16 section corner of sections 4 and 5, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with aluminum cap marked as described in the official record of the 2004 resurvey.

A mound of stone, 2 ft. base, is located to the south.

Corner falls in a fence line extending east and west, on top of hill in mixed brush, piñon, and juniper.

- 43.890 The corner of sections 4, 5, 32, and 33, on the north boundary of the township, hereinbefore described.
-

Reestablishment of the Survey Executed by A.J. Stewart Jr. in 1873, and the Resurvey Executed by E. Bird in 1936

From the corner of sections 4, 5, 8, and 9.

N. 88°44.8' W., between sections 5 and 8.

- 20.161 Point for the E 1/16 section corner of sections 5 and 8, not monumented.

- 40.322 The 1/4 section corner of sections 5 and 8, monumented with an iron post, firmly set, in a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1936 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

from which the 1936 bearing trees

A juniper, 11 inches diameter, bears N. 18°30' E., 39 links distance, with visible scribe marks on a mostly healed blaze.

A piñon, 18 inches diameter, bears S. 56° E., 129 links distance, with visible scribe marks on a mostly healed blaze.

Corner falls on top of ridge extending northeast and southwest, in oak brush, piñon, and juniper.

N. 88°46.6' W., beginning new measurement.

- 40.413 The corner of sections 5, 6, 7, and 8, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone 3 ft. base, with brass cap marked as described in the official record of the 1936 resurvey, two aluminum posts, are located alongside.

from which the remaining original bearing tree

A juniper, 27 inches diameter, bears N. 65° W., 37 links distance, with faint scribe marks visible on an open blaze.
(Record; 66 links)

No remaining evidence of the northeast or southwest bearing trees was found.

Corner falls on a steep east slope, in dense oak brush, piñon, and juniper.

S. 89°58.1' W., between sections 6 and 7.

- 20.511 The E 1/16 section corner of sections 6 and 7, monumented with an aluminum drive rod, 1 inch diameter, firmly set, in a scattered mound of stone 2 ft. base, projecting 12 inches above the ground, with an aluminum cap 3 1/4 inches diameter attached marked USDA FOREST SERVICE T37S R13W SEC6 E 1/16 SEC7 LS 6166 1986.

from which

A juniper, 12 inches diameter, bears S. 50° W., 23 links distance, scribed S& BT, on an open blaze.

This position is accepted as a careful and faithful determination of the position of the corner.

Corner falls at corner of fences extending north and west, on a slight northeast slope in piñon, juniper, and oak brush.

S. 89°56.8' W., beginning new measurement.

- 20.514 The 1/4 section corner of sections 6 and 7, monumented with an

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

iron post, 1 inch diameter, firmly set, in a mound of stone 3 ft. base, with brass cap marked as described in the official record of the 1936 resurvey.

from which

A juniper, 13 inches diameter, bears S. 81°45' W., 76 links distance, with visible scribe marks on a mostly healed blaze.

A juniper, 12 inches diameter, bears N. 27° 15' W., 26 links distance, with a healed blaze.

Corner falls in a fence line extending east and west, on an east slope in piñon and juniper.

S. 89°58.0' W., beginning new measurement.

- 41.535** The corner of sections 1, 6, 7, and 12, on the west boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by
A.J. Stewart Jr. in 1873

From the corner of sections 5, 6, 7, and 8.

N. 1°26.5' E., between section 5 and 6.

- 41.104** The 1/4 section corner of sections 5 and 6, monumented with an iron post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top with brass cap marked as described in the official record of the 1968 remonumentation.

from which the original bearing tree

A piñon, 18 inches diameter, bears S. 21° E., 58 links distance, with faint scribe marks visible on an open blaze.

No remaining evidence of the southwest bearing tree was found.

Corner falls at corner of fences extending south, east, and west, on top of ridge extending east and west, in piñon and juniper.

N. 3°34.1' W., beginning new measurement.

- 38.590** The corner of sections 5, 6, 31, and 32, on the north boundary of the township, hereinbefore described.

THE SUBDIVISION OF SECTION 5,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 5,
T. 37 S., R. 13 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 5 and 8.

N. 1°07.0' W., on the N-S centerline of section 5.

20.177 Point for the center S 1/16 section corner of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

C
S 1/16 | S5
C
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on a slight southeast slope in dense piñon and juniper.

40.354 Point for the center 1/4 section corner, at intersection with the E-W centerline of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T37SR13W
C 1/4
S5
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on east edge of small wash drains northwest in piñon and juniper.

60.941 Point for the center N 1/16 section corner of section 5, not monumented.

81.528 The 1/4 section corner of sections 5 and 32, on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 4 and 5.

N. 87°35.8' W., on the E-W centerline of section 5.

20.222 Point for the center E 1/16 section corner of section 5.

THE SUBDIVISION OF SECTION 5,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

E 1/16
C — C
S5
2012

Bury a magnet at the base of the aluminum post.

Corner falls in a fence line extending north and south.

40.444 The center 1/4 section corner of section 5.

79.069 The 1/4 section corner of sections 5 and 6.

From the center E 1/16 section corner of section 5.

N. 1°13.7' W., on the N-S centerline of the NE 1/4 of section 5.

21.267 Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4 of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

NE 1/16
S5
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls on a gradual north slope.

42.534 The point for the E 1/16 section corner of sections 5 and 32.

From the N 1/16 section corner of sections 4 and 5.

N. 89°31.1' W., on the E-W centerline of the NE 1/4 of section 5.

20.150 The NE 1/16 section corner of section 5.

40.300 The point for the center N 1/16 section corner of section 5.

From the point for the E 1/16 section corner of sections 5 and 8.

N. 1°03.9' W., on the N-S centerline of the SE 1/4 of section 5.

19.965 Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4 of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24

THE SUBDIVISION OF SECTION 5,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, with aluminum cap marked

SE 1/16
S5
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner falls at corner of fences extending north and east, on flat ground in dense oak brush, piñon, and juniper.

39.947 The center E 1/16 section corner of section 5.

From the S 1/16 section corner of sections 4 and 5.

N. 88°08.8' W., on the E-W centerline of the SE 1/4 of section 5.

20.154 The SE 1/16 section corner of section 5.

40.348 The center S 1/16 section corner of section 5.

The Subdivision of Section 6,
T. 37 S., R. 13 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 6 and 7.

N. 0°46.1' W., on the N-S centerline of section 6.

40.932 Point for the center 1/4 section corner, at intersection with the E-W centerline of section 5, not monumented.

78.046 The 1/4 section corner of section 6 and 31, on the north boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 5 and 6.

S. 89°44.5' W., on the E-W centerline of section 6.

21.303 The center E 1/16 section corner of section 6, monumented with an aluminum drive rod, 1 inch diameter, firmly set, projecting 6 inches above the ground, with an aluminum cap 3 1/4 inches diameter attached marked USDA FOREST SERVICE T37S R13W CE 1/16 SEC6 LS 6166 1986.

This corner is accepted as a careful and faithful determination of the position of the corner.

Set a steel fence post alongside, and raised a mound of stone, 3 ft. base, to top of aluminum cap.

Corner falls on a slight east slope at edge of piñon and juniper

THE SUBDIVISION OF SECTION 6,
TOWNSHIP 37 SOUTH, RANGE 13 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

stand.

- 42.604** Point for the center 1/4 section corner of section 6.
- 83.163** The 1/4 section corner of sections 1 and 6, on the east boundary of the township, hereinbefore described.

From the center E 1/16 section corner of section 6.

N. 2°11.7' W., on the N-S centerline of the NE 1/4 of section 6.

- 37.842** The E 1/16 section corner of sections 6 and 31, on the north boundary of the township, hereinbefore described.

From the E 1/16 section corner of sections 6 and 7.

N. 0°20.2' E., on the N-S centerline of the SE 1/4 of section 6.

- 41.006** The center E 1/16 section corner of section 6.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


Name	Capacity
Jacob Murdoch	Survey Technician
Luke Stoddard	Survey Technician

CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *May 7, 2012*, I have *dependently resurveyed a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5 and 6, in Township 37 South, Range 13 West*, of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 29, 2014

Date

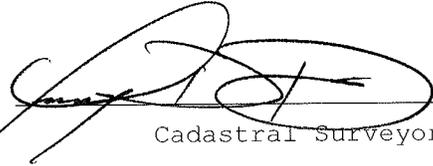

Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey a portion of the west and north boundaries, a portion of the subdivisional lines, and the subdivision of sections 5 and 6, in Township 37 South, Range 13 West*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

September 26, 2014

Date

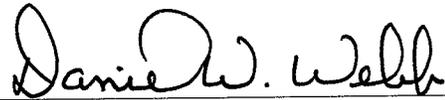

Chief Cadastral Surveyor for Utah