

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SOUTH BOUNDARY (SEVENTH STANDARD PARALLEL SOUTH),

**TOWNSHIP 35 SOUTH, RANGE 12 WEST,**

AND

A PORTION OF THE WEST BOUNDARY (GUIDE MERIDIAN),

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 4, 8, 17, 18, 19, AND 30,

IN

**TOWNSHIP 36 SOUTH, RANGE 12 WEST,**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
**Cadastral Surveyor**

Under Special Instructions dated and approved **June 10, 2013**, which provided for the surveys included under Group Number **1234**, and Assignment Instructions dated **June 10, 2013**.

Survey Commenced, **July 22, 2013**  
Survey Completed, **August 6, 2013**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SOUTH BOUNDARY (SEVENTH STANDARD PARALLEL SOUTH),

**TOWNSHIP 35 SOUTH, RANGE 12 WEST,**

AND

A PORTION OF THE WEST BOUNDARY (GUIDE MERIDIAN),

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 4, 8, 17, 18, 19, AND 30,

IN

**TOWNSHIP 36 SOUTH, RANGE 12 WEST,**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
**Cadastral Surveyor**

Under Special Instructions dated and approved **June 10, 2013**, which provided for the surveys included under Group Number **1234**, and Assignment Instructions dated **June 10, 2013**.

Survey Commenced, **July 22, 2013**  
Survey Completed, **August 6, 2013**

## INDEX DIAGRAM

TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

		4			
6	5	10 4	3	2	1
	15				
7	15 8	9 9	10	11	12
	13				
8 18	12 17	16	15	14	13
	12				
7 19	20	21	22	23	24
	11				
6 30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 4.....	16
The Subdivision of Section 8.....	18
The Subdivision of Section 17.....	20
The Subdivision of Section 18.....	21
The Subdivision of Section 19.....	22
The Subdivision of Section 30.....	23

## TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the south boundary (Seventh Standard Parallel South), T. 35 S., R. 12 W., a portion of the west boundary (Guide Meridian), a portion of the subdivisional lines, and the subdivision of sections 4, 8, 17, 18, 19, and 30, in T. 36 S., R. 12 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
<b>NORTH BOUNDARY (Seventh Standard Parallel South)</b>			
All	J. Bausman	1870	
Portion			R. Gentry & A. Nelson 1924-25
Portion			J.D. Davis 2012-13
<b>WEST BOUNDARY (Guide Meridian)</b>			
All	J. Bausman	1870	
Portion			A.D. Ferron 1911
All			R. Gentry & A. Nelson 1924-25
Portion			R.A. Zaninovich 1990
Portion			J.D. Davis 2012-13
<b>SOUTH BOUNDARY</b>			
All	J. Gorlinski	1870	
Portion			J. Dougall 1916
Portion			M.H. Krohn 1985
Portion			L.V. Judd 2004
Portion			J.D. Davis 2010-11
<b>EAST BOUNDARY</b>			
All	J. Bausman	1870	
<b>SUBDIVISION</b>			
Portion	J. Bausman	1870	
Portion	R. Gentry & A. Nelson	1924-25	R. Gentry & A. Nelson 1924-25
Portion			J.D. Davis 2010-11
Portion			J.D. Davis 2012-13

## PRIVATE SURVEYS

A survey was executed by Neil L. Rhodes, L.S. 4100, Bulloch Brothers Engineering, with a plat dated May 13, 1973, for Utah Properties Listing No. 198. This plat is unrecorded.

A survey was executed by Neil L. Rhodes, L.S. 4100, Bulloch Brothers Engineering, with a plat dated March 1, 1988, Plat No. 28, on record at the Iron County Recorder's Office.

A survey was executed by Neil L. Rhodes, L.S. 4100, Bulloch Brothers Engineering, with a plat dated August 3, 1992, Plat No. 243, on record at the Iron County Recorder's Office.

## TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

**PRIVATE SURVEYS CONT.**

A survey was executed Robert B. Platt, L.S. 6315, Platt and Platt INC, with plat dated March 22, 1989, plat No. 57, on record at the Iron County Recorder's Office.

A survey was executed by Neil L. Rhodes, L.S. 4100, Bulloch Brothers Engineering, with a plat dated October 29, 1998, Plat No. 953, on record at the Iron County Recorder's Office.

A survey was executed by David M. Clark, L.S. 343641, Platt and Platt INC, with plat dated august, 2010. This plat was not recorded at the time of the survey.

## TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1234, dated June 10, 2013.

The directions of the lines were determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by the National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): NVPI PIOCHE CORS ARP, AZPG CITYOF PAGE CORS ARP, and P009 MARYSVALE\_UT 2006 ARP.

The geographic position of the corner of sections 12 and 13 only, T. 36 S., R. 13 W., as determined by direct RTK methods from the National Geodetic survey OPUS solution, is as follows:

Latitude: **37°40'39.702" N.**,  
Longitude: **113°15'07.999" W.**, N.A.D. 83,  
Network Accuracy = 0.200 meter at 95% confidence.

The geographic position of the 1/4 section corner of sections 29 and 30, as determined by direct RTK methods from the National Geodetic survey OPUS solution, is as follows:

Latitude: **37°38'27.623" N.**,  
Longitude: **113°14'04.832" W.**, N.A.D. 83,  
Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
 (SEVENTH STANDARD PARALLEL SOUTH),  
 TOWNSHIP 35 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a Portion of the South Boundary,  
 (Seventh Standard Parallel South),  
 T. 35 S., R. 12 W., Salt Lake Meridian, Utah

---

Establishment of the Survey Executed by J. Bausman in 1870,  
 and the Resurvey Executed by R. Gentry and A. Nelson in 1924-25

---

Beginning at the standard corner of sections 33 and 34,  
 monumented with an iron post, 2 inches diameter, firmly set,  
 projecting 14 inches above the ground, with brass cap marked as  
 described in the official record of the 1924-25 resurvey.

Raise a mound of stone, 2 ft. base by 1 ft. high, around the  
 iron post.

A steel fence post is located alongside mound of stone.

Corner falls at corner of fence lines extending north and west.

**S. 87°10.6' W.**, on the south boundary of section 33.

- 1.467** The closing corner of sections 3 and 4, T. 36 S., R. 12 W.,  
 monumented with an iron post, 2 inches diameter, firmly set, in  
 a mound of stone, 1 ft. base, to top of brass cap marked as  
 described in the official record of the 1924-25 survey.

A steel fence post is located alongside mound of stone.

Corner falls in an old fence line extending east and west.

- 41.504** The 1/4 section corner of section 4, T. 36 S., R. 12 W.,  
 monumented with an iron post, 1 inch diameter, firmly set,  
 projecting 5 inches above a mound of stone, 3 ft. base, with  
 brass cap marked as described in the official record of the  
 1924-25 resurvey.

from which the 1924-25 bearing trees

A juniper, 10 inches diameter, bears S. 31° E., 41 links  
 distance, with a healed blaze.

A juniper, 14 inches diameter, bears S. 59° W., 41 links  
 distance, scribed 1/4 S4 BT, on an open blaze.

Corner falls on a slight rocky northeast slope in piñon and  
 juniper growth.

- 41.730** The standard 1/4 section corner of section 33, monumented with  
 an iron post, 1 inch diameter, firmly set, in a mound of stone,  
 3 ft. base, to top of brass cap marked as described in the  
 official record of the 1924-25 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,  
 (SEVENTH STANDARD PARALLEL SOUTH),  
 TOWNSHIP 35 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

from which the 1924-25 bearing trees

A piñon, 10 inches diameter, bears N. 81°30' E., 49 links distance, scribed 1/4 S33 BT, on a partially healed blaze.

A juniper, 16 inches diameter, bears N. 37° W., 87 links distance, with partial marks visible through a mostly healed blaze.

Corner falls on a slight northeast slope in piñon and juniper growth.

**61.557** The point for the W 1/16 section corner of section 4, not monumented.

**79.767** The closing corner of sections 4 and 5, T. 36 S., R. 12 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1924-25 survey.

from which the original bearing trees

A piñon, 10 inches diameter, bears S. 42° E., 105 links distance, with a healed blaze.

A juniper, 10 inches diameter, bears S 61° W., 139 links distance, scribed T36S R12W S5 CC BT, on an open blaze.

Corner falls on a gradual northeast slope in piñon and juniper growth.

**83.513** The standard corner of sections 32 and 33, monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1924-25 resurvey.

from which the 1924-25 bearing trees

A root hole, bears N. 51°45' E., 165 links distance, lying alongside, a piñon, 10 inches diameter, with faint marks on an open blaze.

A piñon, 10 inches diameter, bears N. 47° W., 73 links distance, scribed T35S R12W S32 SC BT, on an open blaze.

Corner falls on a slight northeast slope in dense piñon and juniper growth.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
(GUIDE MERIDIAN),  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a Portion of the West Boundary  
(Guide Meridian),  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by J. Gorlinski in 1870,  
the Resurvey Executed by A.D. Ferron in 1911, the Retracement  
Executed by R. Gentry and A. Nelson in 1924-25, and the Resurvey  
Executed by R.A. Zaninovich in 1990

---

From the 1/4 section corner of section 30 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a small mound of stone, to top of aluminum cap marked as described in the official record of the 1990 resurvey.

Corner falls 1 ft. west of corner of fence lines extending north, south, and east, on flat ground.

**N. 0°42.3' E.**, on the west boundary of section 30.

- 20.298** The N 1/16 section corner of section 30 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with aluminum cap marked as described in the official record of the 1990 resurvey.

A steel fence post is located alongside the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

---

**N. 0°40.1' E.**, beginning new measurement.

- 14.642** The closing corner of sections 24 and 25, T. 36 S., R. 13 W., monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top aluminum cap marked as described in the official record of the 1990 resurvey.

Corner falls on flat ground in scattered piñon and juniper growth.

---

**N. 0°37.4' E.**, beginning new measurement.

- 5.662** The corner of sections 19 and 30 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked as described in the official record of the 1990 resurvey.

from which the original bearing trees

A juniper, 12 inches diameter, bears S. 52° E., 25 links, with faint scribe marks visible on a partially healed blaze.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
(GUIDE MERIDIAN),  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 18 inches diameter, bears S. 25° W., 31 links distance, with faint scribe marks visible on a chain sawed open blaze.

A mound of stone, 3 ft. base by 1 ft. high is located to the east of the aluminum post.

Corner falls on flat ground in scattered piñon and juniper growth.

Reestablishment of the Survey Executed by J. Gorlinski in 1870,  
the Retracement Executed by R. Gentry and A. Nelson in 1924-25,  
and the Resurvey Executed by R.A. Zaninovich in 1990

**N. 0°34.9' E.**, on the west boundary of section 19.

- 34.315** The 1/4 section corner of section 24 only, T. 36 S., R. 12 W., monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked as described in the official record of the 1990 resurvey.

A mound of stone, 3 ft. base by 1 ft. high is located to the west, with a steel fence post alongside of the aluminum post.

Corner falls on flat ground in scattered juniper growth.

- 40.423** The 1/4 section corner of section 19 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top aluminum cap marked as described in the official record of the 1990 resurvey.

Remnants of the original wood post were found lying alongside the aluminum post.

A steel fence post is located alongside the aluminum post.

Corner falls on flat ground in scattered juniper growth.

**N. 0°19.6' E.**, beginning new measurement.

- 33.862** The closing corner of sections 13 and 24, T. 36 S., R. 13 W., monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top of aluminum cap marked as described in the official record of the 1990 resurvey.

A steel fence post is located alongside the aluminum post.

Corner falls on flat ground in sagebrush.

- 40.550** The corner of sections 18 and 19 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
(GUIDE MERIDIAN),  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

the ground, with brass cap marked as described in the official record of the 1924-25 resurvey.

The marked stone is firmly set alongside along with a mound of stone 2 ft. base by 1 ft. high to the east of the aluminum post.

Corner falls on flat ground in sagebrush.

---

Reestablishment of the Survey Executed by J. Gorlinski in 1870,  
the Resurveys Executed by R. Gentry & A. Nelson in 1924-25,  
and by R.A. Zaninovich in 1990

---

N. 0°26.5' E., on the west boundary of section 18.

- 33.312** The 1/4 section corner of section 13 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, in a mound of stone, 8 ft. diameter, to top of aluminum cap marked as described in the official record of the 1990 resurvey.

Corner falls on a slight southwest slope in piñon and juniper growth.

- 40.517** The 1/4 section corner of section 18 only, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1990 resurvey.

from which the original bearing trees

A juniper, 20 inches diameter, bears S. 60° E., 34 links distance, with faint scribe marks on a partially healed blaze.

A juniper, 14 inches diameter, bears S. 81° W., 45 links distance, with a healed blaze.

The marked stone is located alongside the iron post.

Corner falls on flat ground in piñon and juniper growth.

---

N. 0°18.9' E., beginning new measurement.

- 39.531** The closing corner of sections 7 and 18, T. 36 S., R. 12 W., monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1924-25 resurvey.

from which the 1924-25 bearing trees

A juniper, 14 inches diameter, bears N. 72° E., 90 links distance, scribed T36S R12W S7 CC BT, on a partially healed blaze.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY  
(GUIDE MERIDIAN),  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper stump, 8 inches diameter, 2 ft. tall, bears S. 48° E., 75 links distance, with a healed blaze.

Corner falls on a slight northeast slope in piñon and juniper growth.

- 40.401** The corner of sections 12 and 13 only, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, 6 inches below the ground, with aluminum cap marked as described in the official record of the 1990 resurvey.

from which the original bearing trees

A juniper stump, 8 inches diameter, 3 ft. tall, bears S. 36° E., 44 links distance, with faint scribe marks on a partially healed blaze.

A juniper, 14 inches diameter, bears S. 70° W., 57 links distance, with faint scribe marks on a partially healed blaze.

A juniper, 12 inches diameter, bears N. 23 3/4° W., 98 links distance, scribed T36S R13W S12 BT, on a partially healed blaze.

A steel fence post is located alongside the aluminum post.

Corner falls in a shallow wash, drains southeasterly, in piñon and juniper growth.

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by J. Gorlinski in 1870,  
and the Resurvey Executed by R. Gentry and A. Nelson in 1924-25

From the corner of sections 8, 9, 16, and 17, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above the ground, marked as described in the official record of the 1924-25 resurvey.

A steel fence post is located alongside.

Corner falls on flat ground in sage brush.

**N. 0°21.0' E.**, between sections 8 and 9.

- 20.008** The point for the S 1/16 section corner of sections 8 and 9, not monumented.

- 40.016** The 1/4 section corner of sections 8 and 9, monumented with an

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

iron post, 1 inch diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1924-25 resurvey.

from which the 1924-25 bearing trees

A bifurcated juniper, 14 inches diameter, bears S. 30°15' E., 37 links distance, scribed 1/4 S9 BT, on a partially healed blaze.

A trifurcated juniper, 14 inches diameter, bears S. 22°30' W., 27 links distance, with scribe marks 8 BT visible on a mostly healed blaze.

A steel fence post is located alongside the iron post.

Corner falls on a slight northeast slope in piñon and juniper growth

**80.000** The corner of sections 4, 5, 8, and 9, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 4 ft. base, to top of brass cap marked as described in the official record of the 1924-25 resurvey.

from which the remaining 1924-25 bearing trees

A piñon, 8 inches diameter, bears N. 54°30' E., 57 links distance, with scribe mark BT visible through a mostly healed blaze.

A piñon, 8 inches diameter, bears S. 21° W., 51 links distance, scribed T36S R12W S8 BT, on a partially healed blaze.

A piñon, 10 inches diameter, bears N. 59° W., 26 links distance, scribed T36S R12W S5 BT, on a partially healed blaze.

Corner falls on a gradual southeast slope in piñon and juniper growth.

---

Reestablishment of the Survey Executed by  
R. Gentry and A. Nelson in 1924-25

---

**N. 0°01.4' E.**, between sections 4 and 5.

**39.526** The 1/4 section corner of section 4 only, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1924-25 survey.

from which the remaining original bearing tree

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

A juniper, 24 inches diameter, bears S. 6° E., 66 links  
distance, scribed 1/4 S4 BT, on a partially healed blaze.

Corner falls on a steep rocky southeast slope in piñon and  
juniper growth.

---

N. 0°12.0' W., beginning new measurement.

- 0.428** The 1/4 section corner of section 5 only, monumented with an  
iron post, 1 inch diameter, firmly set, projecting 5 inches  
above a mound of stone, 3 ft. base, with brass cap marked as  
described in the official record of the 1924-25 survey.

from which the original bearing trees

A piñon dead and standing, bears S. 43° W., 54 links  
distance, with faint scribed marks on an open blaze.

A juniper, 14 inches diameter, bears N. 88° W., 5 links  
distance, scribed 1/4 S5 BT.

---

N. 0°04.4' E., beginning new measurement.

- 19.335** Point for the N 1/16 section corner of section 4 only, not  
monumented.
- 37.834** The closing corner of sections 4 and 5, at intersection with the  
south boundary of section 33, hereinbefore described.

---

Reestablishment of the Survey Executed by  
J. Gorlinski in 1870

---

From the corner of sections 19, 20, 29, and 30, monumented with  
an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting  
4 inches above the ground, with aluminum cap marked BBE 1992 19  
20 29 30.

This is accepted as a careful and faithful reestablishment of  
the original corner.

A steel fence post is located 1 ft. southeast of the aluminum  
pipe.

Corner falls on flat rolling ground in sagebrush.

N. 89°51.4' W., between sections 19 and 30.

- 40.037** The 1/4 section corner of sections 19 and 30, monumented with an  
aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 6  
inches above the ground, with aluminum cap marked BBE 1998 1/4  
COR 19 30.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

This is accepted as a careful and faithful reestablishment of the original corner.

A steel fence post is located 1 ft. west of the aluminum pipe.

Corner falls on flat ground in sagebrush.

From this corner point, the original 1870 bearing tree, a juniper, 20 inches diameter, bears S. 72°15.4' W., 133 links distance, with faint scribe marks on an opened blaze. This bearing tree was not utilized during the course of this survey.

Reestablishment of the Survey Executed by J. Gorlinski in 1870 and the Retracement Executed by R. Gentry and A. Neslon in 1924-25

N. 89°51.9' W., beginning new measurement.

- 9.679 Point for the E-E 1/64 section corner of sections 19 and 30, not monumented.
- 19.358 Point for the W 1/16 section corner of sections 19 and 30, not monumented.
- 38.020 The corner of sections 19 and 30 only, on the west boundary of the township, hereinbefore described.

Reestablishment of the Survey Executed by J. Gorlinski in 1870 and the Resurvey Executed by R. Gentry and A. Nelson in 1924-25

From the 1/4 section corner of sections 18 and 19, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1924-25 resurvey, a mound of stone, 2 ft. by 1 ft. high is located north of the iron post.

Corner falls on flat ground in sagebrush.

N. 89°45.0' W., between sections 18 and 19.

- 38.241 The corner of sections 18 and 19 only, on the west boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 17 and 18, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1924-25 resurvey, a mound of stone, 2 ft. base by 1 ft. high is located west of the iron post.

Corner falls on flat ground in sagebrush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

N. 0°04.2' E., between sections 17 and 18.

- 40.043** The corner of sections 7, 8, 17, and 18, monumented with an iron post, 2 inches diameter, firmly set, in two tires, stacked, soil filled to top of brass cap, marked as described in the official record of the 1924-25 resurvey.

from which the 1924-25 bearing trees

A juniper, 12 inches diameter, bears N. 10°30' E., 48 links distance, scribed T36S R12W S8 BT, on an open blaze.

A juniper, 12 inches diameter, bears S. 38° E., 86 links distance, with faint scribe marks on an open blaze.

A juniper, 14 inches diameter, bears S. 80° W., 79 links distance, scribed T36S R12W S18 BT, on a partially healed blaze.

A juniper, dead and standing, bears N. 24° W., 51 links distance, scribed T36S R12W S7 BT, on an open blaze.

A steel fence post is located alongside the iron post.

Corner falls on flat ground in sagebrush and juniper growth.

From the corner of sections 8, 9, 16, and 17.

N. 89°59.7' W., between sections 8 and 17.

- 10.044** Point for the E-E 1/64 section corner of sections 8 and 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
S8  
E-E 1/64 ———  
S17  
2013

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat ground in sagebrush.

- 20.088** Point for the E 1/16 section corner of sections 8 and 17, not monumented.

- 40.176** The 1/4 section corner of sections 8 and 17, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 2 ft. base, to top of brass cap marked as described in the official record of the 1924-25 resurvey, a steel fence post and juniper post are located alongside the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Corner falls on flat ground in sagebrush.

---

N. 89°56.7' W., beginning new measurement.

40.223 The corner of sections 7, 8, 17, and 18.

---

The Reestablishment of the Survey Executed by  
R. Gentry and A. Nelson in 1924-25

---

N. 89°44.1' W., between sections 7 and 18.

38.365 The 1/4 section corner of section 18 only, monumented with an iron post, 1 inch diameter firmly set, projecting 3 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1924-25 survey.

from which the original bearing trees

A piñon, 8 inches diameter, bears S. 50° E., 59 links distance, scribed 1/4 S18 BT, on a partially healed blaze.

A juniper, 10 inches diameter, bears S. 34° W., 108 links distance, with faint scribe marks on a mostly healed blaze.

Corner falls on a gradual rocky southwest slope in piñon and juniper growth.

---

N. 89°51.0' W., beginning new measurement.

1.609 The 1/4 section corner of section 7 only, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1924-25 survey.

from which the original bearing trees

A trifurcated juniper, 30 inches diameter, bears N. 78° E., 31 links distance, scribed 1/4 S7 BT.

A piñon, 8 inches diameter, bears N. 80° W., 57 links distance, with a healed blaze.

A large boulder is located alongside, west of the iron post.

Corner falls on a gradual southwest slope among large boulders, in piñon and juniper growth.

---

N. 89°41.7' W., beginning new measurement.

36.371 The closing corner of sections 7 and 18, on the west boundary of

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

the township, hereinbefore described.

---

From the corner of sections 7, 8, 17, and 18.

**N. 0°18.9' E.**, between sections 7 and 8.

- 39.976** The 1/4 section corner of sections 7 and 8, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above a mound of stone, 4 ft. base, with brass cap marked as described in the official record of the 1924-25 survey.

from which the remaining original bearing tree

A piñon, 18 inches diameter, bears S. 75° W., 40 links distance, scribed 1/4 S7 BT, on an open blaze.

Corner falls on a gradual rocky northeast slope in piñon and juniper growth.

- 79.992** The corner of sections 5, 6, 7, and 8, monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, 1 ft. tall, with brass cap marked as described in the official record of the 2012-13 survey.
- 

From the corner of sections 4, 5, 8, and 9.

**S. 89°58.6' W.**, between sections 5 and 8.

- 40.188** The 1/4 section corner of sections 5 and 8, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1924-25 survey.

from which the original bearing trees

A juniper, 12 inches diameter, bears S. 37° E., 32 links distance, with a healed blaze.

A piñon, 14 inches diameter, bears N. 50° W., 67 links distance, with faint scribe marks on a partially healed blaze.

Rebuild the mound of stone, 3 ft. base, to top of brass cap.

Corner falls on a steep rocky southwest slope in piñon and juniper growth.

---

**N. 89°55.9' W.**, beginning new measurement.

- 40.245** The corner of sections 5, 6, 7, and 8.

THE SUBDIVISION OF SECTION 4,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 4,  
T. 36 S., R. 12 W., Salt Laker Meridian Utah

From the 1/4 section corner of sections 4 and 9, monumented with an iron post, 1 inch diameter, firmly set in soil filled tire, with a brass cap marked as described in the official record of the 1924-25 resurvey.

**N. 1°07.7' W.**, on the N-S centerline of section 4.

- 40.017** The center 1/4 section corner of section 4, monumented with an unrecorded iron pipe, 2 1/2 inches diameter, firmly set, projecting 4 inches above a tire, with no marks on the brass cap.

This is accepted as a careful and faithful determination of the center 1/4 corner position.

A steel fence post is located alongside the iron pipe.

Corner falls on a slight northeast slope in sagebrush and scattered piñon-juniper growth.

**N. 1°08.4' W.**, beginning new measurement.

- 10.003** Point for the center S-N 1/64 section corner of section 4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
C-S-N 1/64  
S4  
2013

Deposit a magnet at the base of the aluminum post.

Raise a mound of stone, 2 ft. by 1 ft., west of the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

- 20.006** Point for the center N 1/16 section corner of section 4, not monumented.

- 38.539** The 1/4 section corner of section 4 only, at intersection with the south boundary of section 33, hereinbefore described.

From the 1/4 section corner of sections 3 and 4, monumented with an iron post, 1 inch diameter, firmly set in a tire, soil filled to top of brass cap, marked as described in the 1924-25

THE SUBDIVISION OF SECTION 4,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

resurvey.

S. 87°38.0' W., on the E-W centerline of section 4.

39.935 The center 1/4 section corner of section 4.

49.931 Point for the center E-W 1/64 section corner of section 4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR12W  
C-E-W 1/64  
S4  
2013

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Deposit an unspent 7.62x39 rifle cartridge at the base of the aluminum post as a memorial.

Corner falls on north edge of dirt road extending east and west in piñon and juniper growth.

59.927 Point for the center W 1/16 section corner of section 4, not monumented.

78.998 The 1/4 section corner of section 4 only, on west section line of section 4.

From the point for the center W 1/16 section corner of section 4.

N. 1°11.6' W., on the N-S centerline of the NW 1/4 of section 4.

9.932 Point for the center S-NW 1/64 section corner of section 4, not monumented.

19.864 Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4 of section 4. Not monumented.

38.380 The point for the W 1/16 section corner of section 4 only, at intersection with the south boundary of section 33, hereinbefore described.

From the point for the center N 1/16 section corner of section 4.

S. 87°15.3' W., on the E-W centerline of the NW 1/4 of section 4.

10.011 Point for the center E-NW 1/64 section corner of section 4, not monumented.

20.022 The point for the NW 1/16 section corner of section 4.

THE SUBDIVISION OF SECTION 4,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 38.652** The point for the N 1/16 section corner of section 4 only, on the west section line of section 4.

From the center E-W 1/64 section corner of section 4.

**N. 1°09.8' W.**, on the N-S centerline of the SE 1/4 of the NW 1/4 of section 4.

- 9.968** Point for the SE-NW 1/64 section corner, at intersection with the E-W centerline of the SE 1/4 of the NW 1/4 of section 4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground, in a mound of stone, 4 ft. base, to top of aluminum cap marked

T36SR12W  
SE-NW 1/64  
S4  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls on a slight rocky northwest slope in piñon and juniper growth.

- 19.936** The point for the center E-NW 1/64 section corner of section 4.

From the center S-N 1/64 section corner of section 4.

**S. 87°26.6' W.**, on the E-W centerline of the SE 1/4 of the NW 1/4 section 4.

- 10.004** The SE-NW 1/64 section corner of section 4.

- 20.008** The point for the center S-NW 1/64 section corner of section 4.

The Subdivision of Section 8,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 8 and 17.

**N. 0°20.2' E.**, on the N-S centerline of section 8.

- 20.007** Point for the center S 1/16 section corner of section 8, not monumented.

- 40.014** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

THE SUBDIVISION OF SECTION 8,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T36SR12W  
C 1/4  
S8  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls on a gradual southeast slope in piñon and juniper growth.

**79.983** The 1/4 section corner of sections 5 and 8.

---

From the 1/4 section corner of sections 8 and 9.

**N. 89°59.9' W.**, on the E-W centerline of section 8.

**10.043** The center E-E 1/64 section corner of section 8, monumented with an unrecorded monument, a rebar, 5/8 inch diameter, firmly set, projecting 1 inch above ground, with yellow cap attached marked Platt & Platt.

This is accepted as a careful and faithful determination of the position of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
C-E-E 1/64  
S8  
2013

Set a steel fence post alongside and buried the rebar and cap along with a magnet at the base of the aluminum post.

Corner falls on a slight southeast slope in piñon and juniper growth.

**20.086** Point for the center E 1/16 section corner of section 8, not monumented.

**40.172** The center 1/4 section corner of section 8.

**80.406** The 1/4 section corner of sections 7 and 8.

---

From the point for the E 1/16 section corner of sections 8 and 17.

**N. 0°20.2' E.**, on the N-S centerline of the SE 1/4 of section 8.

**20.007** Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4 of section 8. Not monumented.

THE SUBDIVISION OF SECTION 8,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

**40.014** The point for the center E 1/16 section corner of section 8.

---

From the point for the S 1/16 section corner of sections 8 and 9.

**N. 89°59.8' W.**, on the E-W centerline of the SE 1/4 of section 8

**10.044** Point for the center E-SE 1/64 section corner of section 8.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
C-E-SE 1/64  
S8  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls in a shallow drainage, drains southeasterly in sagebrush and scattered piñon and juniper growth.

**20.088** The point for the SE 1/16 section corner of section 8.

**40.176** The point for the center S 1/16 section corner of section 8.

---

From the center E-SE 1/64 section corner of section 8.

**N. 0°20.3' E.**, on the N-S centerline of the NE 1/4 of the SE 1/4 of section 8.

**20.007** The center E-E 1/64 section corner of section 8.

---

From the E-E 1/64 section corner of sections 8 and 17.

**N. 0°20.3' E.**, on the N-S centerline of the SE 1/4 of the SE 1/4 of section 8.

**20.007** The center E-SE 1/64 section corner of section 8.

---

The Subdivision of Section 17,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 17 and 20, monumented with an aluminum pipe, 2 1/2 inches diameter, firmly set, flush with the ground, with aluminum cap marked IRON COUNTY T36SR12W S17 1/4 S20 LS 343641 2009.

This is accepted as a careful and faithful reestablishment of the original corner point.

THE SUBDIVISION OF SECTION 17,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A steel fence post is located alongside along with two tires stacked above the aluminum pipe.

Corner falls in cultivated field.

**N. 0°05.7' E.**, on the N-S centerline of section 17.

- 40.008** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
C 1/4  
S17  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls on flat ground in sagebrush.

- 80.019** The 1/4 section corner of sections 8 and 17.

From the 1/4 section corner of sections 16 and 17, monumented with an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 1 inch above ground, with aluminum cap marked IRON COUNTY 1/4 T36SR12W S16 S17 LS 343641 2009.

This is accepted as a careful and faithful reestablishment of the original corner point.

A steel fence post is located alongside the aluminum pipe.

Corner falls on a flat ground in sagebrush.

**N. 89°59.4' W.**, on the E-W centerline of section 17.

- 40.185** The center 1/4 section corner of section 17.

- 80.394** The 1/4 section corner of sections 17 and 18.

The Subdivision of Section 18,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 18 and 19.

**N. 0°11.9' E.**, on the N-S centerline of section 18.

- 40.242** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20

THE SUBDIVISION OF SECTION 18,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, to solid rock, in a mound of stone, 2 ft. base by 1 ft. high, with aluminum cap marked

T36SR12W  
C 1/4  
S18  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls on flat ground in sagebrush.

- 80.017** The 1/4 section corner of section 18 only, on north section line of section 18.

From the 1/4 section corner of sections 17 and 18.

**N. 89°20.2' W.**, on the E-W centerline of section 18.

- 38.459** The center 1/4 section corner of section 18.

- 76.526** The 1/4 section corner of section 18 only, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 19,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 19 and 30.

**N. 0°37.0' E.**, on the N-S centerline of section 19.

- 40.406** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR12W  
C 1/4  
S19  
2013

Deposit a magnet at the base of the aluminum post.

Corner falls on flat ground in sagebrush.

- 80.899** The 1/4 section corner of sections 18 and 19.

From the 1/4 section corner of sections 19 and 20, monumented with an aluminum pipe, 2 1/2 inches diameter, firmly set, in a mound of stone, 2 ft. base, to top of aluminum cap marked IRON

THE SUBDIVISION OF SECTION 19,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

COUNTY T36SR12W 1/4 S19 S20 LS 164659 2011.

This is accepted as a careful and faithful reestablishment of the original corner point.

A steel fence post is located alongside the aluminum pipe.

Corner falls on flat ground in sagebrush.

N. 89°50.3' W., on the E-W centerline of section 19.

**39.296** The center 1/4 section corner of section 19.

**77.337** The 1/4 section corner of section 19 only, on the west boundary of the township, hereinbefore described.

The Subdivision of Section 30,  
T. 36 S., R. 12 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 30 and 31, monumented with an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked 30 1/4 COR 31 BBE 1992.

No remaining evidence of the original bearing trees was found.

This is accepted as a careful and faithful perpetuation of the original corner.

Corner falls at corner of fence lines extending north, east, and west.

N. 0°10.2' W., on the N-S centerline of section 30.

**40.271** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 30.

Set a rebar, 2 ft. long, 5/8 inch diameter, 6 inches below road surface.

from which

An aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, for a reference monument, bears N. 40°41.1' E., 68 links distance, with aluminum cap marked RM C 1/4 45.1 FT TO COR S30 2013

Set a rebar and PVC pipe alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat ground.

An aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, for a reference monument, bears S.

THE SUBDIVISION OF SECTION 30,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

77°37.0' E., 45 links distance, with aluminum cap marked RM  
C 1/4 29.6 FT TO COR S30 2013.

Set a rebar and PVC pipe alongside and buried a magnet at base of  
the aluminum post.

Corner falls 1 ft. west of a fence line extending north and  
south.

**60.523** Point for the center N 1/16 section corner of section 30, not  
monumented.

**70.649** Point for the center N-N 1/64 section corner of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24  
inches in the ground, with aluminum cap marked

T36SR12W  
C-N-N 1/64  
S30  
2013

Set a steel fence post alongside and buried a magnet at the base  
of the aluminum post.

Corner falls 5 ft. east of corner of fence lines extending south  
and west, on a slight southwest slope in sagebrush.

**80.775** The 1/4 section corner of sections 19 and 30.

From the 1/4 section corner of sections 29 and 30, monumented  
with an aluminum pipe, 2 1/2 inches diameter, firmly set, 4  
inches below ground surface, with aluminum cap marked BBE SEC 30  
1/4 SEC 29 1992.

This is accepted as a careful and faithful perpetuation of the  
original corner.

Corner falls at corner of fence lines extending north, south,  
east, and west.

**S. 89°59.5' W.**, on the E-W centerline of section 30.

**40.033** The center 1/4 section corner of section 30.

**59.566** Point for the center W 1/16 section corner of section 30, not  
monumented.

**78.659** The 1/4 section corner of section 30 only, on the west boundary  
of the township, hereinbefore described.

From the point for the center W 1/16 section corner of section  
30.

THE SUBDIVISION OF SECTION 30,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- N. 0°04.4' E.**, on the center N-S centerline of the NW 1/4 of section 30.
- 20.274** Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4 of section 30. Not monumented.
- 30.413** Point for the center N-NW 1/64 section corner of section 30. Not monumented.
- 40.552** The point for the W 1/16 section corner of sections 19 and 30.

From the point for the center N 1/16 section corner of section 30.

**N. 89°56.5' W.**, on the E-W centerline of the NW 1/4 of section 30.

- 9.723** Point for the center E-NW 1/64 section corner of section 30.

Set a PK nail in road surface.

from which

An aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, for a reference monument, bears S. 16°54.9' W., 106 links distance, with aluminum cap marked RM C-E-NW 69.9 FT TO COR 1/64 S30 2013.

Deposit a magnet at the base of the aluminum post.

Corner falls in southerly right of way of Highway 56.

An aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, for a reference monument, bears N. 61°15.9' W., 77 links distance, with aluminum cap marked RM C-E-NW 51.3 FT TO COR 1/64 S30 2013.

Deposit a magnet at the base of the aluminum post.

Corner falls in northerly right of way of Highway 56.

From this corner point, a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above the ground, with no cap attached, bears N. 33°27.8' W., 69 links distance.

- 19.446** The point for the NW 1/16 section corner of section 30.
- 38.315** The N 1/16 section corner of section 30 only, on the west boundary of the township, hereinbefore described.

From the center E-NW 1/64 section corner of section 30.

**N. 0°02.9' W.**, on the N-S centerline of the NE 1/4 of the NW 1/4 of section 30.

THE SUBDIVISION OF SECTION 30,  
TOWNSHIP 36 SOUTH, RANGE 12 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 10.132** Point for the NE-NW 1/64 section corner, at intersection with the E-W centerline of the NE 1/4 of the NW 1/4 of section 30.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

NE-NW 1/64  
S30  
2013

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat ground at edge of sagebrush.

From this corner point, a rebar, 5/8 inch diameter, projecting 2 inches above the ground, with no cap attached, bears S. 88°58.9' W., 40 links distance.

- 20.264** The point for the E-W 1/64 section corner of sections 19 and 30.
- 

From the center N-N 1/64 section corner of section 30.

**N. 89°54.2' W.**, on the E-W centerline of the NE 1/4 of the NW 1/4 of section 30.

- 9.701** The NE-NW 1/64 section corner of section 30.

- 19.402** The point for the center N-NW 1/64 section corner of section 30.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

Name	Capacity
Jacob Murdoch	Survey Technician (SCEP)

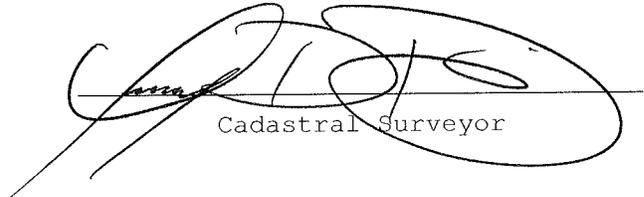
---

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis*, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *June 10, 2013*, I have *dependently resurveyed a portion of the south boundary (Seventh Standard Parallel South) Township 35 South, Range 12 West, and a portion of the west boundary (Guide Meridian), a portion of the subdivisional lines, and subdivided sections 4, 8, 17, 18, 19, and 30, in Township 36 South, Range 12 West,* of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

*December 8, 2014*

Date

  
Cadastral Surveyor

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the south boundary (Seventh Standard Parallel South) T. 35 S., R. 12 W., a portion of the west boundary (Guide Meridian), a portion of the subdivisional lines, and the subdivision of sections 4, 8, 17, 18, 19, and 30, in Township 36 South, Range 12 West, Salt Lake Meridian, Utah,* executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

*December 10, 2014*

Date



Chief Cadastral Surveyor for Utah