

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTION 13,

AND

THE SURVEY OF THE WESTERLY RIGHT-OF-WAY LINE OF

UTAH STATE HIGHWAY NO. 12 THROUGH A PORTION

OF SECTION 13

IN

TOWNSHIP 37 SOUTH, RANGE 3 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved **August 9, 2013**, which provided for the surveys included under Group Number **1236**, and assignment instructions dated **August 9, 2013**.

Survey Commenced, **August 12, 2013**  
Survey Completed, **August 20, 2013**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTION 13,

AND

THE SURVEY OF THE WESTERLY RIGHT-OF-WAY LINE OF

UTAH STATE HIGHWAY NO. 12 THROUGH A PORTION

OF SECTION 13

IN

TOWNSHIP 37 SOUTH, RANGE 3 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved **August 9, 2013**, which provided for the surveys included under Group Number **1236**, and assignment instructions dated **August 9, 2013**.

Survey Commenced, **August 12, 2013**  
Survey Completed, **August 20, 2013**

## INDEX DIAGRAM

TOWNSHIP 37 SOUTH, RANGE 3 WEST. SALT LAKE MERIDIAN, UTAH

<b>6</b>	<b>5</b>	<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b> 6 5
<b>18</b>	<b>17</b>	<b>16</b>	<b>15</b>	<b>14</b>	6 <b>13</b> 4 5 3
<b>19</b>	<b>20</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>
<b>30</b>	<b>29</b>	<b>28</b>	<b>27</b>	<b>26</b>	<b>25</b>
<b>31</b>	<b>32</b>	<b>33</b>	<b>34</b>	<b>35</b>	<b>36</b>

The Subdivision of Section 13.....Page 7

The Westerly Right-of-Way Line of Utah State Highway No.12...Page 14

## TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the east boundary, a portion of the subdivisional lines, and the subdivision of section 13, and the survey of the westerly right-of-way line of Utah State Highway No. 12 through a portion of section 13, in T. 37 S., R. 3 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

	Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>				
All	W. Lewman & Etal.	1904		
Portion			F. D. Reynolds	1976-77
<b>EAST BOUNDARY</b>				
All	A. B. Lewis	1897		
Portion			W. Lewman & Etal.	1904
All			F. D. Reynolds	1976-77
<b>WEST BOUNDARY (Emery Valley Guide Meridian)</b>				
All	W. Lewman & Etal.	1904		
Portion			E. Bird & A. Nelson	1944
<b>NORTH BOUNDARY</b>				
All	A. B. Lewis	1897		
Portion			E. Bird & A. Nelson	1933
Portion			F. D. Reynolds	1976-77
Portion			L. V. Judd	2001
<b>SUBDIVISION</b>				
Portion	W. Lewman & Etal.	1904		
Portion			R. A. Zaninovich	1987
Portion			F. D. Reynolds	1976-77
Portion			L. V. Judd	2001

## PRIVATE SURVEYS

A survey was executed by Tim G. Watson, P.L.S 5049564, on file at the Garfield County Recorder's Office on May 2, 2012, File No. 816.

A survey was executed by Douglas B. Grimshaw, P.L.S. 174457, Grimshaw Surveying, Inc., dated August 22, 2008, on file at the Garfield County Recorder's Office.

Profile plans for Utah State Highway No. 12, in the project area, titled "THE STATE ROAD COMMISSION OF UTAH, RIGHT-OF-WAY FOR HIGHWAY ACROSS GOVERNMENT LAND, PROJECT NO. S-0392(2)," dated November 6, 1957, on file at the UDOT Office in Richfield.

Note: At certain corners, hereinafter described, rebar with attached deteriorated, orange plastic caps were found firmly set. Some of the orange caps were legibly marked A.L. Barker PLS 161040. There was no record found of these rebar at the Garfield County Courthouse.

## TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1236, dated August 9, 2013.

The directions of the lines were determined by references to true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the positional Accuracy of Cadastral surveys when using Global Navigation Satellite Systems (GNSS)* dated, February 23, 2009. Trimble model R8 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); DI2242 P009 MARYSVALE UT2006 CORS ARP, AI8805 FRED FREDONIA CORS ARP, DK8419 AZPG CITY OF PAGE CORS ARP.

The geographic position of the corner of sections 11, 12, 13, and 14, T. 37 S., R. 3 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **37°35'37.867" N.**,  
Longitude: **112°04'26.254" W.**, N.A.D. 83(2011), Epoch 2010.00  
Network Accuracy = 0.200 meter at 95% confidence

The geographic position of the 1/4 section corner of sections 13 and 24, T. 37 S., R. 3 W., as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **37°34'45.680" N.**,  
Longitude: **112°03'53.429" W.**, N.A.D. 83(2011), Epoch 2010.00  
Network Accuracy = 0.200 meter at 95% confidence

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a Portion of the East Boundary  
Township 37 South, Range 3 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by A. B. Lewis in 1897,  
and the Resurvey Executed by F. D. Reynolds in 1976-77.

---

Beginning at the true point for the corner of sections 13, 18, 19, and 24, Township 37 South, Ranges 2 and 3 West, determined by record bearing and distance from the two reference monuments, corner falls in cultivated field. (Record: brass cap only, set 24 inches below ground, marked as described in the official record of the 1976-77 resurvey).

from which

An iron post, 28 inches long, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, for a reference monument, bears S. 60° W., 228 links distance, with brass cap marked as described in the official record of the 1976-77 resurvey.

An iron post, 28 inches long, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, for a reference monument, bears N. 60° W., 227 links distance, with brass cap marked as described in the official record of the 1976-77 resurvey.

Note: Corner was not searched for as owner adamantly denied permission to enter property.

N. 0°01.0' W., between sections 13 and 18.

20.001 Point for the S 1/16 section corner of sections 13 and 18.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T37S  
R3W R2W  
S1/16  
S13|S18  
2013

Buried a magnet at the base of the aluminum post.

Found a deteriorated iron stake, 15 inches long and 1/4 inch diameter, 10 inches below grade and horizontally positioned. Iron stake was deposited at the base of the aluminum post.

Corner is located at the edge of a cultivated field and at top easterly edge of a wash, extending northwesterly and southeasterly.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 25.001 Point for the S-N-S 1/256 section corner of sections 13 and 18, not monumented.
- 30.001 Point for the N-S 1/64 section corner of sections 13 and 18, not monumented.
- 39.811 Point for the 1976 witness corner, falls in a secondary channel of the Paria River. There is no remaining evidence of the witness corner.
- 40.001 Point for the 1/4 section corner of sections 13 and 18, at proportionate distance, point falls in channel of the Paria River and is not suitable for monumentation. There is no remaining evidence of the original corner.

Point selected for an off-line witness corner for the 1/4 section corner of sections 13 and 18, bears S. 21°05.0' W., 3.053 chains distance

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

WC  
T37S  
R3W R2W ↑  
1/4  
S13|S18  
2013

Buried a magnet at the base of the aluminum post.

Corner is located southerly of the Paria River course way, on elevated ground, in heavy sagebrush.

- 60.002 Point for the N 1/16 section corner of sections 13 and 18, falls in a drainage, 6 ft. wide and 5 ft. deep, and is not suitable for monumentation.

Point selected for an off-line witness corner for the N 1/16 section corner of sections 13 and 18, bears N. 87°59.8' E., 0.234 chains distance

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

WC  
T37S  
R3W R2W  
← N 1/16  
S13|S18  
2013

Buried a magnet at the base of the aluminum post.

Corner is located on a slight southwest slope in low brush.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 80.003** The corner of sections 7, 12, 13, and 18, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey.

Rebuild scattered mound of stone, 3 ft. base, to top of brass cap.

Corner is located 8.5 links westerly of a corner of 4-strand barbed wire fences, extending north and west.

---

Dependent Resurvey of a Portion of the Subdivisional Lines  
Township 37 South, Range 3 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by W. Lewman & Etal. In 1904, and the Resurvey Executed by F. D. Reynolds in 1976-77.

---

From the corner of sections 13, 18, 19, and 24, on the east boundary of the township, hereinbefore described.

**N. 89°15.0' W.**, between sections 13 and 24.

- 19.379** Point for the E 1/16 section corner of sections 13 and 24.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 6 inches in the ground and in a mound of stone, 3 ft. base, to top of aluminum cap marked

	T37S	R3W
	S13	
E 1/16	—	
	S24	
	2013	

Buried a magnet at the base of the aluminum post.

Corner is located near edge of bench, approximately 5 ft. westerly of east facing slope.

- 38.758** The 1/4 section corner of sections 13 and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey.

A mound of stone, 2 ft. base by 1 ft. tall, is located north of the iron post.

Corner is located on gently rolling land, in mixed brush, scattered piñon, and juniper.

---

**N. 89°52.8' W.**, beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 40.174** The corner of sections 13, 14, 23, and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey.

Corner is located on gentle northerly slope, with mixed brush, piñon, and juniper.

---

N. 0°13.5' E., between sections 13 and 14.

- 40.075** The 1/4 section corner of sections 13 and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey, with steel fence post located alongside and a mound of stone, 3 ft. base by 1 ft. tall, is located west of the iron post.

Corner is located on easterly side of a dirt road, extending northeasterly and southwesterly, approximately S. 45° E., 45 ft. distance from the center of dirt road, in sagebrush.

---

N. 0°02.8' W., beginning new measurement.

- 39.844** The corner of sections 11, 12, 13, and 14, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 11 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey.

from which the original bearing trees

A piñon, 23 inches diameter, bears N. 55° E., 84 links distance, with visible scribe marks on an open weathered blaze.

A juniper, 18 inches diameter, bears S. 77° E., 66 links distance, with scribe marks S13 BT, visible on an open weathered blaze.

A piñon, 22 inches diameter, bears N. 8.5° W., 68 links distance, scribed S11 BT T37S R3W, on an open weathered blaze.

Corner is located near the top of a northerly slope, in a 4-strand barbed wire fence line, extending north and south, in scattered piñon and juniper.

---

From the corner of sections 7, 12, 13, and 18, on the east boundary of the township, hereinbefore described.

N. 89°23.8' W., between sections 12 and 13.

- 19.611** Point for the E 1/16 section corner of sections 12 and 13, falls


DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

on a steep west facing slope, on the easterly edge of the Paria River course and is not suitable for monumentation.

Point selected for an off-line witness corner for the E 1/16 section corner of sections 12 and 13, bears N. 51°20.6' E., 0.199 chains distance

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked



Buried a magnet at the base of the aluminum post.

Corner is located 13 ft. easterly of the left bank of the Paria river channel, on flat ground and in dense sagebrush.

- 39.222** The 1/4 section corner of sections 12 and 13, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1976-77 resurvey.

A mound of stone, 3 ft. base by 2 ft. tall, is located north of the iron post.

Corner is located on a steep northeasterly slope.

**N. 89°51.8' W.**, beginning new measurement.

- 39.544** The corner of sections 11, 12, 13, and 14.

---

The Subdivision of Section 13  
Township 37 South, Range 3 West, Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 13 and 24.

**N. 0°21.4' W.**, on the N-S centerline of section 13.

- 19.912** Point for the C-S 1/16 section corner of section 13, not monumented.
- 29.868** Point for the C-N-S 1/64 section corner of section 13, not monumented.
- 39.824** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, with aluminum cap marked

T37S R3W  
S13  
C 1/4  
2013

Buried a magnet at the base of the aluminum post.

Corner is located on flat ground, between a large wash, extending easterly and westerly, and remains of an old mine.

59.867 Point for the C-N 1/16 section corner of section 13, not monumented.

79.910 The 1/4 section corner of sections 12 and 13.

From the true point for the 1/4 section corner of sections 13 and 18, on the east boundary of the township, hereinbefore described.

N. 89°31.0' W., on the E-W centerline of section 13.

9.747 Point for the C-E-E 1/64 section corner of section 13, not monumented.

19.494 Point for the C-E 1/16 section corner of section 13, not monumented.

29.241 Point for the C-W-E 1/64 section corner of section 13, not monumented.

38.988 The center 1/4 section corner of section 13.

78.754 The 1/4 section corner of sections 13 and 14.

From the point for the C-E 1/16 section corner of section 13.

N. 0°11.2' W., on the N-S centerline of the NE 1/4 of section 13.

20.022 Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4 of section 13.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with brass cap marked

T37S R3W  
S13  
NE 1/16  
2013

Buried a magnet at the base of the stainless steel post.

Corner is located in marshy flat land, in thick grass.

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

**40.044** The true point for the E 1/16 section corner of sections 12 and 13.

---

From the true point for the N 1/16 section corner of sections 13 and 18, on the east boundary of the township, hereinbefore described.

**N. 89°27.3' W.**, on the E-W centerline of the NE 1/4 of section 13.

**19.552** The NE 1/6 section corner of section 13.

**39.104** Point for the C-N 1/16 section corner of section 13.

---

From the E 1/16 section corner of sections 13 and 24.

**N. 0°11.2' W.**, on the N-S centerline of the SE 1/4 of section 13.

**19.956** The SE 1/16 section corner of section 13, monumented with a rebar, 1/2 inch diameter, firmly set, with illegible marks on a deteriorated orange plastic cap, with a steel fence post set alongside, from an unrecorded A.L. Barker survey.

This is accepted as a careful and faithful determination of the position of the corner.

At the corner point

Set aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T37S R3W  
S13  
SE 1/16  
2013

Buried a magnet and deposit the rebar at the base of the aluminum post, and set the steel fence post alongside the aluminum post.

Raise mound of stone, 3 ft. base, to top of aluminum cap.

Corner is located on the northwest slope of a ridge, extending northeast, with few scattered piñon in the area.

**24.945** The C-S-N-SE 1/256 section corner of section 13, monumented with a rebar, 1/2 inch diameter, firmly set, with illegible marks on a deteriorated orange plastic cap, with a steel fence post set alongside, from an unrecorded A.L. Barker survey.

This is accepted as a careful and faithful determination of the position of the corner.

At the corner point

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

inches in the ground, with aluminum cap marked  
T37S R3W  
S13  
C-S-N-SE  
1/256  
2013

Deposit the rebar and cap, buried a magnet, and set the steel fence post alongside the aluminum post.

Corner is located on slight northeast slope, near base of a northeast facing hill.

- 29.934** The C-N-SE 1/64 section corner of section 13, monumented with a rebar, 1/2 inch diameter, firmly set, with illegible marks on a deteriorated orange plastic cap, with a steel fence post set alongside, from an unrecorded A.L. Barker Survey.

This is accepted as a careful and faithful determination of the position of the corner.

At the corner point

Set aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T37S R3W  
S13  
C-N-SE 1/64  
2013

Deposit the rebar and cap, buried a magnet, and set the steel fence post alongside the aluminum post.

Corner is located on a gradual northeast slope, between two washes, in mixed brush.

- 39.912** Point for the C-E 1/16 of section 13.

---

From the S 1/16 section corner of sections 13 and 18, on the east boundary of the township, hereinbefore described.

N. 89°23.0' W., on the E-W centerline of the SE 1/4 of section 13.

- 4.859** Point for the C-E-E-SE 1/256 section corner of section 13.

Set aluminum post, 30 inches long, 2 1/2 inches diameter, flush with the ground, with aluminum cap marked

T37S R3W  
S13  
C-E-E-SE 1/256  
2013

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Buried a magnet at the base of the aluminum post.

Corner is located 3 ft. west of the westerly edge of Utah State Highway No. 12 pavement.

- 9.718 Point for the C-E-SE 1/64, not monumented.
- 19.436 The SE 1/16 section corner of section 13.
- 24.295 Point for the C-E-W-SE 1/256 section corner of section 13, not monumented.
- 29.154 Point for the C-W-SE 1/64 section corner of section 13, not monumented.
- 38.872 The point for the C-S 1/16 section corner of section 13.

From the point for the C-E-SE 1/64 section corner of section 13.

N. 0°06.1' W., on the N-S centerline of the NE 1/4 of the SE 1/4 of section 13.

- 4.995 Point for the C-S-NE-SE 1/256, not monumented.
- 9.990 Point for the NE-SE 1/64 section corner, at intersection with the E-W centerline of the NE 1/4 of the SE 1/4 of section 13. Not monumented.
- 19.980 The point for the C-E-E 1/64 section corner of section 13.

From the N-S 1/64 section corner of section 13 and 18, on the east boundary of the township, hereinbefore described.

N. 89°27.0' W., on the E-W centerline of the NE 1/4 of the SE 1/4 of section 13.

- 4.866 Point for the C-E-NE-SE 1/256 section corner of section 13, not monumented.
- 7.450 Intersect the westerly right-of-way of Utah State Highway 12, hereinafter described.
- 9.732 Point for the NE-SE 1/64 section corner of section 13.
- 19.465 The C-N-SE 1/64 section corner of section 13.

From the C-E-E-SE 1/256 section corner of section 13.

N. 0°03.6' W., on the N-S centerline of the SE 1/4 of NE 1/4 of the SE 1/4 of section 13.

- 4.997 Point for the SE-NE-SE 1/256 section corner of section 13, at the

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

intersection with the E-W centerline of the SE 1/4 of the NE 1/4 of the SE 1/4 of section 13, not monumented.

- 9.994 Point for the C-E-NE-SE 1/256 section corner of section 13.
- 

From the point for the S-N-S 1/256 section corner of sections 13 and 18, on the east boundary of the township.

N. 89°25.0' W., on the E-W centerline of the SE 1/4 of the NE 1/4 of the SE 1/4 of section 13.

- 4.863 The point for the SE-NE-SE 1/256 section corner of section 13.
- 6.785 Intersect the westerly right-of-way of Utah State Highway No. 12, hereinafter described.
- 9.726 Point for the C-S-NE-SE 1/256 section corner of section 13.
- 

N. 89°25.0' W., on the E-W centerline of the SW 1/4 of the NE 1/4 of the SE 1/4 of section 13.

- 9.725 The C-S-N-SE 1/256 section corner of section 13.
- 

From the point for the C-W-SE 1/64 section corner of section 13.

N. 0°16.3' W., on the N-S centerline of the NW 1/4 of the SE 1/4 of section 13.

- 4.984 Point for the C-S-NW-SE 1/256 section corner of section 13, not monumented.
- 9.968 Point for the NW-SE 1/64 section corner of sections 13, not monumented.
- 19.936 Point for the C-W-E 1/64 section corner of section 13.
- 

From the C-N-SE 1/64 section corner of section 13.

N. 89°27.0' W., on the E-W centerline of the NW 1/4 of the SE 1/4 of section 13.

- 4.866 The C-E-NW-SE 1/256 section corner of section 13, monumented with a rebar, 1/2 inch diameter, firmly set, with attached orange plastic cap marked A.L. Barker PLS 161040, from unrecorded A.L. Barker survey, with a steel fence post set alongside.

This is accepted as a careful and faithful determination of the position of the corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T37S R3W  
S13  
C-E-NW-SE  
1/256  
2013

Buried a magnet and deposit the rebar at the base of the aluminum post, and set the steel fence post alongside the aluminum post.

Corner is located on a gradual northeasterly slope, in scattered brush and grass.

- 9.732** Point for the NW-SE 1/64 section corner of section 13.  
**19.464** Point for the C-N-S 1/64 section corner of section 13.

---

From the point for the C-E-W-SE 1/256 section corner.

**N. 0°13.7' W.**, on the N-S centerline of the SE 1/4 of the NW 1/4 of the SE 1/4 of section 13.

- 4.986** The SE-NW-SE 1/256 section corner, monumented with a rebar, 1/2 inch diameter, firmly set, with illegible marks on a deteriorated orange plastic cap, from an unrecorded A.L. Barker survey, with a steel fence post set alongside.

This is accepted as a careful and faithful determination of the position of the corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T37S R3W  
S13  
SE-NW-SE  
1/256  
2013

Buried a magnet and deposit the rebar at the base of the aluminum post, and set the steel fence post alongside the aluminum post.

Raise mound of stone, 3 ft. base and 2 ft. tall alongside.

Corner is located on a steep and rocky northwesterly slope.

- 9.972** The C-E-NW-SE 1/256 section corner of section 13.

---

From the C-S-N-SE 1/256 section corner of section 13.

**N. 89°25.0' W.**, on the E-W centerline of the SE 1/4 of the NW 1/4 of the SE 1/4 of section 13.

THE SUBDIVISION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 4.863** The SE-NW-SE 1/256 section corner of section 13.
- 9.726** Point for the C-S-NW-SE 1/256 section corner of section 13.

The Survey of the Westerly Right-of-Way Line of Utah State  
Highway No. 12 Through a Portion of Section 13  
Township 37 South, Range 3 West, Salt Lake Meridian, Utah

From the intersect point of the westerly right-of-way line of Utah State Highway No. 12 and the E-W centerline of the SE 1/4 of the NE 1/4 of the SE 1/4 of section 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

| R  
| O  
| W

2013

Buried a magnet at the base of the aluminum post.

From this corner point, Utah State Highway 12 right-of-way marker, designated Station No. 594+60 on highway plans, bears S. 7°36.1' E., 5.105 chains distance, monumented with an iron pipe, 2 inches diameter, firmly set, projecting 1/2 inch below ground level, with a brass cap marked "STATE ROAD RIGHT OF WAY MARKER, C/L, STA, ELEV, 19," located 20 inches south of a corner of fences, extending east and north.

Corner is located 16 ft. east of a 6 ft. tall, chain-link fence surrounding a Garfield County Road shed.

**N. 7°36.1' W.**, on the westerly right-of-way line of Utah State Highway No. 12.

- 5.047** Point of intersection of the westerly right-of-way line of Utah State Highway No. 12 and the E-W centerline of the NE 1/4 of the SE 1/4 of section 13, monumented with a rebar, 5/8 inch diameter, firmly set, with attached orange plastic cap marked A.L. Barker PLS 161040, and found a corroded rebar of unknown origins, 1/4 inch diameter and 13 inches long, buried alongside the 5/8 inch rebar.

This is accepted as a careful and faithful determination of the intersection corner point.

At the corner point

Set aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

THE SURVEY OF THE WESTERLY RIGHT-OF-WAY LINE OF UTAH STATE HIGHWAY NO. 12  
THROUGH A PORTION OF SECTION 13  
TOWNSHIP 37 SOUTH, RANGE 3 WEST, SALT LAKE MERIDIAN, UTAH  
*CHAINS*

| R  
| O  
| W

2013

Buried a magnet and deposit both rebar at the base of the aluminum post.

From this corner point, Utah State Highway 12 right-of-way marker, at a point of tangent, designated Station No. 585+06.5 on highway plans, bears N. 7°36.1' W., 4.095 chains distance, monumented with an iron pipe, 2 inches diameter, firmly set, projecting 5 inches above concrete, with a brass cap marked "STATE ROAD RIGHT OF WAY MARKER, C/L, STA, ELEV, 19," located on top of a bank, approximately 7 ft. west of a steep east facing slope.

Corner is located in westerly right-of-way fence of Highway 12.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

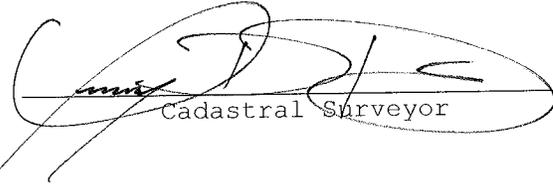
Name	Capacity
Jacob R. Murdoch	Survey Technician

---

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of **August 9, 2013**, I have *dependently resurveyed a portion of the east boundary, and a portion of the subdivisional lines, and subdivided section 13, and a survey of the westerly Right-of-way line of Utah State Highway No. 12 through a portion of section 13, in Township 37 South, Range 3 West, of the Salt Lake Meridian*, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 6, 2015  
Date

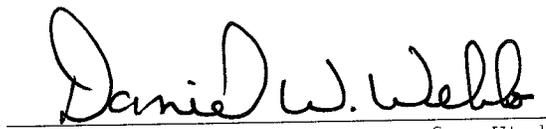
  
Cadastral Surveyor

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey in Township 37 South, Range 3 West, of the Salt Lake Meridian*, in the State of **Utah**, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

February 6, 2015  
Date

  
Chief Cadastral Surveyor for Utah