

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE SOUTH BOUNDARY
(SIXTH STANDARD PARALLEL SOUTH),
A PORTION OF THE WEST BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES,

IN

TOWNSHIP 30 SOUTH, RANGE 9 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved **August 26, 2013**, which provided for the surveys included under Group Number **1237**, and Assignment Instructions dated **August 26, 2013**.

Survey Commenced, **August 28, 2013**
Survey Completed, **October 24, 2013**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF
A PORTION OF THE SOUTH BOUNDARY
(SIXTH STANDARD PARALLEL SOUTH),
A PORTION OF THE WEST BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES,

IN

TOWNSHIP 30 SOUTH, RANGE 9 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved **August 26, 2013**, which provided for the surveys included under Group Number **1237**, and Assignment Instructions dated **August 26, 2013**.

Survey Commenced, **August 28, 2013**
Survey Completed, **October 24, 2013**

INDEX DIAGRAM

TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

6	5	4	3	2	1
7	8	9	10	11	12
18 11	17	16	15	14	13
6 19 11	20	21	22	23	24
4 30 9	10 29 9	28	27	26	25
31	8 32 3	7 33	34	35	36

TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the south boundary (Sixth Standard Parallel South), a portion of the west boundary, and a portion of the subdivisional lines, in T. 30 S., R. 9 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
SOUTH BOUNDARY (Sixth Standard Parallel South)			
All	T.C. Bailey	1881	
All		J.R. & Q. Stewart	1911
EAST BOUNDARY			
All	T.C. Bailey	1881	
All		R.C. Yundt	1950
Portion		R.K. Baugh	1991
Portion		J.F. Carroll	2003
WEST BOUNDARY			
Portion	J. Bausman	1870	
All	T.C. Bailey	1881	T.C. Bailey 1881
Portion		R. Gentry	1913
Portion		J.D. Davis	2011
NORTH BOUNDARY			
Portion	J. Bausman	1870	
All	T.C. Bailey	1881	T.C. Bailey 1881
Portion		H. Fitzhugh	1882
Portion		R.K. Baugh	1991
Portion		J.D. Davis	2011
SUBDIVISION			
Portion	J. Bausman	1870	
All	T.C. Bailey	1881	T.C. Bailey 1881
Portion		R.K. Baugh	1991
Portion		J.D. Davis	2011

TOWNSHIP 30 SOUTH, RANGE 9 SOUTH, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1237, dated August 26, 2013.

The directions of the lines were determined by references to true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys When Using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model R8 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); AI8805 FRED FREDONIA CORS ARP, DN7504 SGU1 ST GEORGE PUTIL CORS ARP, AI8817 ECHO ECHO_BRGN_NV1999 CORS ARP.

The geographic position of the corner of sections 18 and 19 only, as determined by National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°11'32.029" N.**,
Longitude: **112°55'05.103" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,
Network Accuracy = 0.100 meter at 95% confidence.

The geographic position of the standard corner of sections 32 and 33 only, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°08'52.242" N.**,
Longitude: **112°52'52.363" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,
Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
(SIXTH STANDARD PARALLEL SOUTH),
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the South Boundary
(Sixth Standard Parallel South),
T. 30 S., R. 9 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by T.C. Bailey in 1881,
and the Retracement Executed by J.R. and Q. Stewart in 1911

Beginning at the standard corner of sections 32 and 33, monumented with an iron post, 3 inches diameter, firmly set, projecting 4 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1911 retracement.

from which the 1911 bearing trees

A juniper, 12 inches diameter, bears N. 27°15' E., 84 links distance, with a healed blaze.

A juniper, 8 inches diameter, bears N. 19°15' W., 75 links distance, with a healed blaze.

A juniper post, 4 inches diameter, projecting 5 ft. above the ground is located alongside the iron post.

Corner falls on a slight east slope in dense piñon and juniper growth.

N. 89°18.4' W., along the south boundary of section 32.

14.957 The closing corner of sections 4 and 5, T. 31 S., R. 9 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1911 survey.

from which the original bearing trees

A juniper, 8 inches diameter, burned and standing, bears S. 47°45' E., 66 links distance, with a burned blaze.

A juniper, 8 inches diameter, burned and standing, bears S. 12°45' W., 81 links distance, with a mostly healed blaze.

Corner falls on a gradual east slope in burned area.

N. 89°19.8' W., beginning new measurement.

25.564 The standard 1/4 section corner of section 32, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above a mound of stone, 3 ft. base, with brass cap marked as described

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
 (SIXTH STANDARD PARALLEL SOUTH),
 TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

in the official record of the 1911 retracement.

Corner falls on a gradual west slope in burned area.

S. 89°58.9' W., beginning new measurement.

14.394 Point for the 1/4 section corner of section 5 only, T. 31 S., R. 9 W., at mid-point between the closing corners to the east and west. Not monumented.

40.344 The standard corner of sections 31 and 32, monumented with an iron post, 3 inches diameter, firmly set, projecting 5 inches above a mound of stone, 5 ft. base, with brass cap marked as described in the official record of the 1911 retracement.

from which the remaining 1911 bearing tree

A juniper, 12 inches diameter, bears N. 47°30' W., 124 links distance, scribed T30S R9W S31 BT, on an open blaze.

Corner falls on a slight north slope in piñon and juniper growth.

N. 89°47.4' W., along the south boundary of section 31.

14.008 The closing corner of sections 5 and 6, T. 31 S., R. 9 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

An orange angle iron post is located alongside the iron post.

Corner falls on flat ground in piñon and juniper growth.

Dependent Resurvey of a Portion of the West Boundary,
 T. 30 S., R. 9 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by T.C. Bailey in 1881, and
 the Retracement and Resurvey Executed by Ralph Gentry in 1913

From the closing corner of sections 25 and 36, T. 30 S., R. 10 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1913 retracement.

from which the original bearing trees

A juniper, 20 inches diameter, bears S. 45° W., 74 links distance, scribed T30S R10W S36 BT CC, on a partially healed blaze.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 20 inches diameter, bears N. 59°15' W., 91 links distance, scribed T30S R10W S25 BT CC, on a partially healed blaze.

Corner falls in the bottom of a large draw, extending westerly.

N. 1°06.9' E., between sections 25 and 31.

- 2.941** The corner of sections 30 and 31 only, monumented with a trachyte stone, 8x8x4 inches (Record; Granite, 12x12x12), firmly set, marked 4 notches on north and 1 notch on south edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T30S
R10W R9W
| S30
| S31
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat ground in piñon and juniper growth.

N. 0°26.0' W., between sections 25 and 30.

- 37.031** Point for the 1/4 section corner of section 25 only, T. 30 S., R. 10 W. Not monumented.

- 40.360** The 1/4 section corner of section 30 only, monumented with a trachyte stone, 16x8x4 inches (Record; Granite 20x12x8), firmly set, marked 1/4 on west face, with a mound of stone, 3 ft. by 1 ft., located to the west.

from which the original bearing tree

A juniper, 16 inches diameter, bears N. 40°30' E., 23 links distance, scribed 1/4 S3, on an open weathered blaze (Record: 1/4 S BT).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T30S
R10W R9W
| 1/4
| S30
2013

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight southwest slope in scattered piñon and juniper growth.

N. 0°48.6' W., beginning new measurement.

- 38.811** The closing corner of sections 24 and 25, T. 30 S., R. 10 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the 1913 survey.

from which the original bearing trees

A juniper, 14 inches diameter, bears S. 78°45' W., 54 links distance, scribed T30S R10W S25 BT CC, on a partially healed blaze.

A juniper, 16 inches diameter, bears N. 23°30' W., 140 links distance, scribed T30S R10W S24 BT CC, on a partially healed blaze.

Corner falls on a slight northwest slope in sagebrush and scattered piñon and juniper growth.

N. 0°07.0' W., between sections 24 and 30.

- 1.152** The corner of sections 19 and 30 only, monumented with a trachyte stone, 12x4x3 inches (Record; 16x12x12), firmly set, in a mound of stone, 2 ft. base, marked 4 notches on north and 2 notches on south edges.

There is no remaining evidence of the remaining original bearing tree called for in the 1913 retracement, nor the 1913 bearing trees.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T30S
R | S19 R
10 | S30 9
W W
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight north slope in sagebrush and scattered piñon and juniper growth.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°15.4' E., between section 19 and 24.

39.806 Point for the 1/4 section corner of section 24 only, T. 30 S., R. 10 W. Not monumented.

40.214 The 1/4 section corner of section 19 only, monumented with a trachyte stone, 12x8x4 inches (Record; Granite 14x10x9), firmly set, marked 1/4 on west face, with a mound of stone, 3 ft. base by 1 ft., high located to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T30S
R10W R9W
| 1/4
| S19
2013

Deposit the marked stone alongside the aluminum post.

Corner falls on flat ground, in sagebrush and scattered juniper growth.

N. 0°26.3' W., beginning new measurement.

39.417 The closing corner of sections 13 and 24, T. 30 S., R. 10 W., monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1913 survey.

Raise a mound of stone, 2 ft. base by 1 ft. high, around the iron post.

Corner falls on flat ground in sagebrush.

N. 1°42.9' E., between sections 13 and 19.

0.778 The corner of sections 18 and 19 only, monumented with a red trachyte stone, 12x10x4 inches (Record; Granite 16x12x4), firmly set, marked 3 grooves on north and south faces (Record; 3 notches on north and south edges), with a mound of stone, 3 ft. base by 1 ft. high is located to the west.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

T30S
R10W R9W
| S18
| S19
2013

Deposit the marked stone alongside the aluminum post.

Corner falls on flat ground in sagebrush.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 30 S., R. 9 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by T.C. Bailey in 1881

From the standard corner of sections 32 and 33, on the south boundary of the township, hereinbefore described.

N. 0°24.6' E., between sections 32 and 33.

- 41.027** The 1/4 section corner of sections 32 and 33, monumented with a trachyte stone, 12x8x4 inches (Record; 22x12x7), firmly set, dimly marked 1/4 on west face.

from which an unrecorded bearing tree

A juniper, 6 inches diameter, bears N. 76° E., 13 links distance, with no scribe marks on an open blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T30SR9W
1/4
S32|S33
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight north slope in piñon and juniper growth.

N. 0°14.8' E., beginning new measurement.

- 40.870** The corner of sections 28, 29, 32, and 33, monumented with a trachyte stone, 20x12x9 inches, firmly set, marked 1 notch on south and 4 notches on east edges, with a mound of stone located to the west.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH
CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 5 inches in the ground, to solid rock, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T30SR9W
S29|S28
S32|S33
2013

Deposit the marked stone alongside the aluminum post.

Corner falls on a slight southeast slope in piñon and juniper growth.

From the standard corner of sections 31 and 32, on the south boundary of the township, hereinbefore described.

N. 1°04.8' W., between sections 31 and 32.

- 40.391** The 1/4 section corner of sections 31 and 32, monumented with a trachyte stone, 16x8x6 inches, firmly set, marked 1/4 on west face, with a small mound of stone located alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T30SR9W
1/4
S31|S32
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a steep rocky northwest slope in piñon and juniper growth.

N. 2°38.8' E., beginning new measurement.

- 41.353** The corner of sections 29, 30, 31, and 32, monumented with a trachyte stone, 20x8x7 inches (Record; 24x18x12), firmly set, marked 1 notch on south and 5 notches on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 5 inches in the ground, to solid rock, in a mound of stone, 3 ft. base, to top of aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T30SR9W
S30|S29
S31|S32
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat ground, in scattered pinion and juniper growth.

From the corner of sections 28, 29, 32, and 33.

S. 87°23.9' W., between sections 29 and 32.

39.576 The 1/4 section corner of sections 29 and 32, monumented with a trachyte stone (Record; Volcanic), 16x15x10 inches, firmly set, marked 1/4 on west face.

from which the original bearing trees

A juniper, burned, standing, and hollowed out, bears N. 42 1/4° E., 29 links distance, with a healed blaze.

A juniper, burned to stump, bears S. 31° W., 39 links distance, with no remaining evidence of blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T30SR9W
S29
1/4 —
S32
2013

Deposit the marked stone alongside the aluminum post.

Corner falls on a slight southwest slope in burned area.

N. 87°05.8' W., beginning new measurement.

40.685 The corner of sections 29, 30, 31, and 32.

N. 88°19.2' W., between sections 30 and 31.

38.913 The 1/4 section corner of sections 30 and 31, monumented with a trachyte stone, 12x10x4 inches (Record; 20x14x12), firmly set, marked 1/4 on north face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked

8

T30SR9W
S30
1/4 —
S31
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a gradual west slope in piñon and juniper growth.

N. 88°40.6' W., beginning new measurement.

- 41.140 The corner of sections 30 and 31 only, on the west boundary of the township, hereinbefore described.

From the corner of sections 29, 30, 31, and 32.

N. 0°20.2' W., between sections 29 and 30.

- 41.343 The 1/4 section corner of sections 29 and 30, monumented with a trachyte stone, 16x10x10 inches, firmly set, marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T30SR9W
1/4
S30 | S29
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Raise a mound of stone, 2 ft. base by 1 ft. high, west of the aluminum post.

Corner falls 15 ft. south of a wash, drains westerly.

N. 0°03.2' E., beginning new measurement.

- 41.948 The corner of sections 19, 20, 29, and 30, monumented with a trachyte stone, 18x8x4 inches, firmly set, in a mound of stone, 3 ft. base, marked 2 notches on south and 5 notches on east edges.

No remaining evidence of the original bearing trees was found.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T30SR9W
S19|S20
S30|S29
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a northwest edge of two shallow washes converging, in dense juniper growth.

S. 87°17.5' W., between sections 19 and 30.

40.167 The 1/4 section corner of sections 19 and 30, monumented with a trachyte stone, 12x8x4 inches (Record; 20x12x12), firmly set, marked 1/4 on north face, with a small mound of stone located to the south.

No remaining evidence of the original bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground, to solid rock, in a mound of stone, 3 ft. base by 1 ft. high, with aluminum cap marked

T30SR9W
S19
1/4 —
S30
2013

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight north slope in piñon and juniper growth.

N. 88°33.6' W., beginning new measurement.

40.552 The corner of sections 19 and 30 only, on the west boundary of the township, hereinbefore described.

From the 1/4 section corner of sections 18 and 19, monumented with a trachyte stone, 18x10x10 inches, firmly set, marked 1/4 on north face.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 30 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T30SR9W
S18
1/4 —
S19
2013

Deposit the marked stone alongside within a mound of stone, 2 ft. base by 2 ft. high.

Corner falls 6 ft. north of wash drains northwesterly in sagebrush and scattered piñon and juniper growth.

N. 88°52.2' W., between sections 18 and 19.

39.862 The corner of sections 18 and 19 only, on the west boundary of the township, hereinbefore described.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

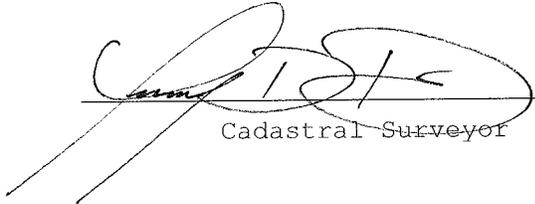
Name	Capacity
Keith Batty	Cadastral Surveyor
Tyler Gower	Laborer
Richard Howe	Laborer
Dameon Julander	Laborer

CERTIFICATE OF SURVEY

I, *Jeremy D. Davis*, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *August 26, 2013*, I have *dependently resurveyed a portion of the south boundary (Sixth Standard Parallel South), a portion of the west boundary, and a portion of the subdivisional lines, in Township 30 South, Range 9 West, of the Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 23, 2015

Date


Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the south boundary (Sixth Standard Parallel South), a portion of the west boundary, and a portion of the subdivisional lines, in Township 30 South, Range 9 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

February 26, 2015

Date



Chief Cadastral Surveyor for Utah