

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
A PORTION OF THE SUBDIVISIONAL LINES,

IN

TOWNSHIP 31 SOUTH, RANGE 9 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved **August 26, 2013**, which provided for the surveys included under Group Number **1237**, and Assignment Instructions dated **August 26, 2013**.

Survey Commenced, **August 28, 2013**  
Survey Completed, **October 24, 2013**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
A PORTION OF THE SUBDIVISIONAL LINES,

IN

TOWNSHIP 31 SOUTH, RANGE 9 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

*Jeremy D. Davis*  
*Cadastral Surveyor*

Under Special Instructions dated and approved **August 26, 2013**, which provided for the surveys included under Group Number **1237**, and Assignment Instructions dated **August 26, 2013**.

Survey Commenced, **August 28, 2013**  
Survey Completed, **October 24, 2013**

# INDEX DIAGRAM

TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

6	13 5	8 4	3	2	1
7	12 8	7 9	3 10	11	12
18	11 17	6 16	3 15	14	13
19	10 20	5 21	22	23	24
30	9 29	4 28	27	26	25
9	8				
31	32	33	34	35	36

## TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, in T. 31 S., R. 9 W., Salt Lake Meridian, Utah.

**HISTORY OF SURVEYS**

<b>Surveyed by</b>		<b>Retr. or Resurveyed by</b>	
<b>NORTH BOUNDARY (Sixth Standard Parallel South)</b>			
All	T.C. Bailey	1881	
All			J.R. & Q. Stewart 1911
Portion			J.D. Davis (Concurrent) 2013
<b>SOUTH BOUNDARY</b>			
All	T.C. Bailey	1881	
All			J.R. & Q. Stewart 1910
<b>EAST BOUNDARY</b>			
All	T.C. Bailey	1881	
All			J.R. & Q. Stewart 1910
<b>WEST BOUNDARY</b>			
All	T.C. Bailey	1881	
All			J.R. & Q. Stewart 1911
<b>SUBDIVISION</b>			
All	J.R. & Q. Stewart	1911	

## TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1237, dated August 26, 2013.

The directions of the lines were determined by references to true meridian, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); AI8805 FRED FREDONIA CORS ARP, DN7504 SGU1 ST GEORGE PUTIL CORS ARP, AI8817 ECH\_BRGN\_NV1999 CORS ARP..

The geographic position of the corner of sections 15, 16, 21, and 22, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°06'07.161" N.**,  
Longitude: **112°51'58.541" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,  
Network Accuracy = 0.200 meter at 95% confidence.

The geographic position of the closing corner of sections 5 and 6, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°08'52.580" N.**,  
Longitude: **112°54'10.721" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,  
Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 31 S., R. 9 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by  
J.R. and Q. Stewart in 1911

Beginning at the corner of sections 15, 16, 21, and 22,  
monumented with an iron post, 2 inches diameter, firmly set,  
projecting 14 inches above a small mound of stone, with brass cap  
marked as described in the official record of the 1911 survey.

from which the remaining original bearing tree

A juniper, 10 inches diameter, bears N. 74° W., 69 links  
distance, with visible scribe marks on a mostly healed  
blaze.

Corner falls at corner of fences extending north, south, and  
southeast, on flat ground.

**N. 0°05.0' W.**, between sections 15 and 16.

**40.064** The 1/4 section corner of sections 15 and 16, monumented with an  
iron post, 1 inch diameter, firmly set, projecting 18 inches  
above the ground, with brass cap marked as described in the  
official record of the 1911 survey.

Raise a mound of stone, around the iron post, 3 ft. base by 2  
ft. high.

Corner falls in a fence line extending north and south, on a  
gentle northwest slope.

**N. 0°05.1' W.**, beginning new measurement.

**39.997** The corner of sections 9, 10, 15, and 16, monumented with an  
iron post, 2 inches diameter, firmly set, projecting 12 inches  
above the ground, with brass cap marked as described in the  
official record of the 1911 survey.

Corner falls 2 ft. west of a fence line extending north and  
south.

**N. 0°02.6' W.**, between sections 9 and 10.

**40.056** The 1/4 section corner of sections 9 and 10, monumented with an  
iron post, 1 inch diameter, firmly set, projecting 18 inches  
above the ground, with brass cap marked as described in the  
official record of the 1911 survey.

Raise a small mound of stone around the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Corner falls in a fence line extending north and south.

---

From the corner of sections 28, 29, 32, and 33, monumented with an iron post, 2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a mound of stone, 2 ft. base by 1 1/2 ft. high along with a steel fence post are located alongside the iron post.

Corner falls on top of ridge extending northeast and southwest in sagebrush and scattered juniper growth.

**N. 0°09.3' W.**, between sections 28 and 29.

- 40.037** The 1/4 section corner of sections 28 and 29, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

A mound of stone, 2 ft. base by 2 ft. high, along with a steel fence post are located alongside the iron post.

Corner falls on a slight northwest slope.

---

**N. 0°04.4' W.**, beginning new measurement.

- 40.034** The corner of sections 20, 21, 28, and 29, monumented with an iron post, 2 inches diameter, firmly set, projecting 14 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Corner falls in a fence line extending northeast and southwest on a gentle northwest slope.

---

From the 1/4 section corner of sections 21 and 28, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

No remaining evidence of the original bearing trees was found.

Raise a mound of stone, 2 ft. base by 1 ft. high, around the iron post.

Corner falls on a slight east slope in sagebrush and scattered juniper growth.

**S. 89°41.1' W.**, between sections 21 and 28.

- 39.886** The corner of sections 20, 21, 28, and 29.
- 

**N. 0°05.5' W.**, between sections 20 and 21.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

- 40.016** The 1/4 section corner of sections 20 and 21, monumented with an iron post, 1 inch diameter, firmly set, projecting 13 inches above the ground, bent 30°, with brass cap marked as described in the official record of the 1911 survey.

Straighten the iron post, and bury it 30 inches in the ground, in a mound of stone, 3 ft. base, to top of brass cap.

from which the remaining original bearing tree

A burned juniper and standing, bears N. 56° E., 42 links distance, with a burned out blaze.

Corner falls on flat ground.

---

**N. 0°15.0' W.**, beginning new measurement.

- 40.233** The corner of sections 16, 17, 20, and 21, monumented with an iron post, 2 inches diameter, firmly set, projecting 14 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the remaining original bearing trees

A burned juniper, 14 inches diameter, bears N. 20° E., 145 links distance, with a healed blaze.

A burned juniper, 12 inches diameter, bears S. 76° E., 65 links distance, with a burned blaze.

A burned juniper, 18 inches diameter, bears S. 61° W., 22 links distance, with a healed blaze.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls on a gradual southeast slope.

---

From the corner of sections 15, 16, 21, and 22.

**S. 89°58.7' W.**, between sections 16 and 21.

- 39.991** The 1/4 section corner of sections 16 and 21, monumented with an iron post, 1 inch diameter, firmly set, projecting 23 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the original bearing trees

A bifurcated burned juniper, 10 inches diameter, bears S. 13° W., 53 links distance, with visible scribe marks on a mostly healed blaze.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 10 inches diameter, bears N. 44° W., 65 links distance (Record; 61 links), with a healed blaze.

Raise a mound of stone, around the iron post, 3 ft. base by 1.5 ft. high.

Corner falls in a shallow wash drains southeasterly.

---

S. 89°56.8' W., beginning new measurement.

40.047 The corner of sections 16, 17, 20, and 21.

---

N. 0°04.4' W., between sections 16 and 17.

40.041 The 1/4 section corner of sections 16 and 17, monumented with an iron post, 1 inch diameter, firmly set, projecting 24 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls on top of ridge on flat ground.

---

N. 0°00.4' E., beginning new measurement.

40.050 The corner of sections 8, 9, 16, and 17, monumented with an iron post, 2 inches diameter, firmly set, projecting 24 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the remaining original bearing trees

A burned juniper, 20 inches diameter, bears N. 48° E., 157 links distance, with a healed blaze.

A burned juniper, 14 inches diameter, bears S. 11° E., 108 links distance, with a healed blaze.

A burned juniper, 14 inches diameter, bears S. 2° W., 202 links distance, with a healed blaze.

A steel fence post is located alongside the iron post.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls on a slight northwest slope.

---

From the corner of sections 9, 10, 15, and 16.

N. 89°58.9' W., between sections 9 and 16.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 39.971** The 1/4 section corner of sections 9 and 16, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1911 survey.

A steel fence post is located alongside the iron post.

Corner falls on top of ridge extending northeast and southwest.

---

**S. 89°56.9' W.**, beginning new measurement.

- 39.981** The corner of sections 8, 9, 16, and 17.

---

**N. 0°06.3' W.**, between sections 8 and 9.

- 40.007** The 1/4 section corner of sections 8 and 9, monumented with an iron post, 1 inch diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1911 survey.

A steel fence post is located alongside the iron post.

Corner falls on a gentle south slope.

---

**N. 0°05.4' W.**, beginning new measurement.

- 39.992** The corner of sections 4, 5, 8, and 9, monumented with an iron post, 2 inches diameter, firmly set, projecting 4 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1911 survey.

A steel fence post is located alongside the iron post.

Corner falls on a slight northwest slope in tall grass.

From this corner, the National Geodetic Control Station "DIVIDE", monumented with brass tablet, 3 1/4 inches diameter, cemented in a large volcanic stone, bears S. 59°00'09" E., forward bearing and N. 59°00'11" W., back bearing, 4.876 chains distance.

---

From the 1/4 section corner of sections 4 and 9, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1911 survey.

Corner falls on a steep northeast slope in grass.

**S. 89°57.7' W.**, between sections 4 and 9.

- 40.046** The corner of sections 4, 5, 8, and 9.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°00.2' E., between sections 4 and 5.

- 40.087 The 1/4 section corner of sections 4 and 5, monumented with an iron post, 1 inch diameter, firmly set, projecting 10 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1911 survey.

from which the original bearing trees

A juniper, partially burned and standing, 8 inches diameter, bears S. 67° E., 34 links distance, with a burned blaze.

A piñon, partially burned and standing, 10 inches diameter, bears N. 46° W., 43 links distance, with a burned blaze.

Corner falls on top of ridge extending southeast and northwest.

N. 0°03.0' E., beginning new measurement.

- 53.160 The closing corner of sections 4 and 5, on the north boundary, monumented with an iron post, 2 inches diameter, firmly set, projecting 8 inches above a mound of stone, 2 ft. base, with brass cap marked as described in the official record of the concurrent resurvey of T. 30 S., R. 9 W.

From the corner of sections 28, 29, 32, and 33.

N. 89°56.4' W., between sections 29 and 32.

- 40.122 The 1/4 section corner of sections 29 and 32, monumented with an iron post, 1 inch diameter, firmly set, projecting 16 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the original bearing tree

A juniper, 14 inches diameter, bears N. 6° W., 100 links distance, with a healed blaze.

A steel fence post is located alongside the iron post.

Corner falls on a slight north east slope in sagebrush and juniper growth.

S. 89°59.1' W., beginning new measurement.

- 40.128 The corner of sections 29, 30, 31, and 32, monumented with an iron post, 2 inches diameter, firmly set, projecting 14 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

No remaining evidence of the original bearing trees was found.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls in the corner of burned fence extending northeast and west, on flat ground.

S. 89°58.6' W., between sections 30 and 31.

- 40.060 The 1/4 section corner of sections 30 and 31, monumented with an iron post, 1 inch diameter, firmly set, projecting 14 inches above the ground, with brass cap marked

1/4 S19  
S30  
1911

Mark the brass cap to read

1/4 S30  
S31  
2013  
1911

No remaining evidence of the original bearing trees was found.

Corner falls in a fence line extending east and west in sagebrush.

N. 0°05.0' W., between sections 29 and 30.

- 40.062 The 1/4 section corner of sections 29 and 30, monumented with an iron post, 1 inch diameter, firmly set, bent 45°, with no brass cap attached.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T31SR9W  
1/4  
S30|S29  
2013

Deposit the iron post alongside and buried a magnet at the base of the aluminum post.

Corner falls on a gradual northwest slope.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°06.3' W., beginning new measurement.

- 40.006 The corner of sections 19, 20, 29, and 30, monumented with an iron post, 2 inches diameter, firmly set, in a mound of stone, 3 ft. base, to top of brass cap marked as described in the official record of the 1911 survey.

No remaining evidence of the original bearing trees was found. Corner falls on a gentle southeast slope.

---

From the corner of sections 20, 21, 28, and 29.

N. 89°58.6' W., between sections 20 and 29.

- 40.139 The 1/4 section corner of sections 20 and 29, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls on a gentle southeast slope.

---

N. 89°58.8' W., beginning new measurement.

- 40.068 The corner of sections 19, 20, 29, and 30.
- 

N. 0°04.7' W., between sections 19 and 20.

- 40.083 The 1/4 section corner of sections 19 and 20, monumented with an iron post, 1 inch diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Corner falls on flat ground in sagebrush.

---

N. 0°05.2' W., beginning new measurement.

- 40.092 The corner of sections 17, 18, 19, and 20, monumented with an iron post, 2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Corner falls on flat ground, on west edge of thick piñon and juniper growth.

---

From the corner of sections 16, 17, 20, and 21.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

S. 89°55.5' W., between sections 17 and 20.

- 40.051 The 1/4 section corner of sections 20 and 29, monumented with an iron post, 1 inch diameter, firmly set, projecting 20 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Raise a mound of stone, around the iron post, 3 ft. base, to top of brass cap.

Corner falls on a gentle southeast slope.

---

N. 89°59.2' W., beginning new measurement.

- 40.018 The corner of sections 17, 18, 19, and 20.
- 

N. 0°04.2' W., between sections 17 and 18.

- 40.022 The 1/4 section corner of sections 17 and 18, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

No remaining evidence of the original bearing trees was found.

Corner falls on a slight west slope in juniper growth.

---

N. 0°05.7' E., beginning new measurement.

- 40.008 The corner of sections 7, 8, 17, and 18, monumented with an iron post, 2 inches diameter, firmly set, projecting 13 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a mound a stone, 3 ft. base by 2 ft. high, is located 2 ft. west, along with a steel fence post, located 5 ft. south of the iron post.

Corner falls on a gradual southwest slope in sagebrush, piñon, and juniper growth.

---

From the corner of sections 8, 9, 16, and 17.

S. 89°57.7' W., between sections 8 and 17.

- 40.087 The 1/4 section corner of sections 8 and 17, monumented with an iron post, 1 inch diameter, firmly set, projecting 18 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

from which the original bearing trees

A burned juniper, bears S. 21° W., 94 links distance (Record; 97 links), with a burned blaze.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

A burned juniper, 14 inches diameter, bears N. 87° W.,  
14 links distance (Record; 17 links), with a healed blaze.

A steel fence post located alongside the iron post.

Raise a mound of stone, around the iron post, 3 ft. base, to top  
of brass cap.

Corner falls on a steep rocky southeast slope.

---

S. 89°59.5' W., beginning new measurement.

39.903 The corner of sections 7, 8, 17, and 18.

---

N. 0°05.0' W., between sections 7 and 8.

40.040 The 1/4 section corner of sections 7 and 8, monumented with an  
iron post, 1 inch diameter, firmly set, projecting 4 inches  
above a mound of stone, 3 ft. base, with brass cap marked as  
described in the official record of the 1911 survey.

A steel fence post is located 2 ft. north of the iron post.

Corner falls on top of knoll in sagebrush and juniper growth.

---

N. 0°04.0' E., beginning new measurement.

39.912 The corner of sections 5, 6, 7, and 8, monumented with an iron  
post, 2 inches diameter, firmly set, projecting 3 inches above a  
mound of stone, 3 ft. base, with brass cap marked as described  
in the official record of the 1911 survey.

Corner falls at head of hollow extending northerly in juniper  
and oak brush.

---

From the corner of sections 4, 5, 8, and 9.

S. 89°54.2' W., between sections 5 and 8.

39.887 The 1/4 section corner of sections 5 and 8, monumented with an  
iron post, 1 inch diameter, firmly set, projecting 10 inches  
above a small mound of stone, with brass cap marked as described  
in the official record of the 1911 survey.

Corner falls next to a juniper, 10 inches diameter, on a steep  
rocky east slope.

---

S. 89°52.9' W., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 31 SOUTH, RANGE 9 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

**39.964** The corner of sections 5, 6, 7, and 8.

---

N. 0°01.6' W., between sections 5 and 6.

**40.233** The 1/4 section corner of sections 5 and 6, monumented with an iron post, 1 inch diameter, firmly set, projecting 5 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1911 survey.

Corner falls on a gradual north east slope near top of ridge, in piñon and juniper growth.

---

N. 0°01.3' W., beginning new measurement.

**53.500** The closing corner of sections 5 and 6, on the north boundary, monumented with an iron post, 2 inches diameter, firmly set, projecting 12 inches above the ground, with brass cap marked as described in the official record of the concurrent resurvey of T. 30 S., R. 9 W.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

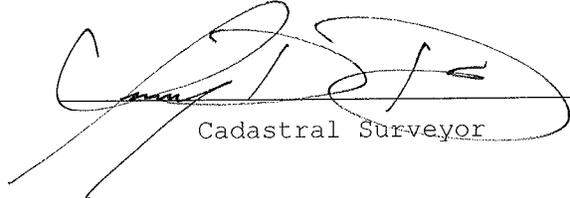
<b>Name</b>	<b>Capacity</b>
Tyler Gower	Laborer
Richard Howe	Laborer

---

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the **August 26, 2013**, I have **dependently resurveyed a portion of the subdivisional lines, in Township 31 South, Range 9 West**, of the **Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 23, 2015  
Date

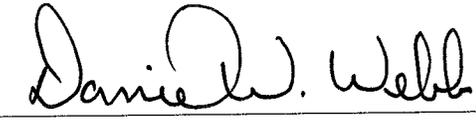
  
Cadastral Surveyor

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the subdivisional lines in Township 31 South, Range 9 West, Salt Lake Meridian, Utah**, executed by **Jeremy D. Davis, Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

February 26, 2015  
Date

  
Chief Cadastral Surveyor for Utah