

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
A PORTION OF THE SOUTH BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

IN

**TOWNSHIP 42 SOUTH, RANGE 7 WEST,**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

***Jeremy D. Davis***  
***Cadastral Surveyor***

Under Special Instructions dated and approved **April 28, 2014**, which provided for the surveys included under Group Number **1260**, and assignment instructions dated **April 28, 2014**.

Survey Commenced, **May 5, 2014**  
Survey Completed, **May 14, 2014**

# INDEX DIAGRAM

TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
			12		
30	29	28 10	27	26	25
		14	10		
31	32 13	33 9	34 8	35 7	36
		5	4	3	

## TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the south boundary, and a portion of the subdivisional lines, in T. 42 S., R. 7 W., Salt Lake Meridian, Utah.

**HISTORY OF SURVEYS**

<b>Surveyed by</b>		<b>Retr. or Resurveyed by</b>	
<b>SOUTH BOUNDARY</b>			
All	J.H. Clark & W. Lewman	1907	
<b>EAST BOUNDARY</b>			
All	A.B. Lewis	1897	
All		C.P. Sylvester & Etal.	1977
Portion		G.L. Kratz	1980
<b>WEST BOUNDARY</b>			
All	J.H. Clark & W. Lewman	1907	
Portion		A. Nelson	1924
Portion		G.D. Voorhees	1959
<b>NORTH BOUNDARY</b>			
All	J.H. Clark & W. Lewman	1904	
All		A. Nelson & C.F. Moore	1924
<b>SUBDIVISION</b>			
All	J.H. Clark & W. Lewman	1907	
Portion		A. Nelson	1924
Portion		G.L. Kratz	1980

## TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1260, dated April 28, 2014.

The direction of each line is with reference to the true meridian, determined by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys when using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model R8 GPS receivers were used for field collection. Cadastral Measure Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); AI8805 FRED FREDONIA CORS ARP, DK8419 AZPG CITY OF PAGE CORS ARP, DM7135 NVPI PIOCHE CORS ARP.

The geographic position of the corner of sections 26, 27, 34, and 35, as determined by static methods from geodetic control, is as follows:

Latitude: **37°07'20.743" N.**,  
Longitude: **112°36'38.681" W.**, N.A.D. 83 (2011), EPOCH: 2010.00  
Network Accuracy = 0.100 meter at 95% confidence

The geographic position of the corner of sections 21, 22, 27, and 28, as determined by direct RTK methods from the geodetic control, is as follows:

Latitude: **37°08'12.872" N.**,  
Longitude: **112°37'43.707" W.**, N.A.D. 83 (2011), EPOCH: 2010.00  
Network Accuracy = 0.200 meter at 95% confidence

THE DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

---

The Dependent Resurvey of a Portion of the South Boundary  
Township 42 South Range 7 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
J.H. Clark and W. Lewman in 1907

---

Beginning at the corner of sections 1, 2, 35, and 36, on the south boundary of the township monumented with an unrecorded survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 2 inches above the ground, with aluminum cap marked TC ENGINEERING T42S R7W 1 2 35 36 T41S PLS 5561917 2011, and is accepted as a careful and faithful perpetuation of the original corner point.

from which the original bearing trees

A juniper, 18 inches diameter, bears S 75° E., 353 links distance, with a healed blaze.

A juniper, 18 inches diameter, bears S. 60° W., 145 links distance, scribed T43S R7W S2 BT, on a partially healed blaze, (Record, S. 40° W.).

A juniper, 18 inches diameter, bears N. 48° W., 132 links distance, with scribe marks visible through a mostly healed blaze, (Record, N. 50° W.).

A sandstone, 30x4x4 inches marked 5 notches and 1 notch on edges was found alongside the aluminum pipe.

Corner falls at east end of gate in a fence line extending east and west, in juniper growth.

**N. 89°58.7' W.**, between sections 2 and 35.

**40.107** The 1/4 section corner of sections 2 and 35, monumented with an unrecorded survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked TC ENGINEERING T42S R7W 1/4 S2 S35 T41S PLS 5561917 2011, and is accepted as a careful and faithful perpetuation of the original corner point.

from which the original bearing trees

A juniper, 18 inches diameter, bears N. 40° E., 110 links distance, scribed 1/4 S35 BT, on a partially healed blaze, (Record, N. 51° E.).

A juniper, 18 inches diameter, bears S. 60° E., 105 links distance, with scribe marks visible through a mostly healed blaze.

THE DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A wood post, with faint scribe marks visible on blaze is located alongside the aluminum pipe.

Corner falls on north edge of fence line extending east and west, in juniper growth.

---

N. 89°57.9' W., beginning new measurement.

- 39.961** The corner of sections 2, 3, 34, and 35, monumented with an unrecorded survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked TC ENGINEERING T42S R7W S2 S3 S34 S35 PLS 5561917 2011, and is accepted as a careful and faithful perpetuation of the original corner point.

from which the original bearing trees

A juniper, 24 inches diameter, bears N. 20° E., 92 links distance, with a mostly healed blaze, (Record, N. 40° E., 80 links).

A juniper stump, 5 ft. high by 18 inches diameter, bears N. 50° W., 110 links distance, with scribe marks visible through a mostly healed blaze, (Record, N. 63° W., 106 links).

A sandstone, 20x8x4 inches, marked 2 and 4 notches on edges, is located alongside the aluminum pipe.

Corner falls at corner of fences extending east and southwest, on flat sandy ground in dense juniper growth.

---

N. 89°59.4' W., between sections 3 and 34.

- 40.144** The 1/4 section corner of sections 3 and 34, monumented with a sandstone, 18x4x3 inches (Record 24x8x4 inches), firmly set, marked 1/4 on north face.

from which the original bearing tree

A juniper, 20 inches diameter, bears N. 42° W., 99 links distance, with a healed blaze, (Record, N. 55° W., 92 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T42SR7W  
S34  
1/4 —  
S3  
T43S  
2014

THE DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat sandy ground in juniper growth.

---

S. 89°59.7' W., beginning new measurement.

- 39.807 The corner of sections 3, 4, 33, and 34, monumented with a hewn cedar post, in a state of decay, firmly set, with scribe marks visible on north side.

from which the original bearing trees

A juniper, 26 inches diameter, bears S. 54° E., 97 links distance, scribed 1/4 S3 BT, on an open blaze, (Record, S. 46° E., 85 links).

A juniper, 26 inches diameter, bears S. 55° W., 164 links distance, with a healed blaze, (Record, N. 56° E.).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground with aluminum cap marked

T42SR7W  
S33|S34  
S4|S3  
T43S  
2014

Set hewn cedar post alongside and buried a magnet at the base of the aluminum post.

Corner falls at corner of fences extending southwest and northwest, on flat sandy ground.

---

S. 89°59.2' W., between sections 4 and 33.

- 40.011 The 1/4 section corner of sections 4 and 33, monumented with a sandstone, 36x6x2 inches, firmly set, marked 1/4 on north face.

from which the original bearing tree

A juniper, 4 ft. diameter, bears S. 50° W., 86 links distance, with a healed blaze, (Record, S. 35° W., 90 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked

THE DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T42SR7W  
S33  
1/4 —  
S4  
T43S  
2014

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat sandy ground in juniper growth.

---

S. 89°45.9' W., beginning new measurement.

39.900 The corner of sections 4, 5, 32, and 33, monumented with a hewn cedar post, firmly set, with faint marks on a badly weathered blaze.

from which the remaining original bearing trees

A partially dead juniper, 16 inches diameter, bears S. 26° E., 66 links distance, scribed T42S R7W BT S4, on an open blaze, (Record, S. 16° E.).

A juniper, 20 inches diameter, bears S. 32° W., 76 links distance, with scribe marks S5 BT, visible on a mostly healed blaze, (Record, S. 15° W.).

A juniper, 20 inches diameter, bears N. 30° W., 101 links distance, with scribe marks S32 BT, visible on a mostly healed blaze, (Record, N. 50°30' W.).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T42SR7W  
S32|S33  
S5|S4  
T43S  
2014

Set the hewn cedar post alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat sandy ground, in juniper growth.

---

The Dependent Resurvey of a Portion of the Subdivisional Lines  
Township 42 South Range 7 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
J.H. Clark and W. Lewman in 1907

---

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

From the corner of sections 1, 2, 35, and 36, on the south boundary of the township, hereinbefore described.

N. 0°03.6' E., between sections 35 and 36.

- 39.879 The 1/4 section corner of sections 35 and 36, determined by record bearing and distance from the remaining bearing tree. There is no remaining evidence of the original marked stone.

A juniper, 16 inches diameter, bears S. 34° E., 49 links distance, scribed T42S R7W 1/4 S36 BT, on a partially healed blaze.

At the corner point

Set an aluminum post, 10 inches long, 2 1/2 inches diameter, flush with the ground, with aluminum cap marked

T42SR7W  
1/4  
S35|S36  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on flat sandy ground, in juniper growth.

From this point, an unrecorded survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, bears N. 11°12.3' E., 0.10 chains distance, with aluminum cap marked TC ENGINEERING T42S R7W 1/4 35 36 PLS 5561917 2011, and was not utilized in the course of this resurvey.

---

N. 0°07.2' E., beginning new measurement.

- 40.095 The corner of sections 25, 26, 35, and 36, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with brass cap marked as described in the official record of the 1980 resurvey.

from which the original bearing trees

A juniper, 16 inches diameter, bears S. 40° W., 83 links distance, with scribe marks visible through an open weathered blaze, (Record, S. 45° W.).

A juniper, 16 inches diameter, bears S. 47° E., 100 links distance, with a healed blaze.

A juniper, 16 inches diameter, bears S. 29° W., 41 links distance, scribed T42S R7W S35 BT, on a partly healed blaze.

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 16 inches diameter, bears N.  $33\ 1/2^\circ$  W., 116 links distance, with faint scribe marks on a weathered blaze.

---

From the corner of sections 2, 3, 34, and 35, on the south boundary of the township, hereinbefore described.

N.  $0^\circ 39.5'$  W., between sections 34 and 35.

- 39.803** The 1/4 section corner of sections 34 and 35, determined by record bearing and distance from the original bearing tree.

A juniper, 20 inches diameter, bears N.  $70^\circ$  E., 250 links distance, scribed 1/4 S35 BT on a partially healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with aluminum cap marked

T42SR7W  
1/4  
S34|S35  
2014

Deposit a magnet at the base of the aluminum post.

Build a mound of stone, 2 feet base, 1 foot high, west of corner.

Corner falls on flat sandy ground, in juniper growth.

From this point, an unrecorded survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 2 inches above the ground, bears N.  $70^\circ 00.0'$  E., 0.500 chains distance, with aluminum cap marked TC ENGINEERING T42S R7W 1/4 S34 S35 PLS 5561917 2011, and was not utilized in the course of this resurvey.

---

N.  $0^\circ 40.9'$  E., beginning new measurement.

- 40.145** The corner of sections 26, 27, 34, and 35, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1980 resurvey.

from which the original bearing trees

A juniper, 16 inches diameter, bears S.  $81^\circ$  E., 107 links distance, with faint scribe marks on a partially healed blaze.

A juniper, 14 inches diameter, bears S  $45^\circ$  W., 60 links distance, with faint scribe marks on a partially healed blaze.

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A juniper, 16 inches diameter, bears N. 45° W., 100 links distance, with faint scribe marks on a partially healed blaze, (Record, N. 54° W.).

A mound of stone, 2 ft. base by 1 ft. high, is located to the east of the iron post.

Corner falls approximately 9 ft. north of dirt road extending east and west, and 37 ft. from the centerline of the Hancock road, extending NE and SW.

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, hereinbefore described.

N. 0°07.4' W., between sections 33 and 34.

- 39.913** The 1/4 section corner of sections 33 and 34, determined by record bearing and distance from the original bearing tree. There is no remaining evidence of the original wood post.

A juniper, 24 inches diameter, bears S. 45° W., 241 links distance, scribed 1/4 S33 BT, on an open blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked

T42SR7W  
1/4  
S33|S34  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on flat sandy ground, in dense sagebrush and scattered juniper growth.

N. 0°10.9' W., beginning new measurement.

- 39.948** The corner of sections 27, 28, 33, and 34, determined by record bearing and distance from the southwest bearing tree. While setting monument, found remnants of charred wood post.

A juniper, 36 inches diameter, bears S. 60° W., 60 links distance, with visible scribe marks on a mostly healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T42SR7W  
S28|S27  
S33|S34  
2014

from which the remaining original bearing trees

A juniper stump, 2 ft. high, 36 inches diameter, bears  
N. 85° E., 198 links distance, scribed R7W S27 BT, on an  
open blaze, (Record, N. 77° E., 155 links).

A juniper, 26 inches diameter, bears S. 82° E., 231 links  
distance, scribed T42S R7W S34 BT, on an open blaze,  
(Record, S. 70° E., 160 links).

Deposit a magnet at the base of the aluminum post.

Corner falls on flat sandy ground in juniper growth.

---

Form the corner of sections 26, 27, 34, and 35.

N. 89°48.3' W., between sections 27 and 34.

- 39.854** The 1/4 section corner of sections 27 and 34, monumented with a  
sandstone, 36x12x4 inches, firmly set, marked 1/4 on north face,  
(Record, 22x10x3 inches).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24  
inches in the ground, with aluminum cap marked

T42SR7W  
S27  
1/4 —  
S34  
2014

Deposit the marked stone alongside and buried a magnet at the  
base of the aluminum post.

Corner falls on flat sandy ground, in juniper growth.

---

S. 89°41.7' W., beginning new measurement.

- 40.316** The corner of sections 27, 28, 33, and 34.
- 

N. 0°23.5' E., between sections 27 and 28.

- 40.096** The 1/4 section corner of sections 27 and 28, monumented with  
remnants of hewn cedar post, 10 inches long, projecting 4 inches  
above the ground.

from which the original bearing trees

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

A juniper, 14 inches diameter, bears S. 80° E., 88 links distance, with a healed blaze, (Record, 63 links).

A juniper, 24 inches diameter, bears S. 50° W., 133 links distance, with scribe marks visible on a mostly healed blaze, (Record, S. 60° W., 120 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T42SR7W  
1/4  
S28|S27  
2014

Deposit the remnants of the wood post along with a magnet at the base of the aluminum post.

Corner falls on flat ground, in piñon and juniper growth.

---

N. 0°06.6' E., beginning new measurement.

**39.891** The corner of sections 21, 22, 27, and 28, monumented with a hewn cedar post, badly weathered, 3 ft. long, 4 inches diameter, firmly set, with no visible marks.

from which the original bearing trees

A juniper, 36 inches diameter, bears N. 80° E., 189 links distance, with faint scribe marks on an weathered open blaze, (Record, N. 85° E., 194 links).

A juniper, 18 inches diameter, bears S. 74° W., 36 links distance, with scribe marks S28 BT visible on a partially healed blaze, (Record, S. 65° W., 30 links).

A juniper, 22 inches diameter, bears N. 42° W., 43 links distance, with scribe marks S21 BT visible on a badly weathered open blaze, (Record, N. 36° W., 34 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with aluminum cap marked

T42SR7W  
S21|S22  
S28|S27  
2014

Deposit the hewn cedar post alongside and buried a magnet at the base of the aluminum post.

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

Corner falls on a slight southeast sandy slope, in juniper growth.

---

From the corner of sections 22, 23, 26, and 27, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1980 resurvey.

from which the original bearing trees

A juniper, 18 inches diameter, bears S. 48° W., 42 links distance, with scribe marks visible on a mostly healed blaze.

A juniper, 24 inches diameter, bears N. 55° W., 11 links distance, with a healed blaze.

A cedar post is located alongside the iron post.

Corner falls on flat sandy ground, in juniper growth.

**N. 89° 51.5' W.**, between sections 22 and 27.

**40.013** The 1/4 section corner of sections 22 and 27, monumented with a badly weathered hewn cedar post, firmly set, with no marks visible.

from which the original bearing trees

A juniper, 20 inches diameter, bears N. 32° E., 60 links distance, with a healed blaze, (N. 30° E., 56 links).

A juniper, 26 inches diameter, bears S 54° E., 139 links distance, with faint scribe marks on a partially healed blaze, (Record, S. 40° E., 148 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T42SR7W  
S22  
1/4 —  
S27  
2014

Deposit the hewn cedar post alongside and buried a magnet at the base of the aluminum post.

Corner falls on flat sandy ground, in juniper growth.

---

**S. 89° 53.4' W.**, beginning new measurement.

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH  
CHAINS

39.899 The corner of sections 21, 22, 27, and 28.

---

From the corner of sections 4, 5, 32, and 33, on the south boundary of the township, hereinbefore described.

N. 0°06.7' W., between sections 32 and 33.

39.824 The 1/4 section corner of sections 32 and 33, monumented with a hewn cedar post, 4 ft. long, 4 inches diameter, firmly set, with no marks visible in a badly weathered blaze.

from which the original bearing trees

A juniper, 20 inches diameter, bears N. 10° E., 40 links distance, with faint scribe marks on a partially healed blaze, (Record, N. 30°10' E., 15 links).

A juniper, 18 inches diameter, bears WEST, 22 links distance, with a healed blaze, (Record, S. 25° W., 15 links).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 5 inches in the ground, to solid sandstone, in a mound of stone and earth 4 ft. base, to top of aluminum cap marked

T42SR7W  
1/4  
S32|S33  
2014

Deposit the hewn cedar post alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight southeast slope, in juniper growth.

---

N. 0°14.1' W., beginning new measurement.

40.087 The corner of sections 28, 29, 32, and 33, determined by distance-distance intersection from the two original bearing trees. There is no remaining evidence of the hewn cedar post.

A juniper, 28 inches diameter, bears S. 3°04.3' E., 134 links distance, scribed T42S R7W S33 BT, on an open blaze, (Record, S. 2° E.).

A juniper, 26 inches diameter, bears S. 33°24.5' W., 184 links distance, with scribe marks visible on a mostly healed blaze, (Record, S. 32°20' W.).

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26

THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 42 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

inches in the ground, with aluminum cap marked

T42SR7W	
S29	S28
S32	S33
2014	

Deposit a magnet at the base of the aluminum post.

Corner falls on flat ground, in recent fuels treatment.

---

From the corner of sections 27, 28, 33, and 34.

S. 89°54.7' W., between sections 28 and 33.

- 39.963** Point for the 1/4 section corner of sections 28 and 33, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T42SR7W	
S28	
1/4	———
S33	
2014	

Deposit a magnet at the base of the aluminum post.

Corner falls on flat sandy ground, in recent fuels treatment.

- 79.926** The corner of sections 28, 29, 32, and 33.
-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---


Name	Capacity
Jacob Murdoch	Cadastral Surveyor
Matt Gillins	Survey Technician

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *April 28, 2014*, I have *dependently resurveyed a portion of the south boundary, and a portion of the subdivisional lines, in Township 42 South, Range 7 West*, of the *Salt Lake* Meridian, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 14, 2015

Date

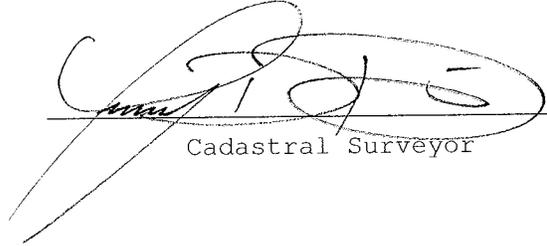  
Cadastral Surveyor


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the south boundary, and a portion of the subdivisional lines, in Township 42 South, Range 7 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

October 28, 2015

Date

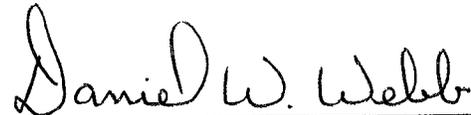

Chief Cadastral Surveyor for Utah