

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF  
A PORTION OF THE SUBDIVISIONAL LINES

THE SUBDIVISION OF SECTION 14

IN

TOWNSHIP 8 SOUTH, RANGE 7 WEST,

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

**Ronald K. Batty**  
**Cadastral Surveyor**

Under Special Instructions dated and approved **September 2, 2014**, which provided for the surveys included under Group Number **1280**, and Assignment Instructions dated **September 2, 2014**.

Survey Commenced, **September 16, 2014**  
Survey Completed, **November 19, 2014**

## INDEX DIAGRAM

TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

6	5	4	3	13 2	7 1
			18	13	6
7	8	9	17 10	12 11	6 12
		22	17	12	5
18	17	21 16	16 15	11 14	4 13
	22	20	16	10	
19	20	20 21	15 22	9 23	3 24
		19	14	9	
30	29	28	27	8 26	3 25
31	32	33	34	35	36

The Subdivision of Section 14.....23

## TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 14, in T. 8 S., R. 7 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>			
All	A.J. Stewart Jr.	1872	
Portion			H.W. Miller & I. Hayes 1915
All			G.B. Hatch 1965-67
<b>EAST BOUNDARY</b>			
Portion	A.J. Stewart Jr.	1872	
Portion	J. Gorlinski	1876	
All	H.W. Miller & I. Hayes	1915	H.W. Miller & I. Hayes 1915
<b>WEST BOUNDARY</b>			
All	J. Gorlinski	1875	
All			E. Bird & Etal. 1939-46
<b>NORTH BOUNDARY</b>			
Portion	J. Gorlinski	1876	
Portion			H.W. Miller & I. Hayes 1915
<b>SUBDIVISION</b>			
Portion	A.J. Stewart Jr.	1872	
Portion	J. Gorlinski	1876	
Portion	H.W. Miller & I. Hayes	1915	H.W. Miller & I. Hayes 1915

## TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1280, dated September 2, 2014.

The direction of each line is with reference to the true meridian, determined by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys when using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model R8 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); P105 DELTAMUNI\_UT2004, P113 KNOLLSWESTUT2006, P086 KENNECOTT1UT2005.

The geographic position of the section corner of sections 3, 4, 9, and 10, as determined by direct RTK methods from the geodetic control, is as follows:

Latitude: **40°08'34.516" N.**,  
Longitude: **112°37'42.167" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,  
Network Accuracy = 0.200 meter at 95% confidence

The geographic position of the 1/4 section corner of sections 25 and 26, as determined by direct RTK methods from the geodetic control, is as follows:

Latitude: **40°05'32.119" N.**,  
Longitude: **112°35'26.202" W.**, N.A.D. 83 (2011), EPOCH: 2010.00,  
Network Accuracy = 0.200 meter at 95% confidence

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a Portion of the Subdivisional Lines  
T. 8 S., R. 7 W., Salt Lake Meridian, Utah

---

Reestablishment of the surveys executed by A.J. Stewart in 1872, J. Gorlinski in 1875-76, and H.W. Miller and I. Hayes in 1915, and resurvey executed by H.W. Miller and I. Hayes in 1915

---

Beginning at the 1/4 section corner of sections 25 and 26, monumented with an iron post, 1 inch diameter, firmly set, bent over, with brass cap marked as described in the official record of the 1915 resurvey.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S26 | S25  
2014

Deposit the iron post alongside the corner.

Set a steel fence post on the south edge of the corner.

**N. 0°11.3' E.**, between sections 25 and 26,

**39.666** The corner of sections 23, 24, 25, and 26, monumented with a limestone, 20x10x8, loosely set on the east edge of an embedded mound of stone, with 1 notch on the east and 2 notches on the south edges.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S23 | S24  
S26 | S25  
2014

Deposit the marked stone alongside the corner.

---

**N. 0°12.5' E.**, between sections 23 and 24,

**40.159** The 1/4 section corner of sections 23 and 24, monumented with an iron post, 1 inch diameter, firmly set, bent over, with brass cap marked as described in the official record of the 1915 resurvey.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The original limestone, 16x10x6, with 1/4 on face is found lying alongside the iron post.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S23 | S24  
2014

Deposit the marked stone and original iron post alongside the corner.

---

N. 0°06.8' E., beginning new measurement.

- 40.356** The corner of sections 13, 14, 23, and 24, monumented with a limestone, 10x11x7, loosely set, with 1 notch on the east and 3 notches on the south edges, on the west edge of a mound of stone.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S14 | S13  
S23 | S24  
2014

Deposit the marked stone alongside the corner.

---

N. 1°19.2' E., between sections 13 and 14.

- 39.833** Point for the 1/4 section corner of sections 13 and 14, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S14 | S13  
2014

Set a steel fence post on the south side of the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The corner is located on the northern slope of a small knoll on the east edge of the old emigrant/stage coach overland road.

- 79.666** Point for the corner of sections 11, 12, 13, and 14, at proportionate measurement, there is no remaining evidence of the original corner.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the brass cap marked

T8S R7W	
S11	S12
S14	S13
2014	

Set a steel fence post on the north side of the corner.

The corner is located on the west edge of a clearing.

From the corner of sections 12 and 13 only, on the east boundary of the township, monumented with an iron post, 3 inches diameter, firmly set, projecting 10 inches above the ground, with the cap marked, as described in the resurvey of 1915, with a mound a of stone to the west of the corner.

From which

A bifurcated juniper, 12 inches diameter, bears N. 74°45' W., 33 links distance, clear scribing on a mostly healed over blaze.

The corner is located on a small flat, in a wash draining westerly.

**N. 89°50.8' W.**, between sections 12 and 13.

- 40.384** Point for the 1/4 section corner of sections 12 and 13, at proportionate distance, there is no remaining evidence of the original corner.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 27 inches in the ground, with the brass cap marked

T8S R7W	
	S12
1/4	—————
	S13
2014	

Set a steel fence post to the north of the corner.

The corner is located on ground that slopes westerly.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

80.768 The corner of sections 11, 12, 13, and 14.

---

N. 0°40.8' E., between sections 11 and 12.

39.826 Point for the 1/4 section corner of sections 11 and 12, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S11 | S12  
2014

Set a steel fence post to the north of the corner.

The corner is located on the eastern edge of a small copse of juniper.

79.652 The corner of sections 1, 2, 11, and 12, monumented with a limestone 10x8x6, loosely set, marked 5 notches on the south and 4 notches on the east. (Record: 16x10x8)

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 24 inches in the ground, with the aluminum cap marked

T8S R7W  
S2 | S1  
S11 | S12  
2014

Deposit the marked stone alongside the corner.

The corner is located on a gentle west slope. A fence extending east-west is 2 links south of the corner.

---

From the corner of sections 1 and 12 only, on the east boundary of the township, monumented with an iron post, 3 inches diameter, firmly set, projecting 9 inches above the ground, with the brass cap marked, as described in the resurvey of 1915, with a mound of stone set to the west.

N. 89°46.7' W., between sections 1 and 12.

40.680 The 1/4 section corner of sections 1 and 12, monumented with a limestone, 9x8x6, firmly set, projecting 5 inches above the ground, clearly marked 1/4 on the north face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the aluminum cap marked

T8S R7W  
S1  
1/4 —————  
S12  
2014

Deposit the marked stone alongside the corner.

The corner is located in a fence extending east-west. A wash draining south and west is 66 links east of the corner.

---

N. 89°17.2' W., beginning new measurement.

41.344 The corner of sections 1, 2, 11, and 12.

---

N. 0°50.7' W., between sections 1 and 2.

40.027 The 1/4 section corner of sections 1 and 2, monumented with an iron post, 1 inch diameter, bent, loosely set, mostly above ground, its location is harmonious with the 1915 resurvey and surrounding corners, and is accepted as the best available evidence of the original corner position.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S2 | S1  
2014

Deposit the original iron post beneath the aluminum post. Set a steel fence post on the north side of the corner.

The corner is located in a wide, shallow draw, draining southwesterly, in an old burn scar and that has been heavily chained.

---

N. 0°46.3' W., beginning new measurement.

40.597 The corner of sections 1, 2, 35, and 36, monumented with a limestone, 16x6x4, loosely set, clearly marked with 5 notches on the west and 1 notch on the east edges.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the aluminum cap marked

T7S R7W	
S35	S36
S2	S1
T8S	
2014	

Deposit the marked stone alongside the corner. Set a steel fence post to the north of the corner.

The corner is located on open, flat ground draining southwesterly in a chained area/burn scar.

From the corner of sections 26, 27, 34, and 35, monumented with an embedded mound of stone, no evidence remains of a stone with any identifiable marks, and accept the east edge of the mound as the best available evidence of the original corner position.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 24 inches in the ground, with the aluminum cap marked

T8S R7W	
S27	S26
S34	S35
2014	

The corner is located on the southern edge of a small finger ridge descending westerly.

**N. 0°30.7' W.**, between sections 26 and 27.

**40.007** Point for the 1/4 section corner of sections 26 and 27, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, on solid rock, in a mound of stone, 5 feet base, 3 feet high, with the aluminum cap marked

T8S R7W	
1/4	
S27	S26
2014	

The corner is located on a high point of a steep finger ridge descending westerly. The bottom of the draw is approximately 7.5 chains west of the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

- 80.014** Point for the corner of sections 22, 23, 26, and 27, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 29 inches in the ground, with the aluminum cap marked

T8S R7W	
S22	S23
S27	S26
2014	

Raise a mound of stone, 3 1/2 feet base, 1 1/2 feet high, to the west of the corner.

The corner is located on a steep hillside which faces northwesterly.

From the corner of sections 23, 24, 25, and 26.

**N. 89°50.9' W.**, between sections 23 and 26.

- 40.385** Point for the 1/4 section corner of sections 23 and 26, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, on solid rock, in a mound of stone, 6 feet base, 3 feet high, with the aluminum cap marked

T8S R7W	
	S23
1/4	_____
	S26
2014	

The corner is located on a south facing slope.

- 80.770** The corner of sections 22, 23, 27, and 26.

**N. 0°45.1' E.**, between sections 22 and 23.

- 40.009** Point for the 1/4 section corner of sections 22 and 23, at proportionate distance, there is no remaining evidence of the original corner.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, over an 'X' chiseled in stone, with magnet at base of post, in a mound of stone, 4 feet base, 26 inches high, with the aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T8S R7W  
1/4  
S22 | S23  
2014

The corner is located on a slope facing southwesterly at the edge of a burn scar.

- 80.018** The corner of sections 14, 15, 22, and 23, monumented with a limestone, 16x16x12, loosely set, marked 3 notches on the south edge and 2 dim notches on the east edge.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the aluminum cap marked

T8S R7W  
S15 | S14  
S22 | S23  
2014

Deposit a marked stone alongside the corner. Set a steel fence post to the north of the corner.

The corner is located on a northerly slope.

From the corner of sections 13, 14, 23, and 24.

**N. 89°25.8' W.**, between sections 14 and 23.

- 19.795** Point for the E 1/16 section corner of sections 14 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 1 inch in the ground, to solid rock, in a mound of stone, 4 feet base, 30 inches high, with the aluminum cap marked

S14  
E 1/16 ———  
S23  
2014

The corner is located on the southwest side of a small knoll, on the southern edge of a small saddle which extends east-west.

- 39.590** The 1/4 section corner of sections 14 and 23, monumented with a limestone, 16x10x9, loosely set, face up, with 1/4 on the north face. (Record: quartzite, 16x12x10).

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 27 inches in the ground, with the aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T8S R7W  
S14  
1/4 —————  
S23  
2014

Deposit the marked stone, inverted and alongside the corner.

The corner is located near the bottom of a steep draw draining northwesterly.

---

S. 89°01.8' W., beginning new measurement,

40.348 The corner of sections 14, 15, 22, and 23.

---

N. 0°02.6' E., between sections 14 and 15.

39.901 The 1/4 section corner of sections 14 and 15, monumented with a limestone, 9x5x4, firmly set, flush with the ground, marked 1/4 on the visible face.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S15 | S14  
2014

Deposit the marked stone alongside the corner.

Set a steel fence post alongside the corner.

---

N. 1°20.9' E., beginning new measurement.

38.658 The corner of sections 10, 11, 14, and 15, monumented with a lime stone, 14x8x8, firmly set, projecting 4 inches above the ground, with 3 notches on the south and 2 notches on the east.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 36 inches in the ground, with the aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T8S R7W	
S10	S11
S15	S14
2014	

Deposit the marked stone alongside the corner.

From which

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, bears S. 47°03.7' E., 71.4 links distance, with cap marked RM T8S R7W 47.10FT S14 2014, with an arrow pointing to the corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, bears S. 44°50.4' W., 26.3 links distance, with cap marked RM T8S R7W 17.38FT S15 2014, with an arrow pointing to the corner.

The corner is located in the southerly track of a two track road.

From the corner of sections 11, 12, 13, and 14.

**S. 89°01.0' W.**, between sections 11 and 14.

**40.410** Point for the 1/4 section corner of sections 11 and 14, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W	
S11	
1/4	—————
S14	
2011	

The corner is located on the northeastern face of a steep finger ridge descending easterly, in an old burn scar.

**80.820** The corner of sections 10, 11, 14, and 15.

**N. 0°19.1' E.**, between sections 10 and 11.

**40.361** Point for the 1/4 section corner of sections 10 and 11, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 1 inch in the ground, in a mound of stone 4 feet base, 29 inches high, with the aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T8S R7W  
1/4  
S10 | S11  
2014

The corner is located on a west facing slope, on the east bank of a small draw draining northerly.

- 80.722** Point for the corner of sections 2, 3, 10, and 11, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 28 inches in the ground, with the aluminum cap marked

T8S R7W  
S3 | S2  
S10 | S11  
2014

The corner is located on flat open ground. A fence extending east-west is approximately 40 links north of the corner.

From the corner of sections 1, 2, 11, and 12.

**S. 89°46.9' W.**, between sections 2 and 11.

- 40.644** Point for the 1/4 section corner of sections 2 and 11, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S2  
1/4 ———  
S11  
2014

Set a steel fence post on the north side of the corner.

The corner is located on the south side of a two track that parallels the fence. The fence, which extends east-west, is 20 links north of the corner.

- 81.288** The corner of sections 2, 3, 10, and 11.

**N. 0°27.7' W.**, between sections 2 and 3.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 40.361** Point for the 1/4 section corner of sections 2 and 3, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 29 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S3 | S2  
2014

Set a steel fence post on the north side of the corner. Raise a mound of stone 1 foot west of the corner.

The corner is located on the east edge within a small hollow.

- 81.125** The corner of sections 2, 3, 34, and 35, monumented with a sandstone, 12x8x4, firmly set, projecting 5 inches above the ground, with 2 notches on east and 4 notches on south edges, with a scattered mound of stone to west and an old steel fence post alongside.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the aluminum cap marked

T7S R7W  
S34 | S35  
S3 | S2  
T8S  
2014

Deposit the marked stone alongside the corner.

From the corner of sections 22, 23, 26, and 27.

**S. 89°39.1' W.**, between sections 22 and 27.

- 39.936** Point for the 1/4 section corner of sections 22 and 27, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 2 inches in the ground to solid rock in a mound of stone, 4 feet base, 28 inches high, with the aluminum cap marked

T8S R7W  
S22  
1/4 ———  
S27  
2014

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

The corner is located on a steep southerly slope.

- 79.872** The corner of sections 21, 22, 27, and 28, monumented with a limestone, 17x14x10, loosely set, clearly marked 2 notches on the south and 4 notches on the east edges.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 20 inches in the ground, in a mound of stone, 3 feet base, 10 inches high, with the aluminum cap marked

T8S R7W	
S21	S22
S28	S27
2014	

Deposit the marked stone alongside the corner.

From which

A juniper, 12 inches diameter, bears N. 32°29.8' W., 7.5 links distance, with illegible scribing on an open blaze.  
(Record: N. 60° W., 15 links).

**N. 0°07.8' E.**, between sections 21 and 22.

- 39.750** The 1/4 section corner of sections 21 and 22, monumented with a limestone, 16x14x4, loosely set, clearly marked 1/4 on the west face.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 14 inches in the ground, in a mound of stone, 3 1/2 feet base, 16 inches high, with the aluminum cap marked

T8S R7W	
1/4	
S21	S22
2014	

Deposit the marked stone alongside the base of the corner. Set a steel fence post on the north side of the corner.

**N. 1°44.4' E.**, beginning new measurement.

- 40.499** The corner of sections 15, 16, 21, and 22, monumented with a limestone, 20x14x6, firmly set, marked 3 notches on the east, dimly marked on the south edge.

At corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 24 inches in the ground, with the aluminum cap marked

T8S R7W  
S16 | S15  
S21 | S22  
2014

Deposit the marked stone alongside the corner.

The corner is located on a gentle north facing slope at the base of a small knoll.

From the corner of sections 14, 15, 22, and 23.

**S. 89°48.5' W.**, between sections 15 and 22.

**39.792** Point for the 1/4 section corner of sections 15 and 22, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 29 inches in the ground, with the brass cap marked

T8S R7W  
S15  
1/4 ———  
S22  
2014

Set a steel fence post to the north of the corner.

The corner is located on a gentle south facing slope, on the south side of a wide draw draining northwesterly.

**79.584** The corner of sections 15, 16, 21, and 22.

**N. 0°37.3' W.**, between sections 15 and 16.

**39.979** Point for the 1/4 section corner of sections 15 and 16, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S16 | S15  
2014

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Raise a mound of stone, 3 feet base, 1 1/2 feet high, on the west side of the corner.

The corner is located on the westerly facing slope.

- 79.958** The corner of sections 9, 10, 15, and 16, monumented with a quartzite, 19x10x7, firmly set, projecting 5 inches above the ground, with 3 notches on the east and 4 notches on the south.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W	
S9	S10
S16	S15
2014	

Deposit the marked stone alongside the corner. Set a steel fence post on the north side of the corner.

The corner is located on open, flat ground which drains northwesterly.

From the corner of sections 10, 11, 14, and 15.

**N. 89°11.8' W.**, between sections 10 and 15.

- 40.690** Point for the 1/4 section corner of sections 10 and 15, at proportionate distance, there is no remaining evidence of the original corner.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the brass cap marked

T8S R7W	
S10	
1/4	_____
S15	
2014	

Set a steel fence post on the north side of the corner.

The corner is located on the south end of an open field.

- 81.380** The corner of sections 9, 10, 15, and 16.

**N. 0°03.3' W.**, between sections 9 and 10.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

- 40.076** Point for the 1/4 section corner of sections 9 and 10, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 27 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S9 | S10  
2014

Set a steel fence post to the north of the corner.

The corner is located on open, flat ground.

- 80.152** The section corner of sections 3, 4, 9, and 10, at the intersection of fences, extending east and southwest and is harmonious with the surrounding corners, and is accepted as the best available evidence of the original corner position.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the brass cap marked

T8S R7W  
S4 | S3  
S9 | S10  
2014

The corner is located on flat, open ground.

From the corner of sections 2, 3, 10, and 11.

**N. 89°36.0' W.**, between sections 3 and 10.

- 40.940** Point for the corner of sections 3 and 10, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 29 inches in the ground, with the aluminum cap marked

T8S R7W  
S3  
1/4 ———  
S10  
2014

Set a steel fence post on the north side of the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

The corner is located on the south side of a two track that parallels a fence. The fence, which extends east-west, is 21 links north of the corner.

81.880 The corner of sections 3, 4, 9, and 10.

---

From the corner of sections 21, 22, 27, and 28.

N. 89°16.6' W., between sections 21 and 28.

39.565 The 1/4 section corner of sections 21 and 28, monumented with a conglomerate rock, 10x9x6, firmly set, with 1/4 clearly marked on the northern face.

At corner point

Set an aluminum post 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the aluminum cap marked

	T8S R7W
	S21
1/4	—————
	S28
	2014

Deposit the marked stone alongside the corner.

The corner is located on a gentle north facing slope.

---

N. 89°24.7' W., beginning new measurement.

40.237 The corner of sections 20, 21, 28, and 29, monumented with a quartzite, 10x10x8, firmly set, projecting 8 inches above the ground, marked with dim notches on the south and east sides. (Record: 12x12x12).

At corner point

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the brass cap marked

	T8S R7W
S20	S21
S29	S28
	2014

Deposit the marked stone alongside the corner. Set a steel fence post on the north side.

The corner is located on an open flat surrounded by sage and pinion.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0°55.9' E., between sections 20 and 21.

- 41.051 The 1/4 section corner of sections 20 and 21, monumented with a limestone, 11x8x4, firmly set, lying embedded in the ground, with face up, dimly marked 1/4. (rec: 13x10x5).

At corner point

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 25 inches in the ground, with the brass cap marked

T8S R7W  
1/4  
S20 | S21  
2014

Deposit the marked stone alongside the corner. Set a steel fence post on the north side of the corner.

The corner is located on an open flat, surrounded by dense sage. A road, which bears northeast and south west, is approximately 3 chains west of the corner.

N. 0°34.6' E., on new measurement.

- 40.049 Point for the corner of sections 16, 17, 20, and 21, at proportionate measurement, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S17 | S16  
S20 | S21  
2014

The corner is located on open, flat ground. The Simpson Springs road is 1.76 chains south of the corner.

From the corner of sections 15, 16, 21, and 22.

N. 88°43.7' W., between sections 16 and 21.

- 40.024 Point for the 1/4 section corner of sections 16 and 21, at proportionate distance, there is no remaining evidence of the original corner.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 27 inches in the ground, with the brass cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

T8S R7W  
S16  
1/4 —————  
S21  
2014

Set a steel fence post to the north of the corner.

The corner is located on flat ground, surrounded by sage and sparse juniper on the edge of the north bank of a small wash draining northwesterly.

**80.048** The corner of sections 16, 17, 20, and 21.

**N. 0°27.1' W.**, between sections 16 and 17.

**40.048** Point for the 1/4 section corner of sections 16 and 17, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 27 inches in the ground, with the aluminum cap marked

T8S R7W  
1/4  
S17 | S16  
2014

The corner is located on open flat ground.

**80.096** The corner of sections 8, 9, 16, and 17, monumented with a limestone, 8x7x7, fragmented and decayed, with some of the original notches still visible on the stone.

At corner point

Set an aluminum post, 30 inches long 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S8 | S9  
S17 | S16  
2014

Deposit the remains of the marked stone alongside the corner.

The corner is located in a fence extending northeast-southwest, in an open field draining northwesterly.

From the corner of sections 9, 10, 15, and 16.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

N. 88°37.4' W., between sections 9 and 16.

- 39.899** Point for the 1/4 section corner of sections 9 and 16, at proportionate distance, there is no remaining evidence of the original corner.

Set a stainless steel post 30 inches long, 2 1/2 inches diameter, with magnet at base, 26 inches in the ground, with the brass cap marked

T8S R7W  
S9  
1/4 —————  
S16  
2014

Set a steel fence post to the north of the corner. Raise a mound of stone, 2 feet base, 1 foot high, to the west of the corner.

- 79.798** The corner of sections 8, 9, 16, and 17.

From the corner of sections 16, 17, 20, and 21.

N. 89°41.2' W., between sections 17 and 20.

- 40.459** The 1/4 section corner of sections 17 and 20, monumented with a limestone, 13x6x3, firmly set, face up, flush with the surface of the ground, clearly marked 1/4 on the north face.

At corner point

Set an aluminum post, 30 inches long, 2 1/2 inches long, with magnet at base, 26 inches in the ground, with the aluminum cap marked

T8S R7W  
S17  
1/4 —————  
S20  
2014

Deposit the marked stone alongside the corner. Set a steel fence post on the north side of the corner.

The corner is located on open, grassy ground.

THE SUBDIVISION OF SECTION 14  
TOWNSHIP 8 SOUTH, RANGE 7 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

---

Subdivision of Section 14  
T. 8 S., R. 7 W., Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 14 and 23.

**N. 0°44.2' E.**, on the N-S centerline of section 14.

- 39.328** Point for the center 1/4 section corner of section 14, at the intersection with the E-W centerline of section 14.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 24 inches in the ground, with the brass cap marked

T8S R7W  
C 1/4 S14  
2014

The corner is located on a steep, west facing hillside.

- 78.565** The 1/4 section corner of sections 11 and 14.
- 

From the 1/4 corner of sections 13 and 14.

**S. 89°51.0' W.**, on the E-W centerline of section 14.

- 19.998** Point for the center E 1/16 section corner of section 14.

Set a stainless steel post, 30 inches long, 2 1/2 inches diameter, with magnet at base, 8 inches in the ground, in a mound of stone, 3 feet base, 22 inches high, with the brass cap marked

E 1/16  
C ————— C  
S14  
2014

The corner is located on a gentle, east facing slope.

- 39.996** The center 1/4 section corner of section 14.

- 80.809** The 1/4 section corner of sections 14 and 15.
- 

From the E 1/16 section corner of sections 14 and 23.

**N. 1°01.8' E.**, on the N-S centerline of the SE 1/4 of section 14.

- 39.580** The center E 1/16 section corner of section 14.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**

---

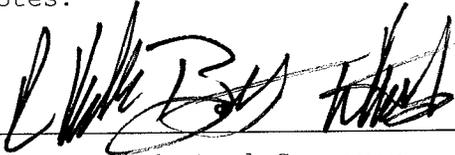
Name	Capacity
Christopher J. May	Cadastral Surveyor
Matthew N. Gillins	Survey Technician
Frazier T. Hansell	Survey Technician
Nicholas S. Verhoef	Survey Technician

## CERTIFICATE OF SURVEY

I, **Ronald K. Batty, Cadastral Surveyor**, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the **2<sup>nd</sup> day of September, 2014**, I have **dependently resurveyed a portion of the subdivisional lines and subdivided section 14, in Township 8 South, Range 7 West, of the Salt Lake Meridian**, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 18, 2016

Date

  
Cadastral Surveyor


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the **dependent resurvey of a portion of the subdivisional lines and the subdivision of section 14 in Township 8 South, Range 7 West, Salt Lake Meridian, Utah**, executed by **Ronald K. Batty, Cadastral Surveyor**, having been critically examined and found correct, are hereby approved.

April 18, 2016

Date

  
Chief Cadastral Surveyor for Utah