BOOK-A-154

1

14½ Examined by L. H. Cramwell, C.C.

Field Notes
of the
Survey of the
South, East & North
Boundaries of
Townships 43 South
Range 3 West
of the
Salt Lake Meridian
Utah Territory
by
F. C. Bailey & J. A. Burnie
under joint contract № 73 of
Bailey & Burnie
dated September 7th 1876

Survey commenced Feb 22nd 1877
" completed " 23rd "

65

BOOK-A-154

1

14½ Examined by L. H. Cramwell, C.C.

Field Notes
of the
Survey of the
South, East & North
Boundaries of
Townships 43 South
Range 3 West
of the
Salt Lake Meridian
Utah Territory
by
F. C. Bailey & J. A. Burnie
under joint contract № 73 of
Bailey & Burnie
dated September 7th 1876

Survey commenced Feb 22nd 1877
" completed " 23rd "

65

Township 43 North **R.** 3 West

10	11	12	13	14	15
6 80	5 61	4 [illegible]	3 39	2 29	1
19	18	60	45	38	28
7 [illegible]	8 59	9 47	10 37	11 17	12
18	17	58	46	36	[illegible]
18 74	17 57	16 [illegible]	15 35	14 26	13
19	20	21	22	23	24
30 66	29 50	28 41	27 31	26	25
31 63	32 50	33 40	34 30	35	36
1	5	3	4		

JOURNAL 104

South boundary of T. 43 S. R. 5 W.
Salt Lake Meridian.

0 min. Survey commenced Feb. 22nd 1877 by T. C. Bailey from the established cor. to townships 43 & 44 South, Ranges 3 & 4 W. 2 mm East on a true line between Secs 6 & 31 Var. 15° 30' E.

40.00 Set limestone 10 x 10 x 7 in. 6 in. deep marked 1/4 on N. side, with mound of stone, for 1/4 sec cor.

70.00 Ascend

80.00 Set limestone 19 x 12 x 4 in. 14 in deep notched S. 6 E. & W., with mound of stone for cor. to secs 5, 6, 31 & 32

Bears offsets

W cedar 4 in. dia bears N 60° E. 16 lks. dist. marked T. 32 S. 43 S.

South boundary of T. 43 S.

Chains	
	R. 3 W. B. T.
	A cedar 5 in. dia. bears S 50' W. 25 lks dist marked S 6 T. 44 S. R. 3 W. B. T.
	Land broken
	Soil 2nd rate rocky
	Timber Pine & Juniper

East on a true line between secs. 5 & 32
Var. 15° 30' E.

	Ascend
7.00	Top of slope bears W. N. & S.E.
9.00	Ends drains N. W.
39.00	Head of Gulch's drains N. W.
40.00	Set limestone 16 x 8 x 5 in. 10 in. above ground marked 1/4 on N. side, with mound of stone for 1/4 sec. cor. from which

T. 3 N., R. 2 W. Salt Lake Meridian

3

Trees

Cedar 5 in. dia. bears S 87° W 60 lks dist
" " 3 " " " South 15 " "
Both trees marked 1/4 S. B. T.

77.00 Wash on mud hollow drains N.W.

87.00 Set limestone 14 x 8 x 6 in. 9 in. deep notched 4 E. & 2 W., with mound of stone for cor to secs 4, 5, 32 & 33

Land undulating —
Soil red rate
Timber, cedar & pine

East on true line
between secs 4 & 33
Var 15° 30' E.—

Leaps 3 Gulch drains N. W.

31.00 Wash drains N. E

41.00 Set limestone 16 x 10 x 4 in., 10 in. deep marked 1/4 on N. side, with

South boundary of T. 43 S. R. 3 W. Salt Lake

Chains
45.00 Mound of stone for 1/4 sec. cor.
Rough to Logie Ferry base N. & S.
50.00 Ridge bears N.E. & S.W.
80.00 Set limestone 14 x 12 x 4 inches 8 ins
deep marked 3 E & W., with
mound of stone for cor. to secs.
3, 4, 33 & 34
Land rolling - rocky
Soil 2nd rate
Timber cedar & pine

East on true line
between secs 3 & 34
Var. 15° 30' E.

40.00 In Ridge bears N.E. & S.W.
Set limestone 24 x 15 x 3 in 18
in. deep marked 1/4 sec N secs
with mound of stone for 1/4 sec. cor
80.00 Foot of slope bears N. & S.
Set limestone 18 x 14 x 5 in 13 in

BOOK-A-154

East Boundary of T. 43 S. R. 3 W.
Meridian.

Chains	deep notched 2 E. & 4 N., with mound of stone for cor. to secs 2, 3, 34 & 35. Land rolling & Mtky. Soil 2nd rate. Timber cedar & pine. Febr. 22nd 1877. J. C. Bailey.
	Febr. 23rd 1877. by J. G. Burnie. It being impracticable on account of the Buttes to run the E. boundary further E. therefrom from the cor. to secs 2, 3, 34 & 35 I run North on an offset line Var 15° 30' E. 160.00 chains thence East 160.00 chains to E. boundary

East boundary of T. 43 S

Chains	At the township corner I set a Limestone 20 x 15 x 5 in. 15 in. deep notched 4 N. & 2 E. with mound of stone for cor to secs 19, 24, 25 & 30 thence North between secs 19 & 24 Var. 15° 30' E.	
24.00	Gulch drains N. W.	
34.00	" " N. E.	
40.00	Set Limestone 18 x 15 x 4 in 13 in deep marked 4 on W. side, with mound of stone for 1/4 sec. cor.	30.00 40.00 65.00 80.00
44.00	Same Gulch drains N. W.	
54.00	" " " N E.	
80.00	Set Limestone 20 x 11 x 9 in. 5 in. deep notched 3 on N & E Ledge with mound of stone for cor. to secs 13 & 18 19 & 24	
	Land broken - rocky	

Soil 2nd rate.
Timber cedar & pine

North between Secs 13 & 18.
Var. 15° 30' E.

30.00 Mound drains N.E.

40.00 Set limestone 16 x 10 x 8 in 10 in
above marked 1/4 on W side, with
stone mound of stone for 1/4 sec cor.

65.00 Creek drains E.

80.00 Set limestone 15 x 10 x 5 in 10 in
above marked 4 notches on S & N
on N. edge, with mound of stone
for cor to secs 7, 12, 13 & 18

Land rolling & rocky
Soil 2nd rate
Timber cedar & pine

East boundary of T. 43 S. R 3 W.
Salt Lake Meri

Chains	
	North between secs 7 & 12
	Var. 15° 30' E.
7.00	Wash drains E.
40.00	Set limestone 14 x 10 x 8 in 9 in deep marked 1/4 on W side, with mound of stone for 1/4 sec. Cor.
57.00	Creek drains N.E.
80.00	Set limestone 14 x 9 x 9 in. 9 in deep notched 1/4 S. & S., with mound of stone for cor. to secs. 1. 6. 7 & 12
	land rolling - rocky
	Soil 2nd rate
	Timber cedar & pine
	North between secs 1 & 6
	Var. 15° 30' E.
15.00	Creek drains N.E.
40.00	Set limestone 18 x 10 x 4 in. 13 in deep marked 1/4 on W. side, with

Chains
80.00

BOOK A-154

North boundary of T. 43 S. R. 3 W.

Meridian.

Chains	
80.00	mound of stone for ¼ sec. cor. Set limestone 15 x 10 x 5 in. 10 in. deep marked 6 on N. W. & S. edges for cor. to T. 42 & 43 S. R. 2 & 3 W.
	Land rolling — rocky
	Soil 2nd Rate
	Timber cedar & pine

From the cor to T. 42 & 43 S. R. 2 & 3 W. 2 mm West on a random line between said townships setting temporary corners at every 40 & 80 chains. I find the line to be 5 miles 79 chs & 60 lks. and the falling to be 72 lks N. of the township cor. — The correction for the true line will therefore

North boundary of T. 43 S.

Chains		
	Lee 12 links S. per mile, and the bearing N. 89° 55' E.	
	From the cor to Secs 42 & 43 S.	
	Rs 3 & 4 W. 72 mm	2.00
X	X N 89° 55' E on true line	4.00
	between secs 6 & 31	
	Var 15° 30' E	
39.60	Drove charred cedar post, 48 x 4 x 4 in marked 1/4 on N. side, 12 in deep in mound of earth mixed from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.	80.00
79.60	Drove charred cedar post 48 x 4 x 4 in. notched 5 E & 1 W., 12 in deep in mound of earth mixed from 4 pits each 24 x 12 x 12 for cor to secs 5, 6, 31 & 32	
	Land undulating	
	Soil 1st rate	
	Timber scattering cedar	

T. 3 N. Salt Lake Meridian.

BOOK-A-154

11

N. 89° 55' E. on true line between secs 5 & 32.

Var. 15° 30' E.

20.00 Road bears N.E. & S.W.

46.33 Iron chained cedar post 48 x 4 x 4 in. marked 4 on N. side, 12 in. deep in mound of earth mixed stone & pits each 24 x 12 x 12 in. for 1/4 sec. cor.

80.00 Set sandstone 15 x 14 x 8 in. 10 in. deep marked 4 notches on E. & 5 on W. edges and mixed a mound of earth stone & pits each 24 x 12 x 12 in. for cor. to secs. 5, 4, 32 & 33

Land undulating. Soil [illegible] under scattering cedar.

X

N. 89° 55' E. on true line between secs. 4 & 33

North boundary at 0. 43 E.

	Var. 15° 39' E.	32.50
40.00	Set sandstone 12 x 12 x 4 in. 8 in. deep marked 1/4 on N. side and mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.	37.00 40.00
37.00	Set sandstone 12 x 10 x 3 in. 10 in deep notched 3 E & 30 N. and mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs 3 4 33 & 34.	42.00 37.00 80.00
	Land mostly level Soil 1st rate No timber	
	N. 89° 55. E on true line between secs 3 & 34 Var. 15° 30' E.	
7.00	Road runs N.E. & S.W.	

32.50	Mark trees N.E.
37.00	" " "
40.00	Set sandstone 16 x 14 x 9 in 10 in deep marked 1/4 on N side and mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
42.00	Mark trees N.E.
57.00	Leave feat & enter timber land, trees N.E. & S.W.
81.00	Set limestone 20 x 15 x 6 in, 15 in deep notched 2 E & 4 W, with mound of stone for cor to secs 2, 3 34 & 35 from which A cedar 12 in dia bears S. 34 E. 44 links dist. marked S 2 T 43 S. R 2 W B. T. A cedar 6 in dia bears

North boundary of T. 43 S.

14

N 23 E 90 lks. dist. marked
S 35 T 42 S. R 3 W. Ch. T.
Land mostly level
Soil 1st rate
Timber cedar on E. 30 chs

40.00

N. 89° 55' E. on true line
between secs 2 & 35
Var 15° 30' E.

40.00 Set limestone 15 x 10 x 5 in. 75.00
10 in. dugs marked 1/4 on N side, 80.00
with mound of stones for
1/4 sec. cor.

80.00 Set limestone 15 x 11 x 6 in.
10 in. dugs notched 1 E & 5 W.
with mound of stone for cor
to secs 1, 2, 35 & 36
Land gently N. slope
Soil 2nd rate - rocky

Timber cedar & pine

N. 89° 53' E on true line
between secs 1 & 36
Var. 15° 30' E.

40.00 Set limestone 15 x 10 x 5 in.
10 in. deep marked 1/4 on N. side,
with mound of stone for
1/4 sec. Cor.

75.00 Ended drains N.E.

80.00 This cor to townships 42 &
43 R. Ranges 2 & 3 W. —
Land rolling — rocky
Soil red and sandy
Timber cedar & pine
Feb. 23rd 1877 J. C. Conway

For General Description and
Approval see end of subdivision
notes of this township —

BOOK-A-154

2

19

Field Notes,

of

The Survey of the

Subdivision Lines

of

Township 1 South Range 3 West

of

The Salt Lake Meridian

Utah Territory,

By

J. M. Bailey & J. H. Burnside,

Under Joint Contract of Bailey & Burnside

No. 73. Dated Sept. 14th 1876.

Survey commenced July 23rd 1877

" Completed " 26th 1877.

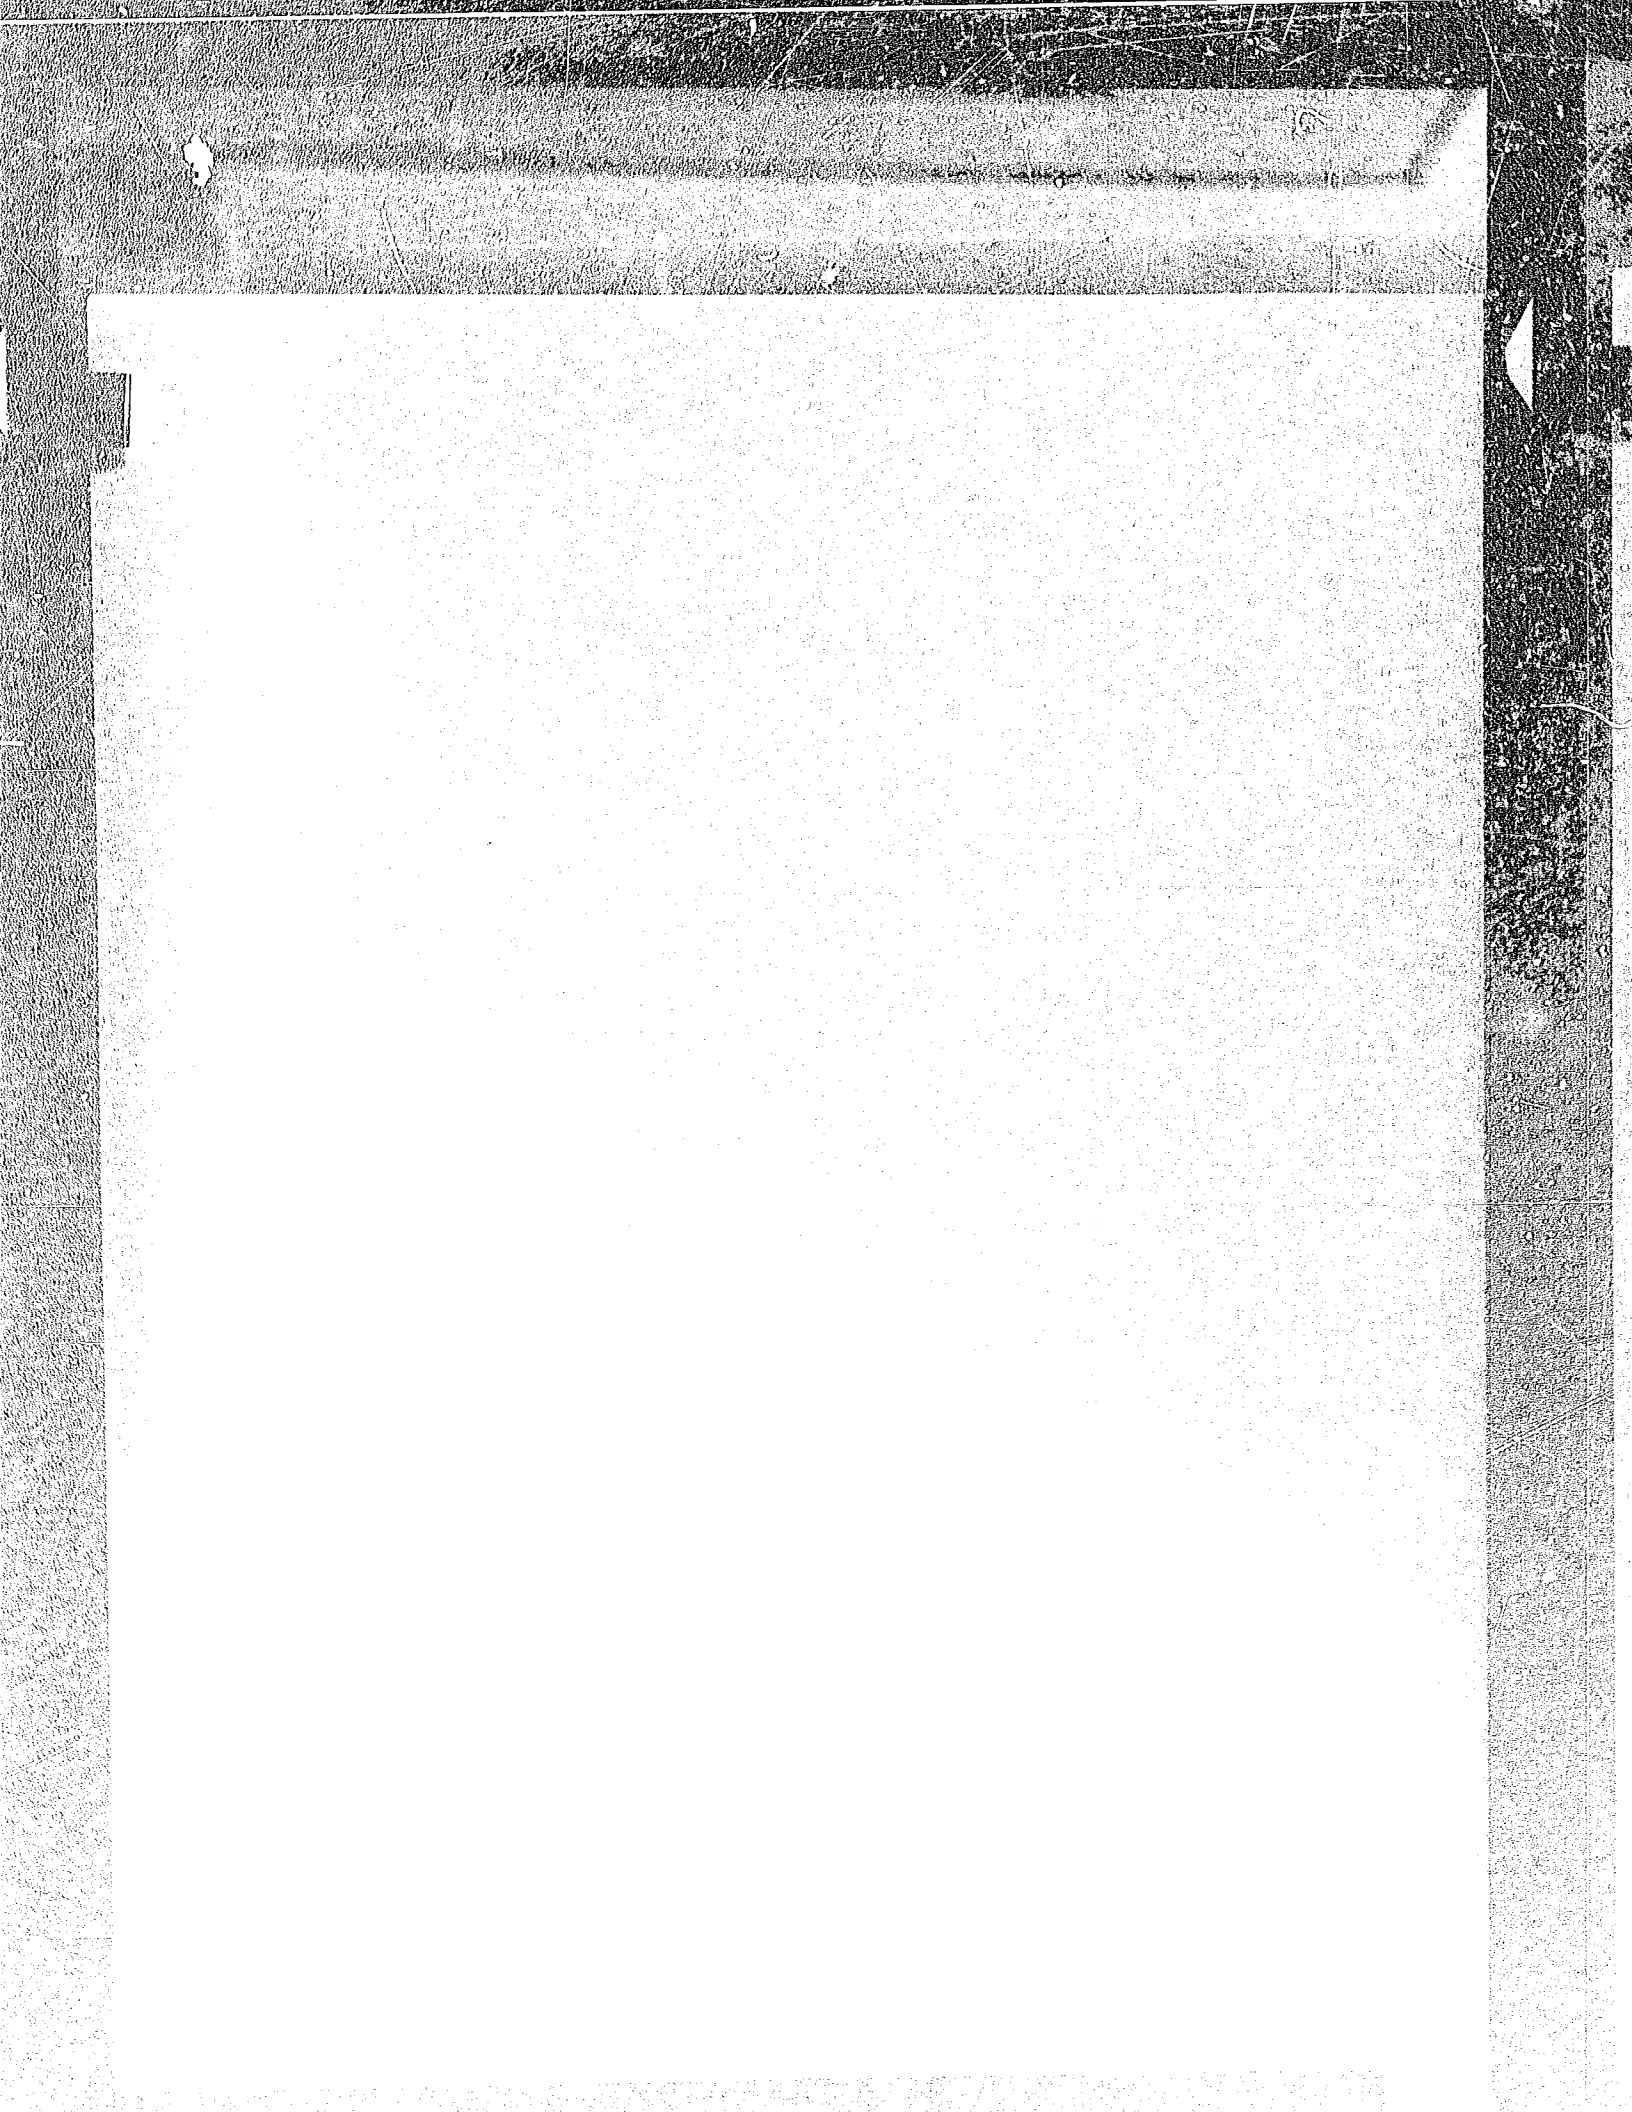

Subdivisions of Sec. 23 & 24, T. 2 S., R. 2 E.,

BOOK-A-154

Salt Lake Meridian

Chains	February 23rd 1894 By J. C. Bailey, The corner to Sections 35 & 36 Not being established, therefore from the Cor. to Secs 24 & 25 on the East boundary of the Township Due North on true line between Secs. 24 & 25, Var. 15° 30' E.
16,00	Gulch drains N.E.
11,00	Set Limestone 15 x 10 x 5 in 10 in deep, marked 1/4 on N. side & raised mound of stones for 1/4 Sec. Cor.
2 50,00	Set limestone 16 x 10 x 10 in, 12 in. deep, marked 1 notch on E. & 2 on S. sides & raised mound of stones for cor. to Secs. 23, 24, 25 & 26.

Subdivisions: N, ½ S. ½ 3 W.

Chains	Land rolling, Soil 2nd rate Timber, Cedar & prairie Grass
	North between Secs 23 & 24, Var 15° 30' E.
40,00	Set Limestone 18 x 12 x 11 ins, 12 ins deep, marked ¼ on W, pile & raised mound of Stones for ¼ Sec Cor,
80,00	Set Limestone 20 x 15 x 9 ins, 12 ins deep, marked 1 notch on E, & 3 on S, edges N & raised mound of stones for Cor, to Secs 13, 14, 23 & 24 Land rolling, Soil 2nd rate, rocky, Timber, Cedar & Lime,

Tuck Lake Meridian

Chains	
	East on a random line between Secs. 13 & 24, Var. 15° 30' E.
40.00	Set temporary 1/4 Sec. Cor.
17.00	Gulch Drains N.E.
79.90	Intersect E. boundary of Cor. to Secs. 13, & 24 from which
	Set on true line between Secs. 13, & 24
39.45	Set Limestone 18x16x10 in 12 in. deep, marked 1/4 on N. side & raised mound of stones for 1/4 Sec. Cor.
79.90	The Cor. to Secs. 13, 14, 23 & 24
	Land rolling Soil 2nd rate, Timber, Cedar & pine.

26

Subdivisions N. 43 S. R. 3 W.

Chains.	
	North between Secs. 13 & 14
	Var. 15° 30' E.
4,00	Set Limestone 18 x 9 x 9 ins,
	12 ins. deep, mounded Pits on
	W. side, & raised mound
	of stones for the Sec. Cor.
41,00	Gulch Drains S.W. &
80,00	Set Limestone 16 x 10 x 6 ins,
	10 ins. deep, marked 1 Notch on E.
	& 4 on S. edges, & raised mound
	of stones for Cor. to Secs. 11, 12,
	13 & 14
	Land rolling,
	Soil 2nd rate,
	Timber, Cedar & pine,

East on random line
between Secs. 12 & 13,
Var. 15° 30' E.

26,00	Gulch Drains N.E.

Salt Lake Meridian

Chains	
40.00	Set temporary 1/4 Sec. Cor.
79.85	Intersect E. boundary of T. 16 S., R. 1 E., of Cor. to Secs. 12 & 13, from which S. 89 53 W. one true line between Secs. 12 & 13, Var. 15° 30' E.
39.93	Set limestone 16 x 15 x 6 in., 10 in. deep, marked 1/4 on N. side & raised mound of stone for N. 1/4 Sec. Cor.
79.85	The Cor. to Secs. 11, 12, 13 & 14 Land rolling, Soil 2nd rate, rocky, Timber, Cedar & Pine.

North between Secs. 11 & 12
Var. 16° 30' E.

37.00	Gulch drains N.E.

Subdivisions of Sec 13 T. 12 S. R. 2 W.

Price per acre	Set Stone on W. quarter, 10 in. long, marked 1/4 on top, W. quarter mound, no pits, stones for Cor.	Chain
$10,00	Set Stone on S. quarter, 20 x 9 x 4 in. 15 in. deep, marked 1/4 on E & S on S, edges rounded, mound of stones for Cor, to Secs, 1, 2, 11, & 12, Land rolling, Soil Gravelly, Timber, Cedar & Pine.	399
		79.8
	East on random line between Secs 1 & 12, Var, 15° 30' E,	
40,00	Set Limestone 1/4 Sec, Cor,	19
65,00	Gulch Across N. E,	33
79,80	Ordinary E, boundary of	39

Smith Lake Meridian,

Chains	Down fish 35 lks, S. of Cor, to Sec, 1 & 2 from which, S, 89 45-W, on true line between Secs, 1 & 12,
39,90	Set Limestone 18 x 11 x 10 in, 12-in, deep, marked 1/4 on N, side D, raised, mound of stones for 1/4 Sec, Cor,
79,80	The cor, to Secs, 1, 2, 11 & 12, Land broken, rocky Soil 2nd rate, Timber, Cedar & pine,
	North on random line between Secs, 1 & 2, Var, 15° 30' E,
19,—	Birch trees N.E,
2,00	Set temporary 1/4 Sec, Cor,
5,20	Tamarack N, boundary of

30

Section 14, 11 S. R. 3 W.

Chains | 1/4 sec. E. of cor. to Secs 1 & 2 bet. Sec. 1 & 2, N. 0.15 E. on line bet. Secs 1 & 2,

1.00 | Set Limestone 16 x 12 x 5 in. 12 in. deep, scribed 1/4 on S. side, & raised mound of stones for 1/4 Sec. Cor.

50.00 | Pile Cor. to Secs 11, 12, 13, 14, Land sloping, Set 2" white oak stake, Limestone, Cedar & Stone, Feby. 23rd 1874. T. C. Bailey.

Feby 23rd 1874.

By J. H. Burrill,

From the Cor. to Secs 35 & 36 on the S. boundary of the 1/2 Town,

North between Secs 35, 26,

Dachstuhl Meridian

Dan, 15°30' E.

Set Quantities reserve, 11
in duh, marked Dan Reserve
Diamonds as Quantities
Dan Sea, Dan.

Dan Chains E.

Set Quantities Diamonds, 12
miscellaneous 2 on E &
1 on S, clays & raised mounds
optional per cent Dan 26, 27,
31, 35.

Land saving,
Set 2 Trade, rocky,
Dan, Select Spring,

Set in Earth's broken N.
unspecified Diamonds
North Dan Sea 26-27
Dan 15°30' E.

Sitzung Nr. 43 S. M. 2 24

	Quick Quarter C.	
	Set Limestone Quarry in	
	Set Limestone Quarry	
	15 Tons Rock, mostly Limestone	
	Set Limestone Quarry in	
	Set Limestone Quarry	
	Land survey, Rocky	
	Set Quarry	
	Timber, Cedar & Pine	
	East per random line	
	Station Sec. 23 T. 24	
	Var. 15° 30' E.	
40,00	Set Temporary Mon Sec Cor.	
46,00	Quick Granite S.E.	

BUUX-A-154

Salt Lake Meridian

Township 5 S, R 1 W

Section 1, All, 635.84 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

Township 5 S, R 2 W

Sec. 1, All, 639.36 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

Township 5 S, R 3 W

Sec. 1, All, 639.36 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

Township 5 S, R 4 W

Sec. 1, All, 639.36 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

Township 5 S, R 5 W

Sec. 1, All, 639.36 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

Township 5 S, R 6 W

Sec. 1, All, 639.36 Acres

Sec. 2, All, 639.36 Acres

Sec. 3, All, 639.36 Acres

Sec. 4, All, 639.36 Acres

Sec. 5, All, 639.36 Acres

Sec. 6, All, 639.36 Acres

Sec. 7, All, 639.36 Acres

Sec. 8, All, 639.36 Acres

Sec. 9, All, 639.36 Acres

Sec. 10, All, 639.36 Acres

Sec. 11, All, 639.36 Acres

Sec. 12, All, 639.36 Acres

North Uintah Sec. 22, 23, 24, 25, 26, 27

Lat. 15° 30' E.

Fee Limitation 15 year 40 Acre, 12 month, marked Keyin Blank Travel Permit required

Subdivision Sec 14 T 6 R 7 W

BC

Chain

Surveyed for U. S. Gen. Co.

Sept 20 Set Limestone 24 x 12 x 8 in. 15 in. each, mound 2 notches on E & W sides, adjoining Cor. to Secs. 14, 15, 22 & 23. Land rolling, rocky. Soil light. Timber, Cedar & pine.

Chain 30,10

Eastward from Cor. Between Secs. 14 & 23. Cor. to Secs. 15, 22, 23 & E.

Chain 40,00

Set temporary Cor.

Chain 2,00

Intersect S. fence, bears 16 Chs.

Chain 2,10

S. of Cor. to Secs. 13, 14, 23 & 24 from which

Chain 80,00

S. 89° 33' W. on true line Between Secs. 14 & 23.

Chain 40,05

Set Limestone 16 x 10 x 4 in.

Set Cor. Meridian

Chains	11 in. deep, marked 1/4 on N. side, x raised mound of stones for 1/4 Sec. Cor.
30,00	The Cor. to Secs. 14, 15, 22 & 23 Land rolling, & rocky, Soil 2nd rate, Timber, cedar & pine.
	North Latitude Secs. 14 & 15, Var. 15° 30' E.
40,00	Set Limestone 18 x 15 x 5 in, 12 in. deep, marked 1/4 on W. side raised mound of stones for 1/4 Sec. Cor.
80,00	Set Limestone 20 x 13 x 6 in, 15 in. deep, marked 2 notches on E. & 4 on S. edges, raised mound of stones for Cor. to Secs. 10, 11, 14 & 15.

Subdivisions, Th. 43 S. R. 3 E. 21

Chain	Land rolling & rocky, Soil 2nd rate. Timber, cedar & fir.	Chain
	East on true line between Secs 11 & 12, Dec. 15° 30' E,	23,0 40,0
W, 0	Pch Southwest Cor, Sec,	
39,16	Intersect N. & S. line at 40 cor, to Secs 11, 12, 13 & 14 from which,	50,0
	West on true line between Secs, 11 & 14	
40,08	Set Stone 20 x 12 x 6 in, 15 in, deep, marked 1/4 on N. side, & raised mound of stones for 1/4 Sec, Cor,	
39,16	Pine Cor, to Secs, 11, 12, 14, & 15, Land rolling & rocky.	

Salt Lake Meridian

Chains	Soil 2nd rate Timber, Cedar & pine
	North between Secs. 10 & 11, Var. 15° 30' E,
23,00	Gulch chains N. E,
41,00	Set Limestone 15 x 10 x 5 in, 16 in deep, marked 1/4 on W. side & raised mound of stones for 1/4 Sec. Cor,
80,00	Set Limestone 24 x 15 x 14 in, 15 in. deep, marked 7 notches on E, & 5 on S. edges & raised mound of stones for Cor, to Secs, 2, 3, 10 & 11,
	Land rolling, rocky, Soil 2nd Rate, Timber, Cedar & pine,

Subdivisions, T. 4, R. 3 E., R. 3 W.

Links		Chains
	East on a random line between Secs. 2 & 11, Var. 15° 30' E.	
11,00	Set temporary 1/4 Sec. Cor.,	11,00
62,00	Gulch drain, N. E.	
80,20	Intersect N. & S. line 16 Chs. N. of Cor. to Secs. 1, 2, 11 & 12, from which, S. 89° 53 W. on true Line between Secs. 2 & 11,	80,2
40,10	Set limestone 16 x 10 x 8 in., 10 in. deep, marked 1/4 on N. side, & raised mound of stone for 1/4 Sec. Cor.,	40,2
80,20	The Cor. to Secs. 2, 3, 10 & 11, Land rolling, rocky, Soil 2nd rate, Timber, Cedar & pine.	80,2

Salt Lake Meridian,

Chains,	North on a random line between Secs. 2 & 3, Var. 15° 30' E,
40,00	Set Limestone for Sec. Cor,
80,26	Intersect S. boundary of the W. ak the Cor. to Secs. 2 & 3 from which, South on true line between Secs 2 & 3.
40,26	Set Limestone 18 x 10 x 4in, 12 in. Bge, marked 4 on W. side, & mound stones for W. Sec. Cor.
80,26	The Cor. to Secs. 2, 3, 10 & 11, Land A. Rocky Soil 2nd rate, rocky Timber, cedar & pine, February 23rd 1897, J. G. Burrill,

Subdivision Plat of Sec 3 T2N

Chains, February 20th 1874.

By J. C. Sharp.

North Astron. Sec. 3 T. 2 N

Lat. 45°30' E.

Set Limestone monument 12 in. dia. marked 1/4 on N. side 7 inches mound stone for 1/4 Sec. Cor.

Set Limestone monument 12 in. 15 in. dia. marked 3 notches on E. & 1 on S. edges, mound stone for Cor to Secs. 2, 3, 33 & 34

Land rolling, rocky.

Soil Loam.

Timber, Cedar & Jack.

Land on south line Astron Sec. 2 & 3

Chains

Sharp

Sharp

Salt Lake Meridian

Chains.	Var. 15° 30' E.
37.00	Quartz Chains N. E.
0.50	Set Temporary ¼ Sec. Cor.
80.00	Intersect N. & S. line at the C. to Secs. 26, 27, 34 & 35, from which, West on true Line between Secs. 27 & 34
0.50	Set Limestone 16 x 16 x 4 in. 10 in. out, marked ¼ on N. side & raised mound of stones for ¼ Sec. Cor.
80.00	The Cor. to Secs. 27, 28, 33 & 34 Land rolling, Soil 2nd rate, Timber, Cedar & Pine.

North between Secs 27 & 28
Var. 15° 30' E.

Subdivision Dep. 23 S. R. 2 W.

Stones 40,00	Set Stone for 1/4 Sec. Cor. 10 ch. N. of the W. 1/4 Cor. Sec. 1, Twp. 24 S., R. 2 W., Ind., marked 1/4 on W. side, scribed mound of Stones, pits 1 ft. Cor.	Chains 39,99
Log 0,00	Set Stone for Sec. Cor. 18 in. diam., mark'd 3 sides on E., 2 on S., edges scribed mound of Stones for Cor. to Secs. 21, 22, 27 & 28 Land rolling, Soil 2nd rate, Timber, Cedar & pine.	79,99
	Course random line between Secs. 22 & 27, Cor. 15 & 30 E.	40,00
40,00 Stones 0,00	Set Stone for 1/4 Sec. Cor. Intersect A. & S. line 10 chs. S. of Cor. to Secs. 22, 23	80,00

Salt Lake Meridian.

Chains	26, 27 from iron ck, S, 8° 30' W, on true line between Secs 22 & 27,
39,99	Set Limestone 15x12x4 in, 12 in, deep, marked ¼ on N side, & raised mound of stones for ¼ Sec Cor,
79,98	The Cor to Secs 21, 22, 27 & 28 Land rolling rocky, So & E Pine & Timber, Cedar & Pine,
	North between Secs 21 & 22, Var, 15° 30' E,
40,00	Set Limestone 18x9x9 in, 12 in, deep, marked ¼ N & W, side & raised mound of stones for ¼ Sec Cor,
80,00	Set Limestone 20x16x8 in,

Subdivision N. 43 S. R. 3 W.

Mound X	15 in Circle, marking 3 notches on E, & 3 on S, ranges for N. & S. Secs, 15, 16, 21 & 22; Land rising, Soil Gravelly, Timber, Oak & Pine.	Chains 19,94
	Euclean random line between Secs, 15 & 22, Var, 15° 30' E.	40,00
39,00	Creek drains N. & W.	
40,00	Set temporary ¼ Sec. Cor.	
79,94	Intersect N. & S. line 35 lks, S. of Cor. to Secs, 21, 15, 22 & 23; from which,	40,11 80,00
	S. 89° 45' W. on true line. Between Secs, 15 & 22,	
39,94	set Limestone 16 x 10 x 8 in, 10 in, deep, marked ¼ sec	

BOOK-A-154

Duck Lake Meridian

Chains N. side, raised mound of stones for 1/4 Sec. Cor.

1949 The Cor. to Secs. 15, 16, 21 & 22, Sand rolling.

Std 2" iron, rocky.

Timber, cedar & pine.

North between Secs. 15 & 16.

Var. 15° 30' E.

40,00 Set limestone 16 x 10 x 4 in. 10 in. disp. marked 1/4 on W. side, raised mound of stones for 1/4 Sec. Cor.

40,40 Quick down N. W.

80,00 Set limestone 20 x 10 x 4 in. 15 in. disp. marked 3 Notches on E. & W. & S. edges, raised mound of stones for Cor. to Secs. 9, 10, 15 & 16.

Subdivision, T. 42 S., R. 13 W.

Lines	Land rolling. Soil Loam. Timber, Cedar & pine.	Between
	East on random line between Secs 10 & 15, Cor. 15° 30' E.	40,00
40,00	Set Limestone ¼ Sec. Cor.	
79,90	Intersect N. & S. line 16 Ch. S. of Cor. to Secs. 10, 11, 14 & 15, (from which S. 89° 53' W. on true line between Secs. 10 & 15, Set Limestone 16x16x8 in. 10 in. deep, marked ¼ on N. side & raised mound of stones for ¼ Sec. Cor.	80,00
39,95		
79,90	The Cor. to Secs. 9, 10, 15 & 16, Land rolling.	

Jack Lake Meridian

Chains	Soil 2nd rate — rocky, Timber, Cedar & Spruce
	North Column Secs. 9 & 10, Var. 15° 30' E,
1,00	Set Limestone 16 x 9 x 9 in, 10 in deep, marked 1/4 on 2d. side & raised mound of stones for 1/4 Sec. Cor.
8,00	Set Limestone 18 x 11 x 9 in, 12 in deep, marked 3 notches on E, & 5 on S. edges & raised mound of stones for Cor. to Secs. 3, 4, 9 & 10, Land gently N. slope, Soil 2nd rate, Timber, Cedar & Spruce.

Subdivision of Sec 3 T 4 S R 3 W

Chains	Course and distance	Chains
	Between Secs 3 & 10,	
	2 M, 15° 30' E,	
40,00	Set Sandstone 4 Secs Cor,	
23,00	Creek Brains N, W,	37,00
79,86	Intersect N & S, line 35	
	Chs, S, of the Cor, to Secs,	40,00
	2, 3, 10 & 11 from which,	2,00
	S, 89° 45' W, on true line	80,3
	between Secs, 3 & 10,	
39,93	Set Limestone 16 x 10 x 4 in,	
	10 in, deep, marked 1/4, on	
	N, side, raised mound of	40,3
	stones for 1/4 Sec, Cor,	
79,86	The cor, to Secs, 3, 4, 9 & 10,	
	Land Quite N, Slope,	
	Soil 2nd rate,	80,3
	Timber, Cedar & Pine,	

Book A-15 [illegible]

Salt Lake Meridian.

Chains.	
	North on random line between Secs. 3 & 4. Var. 15° 30' E.
	Second quality.
37.00	Set stone, mtr. pits bears N.E. - S.W.
40.00	Set temporary 1/4 Sec. Cor.
2.00	Land level, N.E. & S.W.
80.30	Intersect North boundary of Tp. 10 S., R. 1 E. of Cor. to Secs. 3 & 4 from which, S. 0° 4' E. on true line between Secs. 3 & 4
40.30	Set limestone 16x14x4 in., 11 in. deep, marked 1/4 on W. side, & raised mound of stones for 1/4 Sec. Cor.
80.30	The Cor. to Secs. 2, 3, 9 & 10. Land undulating, Soil 2nd rate, Timber cedar & pine on S. 1/2

(over)

Subdivision, Ts. 43 S. R. 3 W.

February 24th 1897,
J. C. Bailey,

Chains

February 24th 1897,
By J. G. Burich,
North Between Secs. 32 & 33,
Var. 15° 30' E,

5,00 Wash in Hollow drains N. W.

20,00 Wash in Hollow,

40,00 Set Limestone 14 x 10 x 6 in, 9 in. deep, marked 1/4 on W side, & raised mound of stones for 1/4 Sec. Cor. 40,00

65,00 Rocky Gulch drains N. W. & road to Lees Ferry bears N. W. & S. E. 80,00

80,00 Set Limestone 17 x 14 x 6 in 12 in. deep, marked 4 notches on E, & 1 on S. edges for Cor. 40,00

Chains

to Secs. 28, 29, 32 & 33 from which,
Spruce 5 in. dia. bears S. 40° E. 50 lks. dist. marked S. 33, T. 43 S. R. 3 W. B. E.
Land broken W. Slope,
Soil 2nd rate, rocky.
" Timber, Cedar & pine,

East on random line between Secs. 28 & 33, Var. 15° 30' E. agreed to
49,00 Set temporary 1/4 Sec. Cor.
80,00 Intersect N. & S. line at the Cor. to Secs. 27, 28, 33 & 34 from which,
Pk. on true line between Secs. 28 & 33.
40,00 Set limestone 16 x 10 x 6 in.

Subdivision of Sec. 3, T. R. 3 W.

Chains		Chains
	1 in. hole, marked ¼ on N. side, 1 mound of stones for ¼ Sec. Cor.	41,2
		69,0
		80,0
80,00	The Cor. to Secs. 28, 29, 32 & 33.	
	Low rolling & rocky,	
	Soil 2d Rate,	
	Timber, Cedar & Pine;	
	North Return Secs. 28 & 29,	
	Var. 15° 30' E,	
40,00	Set Sandstone 14 x 9 x 5 in 9 in. deep, marked ¼ on N. side, & raised mound of stones for ¼ Sec. Cor, from which,	
	A pine 12 in. dia. bears N. 40° E. 60 lks. dist marked ¼ S. B. T.	

Salt Lake Meridian.

Chains.	
41,25	Work in Hollow drains N.E.
69,00	Same " " " N.W.
80,05	Set Limestone 20×14×12 in, 15 in, Set, marked 4 notches on E, & 2 on S, edges & raised mound of stones for Cor, to Secs, 20, 21, 28, & 29, from which,

A cedar 4 in, dia, bears S, 30° W, 40 lks, dist, marked S, 29, T 4 S, R, 3 W, B.T.

A cedar 10 in, dia, bears S, 10° E, 30 lks, dist, marked S, 28 B.T.

Land broken & rocky,

Soil 2nd rate,

Timber, Cedar & Pine.

Subdivision of Sec. 4, T. 43 S., R. 3 W.

Chains		Chains
	East on random line between Secs. 21 & 28 Var. 15° 30' E.	40,00
40,00	Set temporary 1/4 Sec. Cor.,	
80,06	Intersect N. & S. line 10 Lks. S. of Cor. to Secs. 21, 22, 27 & 28 from which S. 89° 56' W. on true line between Secs. 21 & 28,	80,00
40,03	Set Limestone 18 x 10 x 6 in. 12 in. deep, marked 1/4 on N. side & raised mound of stones for 1/4 Sec. Cor.	
80,06	The Cor. to Secs. 20, 21, 28 & 29. Land rolling, Soil 2nd rate, rocky, Timber, Cedar & pine.	

Salt Lake Meridian

Chains.	
	North between Secs. 20 & 21, Var. 15° 30' E.
40,00	Set Limestone 15 x 10 x 5 in, 10 in. deep, marked 1/4 on W. side, & raised mound of stones for 1/4 Sec Cor.
80,00	Set Limestone 16 x 14 x 3 in, 10 in. deep, marked 4 Notches on E, & 3 on S. edges & raised mound of stones for Cor. to Secs. 16, 17, 20 & 21, from which, A cedar, 4 in. dia, bears S. 35° W, 32 lks. dish, marked S. 20, T. 4 S. R. 3 W. B.T. A cedar 5 in. dia, bears N. 5° E, 45 lks. dish, marked S. 16. B.T. Land rolling, rocky, Soil 2nd rate, Timber, Cedar & pine,

West

Mound

1/4

1877

"

Subdivisions, T. 43 S., R. 9 W.

Chains	East, on random line between Secs. 16 & 21, Var. 15° 30' E.	Chains. 40,00
40,00	Set temporary ¼ Sec. Cor.	
80,06	Intersect N. & S. line at the Cor. to Secs. ~~21, 22, 27 & 28,~~ 15, 16, 21 & 22	
	from which, West, on true line between Secs. 16 & 21,	
40,03	Set Limestone 16 x 9 x 9 in. 10 in. deep, marked ¼ on N. side for ¼ Sec. Cor.	80,00
80,06	The cor. to Secs. 16, 17, 20 & 21	
	Land rolling & rocky,	
	Soil 2nd rate,	
	Timber, Cedar & Pine,	

North between Secs. 16 & 17
Var. 15° 30' E.

Salt Lake Meridian

57

Sasses, 40,00	On small Sandstone Knoll Set Limestone 12×12×12 in, 8 in, deep, marked 1/4 on W, side, & raised mound of stones for 1/4 Sec, Cor, from which,	
	A cedar 10 in, dia, bears S, 11° E 27 lks, dist,	Pivot
	A cedar 8 in dia, bears N, 30° W, 18 lks, dist,	
	Both marked 1/4 S. B.T.	
80,00	Set Limestone 18×9×6 in, 12 in deep, marked 4 notches, on E & W edges, & raised mound of stones for Cor, to Secs, 8, 9, 16 & 17, from which,	Knoll 1876
	A cedar 8 in, dia, bears S, 85° W, 28 lks, dist, marked S, 1/4, T. 1 S. R. 3 W. B.T.	" 1877 "
	A cedar 4 in, dia, bears . .	

Subdivision: N. 45, S. E. ¼ N.

6 chains.	N. 30° W. 15 lks. dist. marked S. 8 B.T. Land Gentle N. Slope, Soil 2nd rate, no rock, Timber, cedar & pine,	Chains 80,10
	East on random line Returns Secs. 9 & 16, Var. 15° 30' E.	
40,00	Set temporary ¼ Sec. Cor.	40,00
50,00	Gulch drains N. W.	
80,10	Intersect N. & S. line 35 lks. S. of Cor. to Secs. 9, 10, 15 & 16, from which, S. 89° 45' W. on true line between Secs. 9 & 16,	
40,05	Set Limestone 16 x 11 x 6 in. 11 in. deep, marked ¼ S. on N. side, & raised mound	51,50

Salt Lake Meridian. 59

Chains	
80,10	of stones for 1/4 Sec. Cor. The Cor. to Secs. 8. 9. 16, & 17. Land rolling. Soil 2nd rate. Timber, Cedar & pine,
	North between Secs. 8 & 9. Var. 15° 30' E. Descend gently,
40,00	Enter flat bears N.E. & S.W. Sch. Limestone 16 x 13 x 6 in., 11 in. deep, marked 1/4 on W. side, & raised mound of earth from 4 pits each 24 x 12 x 12 in., for 1/4 Sec. Cor. from which, Cedar 12 in. dia. bears S. 40° E. 164 lks. dish. marked 1/4 S. B. T.
51,50	Road (County) to Paria,

Mrd

Burnt

1876

1877

"

Subdivisions, T. 43 S., R. 3 W.

Chains,	Bears N.E. & S.W.	Chains
80,00	Set Flat Limestone 20 x 15 x 2 in., 15 in. deep, marked 4 Notches on E. & 5 on S. edges, & raised mound of earth from 4 pits, each 24 x 12 x 12 in., Cor. com. to Secs. 4, 5, 8 & 9.	40,00
	Land rolling,	
	Soil Private,	
	Timber, Cedar & Pine, Scattering.	80,18
	Mollis nipple bears N. 21° E.,	
	East on random line between Secs. 4 & 9, Var. 15° 30' E.,	
25,00	Road bears N.E. & S.W.	
40,00	Set temporary 1/4 Sec. Cor.,	
80,00	Bears flat & enter timber,	40,00

Salt Lake Meridian 61

Chains	
	Bears N.E. & S.W.
80,13	Intersect N. & S. line, 35 lks,
	S. 1/4 Cor. to Secs. 3, 4, 9 & 10,
	from which,
	S. 89° 45' W. on true line
	between Secs. 4 & 9,
40,00	Set Limestone 16 x 12 x 8 ins, 11
	ins, dep, marked 1/4 on N. side
	raised mound of stones for
	1/4 Sec. Cor.
80,18	The Cor. to Secs. 4, 5, 8 & 9.
	Land undulating,
	Soil 2nd rate,
	Timber, Cedar on E. 30 lks,

North, on random line
between Secs. 4 & 5,
Var. 15° 30' E.

40,00	Set temporary 1/4 Sec. Cor.

62

Subdivisions T. 23 S. R. 32 E.

Chains		Chains
80,40.	Intersect North boundary	
	of T., 20 lks. W. of Cor. to	
	Secs. 4 & 5, from which,	
	S. 0.9 W. on true line	
	between Secs. 4 & 5,	17,50
4040	Set Chamfered Cedar post	27,20
	18 x 4 x 4 in., 12 in. dep., &	29,80
	marked 1/4 S. on W. side	41,00
	& raised mound of earth	
	from 4 pits each 24 x 12 x 12	
	in., for 1/4 Sec. Cor.,	
80,40	The Cor. to Secs. 4, 5, 8, & 9,	
	Said line in Sand & Soil over	
	Rolling,	50,50
	Stony & Rocky	66,40
	Land,	80,00

[redacted]

Salt Lake 2d Meridian. 93

Chains, February 26th 1894,

By D.C. Bailey,

North Latitude Secs, 31 & 32

Var, 15° 30' E,

17,80 Gulch drain N. 2 L, Ledge on N. side,

27,20 " " W,

29,80 " " S, 2 L,

40,00 Set Limestone 18 x 8 x 6, in, 12 in, deep, marked 1/4 on W side & raised mound of stones for 1/4 Sec, Cor, from which,

Ash 8 in, dia, bears S, 45° E, 6 lks, dist, marked 1/4 S. B. L,

50,50 Gulch drains S, 2 W,

66,50 " " 2 W,

80,00 Set Limestone 20 x 10 x 10 in, 15 in, deep, marked 5 notches on E, & 1 on S, edges for Cor, to Secs, 29, 30, 31 & 32,

Land broken, W slope,

Plat

Patent

876

1877

"

Subdivisions T. 2 S., R. 3 W.

Trees	Soil 2nd rate, rocky,	
	Timber, Cedar & pine,	
	East on random line	
	between Secs. 29 & 32,	
	Var. 15° 30' E.	
40,00	Set temporary 1/4 Sec. Cor.	
76,50	Road to Lee's farm bears	
	N. & S. in Gulch draws N. 2 W.	
50,00	Intersect N. & S. line at	5,00
	the Cor. to Secs. 28, 29, 32 & 33,	
	from which,	40,00
	Pine on true line	50,20
	between Secs. 29 & 32,	
40,00	Set Sandstone 15 x 10 x 5 in.,	
	10 in. deep, marked 1/4 on N.	
	side & raised mound of	
	stones for 1/4 Sec. Cor.	40,20
80,00	The cor. to Secs. 29, 30, 31 & 32.	

BOOK-A-154

Salt Lake Meridian

Land Dl. Notes,
Soil 2nd rate,
Timber, Cedar pine & Juniper,
Feby 26th 1877. T.G. Bailey

February 26th 1877.
By J.G. Burrill,
Went on random line
. Between Secs, 30, & 31,
bet., 15° 30' E

5,00 Took offsets every N.E. - 5. 00
& enter Sd N.

40,00 Set temporary Cor Sec Cor,

80,20 Intersect Dl, boundary of the
Dl, 20 lks. N. of the Cor. to Secs,
30 & 31. from which,
N, 89° 51, E, on true line
Between Secs, 30 & 31,

40,20 Set Standard cedar stake 48 x
4 x 4 in, 12 in, deep, marked

	Rec. on W. side, raised mound of earth from 4 pits, each 2d × 12 × 12 in. for ¼ Sec. Cor.	Chain, Sec.
80,20	The Cor. to Secs. 29, 30, 31 & 32 Land nearly level. Soil 1st rate. Timber, Scattering Cedar.	
	February 26th 1894, By T. C. Bailey, North Returns Secs. 29 & 30, Var. 15° 30' E.	
	Descend,	
15,00	Post of stone bears N.E., S.W. & Cedar Blaze	
1,00	Set Limestone 12 × 9 × 6 in. Sandst. marked ¼ on W. side, raised mound of stone	

BUUK-A-154

Chain
Sec 0

Cor to Sec Cor
Set chiseled cedar post 4 ins square
mound 12 ins high, marked B C
C 1 E on S. edges, & pencil mounds
& earth from 12 pits each 24 ins
12 ins deep on Cor, & Secs 19, 20,
29, & 30, from which
A Rock pine 10 ins dia, bears
S. 12 E. 125 lks, dist marked
S. 29, B. 113 S. R. 3 W. B.T.
A cedar 7 ins dia, bears S. 56 E.
104 lks dist, marked S. 19, B.T.
Land undulating
soil 1st rate,
Timber a few cedars,

Cor common to sundry lots
Between Secs 29 & 30
Bet. 19 & 30 E.

Sundries, Sh. 45 L. R. 3 Pt.

[illegible]	Cleared,	
1 Apr	Pay'd Quarter Rent due Lady Day last,	
27, 5d	Paving Rates,	
29, 6d	Land Tax & Poor Rates for Lees part Town & W. & S. E.	
1 Apr	Sch. Embezzlement Sec Cer,	24, 2d
5 Apr	Interest Rec'd & Lim ak the Cer & Sec, 20, 21, 28 & 29,	11, 6d X drawn 11, 12 42. 00
	from which,	48 7d
	Work in Lime Line,	65, 5d.
	Interest Sec, 20 & 29,	79, 9d
11 Apr	Sch Embezzlement 18 & 19 Vict 72 in Action, marked Y and title, varied second extract for Y Lee, Cer, from which,	
	10 pine Swedish Leaves S. & W. Sacks, dish, marked Y & L, B/L	39, 9d
5 Apr	Interest Rec'd Sec, 19, 20, 29, & 30, Land railway stocks,	

BOOK-A-154

Jack Lake Meridian.

Set Posts,
Scribe, Chain & Pits.

February 26th 1877, B.J.G. Davis.
Post on random line between Secs. 19 & 30
Dec. 15° 30' E.

24.20	Road to Lac Seul bears N.E. 1/4
40.00	Set Temporary Post Mon. Cor.
19.75	Hard Maple dr. S.E.
11.00	Spruce dr. bears S.E., N.W., at head of marsh drs. S.
48.70	" " " N.E. & S.W.
38.50	Black Ash dr. S.
79.90	Intersect West boundary of Tp. at the Cor. to Secs. 19 & 30, from which, East on base line between Secs. 19 & 30,
39.90	Set Limestone 18 x 10 x 5 ins. 10 ins. deep, marked M.C. on E. side for the Mon. Cor. & raised mound of earth from 4 pits, each 2 x 2 x 1/2 in. pos

Post
Birch 3 676
Birch 3 677
"

Specimen Sheet I. K. 3 24.

[illegible]	Sec 20,
19,00	T 19 N R 20 E 3rd M
	Eaton county seat,
	Mich Whole,
	Timber, a few cedars & pines

January 20th 1874,
By J. C. Bailey,
Mich Meridian Sec 19 T 20
Lon 13° 30' E,

5,25	Road to Lac Vieux Desert begins E. & N.
1,00	16 Inch Round cedar post, 4 ft
	4 x 4 in, 12 in, Maple, mortised
	Iron Pin, side, & raised mound
	& Earth from 4 Ditches each
	4 ft x 12 x 12 in, for 1/4 Sec, Cor,
11,50	County road bears N.E. & S.W.
	6 Pine & 6 Juniper Trees.
5,00	16 Inch Round cedar post 4 ft

	13,20
	2,00
	1,00
	80,00

BOOK A-134

Jack Lake & Meadow

4 × 4 in. 12 in. thick, notched 5 on
E. & Sec. 9, Edges, mound
& earth from 4 pits, each 2 ft × 12
ft. 12 in. per Cor. to Secs. 17, 18, 19 & 20,
Line nearly level,
Soil Sandy,
Timber, Cedar & Spruce,

Prot

Easton random Line
Between Secs. 17 & 20,
Lat. 15° 30' E.

Surveyed
1876

13,20	Road Years & L. E. & S. W.
2,00	Opened,
11,00	Top of Hahan Years & L. E. & S. W.
	Set temporary 1/4 Sec. Cor.
80,00	Intersected L. S. Line at the
	Cor. to Secs. 16, 17, 20 & 21,
	from which,

1877
"

Post on Same line Between

Valentine's A, 45 St. 2 Pl.

	Sec. 17, T. 20.	Chains.
Sept.	Sch. Valentine 11x12x3 in.	Sept.
	10 in. disk, smoked Glass	Sept.
	Index, revised Course of	39.46
	Lines for the Sec. Compass	
	adjm.	
	At point 11 in. dia. brass Sun	
	Pl. 12 Ecks, disk, marked W	31.76
	S. B. P.	
Sept.	Sch. Cor. to Sec. 17, 18, 19, 20,	
	Land Pl. 2 Ecks, bent,	
	Soil Pl. dia. bent, broken	
	Sect 2 Pl. 6	
	Timber, Cedar 1 pin.	
		79.96

February 26th 1874.

By. J. G. Parrish C.

Westm Meridian Ore

Colman Sect. 17, 19.

BOOK-A-104

Sixth Principal Meridian.

Chains.

Var. 15° 30' E.

Enter [illegible] bears N. & S.

Set [illegible] to Sec. Cor.

Subscock N. bearing E. 1/2 [illegible]

of Cor. to Sec. 18 & 19 (from which

East on true line

between Secs. 18 & 19,

34.76 Set Stone, cedar post, 30 x 10 x 16

12 inches, marked 1/4 S. on E.

side, mound of earth

from 11 pits, 2 x 2 x 12 in.

for 1/4 Sec. Cor. and from

Aspen 14 inches diam. N. 10° E.

10 links dist. marked 1/4 S. B.A.

79.96 The cor. to Secs. 17, 18, 19 & 20,

Large Gentile mound

Set 6 Pits,

Timber, Cedar & Spruce on 4 Courses.

1807

1877

Subdivision, Tp. 11 S. R. 7 E.

Chains.	Distance 26 lks to a pine	Chains
	Tp. N.W. Corner,	
	North Eleven Sec 19 & 20,	
	7 on, 15 links E.	
40,00	Set Charcoal Cedar post	
	18 x 4 x 2 in, 12 in. theft, marked	
	1/4 S. on N. side, 7 mounds	
	mound opposite from 4 pits	40,00
	each 24 x 12 x 12 in, for 1/4 Sec.	47,00
	Cor,	60,74
80,30	Set Charcoal Cedar post	80,30
	18 x 4 x 2 in, 12 in theft, bevelled	
	7 on E. & W. sides, edges raised	
	mound opposite from 4 pits	
	each 24 x 12 x 12 in. for Cor, to	40,15
	Sec, 1/4 S, 19 & 13, from which	
	6 Cedar 12 in. dia. bears S.	80,30
	80° W. 11 lks, dist, marked	
	S. 13. T 11 S. R. 3 W. B.T.	
	Land Cor,	

BOOK-A-154

Salt Lake Meridian

Chains	Dec. Points,
	Timber, Cedar — Scattering.
	Cedar section line
	between Secs. 5 & 17,
	Run, 15° 30' E, (Mag.
40,00	Sandstone ledge bears,
47,00	Road bears N.E., & N.W.
60,00	Cedar cedar knoll, bears N.E., & S.W.,
80,30	Intersects N. Side, 35 lks. Offset, to Sec.
	S. 4, 16, 17, from which, (Surveyed.
	S.89° E. Ten inches Alders. 1876
	Secs. 5 & 17,
40,15	Set Sandstone 16 ins. x 12 ins. deep, marked
	1/4 Sec. N. side, Scribed mound of stones for 1/4 Sec. Cor.
80,30	Thence, to Secs. 4, 5, 16, & 17, 1877
	Land undulating,
	Soil 1st rate,
	Timber Scattering cedar & pine.

Chains		Chains
	February 28th 1894.	
	By J. A. Durrie &	
	Wm. Lee Surveyor Gen'l.	
	Office of Surveyor Gen'l,	
	Nov. 15th 1893.	40,00
20,00	Subdivisional lines,	
29,50	Meander Meridian on W. side	
	the Cor. to Secs. 7 & 18, from which,	
	Cedar in Cor. bears Orient	57,00
	Secs. 7 & 18,	63,00
39,50	Set Planted cedar post,	80,00
	12 in. deep, marked S. S. on sides,	
	mound of earth from 4 pits	
	each 24 x 12 x 12 in. pr. to Secs. &c.,	
40,50	The cor. to Secs. 7, 8, 17 & 18,	
	Land Level,	
	Soil 1st rate,	
	Timber, Scattering Cedar,	

DOOR-A-154

Duck Lake Woollen Mills

Chains, February 26th 1874.

By J. C. Bailey

Duck Lake Sec 7 T S.

Run N 30° E.

40,00 Set planted cedar posts 8 x 8 in 12 in deep, marked 40 on S. side, and 1 mound op earth one in feet, each 8 ft 1820

x 2 x 12 inches 1/4 S.C. C.S.

57,00 Duck Creek N.E.

63,00 " " S.E.

80,00 Set Gypsum 19 x 18 x 4 in, 12 in deep, ~~marked~~ marked 5 inches on E. & 5 on S. edges & raised mound of Gypsum for each Sec. 5.6.7.8 from which, Cedar 12 in dia. bears S. 10° W. 35 lks. dist. marked S.6. S. 43 E. 50 lks. B.T. Cedar 8 in dia. bears S. 10° E. 32 lks. dist. marked S.S. B.T. Land level. Soil Sandy. Timber, Poplar, cedar & ...

1820

876

877

"

Subdivision, Th. 43 N. R. 3 W.

Chains	Eastings and Northings	Chains
	Cedar Lake, 5 1/2,	
	Dec. 15° 30' E.	
11,00	Set Sandstone Mon. Cor.,	
75,00	South edge of small Knoll,	40,
50,00	Witness Pit 2 links West, 18 in. deep,	50,30
	Cor. to Secs. 4, 5, 8 & 9, run South,	
	S. 89° 30' W. between	
	Secs. 5 & 8,	
40,30	Set Stone and cedar post 4 x 4 x 30 in.	40,30
	12 in. deep, marked 1/4 S. on E. side	
	7 raised mounds of earth from 2 pits	
	each 2d x 12 x 12 in. 4 pos. to Sec. Cor.	
	from which,	
	A cedar 16 in. dia., bears S. 30° E. 110	50,30
	lks. dist., marked 1/4 S. B. T.	
50,00	The Cor. to Secs 5, 6, 7 & 8,	
	Land level,	
	Soil Pt. rate,	
	Timber, red cedars,	

BOOK-A-154

Jack Lake's Meridian 79

Chains	Feb'y 26, 1877, By J. G. Darnell, West on random line between Secs, 6 & 7, Var, 15° 30' E,
40,	Set temporary ¼ Sec, Cor,
80	Intersect N. boundary of Tp, 31 Rs, W, ¼ Cor, to Secs, 6 & 7, from which, S, 89° 47' E, on true line between Secs, 6 & 7,
40,30	Set chiseled Cedar post 4"x4"x4" in, 12 in, deep, marked ¼ Sec, N. side mound of earth from 4 pits each 2'x4'x12 in, pr ¼ Sec, Cor, from which, Pine 8 in, dia, bears N. 45° W. 45 lks, dist, marked ¼ S, B, T,
80,30	The Cor to Secs, 5, 6, 7 & 8, Land level, Soil Sandy, Timber, Scattering Cedar,

Feby 26th 1877, By J. G. Darnell
W. on random line between

Subdivisions, T. 43 S., R. 3 W.

Chains	Secs. 5 & 6,
	Var. 15° 30' E.
10,00	Offsets to ledges, E. & W.
26,50	Rock chains N. E.
40,00	Set temporary 1/4 Sec. Cor.
41,20	Rock chains E.
49,50	" " "
67,20	" " N. E.
80,00	Intersect N. Boundary of T., at the Cor. to Secs. 5 & 6, from which, South chains line between Secs. 5 & 6,
[illegible]	Set charred cedar post 4 x 4 x 4 in., 12 inches marked 1/4 Sec. N., side & mound mound of earth from 4 pits each 2 x 12 x 12 in., for 1/4 Sec. Cor. from which, A cedar 10 in. dia., bears N. 85° W. 13 lks. dist., marked 1/4 S. B. T.
80,00	The cor. to Secs. 5, 6, 7 & 8, Found mostly buried.

BOOK A-134

Salt Lake Meridian

81

Soil Plants,

Timber, Scattering Cedar & Pine,

Feby. 26th 1877. T. C. Bailey

General Description,

The lands in this township embrace a portion of the North fork of the Timpanogos portion of the Buckskin Mountain & a portion of Kimball Valley, on the North. They Return the following as Gypsum lands, Viz: The W½ Sec. 5, [illegible] Sec. 8, W½ W½ of Sec. 18, the N.W¼ of N.W¼ of Sec. 3. The balance Returned as agricultural.

T. C. Bailey.

U. S. Deputy Surveyor.

Plateau

Prot

Survr

1876

1877

S2

BOO
15

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Subdivisions and South, East & North boundaries of Township No. 43 S Range No. 3 W. Executed by Bailey & Burrill Under joint contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

32

BOOK-A-154

15th Examined by C. H. Cranwell, C. C.

Field Notes

of

The Survey of the

East & North Boundaries

of

Township 13 S. Range 4 West

of

the Salt Lake Meridian,

Utah Territory,

By

J. G. Burrill.

Under Joint Contract of Bailey & Burrill,

No. 73 dated Sept. 11th 1876.

Survey commenced Feby 17th 1877.

" Completed Feby 17th 1877.

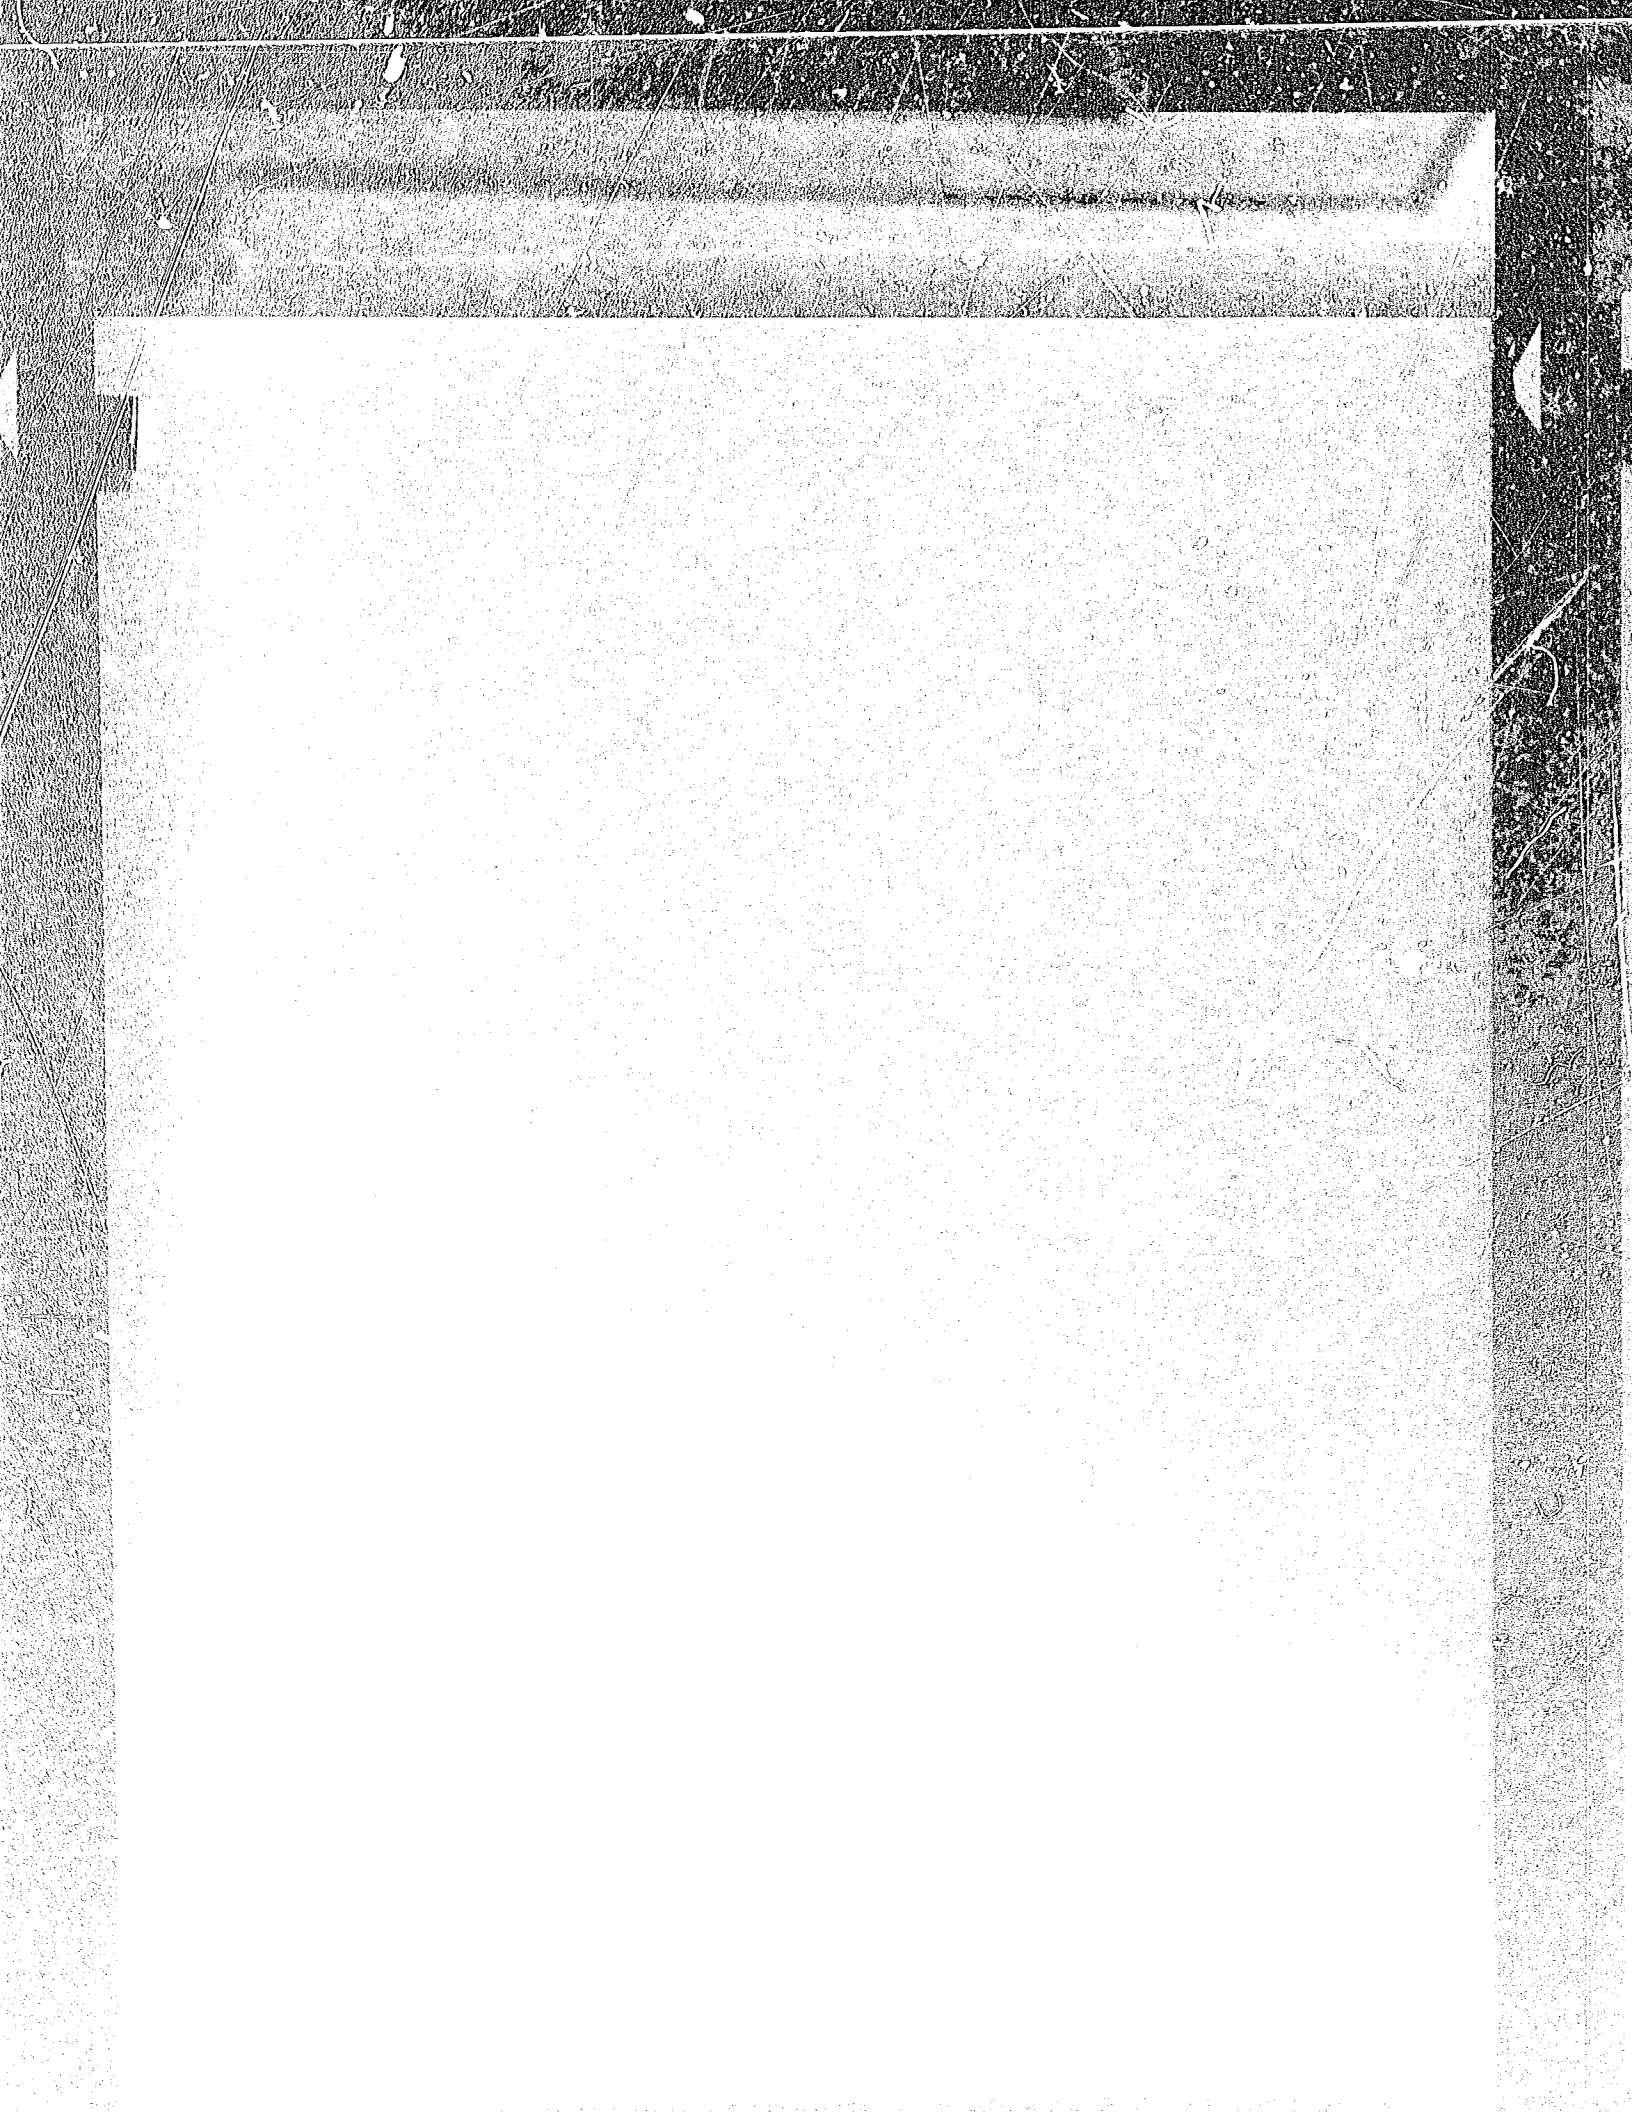

BOOK-A-154

Salt Lake Meridian. 85

Grants, Same commenced February 14th, 1877, by J. G. Burrill, Same the established Cor. to Tps. 4 S. & 1 N. South, Ranges 3 & 4 West, Same, North between Secs. 31 & 36 ~~1 & 6~~, Var. 15° 30' E. Mrst

39,00 Chas. 6,

40,00 Set Limestone 14×10×Sun 10 in, dug, marked ¼ on W. side Stoned mound of stones for ¼ Sec. Cor. from which, Ajnio 15 in. dia. bears S. 15° W. 96 lks. dist. Ajnio 14 in. dia. bears N. 65° W. 32 lks. dist. Both trees marked ¼ S. B. T. Burrill 1877 "

1/5,00 Ridge bears E. & W.

5 1,00 Runnie Drains W.

5 5,00 Ridge bears E. & W.

BOOK-A-154

Township 43 South **R.** 4 West

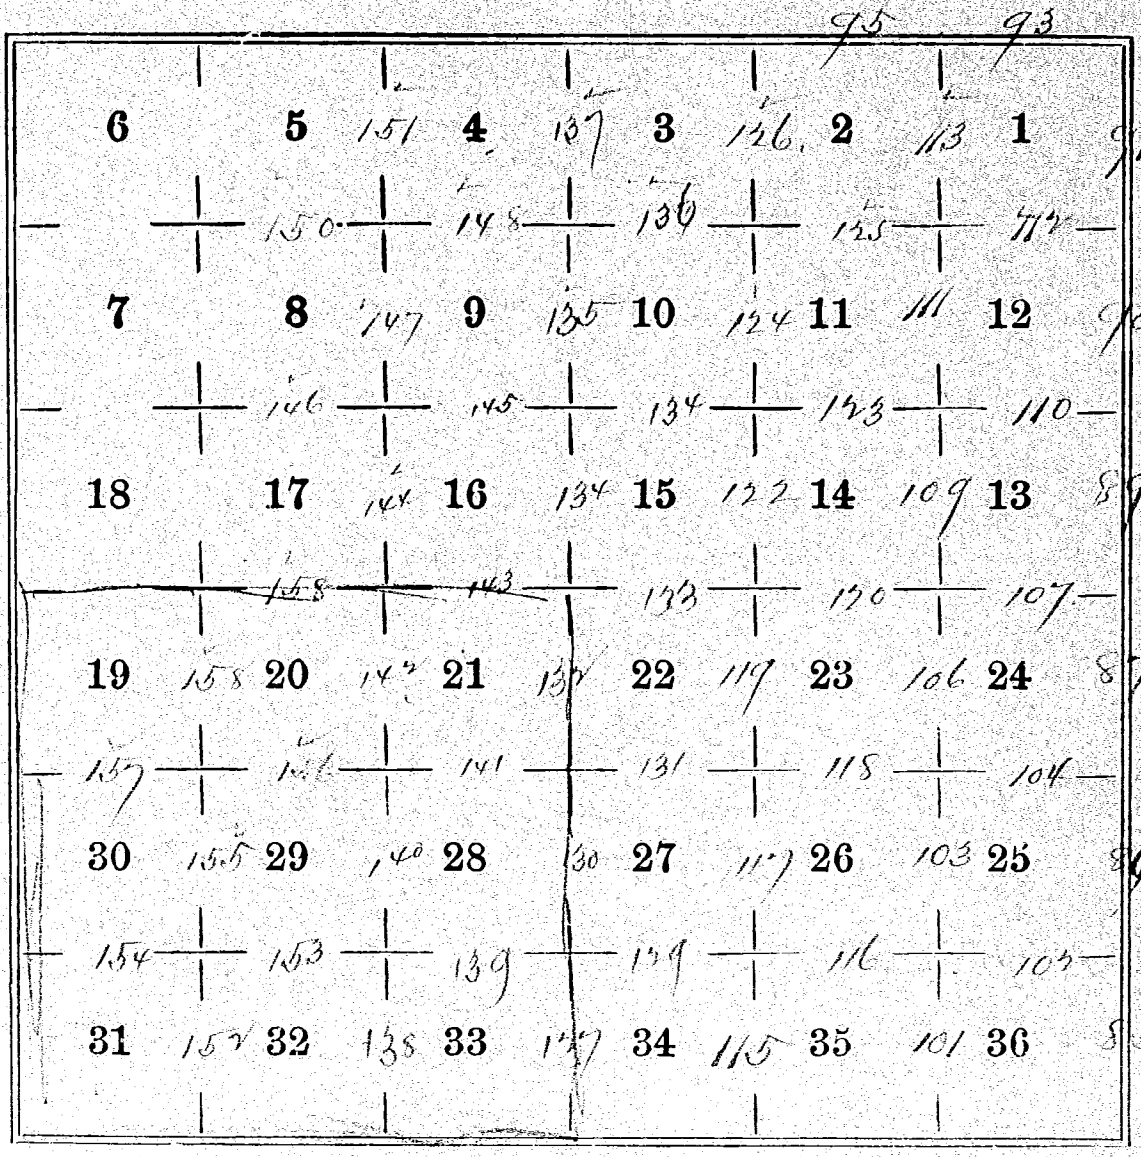

East Boundary Th. 4 S. R. 4 W.

Stones		Stones
$0,00	Set Limestone 14×14×6 in,	
	10 in. deep, notched 3 on N. &	
	1 on S. edges, & raised	65.60
	mound of stones for Cor. Sec.	$0,00
	Secs. 25, 30, 31 & 36, from which	
	Aspen 5 in. dia. bears S. 60°	
	E. 120 lks. dish marked	
	S. 31, T. 4 S. R. 3 W. B. T.	
	Sand rolling,	
	Soil Loam,	
	Timber, Cedar & Spruce,	
	North between Secs. 25 & 30,	
	Var. 15° 30' E.	
4,00	Hack Brass W.	
25,00	" " "	
4,00	Set limestone 12×12×10 in,	
	5 in. deep, marked ¼ on W.	
	side, & raised mound of	$5.0

BOOK-A-154

Salt Lake Meridian

Chains

Earth from 4 pits each, 2x x 12 x 12 in, for 1/4 Sec. Cor.

65.60 Road to Sec. Line N. E. & S. W.

80.00 Set Charred Cedar Post, 48 x 4 x 4 in, 12 in. deep, notched 4 Grs N. & 2 on S. edges, raised mound of earth from 4 pits each, 2 x 12 x 12 in, for Cor. to Secs. 19, 24, 25 & 30, from which, A Pine 18 in. dia. bears N. 89° E 120 links distant. Ex. Cor. Sec. 19, T 4 S, R. 3 W, S. L.

Land rolling

Soil Private,

Timber, Cedar & Pine,

North between Secs. 19 & 24.

Var. 15° 30' E.

85.00 Wagon track bears S. 60° W.

Cash Purchases Th. 113 S. C. & W.

Granite		Granite
32,20	Kinawah Granite S. W.	
1,00	Reported Granite Quarries, one marked with a Cross & Pointed monument of Granite from 4 pits, each 24×12×12 in. for 1/2 Lee, Con from which, Cedar 10 in. dia. trees S. 51° E. 117 lks, dist. marked	10,75
	Pin S. P. I.	40,00
50,00	Hark Granite S. W.	
30,00	Set Limestone 18×12×3 in. 12 in. dist., marked 3 points on N. & S. edges, Pointed monument of earth from 4 pits, each 24×12×12 in. for Cor. to Secs. 13, 18, 19 & 24, from which Osprie Dimidia, trees S. 84° W. 105 lks, dist. marked S. 24, P. 11 & S. R. & W. S. P.	

Grants | Land in Utah, Salt Lake, Cedar Spgs,

North Latitude Sec 13 T 1 S,
West Long 15° 30' E,

10,75 / 40,00 Rock mark, brass S.13. Witness stone one marked with a cross (X) Set 20 stone 24 x 12 x 18 in, Rock, marked ¼ on N. side, Buried mound of earth & stone 12 ins, each 24 x 12 x 12 ins, for ¼ Sec. Cor, from which, Aspen 12 ins dia, bears N. 5° W. 40 lks, Pine marked ¼ S. B. T.

Surv. 876

1877

East boundary 24.43 L. R.W. N.

Chains

$1.00 Set Chained Cedar Stake
4 S & 4 E 4 in. 12 in. deep,
noted 2 on N, 1 on S,
1 E, 1 mound
of earth from a pit each
24 L & 12 L in. for Cor to Secs.
11 & 12, 13 & 18; from which,
Cedar 8 in. dia. bears
S. 50° E. 24 links, distant
1 L. 18, 4 L. 43 L. R. 31 L. 15 L.
Land undulating,
Soil Private,
Timber, Cedar & Pine,

$4.00

North between Secs. 11 & 12
Var. 15° 30' E.
$1.00 Set Chained Cedar Post
1 S & 6 E & 6 in. 12 in. deep,
marked 11/12 S on W. side,

BOOK-A-154

Chains

Transcribed round of Deck
from pile deck 3 x 12
x 12 in, for 1/4 Sec, Cir,
Set chain & cedar pins
to 3 x 3 x 12 in, deck, 1 on
N, & S on E, Edges for Cir, to
Secs, 1, 6, 7 & 12,
Land undulating,
Soil 2nd rate,
Timber, pine & Cedar,

Not

Land

96

1877

"

North Column Secs, 1 & 6,
Var, 15° 30' E,

44,000 Set Sawed cedar posts, 48 x
4 x 4 in, 12 in, deck, marked
1/4 Sec, on E & S sides, & round
mound of earth from 4
pits, each 2 x 12 x 12 in, for
1/4 Sec, Cor, from which,

E. & b. bdy. Sec. 43 T. 11 S. R. 4 W.

A cedar 3 in. dia. bears
S. 35 lks. dist. marked "B.
T. B.T."

43,00 Low ridge bears E. 11 L.

53,50 Mark (mound E.

50,00 Set Sandstone 12 x 10 x 18 in.
9 in. deep, notched to mon.
N. S. E. & W. edges, mound
mound of earth from 4 pits,
each 2½ x 1½ x ½ in. for Cor. to
Secs. 42 & 43 T. 11 S. R. 3 & 4 W.
from which,

A cedar 6 in. dia. bears
S. 31° E. 60 lks. dist. marked
T. 6. T. 43 S. R. 3 W. B.T.

A cedar 4 in. dia. bears 35,00
S. 30° W. 50 lks. dist. marked 44,00
B. T. T. 43 S. R. 4 W. B.T.

A cedar 7 in. dia. bears N.
N. 40° W. 49 lks. dist. marked

Salt Lake Meridian

S. 36. T. 2 S., R. 4 W., B.M.,
A cedar 18 in. dia., bears N. 60° E.,
2 links, bit, marked S. 31 T. 42
S. R. 3 W., B.M.

Land, nearly level,
Soil Pinate,
Timber, scattering cedars,

The cor. to Sps. 4 2 0 4 3 S. 66, 4
& 4½ W. not being established
I run,

Vert on true line
between Secs. 1 & 36,
Dec. 15° 30' E.,

55, 00 Recorded,
44, 00 Set Stone & cedar post,
4 S x 4 x 4 in., 12 in. dug, marked
¼ S. on N. side, & mound
of earth from pit

each, 2" x 12" x 12' m. for 1/4 Sec. Cor. from which
A cedar 10 in. dia. bears
S. 45 E. dist marked
T. 42 S. R. 4 W. B.T.

48,00 Lava flat, outer cedar stake
78,50 Road bears N.E. & S.W. 41,00
80,00 Set Stone & cedar post,
18 x 4 x 4 in, 12 in. deep notched
1 on E., 5 on W. edges, &
mound of earth
from 4 pits, each, 2" x 12 x 12
in, for Cor. to Secs. 1, 2, 35 & 36,
from which,
A cedar, 12 in. dia. bears
N. 10° W. 65 lks. dist, marked S. 35.
T. 42 S. R. 4 W. B.T.
Land W. & level, level
1st rate, E. & undulating
level 2nd rate,

BOOK A-134 76

Salt Lake Meridian.

Timber, Cedar,

Meas. on base line
Between Secs. 2 & 35,
Var. 15° 30' E,

44.00 Post of fractional point, Set
Stone, Cors. 12 & 5 & 5 m. 8 inch
Cliff, marked 1/4 on W. side.
Ground mound & stone for
W. Sec. Cor.
Land, Level
Soil 1st rate,
Timber, Scattering Cedars,
Note, On account of the
Mountains I abandon this
Sur.
Feby. 19th 1894.
J.G. Burrill.

Burrill
1876

1877

(over)

96 BOOK-A-154

Note; For General
Description & approval
see end of Subdivision
Note of This Township

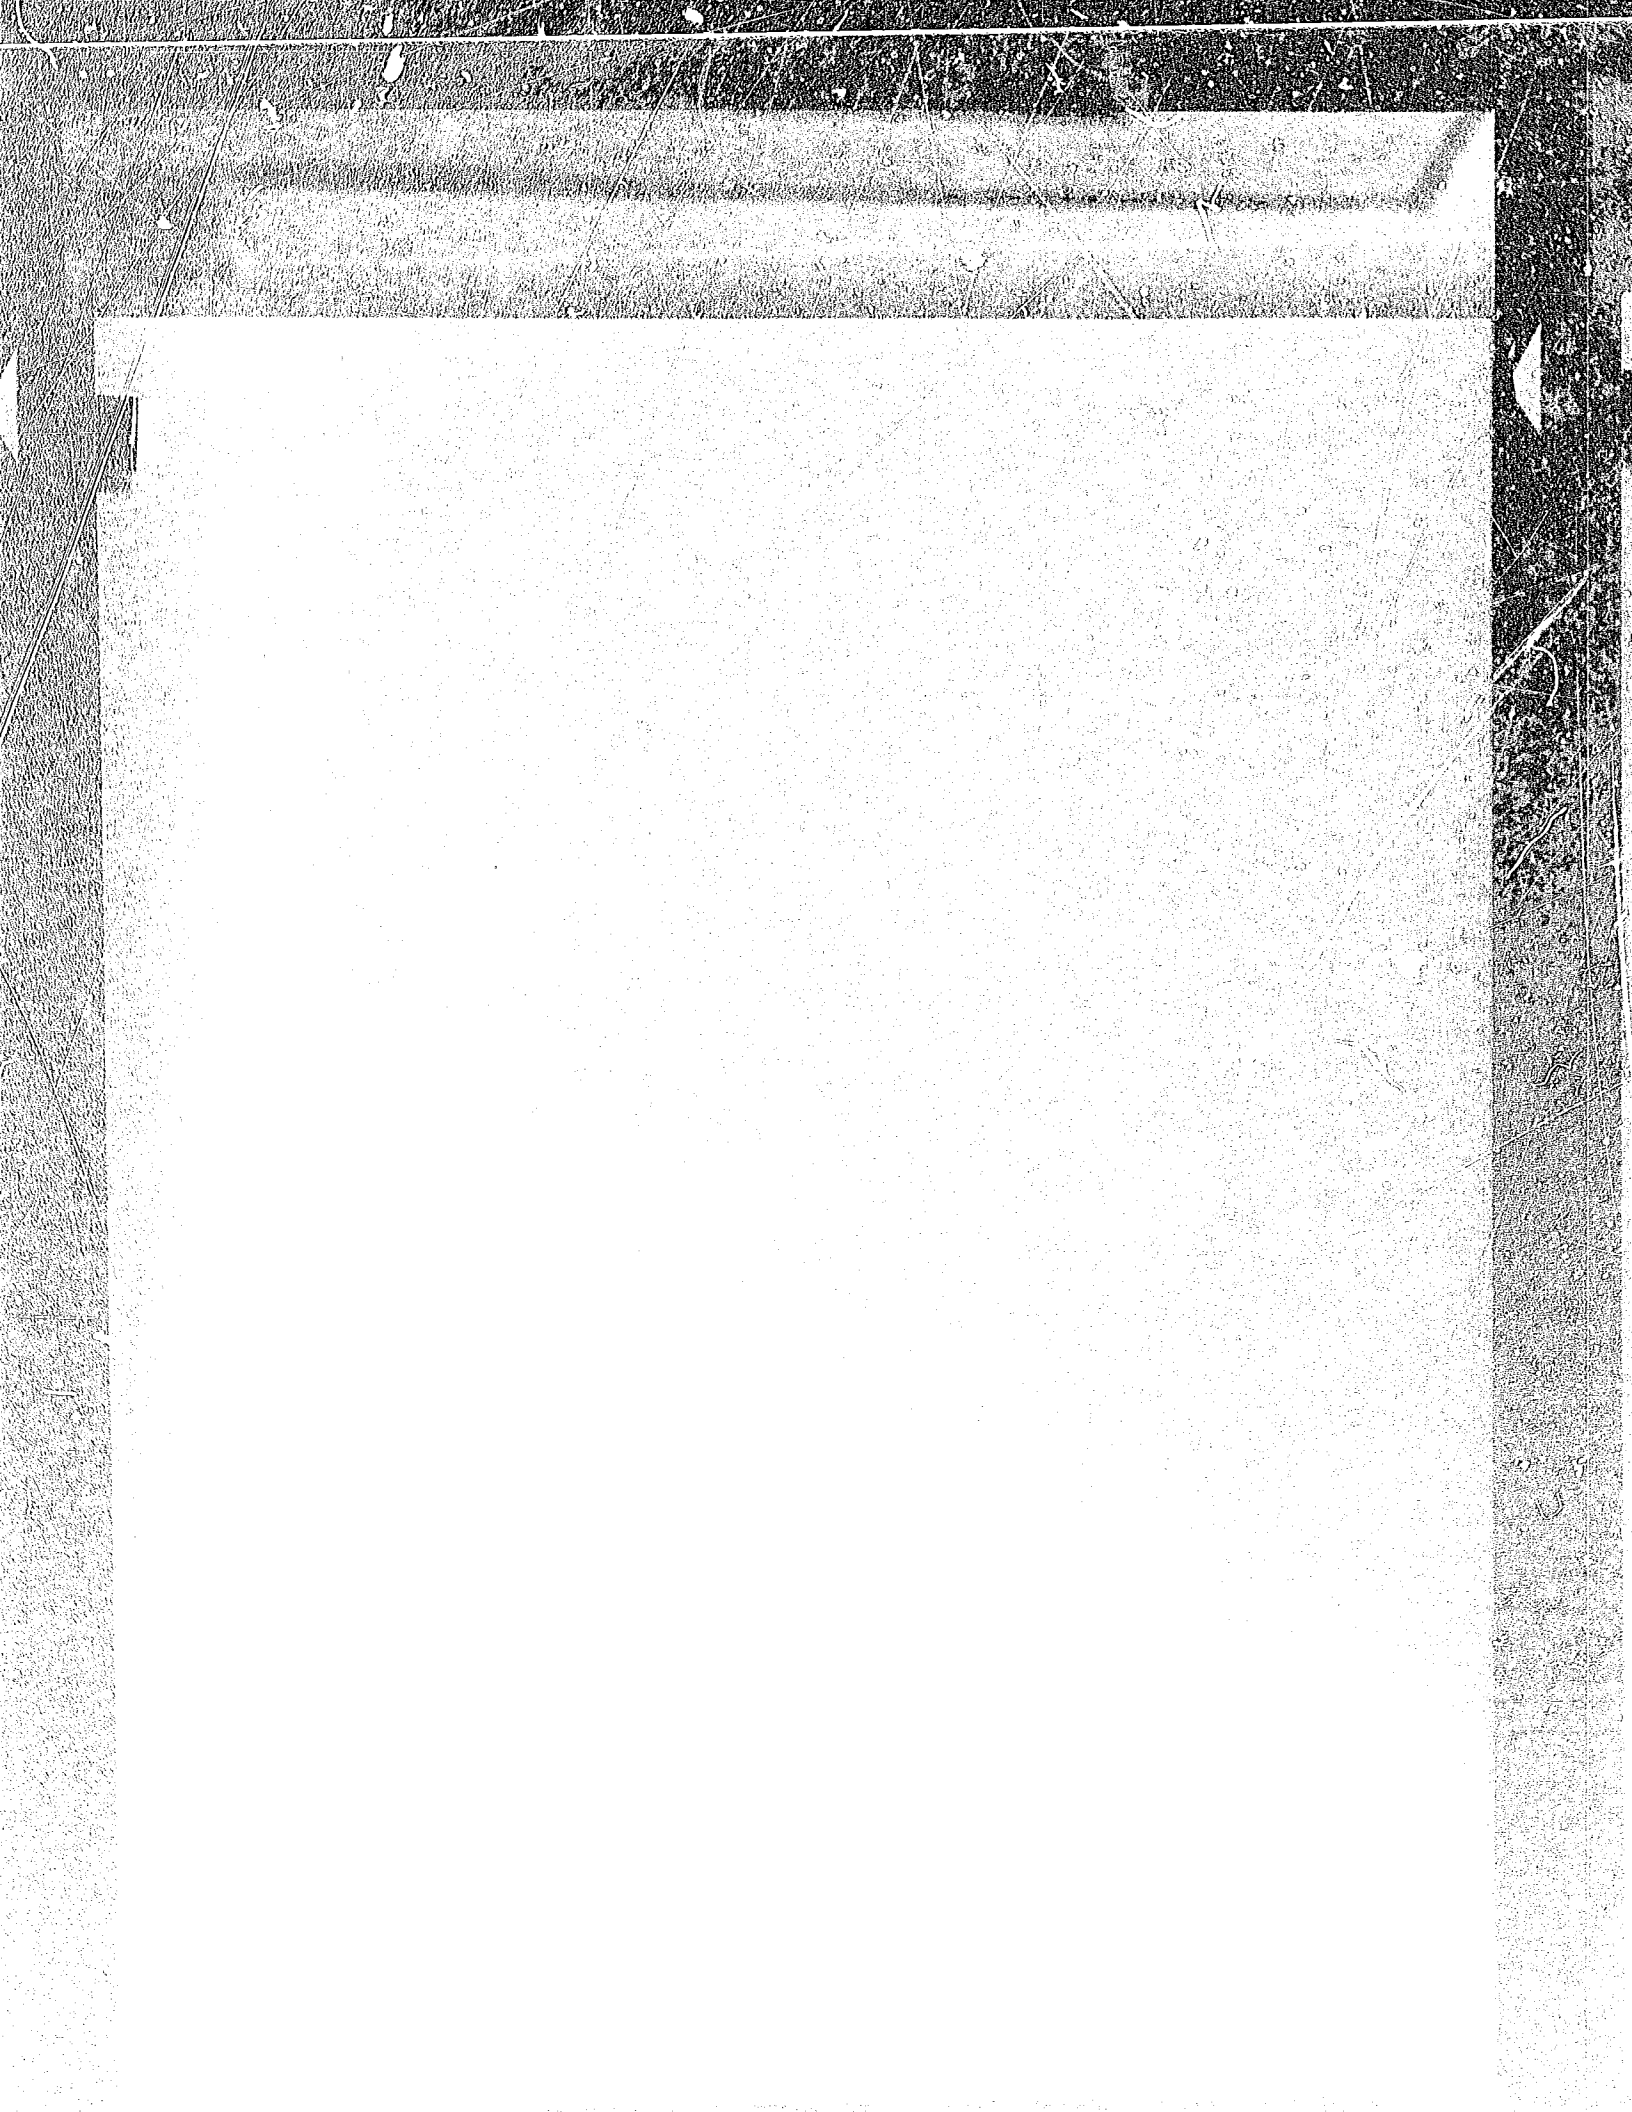

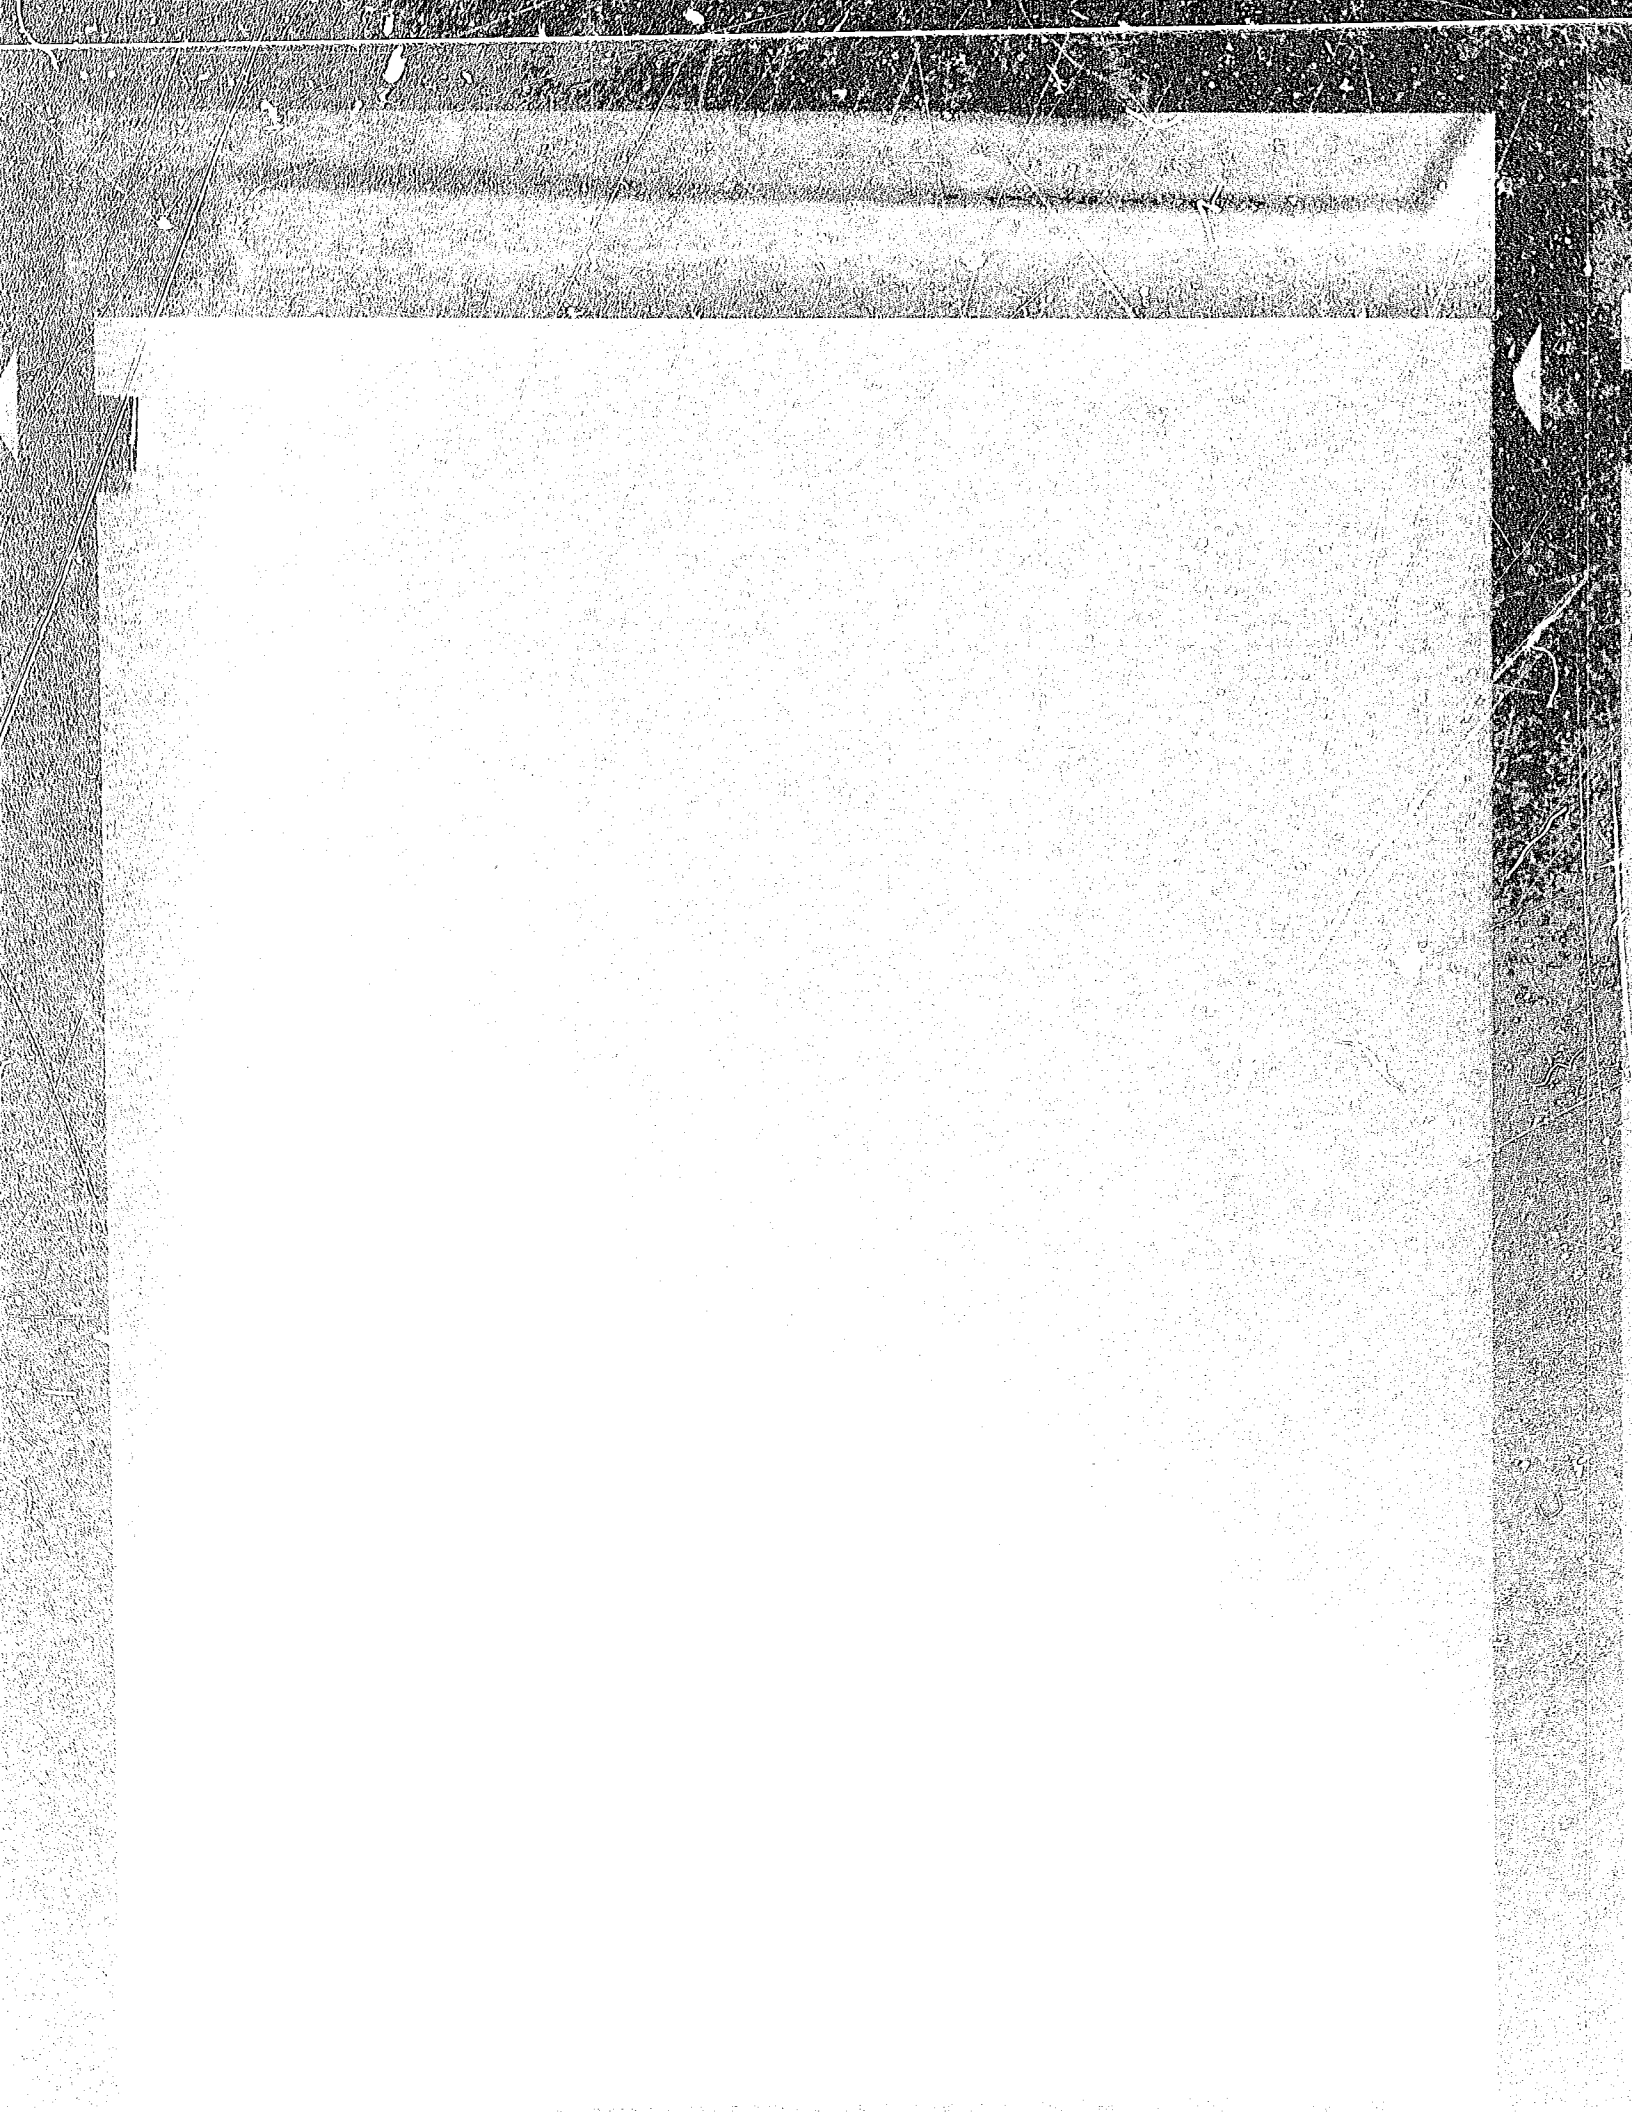

BOOK-A-154

4

99

Field Notes of the Subdivisions of Township No. 43 S. Range No. 4 W. of the Salt Lake Meridian Utah Territory

Surveyed by Bailey & Burrill

Under the first Contract No 73

Dated Sept. 4th 1876.

Survey commenced Feb. 17. 77

" Completed " 20. "

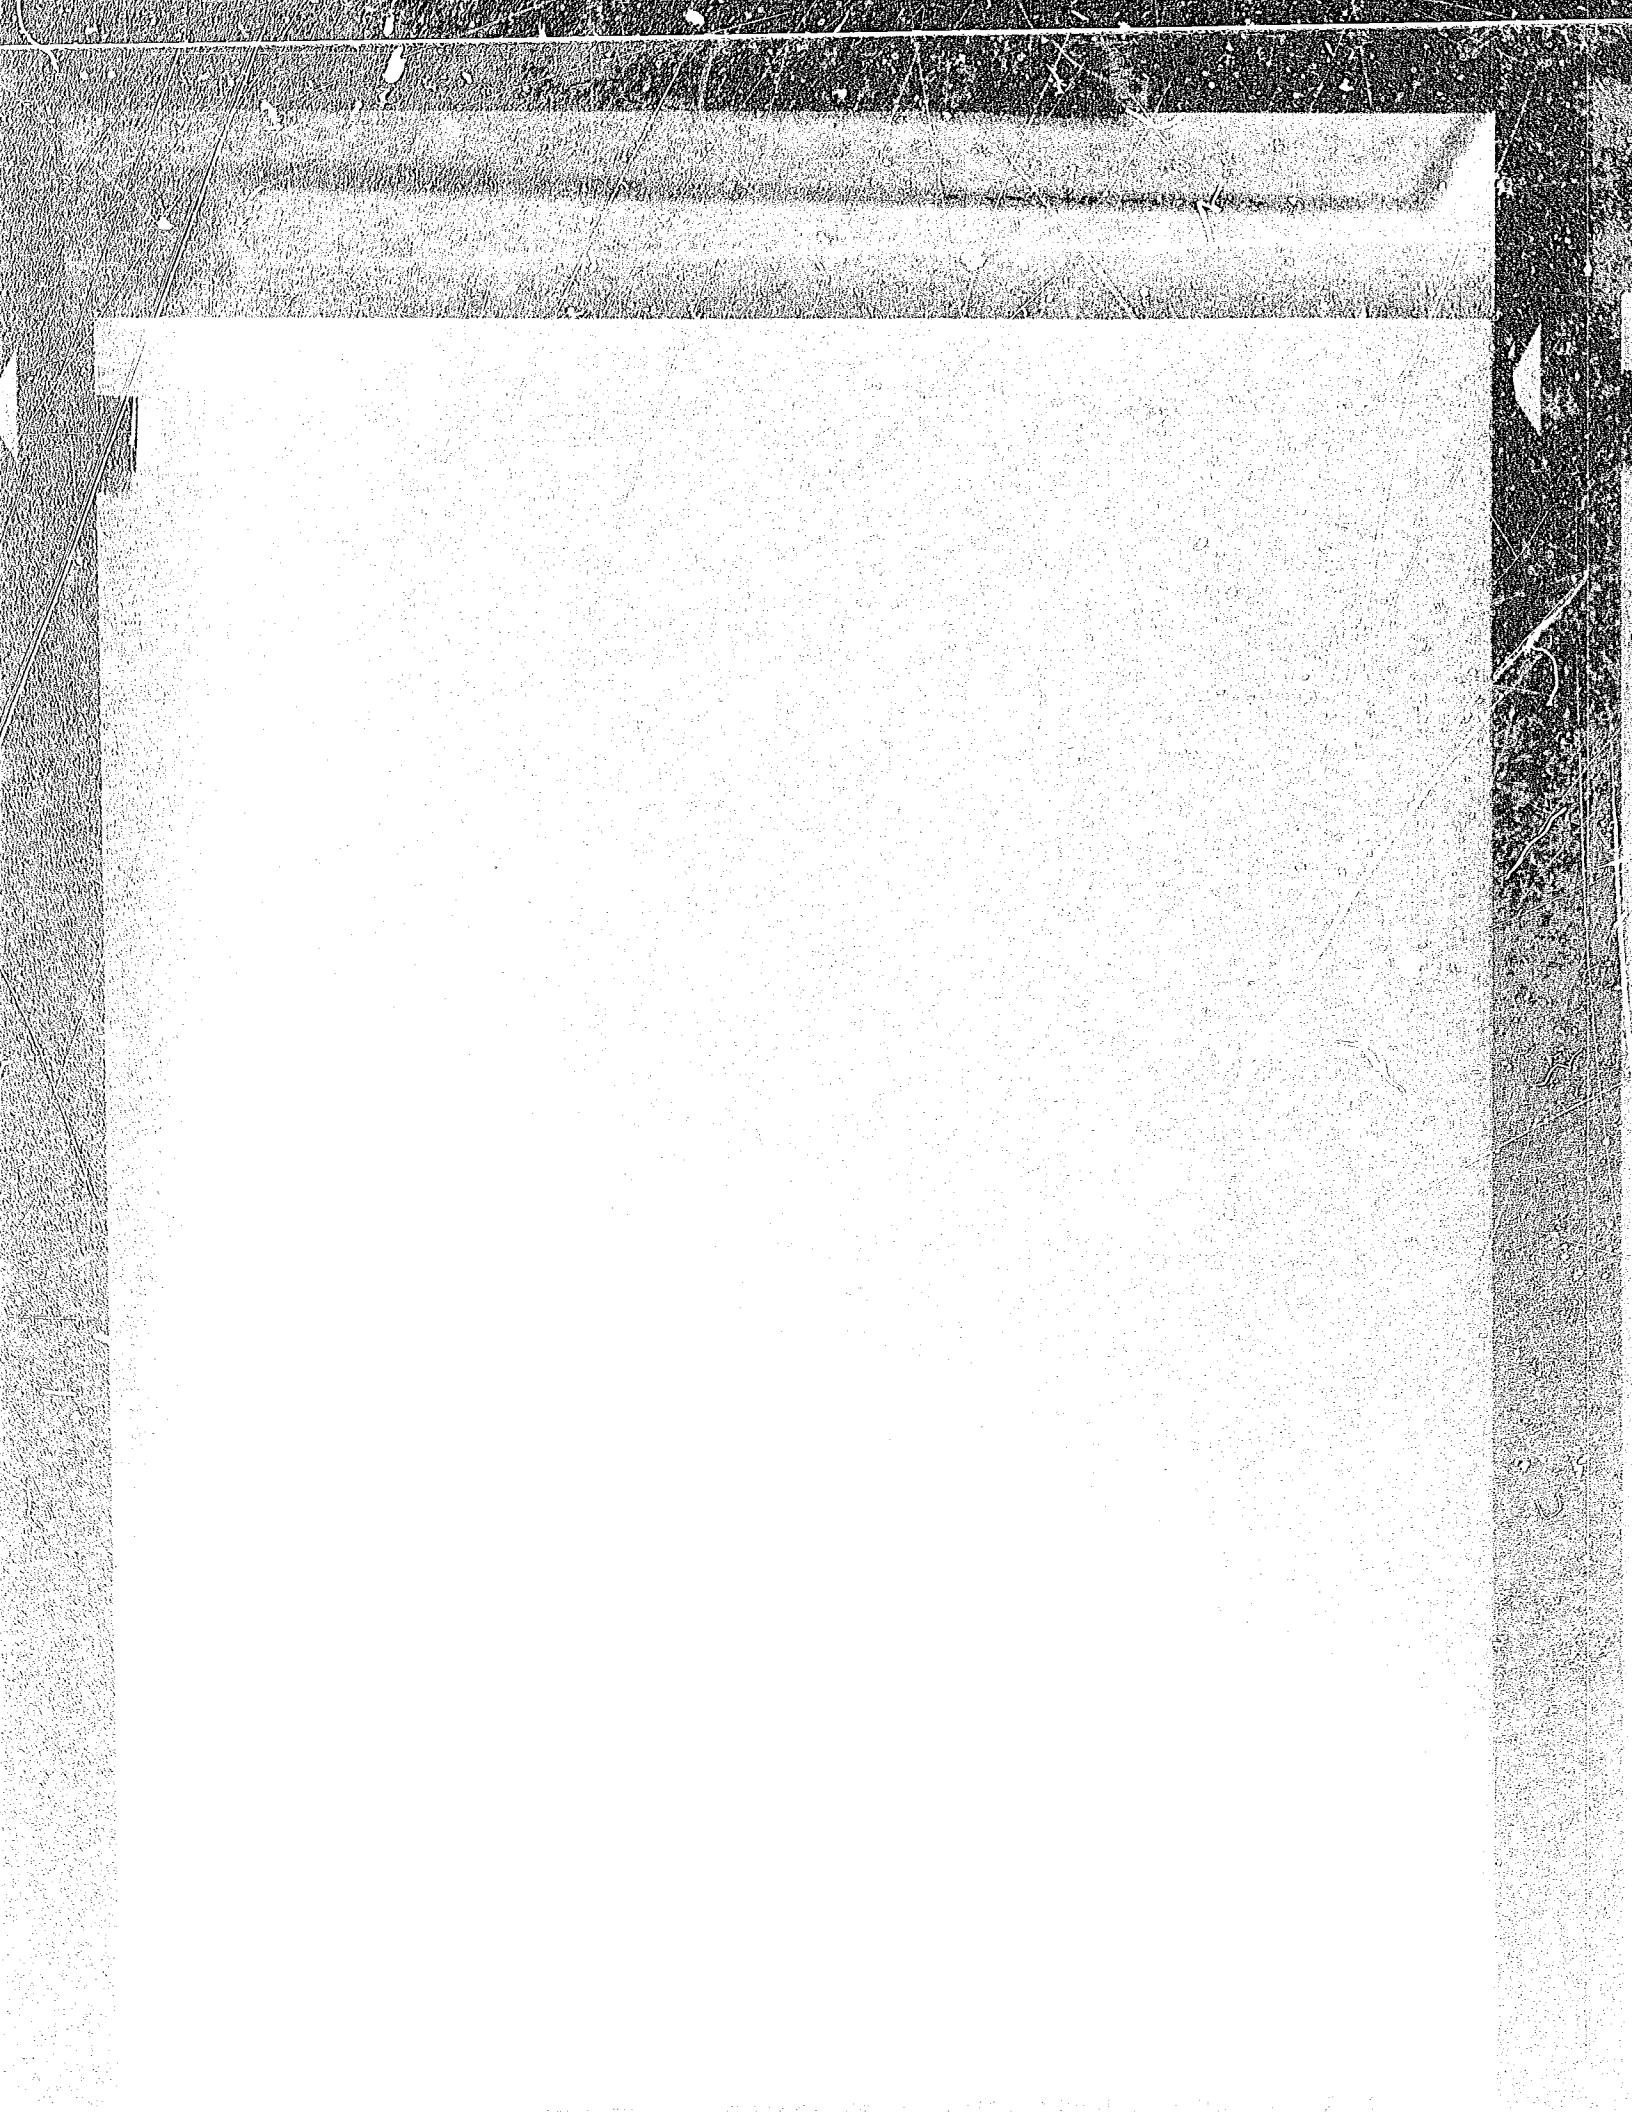

BOOK-A-154

Subdivision lines T. 43 S. R. 4 W.
Salt Lake Meridian.

Chains	
	Survey commenced Febr. 17th 1877. By J. C. Bailey
	From the established corner to secs. 35 & 36 on the South boundary of township 2 nw North between secs 35 & 36 Var. 15° 30' E.
40.00	Fnw 1/4 sec. cor. point falling in deep wash draining W. 2 therefore at 39.00 chains set Limestone 18 x 6 x 6 in. 12 in deep marked 1/4 W. C. on W. side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. W. C.
80.00	Set limestone 13 x 6 x 6 in.

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	9 in. deep, marked 1 notch on S. & E. edges and mound of earth from 4 pits each 24 x 12 x 12 in. for corner to sections 25, 26, 35 & 36	40.00
	Land gently rolling	
	Soil 1st rate.	80.00
	No timber.	

East on a random line between secs. 25 & 36

Var. 15° 30' E.

40.00	Set temporary 1/4 sec. cor.	
6.00	Enter timber bears N.E. & S.W.	21.50
	Land flat.	39.90
80.00	Intersect E. boundary of township 17 lks. S. of cor. to secs 25 & 36 from which S 89° 53' W. on true line between secs 25 & 36	40.00

Salt Lake Meridian T 8

Chains	
40.00	Set Quartzite 13 x 10 x 9 in. 8 in. deep marked 1/4 on N. side and mined a mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor., on small white Knoll.
80.00	The cor. to secs 25, 26, 35 & 36. Land E. 1/2 rolling 2nd rate W. 1/2 level 1st rate Timber scattering cedar on E. 1/2.

North between secs. 25 & 26
Var. 15° 30' E.

21.50	Wash draine S. W.
39.90	Pa riv Road runs N.E. & S.W.
40.00	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 S on W. side in mound of earth mined

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	from 4 pits each 24 x 12 x 12	18.30
	in. for 1/4 sec. cor.	39.90
80.00	Set charred cedar post 48 x	40.00
	4 x 4 in. 24 in. deep, marked	50.10
	1 notch on E. & 2 on S. edges	52.00
	& raised mound of earth	59.50
	from 4 pits each 24 x 12 x 12 in	68.00
	for cor. to secs 23, 24, 25 &	80.00
	26 from which	
	A cedar 9 in. dia. bears	
	N. 80° W. 13 lks. distant marked	
	S. 23, T 43 S., R 4 W. B.T.	
	Land gently sloping south	
	soil 1st rate	40.00
	Timber, a few cedars	

East on a random line between secs. 24 & 25
Var. 15° 30' E.

11.50	Wash drains S.	80.00

BOOK-A-154

Salt Lake Meridian 105

Chains	
18.30	Mark drain S.
39.90	" " "
40.00	Set temporary 1/4 sec. cor.
50.10	Mark drains S.W.
52.00	" " "
59.50	" " "
68.40	" " "
80.00	Intersect E. Boundary of township at cor. to secs 19, 24, 25 & 30 from which Wash on true line between secs 24 & 25
40.00	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 S. on N. side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.
80.00	The cor. to sections 23,

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	24, 25 & 26 —	
	Land rolling	
	Soil 1st rate	
	timber a few cedars —	
	North between secs 23 & 24	
	Var. 15° 30 E.	
30.00	Enter broken ground bears	
	E & W.	
40.00	Set limestone 20 x 15 x 2 in	
	15 in deep marked 1/4 on W.	
	side & raised mound of stone	40.00
	for 1/4 sec. cor.	53.00
	from which	
	A cedar 26 in. dia. bears	72.50
	N 70° E. 110 lks dist marked	
	1/4 S. B. T.	
80.00	Set charred cedar post	80.00
	48 x 4 x 4 in. 24 in. deep.	
	marked 1 notch on E & 3	

Chains

and S. edges are raised a mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs. 13, 14, 23 & 24
Land broken
Soil 2nd rate
Timber pine & cedars.

East on a random line between secs 13 & 24
Var. 15° 30' E.

40.00 Set temporary 1/4 sec. cor.
53.00 Leave broken ground entry flat bears N.E. & S.W.
72.50 Wash drains S.W., leave flat enter broken clay hills bears N.E. & S.W.
80.00 Intersect E. boundary of Township at cor. to secs 13, 18, 19 & 24.

Chains		Chains
	from which (West on true line between secs 13 & 24	4.50
40.00	Set sandstone 20 x 14 x 3 ins. 14 ins deep marked 1/4 on N. side, with mound of stone for 1/4 sec. cor.	40.00
	from which A Pine 9 in. dia. bears East 60 lks. dist. Marked 1/4 S. B. T.	
80.00	The cor. to secs. ~~12, 13~~ 13, 14, 23 &	80.00
	24 Land hilly clay hills soil 2nd rate. except 17.50 Chains E. part true soil 1st rate Timber Cedar & Pine	

Chains	
	North between secs. 13 & 14
	Var. 15° 30' E.
4.50	Deep mark drains S. W.
40.00	Squared & marked cedar stump, 6 x 6 in. 4 feet above ground, ¼ S. on W. side and mixed a mound of earth from 4 pits each 24 x 12 x 12 in. for ¼ sec. corner.
80.00	Set Stamped cedar post 48 x 4 x 4 in. 24 in. deep marked 1 notch on E. & 4 on S. edges and mixed mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs 11, 12, 13 & 14 from which
	A cedar 3 in. dia. bears N 49° W. 65 lks. dist. marked S 11 B. T.

1876

1877

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	A cedar 3 in. dia. bears N. 85° E. 10 lks dist. marked S 1/4, T 43 S. R 4 W. B. T.	
	Land mountainous	
	Soil 2nd rate	
	Timber, cedar & pine —	
		80.10
	East on a random line between secs 12 & 13 Var. 15° 30' E.	
40.00	Set temporary 1/4 sec. cor.	
80.10	Intersect E. boundary of township at cor. to secs 12 & 13 from which	
	West on true line between secs 12 & 13	40.00
40.35	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 on N. side and raised a mound of earth from 4 pits	

Chains	
	each 24 x 12 x 12 in. for 1/4 sec. cor. from which A pine 12 in. dia bears South 10 lks distant marked 1/4 S. B. T. A Pine 16 in. dia bears S 89° W. 30 lks dist. marked 1/4 S. B. T.
80.10	The cor. to secs 11, 12, 13 & 14 Land nearly level Soil 1st rate Timber cedars & pine of commercial value

North between secs 11 & 12
Var. 15° 30' E.

40.00	Set charred cedar post 4 ft x 4 x 4 in. 24 in. deep marked 1/4 on W. side and mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.

1/4 Mrd
1876
1877

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
80.00	Set Chamd cedar stake 48 x 4 x 4 in, 24 in. deep marked 1 notch on E. & 5 on S. edges and mound of earth from 4 pits each 24 x 12 x 12 in. for cor to secs 1, 2, 11 & 12	80.1
	Land undulating	
	Soil 2nd rate	
	Timber, scattering cedar & pine	
	East on a random line between secs. 1 & 12 Var. 15° 30' E.	40.
40.00	Set temporary 1/4 sec cor	60.
80.12	Intersect E. boundary of township at cor. to secs 1, 6 7 & 12 from which	79.
	West on true line between secs 1 & 12	80.
40.06	Set sandstone 16 x 8 x 4 in, 11 in	

Chains	deep, marked 1/4 on N. side, with mound of stones for 1/4 sec. cor.
80.12	The cor. to secs. 1, 2, 11 & 12.
	Land nearly level Soil 1st rate. Timber scattering cedars
	North on a random line between secs. 1 & 2 Var. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
60.00	Foot of bench slope bears S.E. & S.W.
79.10	Road bears N of E & S of W.
80.04	Intersect N. Boundary of township 12 links W. of cor. to secs 1 & 2 from which

Subdivision lines of T. 43 N. R 4 W.

Chains		Chains
	N. 0° 5' W. on true line between secs 1 & 12	
40.04	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 on W. side and mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.	7.00
		28.50
		40.00
80.04	The cor. to secs 1, 2, 11 & 12.	
	Land nearly level	
	Soil 1st rate	57.00
	Timber scattering pine & cedar.	80.00
	Febr. 17th 1877	
	T. C. Bailey	

Febr. 19th 1877.
By J. G. Burrill

Salt Lake Meridian

Chains	
	North between secs 34 & 35
	Var. 15° 30' E.
7.00	Wash drains S.W.
28.50	Land sloped flat bears N.E. & S.W. & enter rolling ground
40.00	Set limestone 16 x 12 x 4 in 11 in. deep marked 1/4 on W. side and raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. Cor.
57.00	Wash drains S.E.
80.00	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 2 notches on E. & 1 on S. edges for cor. to secs 26, 27, 34 & 35
	Land S 1/4 level, balance rolling; soil 1st rate. No timber.

1870

Same

876

877

"

Subdivision lines of T. 43 S. R 4 W.

Chains		
	East on a random line between secs. 26 & 35 Var. 15° 30' E.	80.00
0.40	Mark drains S.	
9.00	" " "	
40.00	Set temporary 1/4 sec. cor. inter. sec. bears N 6° E 9 W.	
41.00	Mark drains S.	
57.00	" "	33.30
73.50	" " " bank flat	40.00
80.00	Intersect N & S. line at cor. to secs 25, 26, 35 & 36, from which. West on true line between secs 26 & 35	
40.00	Deposited small stone marked with a cross (+) in mound of earth raised from 4 pits each 24 x 12 x 12 in for 1/4 sec cor.	80.00

Salt Lake Meridian 117

80.00	The cor. to secs 26, 27, 34 & 35. Land level Soil 1st rate No timber
	North between secs 26 & 27 Var. 15° 30' E.
33.30	Paria Road bears E & W.
40.00	Set Charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 on W. side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec cor. from which A Cedar 18 in. dia. bears S 20° W. 176 links dist. marked 1/4 S. B. T.
80.00	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked

4½ Mile
" "
W Bdy
1876
4th 1877
" "

Subdivision lines of T. 43 S. R 4 W.

Chains	2 notches on E & W edges, and mixed a mound of earth from 4 pits each 24 x 12 x 12 ins to cor to secs 22, 23, 26 & 27	Chains
	Land rolling, sloping south	
	Soil 1st rate	80.30
	Timber cedar & pine on N½	
	East on a random line between secs 23 & 26 Var. 15° 30' E.	
28.30	Wash drains S.	
32.75	Set temporary ¼ sec. cor.	
41.50	Wash drains S.	40.00
80.30	Intersect N & S. line 50 lks S. of cor. to secs 23, 24, 25 & 26 from which S. 89° 39' W on true line between secs 23 & 26	65.00
40.15	Set chamfered cedar post 48 x	66.20

Book A-15

Salt Lake Meridian

Chains	4 x 4 in. 24 in deep marked 1/4 on N. side and raised a mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
80.38	The cor. to secs 22, 23, 26 & 27
	Land mostly level
	Soil 1st rate
	Timber, a few cedars

North between secs 22 & 23
Var. 15° 30' E.

40.00	Set charred cedar post 48 x 4 x 4 in. 24 in. deep, marked 1/4 on W. side and raised a mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec cor.
65.00	Wash drains S.E.
66.20	" " "

Subdivision lines of T. 43 S., R 4 W.

Chains		Chains
68.20	Wash drains S.E.	
80.00	Set chased cedar post 48x	40.00
	4 x 4 in. 24 in. deep marked	72.50
	2 notches on E. & W. sides	
	and raised a mound of earth	80.20
	from 4 pits each 24 x 12 x 12	
	in. for cor. to secs 14, 15, 22	
	& 23 from which	
	A cedar 12 in. dia. bears	
	N. 10° E. 30 lks dist marked	40.10
	S/4. T43 S. R. 4 W. B. T.	
	Land nearly level	
	Soil 1st rate	
	Timber cedar & pine	
	East on a random line	80.20
	between secs 14 & 23	
	Var. 15° 30' E.	
	Very gentle descend	
32.00	Retr[illegible] Wash drains	

BOOK-A-154

Salt Lake Meridian 21

Chains	
	S. gully ascend
40.00	Set temporary 1/4 sec. cor.
72.50	Wash 50 feet wide drains S.W.
80.20	Intersect N & S. line at cor. to secs 13, 14, 23 & 24 from which West on true line between 14 & 23
40.10	Set charred cedar post 48 x 4 x 4 in. 24 in. deep marked 1/4 on N. side and raised a mound of earth form 4 pits each 24 x 12 x 12 in for cor. to 1/4 sec.
80.20	The cor. to secs 14, 15, 22 & 23
	Land nearly level
	Soil 1st rate
	Timber cedar & pine

West

Entered 1876

1877

Subdivision lines of T. 43 S. R 4 W

Chains		Chains
	North between secs 14 & 15	
	Var 15° 30' E.	
6.00	Wash drains S.E.	
9.25	" " "	40.00
40.00	Deposited pieces of Gypsum	43.50
	in mound of earth raised	
	from 4 pits each 24 x 12 x 12	80.10
	in. for 1/4 sec. Cor	
80.00	Set sandstone 17 x 8 x 6 in.	
	12 in. deep marked 2 notches	
	on E & 4 on S. edges and	
	raised mound of stones for	40.05
	cor to secs 10. 11. 14 & 15	
	from which	
	A pine 8 in. dia. bears	
	S 80° W. 4 lks dist, marked	80.10
	T. 43 S. R 4 W. B.T.	
	Land nearly level	
	Soil 1st rate	
	Timber cedar & pine	

Salt Lake Meridian

Chains	
	East on a random line between secs 11 & 14 Var 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
43.50	Petrifaction Wash drains S.
80.10	Intersect N & S. line at cor. to secs 11. 12. 13 & 14 from which West on true line between secs 11 & 14
40.05	Set sandstone 14 x 6 x 6 in 9 in deep marked 1/4 on N. side, with mound of stone for 1/4 sec. cor.
80.10	The cor. to secs 10. 11. 14 & 15 Land E½ level W½ broken Soil 1st rate Timber cedar & pine

½ Mile

1876

1877

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	North between secs 10 & 11 (Var. 15° 30' E.	
7.80	Perpendicular cedar 100 feet high bears N.E. & S.W.	
40.00	Set sandstone 20 x 14 x 8 in 14 in dep marked 1/4 on W. side, with mound of stone for 1/4 sec. cor. from which A cedar 12 in. dia. bears S 80° E. 90 lks dist marked 1/4 S. B. T.	40.0
80.00	Set sandstone 14 x 10 x 4 in 9 in dep marked 2 notches on E. & S. on S. edge and raised a mound of earth from 4 pits each 24 in. x 12 in. for cor to secs 2, 3, 10 & 11 from which A cedar 12 in. dia. bears	80.4 40.2

Salt Lake Meridian

Chains	
	N. 80° E 20 lks. dist. marked
	S 2, T 43 S, R. 4 W., S. L.
	A cedar 7 in. dia. bears S 70° W.
	45 lks. dist marked S 10 B. T.
	Land nearly level
	Soil 1st rate
	Timber pine & cedars
	East W random line
	between secs 2 & 11
	Var. 15° 30' E.
40.00	Set temporary 1/4 sec cor
80.40	Intersect N. S. line 39 lks
	N. of cor. to secs 1. 2. 11 & 12
	from which
	N. 89° 48' W. on true line
	between secs 2 & 11
40.20	Set charred cedar post
	48 x 4 x 4 in. 24 in. deep
	marked 1/4 on N side and

Subdivisions lines of T. 43 S. R 4 W.

Chains		Chains
	raised a mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.	
80.40	The cor. to secs 2, 3, 10 & 11	
	Land nearly level	
	Soil 1st rate	
	Timber, cedars & pines	
	The cor. to secs 2 & 3 on N. boundary of township not being established	
	2nd mile	
	North on true line between secs 2 & 3	
	Var. 15° 30' E.	
31.00	Road bears N.E & S.W.	
40.00	Near foot of steep bluff	
	Set charred cedar stake 48 x 3 x 3 in. 24 in. deep	
	marked 1/4 on W. side and	40.0

Salt Lake Meridian

Chains

raised a mound of earth
from 4 pits each 2½ x 12 x 12 in
for ¼ sec. cor.
Land level
Soil 1st rate
Timber cedar & pine
Note: On account of
the mountains I abandon
line here.
Febr. 19th 1877
J. G. Burrill

Febr. 19th 1877 by T. C. Bailey
from the established
cor. to secs 33 & 34 on S.
boundary of township
I run
North between secs 33 & 34
Var. 15° 30' E.

40.00 Deposited broken pieces

Subdivision lines of T. 43 S. R 40 W. 600

Chains		Chains
	of Gypsum in mound of earth	
	raised from 4 pits each 24 x	0.50
	12 x 12 in for 4 sec. cor.	23.50
64.85	Wash drains S. W.	40.00
80.00	in S. edge of timber set.	80.10
	Marked cedar post 48 x 4 x 4	
	in. 24 in deep marked 3 notches	
	on E & 1 on S. edges and raised	
	a mound of earth from 4 pits	
	each 24 x 12 x 12 in. for cor.	40.05
	to secs 27, 28, 33 & 34	
	from which	
	"Molly's Nipple" bears N 15° 17' E	
	about 8 miles ~~E~~ distant.	
	Land level	
	Soil 1st rate	
	Timber, scattering cedars	
		80.10

East on a random line
between secs. 27 & 34

Chains	
	Var. 15° 30' E.
0.50	Wash drains S.
23.50	Deep " " "
40.00	Set temporary 1/4 sec cor
80.70	Intersect N & S. line 70 lks S. of cor. to secs 26, 27 34 & 35 from which S. 89° 30' W. on true line between secs 27 & 34
40.05	Set charred cedar post 48 x 4 x 4 in 24 in deep, marked 1/4 on N. side and deposited a small stone marked with a cross (+) in mound of earth raised from 4 pits each 24 x 12 x 12 in for 1/4 sec cor.
80.10	The cor. to secs 27. 28. 33 & 34 Land rolling & level Soil 1st rate No timber

Subdivisional lines of T. 43 S. R 4 W. 130

Chains		Chains
	North between secs 27 & 28	
	Var. 15° 30' E.	
9.15	Road to Lee's ferry bears	
	E & W.	30.00
40.00	Deposited small stone marked	40.00
	with a cross in mound of	80.30
	earth raised from 4 pits each	
	24 x 12 x 12 in. for 1/4 sec. cor.	
	from which	
	A pine 12 in dia bears East	
	15 lks dist marked 1/4 S. B.T.	40.15
80.00	Set sandstone 19 x 16 x 5 in.	
	12 in deep marked 3 notches	
	on E. & 2 on S. edges and	
	raised a mound of earth	80.30
	from 4 pits each 24 x 12 x 12	
	in for cor. to secs 21, 22	
	27 & 28. —	
	Land N½ broken 2nd rate - S½	
	level 1st rate. Timber cedar & pine	

Salt Lake Meridian

Chains	
	East on a random line between secs 22 & 27 Var. 15° 30' E.
30.00	Wash drains S.
40.00	Set temporary ¼ sec cor.
80.30	Intersect N & S. line at cor. to secs 22, 23, 26 & 27 from which
	West on a true line between secs 22 & 27
40.15	Set piece of red Gypsum 18 x 12 x 4 in. 12 in deep marked ¼ on N. side, with mound of Gypsum for ¼ sec cor.
80.30	The cor. to secs 21, 22, 27 & 28
	Land nearly level
	Soil 1st rate
	Timber cedar & pine

½ Mile

" "

W. Buell 1876

" " 1877

Subdivision lines T. 4 S. R. 4 E.

Chains		Chains
	North between secs 21 & 22	
	Var. 15° 30' E.	
13.30	Meanders Wash 20 feet deep 25 ft. wide drains S. W.	
40.00	Set piece of Cypress 24 x 12 x 2 in. 16 in. deep marked 1/4 on W. side with mound of stone for 1/4 sec. cor.	
49.00	S. E. edge of bluff bears N 16° W and S. W. — A Tree on S. edge of eastern bluff bears N 44° 15' E. S W. point of lone bluff bear N 81° 30' E.	80.00
77.25	Large boundary 20 x 10 x 3 feet 10 lks W. of line	40.00
80.00	At foot of bluff breaks bear N E. & S. W. Set sandstone 14 x 10 x 5 in. 9 in. deep notched 3 on E & S. edges, with mound of stone for cor to sections 15, 16, 21 & 22	80.00
	Land broken — Soil 2nd rate Timber scattering pine & cedars	

BOOK-A-154

Salt Lake Meridian

123

Chains

East on a random line
between secs 15 & 22
Var. 15° 30' E.

On account of bluff points
& breaks 2 offsets 7.50 chs S.
thence East 80.00 chains
thence North 7.50 chains to
80.00 Intersect N & S line at cor.
to secs 14, 15, 22 & 23
from which, West on the line
with same offset, brt. Secs. 15 & 22
40.00 Set Sandstone 15 x 11 x 9 ins. deep marked
1/4 S. C. on N. side & raised mound of stones
(Witness 1/4 sec. cor. 7.50 chs. S. of the cor. point)
80.00 The cor. to secs 15, 16, 21 & 22
Land very broken
Soil 2nd rate
No timber.

W. Boundary

1876

1877

Subdivision lines of T. 43 S. R. 4 W.

Chains	
	North between secs 15 & 16 Var. 15° 30' E.
40.00	Set sandstone 10 x 10 x 6 in. 6 in. deep marked 1/4 on W. side, with mound of stones for 1/4 sec. cor.
70.00	Enter plateau Cave Creek
80.00	Set charred cedar post 48 x 4 x 4 in. 24 in. dep, notched 3 E & 4 S. and raised mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs 9. 10. 15 & 16.
	Land mostly broken
	Soil 2nd rate
	Timber scattering pine & cedars
	East on a random line between secs 10 & 15 Var. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
74.00	Bluffs bear NE & SW.

BOOK-A-154

Salt Lake Meridian

Chains	
	enters low flat, into Kimball Valley.
80.00	Intersect N & S. line 2 links E of cor. to secs. 10. 11. 14 & 15 from which
	S. 89° 31' W. on true line between secs 10 & 15
40.30	Set charred cedar post 48 x 4½ 4 in. 24 in. deep marked ¼ on N. side and mound of earth from 4 pits each 24 x 12 x 12 in. for ¼ sec. cor.
80.00	The cor. to secs 9. 10. 15 & 16 Land mostly high timber bench Soil 1st rate. Timber pine & cedar. —

North between secs 9 & 10
Var. 15° 30' E.

36.50	Road bears NE & SW.
40.00	Set sandstone 19 x 14 x 7 in. 13 in

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
	deep marked 1/4 on W. side, with	5.00
	mound of stone for 1/4 sec cor.	40.00
44.00	Wash drains S. W.	51.00
49.00	Sand " S. E.	53.50
75.00	Sand " S. W.	80.00
80.00	Set sandstone 15 x 10 x 6 in. 10 in.	
	deep notched 3 E. & 5 S. & raised	
	mound of earth from 4 pits each	
	24 x 12 x 12 in for cor to secs	40.00
	3. 4. 9 & 10 from which	
	A pine 10 in. dia bears S 85° E	
	22.0 lks dist marked S 10. T 43 S R 4 W. B. T.	80.00
	Land mostly level	
	Soil 1st rate	
	Timber cedar & pine	

East on random line
between secs. 3 & 10
Var. 15° 30' E

3.50	Wash drains S. W.	

Salt Lake Meridian —

Chains	
5.00	Remains of old Mormon Fort. —
40.00	Set temporary 1/4 sec. cor.
51.00	Wash drains S.W.
53.80	Road to Paria bears N.E & S.W.
81.77	Intersect N & S. line at cor. to secs 2, 3, 10 & 11 from which West on true line between secs. 3 & 10
40.00	Set limestone 10 x 9 x 8 in. 6 in. above ground marked 1/4 on N. side, with mound of stone for 1/4 sec. cor.
80.00	True cor. to secs 3, 4, 9 & 10 Land level; soil 1st rate Timber fine pine & cedar in patches.

As the cor to secs 3 & 4 on N. boundary of T. is not set 2 rods North on true line between secs 3 & 4

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
	Var. 15° 30' E.	40.00
35.00	Foot of bluff bears E & W.	
40.00	At point S.E. of canon heading N.E. set sandstone 12 x 9 x 8 ins 8 ins deep marked 1/4 on W side, with mound of stone for 1/4 sec cor.	80.00
	Land level. Soil 1st rate	
	Timber Cedar	
	Note: I abandon the line here.	
	Febr. 19th 1877 T. C. Bailey —	
	Febr. 20th 1877	
	By J. G. Burnett	
	From the cor. to secs 32 & 33 on S. boundary of Township	36.75
	I run	
	North between secs 32 & 33	40.00
	Var. 15° 30' E.	79.80
26.80	Road to Leis Ferry bears E & W.	

Chains
40.00 Set limestone 14 x 8 x 5 inv. 9 inv. deep marked 1/4 on W. side and raised a mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.

80.00 Set trachyte 12 x 9 x 8 inv, 8 inv deep marked 4 notches on E & 1 on S edges and raised mound of earth from 4 pits each 24 x 12 x 12 in for cor to secs 28, 29, 32 & 33.

Land level
Soil 1st rate
No timber.

East on random line between secs 28 & 33
Var. 15° 30' E.

36.75 Road to Lee's Ferry bears N.E. & S.W.

40.00 Set temporary 1/4 sec. cor.

79.80 Intersect N. & S. line 10 lks S. of cor. to secs 27, 28, 33 & 34

1/2 Mound

W. Smith
1876

1877
" "

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	from which S. 89° 50' W on true line between secs 28 & 33	
39.90	Deposited broken pieces of Gypsum in mound of earth raised from 4 pits each 24 x 12 x 12 in. for ¼ sec. cor.	
79.80	The cor. to secs 28, 29, 32 & 33 Land mostly level Soil 1st rate Timber scattering pine & Cedar.	
		40.00
	North between secs 28 & 29	80.18
	Var. 15° 30' E.	
40.00	Deposited 5 pieces of broken rocks in mound of earth raised	
	from 4 pits each 24 x 12 x 12 in.	40.09
	for ¼ sec. cor.	
80.00	Set sandstone 14 x 10 x 6 in. 9 in. deep marked 4 notches on E.	

Chains | & 2 ow S. edges, with mound
& stones for cor to secs 20, 21
28 & 29 from which
Wit. Pine 20 ins dia bears
N 40° 30' E.
Land low. Soil 1st rate
No timber

East on a random line
between secs 21 & 28
Var 15° 30' E.

40.00 Set temporary 1/4 sec. cor.
80.18 Intersect N & S. line at cor to
secs 21, 22, 27 & 28 from which
West ow two line
between secs. 21 & 28
40.09 Set chamfered cedar post 48x4x4 ins
24 ins deep marked 1/4 on N. side and
mound of earth from 4 pits each
24x12x12 ins. for 1/4 sec. cor.

Subdivision lines of T. 43 S. R. 4 W.

Chains.		Chains
80.8	The cor. to secs. ~~16, 17, 20 & 21~~ 20. 21. 28. & 29	
	land nearly level	
	soil 1st rate. No timber	
	North between secs 20 & 21	
	Var. 15° 30' E.	
2.25	Mark drain 2.00.	9.00
40.00	Set sandstone 14 x 8 x 5 in. 9 in. deep	11.50
	marked 14 on N. side and raised a	
	mound of earth from 4 pits each	20.00
	24 x 12 x 12 in. for 1/4 sec. cor.	37.00
53.00	Foot of low bluff bears N.E. & S.W.	40.00
80.00	Set sandstone 18 x 12 x 4 in. 12 in.	69.00
	deep marked 1/4 notches on E. & S	80.10
	S. edges, with Mound of stones	
	for cor to secs 16, 17, 20 & 21	
	from which	
	A cedar 16 in. dia bears N. 52° E	
	26 lks dist marked B.T. 16 T. 43 S. R. 4 W. B.C.	40.05
	Prof. Thompsons flag staff bears	
	N. 86° 53' W.	

Salt Lake Meridian

Chains	
	Land rolling level, soil 1st rate Timber scattering cedar & pine
	East on a random line between secs 16 & 21 Var. 15° 30' E.
9.00	Top. of bluff descend.
11.50	Enter flat bears N.E. & S.W. — and Wash 20 feet deep 30 lks. wide drains S.W.
30.00	Leave flat enter breaks, bear N. & S.
37.00	Top of bluff enter rolling cedar bench
40.00	Set temporary 1/4 sec. cor.
69.00	Head of Rock Hollow drains N.E.
80.10	Intersect N. & S. line 20 links S. of cor. to secs 15. 16. 21 & 22 from which
	S. 89° 51' W. on true line between secs 16 & 21
40.05	Set sandstone 20 x 18 x 5 in. 14 in. deep mar 1/4 on N. side with mound of stone for 1/4 sec. co.

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
80.10	NE cor. to secs 16, 17, 20 & 21 Land broken Soil 2nd rate Timber cedar & pine —	
	North between secs 16 & 17 Var. 5° 30 E.	
2.00	Road runs NE & SW.	
16.50	Descend	
23.50	Old Road runs NE & W. in hollow drains SW. ascend	
40.00	Set sandstone 14 x 12 x 4 in. 9 in. deep marked 1/4 on W. side, with mound of stone for 1/4 sec cor	
43.90	Gully drains SE.	
53.00	Wash in Gully drains E.	27.50
64.00	Descend	30.70
66.50	Wash drains E.	40.00
72.00	Wash in same hollow drains E.	
76.00	Enter flat.	42.00
80.00	Set sandstone 18 x 8 x 4 in. 12 in.	80.10
	deep marked 4 notches on E & S	

BOOK-A-154

Salt Lake Meridian 1875

Chains

edges and mina mound of earth from 4 pits each 24 x 12 x 12 in for cor to secs 8 9. 16 & 17 from which A pine 8 in. dia bears N. 20 E 265 lks dist. marked S. 9 T. 43 S R 4 W B.T. A pine 3 in. dia bears N 70° W. 225 lks dist marked S. 8 B. T. Land rolling soil 2nd rate Timber cedar & pine

East on a random line between secs 9 & 16 Var. 15° 30 E.

27.50 Road bears NE & SW.

30.70 Wash drains S.W.

40.00 On edge of Road bears NE & SW set temporary 1/4 sec. cor.

42.00 Ascend, enter dense cedar grove.

80.10 Intersect N & S line 22 lks S. of cor to secs 9. 10. 15 & 16 from which

½ Mile

Feb 1876

April 1877

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
	S. 89° 30' W. on the line between secs 9 & 16.	
40.00	Set quartz stone 18 x 8 x 5 in. 18 in. deep marked 1/4 sec. 9 sec. 16 with mound of stone for 4 trees	
	from which	
	A cedar 8 in. dia. bears N. 80° E. 14 lks dist. marked 14 S. B. T.	
80.10	The cor. to secs. 8. 9. 16 & 17. Land nearly level. Soil 1st rate. Timber pine & cedar.	8.00
		15.00
	As the line between secs 8 & 17	25.00
	can not be established in regular	32.30
	order on account of the mountains	40.00
	from the cor to secs 8 9 16 & 17 I run	
	West on the line between secs 8 & 17 Var. 15° 30' E.	
30.00	Foot of bluff bears N & S.	
40.00	Falls in bluff - thence at	

BOOK-A-154

Salt Lake Meridian — T 27 S

Chains	
	30.00 Chains set Sandstone 12 x 10 x 6 in. 8 in deep marked 1/4 W. C. with mound of stone for 1/4 sec. W. C.
	Note Abandon line here —
	Land rolling loic Land rate
	Timber scattering pine & cedar

North between secs 8 & 9

Var. 15° 30' E.

8.00	Wash in Gulley drains E.
15.00	" " " " S.E.
25.00	" " " " N.E.
32.30	" " " " S.E.
40.00	On S. edge of Wash drains S.E. Set Sandstone 24 x 12 x 4 in. 18 in. deep marked 1/4 on W. side, with mound of stones for 1/4 sec. cor. from which

A cedar 4 in. dia. bears N. 45° W. 35 links dist. marked 1/4 S. B. T.

W. Bunnell 1876

1/4 1877 " "

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
47.50	Wash in Gully arroyo E.	28.00
43.00	" " " " S E.	37.50
73.50	" " " "	40.00
81.00	Cor N. edge of Wash drains S E.	60.00
	set Sandstone 14 x 12 x 7 in. 9 in.	64.00
	deep marked 4 notches on E & S ons	81.00
	S. edge, with mound of stones for	
	cor to secs 4, 5, 8 & 9 bears which	
	A cedar 4 in. dia. bears S 10° E.	
	67 lks dist marked S. 9 B. T.	40.00
	A cedar 12 in. dia bears N. 5° W. 47 lks	
	dist. marked S. 5 T. 43 S. R. 4 W. B. T.	
	Land undulating soil 2nd rate	80.00
	Timber, Pine & Cedar —	

East on a random line
between secs 4 & 9
Var. 15° 30' E

14.00	Main Cañon. Wash drains S E.	
18.50	Indian Trail bears N W. & S E.	

Salt Lake Meridian

Chains	
28.00	Mark drains S.W.
37.50	" " S.
40.00	Set temporary 1/4 sec. cor.
60.00	Mark drains S.E.
64.00	" " S.
80.00	Intersect N & S line at cor. to secs 3. 4. 9 & 10 from which West on true line between secs 4 & 9
40.00	Set sandstone 16 x 7 x 7 in. 11 in. deep marked 1/4 on N. side, with mound of stone for 1/4 sec. cor
80.00	The cor. to secs 4, 5. 8 & 9. Land level Soil 1st rate Timber pine & cedar

As the line between secs 5 & 8 can not be established in the regular order on account of the mountains therefore from the cor. to secs

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains
	4, 5, 8 & 9 Sec. nw.	
	West on true line	
	meanders Secs. 5 & 8	15.00
	Var. 5° 30' E.	25.00
7.50	Gully drains NE.	40.00
12.50	Foot of bluffs bears NE & SW.	
40.00	Falls in bluffs thereon at 12.50	
	Chains N. set Sandstone 18 x 5 x	
	5 in. 12 in. deep marked 1/4 W.C.	50.75
	and raised mound of earth	75.00
	from 4 pits each 24 x 12 x 12 in	87.00
	for 1/4 sec. W. C.	
	Note: N abandon line here	
	Sand rising soil 2nd rate	
	timber Pine & Cedar.	

The cor to secs 4 & 5 on N. boundary of township not being set 40 links

North on true line

Chains	
	Between Secs 4 & 5
	Var. 15° 30' E.
15.00	Mark Mound S E.
25.00	do do
40.00	Set sandstone 36 x 10 x 5 in. 24 in dep marked 1/4 on W side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor
50.75	Main Canon Wash drains S E.
70.00	Foot of bluff bears N W. & S E.
87.00	Falls in bluffs thereon at 70.00 chs. Set sandstone 14 x 10 x 5 in 9 in. dep notches 4 on E & 2 on W. edges and marked W.C. also raised a mound of earth from 4 pits each 24 x 12 x 12 in for Witness Cor. to Secs 4 & 5 on N. boundary of T. Land mostly rolling soil 2nd rate Timber Pine & Cedar

Febr. 20th 1877. J. G. Burrill

1 50

ib Mar 1876

W Burrill 1876

14th 1877

" "

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
	Mar. 20th 1877 by J. C. Bailey —	
	From the cor. to secs 31 & 32 on	
	S. boundary of township 2. mm	
	North between secs 31 & 32	
	Var. 15° 30' E.	
40.00	Set sandstone 18x12x4 in. 12 in deep	
	marked 4 on W side with mound of stone for 4 secs	
45.00	Gulch trains N. W.	0.10
56.00	Navajo Wells 2 chs W. have cedars	40.50
58.00	Road bears N.W. & S.E.	71.25
58.50	Mission House 130 lks W	74.00
64.50	Flat ledge E & W. 10 chs.	80.20
70.00	Leave sand	
80.00	Set a sandstone 11x10x4 in 7 in	
	deep marked 5 notches on E & W on S. edge,	
	with mound of stones for cor to secs 29, 30,	40.10
	31 & 32 from which	
	A cedar 5 in dia bears N. 70 E 14 lks dist marked S 29 T 43 S R 4 W B.T.	
	A cedar 3 in. dia bears N. 10 W. 60 lks	

Chains | dist. marked S 3v B.T.
Land level soil 1st rate
No timber

East on a random line
between secs 29 & 32
Var. 15° 3v' E.

0.10 Enter cedar bunch bear N & S.
40.00 Set temporary 1/4 sec. cor.
71.25 Perpendicular bluff bears N.E. & S.W.
74.00 Wash drains S.
80.20 Intersect N & S line 19 lks N. of
cor. to secs. 28. 29. 32 & 33 from which
N. 89° 52' W on true line
between secs 29 & 32.
40.10 Set sandstone 16 x 10 x 8 in. 11 in deep marked
1/4 on N side with mound of stones for 1/4 sec. cor
from which
A cedar 9 in. dia. bears S. 89° E
5 links dist marked 1/4 S. B.T.

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
80.20	The cor. to secs 29. 30. 31 & 32	
	Land mostly level	
	Soil 1st rate rocky	
	Timber scattering pine & cedar	
		12.50
	West on a random line	19.50
	between secs 30 & 31	34.10
	Var. 15° 30' E.	40.00
37.50	Road bears N.W. & S.E.	
45.00	Set temporary 1/4 sec. cor.	
76.50	Gully drains N. W.	62.00
80.24	Intersect W. boundary of T.	80.00
	at cor. to secs 30 & 31 from which	
	East on true line	
	between secs. 30 & 31	
40.24	Set sandstone 13 x 8 x 7 in 8 in	
	deep marked 1/4 on N. side, with	
	mound of stone for 1/4 sec. cor.	
80.24	The cor. to secs 29. 30. 31 & 32	
	Land level. Soil 1st rate	

BOOK A-154

Salt Lake Meridian 155

Chains	No Timber
	North between secs 29 & 30
	Var. 15° 30' E.
12.50	Wash drains W.
19.50	Road bears N.E. & S.W.
34.10	Wash drains S.W.
40.00	Deposited 3 small stones in mound of earth raised from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.
62.00	Road bears N.E. & S.W.
80.00	Set sandstone 16 x 7 x 6 in 11 in. deep marked 5 notches on E & 2 on S edges, with mound of stone for cor to secs 19, 20, 29 & 30 from which A cedar 4 in. dia. bears N 45° E. 30 lks dist marked S. 2 B.T. A cedar 5 in. dia bears N 80° W 44 lks dist. marked S. 19 T. 43 S. R. 4 W. B.T. Land level. Soil 1st rate No timber

½ Mrst

Mound

1876

1877

Subdivision lines of T. 43 S. R. 4 W.

Chains		Chains	
	East on a random line between secs 20 & 29 Var. 15° 30' E.		
14.00	Road near. N. & S.	5.00	
28.00	" " NE & SW.		
32.50	Wash drains S.W.	40.00	
40.00	Set temporary 1/4 sec cor. in stone mound	41.00	
61.00	Wash drains S.	80.19	
75.00	Cañon Wash drains S.W.		
80.20	Intersect N. & S. line at cor to secs 20, 21, 28 & 29 from which		
	West on true line between secs 20 & 29	40.19	
40.10	Set sandstone 20 x 14 x 5 in. 14 in. deep marked 1/4 on N side, with mound of stone for 1/4 sec. cor.	80.19	
80.20	Mac cor. to secs. 19/20, 29/30. Land level Soil Pinte timber scattering Cedar		

Chains	
	West on a random line between secs 19 & 30 Var 15° 30' E.
5.00	Remains of Mesquite Village 25 lks N. of line.
40.00	Set temporary 1/4 sec. cor.
41.00	Road bears NE & SW.
80.19	Intersect W. boundary of township 20 lks S. of cor to secs 19 & 31 from which
	S. 89° 51' E on true line between secs 19 & 30
40.19	Reported broken pieces of rock in mound of earth raised from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
80.19	The Cor. to secs 19. 20. 29 & 30 Land level. Soil 1st rate Timber scattering pine & cedar

North between secs 19 & 20
Var. 15° 30' E.

20 links West

line

Reg'd Surveyor
4th 1876

4th 1877
" "

Subdivision lines of T. 43 S. R 4 W.

Chains		Chains
28.00	Road bears NE & SW.	35.00
40.00	Set limestone 20 x 14 x 3in 14in deep mkd	40.00
	1/4 on W. side, with mound of stone for 1/4 sec cor from	39.80
	A cedar 15in dia bears N 20° E, 15 lks dist, marked	43.50
46.50	Foot of bluff bears E & W.	78.20
87.00	Falling in bluff cannot be set therefore	80.20
	at 50.00 chs set sandstone 13 x 10 x 6 in	
	8in. deep notched 5 on E & 2 on S edges W	40.10
	with mound of stones for witness cor	
	to secs 17. 18. 19 & 20	
	Land broken Soil 2nd rate	80.20
	Timber scattering pine & cedar	
		Note.

East on a random line
between secs 17 & 20
Var. 15° 30' E.

From W. C. to secs 17, 18, 19 & 20 thirty
chains S. of true cor. Point 2 mm
East on offset line 35 chains thence
North 30 chs to

Book No. 134

Salt Lake Meridian 159

Chains	
35.00	on line in place at foot of bluff bear N & S.
40.00	Set temporary ¼ sec. cor.
59.80	Wash draws S. W.
73.50	Road bears N E & S W.
78.20	" " " "
80.20	Intersect N & S line at cor to secs 16. 17. 20 & 21 from which Wet on two lines between secs 17 & 20
40.10	Set Limestone 22 x 16 x 4 in 15 in deep marked from N line, with mound of stone for ¼ sec. cor. from which a cedar 10 ins dia bears North 15 lks dist marked ¼ S. B. T.
80.20	The cor to secs 17, 18, 19 & 20
	Land broken. Soil 2nd rate. Timber cedar & pine
Note:	Abandon the survey, here.

General Description

The surveyed portions of this township are all agricultural. The northern portion yields pine & cedar timber. There is one settlement in sec. 31 at the so called "Navajo Wells"

Febr. 20th 1877. J. C. Bailey
U. S. Dep. Surveyor.

Mile Post

Line

Eng. W. Burrell

4th 1876

14th 1877

" "

160

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st *1877*

The foregoing field notes of the survey of the Subdivisions and the East & North boundaries

Township No. 43 S *Range No.* 4 W.

Executed by Bailey & Burrill

Under joint *contract of the* 4th *day of* September *1876, in the month of* February *1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

BOOK-A-154 5

16th Examined by C. H. Cranwell C.C. 1693

Field Notes
Of
The Survey of the
East Boundary
Of
Township 43 South, Range 4½ West,
Of
The Salt Lake Meridian
Utah Territory.
By
J. G. Burrill.
Under Joint Contract of Bailey & Burrill
No. 73 dated Sept. 4th, 1876,

Surveyed Feby. 14th 1877.

87

BOOK-A-154

Township 43 North **R.** 4½ West

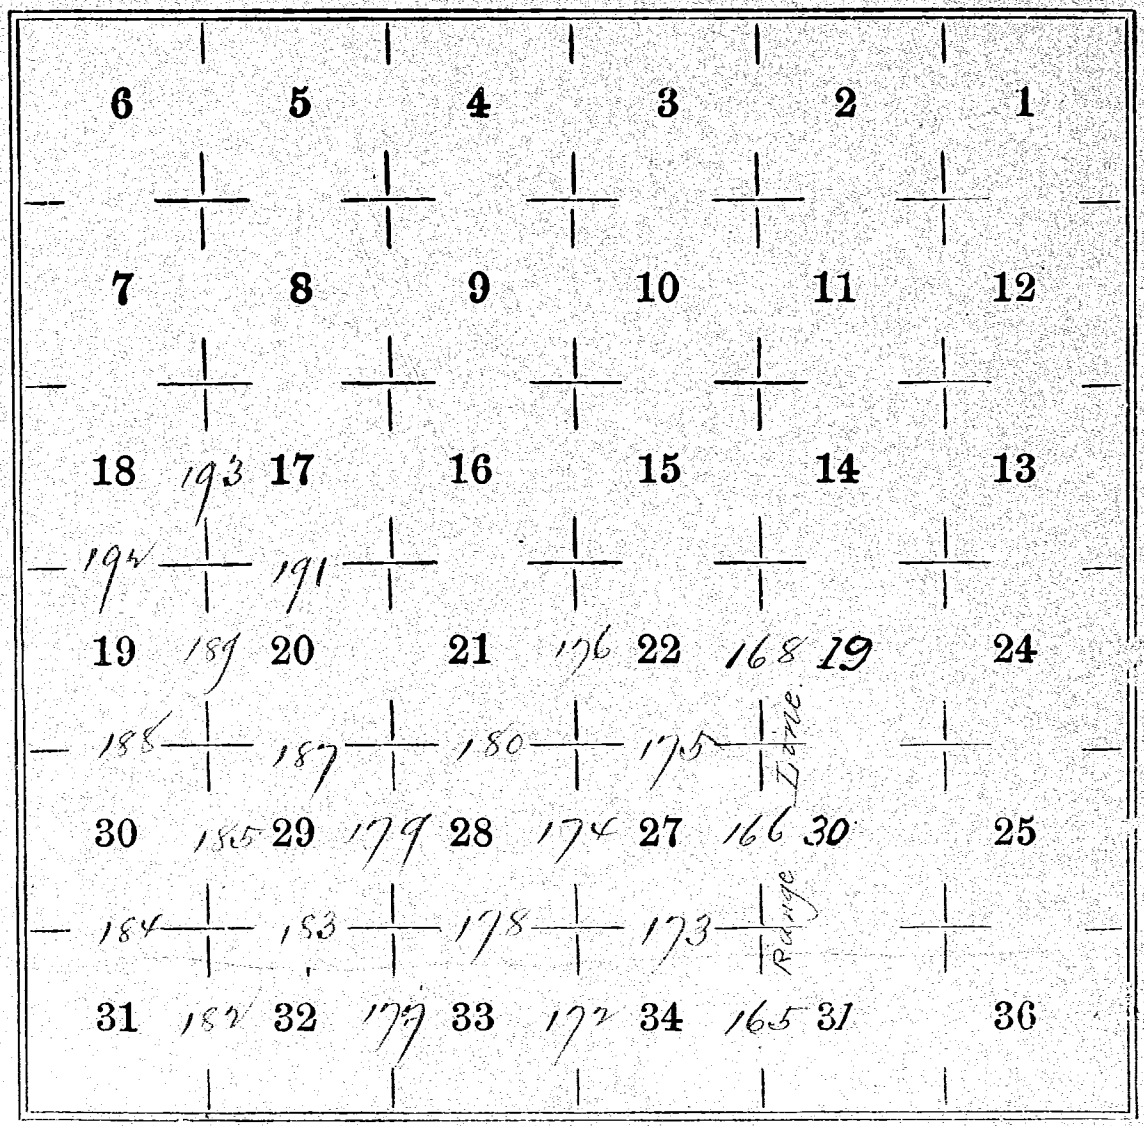

Cert. Boundary Dy. 45 S. R. 4½ W.
BOOK-A-154
Salt Lake Meridian 165

171

Chains

Survey commenced
February 14th 1874
By J. G. Burrell,
Note; For Explanation of
Range "4½ West, see
South side of Sec. 32
T. 4 S. Standard Parallel
South in 4 W.
From the established
Corner to Dps. 43 & 44
South, Ranges 4 & 4½ W.
Drun,
North, between Secs. 31 & 34.
Var. 15° 30' E

40,00 Sch Sandstone 16 x 12 x 4 in,
10 in, deep, marked 1/4 on
E. side & raised mound
of stones for 1/4 Sec. Cor,
from which
A cedar 16 in. dia. bears

8

N 45° W 50 links

1 iron

J. W. Burrell,
Feb 14th 1874

Feb 14th 1874

" "

East Boundary Pt. 4, 3 South.

		Links
Chains	4, 60 N. 30 lks, dist, marked	40,00
	½ S. B. T.	
75,00	Road bears N.W. & S.E.	
80,00	Sick Sandstone 2' x 20 x 2 in.	
	11 in, deep, marked ~~Bearing~~	48,25
	5 Notches on N, 1 on S, 6 on	56,00
	E, & 4 on W, edges, and ruined	62,50
	mound of Earth from 4	80,00
	pits each 24 x 12 x 12 in, for	
	Cor, to Secs, 27, 30, 31 & 34,	
	Land rolling,	
	Soil 1st rate	
	Timber, Cedar	

North bet Secs, 27 & 30,
Var, 15° 30' E,

3,00	Wash Drains W.	
9,70	Small cedar 5 lks, E. of line	
31,00	Road N.E. & S.W.	

Range 1½ W. Sixth Principal Meridian

Chains	
40,00	Deposited Bois du Vac and raised mound of earth from 4 pits, each 24×12×12 in, for ¼ Sec. Cor,
48,25	Wash drains S.W.
56,00	Gap road N.W. & S.E,
62,50	" " E. & W,
80,00	Set Sandstone 12×12×6 in, 8 in. deep, marked 4 notches on N, 2 on S, 6 on E & 4 on W. edges & raised mound of earth from 4 pits each 24×12×12 in, for Cor. to Secs 19, 22, 24 & 30. from which, A cedar 10 in. dia. bears N. 6 E. 76 lks. dist. marked S. 19. T. 43 S. R. 4 W. B.T. A cedar 20 in. dia. bears N. 80 W. 68 lks. dist. marked S. 22. T. 43 S. R. 4½ W. B.T.

4th Mrch

Nov 1876

4th 1877

" "

(East Boundary) Tp. 43 South, Rang

Chains	
	Land nearly level,
	Soil 1st rate,
	Timber, Scattering pine & Cedar,
	North Columbia Res, 19 & 22,
	Var, 15° 30' E,
75,00	Foot of bluff, N.E. & S.W.
40,00	The true ¼ Sec. Cor. form falling in high bluffs cannot be established, therefore 25,00 chs, marked Stationary Sandstone 3x2x2 ft above ground ¼ W.C. on W. side, with mound of stones for ¼ Sec Witness Cor,
	Land level,
	Soil 1st rate,

BOOK-A-154

Range 4½ W. Salt Lake Meridian

69

Timber, Cedar,

Note: Abandon line here,

February 15th 1877.

J. G. Burrell,

U. S. Deputy Surveyor.

For General Description & approval see end of Subdivision Notes of this Dist.

4½ West

one

J. G. Burrell

4th 1876

14th 1877

" "

BOOK-A-154 16

171

Surveyed &
Compared

C

Field Notes
of the
Subdivisions of
Township 43 South Range 4 West
Salt Lake Meridian
Utah Territory
as surveyed by
Bailey & Burrill
under joint Contract Bailey & Burrill
No. 73. – dated Sept 4th 1876

Survey commenced Feb 14th 1877

" completed " " "

Subdivisions T. 4 S. R. 4½ W.

Chains Feb 14th 1871 by J. Brown

Note: Dec. noted at end of mile on S. side sec. 32 on 7th stan. and South R. 4. W. for explanation of range 4½ W. From the cor. Secs 33 & 34 on the south boundary of Township 3 run North 80 rds sec. 33 & 34 Va. 15° 30' E.

40.00 Set Sandstone 4 x 12 x 12 ins 9 ins deep mounded ¼ on S. side & marked mound S. 4th from ¼ sec. each 5 4 x 12 x 12 ins for ¼ sec. cor. from which 4 cedars 12 ins diam. bear North 54 lks dist mound ¼ S. B. T.

Chains

40.00

40.00

8.00

40.00

BOOK-A-154

Salt Lake Meridian

chains

50.00 Set Sandstone 20×10×6 in 15 in deep notched 1 on E & 1 on S. edges raised mound of earth from pit each 24×12 ×12 in for cor. to secs. 27.28.33.34

Land rolling - Soil 2nd rate

Timber - Cedar -

East on random line

Mt. secs. 27 & 34

Va. 15° 30' E.

40.00 Set temporary ¼ sec. cor.

8.00 Road bears N.W. & S.E.

50.00 Intersect east boundary of township at cor. to secs. 27 & 34 from which

West on true line

Mt. secs. 27 & 34

40.00 Set Sandstone 18×12×6 in

Subdivisions T. 43 S., R. 14 E., Salt L

Chains, 2 inches square, marked to chains N.

N. side raised mound of stone for ~~&~~ acc. cor.

60.00 The cor. to secs. 27, 28, 33 & 34 bears

Land nearly level

Soil, Clay

Timber, a few cedars

North Pt. secs. 27 & 28

Va. 15° 30' E.

5.50 Rocky Wash drains S.

14.40 Road bears E & W.

37.50 " " "

40.00 Deposited, eight stones one marked cor

a cross (+), in mound of

earth raised from pits

each 24 x 12 x 12 ins. for 4 sec

cor boundaries

0.00 De

BOOK-A-154

95

Salt Lake Meridian

Set Standstone 20 x 10 x 5 in
15 in deep notched 1 on E & W
on S. edges Raised mound
of earth from pits each 24 x
12 x 12 in for cor. to secs 21. 22. 27 & 28.
from which
A Cedar 12 in dia. brs S. E.
No. E. 120 links dist marked
S. 27. 1.43. S. R. 4 & W. B. T.
Landlord Ariz Date
No Timber

East on random line
Mt. secs. 22 & 27
Va. 15° No. E.

Set temporary 1/4 sec. cor

Subdivisions T. 43 S. R. 42 E.

Chains	
68.80	Wash drains S.
80.00	Intersect east boundary of Township at cor. to secs 22 & 27 from which Wt on true line Wt. acc. 22 & 27
40.00	Set Sandstone 20 x 12 x 6 in. 15 in. deep mounded const. of side raised mound of earth from pits each 24 x 12 x 12 in. Wt. acc. cor.
80.00	The cor. to secs 21, 22, 27 & 28 Landlord Soil Date Timber scattering cedar

---

North 80 chains acc. 21 & 22

Var. 15° 30' E.

40.00	Iron post & mound bluff bears E. W. Pet red

Salt Lake Meridian

Chains Sandstone 24×10×3 in / 8 in deep
marked + on N. side Raised
mound of stone for + see cor.

Note: Abandon line here on
account of bluffs
Land level Dry Flats
Timber — Cedar

From the cor. to secs 32 & 33
on south boundary of Town-
ship 2 North
North Brt. secs 32 & 33
Var. 15° 30' E.

38.00 Ash drains S. W.
40.00 Pit Charred Cedar
Post 4 8×4×4 in 12 in deep
marked + S. on W. side
on mound of earth from
4 pits each 24×2×2 in for

198

Subdivisions T. 43. S. R. 4 ½ W.

Chains ¼ sec cor.

80.00 Pt Standstone 20×8×14 in
15 in deep notched 2 on E.
& 1 on S. edges & raised mound
of earth from pit & pit each 2 ft
12×12 in for cor. to secs 28. 29. 32 33
Landlevel Pole / Date
No Timber

East on random line
Pt secs 28 33
Va. 15° 30' E.

40.00 Set temporary ¼ sec cor.
50.50 Wash drains S.W. thence in wash
53.20 Trash drains N.E.
80.80 Intersect N & S line at
cor. to secs 27. 28. 33 34
from which
Pine 10 brs

Salt Lake Meridian

Chains | Ft. | Decs. 5 & 38

40.40 | Set Sandstone 18×12×3 in 12 in deep marked + on N. side | raised mound of earth from 4 pits each 24×12×12 in for ¼ Sec. Cor.

80.80 | The Cor. to Secs 28. 29. 32 & 33 | Land level - Soil Sandy | No Timber

---

North | Ft | Secs 28 & 29

Va. 15° - 30' E.

15.70 | Oak 8in | road bears S & W

24.00 | Road bears N. W. & S. E.

40.00 | Set Sandstone 17×10×7 in 10 in deep marked + on N. side | raised mound of earth from 4 pits each 24×12×12 in for ¼ Sec. Cor.

15

Subdivisions T. 43 S. R. 42 E.

Chains	
55.00	Foot of red bluffs bears N. E. & S. W.
80.00	True cor. falling in bluffs is not set therefore at 55.00 chs set Sandstone 20 x 14 x 4 in 15 in deep notched 2 on E & 2 on S. & W.C. Raised mound of stone for witness cor. to secs 20. 21. 28 & 29
	Land mostly level Soil, Gravelly Timber scattering Cedar

East on random line
Jrt secs 21 & 28
Va. 15° 30' E.
As the cor. to secs 20. 21. 28 & 29 is not set Iron

Salt Lake Meridian

East from the witness cor.
on an offset line 40.00 chs.
thence North 25.00 chs. to
40.00 on true line set temporary
1/4 sec. cor.
80.00 Intersect N & S. line at
cor. to secs 21, 22, 27 & 28
from which
West on true line
Wit. secs. 21 & 28
40.00 Deposited 5 small
rocks the largest marked
with a cross (+) in mound
of earth from which
54 x 2 x 12 in for 1/4 sec. cor.
60.00 At foot of bluff bears S.
& S.W. set charred cedar
Post 48 x 4 x 4 in 12 in deep
marked 2 notches on E & W

182

Subdivisions T. 43 S. R. 4½ W.

Chains on S. edges & W. C. fruit-
ness cor. to secs 20. 21. 28 & 29

80.00 True cor. Paint on bluffs
Land mostly level
Soil 1st rate
Timber scattering cedar

Note: Abandon line here.
Feb. 14th 1877 D. Lyttle Deputy

From the cor. to secs 31 & 32
on the south boundary
of the Township I run
North bet. secs. 31 & 32
Var. 15° E.

40.00 Set Sandstone 13×10×4 in
Sin deep marked ¼ on W.
side & raised mound of
earth from 4 pits each 24×
12×12 ins for ¼ sec. cor

63.00 Paria Road bears S. E. ¼ S. W.
61.00 Set Sandstone 18×12×3 ins 12

Salt Lake Meridian

Chains in deep notched 3 on E & W on Sedges raised mound of earth from pit each 24 x 12 x 12 in for cor. to secs 29. 30. 31 & 32.

Land level - Soil 1st Rate
No Timber -

(D) East on random line
Nrt. secs. 29 & 32 -
Va. 15° 30'. E.

30.00 Paria Road bears N. E, & W.
40.00 Set temporary 1/4 sec cor.
80.00 Intersect N & S. line of secs 29, 32, 33
Chs S. of cor. to secs. ~~29 & 32~~
from which
S. 89° 53'. W. on true line
Nrt secs. 29 & 32 -
410.00 Set Pandolone 24 x 10 x 3 in
18 in deep mounded on

18K.

Subdivisions T. 43 S. R. 24½ W.

chains N. side of raised mound of earth from pit near by 24 x 12 x 1½ in for ¼ sec. cor.

80.00 The cor. Secs. 29. 30. 31 & 32

Land, level, poor, & to Timber - none -

First commenced line Ext. secs. 30 & 31

Va. 13° 30'. E.

40.00 Set temporary ¼ sec. cor.

61.50 Road bears N & S.

70.50 Johnson's Branch 10 links wide runs S.

80.00 Intersect west boundary of at cor. Secs. 25. 30. 31 & 36 from which Set on true line Ext. secs. 30 & 31

80.

13.

40.

Salt Lake Meridian

chains 40.00	Set Sandstone 20×16×3 in 15 in deep marked ¼ on N. side for ¼ sec. cor from which Cedar 8 in dia bears N. 30. E. 40 lks. dist. Cedar 20 in dia bears S. 70. W. 36 lks. both trees marked ¼ S. B. T.
80.00	The cor. B sec 29. 30. 31 & 32 Land nearly level Soil 1st rate Timber a few cedars —
	North Brt. sec. 29 & 30 Va. 15. 30. E.
15.00	Wash drains S. W.
40.00	Set Sandstone 16×10×4 in 10 in deep marked ¼ on W. side Raised a

Subdivisions T. 4 S. R. 4½ E.

Chains		Ch
	mound of earth from which	
	pine 24 x 1. x 12 in for ¼	
	sec. cor. from which	
	Cedar 10 in dia bears S. 40	
	W. 6 lks dist.	
	Cedar 16 in dia bears S.	
	30. E. 60 lks dist both trees	3
	marked T. S. B. T.	
50.00	E. point of isolated bluff	40
70.00	Road bears N. W. & S. E.	
70.00	Set Sandstone 16 x 10 x 8 in	
	10 in diam notched S. on E.	
	& W on S. edge & raised	
	mound of stones for cor.	
	to secs 19. 20. 29 & 30. from	80
	which	
	A Pine 15 in dia bears N.	
	80. W. 65 lks dist marked	
	S. 19. T. 4 S. R. 4½ W. B. T.	
	Land S. & level, Soil & Tats	40

Salt Lake Meridian

	Chains	N. ½ Broken Soil & Rate & Timber Reduction
		East on random line
		Nt. secs. 20 & 29
		Va. 15° 30. E.
	37.00	Foot of Bluffs, thence N.
		& S. E.
	40.00	Pet temporary ¼ sec. cor.
		Offset on account of
		bluff 25.00 chs. south
		thence east on offset
		line 40.00 chs. to
	80.00	Intersect N & S. line at
		witness cor. to secs 20, 21
		28 & 29 25.00 chs S. of true
		cor. from thence
		West Nt. secs. 20 & 29 at
	40.00	On true line marked

Subdivisions T. 43 S. R. 4½ W.

Chains Sandstone in place 16×10×2 ft above ground 1/4 on S. side of mound

Stone for ¼ sec. cor.

from which

A Pine 3 in dia bears S. 80. W. 2 links distant marked

¼ S. B. T.

80.00 Pine cor. Secs. 19. 20. 29. 30

Land W. ½ level Cor. 2 Pine

80. E. ½ Bluffs " 3 Pine

Timber scattering Cedar

Post on random line

Sec. cors. 19 & 30

Bears N. 30. E.

16.25 Road to Navajo Wells

Bears N. 70. W. 1 Cedar

40.00 Pet temporary ¼ sec. cor.

Pine

40.

80.

13.

25.

40.

Salt Lake Meridian

Chains	
80.00	Intersect N. boundary of township at cor. to secs. 19 30 / from which East on true line Brt. secs. 19 & 30
40.00	Set Sandstone 16 x 10 x 6 ins 10 ins deep, marked ¼ on N. side, Pinon mound of stone for ¼ sec. cor.
70.00	The cor. to secs 19, 20, 29 & 30 Landlevel. Soil Rate Timber scattering cedars

North Brt secs 19 & 20
Va. 15° 30' E.

15.00	Foot of bluffs bears E Mr.
25.00	Top of same, descend
40.00	On slope facing N. set Sandstone 16 x 14 x 4 ins 10 ins

Subdivisions T. 4 S. R. 4½ W.

	Chains deep marked ¼ on W. side traised mound of stones for ¼ sec. cor. from which a Pine 6 in dia bears N. 25. W. 7.2 lks dist marked ¼ S. B. T.
45.00	Foot of slope trends E & S.
	W. — Enter flat —
63.60	Road (Nord) bears E & W.
80.00	On foot of E. slope set Sandstone 16 x 9 x 5 in 10 in. [illegible] deep traised mound of stone for cor. to secs 17, 18, 19, & 20 from which a Pine 10 in dia. bears N. 89 W. 75 lks dist. marked S. 18. T. 4 S. R. 4½ W. B. T. A Pine 8 in dia bears N. 25. E. 25 lks dist marked S. 17. B. T.

Salt Lake Meridian

Chains	Land, Broken, Pois. Date
	Timber. — Cedar Line
	As the line east will strike the bluffs in less than 80 chs I run East on true line Mt. Reos. 1720 Va. 15° 30' E.
10.00	Fort of perpendicular ledge bears N. W. 75 E.
10.00	Falls in bluffs therefrom at 10.00 chs set a charred cedar Stake 4 8 x 4 x 4 in 12 in deep raised mound of earth from pits each 24 x 12 x 12 in & marked 1/4 V V. C. on N. side for 1/4 sec. cor.
	Note: In landon line here —

77.

77.

197

Subdivisions T. 43 S. R. 42 E. W.

Chains	Land, Notes and Sketches	Ch
	Timber scattering Pine Cedar	
X	Post on random line	80.
	Brt. secs. 1879	
	Var. 15° 30. E.	
40.00	Set temporary ¼ sec cor.	
58.00	Head Cañon Brook 10 lks	
	wide 8. inds. runs S.W.	
63.50	Point of Ridge runs N.E. & S.W.	
67.50	Top of Dome	10.
71.00	Leave " runs S. 3 chs & W.	40.
80.00	Intersect N. boundary	
	of Township at cor. to secs.	
	1879 from which	
	East on true line	Not
	Brt. secs. 1879	
40.00	Set Sandstone 18 x 8 x 6 in	
	12 inds. scribed & mounded ¼ cor	

Salt Lake Meridian

Chains	N. side raised mound of earth bounded by 2 4x12x12 in for 1/4 sec. cor.
80.00	The cor. to secs. 17. 18. 1920 Land level - Soil Dale Timber - a few scattering pines on E. end -
	North bt. secs. 17 & 18. Va. 15° 30' E.
10.00	Foot of ledge bears S 8 W.
40.00	In bluffs set Sandstone 13 x 9 x 6 in 8 in deep, marked 1/4 on N. side raised mound of stone for 1/4 sec cor.
Note:	I abandon line here - Land mostly broken Soil 2 Dale Timber - Cedar Pine

194

Subdivisions T. 43 S. R. 42 E.

General Description -

The surveyed portion of this township consists of 1st rate quality and can be irrigated from Flood Canon & Johnson's creek - Near the head of Flood Canon about 3 miles in a northeasterly direction from the S.W. cor. of sec. 18. are situated several fresh water lakes which can also be utilized for irrigating purposes -

The lands are agricultural -

Feb 14th 1877 T. C. Bailey
U. S. Dep. Surv.

BOOK-A-154

195

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah June 21st 1877

The foregoing field notes of the survey of the Exteriors & Subdivisions of *Township No.* 43 S *Range No.* 4½ West *Executed by* Bailey & Burrill *Under* joint *contract of the* 4th *day of* September 1876, *in the month of* February 1877, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

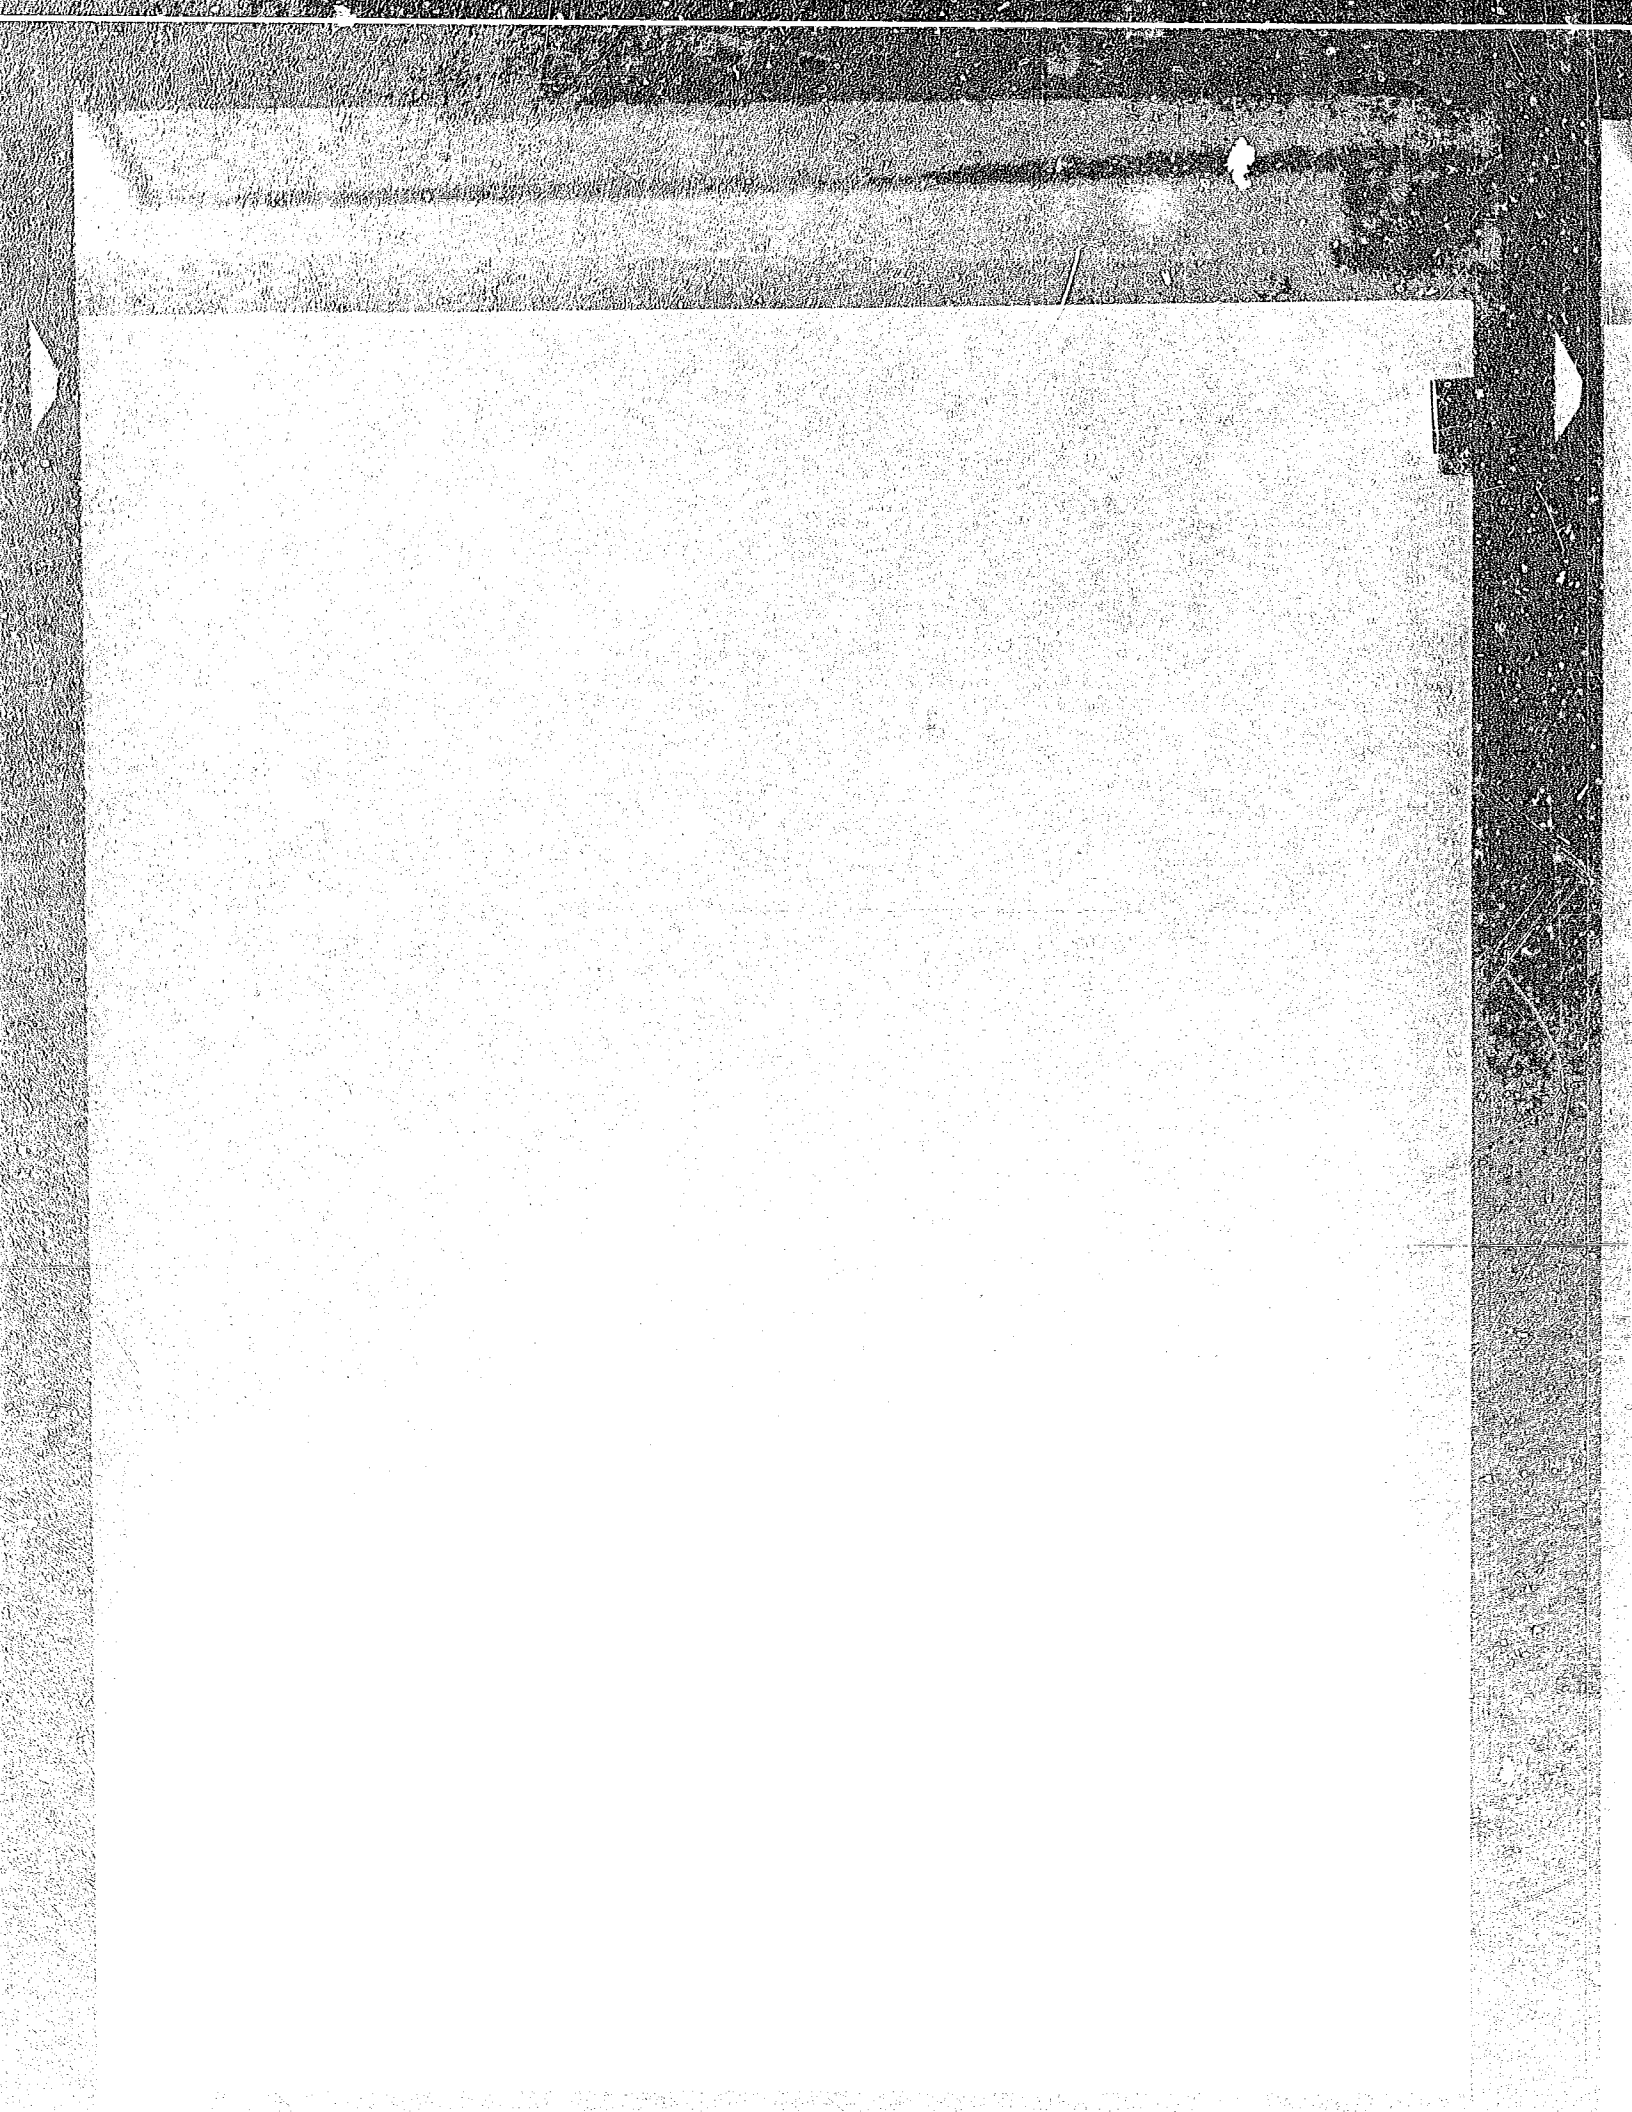

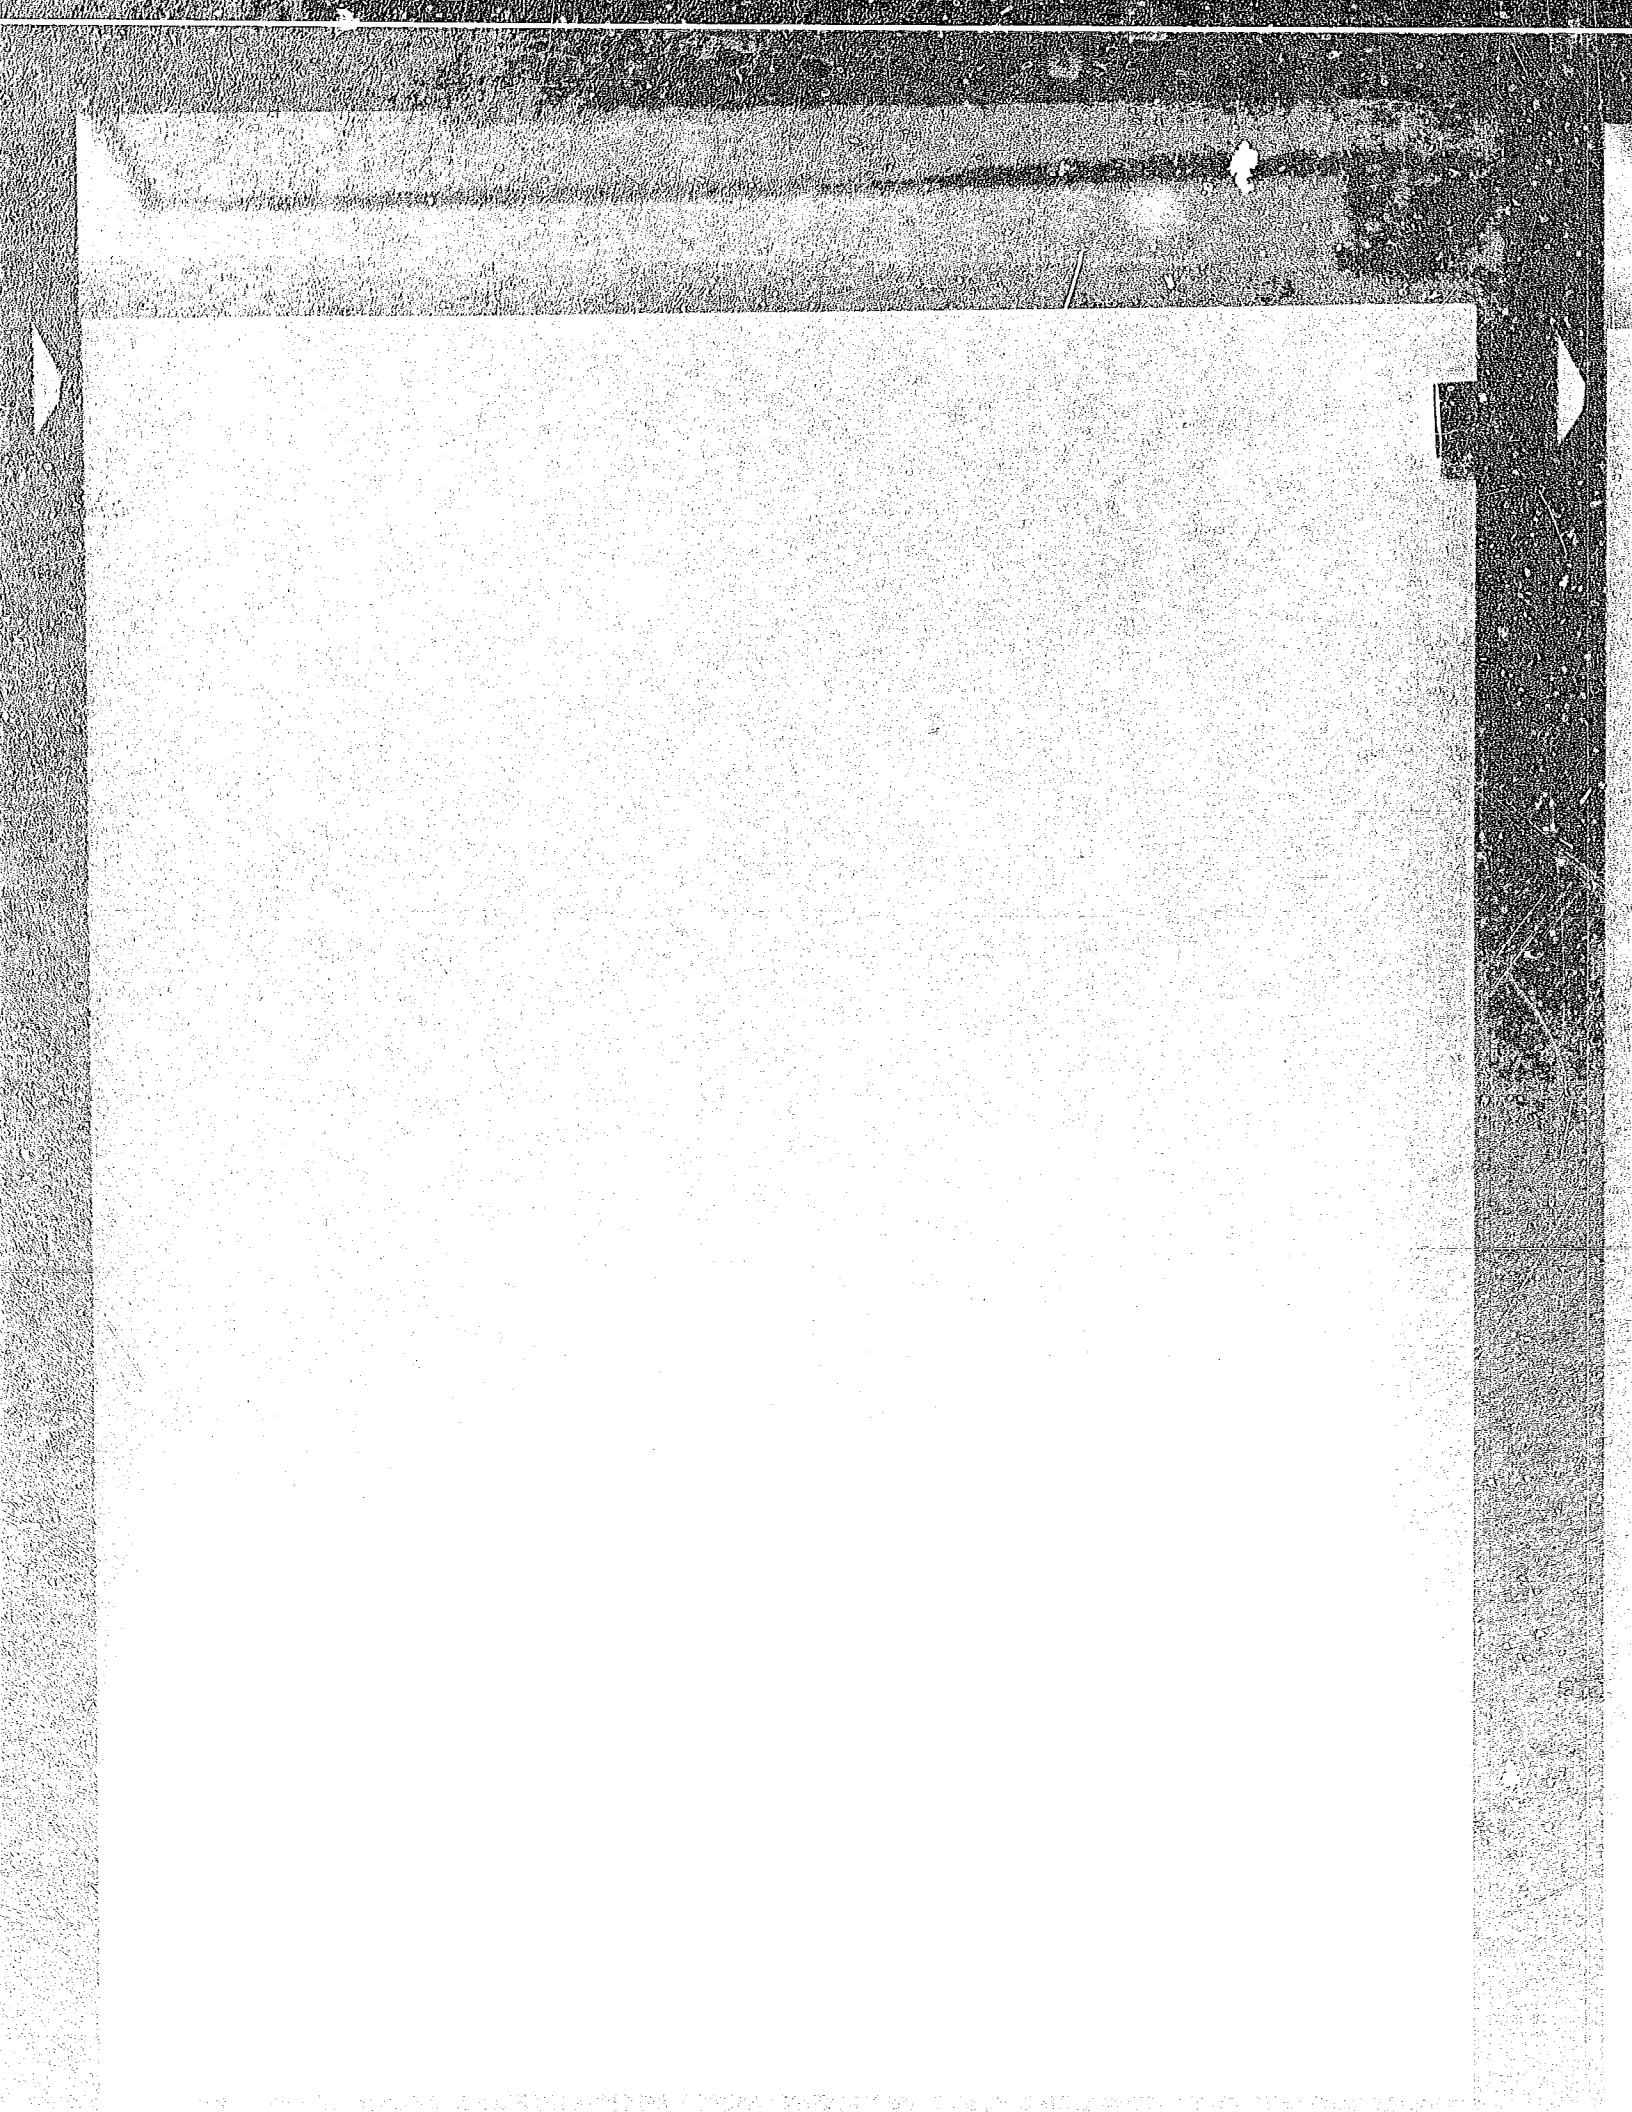

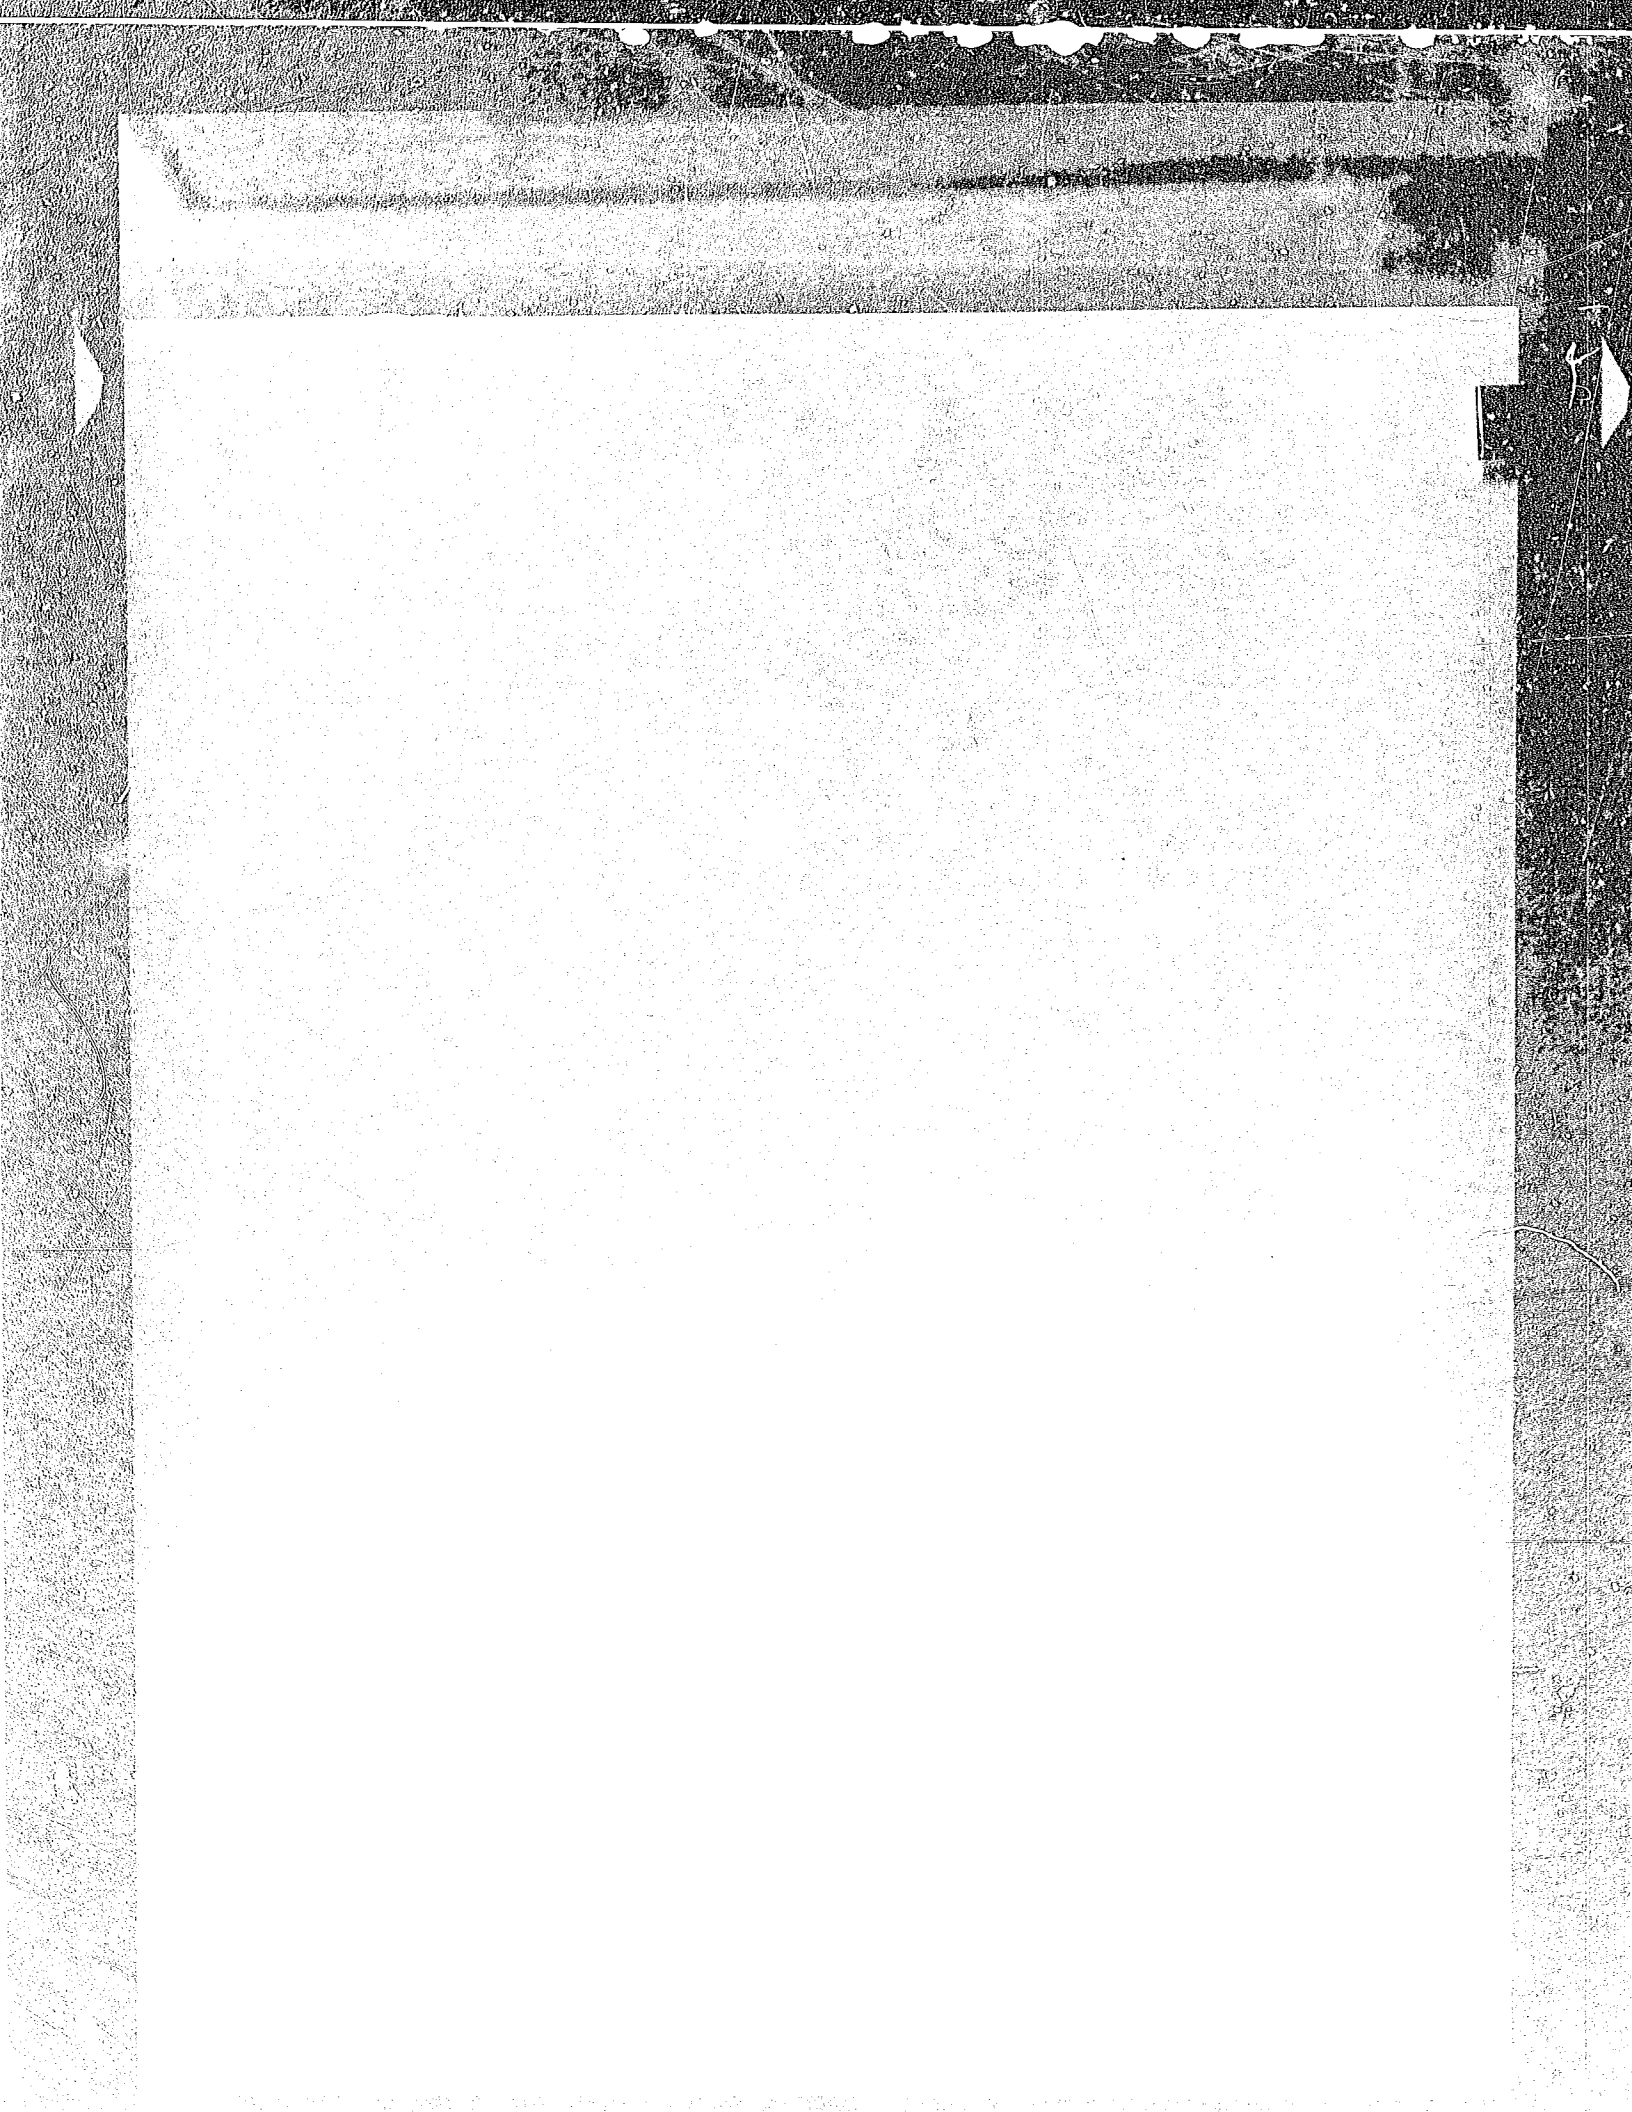

BOOK-A-154 7 169

17 Examined by C. H. Cramwell C.C.

Field Notes
of the
East & North Boundaries
of
Township 43 South Range 5 West
Salt Lake Meridian
Territory of Utah
as surveyed by
J. C. Bailey
under joint contract Bailey & Burrid
No 73. - dated Sept 4th 1876.

Survey commenced Feb 8th 1877

" completed " 8th "

BOOK-A-154

Township 43 South **R.** 5 West

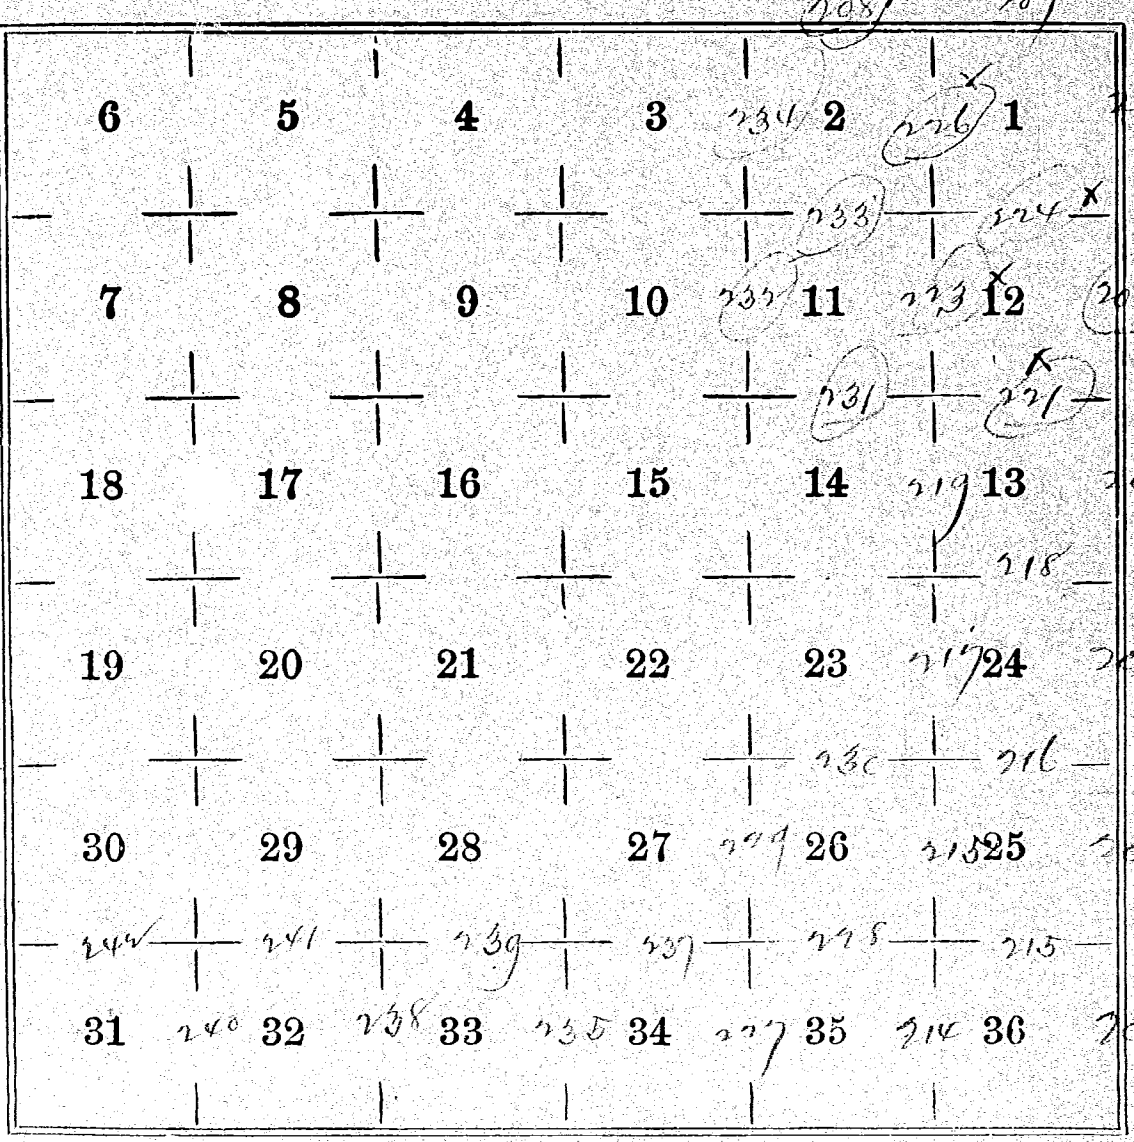

7.00

East Boundary T. 43 S. R. 5 E.

Chains

Fd & cor 1877 by T. Co Bailey

From the established cor

T's 43 & 44 S. R's 4 & 5 E. (for explanat

of which see field notes of

S. side sec. 32, 7th Standard South R. 4

& 5 E.

North 80 ch. secs. 31 & 36.

Va. 15° 30' E.

Dr. ocend.

18.40 Johnson's Brick 10 ch. S. side Rund

40.00 Deposited small sandstone

marked with a cross (+) raise

mound of earth from 4 to 5 ft. each

24 x 12 x 12 in. for 1/4 sec. cor.

43.10 Oak 6" Road Brass E & W

80.00 Set Sandstone 24 x 12 x 3 in. 1

deep notched 1 on S. & 5 on W. edg

raised mound of earth from 3

ft. each 24 x 12 x 12 in. for cor. Bacc

Da

Chains

19.75

23.00

28.50

40.00

2.00

10.00

Park Lake Meridian

Chains, Land, nearly level, soil, Fair
Timber - scattering cedar & pine

North bet. secs. 28 & 30
Var 15° 30' E.

19.75 Johnsons Cor. 10 lks wide within ditch pits
23.00 " " " " " " S.T.
28.50 " " " " " " E.E.
30.00 Set Sandstone 16x10x10 ins 11 ins deep
marked 1/4 on N. side & raised mound
of earth from 4 pits each 24x12x12 ins for
1/4 sec. cor.
32.00 Johnsons Oak Ria Road bears N 75 E.
30.00 Set Sandstone 16x12x10 ins 11 ins deep
notched 1/4 on E & W sides & raised
mound of earth from 4 pits each
24x12x12 ins for cor. to secs 19, 24, 29 & 30
Land - level - soil Fair -
Tim Scattering -

E. 307 Boundary N.4°.5.W.5.½.

chains North Rt. secs. 19 & 24 chains

Va. 15°.30'.E.

40.00 Set Chamfered Cedar Post 4×4×4 ft
in 12 in deep marked 1/4 S. on N. 56.50
side in mound of earth from 4
pits each 24×12×12 in for 1/4 sec. cor.

57.00 Iron Bark Rail Road bears N.W. 8 S.

75.00 Dry bed of Flood basin Brick drains N

78.25 Flood basin Road - bears E & W.

80.00 Set Sandstone 12×7×7 in 8 in deep
notched 3 on N & S. edges raised
mound of earth from 4 pits each
24×12×12 in for cor. secs 13. 18. 1924
Standard - Soil Rates -
1.5 Cinder -

North, Rt. secs. 13 & 18 50.00

Va. 15°.30'.E.

100.00 Set Sandstone 15×8×3 in 12 in de

Part Lake Meridian

chains marked 1/4 on N. side raised mound
of earth from 4 pits each 2 4 x 12 x 12 in
for 1/4 sec. cor.

56.50 Foot of perpendicular sandstone
bluffs bears N. W. W. S. E. where
set sandstone 16 x 8 x 7 in 11 in deep
marked 2 notches on N & S edges
& W. C. raised mound of stone for cor.
mon cor. to secs. 7. 12. 13 & 18 from which
Cedar 14 in dia. bears S. 10° E 35 lks dist
marked S. 18. 7. 43. S. R. 4 E. W. B. T. W. C.
A Cedar 14 in dia bears S. 6. W. 40 lks
dist. marked S. 13. 7. 43. S. R. 5. W. B. T. W. C.
Then measure 21.00 chs W. & 23.50 chs
North to

50.00 21.00 chs Met & true cor. Joint
to sec. Set a sandstone 16 x 12 x 5
in. 11 in deep marked W. C. 92 notches on
N. & S. on S. edges & raised mound of stone

Chains

for witness cor. to secs. 7. 12. 13 & 18
from which
A cedar 16 in dia. bears East 4 lks dist. marked W. C. B. T.
Land mostly level - soil Fair -
Timber a few scattering cedar -

North bet. secs. 7 & 12
Va. 15° 30' E.
It being impracticable to run the line in place therefor from the witness cor. to secs. 7. 12. 13 & 18 situated 21.00 chs west of true cor. point I measure 19.00 chs west thence 40.00 chs north to

40.00 - 40.00 chs west of true cor. point
Set Sandstone 18 x 8 x 4 in 12 inches marked 1/4 W. C. on W. side raised 1/4 sec mound of stone for witness, cor.

Chains

chains Thence to avoid bluffs measure South 1.50 chs then West 25.00 chs at 16.25 chs on this offset line I note the following objects.
William D. Johnson's House bears N. 140. W. 25 lks dist. [3 smaller cabins on S. side & 1 on N. side of same]
Schoolhouse bears N. 35° 30 W. 6.38 chs. dist. I. W. Seamans House bears N. 3° 20. E. 13.90 chs. dist. [a shingle & lath Mill 3.00 chs N.E. of this house]
Charles Shumways house bears N. 39.45° E. 23.40 chs. dist.
John Beattles house bears N. 70. E. 7.00 chs dist. - Benj Davis house bears S. 76. 30. E. 7.84 chs. dist William Davis' house bears S. 61. E. 9.40 chs dist. - Sophi Johnson's house bears S. 13. 45° E. 4.60 chs dist. - Elmer Johnson's

East Boundary T. 43 S. R. 5 W.

Chains house bears S. 12° 15' E. 8.50 chs dist.
these 84 cabins situated between the
schoolhouse & Wm D. Johnson's house
from the settlement of Johnson or
Johnsonville thence
North 61.50 chs thence East 65.00 chs
thence South 20.00 chs to
80.00 the true cor. point, where I set
charred cedar stake 4 x 4 x 4 ins
12 ins deep, stones on N. & S.
sides raised mound of earth
from 4 pits each 24 x 12 x 12 ins for co
cor secs 1. 6. 7 & 12
Land high brush - soil 2nd rate
Timber - scattering cedar & o

North 80 chs to secs 1 & 6
Va 15° 30' E.
40.00 Set charred cedar Post 48 x 40.00

Salt Lake Meridian 207

marked 1/4 S. on W. side

chains 4 x 4 x 4 in 12 in deep, raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 cor.

80.00 Set Charred Cedar Post 4 8 x 4 x 4 in 12 in deep, raised mound of earth from 4 pits each 24 x 12 x 12 in for cor. to T. 5 & 6 S., R. 4 & 5 W. Land high brush, Dry & rocky - Timber scattering Cedar & Pine

---

Note: As the west portion of this township falls in the mountains and is not surveyed, therefor from the cor. to T. 5 & 6 S. R. 4 & 5 W. Drum Station true line

Set pcs 1836

Va. 16° 30' E.

40.00 Set Charred Cedar Post 4 8 x 4 x 4

North Boundary T. 48 S. R. 5 W.

Chains in 12 in deep marked T 4 S. on N. side & raised mound of earth from 4 pits each 24 × 12 × 12 in. for 1/4 sec. cor.

74.00 Found
80.00 Set charred cedar post 48 × 4 × 4 in. 12 in deep marked 2 notches on E & W edges & raised mound of stone for cor. to secs 1, 2, 35 & 36 Land mostly level high brush Soil & Rock -
Timber scattering cedar & pine

West on true line
Bet secs 2 & 35 -

Va. 15° 30. E.

From the above cor. I take the following bearing trees Brs N. 20° 15. W.

1.75 Fence at foot of hand slope brs N.
and under field.

BOOK-A-154

Salt Lake Meridian 209

Chains

6.90 Fence bears N & S. - leave field,

20.76 Brans house bears N. 21. 40. E.

Sextus Johnson's house bears N. 43. 20. W.

Two other houses bear N. 6. 15. E.

28.80 Road bears N. W. & S. E.

30.35 Fence " " "

40.00 Drove Charred Cedar Stake 48 x 4 x 4 in 12 in deep marked 1/4 S. on N. side -

Marshy ground. mound & pits impracticable -

The Two houses noted about bear N. 28. E.

49.00 Foot of Sand Hills bears N & S.

65.00 Foot of Perpendicular Ledge & Bluffs

80.00 Falling in Bluffs cannot be established Therefore at 65.00 chs set Limestone 16 x 8 x 8 in 12 in deep notched 2 on E & 4 on N. edges & W. C. & raised mound of stone for cor. to secs 2. 3. 34 & 35 from which

Nort 210 North Boundary T. 4 S. R. 5 W. Salt

Chains Chains Cedar 15 in dia bears S. 85.
300 lks dist Marked S. 2. T. 4.
S. R. B.T. W. C.
Land mostly level
Soil 1st Rate
Timber a few Cedar on W. end

74.00
80.00

Note: Is band line true

Feb 8th 1877 T. Co Bailey

Note: For "General Description
~~Explanatory~~ see end of sub
division notes this Township

1.75

BOOK-A-154

Salt Lake Meridian

BOOK-A-154 8 718

Field Notes
of the
Subdivision
Township 43 South Range 5 West
of the
Salt Lake Meridian
as surveyed by
Bailey & Burrill

No 73. – dated Sept 4th 1876

Survey commenced Feb 9th 1877.
" completed " 10th 1877.

214.

Subdivision T. 43. S. R. 5. W.

Feb. 9th 1911 by J. G. Bennett

Chains From the cor. to secs 35 & 36 on the south boundary of township North bet. secs. 35 & 36

Va. 15° 30' E.

21.00 Cahrie road bears N.E. 15 li.

40.00 Set Sandstone 14 x 10 x 3 in 9 in deep, marked + on N. side and raised mound of earth 4 ft. 4 ft. each 24 x 12 x 12 in for 1/4 sec. cor.

80.00 Set Charred Cedar Post 48 x 4 x 4 in 12 in deep, notched 1 on E & S. edges raised mound of earth 4 ft. 4 ft. each 24 x 12 x 12 in for cor to secs 25. 26. 35 & 36.

Land level - fair 1st rate - No Timber.

East on random line bet secs 25 & 36

Salt Lake Meridian

Chains	
	Va. 15°, 30' E.
40.00	Set temporary 1/4 sec. cor.
79.90	Intersect E. boundary of township 30 Rs S. of cor. Secs 25 & 36 from which S. 89° 47' W. on true line 81 Secs 25 & 36.
39.95	Deposited bois du vac in mound of earth from mt. pit 12 each 24 x 12 x 12 in for 1/4 sec. cor.
79.90	The cor. to secs. 25. 26. 35 & 36 Land level - dark, Salts - No Timber -

North 81 Chains Secs 25 & 36

Va. 15°, 30' E.

39.60	Road bears N. E. & S. W.
40.00	Set Planed stone 20 x 14 x 4 in 15 in deep Traced mound of earth

216.

Subdivisions T. 43 S. R. 5 W.

Chains from 4 pits each 24 × 12 × 12 in for
4 dec. cor.

80.00 Set Standstone 15 × 10 × 8 in 10
notched 1 on E & 2 on S. edges
in deep, mound of
earth from 4 pits each 24 × 12 ×
12 in for cor. to secs 23, 24, 25 & 26
Land level - hilly
to Winter -

East on random line
bet secs 24 & 25
Va. 15° 30' E.
23.25 Road to Johnsons bars N.E. & S.W.
40.00 Set temporary 1/4 sec. cor.
56.75 Johnsons creek 15 lks wide runs S.
69.15 Johnsen & Pahrin road bears N.W. & S.E.
80.00 Intersect E. boundary of Town-
ship at cor. to secs 24 & 25 from which
West on true line
bet secs 24 & 25

Salt Lake Meridian

Chains

40.00 Deposited small rock marked with a cross (+) Raised mound of earth from 4 pits each 24 x 12 x 12 in. for 4 sec. cor.

80.00 The cor. to secs 2, 3, 24, 25 T 2 S

Land level - Soil State -

No Timber -

North bet sec 25 T 24

Va. 15° 30' E.

36.50 Road bears N. W & S. E.

40.00 Set Sandstone 18 x 10 x 3 in 12 in deep marked + on W. side Raised mound of earth from 4 pits each 24 x 12 x 12 in for 4 sec. cor.

60.00 East point of bluff projection

80.00 In gulch drains S. E. at Sandstone 18 x 10 x 3 in 12 in deep no Stones on E. & W. on S. edges Raised mound of stone

Subdivisions T. 4 S. R. 3. W.

Chains for cor. & secs. 13. 14. 23 & 24

Sand, level. Part bad.

Timber after scattering cedar.

East on random line

Set secs 13 & 24

Var. 15° 30' E.

It being impracticable to run

line in place on account of

bluffs, I therefor measured 20

chs S. thence 60 chs E. thence 20

chs N. to

60.00 on line in place, a small cañon

Inch head S.E. drains N.W.

61.00 Top of hard clay bars N. 5 chs

63.50 Top of ledge bluffs, bars N & S.

70.50 Road bears N & S.

73.50 Johnson creek 12 chs wide bears S.

80.00 Intersect E. boundary of township

BOOK-A-154

Salt Lake Meridian

Chains at cor. Secs 13 & 24 from which
Post on true line
bet secs 13 & 24
40.00 Falling in Bluffs cannot be set
therefrom at 20.00 chs set Sandstone
24 x 16 x 2in 18in deep marked W.C.
on N. side & raised mound of stone
for witness to sec. cor.
80.00 Ore cor. Secs. 13, 14, 23 & 24
Sand, level - Dark Soil
S. 20.00 chs, balance in mountains -
Pinon, Cedar & Pine on mountains -

North bet secs 13 & 24
Va. 15° 30. E.
40.00 Top of rise undulating Bluffs
with Chaining being impracticable and
40.00 falling in Bluffs, therefore

(10) 3720

Subdivisions T. 43 S. R. 37 E.

Chains at 10.00 chs set sandstone 14×11×10 in. 9 in. deep, marked ¼ V.C. on E. side, raised mound of stones for witness ¼ sec. cor. Then proceed to the witness cor. 81 links west of the cor. Does 13 N 13 W on the E. boundary of the Township & Measure 19 chs. West thence

38.50 " North "

40.00 " West "

18.50 " South to a point

20.00 N. of

80.00 the true cor. Joint being impracticable to establish thereon at 20.00 chs N. of said point I set sandstone 16×12×4 in. 10 in. deep marked ¼ V.V. notched 1 on E. 4 on S. edges ¼ V.C. raised mound stones for witness cor. Does. N. 12. W. 14 from which

Ch

40.00

42.2

Salt Lake Meridian

Chains Cedar Hill bears S. 12.5. E. 23 lks
Marked S. 12. 7, 48. S. R. S. M.
dist. W. C. B. T.
Land mostly mountainous
Soil & Rock
Timber Cedar & Pine

East on random line
Bl. accs 13 & 13
Var. 19° 30' E.
Unable to run & establish
a place due East from the
witness cor. 30.00 chs N. of cor. point
of accs 11, 12, 13 & 14 & measure
North 18.50 chs thence
East 40.00 " "
South 38.50 " to
40.00 On line in place pile of stone
ornamented accs. cor.
42.20 Foot of bluffs bears S.

Subdivisions T. 4 S. R. 2 E.

Chains	
46.20	Johnson's Road bears N. & S.
50.70	Johnson's Creek 10 lks wide runs S.
53.50	Canon road bears N. W. & S. E.
59.00	Foot of Bluff bears N. W. & S. E.
80.00	Not being able therefore to intersect the E. boundary of Township 3 S. in its proper place, I run 37 links at witness cor. 21 chs N. of true cor. Joint of sec 24 & 13 from which Post on true line bears N. E. sec 13 & 24 & 13
40.00	Set Red Sandstone 26 x 14 x 2½ in 19 in deep, marked ¼ on N. side Raised mound of stone for ¼ sec. cor. from which A Pine 5 in dia bears N. 45 W. 12 lks dist. A Cedar 11 in dia. bears S. 30 W. 18 lks dist both trees marked B. T.

Cha	
80.	
20.	
40.	
45.	
65.	
77.	
80.	

BOOK-A-154

Salt Lake Meridian

Chains	
80.00	The cor. to secs 11, 12, 13 & 14. Sandstone in cairn of flat Stones. Bears Timber Cedar Pine on mountains Feb 9th 1877 J. H. Parish

---

North between 11 & 12

Va. 15° 30' E.

20.00	Witness cor. to secs 11, 12, 13 & 14
40.00	Pet Sandstone 16 x 12 x 5 in 10 in deep marked + on N. side raised mound of stone for + to sec. cor.
115.00	Enters on sand hills bears E & S.W.
65.00	Johnson's fence at foot of hills 10 links wide runs S. E.
77.70	Field fence bears N. 25. 20 W & S. 25. 20 E. enters field -
80.00	Pet Sandstone 15 x 14 x 5 in 10 in deep notched one on E. & S. edges

Subdivisions T. 43 S. R. 23 W.

Chains	Raised mound of earth from 4 pits each 24×12×12 in. for cor.	Chs
	6 secs 1.2.11 & 12	
	Land mostly level, soil Sandy	
	No Timber	80.
	East on random line	
	12 secs 1 & 12	40.
	Va. 15° 30' E.	
1.30	Road runs N & S.	
8.40	Spring runs S.	
12.00	" " "	
12.30	Fence runs N 25 W & S 25 E.	
16.00	Spring branch runs S.	80.
30.00	Foot of bluffs runs N & S.	
	For the Chaining being impracticable on accounto	

Salt Lake Meridian

chains of the broken nature of the ground I measure North 20.00 chs thence East 60.00 chs thence South 20.00 chs to

80.00 Intersect east boundary of Township at cor. 2 secs 1 & 12 from which

Post on true line set secs 1 & 12

40.00 Falling in broken ground not set thence at 60.00 chs or 20.00 chs west of true cor. point set Sandstone 20 x 5 x 5 in 15 in deep marked ¼ W. C. on N. side raised mound of stones for ¼ lines & sec. cor.

80.00 True cor. 5 secs 1, 2, 11 & 12

Land level on N. & balance broken Soil 1st & 2nd rate

Timber Cedar & Pine on E. 60.00 chs

Subdivisions T. 43. S. of R. 5. W.

Chains	North on random line	Ch
	bet. secs 1 & 2	
	Var. 15° 30'. E.	
3.70	Stone bars N. W. & S. E.	"
19.00	Spring branch runs S. E.	"
25.50	" " " "	"
29.60	Fence bars N 25 W.	
40.00	Set temporary ¼ sec cor.	
49.00	Fence bars N 65 E.	
76.00	Sear bottom enters and closes	3.2
80.00	Intersect S. boundary of township at cor. to secs 1 & 2 from which	38.8 40.0
	North on true line	
	bet. secs 1 & 2	
40.00	Drive charred cedar post 4 & 4 x 4 in 12 in deep in mound Pits impracticable ground mounted ¼ S.	65. 80.0 for ¼ Sec. Cor.
80.00	The cor. to secs 1, 2, 11 & 12	

BOOK-A-154

Chains, Land, Level — Pole, Stake — No Chains —

From the cor. Secs 34 & 35 on the south boundary of township North Rt. secs 34 & 35 —

Va. 15°. 30'. E.

3.25 Road bears E & W.

38.80 Johnson Road bears N.E. & S.W.

40.00 Set Charred Cedar Stake marked + S. on N. side 4 ft × 4 × 4 in 12 in deep, Mounded a mound of earth from 4 pits 2 ft × 12 × 12 in for 1/4 Sec. Cor.

65.00 Creek draws E.

80.00 Set Sandstone 24 × 12 × 6 in 18 in deep notched 2 on E. & 1 on S. edges Mounded mound of earth from 4

Subdivisions T. 43. S. R. 5. W.

Chains Set stake 24×2×2 in. fm cor. to secs. 26. 27. 34 & 35.

Land, level - soil 1st rate -

No Timber -

East on random line

Int. secs. 26 & 35

Va. 15°. 30'. E.

40.00 Set Temp. ¼ sec. cor.

42.25 Johnson's Road bears N. 6. 05. W.

80.00 Intersect 8 S. line at cor. to secs 25 26 35 & 36 from which

West on true line

Int. secs. 26 & 35

40.00 Set Chained cedar post 48×4 on N. side. ×4 ins 12 ins deep mounded & S. & pits from which raised mound of earth 24×12×12 in

Salt Lake Meridian 29

Chains Notes Rec. for.

80.00 Thence Secs 26.27.34 & 35
Sandstone Soil & Sage
No Timber

North Ptr. Secs. 26 & 27
Va. 15° 30' E.

15.75 Wash drains S. E.

39.00 Wash drains at foot of
Bluffs Grass & Sage.

40.00 Set Sandstone 16x12x6 in. with deep
mound & W. Pits & raised mound
& stone for & Rec. for. further drainage
ordinarily impracticable
Measure 25.00 chs E. Thence North
40.00 chs to point 25.00 East of

80.00 Thence West 80.00 chs to Set

730

Subdivisions T. 43 S. R. 5 W.

Chains

Sandstone 18x12x8 in 12 in deep
notched 2 on E & S. edges W.C. mound
mound of stone for witness cor. to
secs. 22, 23. 2627

Sand S. ½ Sec'd. Pine Bates
N. ½ in Mountains Pine Bates
Mesquite Pine & Cedar

East on random line
to secs. 2326
Va. 15°. 30'. E.

25.00 Pine witness cor. to secs 22. 23. 2627
40.00 Pet temp. to sec. cor.
52.00 Sand Cedar
80.00 Intersect N & S. line at cor. to secs ~~26~~
23 24 25 26
~~26~~ from which
West on true line

BOOK-A-154

Salt Lake Meridian

Chains	Lot 2 secs 23 & 26
40.00	Set Sandstone 16x12x8 in 10 in deep marked 1/4 on N. side Mound of stone for 1/4 sec. cor. from which A Pine 8 in dia bears N. 50 E. 80 lks dist A Pine 8 " " " West 60 lks dist both trees marked 1/4 S. B. T.
80.00	Blaze for Sec cor. to secs 22, 23, 26 & 27 Land, mostly level, soil & data Timber scattering cedar

---

Note: Land on this line here on account of mountains & run

West on true line

Lot 2 secs 1 & 12

Va. 15° 30' E.

From this corner cor. 20.00 chs N. of

Subdivisions T. 43 S. R. 5 W.

Obtains cor. point to secs 11, 12, 13 & 14 I
measure West on offset line
40.00 chs thence north 20.00 chs to
40.00 On true line in place set sand-
stone 11x10x6 in 6 in deep marked
¼ on N. side & raised mound of stone
for ¼ sec. cor:
80.00 Set sandstone 15x7x6 in 10 in deep
notched 2 on E. & 4 on S. edges & raised
mound of stone for cor to secs 10, 11, 14 & 15;
Land undulating, soil 2nd rate
Timber post oak, pine & cedar

North 80 chs. 1881
Va. 15° 30' E.

40.00 Set charred Cedar post 4 ft x 4 x 4 in
on W. side
12 in deep marked ¼ S. 1/1 raised

Salt Lake Meridian

chains mound of earth from 4 pits each
24×12×12 in for 4 sec. cor.

8.00 Pt. Set Cedar Post 48×4×4 in
12 in deep notched 2 on E & S on S.
edges Raised Mound of earth
from 4 pits each 24×12×12 in for cor. to
secs 2, 3, 10 & 11

Land mostly Broken
Soil Sandy
Timber scattering Pine & Cedar

East on random line
Set. secs 2 & 11
Var. 15° 30' E.

1.10.00 At 80 ch. crossed Rotten Creek S.W.
set Stone for 4 sec. cor.

57.50 Crossed Rotten Creek low sand ridge

Subdivisional Lines T. 24 S. R. 12 E. S. M.

Chains Spur bears N. 5.00 chs

67.00 Enter canon bottom & Spring marsh
head of N. fork of Johnson Creek.

71.00 Leave Spring marsh Enter mas S.

78.90 Fence bears N. 25. W & S. 25. E.

80.00 Intersect N & S. line at cor. to sec.
1, 2, 11 & 12 — from which
Ash on true line

Set. accs 2 & 11
40.00 Set White Sandstone 12x8x6 in. & in ground
marked 1/4 on N. side & mound of
stone for 1/4 sec. cor.
80.00 The cor. to accs. 2. 3. 10 & 11
Found in L. Oak, 18 ins
Timber fire scattering Cedar on N. end —

North on random line
Set. accs 2 & 3

Var. 15° 30' E.

32.00 Enter hollow drains E.
40.00 Set temp. 1/4 sec. cor.
49.00 Pear hollow enters pond lies from E. & S.
60.00 Overcrossed Bluff S. Offset 1.50

Salt Lake Meridian.

80.00 Chains E. thence N. 20.00 chs. to
Intersect N. boundary of Township
at corner on W. bank of river.
Limit of sec. 23 from which
South
S. 0° 07' E. on true line
Ft. Sec. 23
40.00 Set Sandstone 18x12x3 in ground 2 ft.
deep marked 1/4 on N. side Raised
mound of stone for 1/4 sec. cor.
80.00 River. Sec. 2. 3. 10 & 11
Undulating -
Soil 1st rate -
Timber cottonwood & cedar -
Feb 10th 1877. C. Bailey

Feb 10th 1877 by J. W. Lewis
From the cor. Secs. 33 & 34 on the
south boundary of Township
North, Rt. secs. 33 & 34.

Observations T. 43. S. R. 5. W.

Chains		
	Va. 15° 30' E.	
40.00	Pob Sandstone 18×6×6 in 12 in	
	deep marked on N. side mound	
	of stone for sec. cor.	
53.50	Hackberries S. E.	
55.00	Foot of bluffs bears S W.	40.
80.00	Fall in bluffs commences -	
	tablished, therefore at 55.00 ch	51.
	set sandstone 18×18×12 in 12 in	56.
	deep notched 3 on E 81	69.
	on S. edge W.C. mound	80.
	stone for witness cor. to sec 27. R. 33 W 34	
	Land level - soil Flat	
	& timber scattering pine & cedar	40.

East on standard line

bet secs 27 34

80.

BOOK-A-154

Salt Lake Meridian

Chains	
	Va 15° 30' E.
	From the witness cor. 25.00 chs
	south of cor. Point to secs 27, 28, 33 & 34
	I measure East 40.00 chs thence
	North 25.00 chs to
40.00	an old iron place where I set
	temp. 1/4 sec. cor.
51.60	Flash drains S.
56.60	" " "
69.00	" " S.E.
80.32	Intersect N. & S. line at corner to secs
	27 & 34 from which
	West one true line
	bears secs 27 & 34
40.16	Set a sandstone 14 x 8 x 5 in. ground
	reference mound of stone from sec. cor.
	Blaze
80.32	The cor. to secs 27, 28, 33 & 34
	Land level - dry, Flats

Subdivisions T. 43 S. R. 5 W.

Chains & scalloping cedar on E. ½
West ½ falls in Mountains
Note: I abandon line here.

From the cor. to secs 32 & 33 on the
south boundary of township
North Wt. secs. 32 & 33
Var. 15° 30' E.

40.00 Set sandstone 14 x 8 x 8 in 9 in deep
marked ¼ on W. side & raised a
mound of stone for witness cor.
44.00 Gully drains S.W. heads N.E.
46.50 " " S.E.
48.00 " (Dame) " S.W.
49.00 " (") " S.E.
50.50 " (") " S.W.
80.00 Foot of Bluffs bears N.W. & S.E.
Set Sandstone 16 x 8 x 6 in 10 in

Salt Lake Meridian

chains deep, notched on E & W on S. edges
mixed mound of stone for cor. to
secs. 28. 29. 32 & 33
Land, broken - fair state -
Timber - scattering cedar -

East on random line
bet secs. 28 & 33
Va. 15° 30' E.
Line in place being impracticable
on account of bluffs, I measure north
25.00 chs thence east 80.19 chs to
80.19 Intersect S & S. line at witness cor.
25.00 chs S. of cor. point to secs 27. 28. 33.
& 34 from which
Wal oak bears
bet. secs. 28 & 33

240

Subdivisions T. 43 S. R. 6 W.

Chains	~~Va. 15° 30' E.~~
40.09	In bluffs not set -
80.19	The cor. to secs 28.29.32 & 33
	Sand on line in mountains
	Soil & Rock
	Timber scattering Cedar & Pine
Note:	Abandon line here.

From the cor. to secs. 31 & 32
on south boundary of township
North bet. secs. 31 & 32

Va. 15° 30' E.

40.00	Set Sandstone 20 x 20 x 20 in 15 in deep marked T on N side mound of stones for ¼ sec. cor. from which
	A Pine 6 in dia brs S. 35 W. 20 lks dist
	A Cedar 6 " " " N. 38 E. 24 " "

Salt Lake Meridian

Chains both trees marked ↑ S. B. T.

The S. point of a bluff bears E. 30.00 chs.

along N. slope of bluff to

80.00 In mouth of Gulch heads N. E.

Set Sandstone 15×10×5 ins. 12 ins. deep

notched 5 on E. & 1 on S. edges raised

mound of stone for cor. secs 29. 30. 31 & 32.

Land-level - Div. 1st rate on S. ½

broken 2d rate on N. ½

Timber-scattering Pine & Cedar

East on random line

1st. secs. 29 & 32

Va. 15. 30. E.

Line in place being impracticable

on account of bluffs, offset 40.00 chs

S. Thence E. 65.00 chs. Thence N. 40.00 chs to

Subdivisions T. 43 S. R. 8 W.

Chains	
65.00	On line in place at foot of bluffs bears S 8 E.
80.20	Intersect S 75 link at cor. to secs 29 & 32, from which Pine on true line bears secs. 29 & 32
40.10	Falls in bluffs not set,
80.20	The cor. to secs 29. 30. 31 & 32 Land on line mountainous Soil & Rock. Timber, Pine & Cedar —

West on random line
bet. secs. 30 & 31
Va. 15°. 30. E.
Line in place being impracticable
on account of bluffs, measure

Salt Lake Meridian

6 chains	10.00 chs. S. thence W. on offset line
	70.00 chs. thence N. 10.00 chs. to
70.00	On line in place
80.20	Intersect Guide Meridian at cor.
	to secs 30 & 31 / from which
	East on true line
	bt. secs. 30 & 31
40.20	Falling in rocky bluffs not set
80.20	The cor to secs 29, 30, 31 & 32
	Land along line mountainous
	Soil 2d rate.
	Timber scattering Pine & Cedar

Note: The further survey of this Township being impracticable on account of the mountains I abandon it here.

Subdivisions T. 4 S. R. 5 W.

General Description.—
The surveyed portion of the
Township embraces the flat
of Johnson's Brook & lands ad
jacent thereto - which are
mostly of 1st rate quality, fur
nishing Cedar & Pine timber of
commercial value. Irrigable
from Johnson's Brook.— Sec. 1
contains the settlement of Joh
son or Johnsonville & is situated
on Johnson's Brook & the main
northern road from this section
The lands are agricultura
Feb. 10th 1877 J. H. Dennis
Dep. Surveyor.

BOOK-

U. S. SU

Salt La

The for

Exter

Township

Executed

Under

day of

Febr

examin

planati

surveys

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Exteriors & Subdivisions Township No. 43 S. Range No. 3 West Executed by Bailey & Burrill Under first contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK

18d

BOOK-A-154

18th Examined by C. H. Crowell. C.C.

Field Notes
of the
Subdivision of
Township 43 South Range 6 West
of Salt Lake Meridian
as surveyed by
Dale H. Farrell
under His Contract
No 73
dated Sept 4th 1876.

Surveyed, commenced Oct 9th 1877
" completed " " "

BOOK-A-154

Township 43 South **R.** 6 West

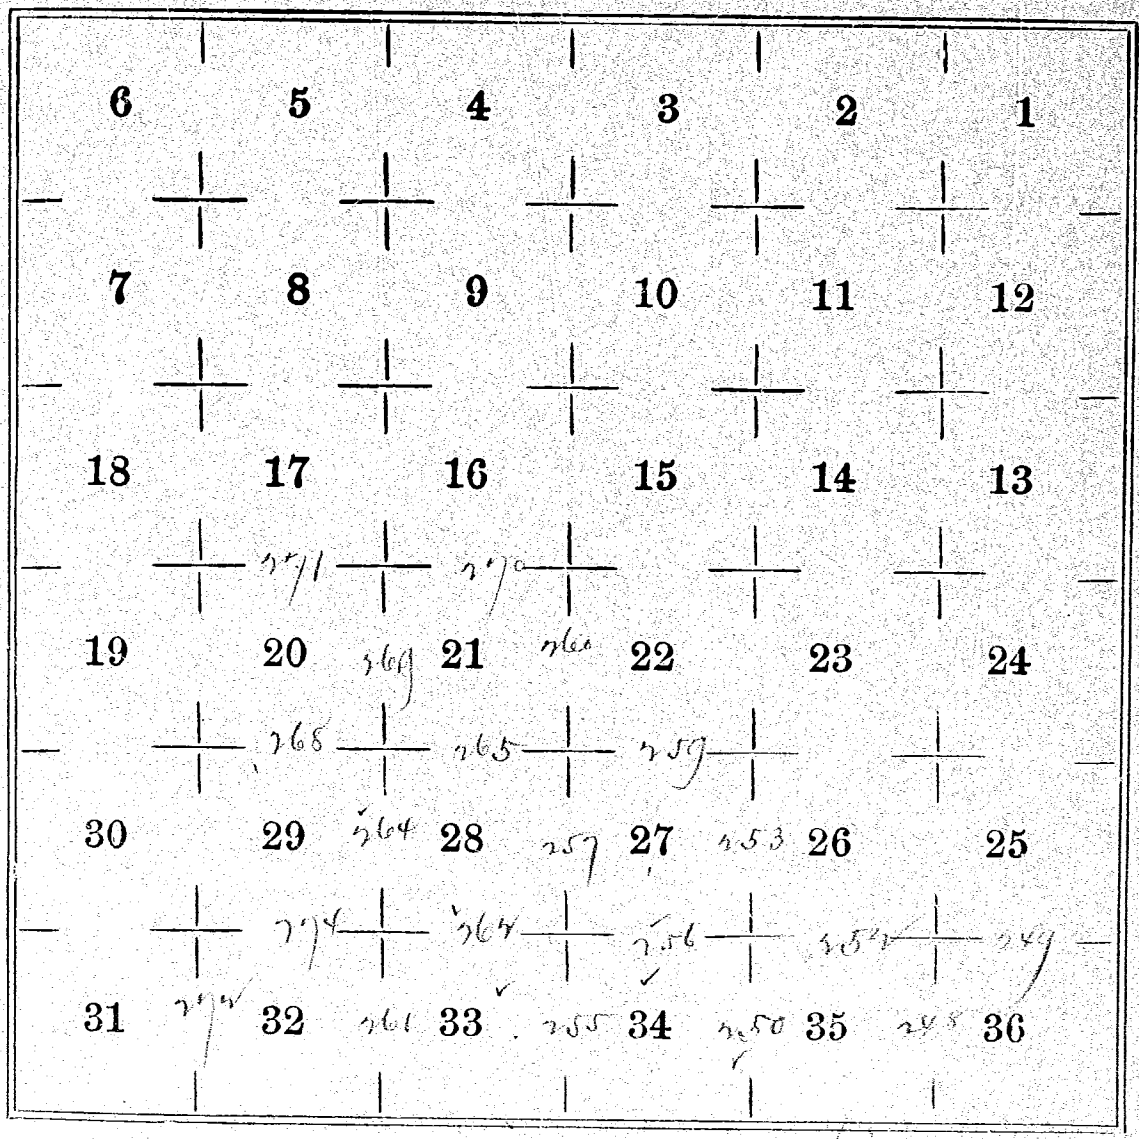

248.

Subdivisions T. 43. S. R. 6. W. 5th P.M.

Chains	
	Survey commenced Sept 3d 1877 by T. C. Bailey From the corner on 35 36 on the south boundary of township 9 run North 80 chs on 35 & 36 Va. 13° 30' E.
20.00	Road from Sand to Lee's Ferry bears S.E. 1 L.
110.00	Pet Sandstone 11x13x6 in 12 in deep marked T on W. side & raised mound south from pit 4 each 24x12x12 in for 1/4 sec cor.
55.00	Road bears S.E. 1/2 L.
10.00	Pet Sandstone 20x11x5 in 15 in deep notched on E & S. edges & raised

Salt Lake Meridian

Chains of stones for cor. Secs
25.26.35.36 from which
A Pine 12 in dia bears S.55 E.
E. 90 Rhodist mark'd S.36
T.4 S. R.6 W. B.T.
Land N½ broken Rocks Soil
N. ½ gently S. slope ... 1st Rate
Timber Pine & Cedar

East on random line
bet. Secs. 25 & 36
Va. 15°30' E.
To avoid the red bluffs
9 offset South 20.00 chs
thence East on offset
20.00 chs thence North
20.00 chs on offset to
Intersect Guide Meridian
35 chs S. of Cor. Secs 25 & 36

25

Subdivisions T. 45 S. R. 6 W.

Chains from which

S. & W. 45 N. on this line, via offset,

N. E. Cor. Sec. 25 & 36

40.00 Set Sandstone 15x10x5, 10 in. deep marked 1/4 S. on E. side & scribed from which offset bears N. 40 chs. W. 1/4 Sec. Cor. 20 chs. S. of the Cor. found

40.00

10.00 The Cor. to Secs 25, 26, 35 & 36

Sand & stone & rocky

Soil & Rate

Timber scattering Cedar

Note: The line further north is impracticable —

5.5.50

10.00

70.00

From the Cor. to Secs 34 & 35 on South boundary of Township 1 North

West 80 Secs 34 & 35

W. 15° 30' E.

11.00 Enter Cedar Branch 4 links

Salt Lake Meridian

Chains	E&W.
40.00	Set sandstone 14×8×2 in. deep mark'd 4 M. Pits & raised mound of stone for 4 Sec. cor.
48.00	Road from Nanabo's Ferry bears N.W. & E. and enters hollow drains S.W.
55.50	Wood Road bears N.W. & S.E.
60.00	Rear hollow & enter branch
72.00	Rear branch bears N.E. & S.W.
80.00	Set sandstone 20×18×4 in. 15 in. deep notched 2 on E & W on S. edge & raised mound of earth from 4 pits each 24×12×12 in. for cor. to Secs. 26, 27, 34 & 35 — Sandstone Cairn — N.E. Pits

Subdivisions T. 43. S. R. 6. W.

Chains	Timber scattering cedar	Chains
	East on random line	
	bet. secs. 26 & 35	
	Va. 15° 30' E.	80.00
10.00	Ente. N. slope of broken	
	knoll bears S. E. & S. W.	
.32.70	Ravine drains S. W. and	
	road bears S. E. & S. W.	
40.00	Set temporary 1/4 sec. cor.	
80.00	Intersect N & S. line at	36.50
	cor. to secs. 25, 26, 35 & 36	32.00
	from which	40.00
	Wit on true line	
	bet. secs. 26 & 35	
10.00	Set, sandstone 18 x 14 x	
	6 in. 12 in. deep, marked	
	1/4 on S. side, raised	
	mound of stone for	

Salt Lake Meridian.

Chains ¼ sec. cor. from which
A Cedar 8 in dia bears N. 5.
E. 32 lks dist marked
¼ S. B. T.

80.00 The cor. to secs 26. 27. 34 & 35
Sand Broken Soil & Dale
Timbr- Cedar & Pine

North bet secs 26 & 27
Va. 15° 30' E.

36.50 Road bears S° & W.

32.00 Low Ridge bears N. E. & S. W.

40.00 Set Sandstone 13 x 12 x 3 in
8 in deep marked ¼ on W.
side & raised mound of
stones for ¼ sec. cor. from
which
A Cedar 8 in dia bears
N. 50. E. 76 lks dist marked

Subdivisions 7, 43. S. R. 6. W.

Chains	
	1/4 S. B. T.
44.00	Wash drains S. W.
59.00	Road bears E. W.
65.00	Foot of bluff south side of mouth of canon comes from S. E.
80.00	True cor. falling in the bluffs is not established, thereto at 65.00 chs I set sandstone 24 x 6 x 6 in 18 in deep notched 2 on E & S. edges & X. C. & raised mound of stones for witness cor. pecs 22.23.26 & 27 from which A cedar 6 in dia bears N. 65 E. Yolo dist mound S. 23. T. 43 S. R. 6. W. B. T.

Chains

Note:

440.00

44.60

46.50

50.35

61.25

75.70

80.00

BOOK-A-154

Salt Lake Meridian

Chains	Land mostly level Soil, private Timber a few cedars
Note:	Abandon line here -

North Bt. secs. 33 & 34
Va. 15° 30' E.

40.00	Set red sandstone 20 x 14 x 8 in 15 in deep marked ¼ on N. side & raised mound of earth from 4 pits each 24 x 12 x 12 in for ¼ sec. cor.
44.65	Trail bears N. W. 95. E.
46.50	" " " "
50.50	Road " " "
61.25	Trail " " "
75.75	" " " "
80.00	Set Charred cedar post

Subdivisions T. 43 S. R. 6 W.

Chains 48 + 44 + 44 in 12 in deep notched
3 on E. & on S. edges and
raised mound of
stones for cor. Secs.
27. 28. 33 & 34
Land Clerk - Private
Surveyor

East on random line
to cor. secs. 27 & 34
Var. 15° 30' E.

40.00 Set temporary 1/4 sec. cor
on Ridge thence N. E. & S. W.
54.40 Road thence S. E. & N. W.
60.00 " " " "
65.00 Wash drains S.
80.00 Intersect N & S. line
at cor. Secs. 26. 27.
34 & 35 from which

40.00

80.00

10.00

38.00

BOOK-A-154

Salt Lake Meridian

Chains

From true line
bt. secs 27 & 34

40.00 Set Sandstone 24 x 10 x
10 in. 18 in. deep marked
¼ on N. side & faint
mound of stone for ¼ sec
cor. from which
A Cedar 8 in. dia. bears
N. 15° E. 33 lks. dist. Mark-
ed ¼ S. B. T.

80.00 The cor. to secs 27. 28. 33 & 34
Sand nearly level
Soil Sandy
No Timber

North bt. secs. 27 & 28
Va. 15° 30' E.

10.75 Soil bears N. 30° E.

38.82 Road bears E & W

Subdivisions T. 43 S. R. 6 W.

Chains	
39.50	Road bears N W & S. E
	forks 15 lks east
40.00	Set Sandstone 14 x 11 x 8
	in 10 in deep marked ½
	on W. side raised mound
	of stone for ¼ sec. cor.
45.10	Road bears E & W.
45.30	" " N. W & S. E.
50.60	" " " "
52.50	" " " "
65.00	Foot of low hill spur bears N.
67.00	Top of same
68.50	Gulch drains S. W.
73.25	Top of spur of low ridge
80.60	Set Sandstone 14 x 10 x 6 in
	9 in deep notched 3 on E. &
	2 on S. edges raised mound
	of earth from pits each
	24 x 12 x 12 in for cor. to secs

Chains

10.00

80.0

Salt Lake Meridian

Chains 21.22.27 T38

Land almost level
Soil 1st Class
No Timber

East on random line
Mt Dees 22 27

Va. N. 30 E.

10.00 Foot of steep red bluffs
Bears N.E. & S.W. To avoid
bluffs Offset south
15.00 chs thence east
on offset line 10.00 chs to
witness cor. on N & S. line
15.00 chs south of
80.00 Point for cor. to Dees 22,
23. 26 27 from which
West on true line
Mt. Dees. 22 27

7.60

Intersections T. 4 S. R. 6 W.

Chains

70.00 Set Sandstone 19 x 12 x 3 in 12 in deep, marked + W.C. Raised mound of stones for witness cor. S 4 sec. cor.

80.10 The cor. to secs 21. 22. 27 & 28. Rand E. to chs rocky bluffs Dril 3 Date. W. 10 chs level Dril 1 Date - Timber - a few cedar -

---

North bet secs 21 & 22

Va. 15° 30' E.

8.20 Lemon road bears E & W

10.35 " Wash drains S.W.

15.40 " Road bears N.E. & S.W.

19.75 Fort Reed bluff bears N.E. & S.W.

40.00 Corner falling in

Salt Lake Meridian

6 chains bluff is not established
therefor at 20.00 chs I
set Sandstone 22x14x2
in 16 inches marked
¼ S W.C. on W. side and
raised mound of stone
¼ sec
for witness cor.

Note: I Abandon line here.
Land S. & level Dirt date
balance rocky bluffs
Dirt 3 date —
No Timber
Feb 3d 1877 T. 6 S. R. 3 E.

Feb 3d 1877 by J. G. Burrill
North bet. Secs. 33 & 34
Va. 15° 30' E.

31.00 Enter small meadow bears S 87°
36.00 Recr " " " "

Subdivisions T.43.S.R.6.W.

Chains		Chains
40.00	Set Sandstone 14×10×6 in	24.50
	9 in deep, marked ¼ on N.	38.00
	side raised, mound	110.00
	of stone for ¼ Sec. Cor.	48.50
80.00	Set Sandstone 14×9×6 in	51.90
	9 in deep notched 1 on E &	
	1 on S. edges & raised mound	66.10
	of earth from 4 pits each	
	24×12×12 in for cor. to secs 28	66.30
	29, 32 & 33	80.20
	Land level - Dist. Hills	
	No Timber	

×

East on random line
bt. secs. 28 & 33

Va. 15° 30' E.

15.60	Road bears N. & S.	
17.60	Fence bears S. 10° W. & N. 10° E.	
	to N.W. cor. enter field	80.20

Salt Lake Meridian

Chains	
24.50	Land Corr. (spreads out) 5.50 chs. wide
38.00	Leave Corner Runs S.
110.00	Set temporary 1/4 sec. cor.
47.50	Ditch runs S. 10 E.
54.95	" " S. United Order House bears N. 330 lks
66.16	Fence bears N. 75 E. N.E. cor. 5.00 chs N. Leavitfield
66.30	Road bears N. & S.
80.20	Intersect N. & S. line at cor. to secs. 27.28.33.34 ~~28.33~~ from which West on true line between secs. 28 & 33
110.10	Set Sandstone 18x10x5 in. 12 in deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor.
80.20	Thence Runs 28.29.32.33

Subdivisions T. 43 S. R. 6 W.

Chains	Land level center cultivated field Coal Bed Sandstone Timber
	North bet sec 28 & 29 Va. 15° 30' E.
1.25	A Geerges Road bears N. E. & S. W.
19.75	Road bears E & W.
34.50	Telegraph line bears N. E. & S. W.
39.00	Road bears N. E. & S. W.
40.00	Set Sandstone 20 x 12 x 6 in 15 in deep marked ¼ on W. side raised mound of earth from 4 pits each 24 x 12 x 12 in for ¼ sec cor.
47.50	Road bears E & W.
52.50	" " "
63.70	" " "
69.00	" " "

Chains	Sal
75.00	
80.00	
	0.25
	9.50
	10.60

Salt Lake Meridian

Chains	
75.00	Enter Ranab creek bottom
80.00	Spruce on falling in creek thence
	from a point 20 lks W. on
	right bank of creek set band
	stone 16 x 8 x 3 in 10 in deep
	notched 4 on E & 2 on S edges
	raised mound of stone for
	cor. to sec. 30. 21. 2 E 39 —
	Land level fair & fair
	Av Timber

East on random line
bet. secs. 21 & 28
Va. 15° 30' E.

0.20	Left bank of Ranab Creek
	runs S.E. 40 lks wide.
9.50	Leave creek bottom
10.60	Tannery & slaughter house
	35 lks South.

Subdivisions T. 4 S. R. 2 W.

Chains	
11.30	Telegraph line bears N. W. 95.
15.40	Fence bears W. S. enter Rand Townsite — N. W. cor. of same bears North 11.25 chs dist —
	6 blocks square 8 x 8 chs. streets 150 links wide —
19.60	Division Fence bears W. S.
23.60	Fence bears W. S. west side of street
26.10	East side same street bears W. S.
29.10	Division Fence bears W. S.
33.10	West side of street bears W. S.
34.60	East " " same " "
38.65	Division Fence bears W. S.
41.00	Set temporary 1/4 sec. cor.
42.65	West side of street bears W. S.
44.15	East " " same " "
47.15	Division Fence " "
51.15	West side of street " "
53.65	East " " " " "

Sa

Chains	
57.60	
61.60	
62.00	
63.10	
71.10	
76.00	
111.00	
70.00	

Salt Lake Meridian

chains	
57.60	Division Fence Bears N 9 E.
61.60	West side of street " "
62.00	Ditch runs S. E.
63.10	East side of street bears N 9 E.
71.10	East boundary of Canals
76.00	Intersect N 9 E. line at cor. to sec 21. 22. 27 & 28 from which West on true line 1/4 sec. 21 & 28
111.10	Set Sandstone 16 x 9 x 4 in 90 in deep mounded 2 in N. side raised mound of earth pits 4 pits each 24 x 12 x 12 in for 1/4 sec. cor. in Upn Lucas Lot —
70.00	Pine cor. to sec 20. 21. 28 & 29 Land level - Soil 1st Rate No Timber. —

Subdivisions T. 43 S. R. 6 W.

Chains		Chains
	At the line West will strike the mountains in left than 80 chs) run West on true line	18.50
		40.00
	1/4 sec. 20 & 29	
	Va. 13° 30' E.	
2.00	Bear creek bottom	67.00
40.00	Bar foot of bluff bears of mouth N. 65 W. 3.00 chs S. of canon	77.50
	corner West where)	80.00
	Set sandstone 22 x 8 x 7 in 16	
	in deep marked 1/4 on S. side	
	raised mound of stones for	
	1/4 sec. cor.	

Notes: Mandan line new —
Land, level — Soil 1st rate
No Timber

North 1/4 sec. 20 & 21

Salt Lake Meridian

Chains	
	Va. 13° 30' E.
18.50	Bears N. 11° W. S. E.
110.00	Set Sandstone 12 x 8 x 6 ins 8 ins def. marked ¼ on N. side & raised mound of stones for ¼ sec. cor.
67.00	Ditch runs S. E.
77.58	Telegraph line bears N. 7° W.
80.00	Set Sandstone 16 x 10 x 6 ins 10 ins def. notched 4 on E & 3 on S. edges & raised mound of stones for cor. to secs 16. 17. 20 & 21.

Land, level — Air 1st rate

No Timber —

The two lines last run reach the mountains in less than 80 chs from

Subdivisions T. 1 S. R. 6. W.

Chains		Chains
	East on true line	
	bet. secs. 16 & 21	
	Va. 15° 30' E.	
1.45	Ditch runs S.E.	
4.25	Road bears N & S.	
8.50	Foot of red bluff bears	
	N. W. & S. E.	0.20
40.00	True cor. falling in bluffs	8.50
	is not set therefor - at	
	8.50 chs mark & and stone	40.00
	in place 48 x 36 x 12 in, above	
	ground 1/4 W.C. on N. side	
	& mound of stones	
	for witness & sec. cor. & brass (4)	
	at cor. point on the rock. -	
	Land W 1/4 level - Soil 1st Rate	
	Balance rocky bluffs 3rd Rate	
	No Timber	Note:
Note:	Abandon line here. -	

Salt Lake Meridian

Chains

As the line will reach the
Bluffs in less than 20 chs
I run
West on true line
bet. secs. 17 & 20
Va. 15° 30' E.

0.20 Telegraph line bears N. 77° E.

8.50 East bank Tunab Creek,
runs S. &c. at foot of bluffs -

40.00 True cor. falling in bluffs
& not set therefor at
8.50 chs. set Pandotone
19 x 12 x 4 in 12 in deep marked
1/4 V.V.C. on N. side raised
mound of earth from 4 pits
each 24 x 12 x 12 in for witness 1/4
sec. cor.

Note: I abandon line here. -
Land E. 1/4 level - fair soil

Azimuths 7.43.S. 82.6.W.

Chains	Balance rocky bluffs- Oak 3 Dist. & Direc-
	North Ft. Recs. 3 1/2 E. Va. 15°. 30. E.
24.00	Foot of red bluffs bears E & W. set Sandstone 24×18×10 in 18 in deep marked + W.C. in W. side raised mound of stone for witness 40 cc. cor. from which A Pine 12 in dia bears N. 35 E. 32 lks. dist. A Pine 18 in dia bears S. 60. W. 124 lks. dist. both trees marked + S.W.C. & T. To avoid the bluffs Run east 20.00 chs thence north on offset line 6.00 chs. thence

Note:

Chains West 20.00 chs. to
80.00 On true line, set pendatine
18x14x8 ins. 12 ins deep noted
on E & W sides & raised
mound of stones for cor. to
secs. 29. 30. 31 & 32 in which
A Cedar 7 ins. dia. bears N. 10 W.
7 lks dist. marked S. 30. T. 43.
S. R. 6. W. B. T.
A Pine 10 ins dia bears S. 50. E.
180 lks dist marked S. 32. B. T.
Note: The ¼ sec. cor. falling in bluffs
is not set.
Land N. ½ rel bluffs.
Ave 3 rods. S. ½ rolling
Ave 2 rods.
Timber - cedars.

East on random line

Subdivisions T. 43 S. R. 6 W.

Chains	
	Cor. sec. 29 & 32
	Va. 15° 30' E.
	Stone N. foot of bluffs
20.00	Reads same
40.00	Set temporary ¼ sec. cor.
53.50	Road bears S. W. & N. E.
63.40	Telegraph line bears " "
64.00	Road " " "
74.50	" " " "
79.80	Intersect M.S. line at cor. to
	secs 28. 29. 32 & 33 from which
	West cor. true line
	bet secs 29 & 32
39.90	Set Sandstone 18 x 10 x 4 in
	10 ins deep, marked ¼ sec.
	pile raised mound of earth
	from 4 pits each 24 x 12 x 12 in for
	¼ sec. cor. from which
	Aspen 8 ins diam bears S. 0. 30

BOOK

Sub

Chains

79.80 T.

Note: T

Salt Lake Meridian

Runs E. 144 chs. to 1st mile cor. S. 3 E.

9.80 The cor. dec. 29.30. 1878

Land nearly level

Soil & Veg.

Timber - a few cedars on No 2.

Note: The balance of the lands in this township fall in the red bluffs unfit for cultivation - I therefore abandon the survey here.

Feb. 3d 1877 J. H. Burrill

General Description

The surveyed portion of this township consists of the arable lands in & around the town of Kanab.

Bench contains a popu
lation of about 250.
The lands are agricu
tural & irrigable from
Sevier River.
Pine & Cedar timber in
Canons & on the foot hill
J. F. Burrill
U.S. Deputy Surveyor

BOOK

U. S. SU

Salt La

The fore

Township

Executed

Under

day of

Febru

examined

planation

surveys t

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st *1877*

The foregoing field notes of the survey of the Subdivisions of *Township No.* 43 S. *Range No.* 6 W. *Executed by* Bailey & Burrill *Under* joint *contract of the* 4th *day of* September *1876, in the month of* February *1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved,*

Nathan Kimball

Surveyor General for Utah.

BOO

Exam

Fie

Survey
Special
Ranges 3.
Sale
ex
Ra
under jo
No. 71.-

Survey

"

20.

40.

53

63

64

71.

79

31

10 29

BOOK-A-154

Examined by C. Gilbert Russell, C.E.
& Compared

Field Notes
of the
Survey of the
9th Special Standard Parallel South
Ranges 3. 4. 4½. 5. 6. & 7. West
Salt Lake Meridian
as surveyed by
Bailey & Burrill
under joint contract Bailey & Burrill
No. 71. — dated Sept 4th 1876.

Survey commenced Feb. 1st 1877
" completed " 4th "

v. 80

BOOK-A-154
FOR U.

I,

having bee

or of the l

the Territo

that I wi

to the best

cute the du

to a contr

Surveyor

Utah Terr

day of

to the law

instructio

General.

Su

this

BOOK-A-154

OFFICIAL OATHS.

FOR U. S. DEPUTY SURVEYOR.

I,

having been appointed a Deputy Surveyor of the lands of the United States, in the Territory of Utah, do solemnly swear that I will well and faithfully, and to the best of my skill and ability, execute the duties confided to me, pursuant to a contract with

Surveyor General of public lands in Utah Territory, bearing date the day of , 187 , according to the laws of the United States and the instructions received from said Surveyor General.

Subscribed and sworn to before me this day of , 187

BOOK-A-154

FOR CHAINMEN.

We Adolphia Young
and Brigham L. Riggs
do solemnly swear that we will faith
fully execute the duties of chain carrie
that we will level the chain upon unev
ground, and plumb the tally pi
whether by sticking or dropping t
same; that we will report the true d
tance to all notable objects, and the tr
length of all lines that we assist in me
uring, to the best of our skill and abili

Adolphia. young

his
Brigham L. ✕ Riggs
mark

Subscribed and sworn to before m

this 1st day of Feb. , 18

U. G. Brun
Notary Pub

BOOK-A-154

284 BOOK-A-134

FOR AXEMAN.

I, [illegible]

do solemnly swear that I will well an

truly perform the duties of axeman, a

cording to instructions given me, and

the best of my skill and ability.

[illegible]

Subscribed and sworn to before m

this 1st day of February ,187

T. C. Bailey

U. S. Dep. Sur

BOOK-A-154

285

" "

well an

man, a

e, and

" "

efore m

, 187

786

FOR FLAGMAN.

BOOK-A-1

I, Joseph Jessee

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

Joseph Jessee

Subscribed and sworn to before me this 1st day of Feb, 187

T. C. Bailey
U. S. Dep. Surv

BOOK-A-154

OFFICIAL OATHS.

FOR U. S. DEPUTY SURVEYOR.

I,

having been appointed a Deputy Surveyor of the lands of the United States, in the Territory of Utah, do solemnly swear that I will well and faithfully, and to the best of my skill and ability, execute the duties confided to me, pursuant to a contract with

Surveyor General of public lands in Utah Territory, bearing date the day of , 187 , according to the laws of the United States and the instructions received from said Surveyor General.

Subscribed and sworn to before me this day of , 187

V88 BOOK-A-154

FOR CHAINMEN.

BOOK

We John C. Tyler

and John W. Bebe

do solemnly swear that we will faithfully execute the duties of chain carriers; that we will level the chain upon uneven ground, and plumb the tally pins whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability.

John. C Tyler

John W Bebe

Subscribed and sworn to before me this 1st day of Feb, 187?

C. C. Baillie,

U. S. Dep. Surv.

BOOK-A-154

l faith-

arriers;

uneven

y pins,

ing the

ue dis-

the true

n meas-

ability

fore me

, 187

BOOK-A-154

790

FOR FLAGMAN.

I, John [illegible]

do solemnly swear that I will well and

truly perform the duties of flagman, ac

cording to instructions given me, and t

the best of my skill and ability.

John [illegible]

Subscribed and sworn to before m

this 1st day of February , 187

[illegible]

U. S. Deputy [illegible]

BOOK-A-154

291

vell an

nan, ac

e, and t

before m

. 18

BOOK-A-154

FOR AXEMAN.

I, James C. Hilland

do solemnly swear that I will well an

truly perform the duties of axeman, a

cording to instructions given me, and

the best of my skill and ability.

James O Wilkins

Subscribed and sworn to before m

this 1st day of February, 187

O. C. Smith

Notary Public

BOOK-A-154

9th Special Standard Parallel South

Chains | Feb. 1st 1877 by J. H. Burrill

Note: This being the nearest cor. to the boundary line between Utah & Arizona it becomes necessary to depart from the usual method of establishing standards & run a Special Standard (9th) Parallel South from the cor. to secs. 7. 12. 13 & 18 on South Bdy. of Twp 7. 44. S. R. 5 & 6 W. I run West along S. side sec. 12

Va. 15° 30' E.

Along N. slope of Bluffs to

15.00 Leave Bluff turns S. Enter Flat

40.00 Deposit piece of Gypsum marked with a cross (+) in mound of earth raised from 4 pits 24 x 12 x 12 ins for 1/4 sec. cor.

80.00 Set Sandstone 24 x 10 x 3 ins. 18 ins.

Range 6 West - Salt Lake Meridian

42 on N.

Chains deep notched 1 on E & S on W. edges

Raised mound of earth from which

Standard cor.

cedar 24 x 12 x 12 in. for 4 secs 1, 2, 11 & 12

Land mostly level - Soil, State -

Timber - Cedar & Pine of commercial

Value. -

West along S. side sec. 11.

Va. 15° 30' E.

7.50 Road bears N. E. & S. W.

34.00 Bear flat ascend bluffs -

bear N. E. & S. W.

37.00 Top of same -

40.00 Set conglomerate sandstone

24 x 16 x 7 in. 18 in. deep marked 1/4

on N. side raised mound of

stone for 1/4 sec. cor. from which

A Cedar 15 in. dia. bears west

13 lks. dist. marked 1/4. S. B. T.

9th Special Standard Parallel No. 196

Chains

80.00 Set Gray Sandstone 20×10×6 in. 9 in. Chains in fo

15 in deep notched 2 on E. 44.00 Set

on W. edges raised mound

of earth from 4 pits each 24×

×12 in for cor. to secs. 10 & 11. Standard

from which

A Cedar 6 in. dia. bears N. 40.

26 lks. dist. marked S. 10. T 44. S

R. 6. W. D. T.

Sand mostly level

Soil 1st rate.

Timber-Cedar & commercial valu

West along S. side sec. 10

Va. 15° 30' E.

40.00 Set piece of Petrified wood

18×6×6 in. 12 in deep marked

1/4 on N. side & raised mound of 40.00

earth from 4 pits each 24×12×12

6. N. Salt Lake Meridian

chains in for 1/4 sec. cor.

.00 Set Trachyte 20×13×9 in 15 in dep 9 & 20 on ft.
notched 3 on E & W. edges raised
mound of stone for standard
cor. to secs. 9 & 10 from which
A Cedar 9 in. dia. bears N. 45 E.
50 lks. dist. marked S. 10. T. 44. S.
R. 6. W. B. T.
A Cedar 8 in. dia. bears S. 60. W.
56 lks. dist. marked S. 16. B. T.
Sand, W. 1/2 broken, Soil & Tule
E. 1/2 level - Soil & Tule -
Timber - Cedar & Commercial
value. -

West along S. side sec. 9
Va. 15. 30 E.

.00 Marked Sandstone in place
5×3×1 foot above ground 1/4 on

9th Special Standard Parallel

LOOK-A

South bo

Chains N. side raised mound of ston
for 1/4 sec. cor. from which
N. Cedar 10 in. dia. bears N. 10.
E. 15 lks. dist. marked 1/4 S. B.T.
Sandstone Ledge bears N. E. 85.

46.50 A point 8.65 chs north of
stake set by Prof Thompson
to indicate boundary line
between Utah & Arizona.

48.50 County Road bears N & S.

50.00 Sean Bruks bear N & S.
Sean timbers & enter flat

80.00 Set Sandstone 14 x 10 x 5 in 9
in deep notched 4 on E & 2 on W.
edges raised mound of earth
from 1/4 sec each 24 x 12 x 12 in for
standard cor. to secs. 8 & 9
Sand E. 50.00 chs broken
Soil & Vate - W. 30.00 chs. level

Chains E
to
on

35.75 E
40.00 E
de
m
24
53.50 E
b
64.50 E
80.00 E
x4
89
se
on

BOOK-A-154

South R. 6. W. Salt Lake Meridian

Chains Soil & Tate - Timber. Cedar & Pine of commercial value on E. 50.00 chs. —

West along S. side sec. 8.

Va. 15°. 30'. E.

35.75 Rancab Creek 15 lks wide runs S.

40.00 Set Sandstone 15x8x6 in 10 in deep marked 1/4 on N. side Raised mound of earth from 4 pits each 24x12x12 in for 1/4 sec. cor.

53.50 Pear Flat center low branch bears N. & S.

64.50 Road bears N. E. & S. W.

80.00 Set Charred Cedar Post 48 x4x4 in 12 in deep notched 5 on E. & 7 2 on W. edges Raised mound of earth from 4 pits each 24x12x12 in for standard cor. Secs. 7 & 8

9th 30° Special Standard Parallel
Chains Land-level-Soil 1st Rate
No Timber. —

West along S. side sec. 7.
Va. 15.30.E.
Enter Timber —

2825 St George Road Chas. E.D.S.
40.00 Deposit 1 quart of charcoal 0.00
in mound of earth from 4
pits each 24×12×12 in for 4 sec. c
80.00 Set Sandstone 14×8×5 in q
deep notched 6 on N. 9 E. 2 ch
& raised mound of earth from
4 pits each 24×12×12 in for stand 80.00
and cor. to sec. 7 & 12 T. 44. S. R
687 W.
Land level, Soil 1st Rate
Cedar of commercial value.

South R. 6. W. Salt Lake Meridian
Uintah Note: For General Description
see subdivision notes T. 4 S.
R. 6. W.

On Range 7. West.
West along S. side sec. 12
Va. 15° 30' E.

0.00 Deposit 1 quart of charcoal in
mound of earth raised from 4
pits each 24×12×12 in for 1/4 sec. cor:
from which
A Cedar 14 in dia bears S. 75° W. 30
lks. dist. marked 1/4 S. B. T.

0.00 Set Charred Cedar Post 4×4
×48 in 12 in deep in mound of
earth raised from 4 pits
each 24×12×12 in notched 10 on S.
72 on N.
45 on W. edges for standard cor. to
secs. 11 & 12 from which

BOOK-A-154

Township 11 N. Range **R.** 7 West

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

9th Special Standard Parallel South

Chains A Cedar 12 in. dia. brs N. 8 Chains

E. 40 lks. dist. marked S. 12. B.

A Cedar 18 in. dia. brs N. 10. W.

55 lks. dist. marked S. 11. 7. 44

S. R. J. W. B. T.

Land, level - soil, State -

Cedar & commercial value 7.50

Mst along S. side sec. 11. 10.00

Va. 15° 30'. E. 40.00

4.75 Road brs N. E. & S. W.

14.50 Gully drains S.

40.00 Deposit of quart & charcoal

in mound of earth raised from

4 pits each 24 x 12 x 12 in for 4 sec.

80.00 Set Planted Cedar Post 45 70.75

notched 2 on E. 40 on W. & 2 on N.

x 4 x 4 ins 12 ins deep, mound 80.00

mound of earth from 4 pits to

each 24 x 12 x 12 in for each standard

South R. 7 W. Salt Lake Meridian

Chains cor. Secs. 10 & 11.

Land - level - Soil Arable -
Cedar of commercial value

West along S. side sec. 10.
Var. 15° 30' E.

7.50 Wash from Cottonwood Canon drains S.

10.00 Telegraph Line bears N.E. & S.W.

40.00 Set Sandstone 15 x 9 x 8 in 10 in deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor. from which
A Cedar 5 in. dia. bears N. 55. E. 28 lks. dist. marked 1/4 S.B.T.

70.75 Road bears N & S.

80.00 Set Sandstone 14 x 8 x 5 in 9 in deep notched 3 on E & W edges & 2 on N. raised mound of earth from 4

9th Special Standard Parallel North

Chains fifty each 24×12×12 in for stand
and cor. to sec. 9 & 10. from which
A Cedar 5 in. dia. bears N. 80. W. 1.00
60 lks. dist. marked S. 10. T. 44 N. 0.00
S. R. 7 W. B. T.
A Cedar 2 in. dia. bears S. 50. W.
40 lks. dist. marked S. 16. B. T.
Land, undulating, soil 1st Rate
Cedar & Pine of commercial value

West along S. side sec. 9.
Vd. 15° 30'. E.

30.00 Enter low ground bears N. W. 8.
38.50 Deep Wash drains S. E.
40.00 Set Sandstone 16×10×7 in 10 in
deep marked 1/4 on N. side &
raised mound of earth from 4 40.00
fifty each 24×12×12 in for 1/4 sec. cor.
from which

South R. 7 W. Salt Lake Meridian

Chains N. Cedar & Juniper trees S. 10. E.
28 lks. dist. marked 1/4 S. B. T.
Wash drains S. E. head N. 85. W.
On N. slope of Bear Blue clay
Hill set Sandstone 14 x 7 x 6 in 9 in
deep notched 4 on E & 2 on N. edges
(pits impracticable on account
of loose nature of ground) for Stand.
and cor. bears. S. E.
Land, rolling & broken, Soil 2nd rate
Cedar & Pine of commercial value.

West along S. side sec 8.
Va. 15° 30. E.
40.00 Deposit 1 quart of charcoal in
mound of earth from 4 pits each
24 x 12 x 12 in for 1/4 sec cor.

9th Special Standard Parallel

Chains		Chains
70.00	Foot of Perpendicular Bluff bears N.E. 95 N.	
80.00	Tree cor. falling on bluff is not established therefor at 70.00 ch.	
	set Charred Cedar Post 48 x 4 in 12 in deep marked W.C. 95 notches on E & W sides	10.00
	Raised mound of earth 2m.	15.00
	4 pits each 24 x 12 x 12 in for witness	30.00
	Standard cor. Secs. 7 8	40.00
	Sand rolling & broken Soil 2 Rate Cedar & Pine of commercial value.	
Note:	On account of Bluffs & abandon line here	
	Feb. 1st 1877 J. C. Reamis	
	For General Description see end Subdivision notes T. 44 S. R. 7 W.	80.00

South R. 7 W. Salt Lake Meridian

Chains Feb 1st 1877 by T. C. Bailey

In Range 5. W.

From the standard cor. to secs 7 & 12. T. 44. S. R. 5 & 6. W.

East along S. side sec. 7.

Va. 15° 30'. E.

10.00 Edge of Bluff bears N. W. 95. E.

15.00 Ravine bears N. W. 10.00 chs thence W.

20.00 Top of Bluff bears N. W. 95. E.

40.00 Set Red Sandstone 24 x 12 x 8 in 18 in deep, marked 1/4 on N. side raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor. from which

A Double Cedar 16 in. dia. bears W. 12 lks. dist. marked 1/4 S. B. T.

80.00 Set Sandstone 18 x 9 x 6 in 12 in deep notched 5 on E. 1/2 on N. 1/2 on W. edges raised mound of stone for standard cor.

9th Special Standard Parallel

Chains Links 7.98 from which

A Cedar 5 in. dia. brs N. 70. W. 210 lks. dist. marked S. 7. B. T.

S. R. 5. W. B. T.

A Cedar 4 in. dia. brs W. 184 lks. dist. marked S. 18. B. T.

Land, broken, Soil & Rate, Cedar & Pine of commercial value

East along S. side Sec. 8.

Va. 15° 30'. E.

40.00 Set Sandstone 18 x 10 x 5 in. 12 in. deep marked 1/4 on N. side & raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor. from which

A Cedar 7 in. dia. brs N. 30 W. 148 lks. dist. marked 1/4 S. B. T.

80.00 Set Sandstone 14 x 6 x 6 in. 9 in.

BOOK A

South

Chains

16.50

28.00

40.00

BOOK-A-154

309

South R. 5. W. Salt Lake Meridian

Chains deep notched on E & W edges
raised mound of earth from 4
pits each 24×12×12 in. for standard
cor. to secs. 8 & 9 from which
N Cedar 20 in. dia. bears N. 82. E.
132 lks. dist. marked S. 9. D. 44. S
R. 5. W. B. T.
N Cedar 5 in. dia. bears N. 35, W.
150 lks. dist. marked S. 8. B. T.
Land nearly level, Soil, Stone
Cedar Pine & commercial value

East along S. side sec. 9.
Va. 15° 30'. E.

16.50 Ridge, bears N. E. & S. W.

28.00 Same " N. W. & S. E.

40.00 Set Sandstone 20×12×12 in 16 in
deep marked 1/4 on N. side raised
mound of stone for 1/4 sec. cor.

9th Special Standard Parallel

Chains from which

A Pine 11 in. dia. bears E. 40 Lks. dist.

A Cedar 11 in. dia. bears S. 10. W. 30 Lks. dist. both trees marked

1/4 S. B. T.

80.00 Set Limestone 18 x 12 x 6 in 12 in 9 2 on N. deep notched 3 on E & W. edges mound fourth from 4 pits each 24 x 12 in for standard cor. bears 9-10 ~~S 80 E~~

from which

A Cedar 12 in dia bears S. 89. E. 160 Lks. dist. marked S. 15. T. 44 S. R. 5 W. B

A Cedar 3 in. dia. bears N. 10. W. 24 Lks. dist. marked S. 9. B. T.

Land undulating Soil Sandy

Cedar & Pine of Commercial Value

East along S. side sec. 10.

2.00

0.00

North R. 5 W. Salt Lake Meridian

Chains

Va. 15° 30' E.

0.00 Set Sandstone 18×9×7 in 12 in deep marked 1/4 on N. side & raised mound of earth from 4 pits each 24×12×12 in for 1/4 sec cor from which A cedar 14 in. dia. bears N. 50 E. 100 lks. dist. marked 1/4 S. B. T.

2.00 Edge of Bluffs bears N & S.

0.00 Foot of cam. set Sandstone 16×16×3 in 11 in deep notched 2 on E. & N. 1/4 on W. edges & raised mound of stone for standard cor. to secs 10 & 11 from which A cedar 8 in. dia. bears North 20 lks. dist. marked S. 10. B. T. A cedar 8 in. dia. bears N. 45 W. 50 lks. dist. marked S. 11. T. 44. S. R. 5 W. B. T.

Land, broken, Soil & Rate Cedar & Pine of commercial value

Special Standard Parallel

Chains East along S. side sec. 11
Va. 15°. 30'. E.

10.50 Wash drains S.

40.00 Set Sandstone 16×9×4 in. 11 in. deep marked 1/4 on N. side & raised mound of earth from 4 pits each 24×12×12 in. for 1/4 sec.

63.50 Johnson's Brook 3 lks. wide 6 in. deep runs S.

72.50 Navajo Trail bears S. E. & N. W.

80.00 Marked Cedar 8 in. dia. blazed & notched 1 on E. & S. sides & 2 on N. & raised mound of earth from 4 pits each 24×12×12 in. for cor. to secs. 11 & 12 from which A Cedar 18 in. dia. bears N. 19° W. 80 lks dist. marked S 11. 34 4. S. R. S. N. B. T. A Cedar 12 in. dia. bears N. 45°

12.00

40.00

68.00

68.40

80.00

South R.B.M. Salt Lake Meridian

Chains E. 24.4 lks. dist. marked S.12.B.T.
Land, level - Soil Fair
Cedar & Pine of commercial value

East along S. side sec. 12.
Va. 15° 30' E.

12.00 Pile brass A & S.

40.00 Set Sandstone 12×10×10 in 8 in deep
marked 1/4 on N. side mound
of earth from 4 pits each 24×12×12 in for
1/4 sec. cor.

68.00 Wash drains S.W.

68.40 Cedar 15 lks N. of line

80.00 Set Charred Cedar Post 48×4×4 in
12 in deep & raised mound of earth
from 4 pits each 24×12×12 in & hole dug
60 on N & S & W. edges for standard
cor. to secs 7 8 12 & 18 T. 4 S. R. 2 W. S.M.
from which

9th Special Standard Parallel

Chains

Cedar 12 in. dia. bears N. 89° 45' E. 11.60 chs. dist. marked with a blaze. Land: level, soil: Fair - Timber = Cedar of commercial value

---

Note: For General Description see end of subdivision notes T. 44 S. R. 5 W.

In Range 4 1/2 West.

For explanation of R. 4 1/2 W. see note at end of mile south side sec 32. 7th Standard South R. 4 W.

East along S. side sec. 7

Va. 15° 30' E.

40.00 Set Sandstone 11 x 10 x 5 in. in dep. marked 1/4 on N. side mound of earth 4 feet each 24 x 12 x 12 in

BOOK

South

Chains

80.00

40.00

BOOK-A-154

Township 11 N. South **R.** 14 ½ West

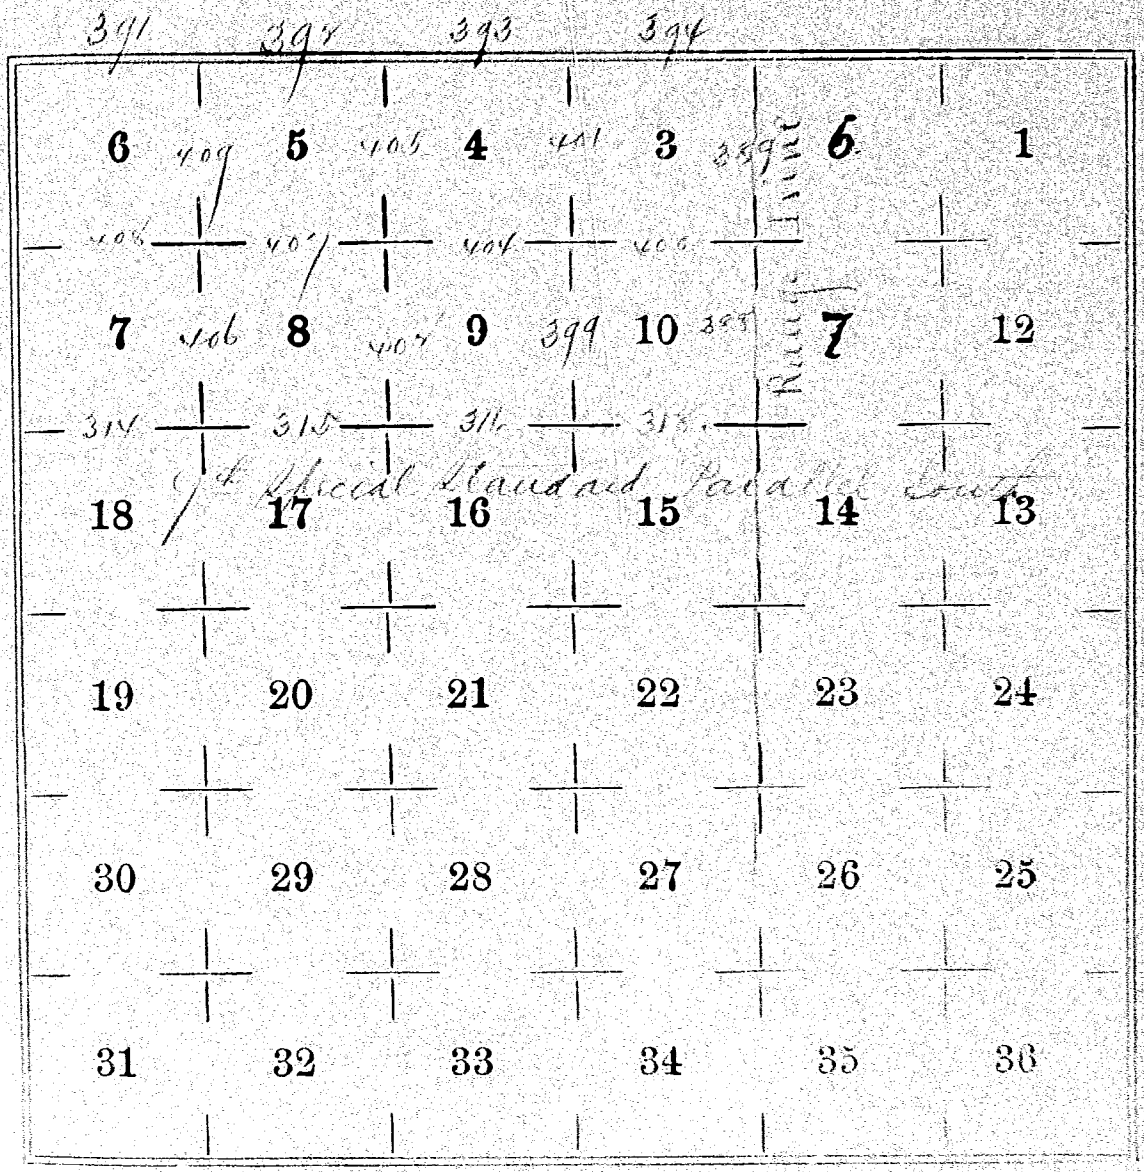

South R. 4 1/2 W. Salt Lake Meridian

Chains for 1/4 sec. cor.

80.00 Set Charred Cedar Post 48 x 4 x 4 in
notched 3 on S. & 1 on W. & 2 on E. edges
12 in deep, & raised mound of earth from
4 pits each 24 x 12 x 12 in for standard
cor. to secs. 7 & 8 from which
A Cedar 10 in. dia. bears S. 30. W. 28 lks
dist. marked S. 7. T. 4 S. R. 4 1/2 W. B. T.
A Cedar 10 in. dia. bears S. 30. W. 30 lks
dist. marked S. 18. B. T.
Sand, level. Soil 1st class
Cedar & Pine of commercial value

East along S. side sec. 8
Va. 15° 30'. E.

40.00 Set Sandstone 20 x 11 x 2 in 15 in deep
marked 1/4 on E. side & raised mound
of earth from 4 pits each 24 x 12 x 12 in for
1/4 sec. cor. from which
A Cedar 24 in. dia. bears S. 60 W. 76

Special Standard Parallel

Chains	
	Mks. dist. marked 1/4 S. B. T.
50.00	Rocky Bluff bears N. W. & S. E.
80.00	Set Sandstone 20×14×3 in. 15 in. deep notched 2 on E & 2 on W. & W. edges raised mound of stone for stand. and cor. to secs 8 & 9 from which A Pine 12 in. dia. bears S. 52 W. 134
	Mks. dist. marked S. 17. T. 44 S. R. 4 W. B. T.
	A Pine 12 in. dia. bears S. 33. E. 115 lks. marked S. 16. B. T.
	Land W. 1/2 nearly level Soil & Stone - E. 1/2 broken, Soil & Stone Cedar & Pine of commercial value

---

East along S. side sec. 9

Va. 15. 30. E.

15.00	Edge of Bluff bears N. E. & S. W.
20.00	Same " " S. E. & N. W.

South R. 4½ W. Salt Lake Meridian
Idaho

25.00 Same Bluff bears N. E. & S. W.

40.00 Set a small stone marked with a cross (+) in a mound of earth from which pits each 24×12×12 in for ¼ sec cor. from which
A cedar 12 in. dia, bears N. 60 E. 210 lks. dist. marked ¼ S. B. T.

80.00 Set Plate Rock 24×14×2 in 1 in deep notched 3 on W. edges 1 on W & 2 on N. Raised mound of earth from which pits each 24×12×12 in for standard cor. to secs 9 & 10
from which
A cedar 10 in. dia, bears N. 1. E. 25 lks. dist. marked S. 10. T. 44. S. R. 4½ W. B. T..
A cedar 10 in. dia, bears S. 60 E. 144 lks dist. marked S. 15. B. T.
Land, broken clay hills
Soil & Rock

9th Special Standard Parallel

chains Cedar & Pine of commercial value

East along S. side sec. 10.

Va. 15. 30. E.

40.00 Set Planed Cedar Post 48 x 4 x 4 in 12 in deep marked 1/4 S on N. side & deposited small stone marked with a cross (+) in mound of earth from which bears N 4 1/2 E 1 link for 1/4 sec. cor.

80.00 Bear timber, Set Planed Cedar Post 48 x 4 x 4 in 12 in deep notched 4 on N. 6 on E. & 2 on N. side in mound of earth from which bears N 24 E 12 1/2 links for Standard cor. to secs. 10 & 11.

from which

A Cedar 15 in dia bears S. 74. W 420 lks. dist. marked S. 15. T. 44. R. 4 1/2 W. B. T.

Land Broken Soil & Rate

Cedar & Pine of commercial value

South R. 4½ W. Salt Lake Meridian

Chains. For General Drocription & approval see end of subdivision notes T. 44. S. R. 4½ W.

Feb 1st 1877 T. C. Bailey

In Range 4½ West.

Having now run four miles in Range 4½ West to make up the deficiency in closing between Ranges 4 & 5 West which was found on the 7th Standard Parallel south & explained in the mile referred to at the beginning of the notes of R. 4½ W. on this line. Therefore from the Standard cor. to T. 44 S. R. 4 & 4½ W. & common to secs. 7 & 10

I run

East along S. side Sec. 7.

Va. 15° 30' E.

BOOK-A-154

Township 111 South **R.** 11 West

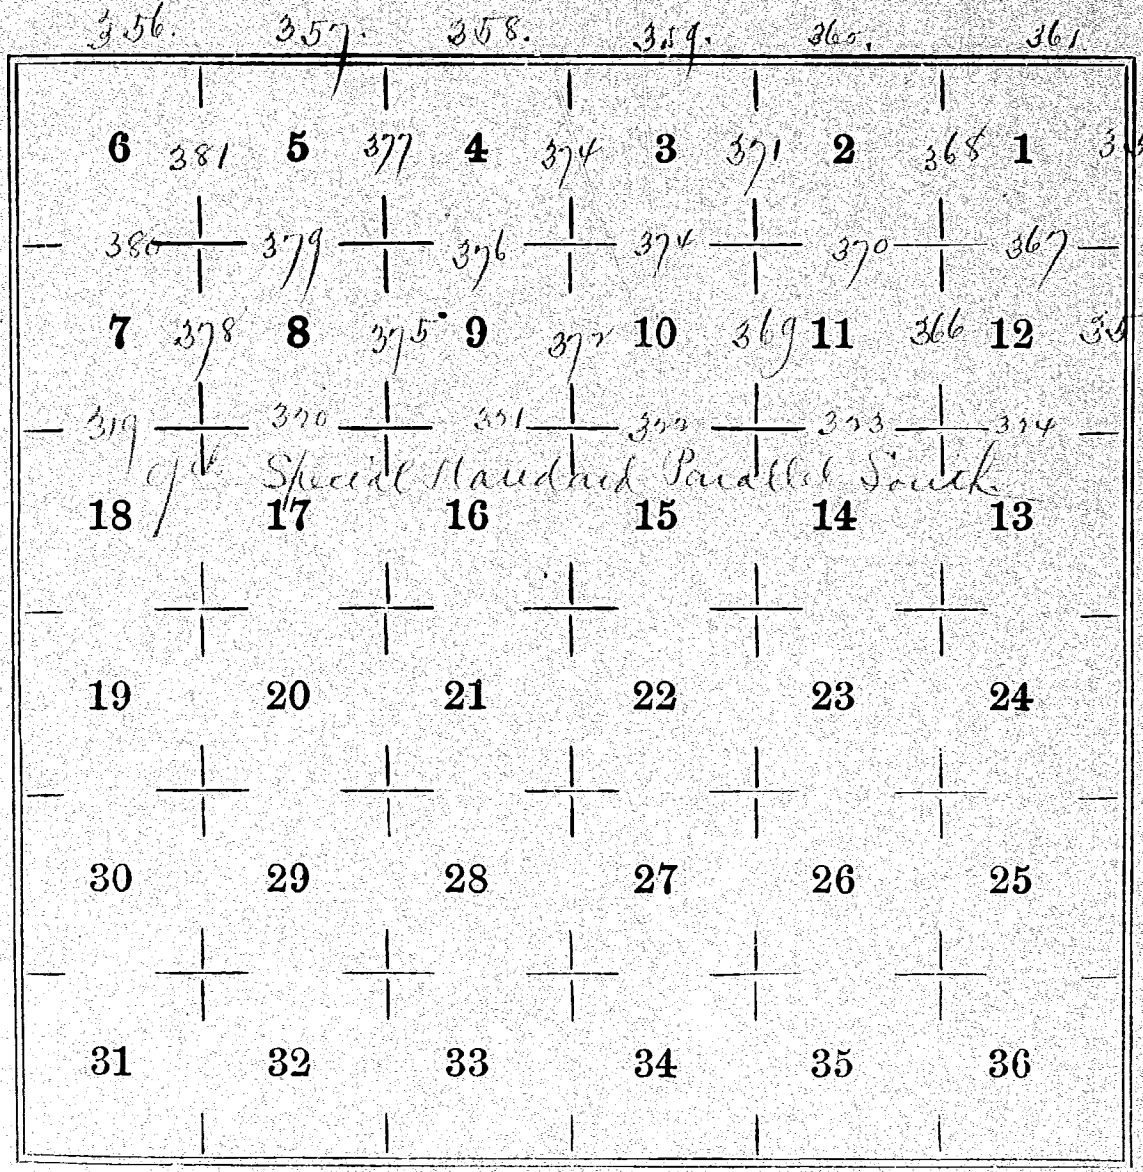

9th Special Standard Parallel 370

Chains

40.00 Deposited small stone marked with a cross (+) in mound of earth from 4 pits, each 24×12×12 in. for 1/4 sec. cor.

80.00 Set Cedar Post 4 8×4×4 in. 12 in. deep marked 5 on E. 1 on N. 2 on N. sides & deposited small stone marked with a cross (+) in mound of earth from 4 pits, each 24×12×12 in. for standard cor. Bears 7 & 8 Land, level - soil, Dale No Timber -

---

East along S. side sec. 5.
Va. 15° 30' E.

13.40 Wash drains S.

40.00 Deposited small stone marked with a cross (+) in mound of earth from 4 pits, each 24×12×12

South R. 4 W. Salt Lake Meridian

Chains in for 1/4 sec. cor.

80.00 Set Sandstone 13x10x8 in 8 in deep
9 N.
notched 4 in E & 2 on N. edges & raised
mound of earth from 4 pits each
24x12x12 in for standard cor. to
secs 8 & 9 —
Land gently rolling, Soil State
No Timber —

East along S. side sec. 9
Va. 15. 30. E.
Enter Flat bears N. E. & S. W.
16.80 Trail bears N. E. & S. W.
32.00 Wash drains S. W.
40.00 Deposited small stone marked
1/4 in mound of earth from 4 pits
each 24x12x12 in for 1/4 sec. cor.
Leave Flat & enter Timber —
80.00 Set Limestone 18x12x4 in 12 in deep

9th Special Standard Parallel

Chains notched 3 on E & W. 2 on N. edges &

raised mound of earth from 4

pits each 24×12×12 in for standard

cor. bears 9 & 10 from which

A cedar 14 in. dia. bears N. 65 E. 80 lks

dist. marked S. 10. T. 44 S. R. 4 W. B.T.

A cedar 12 in. dia. bears S. 20 E. marked

S. 13. B.T.

Land N. & level, soil & rate

E. & rolling " 2 rate

Cedar & Pine on E. 40. chs of commercial val

East along S. side sec. 10.

Va. 15. 30. E.

40.00 Set Limestone 12×8×8 in 8 in deep

marked 1/4 on N. side & raised

mound of stone for 1/4 sec. cor.

from which

A Pine 7 in. dia. bears N. 60 E.

South R.4.W. Salt Lake Meridian

Chains 76 lks. dist marked 1/4 S. B.T.

80.00 Set Limestone 14×10×9 in 9 in deep notched 4 on N. 2 on E. & W. & E. edges & raised mound of stone for standard cor. to secs. 10 & 11 from which

A Cedar 3 in. dia. brass N. 40. W. 56 lks. dist. marked S. 10. 7. 44. S. R. 4. W. B.T.

A Cedar 3 in. dia. brass N. 48. E. 52 lks dist. marked S. 11. B.T.

Land rolling - Soil 2nd rate - Cedar & Pine of commercial value

---

East along S. side sec. 11.

Va. 15° 30'. E.

40.00 Set Limestone 18×10×6 in 12 in deep marked 1/4 on N. side raised mound of stone for 1/4 sec cor from which

A Pine 5 in. dia. brass N. E. W. 40 lks.

9th Special Standard Parallel North

Chains dist. marked 1/4 S. B.T.

80.00 Set Limestone 20x10x4 iw 15 iw
deep notched S on N. 2 on E. & W
edges raised mound of stone
for standard cor. bears. N & E
from which
A Cedar 8 iw. dia. bears S. 35, W
23 lks. dist. marked S. 12, T. 44
S. R. 4. W. B.T.
A Cedar 10 iw. dia. bears N. 55. E
90 lks. dist. marked S. 12. B.T.
Land rolling. soil 2nd rate, rocky
Cedar & Pine of commercial value

East along S. side sec. 12.
Va. 15° 30'. E.

10.00 Wash drains N. W.

40.00 Set Sandstone 15x10x5 iw 10 iw
deep marked 1/4 on N. side &

R. 4. W. Salt Lake Meridian

Chains raised mound of earth
from 4 pits each 24 x 12 x 12 in
for 1/4 sec. cor.

10.00 Set Sandstone 12 x 12 x 10 in 8 in
deep notched 6 on E & W. 2 on N.
edges raised mound of earth
from 4 pits each 24 x 12 x 12 in for
Standard cor. to T. 44. S. R. 3 W.
from which
A Cedar 7 in. dia. bears S. 60. W.
160 lks. dist. marked S. 13. T. 44. S.
R. 4. W. B. T.
A Cedar 6 in. dia. bears N. 80. E.
230 lks dist. marked S. 7. T. 44. S.
R. 3. W. B. T.
Land, rolling - Soil Gravelly, rocky,
good grass -
Cedar & Pine of commercial value

9th 3rd

Special Standard Parallel

BOOK-

Chains	Note: For General Description	Chains
	of Range 4 West see end of subdivision notes of the same —	
	In Range 3 West — East along S. side sec. 7. Par. 15° 30. E.	
38.00	Foot of Buckskin Plateau bears S.E. & S.W. ascend	
40.00	Set Limestone 20×18×8 in 15 in deep marked 1/4 on S. side & mound of stone for 1/4 sec. cor.	15.00
		20.00
		40.00
50.00	Rocky Gulch drains N.W.	
80.00	Top of Plateau. Set Limestone 18×15×4 in 12 in deep notched 5 on N & 2 on S. edges & raised mound of stone for standard cor. Bears. 78 E from which	

South R. 3. W. Salt Lake Meridian

chains A Cedar 5 in. dia. brs S. 30. W. 45 lks dist. marked S. 18. T. 44. S. R. 3. W. B. T.

A Cedar 20 in. dia. brs N. 60. W. 160 lks dist. marked S. 7. B. T.

Land W. ½ level E. ½ broken Soil Slate - rocky, good grass - Cedar & Pine of commercial value -

---

East along S. side sec. 8.

Va. 15°. 30'. E.

15.00 Gulch drains N.

20.00 " " N. W.

40.00 Set Limestone 16 × 10 × 6 in. 1 in. deep marked ¼ on N. side mound of stone for ¼ sec. cor. from which

A Cedar 10 in. dia. brs S. 40. W. 25 lks. dist.

A Pine 6 in. dia. brs N. 30. E. 22 lks

9th Special Standard Parallel Sout... R. 3. W.

Chains	
	dist. both trees marked 1/4 S. B. T.
71.50	Gulch drains N. W.
80.00	Set Limestone 18x14x14 in 12 in deep notched 2 on N. 40 on E & 2 on N. edges raised mound of stone for standard cor. to secs. 8 & 9 from which A Pine 8 in. dia. brs S. 10. W. 56 lks dist. marked S. 17. T. 44. S. R. 3. W. B. T. A Pine 15 in. dia. brs N. 50. E. 75 lks dist. marked S. 9. B. T.
	Land broken - Soil & Rate rocky - good grass - Cedar & Pine of commercial value

---

East along S. side sec. 9.
Tp. 15. 30. E.

40.00	Set Limestone 15x15x6 in 10 in deep marked 1/4 on N. side Brass mound of stone for 1/4 sec cor.

Chains from	
	N.
	72
	N.
	54
	mo
0.00	Se
	inc
	N. E
	sto
	99
	N.
	72
	R.
	N.
	45
	La
	go
	Ce

R. 3. W. Salt Lake Meridian

chains from which

A Cedar 6 in. dia. bears S. 33. W.
72 lks. dist.

A Juniper 5 in. dia. bears East
54 lks. dist., both trees
marked 1/4 S. B. T.

0.00 Set Limestone 20 x 8 x 6 in. 15
in. deep notched 3 on E. & W. 2 on
N. edges & raised mound of
stone for standard per. B. Cor.
9 & 10 from which
A Cedar 6 in. dia. bears S. 33. W.
72 lks. dist. marked S. 16. 7 4 4. S.
R. 3. W. B. T.
A Cedar 5 in. dia. bears N. 10. W.
45 lks. dist. marked S. 9. B. T.
Land rolling - Soil Fair
good grass -
Cedar & Pine of commercial value

9th Special 330 Standard Parallel

Chains East along S. side sec. 10.

Va. 15° 30' E.

17.50 Road to Lee's Ferry, bears N 45
35.00 Ravine drains N.
40.00 Set Limestone 18x12x12 in 12
in deep marked 1/4 on N. side &
raised mound of stone for 1/4 sec
cor. from which
A Cedar 14 in. dia. bears S. 70 E.
15 lks. dist.
A Cedar 8 in. dia. bears West
35 lks. dist, both trees marke
1/4 S. B. T.
55.00 Ravine drains N.
75.00 N. edge of round hole
80.00 Set Limestone 16x10x4 in 11
in deep notched 2 on E & N.
84 on N. edges & raised mound
of stone for standard cor. to

South R.3.W. Salt Lake Meridian.

Chains to Secs. 10 & 11 from which
Cedar 10 in. dia. bears N. 35. E.
40 lks. dist. marked S. 11. T. 44. S.
R. 3. W. B.T. -
Cedar 6 in. dia. bears S. 75. E. 30
lks. dist. marked S. 14. - B.T. -
Land rolling, Soil 2nd rate -
Cedar & Pine of commercial value

Note: It is impracticable to
continue the line further
east I abandon it here.
Feb. 2d 1877 T. C. Bailey

For General Description see
end of subdivision notes of
this Township -

3301

BOOK-

U. S. SURV

Salt Lake

The foregoi

9th Sp

Township N

Executed by

Under Jan

day of Sep

February

examined, the

planations m

surveys they a

Ne

332

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah June 21st 1877

The foregoing field notes of the survey of the 9th Special Standard Parallel S.

Township No. ~~~~ *Ranges No.* 3.4.4½.5.6.7

Executed by Bailey & Burrill

Under Joint *contract of the* 4th *day of* September *1876, in the month of* February *1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathaniel Mosby

Surveyor General for Utah.

BOOK-A

20a Ex

BOOK-A-154 11 335

20d Examined by C. H. Cranwell C.C.

Field Notes
of the
Subdivisions of
Township 44 South Range 3 West
Salt Lake Meridian
Utah Territory
as surveyed by
Bailey & Burrill
under joint contract Bailey & Burrill
No. 3.- dated Sept 4th 1876.

Survey commenced Feb 22d 1877
" completed " 22d "

7

Subdivisions Wit. R. 3. W.

Chains		Chains
	Survey commenced Feb 22nd 1877 by J. H. Burnett The 6th Special Standard Parallel South being run only 17.00 to the cor. to secs. 10 & 11 thereon 40.00 from said Standard cor. Drum 65.00 North bet. secs. 10 & 11 79.00 Va. 15° 30' E.	
40.00	On S. edge of Gulch Set Limestone 16x10x8 in. 11 in. deep mkd. X in W. side Raised mound of stone for 1/4 sec. cor.	39.00
45.00	Gulch drains E.	
80.00	Set Limestone 18x10x4 in. 12 in. deep notched 2 on E & 1 on S. edges & raised mound of stone for cor. to secs. 2. 3. 10 & 11 -	79.00
	Land broken - Soil 2nd rate - Timber - Cedar & Pine	

BOOK-A-154

337

Salt Lake Meridian

	Chains	North on random line
		Sec. 23
		Van. 15. 30 E.
	17.00	Gulch drains S. E.
	40.00	Set temp. 1/4 sec. cor.
	65.00	Gulch drains E.
	79.90	Intersect north boundary of Township 17 Nth. R. 8 E. on S. sec. 23
		293 from which
		S. 0° 7' W. on true line
		Sec. 23
	39.90	Set Limestone 15x10x5 in 10 in. deep marked 1/4 on W. side mound of stone for 1/4 sec. cor.
	79.90	The cor. to sec. 2. 3. 10 & 11.
		Land, Broken - Soil & rate
		Timber - Pine & Cedar -

From the Special Standard

Subdivisions T. 44 S., R. 3 W.

Chains	Cor. to secs. 9 & 10
	North, bet. said secs 9 & 10
	Va. 15° 30' E.
40.00	Set Limestone 16x10x4 in. 11 in.
	Iron marked ¼ on W. side raised 39.95
	mound of stone for ¼ sec. cor.
65.00	Road to Arizona bears N.W. & S.E.
80.00	Set Limestone 15x9x4 in. 10 in. dug 79.90
	notched 3 on E & 1 on S. edges & raised
	mound of stone for cor. to secs. 3. 4. 9 & 10
	Land undulating - rocky
	Soil Poor.
	Timber - Cedar & Pinion Pine

	East on random line
	bet. secs. 3 & 10 316.00
	Va. 15° 30' E. 40.00
40.00	On Ridge bears N.E. & S.W. Set Stone 80.06
	¼ sec. cor.

Salt Lake Meridian

Chains

79.90 Intersect 1st S. line 17 lks.
N. of cor. to secs. 34 & 10 from which
S. 89° 55' W. on true line
1/4 sec. 34 & 10

39.95 Set Limestone 14 x 10 x 8 in. 9 in.
deep marked 1/4 on N. side of mound
mound of stone for 1/4 sec. cor.

79.90 The cor. to secs. 3, 4, 9 & 10.
Land rolling - rocky
Soil Sandy
Timber Cedar & Pine -

North on random line
1/4 sec. 34
Va. 15° 30' E.

16.00 Gulch drains N.E.

20.00 Set temp. 1/4 sec. cor.

80.06 Intersect N. boundary of Town-
ship at cor. to secs. 34 & 3 from which

Subdivisions T. 44. S. R. 3 W. 340

Chains	North on true line
	Set. acc. 39+4
40.06	Set Limestone 16×11×9 in. 11 in.
	deep marked 1/4 on N. side raised
	mound of stone for 1/4 acc. cor.
80.06	The cor. to acc. 3.4. 9810
	Land rolling. Soil & rate rocky
	Timber — Cedar & Pine —
	From the Standard cor. to acc.
	899 Links
	North bet. acc. 899
	Va. 15° 30' E.
40.00	Set Limestone 18×9×6 in. 12 in.
	deep marked 1/4 on N. side raised
	mound of stone for 1/4 acc. cor.
42.00	Gulch drains N. W.
80.00	Set Limestone 18×12×9 in. 12 in.
	deep notched 4 on E & W sides edges &

N. Salt Lake Meridian

	Chains	Raised mound of stone for cor. to secs. 4. 5. 8 & 9 –
11 in.		Land – rolling – Soil – Slate & rocky
raised		Timber – Cedar & Pine –
or.		
		East on random line
ocky		Ist. secs. 4 & 9
		Va. 15° 30'. E.
	40.00	Set temp. 1/4 sec. cor.
secs.	59.00	Road to Arizona bears N. W & S. E.
	80.14	Intersect N 5. link at cor. to secs. 4 & 9 from which
		West on true line
12 in.		Ist. secs. 4 & 9
raised	40.07	Set Limestone 18 x 9 x 6 in. 12 in. deep marked 1/4 on E. side Raised mound of stone for 1/4 sec. cor.
2 in.	80.14	The cor. to secs. 4. 5. 8 & 9
good		Land – rolling – Soil – Slate – Rocky

Subdivisions T. 44 N., R. 3 W., 5th

Chains	Timber - Cedar & Pine -	Chains
	North on random line	
	Set. secs. 4 & 5	40.00
	Va. 15° 30' E.	
40.00	Set temp. 1/4 sec. cor.	
80.10	Intersect N. boundary of township at cor. to secs. 4 & 5 from which	40.50
	South on true line	80.00
	Set. secs. 4 & 5	
40.10	Set Limestone 20x10x10 in. 15 in. dug	
	marked 1/4 on N. side raised mound	
	of stone for 1/4 sec. cor.	
80.10	The cor. to secs. 4. 5. 8 & 9	
	Land rolling - fair to Butte, rocky	
	Timber - Cedar & Pine -	
	From the standard cor. to secs.	

Salt Lake Meridian

Chains

798 Drum
North Art. acs. 798
Va. 15° 30' E.

40.00 South side of Hatch set Limestone
14 x 10 x 9 in. 9 in. deep marked 1/4 on
W. side raised mound of stone for
1/4 sec. cor.

40.50 Gulch drains N.W.

80.00 Set Limestone 20 x 6 x 5 in. 15 in.
deep notched 5 on E&W on S. edges
raised mound of stone for cor
to secs. 5. 6. 7 & 8

Land rolling —
Soil Slate — rocky
Timber — Cedar & Pine —

East on random line
Art. acs. 598
Va. 15° 30' E.

Subdivisions T. 44 N., R. 3 W.

Chains		Chains
40.00	Set temp. 1/4 sec. cor.	40.00
116.00	Gulch 4 rods N.W.	799
80.00	Intersect N. & S. line 35 lks. S. of cor. to secs. 5 & 8 from which S. 89° E. 5. M. on true line 4 brs. pecs. 5 & 8	
40.00	Set Limestone 14 x 10 x 4 in. 9 in. deep marked 1/4 on N. side & raised mound & stone for 1/4 sec.	39.96
80.04	The cor. to secs. 5. 6. 7 & 8	
	Land rolling -	79.9
	Soil Drift - Rocky -	
	Timber - Cedar & Pine -	

West on random line
4 brs. secs. 6 & 7
Va. 13° 30' E.

20.00	Descend	
26.00	Foot of slope bears E. & W.	38.00

Salt Lake Meridian

chains 40.00	Set temp. 1/4 sec. cor.
79.96	Intersect West boundary of Township 1 N. R. 5. W. cor. to secs. 6 & 7 from which S. 89° 53' E. on true line 4 lks. secs. 6 & 7
39.96	Set Limestone 16 x 12 x 9 ins. 11 ins. deep, marked 1/4 on North side, raised mound of stone for 1/4 sec. cor.
79.96	The cor. to secs. 5. 6. 7 & 8 Land. Broken - Soil & Vate. rocky Timber - Cedar & Pine -

---

North on random line
4 lks. secs. 5 & 6
Va. 15° 30' E.

38.00 Gulch drains N. W.

Sub divisions T. 44. N. R. 3. W.

Chains	
40.00	Set stone 1/4 sec. cor. Along west slope
79.90	Intersect north boundary of township 7 lks. E. of cor. to secs. 5 & 6 from which S. 0° 07' E. on true line bet. secs. 5 & 6
39.90	Set Limestone 18x14x9 in. 12 in. deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor.
79.90	The cor. to secs. 5. 6. 7 & 8 Land broken Soil Slate rocky Timber Cedar & Pine Feb 22nd 1877 T. C. Bailey

BOOK-A-154 347

Salt Lake Meridian

General Description

The surveyed lands of this township lie on the "Buckskin Plateau" and are covered with Cedar & Pine timber.

The lands are agricultural no indications of mineral being found.

T. C. Bailey
U. S. Dep. Surveyor

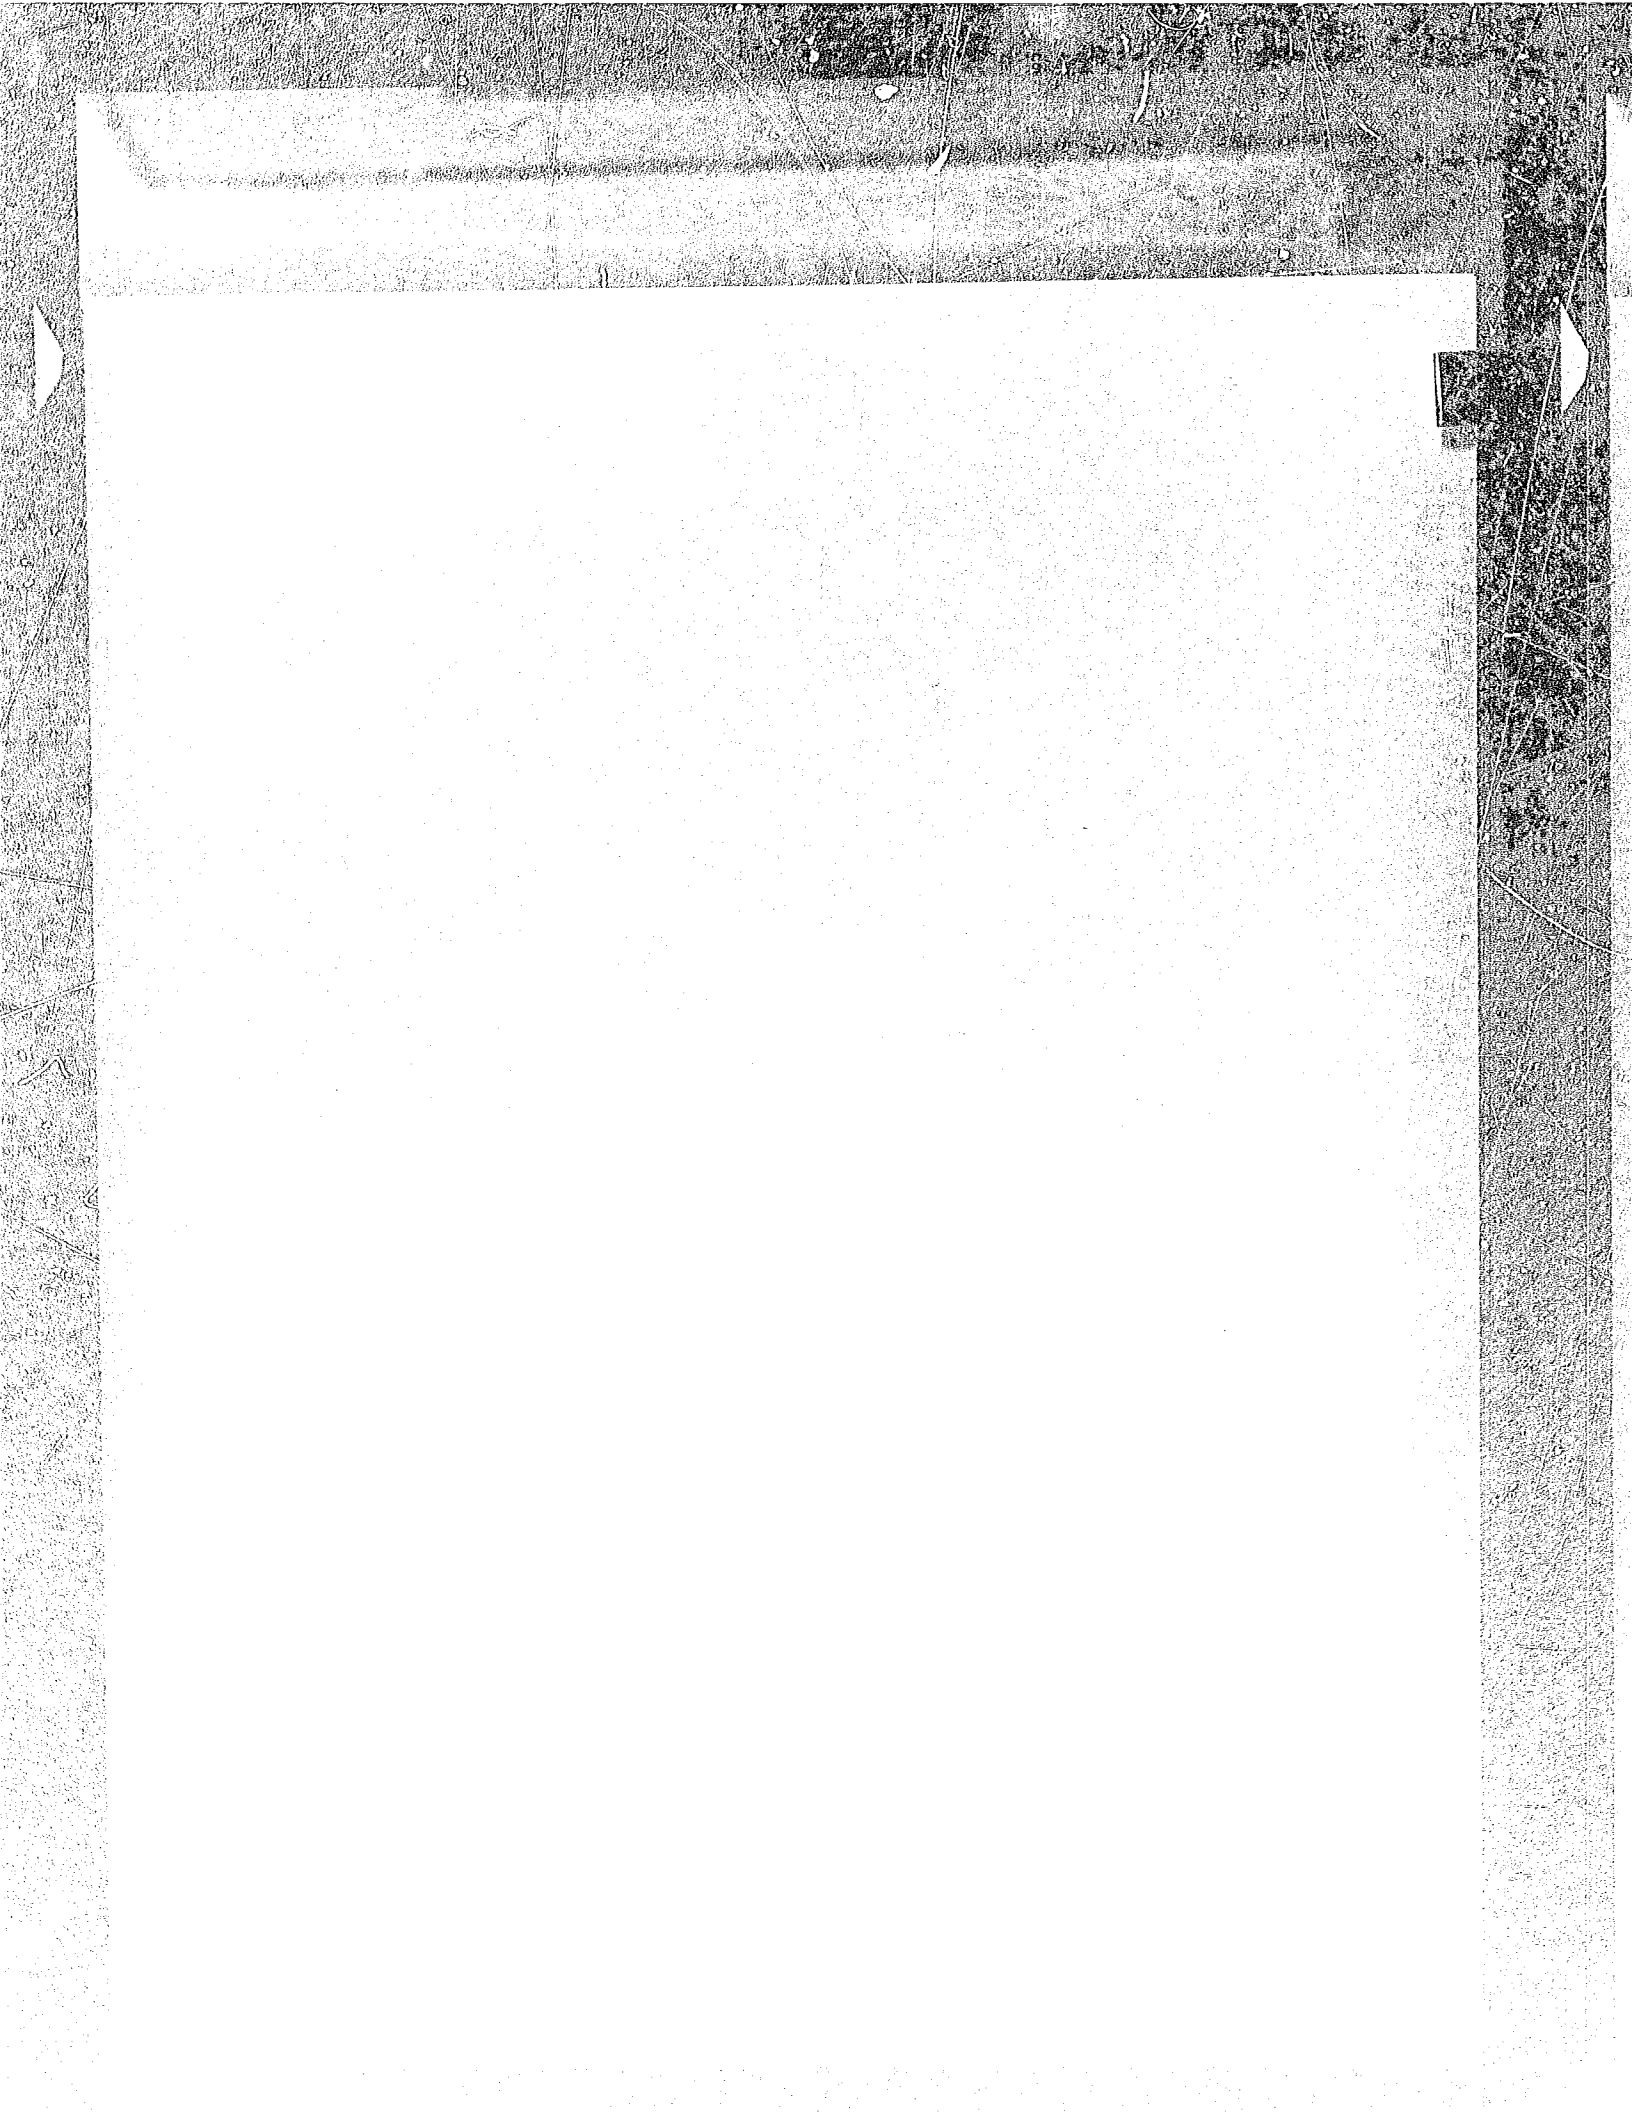

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Subdivisions of

Township No. 44 S. *Range No.* 3 W.

Executed by Bailey & Burrill

Under joint *contract of the* 4th

day of September 1876, *in the month of*

February 1877, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Thos. Kimball

Surveyor General for Utah.

BOOK-A-154 12 351

Old Examined by C.H. Cranwell. C.C.

Field Notes
of the
East and North Boundaries
of
Township 44 South Range 4 West
of the
Salt Lake Meridian
as surveyed by
F. C. Bailey
under Joint Contract
Bailey & Burrill
No 73 — dated Sept 4th 1876

Survey commenced Feb 15th 1877

" completed " 15th "

East Boundary T. 4 to S. R. 4 W. Salt L

Drains. Survey commenced this Jan
15th 1877 by T. C. Bailey.
From the standard cor. to
sec. 7 & 12. T. 4 S. R. 3 & 4 W.
on the 9th Special standar
parallel north Drum
North, 61 lks. secs. 7 & 12
Va. 15° 20' E.

29.50 Wash drains N & W.
40.00 Set Limestone 14 x 12 x 4 in
in deep marked ✓ on W. side
raised mound of stone for
sec. cor.
40.50 Wash drains N. W.
72.00 " " "
80.00 Set Limestone 14 x 4 x 6 in grind
notched ✓ on N & S. edges rais
mound of stone for cor. to secs
1. 6. 7 & 12

50 Was
83 "
.00 Set
in d
rais
✓ a
Stee
"
both
.00 Was
.00 Set
deep
S. edg

BOOK-A-154

S.R. Salt Lake Meridian

Hills Land rolling. Soil Sandy
good grass -
Timber Cedar & Pine -

North bet. Secs. 1 & 6
Var. 15° 30' E.

.50 Wash drains W.

.85 " " " N.W.

.00 Set Sandstone 18x14x5 in 12
in deep marked 1/4 on W. side
raised mound of stone for
1/4 Sec. cor. from which
Cedar 8 in dia. bears S. 6 W. dist 1
" 5 " " " N. 25 " "
both trees marked 1/4 S. B.T.

.00 Wash drains N.W.

.50 Set Sandstone 13x12x10 in 8 in
deep notched 6 on N. & W. & 2 on
S. edge x raised mound of

East Boundary T. 44 S. R. 4. W. North

earth from 4 pits each 2 4 lks
x 12 in for cor. to T. 43 & 44 S. R.
4 W. from which
Hackberry 12 in dia bears S. 45
180 lks dist marked S. 1. T. 44
S. R. 4 W. B. T.
Hackberry 12 in dia bears N. 80
E 70 lks dist marked T. 43 S.
R. 4 W. S. 36. B. T.
Land rolling - Soil 2nd
Gravelly -
Timber Cedar & Pine

Note: For General Description
& approval see end of
divisions notes of this township

R. 4. North Boundary T. 44 S. R. 4. W.

From the established cor.
to T's 43 & 44 S. R's 3 & 4 W.
West on random line
bet. said Townships
Va. 15° 30' E.
setting temp. cors. at every
40.00 & 80.00 chs. I find the
line to be 5 miles 79 chs & 70
lks. & the falling to be 60 lks
S. of the cor. to T's 43 & 44 S. R's 4
& 4½ W. & the correction for
the true line to be 10 lks N.
per mile & the bearing to be
S. 89° 56' E.

From the cor. to T's 43 & 44 S.
R's 4 & 4½ W.
S. 89° 56' E. on true line
bet. secs. 6 & 31

North Boundary T. 44 S. R. 4 W.

Chains		
	Va. 15° 30' E.	
39.70	Set Sandstone 16×12×3 in. deep marked T 44 N S 4 W B.T. with mound of stone for sec. cor. from which Red Cedar 8 in dia bears S. 80 W. 2 links distant " 6 " " " " " N. 10 E. 83 links distant both trees marked T 44 S. B.T.	
45.00	Along S. slope of Bluffs bears S 88 E.	
79.70	Set Sandstone 16×14×3 in. deep moleded S on E & I on W. edges with mound of stone for cor. to secs 5. 6. 31 & 32 — from which Red Cedar 10 in dia bears N. 15 E. 85 links dist marked S. 31. T. 44 S. R. 4. W. B.T.	
	Land — broken — Soil 2nd rate	
	Sandy — Timber — Cedar & Pine	

Salt Lake Meridian

Runs South 89°.56.E. on true line
bet. secs 5 & 32
Va. 15°.30.E.
Post Hills or Breaks bear N.E. & S.W.
Set Sandstone 15×10×5 in 10 in
deep marked 1/4 on N. side &
with mound of stone for 1/4
sec. cor. - Lear timber -
Set Charred Cedar Post 5 1/2 ft ×
4×4 in 12 in deep notched 4
on E & 2 on W. edges & raised
mound of earth from 4 pits
each 24×12×12 in for cor. to secs.
4. 5. 32 & 33
Found nearly level
Soil 1st rate
Timber scattering cedar on W 1/2

South 89°.56.E. on true line

North Boundary T. 44 N. S. R. 4 W.

chains lit. secs. 4 & 33

Va. 15° 30' E.

40.00 Set Planted Cedar Post 4 x 4 x 4 in 12 in deep, marked co. on E. side, raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.

52.50 Enter timber bears N.E. 95 M.

80.00 Set Planted Cedar Post 4 x 4 x 4 in 12 in deep, notched 3 on E. & W. edges & deposited a small stone marked with a cross (+) in mound of earth raised from 4 pits each 24 x 12 x 12 in for cor. & sec. 3. 4. 33 & 34 from which

Cedar Standard bears N. 25° W. 76.00

Quarter post marked S. 33. 7. 43 80.00

S. R. 4 W. B. T.

Salt Lake Meridian

Chains Hedar 16in. dia., bears N. 25° E.
106 lks. dist. marked S.34. B.T.
Land, level - Soil, Slate -
Timber - Cedar on E. part -

South 89° 56. E. on true line
Sec. secs. 34 & 34
Var. 15°. 30. E.

40.00 Cedar tree bears S.E. 45 N.
Set Sandstone 14 x 8 x 4 in. q in
deep, marked Cedar S. side
traced mound of earth from
witness 24 x 12 x 12 in. for 1/4 sec. cor.
45.00 Enter Flat covered with white
sage - bears N.E. 45 N. Hazel
bushes -
76.00 Rock drain S. N.
80.00 Set Sandstone 20 x 15 x 4 in. 5
in deep notched on S. side of

North Boundary 7.44 n. S. R. 43 W. 3rd P.M.

Chains edges raised mound of earth
from 4 pits each 24×12×12 ins
cor. to secs. 2. 3. 34 & 35.
Sand - nearly level
Air Gate
Timber - Cedar & Pine -

South 89° 56. E. on true line
bet. secs. 2 & 35.
Var. 15° 30. E.

32.00 Pine white Sage Flat Brass
N. 68 S. ft.

40.00 Set charred cedar post
48×4×4 ins 12 ins deep mark
4 cons. sides raised mound
of earth from 4 pits each 24×12
×12 ins for 1/4 sec. cor.

57.00 Small Wash drains N. ft.

80.00 Set Limestone 14×10×6 ins 53.00

Salt Lake Meridian

4 ins. deep notched on E & S
on Ridges with mound of
Stone for cor. Secs 1. 2. 35. 36.
Land-level-Fair Title
No Timber. —

South 89° 56. E. on true line
Bet. Secs. 1 & 36
Va. 15° 30' E.

40.00 Enter timber Brs. N. E. 75 li.
Set Limestone 14 x 10 x 3 ins. 4 ins
deep marked Sec on N. side
& raised mound of earth from
4 pits each 24 x 12 x 12 ins for 4 sec
cor. from which
dist
Alder 12 ins dia. Brs. N. 50° W. 45 lks
Alder 15 " " " S. 70° E. 80 " "
Both trees marked S. B. T.
53.00 Low Ridge Brs. N. E. 75 lks

North Boundary Tp. 44. S. of R. 2. W. of 4th P.M. Salt

Lot 1
80.00 Acres. E 1/2 S 1/4 3.9 4 4 5. R S 3 4 4 W

Land rolling -
Soil Slate
Timber - Cedar & Pine
on E 1/2 -
Feb 15th 1877 - T. C. Bailey

Note: For general description
& topographical of
subdivision notes of this
Township -

BOOK-A-154

363

Salt Lake Meridian

BOOK-
21a Exa

BOOK-A-154 365

21c Examined by C. H. Cranwell C. C.

Field Notes
of the
Subdivisions
Township 44 South Range 4 West
of the
Salt Lake Meridian
as surveyed by
Bailey & Burrill
under joint contract Bailey & Burrill
No 73. dated Sept 4th 1876

Survey commenced Feb 15th 1877
" completed " 16th 1877

73

Subdivisions T. 44 S. R. 4 W.

Chains		Chains
	Survey commenced Feb 13th 1877	
	by J. F. Purrill	
	From the standard cor. to secs. 11 & 12 on the 9th Special Standard Parallel South	
	North bet. secs 11 & 12	
	Va. 15° 30' E.	
15.00	Wash drains N. W.	
20.00	" " "	
40.00	Set Limestone 13 x 8 x 8 in 8 in deep marked + on N. side raised mound of stone for 4 sec. cor. from which	
	A Cedar 10 in dia bears S. 50 lks dist	40.00
	A Pine 9 " " " N. 75° W. 80 " "	48.00
	both trees marked B. T.	80.00
51.50	Wash drains N. W.	
80.00	Set Limestone 14 x 10 x 8 in 9 in deep + raised mound of stone notched 1 on E & S. edges for cor. to	

chains. secs. 1. 2. 11 12 from which
A Cedar 7 ins dia bears S. 40° W.
18 lks dist marked S. 11. T. 24 S.
R. 4. W. B. T.
A Pine 6 in dia bears N. 20° E. 72
lks dist marked S. 1. B.T.
Land broken & rocky
Soil & Rate
Timber = Cedar & Pine -

East on random line
Set. secs. 1 & 2
Va. 15° 30' E.

40.00 Set temp. ¼ sec. cor.
48.00 Wash drains N. W.
80.00 Intersect E. boundary of Town-
ship at cor. to secs 1 & 12 from which
Mst on true line
Set. secs 1 & 12

Subdivisions T. 44. S. R. 4. W.

Chains		Ch
40.00	Set Limestone 15 x 10 x 5 in 10 in deep marked ¼ north side mound of earth from 4 pits each 24 x 12 x 12 in for ¼ sec. cor.	40.0
80.00	The cor. to secs. 1. 2. 11 & 12 Land rolling, fair & rich - Good grass. Timber - Cedar & Pine	80.0
	North on random line bet. secs. 1 & 2 Va. 13° 30' E.	
16.00	Wash drains N. W.	
40.00	Set temp. ¼ sec. cor. Scar timber bears E & W.	40.0
75.25	Small Wash drains N. W.	
80.00	Intersect N. boundary of township at cor. to secs 1 & 2 from which North on true line	74.0 80.0

Chains	
	Mt. secs. 1 & 2
40.00	Pet. Limestone 12×12×2 in & in deep marked + on N. side & raised mound of stone for ¼ sec. cor.
80.00	The cor. to secs 1. 2. 11 & 12. Land rolling, soil S. ½ 2nd rate – N. ½ 1st rate – Timber, cedar & pine on S. ½.

From the Standard cor. to secs. 10 & 11. on the 9th Special Standard and Parallel South

North Mt. secs. 10 & 11

Va. 15° 30' E.

40.00	Pet Limestone 16×14×4 in 11 in deep marked + on N. side & raised mound of stone for ¼ sec. cor.
74.00	Wash drains N.
80.00	Pet Quartzite 20×10×8 in 15 in deep

Subdivisions T. 44. S. R. 4. W.

Chains notched 2 on E & 1 on S. edges varied

mound of stones for cor. to secs 2. 3. 10 & 11

from which

Cedar 3 in dia bears S. 50° W. 28 lks

dist. marked S. 10. T. 44. S. R. 4 W. B.T.

Cedar 8 in dia bears N. 88° E. 80 lks

dist marked S. 2. B.T.

Land rolling - gravelly

Soil 2d rate

Timber - Cedar -

East on random line

for. secs. 2 & 11

Va. 15° 30' E.

40.00 Set temp. ¼ sec. cor.

48.00 Wash drains N. W.

80.00 Intersect N. & S. line at cor. to secs. 2 & 11 from which

West on true line

Chain

40.0

5.0

36.0

40.0

30.0

Salt Lake Meridian

...ed	...chains brt. secs. 28 & 11
...8 & 11	40.00 Set Limestone 12"x10"x6" in 9" deep marked ¼ on N. side & raised mound of stone for ¼ sec. cor. from which
	A Cedar 12" in dia bears S. 20° W. 15 lks dist
	" " 4" " " " N. 50° E. 60 " "
	both trees marked ¼ S. B. T.
	Land - rolling - Soil 2nd rate -
	Timber - Cedar & Pine -

	North on random line brt. secs. 28 & 3
	Va. 15° 30' E.
	5.00 W. Point Cedar Ridge bears E. 8 rds W.
	36.00 Wash drains W.
	40.00 Set temp. ¼ sec. cor.
	30.00 Enter flat bears N. E. & S. W. ¼ Lewis low rolling bench -

Subdivisions T. 44 S. R. 4 W.

Chains		Sal. Chain
80.00	Intersect N. boundary of township at cor. to secs. 2 & 3 from which South on true line bt. secs. 2 & 3	
40.00	Set Limestone 16 x 10 x 8 in 10 in deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor.	50.0
		53.9
80.00	The cor. to secs. 2. 3. 10 & 11	56.0
	Land, undulating.	58.0
	Soil 1st & 2d rate	
	Timber - Cedar & Pine -	64.9
		80.0
	From the standard cor. to secs. 9 & 10 on the 9th Special Standard Parallel south North bt. secs. 9 & 10 Var. 15° 30' E.	
40.00	Bear Timber Bears N.E. & S.W. Set Limestone 16 x 14 x 3 in 11 in	

Salt Lake Meridian

chains	deep marked ¼ on W. side and raised mound of stone for ¼ sec. cor. from which
	Cedar 8 in dia brs N. 70° W. 130
	Hrs dist marked ¼ S. B. T.
50.00	Enter Flat brs N. E. & S. W.
53.90	Trail " " "
56.00	Wash drains S. W.
58.00	Dean flat brs N. E. & S. W.
	Ascend low hill.
64.00	Top of short hill brs N. E. & S. W.
80.00	Set Limestone 16 x 10 x 4 in 11 in deep notched 3 on E. & 1 on S. edges & raised mound of earth from 4 pits each 24 x 12 x 12 in for cor. Bees. 3. 4. 9 & 10
	Land - rolling - Soil S ½ 2d rate rocky N ½ 1st rate soil.
	Timber - Pine & Cedar.

Subdivisions T. 44 S. R. 4 W.

Chains East on random line
Set. secs. 34 10
Va. 15° 30' E.
30.00 Mark Hardwood 15 W.
40.00 Set temp. ¼ sec. cor.
79.30 Intersect N 15 line 7 lks N. of cor.
to secs 34 10 from which
N. 89° 53' W. on true line
Set. secs. 34 10
39.65 Set Sandstone 12x12x10 in 6 in
deep marked ¼ on N. side raised
mound of earth from ¼ pits each
24x12x12 in for ¼ sec. cor.
79.30 The cor. to secs 3 & 4 34 10
Land nearly level. Soil 1st Rate
Timber a few cedars on E. part
Feb 15th 1877 J. L. Burris

North on random line
Set. secs. 34 4
Va. 15° 30' E.

BOOK-A-154

. M. Salt Lake Meridian

Links 40.00	Set temp. 1/4 sec. cor.
80.00	Intersect N. boundary of township at cor. to secs 3 & 4 from which South on true line Brs. secs. 3 & 4
t. of cor. 40.00	Set Charred Cedar Post 4 x 4 x 4 ins 12 ins deep marked 1/4 S. on N. side & raised mound of earth from 4 pits each 24 x 12 x 12 ins for 1/4 sec. cor.
5 ins raised each 80.17	The cor. to secs. 3. 4. 9 & 10. Land gently undulating Soil, Rate Timber Cedar & Pine.

From the standard cor. to secs 8 & 9 on the 9th Special Standard Parallel South North 80 chains secs 8 & 9

Subdivisions T. 44 S. R. 14 W.

Chains	Va. 15° 30'. E.
40.00	Deposited small stone marked with a cross (+) in mound of earth from 4 pits each 24×12×12 in. for 1/4 sec. cor.
80.00	Set limestone 22×10×3 in. 18 in. deep notched 4 on E. & 10 on S. edges & raised mound of earth from 4 pits each 24×12×12 in. for cor. to secs. 4. 5. 8 & 9. Land gently rolling — Soil Sandy — No Timber.

East on random line
to pt. on sec. 4 & 9.

Va. 15° 30'. E.

40.00	Set temp. 1/4 sec. cor.
80.10	Intersect S. B. & M. line 17 lks. N. of cor. to secs. 4 & 9 from which

Sa
Chai
40.0
80.1
40.0
59.5
80.0

BOOK-A-154

Salt Lake Meridian 3-7

Chains N. 89° 53' W. on true line
Set secs. 4 & 9
40.05 Deposited small stone marked
with a cross (+) in mound of earth
from 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.
80.10 The cor. to secs 4, 5, 8 & 9
Sand, gritty, rolling -
Soil, fair
Timber, a few cedars -

North on random line
Set. secs. 4 & 5
Va. 13° 30' E.
40.00 Set temp. 1/4 sec. cor.
59.50 Wash drains S. E.
80.00 Intersect N. boundary of Town-
ship at cor. to secs 4 & 5 from which
South on true line
Set. secs. 4 & 5

Subdivisions T. 4 N. S. R. 4 W.

Chains		
40.00	Set charred Cedar Post 48×4×4 in 12 in deep marked ¼ S. on W. side Raised mound of earth from 4 pits each 24×12×12 in for ¼ sec. cor.	
80.00	The cor. to secs 4. 5. 8 & 9 Land level - Ariz 1st Rate - No Timber -	
	From the Standard cor. to secs. 7 & 8 on the 9th Special Stand- ard Parallel South North 81 chs. secs. 7 & 8 Var. 15° 30' E.	24.0 35.5 40.0 55.5
40.00	Deposited small stone marked with a cross (+) in mound of earth raised from 4 pits each 24×12×12 in for ¼ sec. cor.	60.5 80.0
80.00	Set Charred Cedar Post 48×4× 4 in 12 in deep notched S on E.	40.0

BOOK-A-154

Salt Lake Meridian

& 1 on S. edge raised mound
of earth from 4 pits each 24 x 12
x 12 in for cor. to secs 5. 6. 7 & 8 -
Land nearly level, soil & rate
No Timber -

East on random line
Nrt. secs 5 & 8
Va. 15° 30'. E.

24.00 Wash drains S. E.
35.50 " " "
40.00 Pit temp. 4 sec. cor.
55.50 Wash drains S. W.
60.50 " " "
80.00 Intersect N.S. line at cor. to
secs. 5 & 8 from which
West on true line
Nrt. secs 5 & 8
40.00 Deposited 2 pieces of shale

Subdivisions T. 44 S. R. 4 W.

6	Chains pick in mound of earth raised from 4 pits each 24 x 12 x 12 in for ¼ sec. cor.
80.00	The cor. bears S. 6. 78 E
8	Land level. Soil Slate & Timber

	Post on random line Pt. pecs. 687 Va. 13° 30' E.
12.00	Wash drains S.
20.00	" " "
24.00	" " "
40.00	Set temp. ¼ sec. cor.
48.80	Wash drains easterly
73.30	" " "
74.80	" " "
77.80	" " "
80.84	Intersect W. boundary of town

Sub.

Chains

80.84

40.84

40.00

Salt Lake Meridian

Chains

Ship 55 lks N. of cor. to secs 687
from which
N. 89° 36. E. on true line
bet. secs. 687
40.84 Set charred cedar stake
4 8 x 4 x 4 in 12 in deep marked
1/4 on N. side in mound of
earth from 4 pits each 24 x 12
x 12 in for 1/4 sec. cor. from which
4 cedar 12 in dia. bears S. 50° E.
30 lks. dist. marked 1/4 S. B. T.
70.84 The cor. to secs. 5. 6. 7 & 8
Land broken - Soil & Rate -
Timber - Cedar & Pine

North on random line
bet secs 5 & 6
Va. 15° 30'. E.
40.00 Set temp. 1/4 sec. cor.

BOOK-A-154

Salt Lake Meridian

General Description

The lands in this township embrace the surveyed portion of "Kimball Valley" so called in honor of Genl. Nathan Kimball; the soil is generally fair of commercial value Cedar & Pine timber & good grass is abundant. —

The lands are agricultural.

Feb 16th 1877 T. C. Bailey

U. S. Dep. Surveyor.

384

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st *1877*

The foregoing field notes of the survey of the Subdivisions and *East and North Boundaries of Township No.* 44 S. *Range No.* 4 W. *Executed by* Bailey & Burrill *Under* joint *contract of the* 4th *day of* September *1876, in the month of* February *1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

386

BOOK-

22d Ex

21

40.68
40.25
40.82
40.39
40.14

41.47
41.05
40.63
40.21
163.36

16

Tou

con

No.

Su

BOOK-A-154 14 387

22d Examined by C. H. Cranwell C.C.

Field Notes
of the
East & North Boundary
Township 44 South Range 4½ West
Salt Lake Meridian
Utah Territory
as surveyed by
J. W. Burrill
under joint contract Bailey & Burrill
No. 73. — dated 4th Sept 4th 1876

Survey commenced Feb 13th 1877
" completed 1 " "

74

East Boundary T. 44 S. R. 4½ W. Salt

Chains	Feb 13th 1877 by J. G. Beirne Chains
Note:	For explanation of Range 2½ W.
	est see note at end of mile
	on S. side Sec. 32. T. 35. S. R. 4. W.
	(7th Standard South)
	From the Standard cor. to sec.
	7 & 10. T. 44. S. R. 4½ W. on the
	9th Special Standard South
	I run
	North 80 ch. to sec. 7 & 10 320.00
	Va. 15° 30'. E. 40.00
40.00	Set Charred Cedar Post 48 x 4 x
	4 in. 12 in. deep marked ¼ S. on
	N. side two cord mound of earth
	from 4 pits each 2 x 1 x 1 2 in. for
	¼ sec. cor. from which
	A Cedar 5 in. dia. bears S. 30. E.
	35 lks. dist. marked ¼ S. B. T.
80.00	Set Charred Cedar Post 48
	x 4 x 4 in. 12 in. deep notched 6 in. 80.00

Salt Lake Meridian

Chains | E. & W. N. & on N. & S. sides & raised
mound of earth pits & pits
each 24 x 12 x 12 in. for cor. to secs. 3
6. 7 & 10
Land rolling - Soil, Fair
Timber - Cedar -

North Pt. secs. 3 & 6
Va. 15° 30' E.

3.00 Rocky Bluff bears E. 3 ch.

40.00 Pet Sandstone 20 x 4 x 7 in. 15 in
deep marked 1/4 on N. side & mound
mound of stone for 1/4 sec. cor.
from which
A Cedar 24 in. dia. bears S. 65.
W. 4 lks. dist
A Cedar 20 in. dia. bears N. 80. E.
20 lks. dist both trees marked
1/4 S. B. T.

80.00 Pet Sandstone 36 x 24 x 7 in

East Boundary T.44 S. R. 4½ W. Salt

Chains

deep notched 6 on E'd N. 4 on W. 9 20 on S. edges of raised mound of earth from 4 pits, each 24×12×12 in, for cor. between T. 3. 6. 3 1934.

T. 5 39 44 S. R. 5 4 4½ W. from which

A Cedar 12 in. dia. bears S. 57. W. 285 lks. dist. marked S. 31. T. 44 S. R. 4½ W. B. T.

Land broken, soil & rate Timber — Cedar —

Chains

17.50

North Boundary T. 44 S. R. 4½ W. From the established cor. to T. 5 39 44 S. R. 5 4 4½ W. Run on random line Nrly. and said Townships setting Temp. cor. at every 20.00 & 80.00 chs. I find the line

27.50
38.00
39.80
44.00

Salt Lake Meridian

	3 miles 79.00 chs 980 lks & the falling to it
Trains	to Cor, 40 lks. north of the cor. to
	T.^{S} 4 39 44 S. R.^{S} 4½ 85. W. The cor-
	rection for the true line will
	therefore be 10 lks. South per
	mile & the bearing N. 89.° 56. E.
	From the cor. to T.^{S} 4 39 44 S.
	R.^{S} 4½ 85. W.
	N. 89.° 56. E. on true line
	bet. secs. 6 & 31
	Va. 15.° 30. E.
17.50	Ledge bears N & S. cross hollow
	drains N.
27.50	Ledges bears N & S.
38.00	" " N. W & S. E.
39.80	Set Sandstone 3 x 2 x 1 foot 2 feet
	deep marked ¼ on N. side &
	raised mound of stone for ¼
	sec. cor.
44.00	N. point of Ledge, Enters
	Flat bears N. & S.

North Boundary T. 44 S. R. 4 W. Salt

Chains		Chains
79.80	Set Sandstone 14×9×3 in. 9 in. deep notched 3 on S & 1 on W. edges & raised mound of earth from 4 pits each 24×12×12 in. for cor. to secs. 5. 6. 31 & 32	
	Land N. & Aspen soil & Cedar timber — E & level soil & Cedar, No Timber —	40.00
	North 89° 56' E. on true line bet. secs. 5 & 32	
	Va. 15° 30' E.	
40.00	Set Charred Cedar Post 4 8×4×4 in. 12 in. deep marked 1/4 S. on N. side & raised mound of earth from 4 pits each 24×12×12 in. for cor.	80.00
80.00	Set Charred Cedar Post 4 8×4×4 in. 12 in. deep marked 2 notches on E & W. edges & raised mound of earth from 4 pits each 24×12×12	

Salt Lake Meridian

Chains

Cor. to sec. 5 sec. 4, T. 6 S., R. 32 E.
Land level, soil Salt -
No Timber -

N. 89° 36' E. on true line
Mt. Dees. 4833
Va. 15° 30' E.

40.00 Marked Cedar Tree in line
6 in. dia. 1/4 S. on N. side raised
mound of earth from 4 pits each
2 x 12 x 12 in. for 1/4 sec. cor. from which
A Cedar 5 in. dia. bears S. 60° W.
12 lks. dist. marked 1/4 S. B. T.
Enter Cedars.

80.00 Set White Sandstone 20 x
8 x 4 in. 18 in. deep notched 3 on
N. & 1 on E. edges raised mound
of earth from 4 pits each 2 x 12 x
12 in. for cor. to sec. 3, 4, 33 & 34
from which

North Boundary T. 44 S. R. 4 W. Salt

Chains		Chains
	A Double Cedar 10 in. dia. bears	
	N. 0. 30. W. 74 lks. dist. marked	
	S. 33. T. 44 S. R. 4 W. B. T.	
	A Cedar 11 in. dia. bears N. 45. E.	
	32 lks. dist. marked S. 34. B. T.	
	Land nearly level, Soil Sandy	Note:
	Sandy – Timber – Cedar –	

N. 89° 56' E. on True Line

Set. secs. 34 & 34

Var. 15° 30' E.

40.00 A Iron Post N. E. cor. of wall remains of Moqui's Indian Fort set

Black Sandstone 6 x 6 x 4 in. 18 in. deep, marked ¼ on N. side & raised mound of stone for 4 sec. cor. from which

A Cedar 2 in. dia. bears S. 45. W. 50 lks. dist. marked ¼ S. B. T.

80.00 The cor. to secs. 3. 6. 34 & 34 T. 44 S.

BOOK-A-154

Salt Lake Meridian

Chains 44. S. R^s 4 3/4 W.

Land Level —

Soil 1st Class —

Timber Scattering Cedar —

Notes: For General Description & Approval see end of subdivision notes for this Township —

Feb. 13th 1877

J. H. Dennis

BOOK-A-154 397

Field Notes
of the
Survey of the
Subdivision lines of
Township 44 South
Range 4 1/2 West
of the
Salt Lake Meridian
Utah Territory.
by
T. C. Bailey
under Joint Contract of
Bailey & Burnes
No 73
dated September 4th 1876

Surveyed Febr. 13th 1877.

BOOK-A-154

Subdivisional lines of T 44 S. R 4½ W.
Salt Lake Meridian

399

Chains

Survey commenced Febr. 13th 1877
by J. C. Bailey —

Note For explanation of Range
4½ W. see beginning of notes
of the exteriors of this township.

From the standard cor. to
secs 9 & 10 on the 9th special
standard Parallel South
2 chs
North between secs 9 & 10
Var. 15° 30' E.

40.00 Falling in deep wash. useless
to establish thereon at 43.50 chs
on top of high ledge bearing
E & W. set sandstone 32 x 12 x 7
in. 24 in. deep marked 1/4 W. C.
on W. side for witness 1/4 sec. cor.

80.00 Set charred cedar stake 4 x 4 +
4 in. 12 in. deep marked 1 notch
on E & S on S edge and raised mound

Chains		Chains
	of earth from 4 pits each 24 x 12 x 12 in for cor to secs 3. 4. 9 & 10	
	Land undulating soil 1st rate	79.20
	Timber cedar & pine	
	East on random line between secs 3 & 10 Var 15° 30' E.	
17.50	Descend into rolling cedar hills bear N E & S W.	
40.00	Set temporary ¼ sec. cor.	40.00
79.20	Intersect E. boundary of township 76 lks N. of cor to secs 3. 6. 7 & 10 from which N. 89° 27' W on true line between secs 3 & 10	80.00
39.60	Set charred cedar post	40.00

Salt Lake Meridian —

Chains	48 x 4 x 4 in. 12 in. deep marked 1/4 on N. side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec cor.
79.20	The corner to sections 3, 4, 9 & 10
	Land rolling soil 1st rate
	Timber cedar & pine
	North on a random line between secs. 3 & 4
	Var. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
80.00	Intersect N. boundary of township at cor. to secs. 3, 4, 33 & 34
	from which
	South on true line between secs 3 & 4
40.00	In open glade set

Subdivision lines of T. 44 S. R 4½ W

Chains		Chains
	Sandstone 19 x 10 x 3 in. 13 in deep marked ¼ on W. side & raised mound of earth	
	from 4 pits each 24 x 12 x 12 in for ¼ sec. cor.	
80.00	The cor. to secs. 3, 4 9 & 10.	80.00
	Land nearly level	
	Soil 1st rate	
	Timber pine & cedar	
	From the Standard cor. to secs 8 & 9 on the 4th Special Standard Parallel South	
	2 rods	
	North between secs 8 & 9	
	Var. 15° 30' E.	
40.00	Set charred cedar post 48 x 4 x 4 in. 12 in deep marked ¼ S. on W. side & raised	

Chains

mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec cor. from which

A cedar 15 in. dia bears S 40° W 22 lks dist marked 1/4 S. B. T.

80.00 Set charred cedar post 48 x 4 x 4 in. 12 in. deep marked 2 notches on E. & 1 on S edges and raised mound of earth from 4 pits each 24 x 12 x 12 in for cor to secs 4, 5, 8 & 9 from which

A cedar 10 in. dia bears S 45° E 170 lks. dist marked S 9 T 44 S R 4 1/2 W. Cor. B. T.

A cedar 5 in. dia bears N 50° E. 40 lks dist marked S 4 B. T.

Land undulating -

Subdivision lines of T. 44 S. R 4½ W.

Chains		Chains
	Soil 2nd rate sandy	
	timber cedar & pine	80.16
	East on a random line	
	between secs 4 & 9	
	Var. 15° 30' E.	
40.00	Set temporary 1/4 sec. cor.	
80.16	Intersect N. & S. line 36	
	lks S. of cor to secs 3, 4, 9 &	
	10, from which	40.00
	S 89° 45' W. on true line	80.00
	between secs 4 & 9	
40.08	Set sandstone 14 x 10 x 4 in. 9 in	
	deep marked 1/4 on N. side	
	and raised mound of earth	
	from 4 pits each 24 x 12 x 12 in	40.00
	for 1/4 sec. cor. from which	
	A cedar 12 in dia bears	
	N. 80° E 43 lks dist.	
	A cedar 3 in. dia bears South.	

BOOK-A-154

Salt Lake Meridian

Chains	
	37 lks dist. Both trees marked 4 S. 3 T.
80.16	Two cor. to secs 4. 5, 8 & 9
	Land undulating
	Soil 1st rate
	Timber cedar & pine

North on a random line between secs 4 & 5
Var. 15° 30' E.

40.00	Set temporary 1/4 sec. cor.
80.00	Intersect N. boundary of T. at cor to secs 4 & 5 from which

South on a true line between secs 4 & 5

40.00	Set charred cedar post 48 x 4 x 4 in 12 in. deep marked 1/4 on W. side and raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.

Subdivision lines of T. 44 S R 4½ W

Chains		Chains
80.00	The cor. to secs 4, 5, 8 & 9 Land nearly level. Soil 1st rate Timber cedar on S ½	
	From the Standard cor to secs 7 & 8 on the 4th Special Standard Parallel South I run North between secs 7 & 8 Var. 15° 30' E.	
40.00	Set sandstone 14 x 10 x 7 in. 9 in deep marked ¼ on W side and raised mound of earth from 4 pits each 24 x 12 x 12 in for ¼ sec cor from which A cedar 8 in. dia bears N 88° W 80 lks dist " " 9 " " N 60° E 30 " " Both trees marked ¼ S. B. T.	40.00 80.70 40.05
48.50	Short rock ledge bears N.W. & S.E.	
80.00	Set sandstone 15 x 10 x 4 in 9 in	

Salt Lake Meridian 607

Chains

Dep notched 3 ow 6 & 1 ow
S edges and mound of
earth from 4 pits each 24 x 12
x 12 in for cor to secs 5, 6, 7 & 8
Land nearly level
Loc 1st rate
Timber cedars ow S ½

East on a random line
between secs 5 & 8
Var. 15° 30' E.

40.00 Set temporary ¼ sec. cor.
80.70 Intersect N & S line at cor.
to secs 4, 5, 8 & 9 from which
West ow true line
between secs 5 & 8
40.05 Deposited a quart of pebbles
in mound of earth raised from
4 pits each 24 x 12 x 12 in
for ¼ sec. cor.

Subdivisions lines of T. 44 S. R. 4½ W.

Chains		Chains
80.70	The cor. to secs 5, 6, 7 & 8	
	Land nearly level	80.40
	Soil 1st rate.	
	Timber cedar on E½	
	West on a random line between secs 6 & 7	
	Var. 5° 30' E.	
40.00	Top of Red Butte 4 chs. S.	
	Set temporary ¼ sec cor. in gap between bluffs	40.00
80.40	Intersect N. boundary of T. 37 S. R. 4 W. 37 chs. E. of cor. to secs 6 & 7 from which	80.00
	S. 89° 39' E. on true line between secs 6 & 7	
40.40	Marked ¼ on N. side of sandstone in place 2 x 2 x ½ feet above ground on low sharp ridge bearing N & S, with mound of	40.00

Salt Lake Meridian 209

Chains	
80.40	Stones for 1/4 sec. cor. The cor. to secs 5. 6. 7 & 8 Land E 1/2 nearly level Soil 1st rate Balance broken, tol'd with timber & few cedars
	North on a random line between secs 5 & 6 Var. 15° 30 E.
40.00	Set temporary 1/4 sec. cor.
80.00	Intersect N. boundary of T. at cor. to secs 5, 6, 31 & 32 from which South on true line between secs 5 & 6
40.00	Deposited small sandstone marked with a cross (+) in mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.

8T.T0 | The cor. to sec. 5, 8, 7 & 8
Land nearly level
Soil 1st rate
No timber

General Description.

The lands in this township embrace a portion of Kimball Valley so named in honor of Nathan Kimball the present Surveyor General for Utah, the valley is from 10 to 50 miles wide and 80 to 100 miles long the larger portion lying in Arizona. The soil is generally 1st rate. Cedar & Pinion pine abundant There are no settlers now in the

BOOK-A-154

township. The lands are
agricultural.
Febr. 13th 1877
T. C. Bailey
U. S. Dep. Surveyor.

412 BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jany 21st 1877

The foregoing field notes of the survey of Exteriors & Subdivisions Township No. 44 S. Range No. 4½ W. Executed by Bailey & Burrill Under Joint contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-154

13d Examined by C H Cramwell C C

Field Notes

of

The Survey of the

Guide Meridian

in

Townships 44 South,

between

Ranges 5 & 6 West,

of the Salt Lake Meridian,

Utah Territory.

By

J. G. Burrill, U. S. Deputy Surveyor,

under Joint Contract of Bailey & Burrill

No. 73 dated Sept. 4th 1876.

Surveyed Feby. 1st 1877

Salt Lake Meridian &c. 44 South
Between Ranges 5 & 6 West, 47

Salt Lake Meridian.

Chains.	February 1st 1874 by J. G. Burrill. From the corner to Townships 43 & 44 S, Ranges 5 & 6 West.
	3 rim,
	Smith between Secs, 1 & 6, Var, 15° 30' E,
32,40	Road bears N. W. & S. E.
40,00	Set Sandstone 12 x 8 x 7 in, 5 in, deep, marked 1/4 on W. side, & raised mound of Earth from 4 pits each 24 x 12 x 12 in, for 1/4 Sec. Cor,
59,50	Road bears N. E. & S. W.
70,00	" " E. & W. & Enter Cedar Bench, bears E. & W.
76,70	Road bears S. E. & N. W.
80,00	Set Sandstone 20 x 12 x 5 in, 15 in. deep, notched 1 on North & 5 on South edges, & raised

Ute Meridian Tp. 11 South.

Chains	mound of earth from 4 pits, each 2d x 12 x 12 in. for Cor, to Secs. 1, 6, 7, & 12, Sand Creek, Soil 1st, rab, Timber, Cedar of Commercial value on S, 10 chs,	Chains 175,0 Sand
40,00	South between Secs. 7, & 12, Var. 15° 30' E, Marked Sandstone in place 3 x 2 x 1/2 ft. above ground, 1/4 on W. side, & raised mound of stones for 1/4 Sec. Cor. from which, A cedar 10 in. dia. bears N. & E. 35 lks. dist. marked 1/4 S, B.T.	
65,00	Rocky ledge bears E. & W.	

Between Ranges 5 & 6. West.

Chains 175,00 800	Enter flat Hollow, Trans W. Leave Hollow, & Ascend to On top of rocky ledge bears N.E. & S.W. marked Sandstone in place 5×4×3 ft. above ground with 6 notches on E. & W. & 2 on N. edges for Standard Cor. to Secs. 7, 12, 13, & 18. Land N½ nearly level, S½ broken, Soil 2nd rate, Timber, Cedar of Commercial Value,
	Note: The boundary line between Utah & Arizona not being established I random line run. And

Salt Lake Meridian

from this Corner I run
East - West, a Kinds Special
Standard Parallel South,
which will approximately
be about 8 Ch, & 56 lks,
North of said boundary line,
February 1st 1877.

J. G. Burrill,
U. S. Deputy Surveyor.

For General Description
see end of Subdivision
Notes of Tp. 44 S. R. 5
& 6. Wis 6.

BOOK-A-154

421

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Gauds Meridian in Township No. 4 & 5 between Ranges No. 5 & 6 W. Executed by Bailey & Burnell Under first contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-154

17

4207

24th Examined by C. H. Cranwell & C.

Field Notes
of the
East and South Boundaries
Township 44 North Range 5 West
of the
Salt Lake Meridian
Utah Territory
as surveyed by
J. W. Burrill
under joint contract Bailey & Burrill
No 73 dated Sept 4th 1876.

Survey commenced Feb 6th 1877

" completed " " 1877

76

East Boundary T. 44 S. R. 5 W.

Chains		Da
	Feb 6th 1877 - by J. G. Burrill	Cha
	From the Standard cor. to	
	secs 7 & 12. T. 44. S. R. 4½ 5. W.	
	Viz: A Chared Cedar Post	
	with mound & pits from which	
	A Cedar 12 in dia bears N. 89°	
	45' W. 11.60. chs dist. I run	
	North on the range line	
	bet secs 7 & 12	
	Va. 15° 30' E.	
40.00	Deposited a small sandstone	
	marked ¼ in mound	20.0
	of earth from 4 pits each 24 x 12 x	40.0
	12 ins for ¼ sec. cor.	
60.00	Top of red butte.	
75.00	Wash drains W.	
80.00	Set conglomerate rock 20 x	
	12 x 5 ins 5 in deep notched	80.0
	on N & S. E & W. edges &	

BOOK-A-154

Salt Lake Meridian

Chains | raised mound of earth from 4 pits each 24×12×12 in for cor. to secs 1. 6. 7 & 12 — from which A. Cedar 8 in dia bears N. 60 W. 385 lks dist marked S. 1. T. 44 S. R. 5. W. B. P. Land broken — Soil & Rate No Timber —

North bet secs 1 & 6.
Va. 15° 30' E.

20.00 | Bluffs bear E & W.

40.00 | Set Sandstone 15×10×5 in 10 in deep marked + on W. side & raised mound of earth from 4 pits each 24×12×12 in for 4 cor. cor.

80.00 | Set Sandstone 20×8×6 in 15 in deep notched 6 on E. & W. edges

East Boundary T. 44 S. R. 5. W.

Chains	0 2 on S. edge for cor. to Ts 43 & 44 S. Rs 4 & 5 W. from which A cedar 12 in dia bears N. 46 W. 136 lks dist marked S. 36. T. 43 S. R. 5. W. B. T. A cedar 13 in dia. bears S. 82. W. 76 lks dist marked S. 1. T. 44 S. R. 5. W. B. T.	
	Sand broken - for 2 Mile	9. 0
	Timber - Cedar & Pine -	2, 6. 0
		39. 8
	North Boundary. From the cor. to Ts 43 & 44 S. Rs 4 & 5 W. I run West on random line bet said townships setting temporary corners at every 40 & 80 chs and at 5 miles 79 chains & 80 links I intersect the Guide Meridian	70. 0
		79. 8

Salt Lake Meridian

Chains 48 lks N. of cor. to T. 4 & 5 S., R. 5 & 6 W. — The correction for the true line will therefore be N. 89° 57' E. 48 lks south per mile —

N. 89° 57' E. on true line

Bt pcs 6 & 7

Va. 15° 30' E.

9.00 Wash drains S.

26.00 Road bears N. 70 W. & S. 70 E.

39.80 Set Sandstone 14 x 8 x 3 in 9 in deep marked + on N. side + raised mound of earth from which pits each 24 x 12 x 12 in W. & ocl. for.

70.00 Wash drains S.

79.80 Set Sandstone 16 x 12 x 4 in 10 in deep notched 5 on E. & W. sides + raised mound of

North Boundary T. 44 S. R. 5 W.

Chains

earth from 4 pits each 24 x 12 x 12 in for cor. Dec 5. 6. 31 1832 from which
A Cedar 12 in dia bears N. 1° W. 120 lks dist marked S. 31. T. 43. S. R. 5 W. B.T.
A Cedar 7 in dia bears N. 60 E. 68 lks dist marked S. 32. B.T.
Land level Soil Flat No Timber

N. 89° 57' E. on true line
Bt pcs. 5 & 33 .
Var. 15° 30' E.

40.00 Set Sandstone 18 x 12 x 7 in 12 in deep marked from N. side raised mound of earth from 4 pits each 24 x 12 x 12 in for 4 cor pos.

Salt Lake Meridian

Chains
80.00 Set Charred Cedar Post
4 8 x 4 x 4 in 12 in deep notched
4 on E & 2 on W. sides & raised
mound of earth from 4 pits
each 24 x 12 x 12 in for cor. & sec
4. 5. 32 33 -
Land Gent. Soil Rate
A 3 in Cedar on W. ½.

N. 89° 57' E on true line
Bet sec 4 & 33.
Va. 15° 30' E.

24.50 Foot of Cedar Ridge bears N 75.
40.00 Set Charred Cedar Post 4 8 x 3
x 3 in 12 in deep marked ¼ S on N.
side in mound of earth raised from
4 pits each 24 x 12 x 12 in for ¼ sec.
cor. from which
A Cedar 14 in dia bears N. 50. E.

North Boundary T. 44 S. R. 3 W.

Chains		Ch
	17 lks dist marked ¼ S. 3. T.	
45.00	Came Cedar Ridge Brass N & S.	
80.00	Set Sandstone 20 x 12 x 8 in 15 in deep notched 3 in E & W. edges raised mound of earth from 4 pits each 24 x 12 x 12 in for cor. to secs 3. 4. 33 & 34 - Land nearly level Soil Dark Timber scattering Cedar on ridge	
	N. 89° 57' E. on true line Set secs 3 & 34 Va. 15° 30' E.	20.00
14.50	Road to Johnson's Brass N. E. & S. W.	40.00
40.00	Set Sandstone 13 x 8 x 5 in 8 in deep marked ¼ on N. side raised mound of stone for ¼ sec. cor.	80.00
80.00	Set Black Sandstone 26 x 6 x 6 in 20 in deep notched	

Salt Lake Meridian

Chains 2 on E & 4 on W. sides & raised mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs 2, 3, 34 & 35.

Land level — Soil Dry Rate No Timber —

N. 89° 57' E. on true line

Set secs 2 & 35

Va. 15° 30' E.

20.00 Road to Salt Lake City bears N. E. & S. W.

40.00 Set Sandstone 14 x 8 x 6 in 9 in deep marked ¼ on N. side & raised mound of earth from 4 pits each 24 x 12 x 12 in for ¼ sec cor.

80.00 Set Sandstone 18 x 10 x 10 in 12 in deep notched ¼ on E. & S. & W. & raised mound of earth from 4 pits each 24 x 12 x 12 in on sides for cor. to secs 1, 2, 35 & 36

Land level Soil Dry Rate

North Boundary T. 44. S. R. 5. W.

Chains	No Timber.
	N. 89° 5' E. continue line bet. secs 1836 Var. 15° 30' E.
23.50	Bluff bears N. W. & S. E. runs out 20 lks N. W.
40.00	Set Sandstone 18x10x5 in 10 in deep marked ¼ on N. side in Johnson's Gap and raised mound of earth from 4 pits each 24x12x12 in for 4 pieces.
41.50	Johnson's Creek 4 lks wide runs S.
47.00	Bluff bears N. & S. East side Gap
80.00	To cor. to Ts. 43. & 44. S. Rs. 4 & 5. W. Land Broken Soil Rocky No Timber. Feb. 6th 1877 J. G. Parrish

BOOK-A-154

Salt Lake Meridian

Note: For General Description and approval see end of subdivision notes of this Township.

BOOK-A-154 18

487

Field Notes of the Subdivisions

Townships South Range 5. West Salt Lake Meridian Utah Territory as surveyed by Bailey & Burrill under joint contract Bailey & Burrill No 73 - dated Sept 4th 1876 -

Survey commenced Feb 7th 1877
" completed " 7th "

Subdivisions T. 44 S. R. 5 W.

Chains	
	Feb 7th 1877 by T. C. Bailey
	From the standard cor. to
	secs. 11 & 12 on the 9th Special
	Standard Parallel south
	I run
	North 80 secs. 11 & 12
	Va. 15° 30' E.
27.00	Johnson's Creek 3 links wide, runs S. W. & N.
40.00	Pit Sandstone 16 x 10 x 4 in 10 in
	deep marked 4 on N. side &
	raised mound of earth from
	4 pits each 24 x 12 x 12 in for 4 sec
	cor. from which
	A Cedar 6 in dia brs N. 30 W.
	175 lks dist marked 4 S. B. T.
80.00	Pit Sandstone 18 x 10 x 7 in 12 in deep
	notched 1 on E & S. edges & raised
	mound of earth from 4 pits each
	24 x 12 x 12 in for cor. to secs 1. 2. 11 & 12
	Land level Soil 1st Rate

Salt Lake Meridian

Chains Timber, Cedar on S. & E

East on random line
Set pcas 1 & 2
Va. 15° 30' E.

19.80 Johnsons Ranch - runs S. 3 links W.

40.00 Set temporary ¼ sec. cor.

80.00 Intersect east boundary of town ship at cor. B secs 1 & 2 from which Post, on True line
Set pcas 1 & 2

40.00 Set Chained Cedar Post 4 & 6 x 3 x 3 in 12 in deep, marked ¼ S. on N. side raised mound of earth from which pits each 24 x 12 x 12 in for ¼ sec. cor. from which Cedar 10 in dia brs N 80. E. 140 lks dist marked ¼ S. B. T.

80.00 The cor. B secs 1. 2. 11 & 12

Subdivisions T. 44 S., R. 5 W.

Chains	Land nearly level Soil 1st & 2d rate Timber Cedar on E ½
	North on random line bet. secs 1 & 2 Va. 15° 30' E.
10.00	Brook runs S. W. (First branch of Johnson's Fork)
40.00	Set temporary ¼ sec. cor. on E. slope of bluff bears N. 10 E. 25 lks.
45.00	Top of dome
80.00	Intersect N. boundary of Township at the cor. to secs 1 & 2 from which North on true line bet. secs 1 & 2
40.00	Mark Sandstone in place 6×4×2 ft above ground 40

Salt Lake Meridian

	Chains N. side and raised mound of stones for 1/4 sec. cor.
80.00	The cor. to secs 1. 2. 11 & 12 and S. 1/2 level Dirt Pits N. 1/2 gentle descent N. Timber Cedar on N. 1/2
	From the Standard cor. to secs 10 & 11 on the 9th Special Standard Parallel North I run North bet. secs. 10 & 11 Va. 15° 30' E.
40.00	Pit Sandstone 20 x 12 x 3 in 15 in deep marked 1/4 on N. side raised mound of earth from 4 pits each 24 x 12 x 12 in for 1/4 sec cor.
76.20	Navajo Trail bears N. W. & S. E.

Subdivisions T. 44. S. R. 5. W.

Chains		Ch
80.00	On E. side Mud spring Gap Set Sandstone 27 x 18 x 2½ in 20 in deep notched 2 on E. & 1 on S. edges raised mound of stone for cor. to secs 2. 3. 10 & 11 Sand mostly level Soil, Sate. Timber Cedar on S. ½ -	6.2 77. 80.
	East on random line 80 lks. to secs. 2 & 11 Va. 15°. 30'. E.	40. 48.
20.00	Top of rocky ledge bears N. & S.	
32.50	Edge of rocky bluff bears N. E. & S. Offset North 7 chs thence East on offset line 30.00 chs to edge of bluff 7.00 chs N. E. of its south point - Thence	80

Salt Lake Meridian

Chains	South 7.00 chs to
62.50	on True line
77.00	Brook runs S.
80.50	Intersect N & S. line 35 lks
	south of cor. to secs. 1. 2. 11 & 12
	from which
	S. 89° 45' W. on True line
	4 trees. 2 & 11
40.25	The ¼ sec. cor. falling in rocks
	is not established
48.00	Marked Sandstone in place
	6 X 3 X 2½ ft above ground ¼ W.C.
	on N. side of mound of
	stones for witness ¼ sec. cor.
80.50	The cor. to secs 2. 3. 10 & 11
	Sand broken, Pits 2 & 3 dug
	Timber - cedar -

North on random line

Subdivisions T. 44. S. R. 5. W.

Chains	
	Brt secs 2 & 3
	Va. 15° 30'. E.
3.00	West point of spur
4.50	Top of same
7.50	N. foot " "
15.00	Muddy Springs 3.00 chs. E.
19.00	Bluff bears S & N. W.
40.00	Set temporary ¼ sec. cor.
72.00	Road bears N.E. & S.W.
80.00	Intersect N. boundary of township at the cor. to secs. 2 & 3 from which North on true line Brt. secs. 2 & 3
40.00	Set Sandstone 24 x 12 x 3 in 80. 18 in deep, marked ¼ on W. side & raised mound of stone for ¼ sec. cor.
80.00	The cor. to secs. 2. 3. 10 & 11 Land S. ½ broken Pole 2 Pts

Salt Lake Meridian

Chains N. ½ level - Soil 1st rate.
Timber - Cedar -

From the standard cor. to secs. 9 & 10 on the 9th Special Standard Parallel North

Drum

North bet. secs. 9 & 10

Va. 15° 30' E.

40.00 Pit Sandstone 16x10x5 in 10 in deep marked T on W. side raised mound of earth from 4 pits each 24x12x12 in for T of cor.

80.00 Pit Black Sandstone 28x18x3 in 20 in deep notched 3 on E & 5 on S. edges raised mound of stone for cor. to secs. 3. 4. 9 & 10.

Land gentle slope N.

Soil 1st rate

Subdivisions T. 44 S. R. 5 W.

Chains	Timber Cedar & Pine
	East on random line
	Pt. secs. 3 & 10
	Va. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
	& descend into Mud
	Spring Gulch
74.00	Cross bears N. W. & S. E.
80.00	Intersect S. B. line at the
	cor. to secs. 2. 3. 10 & 11. from which
	Pt. set on true line
	Pt. secs. 3 & 10
40.00	Set Sandstone 16 x 8 x 8 ins. 10
	ins deep marked + on N. side
	& raised mound of stone
	for 1/4 sec. cor. from which
	A Cedar 3 ins dia. bears S. 60 E.
	70 lks dist. marked + S.
	B. T.

BOOK-A-154

Salt Lake Meridian

Chains	
80.00	The cor to secs. 3, 4, 9 & 10
	Land mostly level
	Soil 1st rate
	Timber - Cedar -
	Feb. 7th 1877 T. C. Bailey
	North on random line
	Set sec. 3 & 4.
	Va. 15° 30' E.
40.00	Set temporary ¼ sec cor.
57.60	Muddy Spring Road bears N. 70° E.
60.20	Salt Lake road bears E & N.
61.40	Johnsonville Road bears N. E. & S. W.
80.00	Intersect N. boundary of township at cor to secs. 3 & 4 from which
	North on true line
	Set sec. 3 & 4
40.00	Set Sandstone 16 x 6 x 6 in 10 in deep marked ¼ on N. side & mound of earth

Subdivisions T. 44 S. R. 5 W.

Chains	
	from 4 pits each 24×12×12 in for ¼ sec. cor.
80.00	The cor. bears S. 34. 99 10 Sand level — soil Fair Timber —
	From the Standard cor. bears S. 89 on the 9th special Standard Parallel South Drum North bet. secs. 8 & 9 Va. 15° 30' E.
40.00	Deposited a piece of Charred cedar in mound of earth raised from 4 pits each 24×12×12 in for ¼ sec cor from which A cedar 6 in dia bears S. 85° E. 40 lks dist.

BOOK-A-154

N. Salt Lake Meridian

	Chains	A Cedar 8 in dia brs N. 30. E. 32 lks dist. both trees marked ⊥ S. B. T.
	80.00	Deposited a piece of petrified cedar & broken quartz in mound of earth raised from pit 4 each 24×12×12 in & drove a stake 24×2×2 in 12 in deep notched 4 on E & S sides S. edges in S. E. pit for cor. to secs. 4. 5. 8 & 9 Land nearly level. Soil 1st Rate Timber - Cedar -
		East on random line
		Set. secs. 4 & 9 Var. 15° 30. E.
	40.00	Set temporary ⊥ sec. cor.
	80.10	Intersected N & S. line 3 lks E. N.

Subdivisions 7. 44. S. R. 5. W.

Chains	
	N. of cor. to secs 3. 4. 9 & 10 from which
	N. 89° 57'. W. on true line
	40 rt. secs. 4 & 9
40.05	Set sandstone 15 x 10 x 5 in 10 in deep marked + on N. side & raised mound of earth from & pits each 24 x 12 x 2 in for 1/4 sec. cor.
80.10	The cor. to secs. 4. 5. 8 & 9 Sand Creek. - Soil Rate No Timber -
	North on random line
	40 rt. secs. 4 & 5
	Va. 15° 30'. E.
19.40	Trail bears E & N.
40.00	Set temporary 1/4 sec. cor.
48.70	Johnsonville road bears E & N.

Ch
80.
40
80

Salt Lake Meridian

Chains	
80.00	Intersected north boundary of Township at cor. to secs. 4 & 5 from which South on true line Wt. secs. 4 & 5
40.00	Set Charred Cedar Stake 4 ft x 3 x 3 in 12 in deep in mound of earth from 4 pits 4 each 24 x 12 x 12 in marked 1/4 on N. side for 1/4 sec cor.
80.00	The cor. to secs. 4 & 5 & 8 & 9 Sand Rock - Pile of Stone No Timber.

From the standard cor. to secs. 7 & 8 on the 9th Special Standard Parallel North Run North Wt. secs. 7 & 8

Subdivisions T. 44. S. R. 5. W.

Chains	Va. 15° 30'. E.	
40.00	Set Sandstone 16×10×3 in 10 in deep marked ¼ on W. side raised mound of stone for ¼ sec. cor. from which A Cedar 10 in dia brs West 150 lks. dist. marked ¼ S. B. T.	40. 80. 40.
56.50	Ridge brs E & W.	
80.00	Set Sandstone 14×9×3 in 10 in deep notched 5 on E & S. edges raised mound of earth from 4 pits each 24×12×2 in for cor. to secs. 5. 6. 7 & 8	
	Land undulating	80.
	Soil 1st Rate	
	Timber = Cedar & Pine	

Salt Lake Meridian

Chains	
	East on random line
	Prt. secs. 5 & 8
	Va. 15° 30' E.
40.00	Set temporary ¼ sec. cor.
80.00	Intersect N. & S. line at cor.
	to secs. 4. 5. 8 & 9 from which
	West on true line
	Prt. secs. 5 & 8
40.00	Set Sandstone 14 x 10 x 4 in. qin
	deep marked ¼ on S. side and
	raised mound of stone for ¼
	sec. cor. from which
	A Cedar 10 in. dia. bears
	S. 10. W. 60 lks. dist. marked
	¼. S. B. T. —
80.00	The cor. to secs. 5. 6. 7 & 8.
	Land level — fair 1st Rate
	Timber a few cedars near
	¼ sec. cor.

Subdivisions T. 44 S. R. 5 W.

Chains	
	West on random line
	Ist. secs. 6 & 7
	Va. 15° 30' E.
40.00	Set temporary 1/4 sec cor.
45.00	Pond Cedar Bench bears
	N. W. 75 E.
55.00	Reference bears N.E. & S.W.
79.90	Intersect N. boundary of
	Township 35 S. R. 5 W. to
	secs. 6 & 7 from which
	N. 89° 45' E. on true line
	Ist. secs. 6 & 7
39.90	Set Sandstone 16 x 10 x 5 in. 10
	in. deep marked 1/4 on N. side
	raised mound of stone
	for 1/4 sec. cor.
79.90	The cor. to secs. 5. 6. 7 & 8
	Land nearly level
	Soil Slate

Salt Lake Meridian

Chains	Timber few Cedars & Pine on W. part. —
	North on random line bet. secs. 5 & 6 Va. 15° 30'. E.
40.00	Set temporary ¼ sec. cor.
59.90	Road bears S & W.
64.50	" " "
79.90	Intersect north boundary of township 17 N.R. 8 W. to secs. 5 & 6 from which S. 0° 07'. W. on true line bet. secs. 5 & 6
39.90	Set Sandstone 16 x 8 x 4 in. 10 in. deep marked ¼ on N. side and raised mound of earth from 4 pits 1 each 24 x 12 x 12 in. for ¼ sec. cor.

Subdivisions T. 44 S. R. 5 W.

Chains 79.90

The cor. to secs. 5. 6. 7 & 8
Sandstone - Ark. State
No Timber -
Feb 7th 1877 J. H. Burrill

General Description.
The lands in this township are mostly State, about half covered with cedar & pinion pine - lying south of the red or vermillion bluffs -
They are agricultural and can be irrigated from Johnson's creek & subterranean waters which can be reached from 4 to 12 feet

J. H. Burrill
U. S. Dep. Surveyor

BOOK-A-154

457

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Exteriors & Subdivisions Township No. 44 S. Range No. 5 West Executed by Bailey & Burrill Under Joint contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathaniel Kimball

Surveyor General for Utah.

BOOK-A-

25th Exam

Town

BOOK-A-154

19

459

25th Examined by C. H. Cramwell C. C.

Field Notes
of the
First & North Boundaries
Township 44 South Range 6. West
of the
Salt Lake Meridian
Utah Territory
as surveyed by
J. H. Burrill
under joint contract Bailey & Burrill
No 73 - dated Sept 4th 1876.

Survey commenced Feb 1st 1877

" completed " 28 "

West Boundary T. 44 S. R. 6 W.

Chains Feb 2d 1877 by J. E. Purcell -

From the cor. to secs 7. 12. 13 & 18
T. 44 S. R. 6 & 7 W. on Special Stand
and South 1 chain
North to secs. 7 & 12
Va. 13° 30' E -

31.50 Road bears N. W. & S. E.
40.00 Set Sandstone 14 x 4 x 4 ins 9 ins
deep marked 1/4 on W. side & raised
mound of earth from 4 pits each
24 x 12 x 12 ins for 1/4 sec. cor.
71.75 Wood Road bears N. W. & S. E.
80.00 Set charred Cactus Stake
36 x 3 x 3 ins 12 ins deep notched 1 on N.
& on E & W. edges & deposited one quart
of charcoal in a mound of earth
from 4 pits each 24 x 12 x 12 ins from cor.
to secs. 1. 6. 7 & 12
Land level, Soil & Grass -
No Timber -

Salt

Chains

18.30

40.00

55.00

80.00

Salt Lake Meridian

Chains North bet. secs. 1 & 6

Var 15° 30' E.

18.30 Telegraph line bears N. 70 E. D. S. 45 W.

40.00 Set Sandstone 14×12×10 in 9 in deep marked 1/4 on W. side & mound of earth from 4 pits each 24×12×12 in for 1/4 sec. cor.

55.00 Foot of High Bluffs bear E & W.

80.00 Tree cor. falling in bluffs cannot be set, therefore at 55.00 chs set Planted Cedar Post 48×4×4 in 12 in deep notched 6 on N. E. & W. 2 on S. edges & W. C. for witness cor. to T. 43 & 44 S. R. 5 & 6 W.

Sand level, Soil Rate -

No Timber -

North Boundary T. 44 S. R. 6 W. Salt Lake Meridian

From the witness cor. on line bet. secs. 1 & 6. 25.00 chs south of the

North Boundary T. 44 S. R. 6 W.

Chains true cor. point I run East
40.00 chs thence North on offset
line 26.00 chs. to true line thence
East on random line returned
T's 43 & 44 S. R. 6 W. I find the line
to be 5 miles 79 chs. 90 lks & the
falling to be 18 lks. south of the
township cor. the correction of
the true line will therefore be 3
lks N. per mile & the bearing
S. 89°. 59'. W. -
From the established cor. to
T's 43 & 44 S. R's 5 & 6 W. on the Guide
Meridian I ran
S. 89°. 59'. W. on true line
Brt. occo. 1836

Va. 15°. 30'. E.

15.70 Large Spreading Cedar on line
40.00 Deposited a small Sandstone

Sall
Chains
59.50
77.50
80.00
40.0
48.0

BOOK-A-154 X63

Salt Lake Meridian

Chains marked with a cross (+) in mound of earth from 4 pits each 24×12×12 in for 1/4 sec. cor.

59.50 Wash drains S. E.

77.50 " " "

80.00 Pit Red Sandstone 20×14×9 in 15 in deep notched on E & S on N. edges & raised mound of stones for cor. to secs. 1. 2. 35 & 36.

Sand, level. Soil Light Timber

S. 89° 57' W. on true line

Int. secs. 2 & 35

Va. 15° 30' E.

40.00 Pit Charred Cedar Post 48×3×3 in 12 in deep, marked 1/4 S. T. raised mound of earth from 4 pits each 24×12×12 in side for 1/4 sec. cor.

48.00 Enter low cedar brush Brass 485

North Boundary T. 44 S. R. 6. W.

Chains

60.50 Lean pine trees N. W. & S. E.

80.00 Pet Sandstone 14×8×5 in. 9 in. deep notched 2 on E. & 4 on W. edges raised mound of earth from 4 pits each 24×12×12 in. for cor. to secs. 2. 3. 34 & 35.
Land level. Soil 1st rate.
Timber scattering cedar.

S. 89° 59' W. on true line bet. secs. 34 & 34
Va. 15° 30' E.

18.00 Enter previous Bench bears N. E. & S. W.

35.65 Trail bears N. W. & S. E.

40.00 Pet Sandstone 13×10×9 in. 8 in. deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor. from which A Cedar 10 in. dia. bears N. 45° W. 92 lks dist marked 1/4 S. B. T.

Sal

Chains

48.50

57.50

65.00

70.50

80.00

14.50

40.00

BOOK-A-154

46.5

Salt Lake Meridian

Chains

48.50 Road bears N. & S. E.

57.50 Trail " " "

65.00 Foot of Bench bears N & S.

170.50 Wash drains S.

80.00 Set Sandstone 18×7×5 in 12 in deep notched 3 ow E & W. edges raised mound of earth from 4 pits each 24×12×12 in for cor. to secs 3 4, 33 & 34 –

Sand mostly level
Soil 1st rate
Timber – scattering cedar –

N. S. 89° 59' W. on true line
bet. secs. 4 & 33
Va. 15° 30' E.

14.50 Fence bears N & S. enters field
Road E. of fence

40.00 Set Sandstone 14×10×4 in 9 in deep

North Boundary T. 44 S. R. 6. W.

Chains marked 4 on N. side raised mound of earth from 4 pits each 24×12×12 ins for 1/4 sec. cor.

63.90 Land Level 20 lks wide runs S.

71.50 Fence bears N & S. Lane field

78.80 Road bears N.E. & S.W.

80.00 Set Sandstone 16×12×12 ins 10 ins deep notched 4 on E & 2 on W. edges raised mound of earth from 4 pits each 24×12×12 ins for cor. to secs. 4. 5. 32 & 33 - from which Cedar 5 ins dia. bears S. 60 W. 184 lks dist. marked S.S. B.T. Tree too gnarley to put more marks on it -

Land level - cultivated field - Soil 1st rate - No Timber -

Salt

Chains

23.90

40.00

67.0

80.0

Salt Lake Meridian

Chains S. 89° 59' W. on True line

Pt. Decr. 5 1932

Va. 15° 20' E.

23.90 Road bears N. E. & S. W.

40.00 Set Sandstone 16x12x6 in 12 in deep marked 1/4 on N. side and raised mound of earth from 4 pits each 24x12x12 in for 1/4 Sec. Cor. from which

Cedar 5 ins. dia. bears North 12 lks. dist. marked 1/4 S. B. T.

67.00 Telegraph Line bears N. E. & S. W.

80.00 Set Sandstone 16x12x7 in 11 in deep notched 5 on E & 1 on W. edges raised mound of earth from 4 pits each 24x12x12 in for Cor. Decr. S. 6. 31 1932

Land nearly level - Soil State

Timber - Cedar on W. 1/2.

North Boundary T. 44 S. R. 6 W.

Chains S. 89° 59' W. on true line

Mt. Deer. 6831

Var. 15° 30' E.

40.00 Marked Sandstone in place 4 x 3 x 2 1/2 feet above ground 1/4 on N. side raised mound of stone for 1/4 Sec. Cor. from which A Pine 10 in. dia. bears S. 10 E. 15 lks. dist.

A Pine 6 in. dia. bears N. 60 W. 30 lks. dist. both trees marked 1/4 S. B. T.

79.90 To true point for cor. to Secs. 38 & 44 S., Rs. 6 & 7 W.

Land rolling - Soil 2nd rate.

Timber - Cedar & Pine.

Feb 2d 1877

J. G. Burrill

U. S. Dep. Surveyor.

Salt Lake Meridian

Note: For General Description & Approval see end of subdivision notes of this township

---

BOOK-A-154

~~CRTBA~~

470

Township 44 South **R.** 6 West

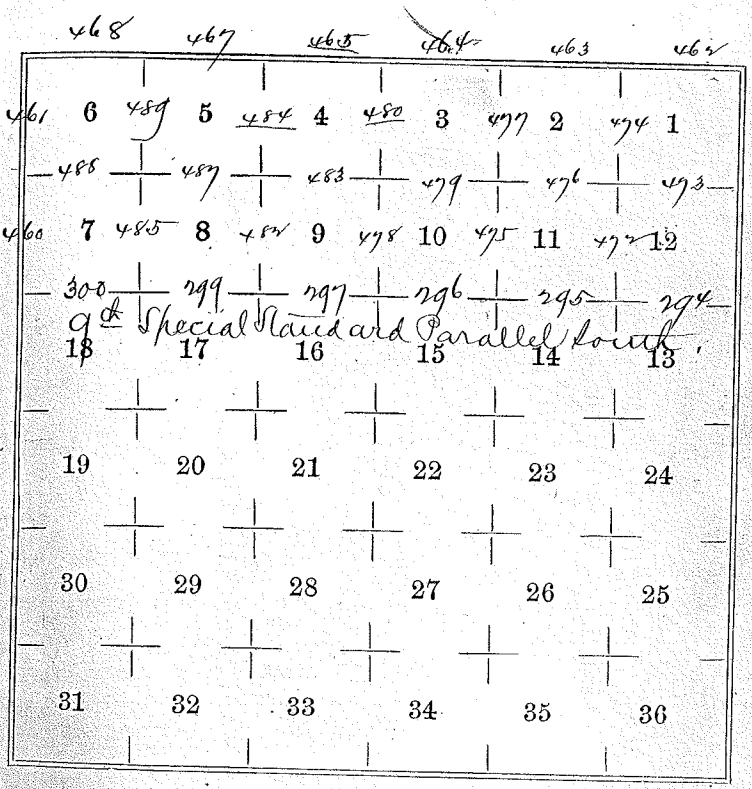

BOOK-A-154

20

471

Field Notes
of the
Subdivisions
of Township 44 South Range 6 West
Salt Lake Meridian
as surveyed by
T. L. Bailey
under joint contract Bailey & Burke
No 73. — dated Sept 4th 1876 —

Survey commenced Feb 5th 1877
" completed 6 "

Subdivisions T. 4 L. S. R. 6. W.

Chains Feb 5th 1877 by J. C. Bailey.
From the cor. to secs. 11. 12.
13 & 14 on the 4th Special
Standard Parallel North bet. secs. 11 & 12
N. 15° 30' E. 6.
28.00 Road bears E. & S. W.
40.00 Set Sandstone 15 x 10 x 5
in 10 in deep marked 1/4 on W.
side & raised mound of earth
from 4 pits each 24 x 12 x 12 in
for 1/4 sec. cor.
60.00 Rocky Ledge bears N. W. & S. E.
& center of Gap bears S. 5.00 chs. W.
80.00 Set Sandstone 20 x 12 x 6 in 15
in deep notched 1 on E. & S. edges
& raised mound of stone for
cor. to secs. 12. 11 & 12 from which
Hackberry 10 in dia bears S. 65. W.
20 lks dist Marked S. 11. T. 4 S. R. 6.

Chains
30.00
40.00
49.2
55.0
79.8

Salt Lake Meridian

Chains W. B. T.

Meeder bin dia Brs S. 35 E. 24

Wes dist marked S. 12. B. T.

Land nearly level, Soil 1st Rate

No Timber -

East on random line

Pt. secs. 1972

Va. 15°. 30. E.

30.00 Rocky Ledge Brs N.E. & S.W. enter flat -

40.00 Set temp. 1/4 sec. cor.

49.20 Road Brs S.W. & N.E.

55.00 Sandstone Ledge Brs N.E. & S.W. Leave flat.

79.80 Intersect east boundary of Township at cor. to secs. 1812 from which West on true line

Subdivision T. 44 S. R. 6 W.

Chains Lkt. secs. 1812

39.90 Set Sandstone 20x10x6 in
15 in deep - marked 1/4 on
N. side raised mound
of stone for 1/4 sec. cor. 80.00

79.80 The cor. to secs 1. 2. 11 & 12
Sand - broken - Pine & Oak
Timber - Pine & Cedar -

North on random line
Lkt. secs. 12

Va. 15° 30' E.

0.50 Lear Breaks bears E. & S. W.

40.00 Set temp - 1/4 sec. cor. 40.00
54.00 Road bears E. & W.
80.00 Intersect N. boundary of Township 20 lks E. of cor. to secs 1 & 12 —
from which
S. 0.09 E. on true line
Lkt. secs. 12 80.0

BOOK-A-154

495

Salt Lake Meridian

Chains

40.00 Set Sandstone 15x10x3 in 10 in deep marked 1/4 on N. side and raised mound of earth from 4 pits each 24x12x12 in for 1/4 sec. cor.

80.00 The cor. to secs. 1. 2. 11 & 12
Rand - Iron - Pits & Mds
No Timber. -

From the cor. to secs 10. 11. 14 & 15 on the 9th Special Standard Parallel North
North 80 rt. secs. 10 & 11
Va. 15° 30' E.

40.00 Set conglomerate sandstone 14x12x10 in deep [illegible] 1/4 on N. side & raised mound of earth from 4 pits each 24x12x12 in for 1/4 sec. cor.

80.00 Set conglomerate sandstone

Subdivision 4th/12 T. 44 S. R. 6 W.

Chains 12×10×6 in & in deep notched
2 on E & 1 on S. edges & raised
mound of earth from 4 pits
each 24×12×12 in for cor. to
secs. 2. 3. 10 & 11.
Land nearly level. Soil Clay
No Timber

East on random line
bet. secs. 2 & 11
Va. 15° 30' E.

40.00 Set temp. 1/4 sec. cor.
53.50 Road bears N. W. 1/2 S. E. at foot of bluff
Lean fence bears N. W. 1/2 S. E.
79.50 Enter brake brush & S.
80.48 Intersect N & S. line 16 lks W
of cor. to secs. 1. 2. 11 & 12 from which
N. 89° 53' W. on true line
bet. secs. 2 & 11

Sal
Chains
40.24
80.48
7.00
35.75
28.10
37.00
40.00
80.16

BOOK-A-154

Salt Lake Meridian

Chains

40.24 Deposit piece of petrified wood in mound of earth, from pit which 24×12×12 in for ¼ sec. cor.

80.48 The cor. to secs. 2. 3. 10 & 11

Sam Revel - Dec 1st Pats

No Timber =

North on random line

Pt. secs. 2 & 3

Va. 15° 30' E.

7.00 Enter grassy flat bears E & W.

35.75 Wash draws W.

28.10 Post & Spring Gap Road bears N. W & S. E.

37.00 Old Pah Ria Road bears E & W.

40.00 Pet temp. ¼ sec. cor.

80.16 Intersect N. boundary Township 35 Rs 11 & 12 W. of cor. to secs 2 & 3

Subdivisions T. 44 S. R. 6 W.

Chains 3 from which So. 15° E.
~~S. 89° E.~~ 40.00 to meander line
Mt. Decs. 2 & 3

40.16 Set sandstone 14×10×4 in.
qtz deep marked 1/4 on W.
side, raised mound of
stone for 1/4 sec. cor.

80.16 The cor. to secs. 2, 3, 10 & 11
Sand-level - Soil & Rocks
N. Timber -

From the cor. to secs. 9, 10,
15 & 16 on the 9th Special
Standard Parallel
North
North Mt. Decs. 9 & 10
Va. 15° 30' E.

25.00 Faint sandstone brass
bears N. E. & S. W.

La
Chain
40.00
80.0

BOOK-A-154

Salt Lake Meridian

Chains
40.00 Set 6 conglomerate stone 14×10×5 in 9 in deep mrkd 1/4 on W. side raised mound of earth from 4 pits each 24×12×12 in for 1/4 sec. cor.

80.00 Set Petrified Wood 18×14×12 in 12 in deep notched 3 on E & 1 on S. edges raised mound of earth from 4 pits each 24×12×12 in for cor. to secs 3. 4. 9 & 10.

Land N ½ level
S. ½ Broken
Soil 1st rate 2nd rate
Timber - Cedars on S. ½

East on random line
Mt. secs. 3 & 10
Va. 15° 30' E.

Subdivisions T. 44 S. R. 6 W.

Chains

27.90 Trail Trav. N. W. & S. E.
in Hollow drains & W.

40.00 Pet temp. ¼ sec. cor.

80.00 Intersect N. & S. line at cor.
to secs. 2. 3. 10 & 11 from which
I set on true line
Brt. secs. 3 & 10

40.00 Set Quartzite 16×8×5 in.
in deep mound & on N. side
raised mound of earth
from pit 1 each 2 ft × 12 × 12 in
for ¼ sec. cor.

80.00 Thence secs. 3. 4. 9 & 10
Land almost level
Soil, Rate - No Timber.
Feb. 5th 1877 T. C. Bailey

North on random line
Brt. secs. 3 & 4
Va. 15° 30' E.

Salt Lake Meridian

Chains
28.10 Road bears E. & N. Forks 100 lks
N. one bears S. W. & the other W.

40.00 Set, temp. 1/4 sec. cor.

57.85 S. E. cor. of T. nce bears N. about
1200 chs. dist.

56.50 W. Point of Ridge.

80.00 Intersect north boundary
of township at cor. to secs 3 & 4
from which
Pine 12 in dia. bears S. 45° E. 12 links dist.
Ash 10 in dia. bears N. 45° W. 12 links dist.
Int. secs. 3 & 4

40.00 Set Sandstone 8 x 8 x 5 in 12
in ground marked 1/4 on N. side
& raised mound of earth
from & pits each 2 x 2 x 2 in
for 1/4 sec. cor.

80.00 The cor. to secs. 3. 4. 9 & 10
Sandstone - Orig. Bearing
N. 2 links

Subdivisions T. 44. S. R. 6. W.

Chains From the cor. to secs. 8. 9. 16 & 17 on the 9th Special Standard Parallel South

North 81 secs. to 4 Va. 15. W. 6.

42.00 Set Charred Cedar Post 40×4×4 in 12 in deep in frozen meadow, pits impracticable. — 1.50

61.45 Fence bears E & W. 15.00 chs 20 links wide 11.25

62.55 Ranch Creek runs N. 40.00

75.00 Bear Brook Bottom bears S. E. 75. N. 43.0

80.00 Set Sandstone 12×10×6 in & in deep, notched 4 on E & 1 on S. edges for cor. to secs. 4. 5. 8 & 9. 60.00

39.4

Rand. Iron Pin & Mate-

BOOK-A-154

Salt Lake Meridian

Chains N to Points - -

East on random line
Set pcs. 4 & 9
Va. 15. 30. E.

1.50 Enter Bank & Bottom
brs N. E 75 N.

11.25 Ranch Bank 15 ths wide
18 in deep trees S. W.

40.00 Set temp. 1/4 sec cor.

43.00 Wash drains S. W. Cor
Meadow brs N. E. 75 N.

60.00 Boundary Road brs N. & S.

79.27 Intersect N & S. line 13
lks N. of cor. b'd cor 3. 4. 9. & 10
from which
N. 89. 54. W. on true line
Set pcs. 4 & 9

39.64 Set standstone 20 x 9 x 3 in
15 in deep marked 1/4 on

Subdivisions T. 44 N. R. 6 W.

Chains N. side tried pound Chains
of earth mound pits each
24 x 2 x 2 in for 1/4 sec. cor.

79.27 The cor. to secs 4. 5. 8 & 9
Sand, level - dark Bats. 40.00
No Timber -

X North on random line
bet. secs. 4 & 5
Va. 15. 30 E. 80.0

20.00 Enter Meadow brs
N. W. & S. E.

31.10 Road brs E & W.

40.00 Set temp. 1/4 sec. cor.

55.00 Pass Meadow brs N. E.
& S. W.

73.50 St George Road brs N. E.
& S. W.

80.00 Intersect north boundary 40.0

BOOK-A-154

485

Salt Lake Meridian

Chains of Township at cor. to
Secs. 4 + 5 from which
South on true line
Brt. Secs. 4 + 5

40.00 Set Sandstone 15 x 8 x 5 in
10 in deep marked 4 on
W. side Raised mound
of earth from 4 pits each
24 x 12 x 12 in for 1/4 Sec. cor.

80.00 The cor. to Secs. 4. 5. 8 & 9
Sand. Scrl - fine Mate
N. Omits -

From the cor. to Secs 7. 8. 17 &
18 on the 9th Special Stand-
ard Parallel south
North Brt. Secs. 7 & 8
Va. 15° 30' E.

40.00 Set Sandstone 15 x 12 x 6 in

S.6.

Subdivisions T. 44. S. R. 6. W.

Chains 10 in deep marked 1/4 on W. side
& raised mound of stone for
1/4 sec. cor.

61.50 Meccasin Spring
Road bears E & W.

74.50 Wash drains S. E.

80.00 Set Sandstone 15 x 10 x 5 in 10 in
deep notched 5 on E & 1 on S.
edges & raised mound of
earth from 1/4 Ts each 24 x 12 x
12 in for cor. to sec. 5, 6, 7, 8.
from which
A Cedar 12 in dia bears S 85 E.
marked S. 5. T. 44 S. R. 6 W. B. T.
A Cedar 18 in dia bears N. 55 W.
marked S. 6. B. T.
Land - level - fair
Timber - scattering Cedar

BOOK-A-154

Salt Lake Meridian

Chains East on random line
Int secs. 5 & 8
Va. 15° 30' E.

12.00 Post of 1 Bench Bars N & S.
Flattens out 1/2 mile S.

14.50 Road bears N 60° E. 95.60 m.

24.70 " " N 30° E. 85.30 m.

40.00 Set temp. 1/4 sec cor.

66.50 Road bears N & S.
A corral 10.00 chs. South
about 2.50 chs W. of Road

80.00 Intersect N & S. line at cor.
to secs. 4 5 8 & 9 ~~5 & 8~~ from which
Post on true line
Int secs. 5 & 8

40.00 Set Sandstone 16 x 14 x 3 in
11 in deep marked 1/4
S. side raised mound
of earth from 4 pits each

Subdivisions T. 44 S. R. 6 W.

6 chains 24 x 12 x 12 ins for 1/4 sec cor.
80.00 The cor. to secs. 5. 6. 7 & 8
Sandstone - Pits & Stakes
Pine Bur - Scattering Cedar

West on random line
bet. secs. 6 & 7
Va. 15° 30' E.

2.50 Gully drains S. E.
18.50 Wood Road bears S 75.
40.00 Set Temp. 1/4 sec. cor.
43.50 Gully drains S. E.
80.00 Intersect west boundary of township at cor. to secs 6 & 7 from which East on true line bet. secs. 6 & 7
40.00 Set Sandstone 18 x 10 x 4 ins 12 ins deep marked 1/4

Sal
6 chains
80.00
21.80
19.50
40.00
61.00
80.00

Salt Lake Meridian

Chains on N. side raised mound
of stone for 1/4 sec. cor.
80.00 The cor. to secs. 5. 6. 7 & 8
Land - Level - Soil Fair
Timber - scattering, cedar

North on random line
bet. secs. 5 & 6
Va. 15° 30' E.
21.80 Wood Road bears N. W. & S. E.
in Wash drains S. E.
29.50 Wood Road bears E & W.
60.00 Set temp. 1/4 sec. cor.
61.00 Telegraph line bears E & W.
80.11 Intersect north boundary
of Township at cor. to secs
5 & 6 from which
South on true line
bet. secs. 5 & 6

4.90.

Subdivisions T. 44 N. R. 6 W.

Chains

40.17 Set Sandstone 18×12×6 in. 12 in deep, marked 1/4 on W. side, raised mound of stone for 1/4 sec. cor.

80.17 The cor. to secs. 5. 6. 7 & 8

Land — level —

Soil, Fair.

No Timber —

Feb 6th 1877 T. C. Bailey

General Description —

The surveyed portion of this township consists of Land Bank & Bottom partly cultivated —

Soil, Fair.

The lands are agricultural — T. C. Bailey —

BOOK-A-154

491

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of Exteriors & Subdivisions

Township No. 44 S Range No. 6 West

Executed by Bailey & Burrill

Under first contract of the 4th

day of September 1876, in the month of

February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

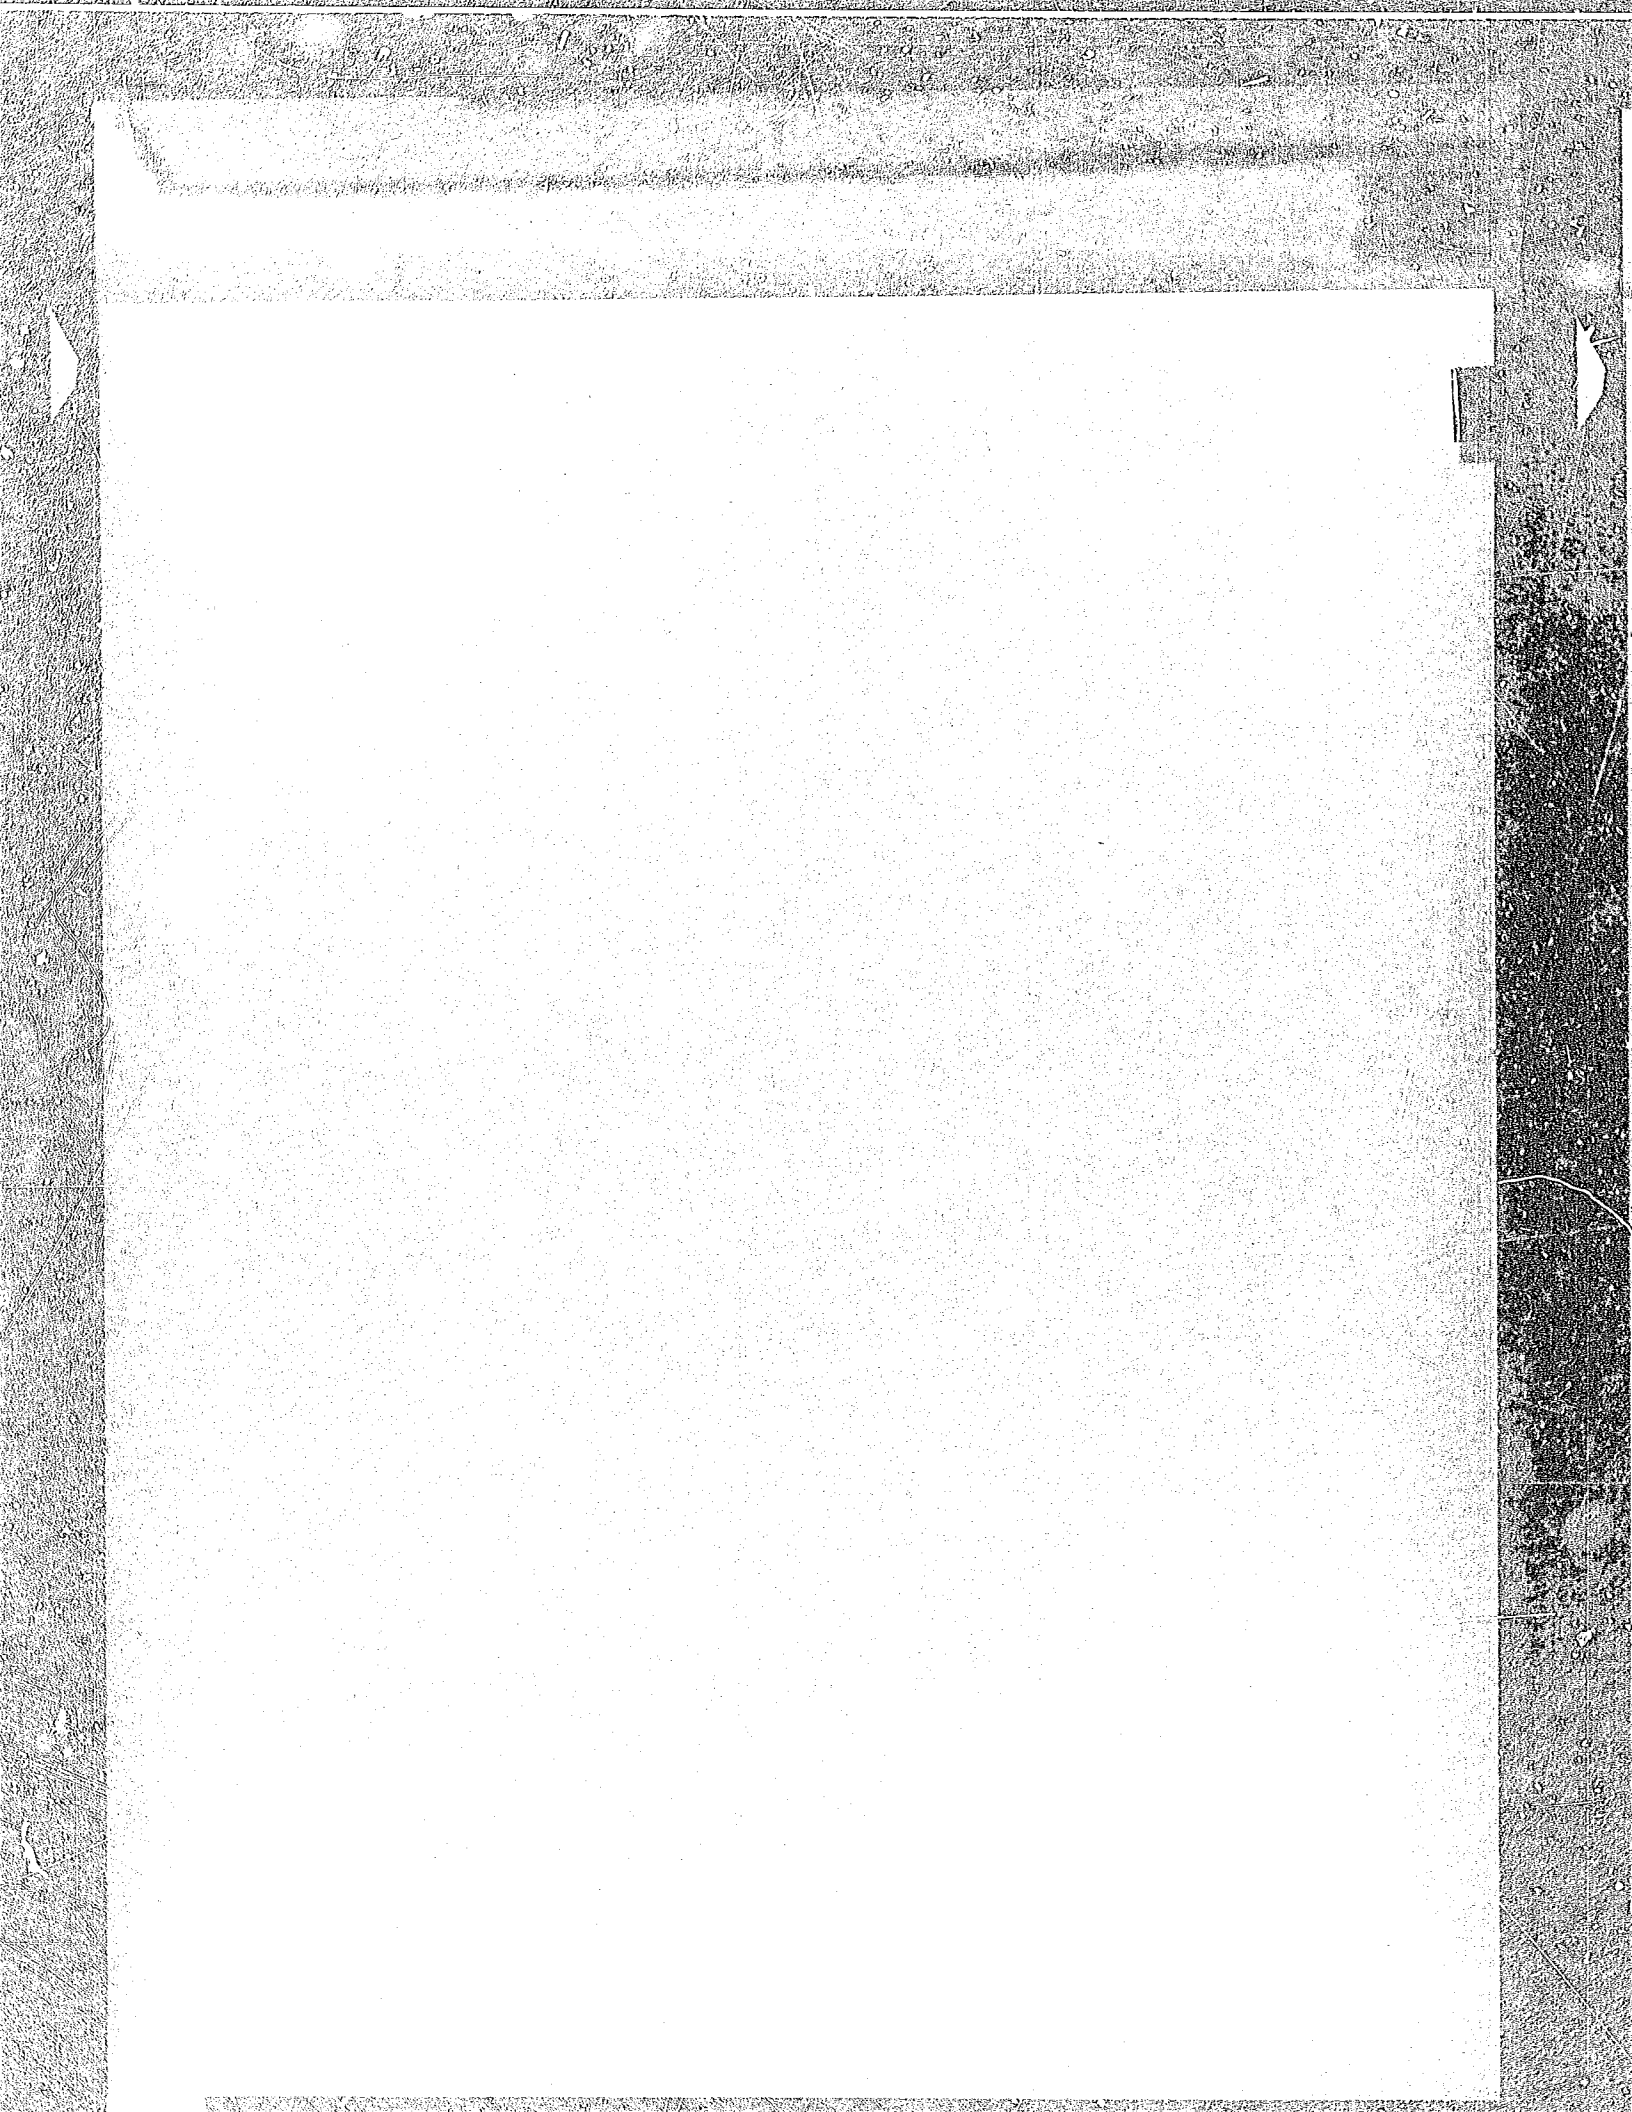

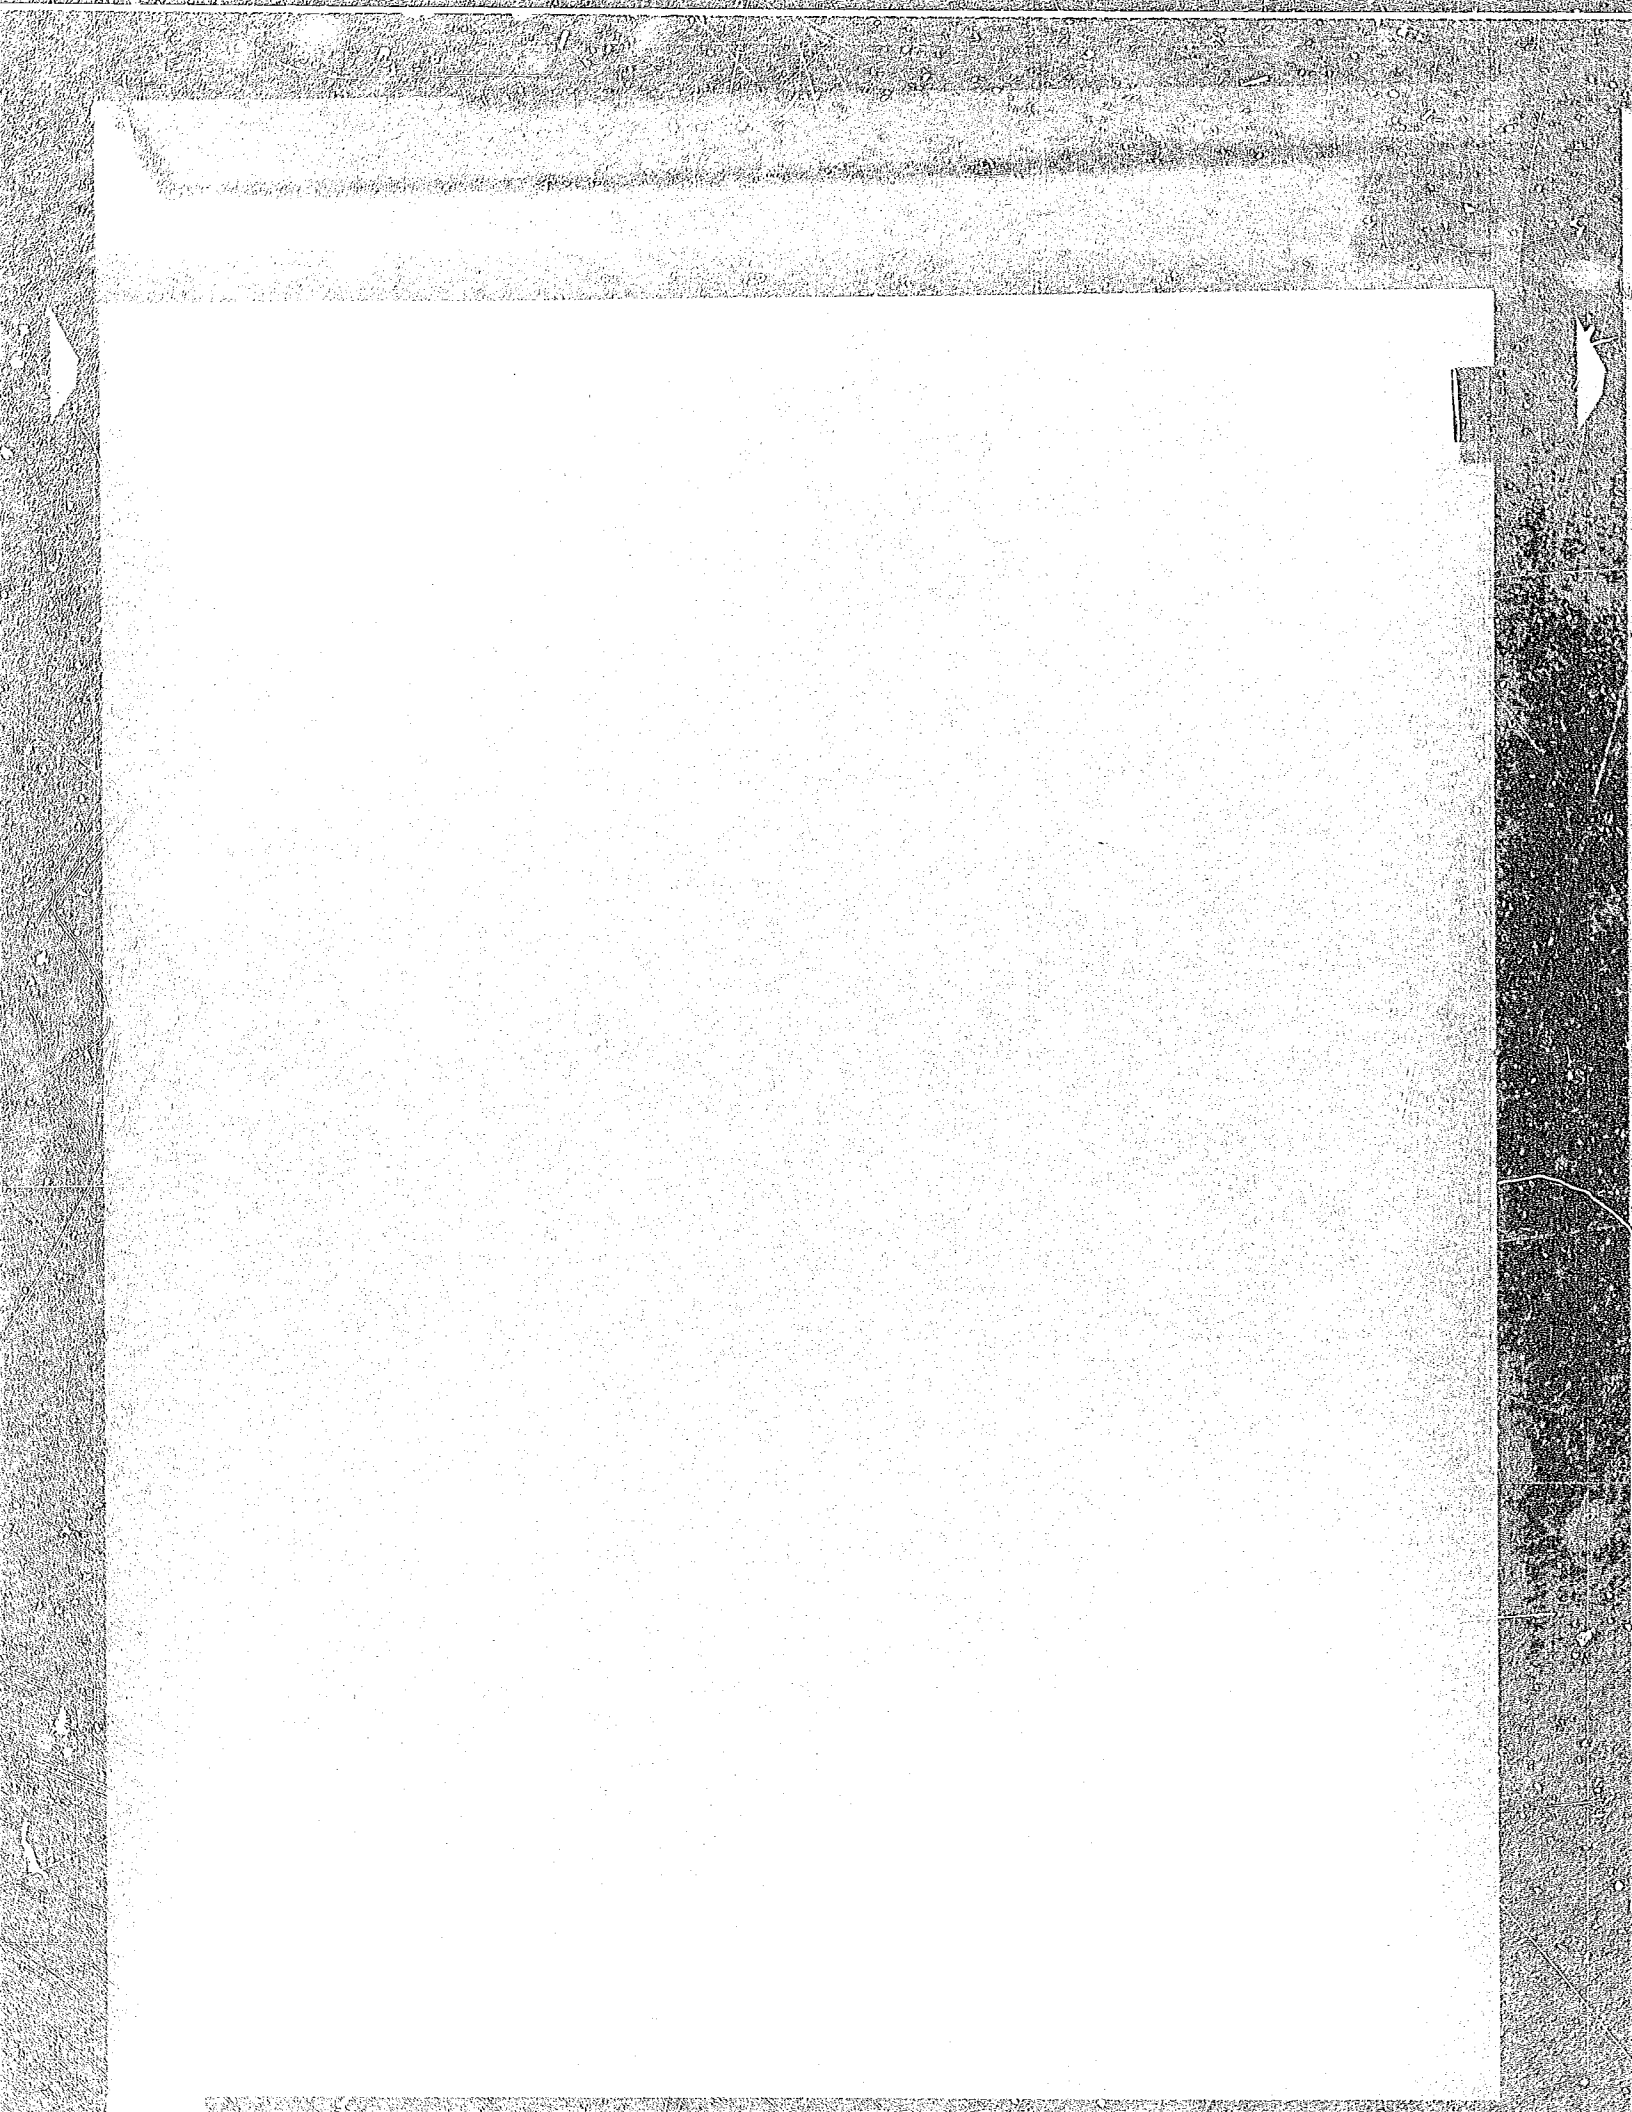

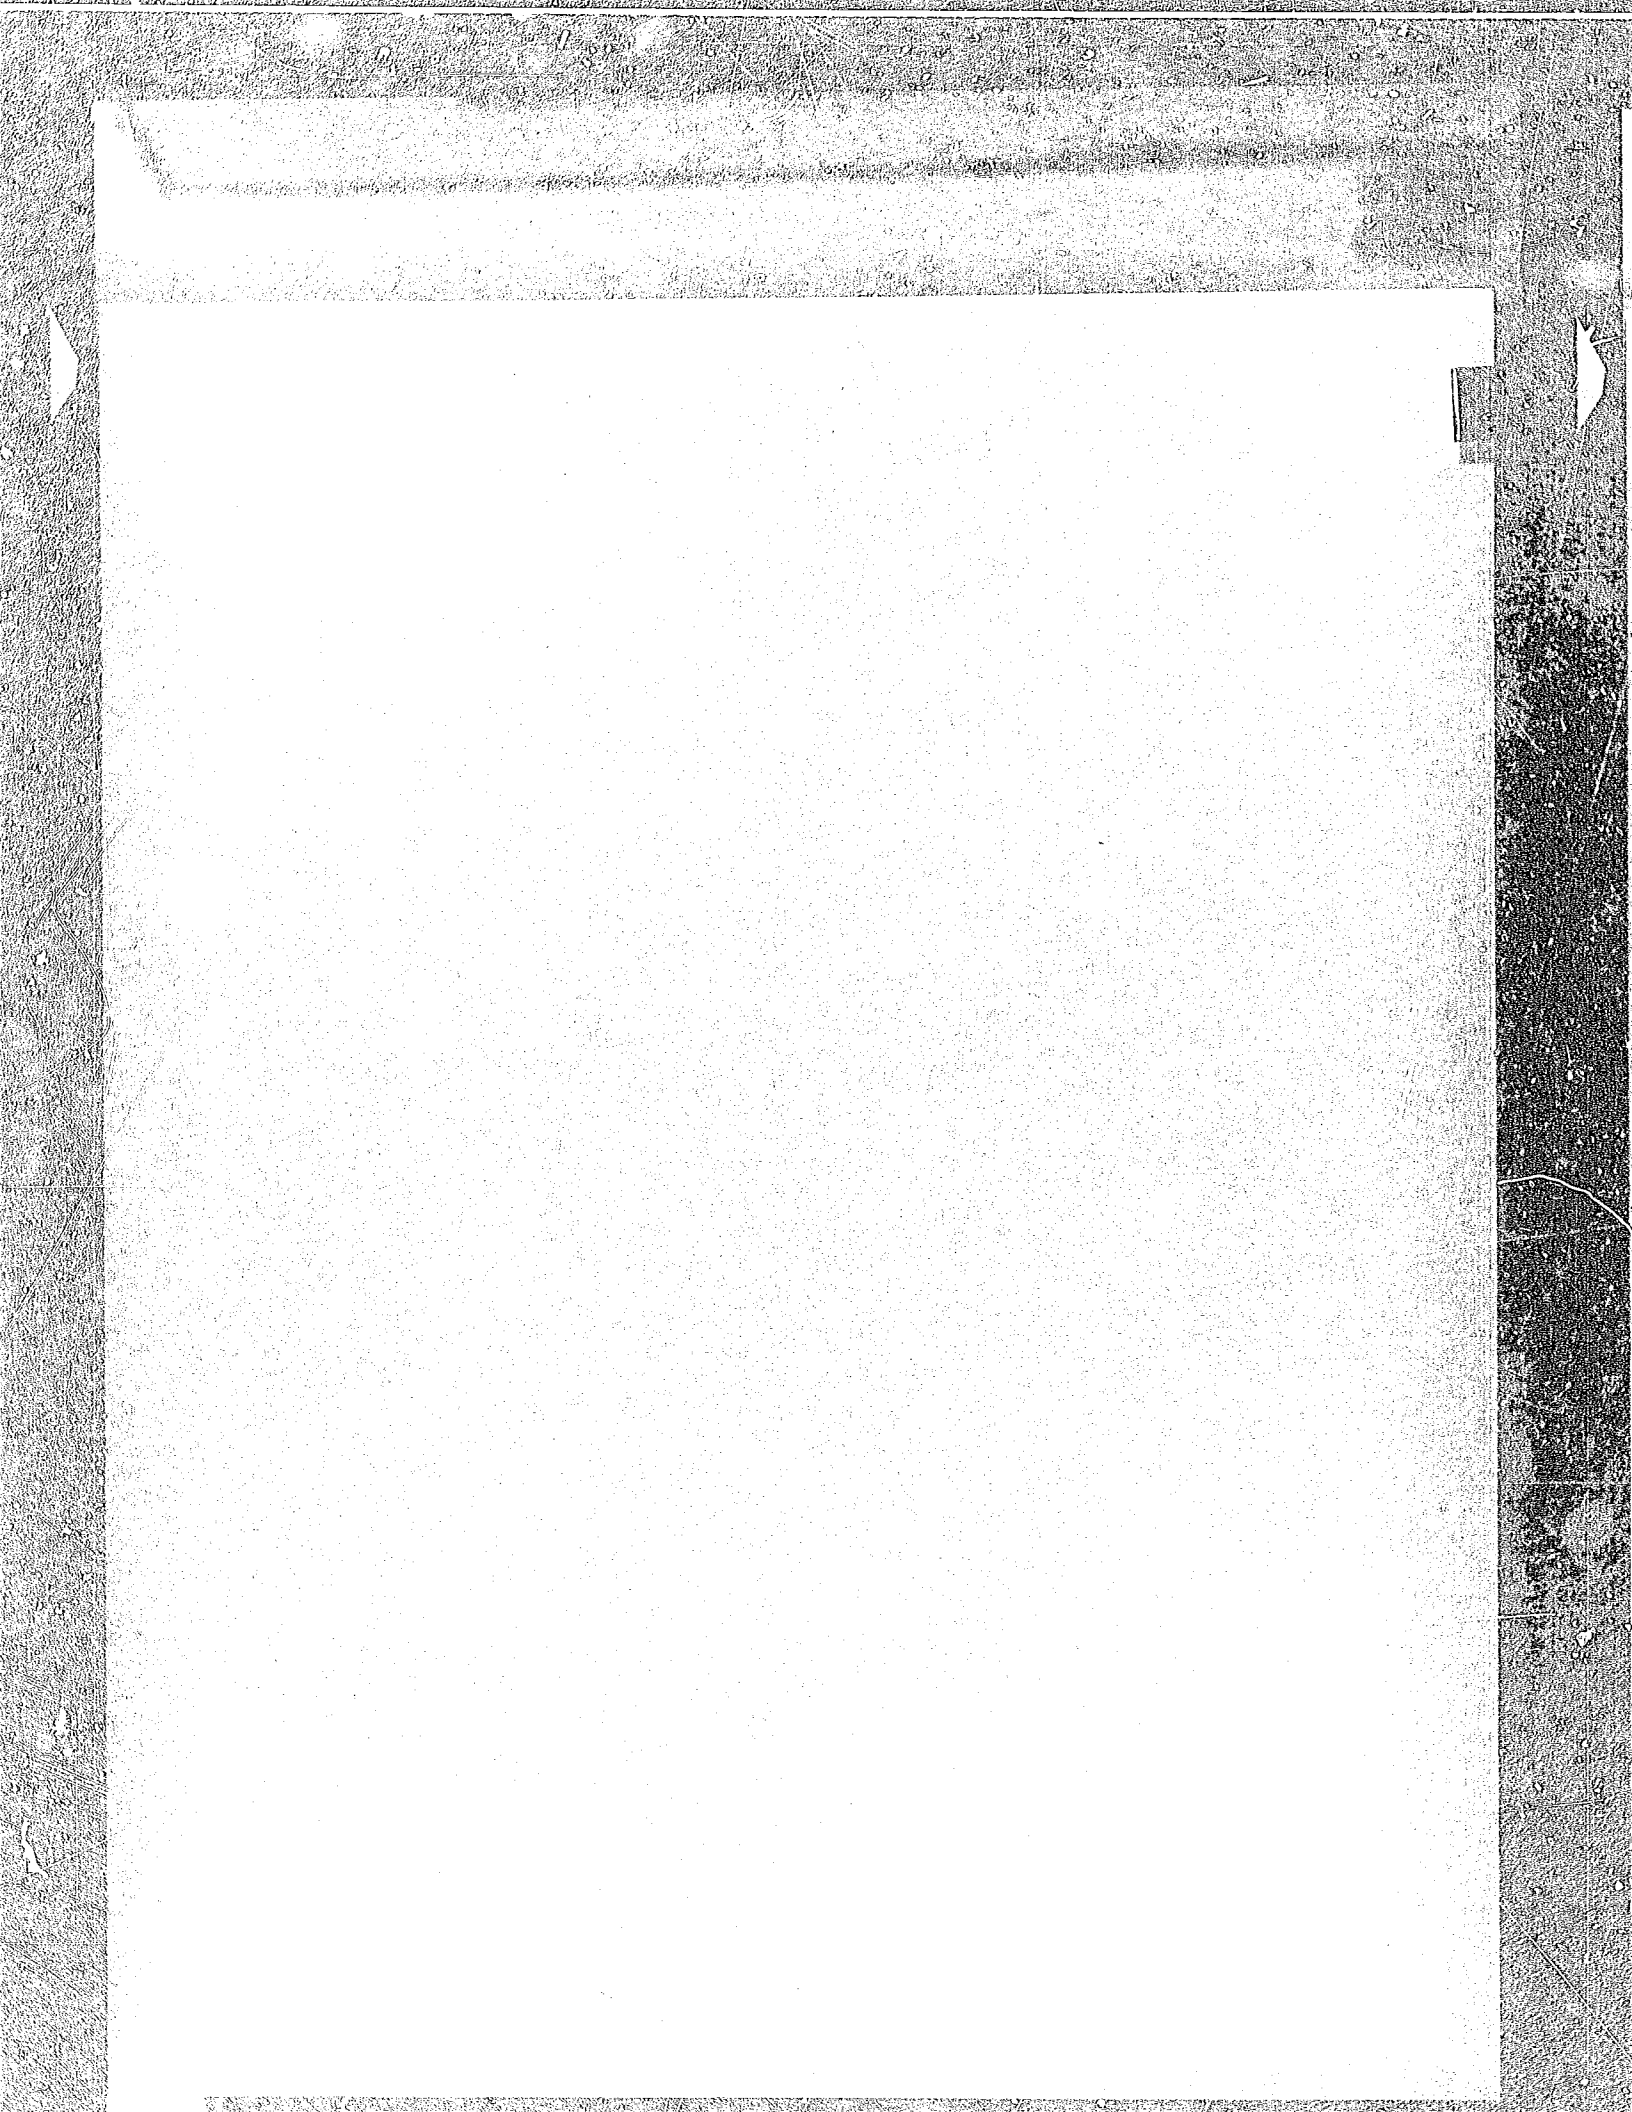

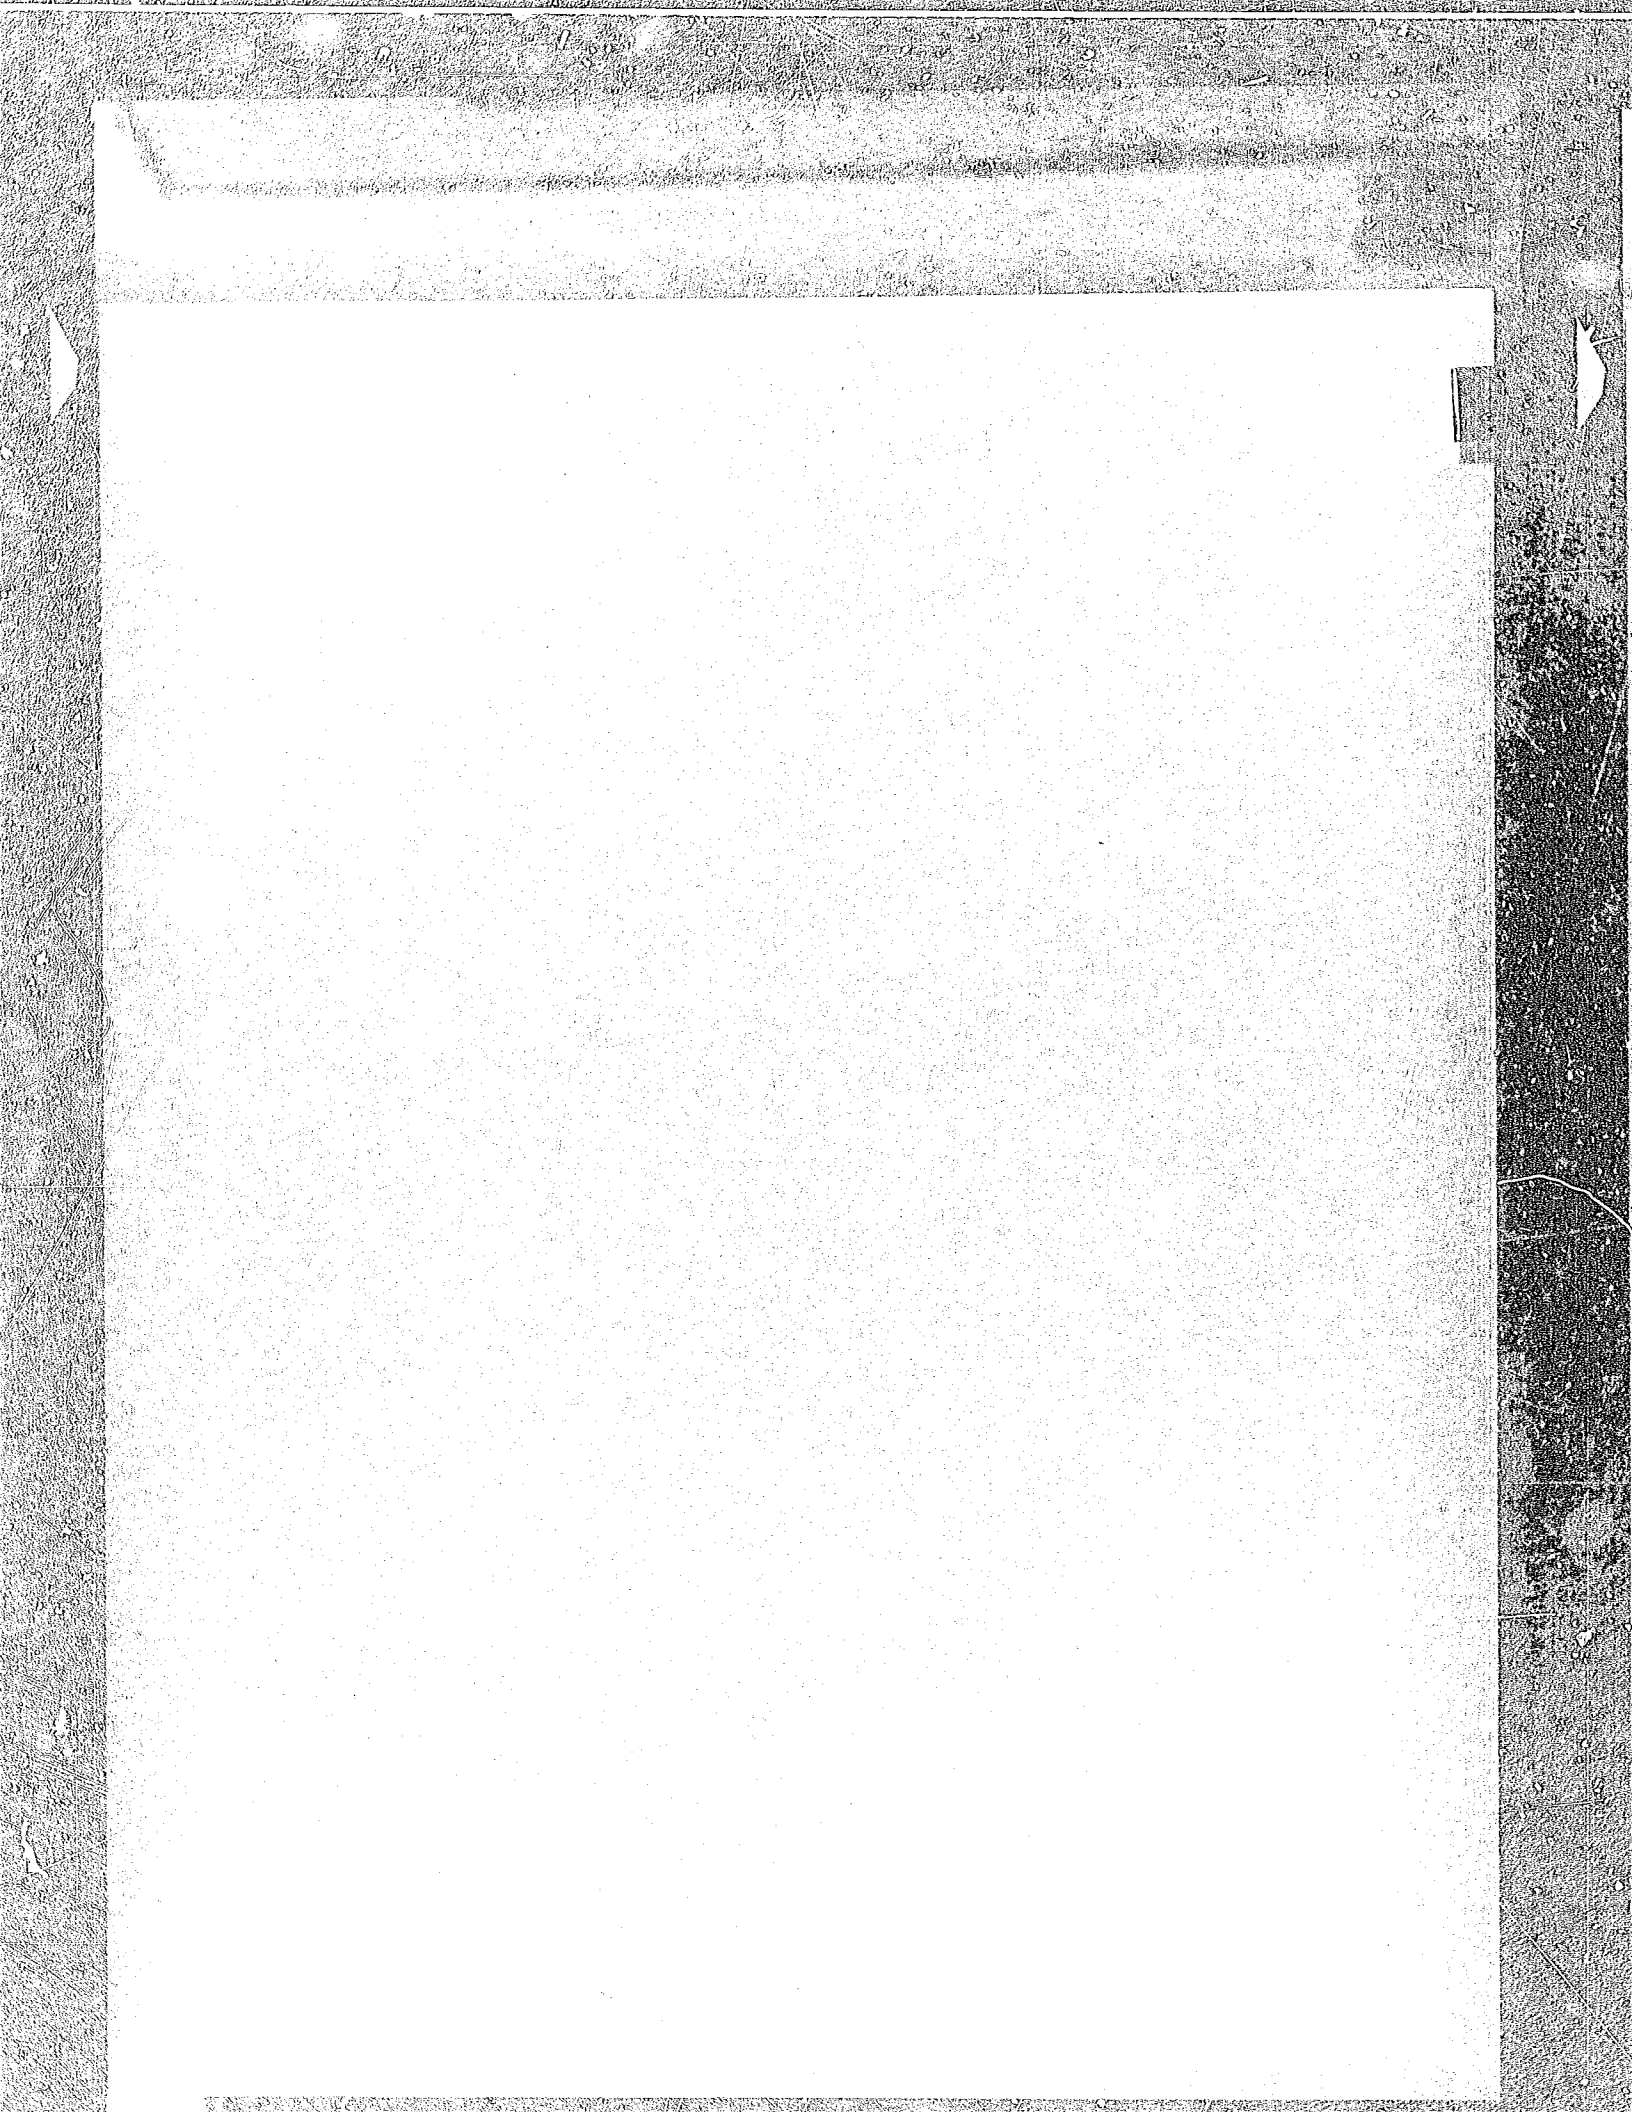

BOOK-
16d E

BOOK-A-154

421 497

26d Examined by C. H. Cramwell 1866

Field Notes
of the
Subdivisions
Township 44 South Range 7 West
Salt Lake Meridian
Utah Territory
as surveyed by
John A. Burrill
under joint contract of Bailey & Burrill
No 23 - dated Sept 4th 1876

Survey commenced Feb 5th 1877
" completed " 5th "

Subdivisions T. 44 S. R. 7 W. Salt Lake

Chains

Feb 5th 1877 by J. G. Burrill

From the established corner to secs 11. 12. 13 & 14. on 9th Special Standard Parallel South

9 Links

North 80 chs. 11 & 12

Va. 15° 30' E.

bears E & W.

3.70 Road to Moccasin Springs

33.00 Road to Long Valley bears N. W. & S. E.

40.00 Set Sandstone 22 x 14 x 8 in. 18 in deep marked + on West side & raised mound of stone for 1/4 sec. cor. from which Cedar 12 in dia. bears N 3° E 46 links dist marked 1/4 S. B. T.

43.75 Gulch drains S. W. 40.00

60.50 Telegraph Line runs N. E. & S. W. 46.00

64.50 Previous Gulch drains S. E. 48.50

80.00 Set Sandstone 17 x 10 x 6 in. 55.50

Salt Lake Meridian

drains ~~W~~ in deep notched ~~Iron~~ & Iron
S. edges raised mound of
stone for cor. Secs 1. 2. 11 & 12
from which
Cedar 12 in dia bears N. 40. W.
20 links dist, marked S 2. 3. 4 ~~W~~
S. R. 1 W. B. T.
A Pine 10 in dia bears S. 30. E. 39 lks
dist marked S. 12. B. T.
Land-rolling- Soil Vate-
Timber- scattering Cedar

East on random line
Set Pcs. 1 & 2
Var. 15° 30' E.

40.00 Set Temp. 1/4 sec. cor.
S. 44.00 Deep Wash drains S.
E. 48.50 Telegraph line bears N.E. & S.W.
55.50 Gully drains S.

Subdivisions T. 44 S. R. 7 W.

Chains		Chains
	Lear rolling ground -	
80.00	Intersect E. boundary of	
	township at cor. to secs 18,	
	from which	10.00
	Post on true line	
	bt. secs. 18 & 19	40.00
40.00	Del Sandstone 16 x 10 x 7 in.	
	11 in deep marked 1/4 on N.	
	side raised mound of	
	stone for 1/4 sec. cor. from whe	
	Cedar 18 in. dia. bears S. 45° E.	
	15 lks. dist. marked 1/4 S. B. T.	
80.00	Ike cor. to secs 1. 2. 11 & 12	
	Land mostly rolling -	
	Soil Sandy	
	Timber - scattering Cedar	

As the North Boundary is
not established from

Salt Lake Meridian.

6 chains North on true line
bet. secs. 19 & 24
Va. 15° 30' E.

10.00 Foot of Spur Bluff bears N.
45. E.

10.00 True cor. falling on bluff
cannot be set therefore
at 10.00 chs set Quartzite
17x8x6 in 12 in deep marked
1/4 W.C. on N. side mound
mound of stone for 1/4 sec. cor.

Note: I abandon line here.
Sand - rolling - Soil Poor
Timber - Scattering Cedar

From the cor. to secs 10. 11. 14 &
15 on the 9th Special Stand-
ard Parallel North
North bet. secs. 10 & 11

Subdivisions T. 44 S. R. 7 W. 4th

Chains	Va. 15° 30' E.	Chains
8.00	Telegraph line bears N.E. & S.W.	
15.00	Wash drains	40.00
	S.E.	65.65
40.00	Set Sandstone 26×26×8 in	76.50
	20 in deep marked ✝ on N.	80.30
	side raised mound of stone	
	for ¼ sec. cor.	
45.80	Road bears E & W.	
59.50	Gully drains W.	40.15
72.50	" " "	
80.00	Set Sandstone 18×12×8 in 12	
	in deep notched 2 on E & 1 on	
	S. edges raised mound of	
	stone for cor. to Secs 2.3.10 & 11	80.30
	Land - rolling - soil 2nd rate	
	Timber - scattering cedar.	

East on random line

J. M. Salt Lake Meridian

Chains Pt. secs. 2 & 11

Va. 15° 30'. E.

40.00 Pet temp. 1/4 sec. cor.

65.65 Deep gully. drains S. W.

76.50 " " " S. E.

80.30 Intersect N & S. line at cor. 1.2.11 & 12

to secs ~~2 & 11~~ from which

Pt set on true line

Pt. secs. 2 & 11

40.15 Pet Limestone 18 x 10 x 4 in

12 in deep marked 1/4 cent.

side raised mound of stone

for 1/4 sec. cor. on South side

blue clay hill -

80.30 The cor. to secs 2. 3. 10 & 11

Sand (middle half) Gypsum

balance rolling - for 2 Pale

Timber - scattering Cedar -

Subdivisions T. 44 S. R. 7 W. Salt

Chains

Chains

No the North Boundary
not established
North on true line
Set secs. 2 & 3
Va. 15° 30' E.

40.00 Set Charred Cedar Post
4 x 4 x 4 in 12 in deep mark
¼ S. on W. side & raised Mound
of earth from 4 pits each 24 x 12
x 12 in for ¼ sec. cor.

65.00 Foot of steep red bluff bears 1.50 W
N. 30° W. & S. E.
32.00

80.00 Point for true cor. on township 40.00
line falling on bluff cannot
be set therefore at 65.00 chs
Set Charred Cedar Post 4 x
4 x 4 in 12 in deep notched 2 on 74.00
E & W on N. edge & W.C. for witness
cor. Secs 2. 3. 34 & 35 - on North 80.00

BOOK-A-154

T. 22 N. Salt Lake Meridian

Boundary of township -
Land mostly rolling & broken
Soil 2nd rate -
Timber - scattering cedar -

From the cor. to secs. 9, 10, 15 & 16 on 9th Special Standard parallel South
North 80 chs. secs. 9 & 10
West 15.30 E.

	1.50	Gully drains S. E.
	32.00	" " "
	40.00	Deposited 1 pint of charcoal in mound South raised from 4 pits each 24x12x12 in for 4 sec. cor.
	14.00	Gully drains E.
	7.00	" " S. E.
	80.00	Ret Sandstone 20x14x5 in

Subdivisions T. 44 S. R. 7 W. Salt

Chains 15 in deep notched 3 on E & W chains T

S. edges prairie mound of stone

for cor. to secs. 3. 4. 9 & 10. from which 40.00 E

Cedar & pin dia. brs S. 30. E. 3

Brs. dist. & mkd S. 10. T. 44 S. R.

W. B. T.

Sand-hole - Soil & rock

Timber scattering cedar 80.00 S

East on random line

bt. secs. 3 & 10

Va. 15. 30.

31.40 Long Valley Road brs N & S.

40.00 Set temp. 1/4 sec. cor.

53.00 Cottonwood Barron Wash draws

S.W. 5.00 chs then S.E.

56.50 Road brs N.W. & S.E.

80.00 Intersect N & S. line at cor. 40.00

2. 3. 10 & 11

to secs ~~3 & 10~~ from which

BOOK-A-154

Salt Lake Meridian

chains West on true line
bet. secs. 3 & 10

40.00 Set Sandstone 15×11×8 in 10 in deep marked 1/4 on S. side
raised mound of earth
pits 4 ft each 24×12×12 in for 1/4 sec. cor.

80.00 The cor. to secs. 3. 4. 9 & 10
Sand rolling - Pit 2 Rate
Timber - scattering cedar

---

to the north boundary of Township is not established
North on true line
bet. secs. 3 & 4
Va. 15. 30. E.

40.00 Trav foot of steep bluff bears N. E. & S. W. set 6 chained cedar

Subdivisions T. 44 S. R. 7 W.

Chains Post 4 8×4×4 in 12 in deep mar
1/4 on W side in mound of earth
raised from 4 pits each 24×12
12 in for 1/4 sec. cor.

Note: I abandon line here -
Sand - broken - Dry Gulch
Timber - scattering Cedar

Return to the cor. to secs. 3. 4.
9 & 10 as the line west will
reach the mountains in less
than 80.00 chs Drive
West on true line
Pt. secs. 4 & 9

N. 15° 30' E.

6.00 Wash drains S.E.
40.00 Set Charred Cedar Stake
36×3×3 in 12 in deep marked
1/4 S. on N. side & raised mound
of earth from 4 pits each 24×12

Chains 8×12

Note: I

0.65
40.00

BOOK-A-154

N. Salt Lake Meridian

Set Stone 8x12 in for 1/4 sec. cor.

Note: I abandon line here.
Sand rolling & broken
Cor's 2 Pits
Timber - scattering cedar -

From the cor. to secs 8. 9. 16
& 17 on the 9th Special
Standard Parallel South
North Lt. secs. 8 & 9
Va. 15° 30' E.

0.65 Wash drains S. E.

40.00 At foot of Red Bluffs
bears N. E. & S. W. set Charred
Cedar Post 4 ft x 3 x 3 in 12 in
deep mounded 1/4 on W. side
& raised mound of earth
from 4 pits each 24 x 12 x 12 in
for 1/4 sec. cor.

610

Meanders Lines 7.44 L. S. 12. 1. 22

Note: I abandon line here
Land - broken - Soil 2d r.
Timber - Cedar & Pine
Feb 5th 1877 - J. G. Burrill

General Description

The surveyed portion of
this township embraces
good pine & cedar timbe
I return the following
as Gypsum land, - the S.
1/4 of S.W. 1/4 - the S.W. 1/4 of S.E.
of Sec 2. & the N.E. 1/4 of the
N.W. 1/4 of Sec 11 - N.W. 1/4 of the
N.E. 1/4 of Sec 11 - the balance
is agricultural - the un
surveyed portion lies on
mountain bluffs. -

Feb 5th 1877 - J. G. Burrill
U.S. Deputy Surveyor.

BOOK-A-154

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Subdivisions

Township No. 44 S. Range No. 1 West

Executed by Bailey & Burrill

Under Joint contract of the 4th

day of September 1876, in the month of

February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-154

2944

Township 44 South R. 6 West

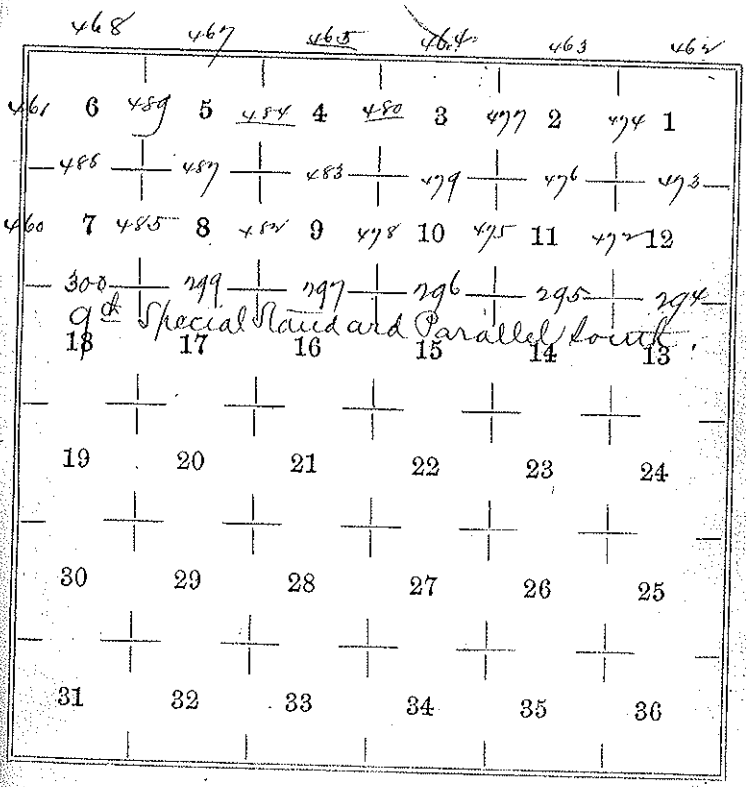

BOOK-A-154 3264
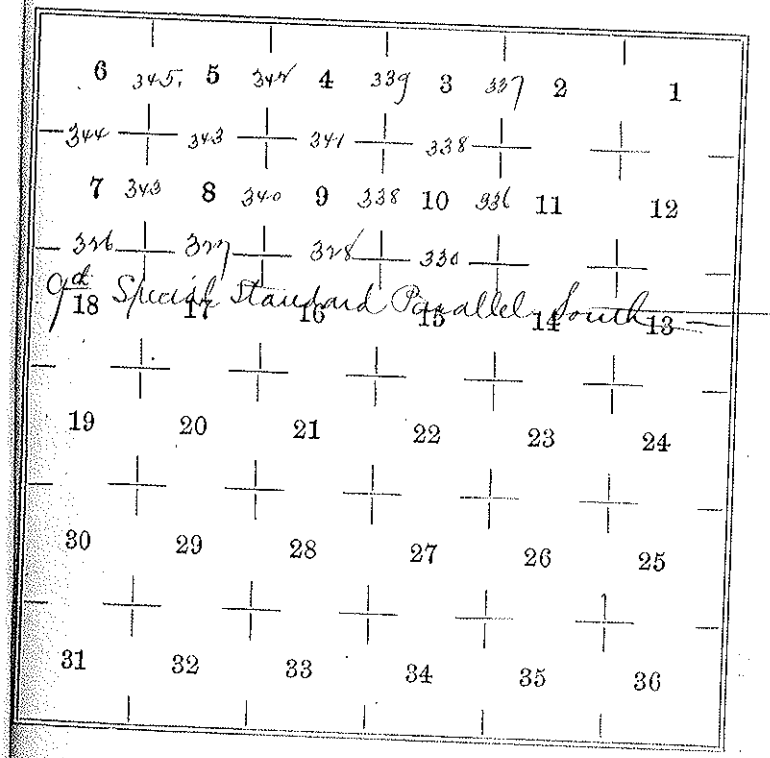
Township 44 North R. 3 West