Book 163

BOOK A-163

Exterior Lines and Subdivision Lines

Township 3 S. **R.** 19 E.

88	87	86	85	84	83
90 6 77	5 62	4 48	3 35	2 17	1
75	74	61	47	33	15
91 7 72	8 59	9 46	10 32	11 14	12
71	70	58	44	30	12
91 18 68	17 56	16 42	15 28	14 11	13
67	63	54	41	27	10
93 19 65	20 53	21 39	22 25	23 8	24
	52	49	36	24	6
30	29 57	28 38	27 22	26 5	25
			21	19	3
31	32	33	34 18	35 2	36
			99	97	95

R.
BOOK A-163

Filed Feb. 2d 1879.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

Subdivision lines

of Township No. 3 South, Range No. 19 East

of the Salt Lake Meridian in Utah Territory.

BY

Farrow and Burtner

U. S. DEPUTY SURVEYOR,

Under ~~his~~ their joint Contract No. 92

dated June 13th 1879.

Survey commenced October 6th 1879.

Survey completed October 8th 1879.

BOOK-A-163

Subs. Tp. 5 S. R. 19 E. 2

Survey commenced Oct 6th 1879
by E. Buttner

From the cor. to Secs. 35 & 36
on the South Boundary of Tp.
North bet. Secs. 35 & 36
Var. 16° 30' E.

8.20 Hollow drus. S. W.
25.00 Ridge brs. N. E. and S. W.
40.00 Set Sandstone 15 x 8 x 4,
10 in deep, marked 1/4 on W
side, with stone mound
for 1/4 Sec. cor. from which
a Cedar 14 in. diam. brs.
N. 79° W. 5 lks. distant
a Cedar 20 in. diam, brs.
N. 60° E. 50 lks. distant
Both marked 1/4 S. B. T.
46.00 Hollow drus. West
80.00 Set Sandstone 14 x 10 x 6,
9 in. deep, marked 1 notch
on Sand E. edge, with
stone mound for cor.

5

Subd. Tp. 3 S. R. 19 E. of the
to Secs. 25. 26. 35 & 36.
From which
A Cedar 24 in diam. bears
N. 45° E. 12 lks. distant
A Cedar 16 in. diam. bears
N. 60° W. 20 lks. distant
A Cedar 18 in diam. bears
S. 35° W. 28 lks. distant.
All marked according to
instructions

Land Mountainous
Soil 2nd and 3rd rate
Timber Cedar and
Pine on
Augmented on 80 ch.

East on a random line
bet. Secs. 25 and 36
Var. 16° 30' E.

BOOK-A-163

19.00 Foot of steep Mountain
40.00 Set temp. 1/4 Sec. cor.
80.12 Int. E. Boundary of Tp.
at cor. to Secs. 25 and 36
from which Weston Lime
line bet. Secs. 25 & 36
40.06 Set Sandstone 12 X 10 X 6,
8 in. deep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor. from which
a Cedar 12 in. diam. brs.
N. 50° E. 25 lks. distant
a Cedar 10 in diam. brs.
S. 40° W 20 lks. distant
Both marked 1/4 S. 13. T.
80.12 The cor. to Secs. 25, 26,
35 and 36.

Land Mountainous
Soil 2nd rate
Timber Cedar & Pine

5 Subs. Tp. 3 S. R. 19 E. of the

Augmented on 80.02 chns. —

North bet Secs. 25 & 26

Var 16° 30' E

8.00 Gulch drns. W.

40.00 Set Sandstone 14 x 8 x 4

9 in. deep. Marked 1/4 on

W side with stone mound

for 1/4 Sec. cor.

45.50 Dry Creek drns. W

62.00 Deep Gulch " "

80.00 Set Sandstone 20 x 8 x 8,

15 in. deep marked with

2 notches on S and 1 on E

Edges, with stone mound

for cor. to Secs 23. 24.

25 and 26. from which

a Cedar 15 in. diam bears

N. 55° E. 20 lks. distant

BOOK-A-163

a Cedar 8 in. diam. brs.
S. 25° E 25 lks. distant
a Cedar 11 in. diam. brs.
S. 75° W. 8 lks. distant
a Cedar 20 in. diam. brs.
N. 20° W. 10 lks. distant
all marked according
to instructions.
Land Mountainous
Soil 2nd rate
Timber Cedar and Pine
Augmented on 8.00 chns.

Eastow random line
bet Secs 24 & 25
Var. 16° 30' E

40.00 Set temp 1/4 Sec. cor.
57.00 Foot of Main Mountain slope
brs. S. W.

7 Subs Tp. 3 S. R. 19 E. of the

77.00 Leave Timber

80.00 Int. E Boundary of Tp.
15 lks. S. of cor. to Secs.
24 and 25. from which
S. 89°54' W on true line
bet Secs. 24 and 25

45.00 Set Sandstone 12 x 10 x 5,
8 in deep marked 1/4 on
W side with stone mound.
for 1/4 Sec. cor. from which
a Pine 12" diam. bears
N. 30 W. 20 lks. distant
a Cedar 18" diam. bears
S. 45° E 30 lks. distant
Both marked 1/4 S. B.T.

80.00 The cor. to Secs. 23. 24,
25 and 26

Land Mountainous and
rolling

Soil 2nd rate

38.4

40.0

46.0

80.

BOOK-A-163

Salt Lake Meridian

Timber Pine and Cedar on 77.00 chns.
Augmented on 80.00 chns.

North bet. Secs. 23 and 24
Var 16° 30' E.

38.40 Hollow drus. W.
40.00 Set Quartzite 10 x 10 x 6, 6 in. deep, marked 1/4 on W side with reg. mound and pits for 1/4 Sec. cor. from which a Cedar 14 in diam, brs. S. 70° E. 15 lks. distant a Cedar 18 in. diam. brs. S. 75° W 25 lks. distant Both marked 1/4 S.B.T.
46.60 Hollow drus. W.
80.00 Set Sandstone 12 x 10 x 5, 8 in. deep, marked Notche.

Subs. Tp. 3 S. R. 19 E. of the

on S. and on E edges
with stone mound for cor.
to Secs. 13. 14. 23. & 24.
from which
A Cedar 15 in. diam. brs.
S. 80° W. 14 lks. distant
A Cedar 12 in. diam. brs.
N. 35° W. 36 lks. distant
A Cedar 24 in. diam. brs.
N. 70° E. 30 lks. distant
All marked according
to instructions
Land rolling Bench
Soil 1st and 2nd rate
Timber Cedar and Pine on
80 chns.
Augmented on 80.00 chns.

28.
40.
66.
80.
40
80.

BOOK-A-163

Salt Lake Meridian

Easton random line bet
Secs. 13 and 24
Var 16° 30' E.

28.00 Leave Timber
40.00 Set temp. 1/4 Sec. cor.
66.00 Wash in Hollow drus. N. W.
Enter Timber
80.15 Int. E Boundary of Tp.
55 lks. N. of cor. to Secs.
13 and 24 from which
N. 89° 36' W on true line
bet. Secs. 13 and 24
40.07 Set Sandstone 14 x 10 x 7, 9 in
deep, marked 1/4 on N side
with stone mound for 1/4
Sec. cor.
80.15 The cor to Secs. 13. 14. 23 & 24
Land rolling
Soil 1st rate
Timber Cedar and Pine

11 Subs. Tp. 3 S. R. 19 E. of the

m 42.15 chns.

Augmented m 42.15 chns.

North bet Secs. 13 and 14

Var 16° 30' E

8.50 Euler Creek flat, Leave Timber

11.50 Deep creek 8 lks wide

12 in. deep runs S.W

21.00 Ascend. Euler Timber

38.50 Ridge brs. N.W. and S.E.

40.00 Marked Stationary Sandstone

4 x 3 x 1 ft. above ground

1/4 on W side, with stone

mound for 1/4 Sec. cor.

50.00 Euler flat. Leave Timber

71.00 Spring branch 2 lks wide

runs S.E. a spring

brs. E. 2 chns. distant

80.00 Set Limestone 20 x 8 x 7,

Salt Lake Meridian

15 in. deep, marked 4 notches on S. and 1 on E edges, with stone mound for cor. to Secs. 11, 12, 13 and 14.

Land level and mountainous

Soil 1st and 2nd rate

Timber Cedar and Pine

on 37.50 chns.

augmented on 37.50. chns.

East on random line

bet. Secs. 12 and 13

Var 16°30' E.

4.50 Deep creek 12 lks. wide 10 in deep ons. S.

21.50 Leave flat. Enter Timber Ridge

40.00 Set Temp. 1/4 Sec. cor.

66.50 Gulch ones. S. W.

80.18 Ins. E Boundary of Tp.

15

Subs. Tp. 3. S. R. 19 E. 7th

at cor. to Secs. 12 and 13
from which W. on true
line bet. Secs. 12 and 13
40.09 Set Sandstone 10 x 10 x 7
6 in. dep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor. from which
a Pine 16 in. diam. bns.
N. 10° E. 20 lks. distant
a Pine 14 in. diam. bns
S. 15° W. 23 lks. distant
Both marked 1/4 S. B. T.
80.18 The cor to Secs. 11, 12,
13 and 14.
Land mostly Mountainous
Soil 3rd and 1st rate
Timber Pine on 58.68 chns
Augmented on 58.68 chns.—

October 6th 1879

E. Buettner
U. S. Dep Sur.

Salt Lake Meridian

October 6th 1879 by A. D. Farrow

North bet. Secs. 11 and 12

Var 16° 30' E.

12.00 Deep creek 10 lks. wide 6 in. deep, runs S. E.

25.00 Enter timber ridge, bns. N. W and S. E.

40.00 Marked Stationary Sandstone 8 x 5 x 2½ ft. above ground, ~~marked~~ 1/4 facing W. with stone mound for 1/4 Sec. cor. from which a Pine 45 in. diam. bns. N. 40° W. 43 lks. distant a Pine 16 in. diam. bns N. 31° E. 41 lks. distant Both marked 1/4 S. B. T.

80.00 Set Sandstone 25 x 13 x 8 18 in. deep, marked 5 notches on S and on E edges, with stone

Subs. Tp. 3. S. R. 19 E. of the
mound for cor. to Secs.
1. 2. 11 and 12. from which
a Pine 40 in. diam. brs.
S. 85° E 110 lks. distant
a Pine 8 in diam. brs.
N. 60° E. 82 lks. distant
a Pine 38 in. diam. brs N
50° W. 61 lks. distant
All marked according
to instructions
Land Mountainous and level
Soil 2nd and 1st rate
Timber Pine on 55.00 chns.
Augmented on 55.00 chns. —

East on random line
bet. Secs. 1 and 12
Var 16° 30' E.
4000 Set temp. 1/4 Sec. cor

BUUN-A-163

Salt Lake Meridian

47.50 A Pine 30 in diameter

57.00 Ridge brs. N and S.
Lava Timber.

80.20 Int. E Boundary of Tp.
19 lks. N. of cor. to Secs.
1 and 12 from which
N. 89° 52' W on true line
bet. Secs. 1 and 12

40.10 Set Sandstone 18 X 13 X 9
12 in deep, marked
1/4 on N side, for 1/4 Sec.
cor.

80.20 The cor. to Secs. 1. 2. 11 and 12
Land Mountainous
Soil 2nd rate
Timber Pine on 57.00 chns. —
Augmented on 80.20 chns. —

17

Subs. Tp. 3. S. R. 19 E. of the

North on random line
bet Secs. 1 and 2
Var 16° 30' E.

17.00 Road brs. E and W.
36.00 Leave Timber
40.00 Set temp. 1/4 Sec. cor.
45.00 Hollow drns. W. steep
ascend.
65.00 Ridge brs. N. W. and S. E.
75.00 Head of Hollow drns. S. E.
80.12 Int. N. Boundary of Tp
22 lks. E. of cor. to
Secs. 1 and 2 from which
S. 0° 09' E. on true
line bet Secs. 1 & 2
40.12 Marked Stationary
Sandstone 30 x 20 x 4
in. above ground
1/4 ~~[illegible]~~ W side with
Stone mound for

BOOK-A-163

Salt Lake Meridian

1/4 Sec. cor.

80.12 The cor. to Secs. 1. 2. 11. & 12

Land Mountainous

Soil 2nd rate

Timber Pine on 36.00 chns.

Augmented on 50.12 chns.

October 6th 1879. A. D. Ferron Dep. Sur.

October 7th 1879 By E. Burthur

North bet. Secs. 34 and 35

Var 16° 30' E

Descend

9.00 Hollow trns. S. W.

27.00 Ridge brs. N. E. and S. W.

38.00 Leave Timber

40.00 Set Sandstone 15 X 12 X 6;

10 in. deep, marked 1/4 on

W side with stone mound

for 1/4 Sec. cor.

48.50 Hollow trns. W

51.00 " " S. W

Subs. Tp. 3 S R. 19 E. of the

58.00 Enter Timbered Bench 400

68.00 Leave Timber 79.8

80.00 Set Sandstone 12 x 10 x 6
8 in. deep, marked 1 north
on S and 2 on E edges,
with stone mound for
cor. to Secs. 26. 27, 34 & 35 39.9
Land Mountainous on
60 chns.
Soil 3rd and 1st rate
Timber Pine and Cedar
on 48.00 chns. —
Augmented on 60.00 chns. —

East on random line
bet. Secs. 26 and 35 79.
Var 16° 30' E.

3.00 Enter Timber
gradual ascend

Salt Lake Meridian

40.00 Set temp. 1/4 Sec. cor.
79.80 Int. N. and S. line 20 lks.
N. of cor. to Secs. 25. 26.
35 and 36. From which
N. 89°51' W. on true line
bet. Secs. 26 and 35
39.90 Set Sandstone 10 x 10 x 8;
6 in. deep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor.
From which
A Cedar 12 in. diam. brs.
S. 30° E. 20 lks. distant
A Cedar 15 in. diam. brs.
N. 25° E. 25 lks. distant
Both marked 1/4 S. B. T.
79.80 The cor to Secs. 26. 27
34 and 35
Land nearly level
Soil 1st rate

Subs. Tp. 3 S. R. 19 E. of the

Timber. Cedar and Pine

on 76.80 chns.

Augmented on 76.80. chns —

Note: As the line bet. Sec

27 and 34 intersects the

E Boundary of the Uintah

Indian Reservation there=

fore from the said cor. to

Secs. 26. 27. 34 and 35

I run N

West on true line

bet. Secs. 27 and 34

Var 16° 30' E

2.50 Enter Timber

15.00 Enter Flat Leave Timber

25.22 Int. E Boundary of

Uintah Indian Reservation

at a point N 22° E

Salt Lake Meridian

17.08 chns. distant from
mile cor. No. 32.
where I set a
charred Cedar Post 4" x 4"
4 ft. long 2 ft. deep, marked
C. C. with reg. mound
of earth and pits for
closing Cor. to fractional
Secs. 2 and 34
Land mostly level
Soil 1st rate
Timber Pine and Cedar
12.50 on 15 chns.
12.50 Augmented on 100 chns.

North bet. Secs. 26 and 27
Var 16° 30' E.
2.00 Euler Timber
3.00 Hollow drug N

Subs. Tp. 3 S. R. 19 E. of the

38.50 Hollow drus. W.

40.00 Set Cobble stone 12 x 10 x 5
8 in deep marked 1/4 on
W side, with stone mound
for 1/4 Sec. cor.
No suitable trees at hand

60.00 Deep Creek in hollow
rus. S. W. 15 lks wide, 12 in.
deep. Leave Timber

80.00 Set Sandstone 20 x 10 x 6
15 in deep, marked 2 notches
on Sand E edges with reg.
mound of earth and pits
for cor. to Secs. 22. 23. 26
and 27
Land mostly level
Soil 1st rate
Timber Cedar and Pine
on 58.00 chns.
Augmented on 58.00 chns. —

BOOK-A-163

Salt Lake Meridian

East on random line
bet. Secs. 23 and 26
Var. 16° 30' E.

4.50 Enter flat
6.30 Deep creek 15 lks. wide
18 in. deep runs. Southerly
10.00 Ascend Enter Timber
27.00 Hollow runs. S. W
40.00 Set temp. 1/4 Sec. cor
52.00 Gulch runs. S. W.
80.00 Int. N. and S. line at
cor. to Secs. 23. 24. 25 & 26
from which
West on true line
bet. Secs. 23 and 26
40.00 Set Sandstone 13 x 9 x 6
9 in deep, marked 1/4 on
N side with stone mound
for 1/4 Sec. cor. from which
A Cedar 10 in. diam. bears

Subs. Tp. 3 S. R. 12 E. of the

S 12° 30' E. 17 lks. distant
a cedar 24 in. diam. brs.
N. 85° W. 12 lks. distant
Both marked by S. B. T.

80.00 The cor. to Secs. 22. 23
26 and 27
Land rolling
Soil pt. fair
Timber Pine and Cedar
on 70 chns.
Segregated on 70.00 chns.

North bet. Secs. 22 and 23
Var 16° 30' E

4.00 Enter Timber
22.00 Ravine drns. S. E.
28.50 Enter flat Leave Timber
Deep creek 15 lks. wide
12 in deep, runs S. E.

40.0

42.0
80.00

Salt Lake Meridian

40.00 Set Sandstone 14 X 12 X 4, 9 in. deep, marked 1/4 on N side, with reg. mound and pits for 1/4 Sec. cor

42.00 Enter Bench

80.00 Set Sandstone 15 X 12 X 8, 10 in deep marked 3 notches on S and 2 on E edges, with reg. mound of earth and pits for cor. to Secs. 14. 15. 22 and 23

Land rolling

Soil 1st rate

Timber Pine and Cedar on 34.50 chns.

Augmented on 34.50 chns.

Subs. Tp. 3. S R. 19 E. of the

East on random line
bet Secs. 14 and 23
Var 16° 30' E

40.00 Set temp 1/4 Sec. cor.
47.00 Sandstone Ledge 58 ft.
heigh, brs. N. E. and S. W.
73.80 Deep creek 10 lks. wide
12 in. deep rns. S. W
77.00 Leave flat, enter Timber
79.80 Int. N and S. line at
cor. to Secs. 13, 14, 23 and 24
from which W
West on true line
bet Secs. 14 and 23,
39.90 Set Sandstone 12 x 10 x 4
8 in. deep, marked 1/4
on N side, with reg.
mound and pits, for
1/4 Sec. cor.
79.80 The cor. to Secs. 14, 15

Salt Lake Meridian

22. and 23

Land rolling

Soil Pr rate

Timber Pine and Cedar

on 2.80 chns.

augmented on 2.80 chns.

North bet Secs. 14 and 15

Var. 16° 30' E

10.00	Deep Creek 15 lks. wide 18 in. deep runs S. W. Enter. Brnch
25.50	Deep Creek 15 lks. wide 18 in. deep runs. S. E.
34.50	Deep Creek 15 lks. wide 18 in. deep runs. S. W.
40.00	Set boulder stone 10 x 8 x 7 6 in deep marked 1/4 on W side with reg. mound and pits for

Subs. Tp. 3 S. R. 19 E. of the

1/4 Sec. cor.

46.00 Road bns. N. E. and S. W.
Leave Brush

54.00 foot of Cedar Ridge

54.00 Top of same

62.00 foot ... — enter flat

67.00 ascend

80.00 set Quartzite 36 x 20 x 4,
20 in. deep marked 1/4
notches on S and W on E edges
with stone mound
for cor. to Secs. 10, 11, 14 10.5
and 15. from which 18.5
a Cedar 16 in. diam. bns.
S. 30° 30' W. 120 lks. distant 19.
a Cedar 8 in. diam. bns.
S. 36° E 80 lks. distant 40.0
All marked according
to instructions 52.
Land level and rolling 63.

Salt Lake Meridian

Soil 1st and 2nd rate
Timber cedar on 30 chns
Heavy undergrowth on
36, chns.
Augmented on 66.00 chns.

East on random line
bet Secs. 11 and 14
Var. 16° 30' E.
Ascend
10.50 Ridge brs. N. and S.
18.50 Leave cedars, enter flat
Road brs. N. and S.
19.70 Deep creek 12 lks. wide
12 in. deep runs S.W.
40.00 Set temp. 1/4 Sec. cor.
52.50 Leave flat Ascend
Enter Timber
63.50 Low Ridge brs N and S.

Subs. Tp. 3. S. R. 19. E. of the

70.00 Enter flat Leave Timber
75.00 Spring Sprich 5 chains
80.00 Int N and S. line
34 lks. N of cor to
Secs. 11. 12. 13 and 14
from which
N. 89° 45' W. on
true line bet Secs. 11 & 14
40.00 Set Sand stone 24 x 14 x 3
18 in. deep marked 1/4
on N. side, with reg.
mound and pits for
1/4 Sec. cor.
80.00 The cor. to Secs. 10. 11
14 and 15
Land level and broken
Soil 1st and 2nd rate
Timber Cedar and Pine
on 36.00 chns.
Augmented on 36.00 chns.

18.0
40.0
52.0
80.0

Salt Lake Meridian

North bet. Secs. 10 and 11

Var. 16°30' E.

18.50 Ridge brs. N. E and S. E.

40.00 Set Quartzite 14 x 10 x 10 8 in. deep, marked 1/4 on W side, with stone mound for 1/4 Sec. cor from which

A Cedar 8 in. diam. brs. N. 40° W. 15 lks. distant

a Cedar 6 in. diam. brs. S. 30° W 21 lks. distant

Bolt marked 1/4 S.B.T.

52.00 Enter flat brs. N. W. and S. E.

Leave timber.

80.00 Set Quartzite 30 x 24 x 6 20 in. deep, marked 5 notches on S and 2 on E, edges, with stone mound for cor. to Secs.

Subs Tp. 3 S. R. 19 E. of the

2. 3. 10. and 11.
Land mostly rolling
Ridges
Soil 2nd and 1st rate
Timber Cedar on 52.00 chns.
Augmented on 52.00 chns —

East on random line
bet. Secs. 2 and 11
Var 16° 30' E

25.00 Spring Branch 8 lks. wide
6 in deep. rns S. W.

40.00 Set temp. 1/4 Sec. cor.
from which Basor's ranch
Cabin brs. S. 30° W. 10 chs.
distant

43.50 Spring Branch 10 lks. wide
12 in deep rns. South.
Enter Timber

Salt Lake Meridian

46.50 Road brs. N. E. and S. W.

54.20 Spring branch 5 lks. wide 6 in deep in hollow rns. S. W.

80.10 Int N. and S. line at cor to Secs. 1. 2. 11. and 12 from which West on true line bet Secs. 2 & 11

40.05 Set Sandstone 17 x 12 x 4 11 in. deep, marked 1/4 on N side with stone mound for 1/4 Sec. cor

80.10 The cor to Secs. 2. 3. 10 & 11

Land level and Broken

Soil 1st and 2nd rate

Timber Pine on 36.60. chns.

Augmented on 36.60. chns.

Subs. Tp. 3 S. R. 19 E. of the
North on random line
bet. Secs. 2 and 3
Var 16°30' E

12.00 ascend
40.00 Set temp. 1/4 Sec. cor.
69.50 Hollow dens. S. E.
80.40 Int. N. Boundary of Tp.
24 lks. E. of cor to Secs.
2 and 3. from which
Q. 0°10' E on true line
bet. Secs. 2 and 3
40.40 Set Sandstone 10 x 10 x 6.
6 in. deep, marked 1/4 on
W side with stone mound
for 1/4 Sec. cor.
80.40 The cor. to Secs. 2. 3.
10 and 11.
Land mostly Mountainous
Soil 2nd rate
No Timber

1.5
10.0
26.5
32.5

Salt Lake Meridian

Augmented on 68.40 chns.

October 7th 1879. E. Buettner Dep. Sur.

October 7th 1879 By A. D. Ferron

Note: The S. W. part of this Tp. being embraced in the Uintah Indian Reservation, therefore from the cor. to Secs 22. 23. 26 and 27 I run West on true line bet Secs. 22 and 27.

Var 16°30' E

1.50 Enter Timber

10.00 Leave same enter Creek Bottom

26.50 Spring Branch 2 lks. wide 3 in. deep. rns. South leads 15 chns. North.

32.50 Jim Crow Creek 10 lks. wide 5 in. deep rns. S. E.

37

Subs. Tp. 3 S. R. 19 E. of the

40.00 Set Sandstone 18 x 10 x 4
12 in. deep, marked 1/4 on
N. side with reg. mound
and pits for 1/4 Sec. cor.

44.00 Enter Cedar ridge

50.00 Top of same bro. N. W. and S E.

65.00 Enter flat leave Timber

80.00 Set Sandstone 10 x 10 x 6; 6 in
deep, marked 2 notches on
Sand 3 on E edges with
reg. mound and pits for
cor. to Secs. 21. 22. 27. and 28

Land level and broken
Ridges

Soil 1st and 2nd rate
Timber Cedar and Pine
on 29.50 chns.

Augmented on 3.00 chns.

20
23.

BOOK A-163

Salt Lake Meridian

Note: The cor. to Secs. 27. 28. 33 and 34 falling in the Uintah Indian Reservation, therefore from the cor. to Secs. 21. 22. 27 and 28 a run

South bet. Secs. 27 and 28

Var 16° 30' E.

20.00 Ascend. Enter Timber

23.29 Intersect N. Boundary of the Uintah Indian Reservation at a point N. 79° W. 28.20 chns. distant from Mile cor. No. 33. where I set a charred cedar post 4" x 4" 4 ft. long 2 ft. deep marked C. C. with reg. mound and pits, for closing cor. to fractional Secs. 27 and 28

Land mostly level

Subs. Tp. 3 S. R. 19 E. of Dr.

Soil 1st rate.

Timber Cedar on 23. 29 chns.

Augmented on 23. 29. chns.

North bet. Secs. 21 and 22

Var 16° 30' E.

12.00 Enter Cedar Ridge

17.00 " Creek Bottom Leave timber

17.50 Spring branch 1 lk. wide

3 in. deep runs East

21.25 Jim Crow Creek. 18 lks

wide 6 in. deep runs S. E.

23.00 Road Crs. N. E.

36.00 Enter Cedar Ridge Crs

N. W. and S. E.

40.00 Set Sandstone 18 x 13 x 4

12 in. deep, marked 1/4 on

W side with stones mound

for 1/4 Sec. cor. from which

Salt Lake Meridian

A Cedar 30 in. diam. brs.
East 8 lks. distant.
A Cedar 10 in. diam. brs.
N. 15° W. 20 lks. distant
Both marked 1/4 S. B. T.

61.00 Enter Creek Bottom. Leave Timber.

76.00 Spring Branch 2 lks. wide 3 in. deep
runs. S. E.

80.00 Set Sandstone 12 x 8 x 6, 8 in.
deep, marked 3 notches on S.
and E, edges, with reg. mound
and pits, for cor. to Secs.
15. 16. 21 and 22.
Land level and broken
Soil 1st rate.
Timber Cedar on 30.00 chns.
Augmented on 30.00 chns. —

East on random line bet.

Subs. Tp. 3 S. R. 19 E. 7th

Secs. 15 and 22.

Var. 16° 30' E.

15.00 Enter Cedar Ridge

33.00 " flat Leaf Timber

40.00 Wash drns. S. E.

Set temp. 1/4 Sec. cor

40.50 Spring branch 2 lks. wide

3 in. deep, rns. S. E.

65.00 Road brs. N. E. and S. W.

72.00 West fork of Deep Creek

15 lks. wide, 15 in. deep rns. S.

80.40 Int. N and S. line at cor. to

Secs. 14, 15, 22 and 23

from which W

West on true line bet

Secs. 15 and 22

40.20 Set Sandstone 18 x 12 x 6, 12

in deep, marked 1/4 on N

side with deg. mound

and pits for 1/4 Sec. cor

80.4

7.

40.

46.

Salt Lake Meridian

80.40 The cor. to Secs. 15. 16. 21 and 22
Land mostly level
Soil 1st and 2nd rate
Timber Cedar on 18.00 chns.
Augmented on 18.00 chns. —

North bet Sec. 15 and 16
Var 16° 30' E.

7.00 Enter Cedar Ridge
40.00 Set Sandstone 12 x 12 x 4
8 in. deep, marked 1/4 on
W side, with Stone mound
for 1/4 Sec. cor, from which
a Pinon Pine 18 in. diam.
brs. N. 65 W. 16 lks. distant
a Cedar 15 in. diam. brs
N. 75° E. 20 lks. distant
Both marked 1/4 S. B. T.
46.00 Top of ridge brs. N. W. and S. E.

Subdivs. Tp. 3 S. R. 19 E. of the

48.00 Hollow drns. S. E.
64.00 Ridge brs. N. W. and S. E.
73.00 Hollow drns. S. E.
79.00 Ridge brs. N. W. and S. E.
80.00 Marked Stationary Sandstone
12 x 10 x 4 ft. above ground
4 notches on S. and 3 on E. edges
with stone mound for cor.
to Secs. 9. 10. 15 and 16
from which
a Cedar 18 in. diam. brs.
S. 65° W. 10 lks. distant
a Pine 15 in. diam. brs. N.
35° W. 10 lks. distant
a Cedar 12 in. diam. brs.
S. 45° E. 30 lks. distant
All marked according
to instructions.
Land Mountainous.
Soil 2nd rate

BOOK-A-163

Salt Lake Meridian

Timber Cedar and Pine
on 73.00 chns.
Augmented on 73.00 chns.

East on random line
bet Secs. 10 and 15
Var 16° 30' E.

Here should be 3.00 enter Timber C.

2.75 Hollow drns. S. E.
3.00
20.00 " " S. E.
40.00 Set temp. 1/4 Sec. cor.
52.60 Hollow drns. S. E.
60.00 Ridge brs. N and S.
71.00 Enter flat
71.80 Trail brs. N and S.
72.00 Spring Branch 2 lks. wide
3 in. deep rns. South
74.00 ascend. Enter Timber
80.56 Int. N. and S. line 20 lks.
North of cor. to Secs. 10. 11. 14
and 16 from which

Subs. Tp. 3 S R. 19 E of the

N. 89°51' W. on true
line bet Secs. 10 and 15

40.28 Set Sandstone 12 x 11 x 5 in
8 in. deep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor. from which
a Pine 10 in. diam. brs.
N. 79° E. 16 lks. distant
a Cedar 24 in. diam. brs.
N. 60° W. 5 lks. distant
Both marked 1/4 S. B. T.

80.56 The cor. to Secs. 9. 10. 15
and 16.

Land mostly broken Ridges
Soil 2nd rate
Timber Cedar and Pine on
77.56. chs.

Augmented on 77.56. chs.

BOOK-A-163

Salt Lake Meridian

North bet. Secs. 9 and 10

Var 16° 30' E

11.00 Hollow drns. S. E.

40.00 On Ridge brs. N. E. and S. W.

Set Quartz rock 14 X 6 X 6, 9 in. deep, marked 1/4 on W side, with stone mound for 1/4 Sec. cor. from which a Cedar 10 in diam. brs. N. 30° E. 15 lks. distant a Cedar 6 in. diam. brs N. 25° W. 22 lks. distant Both marked 1/4 S. B. T.

62.50 Gulch drns. S. W. Leave timber

80.00 Set Quartz 17 X 9 X 5, 10 in. deep marked 3 notches on S and 3 on E. edges. with stone mound for cor. to Secs. 3. 4. 9. and 10

Land broken Mountains

47

Subs. Tp. 3 S. R. 19 E. of the

Soil 2nd and 3rd rate
Timber Cedar and Pine
on 62.50 chns.
Augmented on 80.00 chns.

East on random line
bet. Secs. 3 and 10
Var 16° 30' E

15.50 Head of Ravine, drns. S. W.
Spring brs. N. 2.00 chns. distant
29.25 Deep Gulch drns. South
40.00 Set temp 1/4 Sec. cor.
45.00 Enter Pine Timber
65.~~00~~ 28 Leave Timber Enter flat
65.50 Wash drns. South
75.75 Spring branch 2 lks. wide
3 in. deep rns. South
80.28 Int. N and S. line at cor
to Secs. 2. 3. 10 and 11

O

40.1

80.2

3.5

40.

80

Salt Lake Meridian

from which
West on true line
bet Secs. 3 and 10
40.14 Set Quartz 16 x 10 x 4
11 in. deep, marked 1/4
on N. side, with stone
mound for 1/4 Sec. cor.
80.28 The cor. to Secs. 3. 4. 9 and 10
Land broken and level
Soil 3rd and 1st rate
Timber Pine on 20 chns.
Augmented on 65.28 chns.

North on random line
bet Secs. 3 and 4
Var. 16°30'E
3.5.50 Gulch drns. S. E.
40.00 Set temp 1/4 Sec. cor
80.20 Int. N. Boundary of Tp.

Subs Tp. 3 S R. 19 E. of the

42 lks. W. of cor. to Secs. 3 and 4. From which S. 0° 18' W. on true line bet. Secs. 3 and 4

40.20 Set Quartz 10 x 9 x 6. 6 in. deep marked 1/4 on W side with stone mound for 1/4 Sec. cor.

80.20 The cor. to Secs. 3. 4. 9 and 10. Land broken

Soil 3rd rate and rocky

Timber scattering dry aspen

Augmented on 80.20 chs.

October 7th 1879 By A. D. Terrow Dep Sur.

October 8th 1879 By E. Buettner

From the cor to Secs. 21. 22. 27 and 28

West on true line bet Secs. 21 and 28

Var 16° 30' E

BOOK-A-163

Salt Lake Meridian

5.50 Road brs. N.W. and S.E.
9.00 Enter Timber
25.00 Leave Same
40.00 Set Sandstone Boulder
12 X 10 X 6, 8 in. deep,
marked 1/4 on N side, with
Stone Mound for 1/4 Sec. cor.
52.00 Enter Timber
63.00 Dry Bed drns. S.E.
72.00 Leave Timber
80.00 Set Sandstone 13 X 8 X 8, 9 in
deep, marked 2 notches on
Sand & on E edges, with
reg. mound and pits for
cor. to Secs 20. 21. 28 & 29
Land level
Soil 1st rate
Timber Cedar and Pine on
36.00 chns.
Augmented on 36.00 chns.

Subs. Tp. 3 S. R. 19 E. of the

Note: The cor. to Secs. 28, 29, 32 and 33. falling in Uintah Indian Reservation I therefore run

South bet. Secs. 28 and 29

Var 16° 30' E

2.71 Int. N. Boundary of Uintah Indian Reservation at a point N 83° W 31.24 chs. distant from Mile cor. no 37. where I set a charred Cedar Post 4" x 4" 4 ft long 2 ft. deep marked C. C. with reg. mound and pits for closing cor. to fractional Secs 28 and 29

Land level

Soil 1st rate

No Timber

22.

- Salt Lake Meridian

Note: The cor to Secs. 19. 20
29 and 30 falling in Reservation
therefore from the cor. to
Secs. 20. 21 28 and 29 Gran
West on true line
bet Secs. 20 and 29
Var 16° 30' E.

22. 10 Int. N. Boundary of Reservation
at a point S. 83° E. 26.50
chns. distant from mile cor.
No. 35. where I set charred
Cedar post 4"x4". 4 ft long
2 ft deep marked C. C.
~~[illegible]~~ reg mound and pits
for Closing Cor to fractional
Secs. 20 and 29
Land level
Soil 1st rate
No Timber

Subs. Tp. 3 S. R. 19 E. of the North bet. Secs. 20 and 21

Var 16° 30' E.

4.00 Enter Timber Ridge

13.00 Top. of Spur trs. N. W. & S. E.

18.00 Enter flat. Leave Timber

19.00 Wash drus. S. E.

36.00 Dry Bed drus. S. E.

Enter Timbered Ridge

40.00 Set Sandstone 12 X 12 X 10, 8 in. deep, marked 1/4 on W side with stone mound for 1/4 Sec. cor. from which a Cedar 12 in. diam. bears N. 70° E 20 lks. distant a Cedar 12 in. diam bears N. 20° W. 28 lks. distant Both marked 1/4 S. B. T.

80.00 Set Sandstone 14 X 10 X 6, 9 in. deep, marked 3 notches on Sand 4 on E Edge, with stone mound for cor. to Secs. 2. 40

Salt Lake Meridian

16, 17, 20 and 21. from which
a Cedar 20 in. diam. brs.
N. 45° W 10 lks. distant
a Cedar 30 in. diam. brs.
S. 10° W. 10 lks. distant
a Cedar 12 in. diam. brs.
S. 80° E. 12 lks. distant
All marked according to
instructions
Land mostly broken
Soil 2nd rate
Timber Cedar and pine
on 58.00 chns.
augmented on 58.00 chns.

East on random line
bet. Secs. 16 and 21
Var 16°30' E

2.40 Enter Bottom have Timber

Subs. Tp. 3 S. R. 19 E. of the

8.70 Jim Crow Creek 15 lks. wide 6 in. deep, rus. S. E.

12.00 Enter Cedar Ridge

40.00 Set temp. 1/4 Sec. cor.

63.50 Leave Timber, Enter flat

79.86 Int. N. and S. line 20 lks. N of cor. to Secs. 15. 16. 21 and 22 from which N. 89° 51' W. on true line bet Secs. 16 and 21

39.93 Set sandstone 12 x 10 x 6, 8 in. deep, marked 1/4 on W side with stone mound for 1/4 Secc. cor. from which

A Cedar 25 in. diam. brs. S. 10° W. 20 lks. distant

A Cedar 12 in diam. brs. S. 60° E. 22 lks. distant

Both marked 1/4 S. B. T.

BOOK-A-163

Salt Lake Meridian

79.86 The cor. to Secs. 16, 17, 20 & 21
Land rolling hills and flat.
Soil 1st rate
Timber Cedar and Pine
on 53.90 chns.
Augmented on 53.90 chns.

North between Secs. 16 + 17
Lat. 16° 30 E.

2.20 Enter flat. Leave Timber.
33.40 Jim Crow Creek 10 lks.
wide 8 in. deep runs S. E.
34.00 Enter Timber ridge.
40.00 Set Sandstone 30x10x6,
20 in. deep, marked 1/4 on
W. side with stone
mound for 1/4 Sec. Cor.
No suitable trees for
marking at hand.

Subs. Tp. 3 S. R 19 E. of the

66.00 Ridge bears N.E. & S.W.

75.00 Hollow trees S.W.

80.00 On Ridge, bears N.E. & S.W.,
set Sandstone 14x8x6,
9 in. deep, marked 4
notches on S. & E. edges,
for Cor. to Sec. 8, 9, 16 & 17
from which
A Cedar 20 in. dia. bears
S. 85° E, 10 lks. dist.
A Cedar 24 in dia. bears
S. 60° W, 16 lks. dist.
A Cedar 8 in. dia. bears
N. 16° W., 20 lks. dist.
A Cedar 18 in. dia. bears
N. 55° E, 22 lks. dist.
All marked according to
instruction.
Land mostly rolling
ridges.

16.00
25.00
37.00
40.00
58.00
77.50
80.14

40.07

Salt Lake Meridian

Soil 2nd + 1st rate
Timber Cedar + Pine
on 48.20 Chs.
Augmented on 48.20 Chs.

East on random line
between Secs. 9 + 16
Var. 16° 30' E
16.00 Enter Hollow
24.00 Leave " "
37.00 Ridge bears N. W + S. E.
40.00 Set temp. 1/4 Sec. Cor.
58.00 Hollow trains S.
77.50 Ridge bears N. W. + S. E.
80.14 Intersect N. + S. line 34 Chs.
N. of Cor. to Secs. 9, 10, 15 + 16
from which
N. 89° 45' W. on true line
between Secs. 9 + 16.
40.07 Set Sandstone 10 x 8 x 7.6 in.
deep, marked 1/4 on N.

Subs. Tp. 3 S. R. 19 E. of the

side with stone mound 40.00
for 1/4 Sec. Cor.
from which
A Cedar 8 in. dia. bears
N. 25° E., 16 lks. dist. 80.00
A Cedar 12 in. dia. bears
S. 45° W, 20 lks. dist.
Both marked 1/4 S. B. T.
80.14 The Cor. to Sec. 8, 9, 16 & 16.
Land sedges
Soil 2nd rate
Timber Cedar & Pine
Augmented on 80.14 Chs.

North between Sec. 8 & 9
Var. 16° 30' E.
11.50 Dry Bed in Hollow drains
S. W.
33.00 Leave Timber

BOOK-A-163

Salt Lake Meridian

40.00 Set Sandstone 20X12X5, 15 in. deep, marked 1/4 on W. side, with stone mound for 1/4 Sec. Cor.

80.00 Set Sandstone 20X15X6, 15 in. deep, marked 5 notches on S. and 4 on E. edges with stone mound for Cor. to Secs. 4, 5, 8 & 9

from which

A Cedar 18 in. dia. bears S. 25° W. 16 lks. dist. marked according to instructions. No other trees at land.

Land broken

Soil 2nd rate

Timber Cedar & Pine on 33 Chs.

Augmented on 80 Chs.

Subs. Tp. 3 S. R. 19 E. of the

East on random line between Secs. 4 & 9

12.00 Ravine drains S. A Spring bears N. 7.50 Chs. dist.

19.00 Ridge bears N. & S.

32.00 Ravine drains S. E. Enter Timber.

40.00 Set temp. 1/4 Sec. Cor.

51.50 Ridge bears N. W. & S. E. Leave Timber

67.25 Ravine drains S.

79.92 Intersect N. & S. line, 17 lks. S. of Cor. to Secs. 3, 4, 9 & 10 from which S. 89° 52' W. between Secs. 4 & 9

39.96 Set Sandstone 20 x 8 x 6, 18 in. deep, marked 1/4 on N. side with stone mound for 1/4 Secs Cor. from which a Pine 20 in. dia. bears N. 65° E., 41 lks. dist.

79.92

37.00
40.00
76.00
80.16

40.16

BOOK-A-163

Salt Lake Meridian

a Pine 24 in. dia: bears S. 70°
E. 39 lks. dist.
Both marked 1/4 S. B.?
79.92 The Cor. to Sec.s 4, 5, 8 & 9.
Land Broken
Soil 2nd rate
Timber Pine on 88.50 Chs.
Augmented on 79.92 Chs.

North on random line
between Sec.s 4 & 5.
37.00 Enter Plateau and timber
40.00 Set temp. 1/4 Sec. Cor.
26.00 Leave ex pent.
80.16 Intersect N. Boundary of
Tp. 20 Chs. W of Cor. to Sec.s
4 & 5. From which
S. 0°.09' W. on true line
between Sec.s 4 & 5.
40.16 Set Sandstone 10x10x7, 6 in.
deep marked 1/4 on

63

Subs. Tp. 3 S. R. 19 E. of the

	W. side with stone mound	31.00
	for 1/4 Sec. Cor.	35.00
	from which	40.00
	An Aspen 12 in. dia. bears	
	N. 10° E, 32 lks. dist.	
	An Aspen 15 in. dia. bears	
	N. 80° W., 20 lks. dist.	60.00
	Both marked 1/4 S. B. T.	69.50
80.16	The Cor. to Secs. 4, 5, 8 & 9	80.00
	Land Mountainous	
	Soil 2nd rate	
	Timber Aspen on 39 Chs.	
	Augmented on 80.16 Chs.	
	October 8th 1879 By E. Buettner Dep Sur	
	October 8th 1879 By A. D. Ferron	
	From the cor. to Secs. 16 & 17	
	20 & 21	
	West on true line bet.	
	Secs. 17 and 20	
	Var 16° 30' E.	

Salt Lake Meridian

31.00 Enter flat Leave Cedars.
35.00 Dry Bed runs S. E.
40.00 Set Quartz 20 x 10 x 8, 15 in. deep, marked 1/4 on N. side with stone mound for 1/4 Sec. cor
60.00 Wash runs S. W.
69.50 Enter Cedar Ridge
80.00 Set Sandstone 14 x 10 x 9, 9 in. deep marked, 3 notches on S and 5 on E edges, with stone mound for cor to Secs. 17, 18, 19 and 20 from which
A Cedar 6 in. diam. brs. S. 70° W 29 lks. distant
A Cedar 20 in. diam brs. N. 89° E. 39 lks. distant
A Cedar 12 in diam. brs. N. 55° W. 21 lks distant

6

Subs. Tp. 3 S. R. 19 E. of the

all marked according
to instructions
Land broken and level
Soil 2nd and 1st rate
Timber Cedar and Pine
on 41.50 chns.
Augmented on 41.50 chns. 50.00
62.00
68.90

Note: The cor to Secs. 19
20. 29 and 30 falling in
Reservation therefore
from the cor to Secs.
17. 18. 19 and 20 I run
South bet. Secs. 19 and 20
Var 16° 30' E

2.00 Ridge brs E. and W
18.00 Gulch trns. S. E.
29.00 Ridge brs. N. W. and S. E.
40.00 On S. side of hollow trns. E

Salt Lake Meridian

Set Sandstone 12 x 8 x 7, 8 in. deep, marked 1/4 on W. side, with stone mound for 1/4 Sec. cor. no trees suitable for marking at hand

50.00 Ridge Brs. N. W. and S. E.

62.00 Enter flat. Leave Timber

68.90 Int. N. Boundary of Reservation at a point N. 76° W. 32.50 chns. distant from the 35th mile cor. where I set a Charred Cedar post 4" x 4" 4 ft. long 2 ft. deep, marked C. C. with reg. mound and pits for closing cor to fractional Secs. 19 and 20

67

Subs. Tp. 3 S R. 19 E. of the

Land mostly broken
Soil 2nd rate
Timber Pine and Cedar
on 62.00 chns.
augmented on 62.00 chns.

West on random line
between Sec. 18 & 19
Var. 16° 30' E.

10.00 S. Point of Cove Flat
bears N. W. & N. E.
22.50 Ridge bears N. W. & S. E.
31.50 Gulch drains S. E.
40.00 Set temp. 1/4 Sec Cor.
50.00 Ridge bears N. & S.
78.42 Intersect N. Boundary
of Tp. 23 Chs. S. of Cor. to
Sec. 18 & 19 from which
S. 89° 50' E. on true line

38.52

78.52

BOOK-A-163

Salt Lake Meridian

Between Secs. 18 & 19

38.52 Set Sandstone 16x6x6, 10 in. deep, marked 1/4 on N. side with mound of stone for 1/4 Sec. Cor. From which

A Cedar 6 in. dia. bears S. 5° E., 12 lks. dist.

A Cedar 12 in. dia. bears N. 68° W., 28 lks. dist.

Both marked 1/4 S. B. T.

78.52 The Cor. to Secs. 17, 18, 19 & 20.

Land Broken

Soil 2nd rate

Timber Cedar & Pine.

Augmented on 78.52 Chs.

North between Secs. 17 & 18

Subs. Tp. 3 S. R. 19 E. of the

Var. 16° 30' E.

10.00	Enter Flat. Leave Timber	
13.50	Wash drains S. E.	
26.25	" " "	26.50
40.00	Set Sandstone 14 x 8 x 7, 9 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.	20.00 40.00 47.00
67.50	Spring Branch 5 lks. wide 6 in. deep, runs S. E.	57.00 79.90
80.00	Set Quartz 22 x 12 x 8, 16 in. deep, marked 4 notches on S. and 5 on E. edges with stone mound for Cor. to Sec. 7, 8, 17 & 18.	89.95

Land mostly level

Soil 1st rate

Timber Cedar & Pine on S. 10 Chs.

Augmented on 10 Chs.

BOOK-A-163

East on sandown line
between Secs. 8 + 17
Var. 16° 30' E.

16.50 Enter Cedar hills
20.00 Ridge bears N. W. + S. E.
40.00 Set temp. 1/4 Sec. Cor.
47.00 Spring Branch 6 lks. wide
8 in. deep, in Cañon, runs S.
57.00 Gulch drains S. W.
79.90 Intersect N. + S. line 42 lks.
S. of Cor. to Secs. 8, 9, 16 + 17
From which
S. 89° 42' W. on true line
between Secs. 8 + 17.
89.95 Set Sandstone 10 x 10 x 7, 6 in.
deep, marked 1/4 on N. side
with stone mound for
1/4 Sec. Cor. From which
a Cedar 8 in dia. bears N.
10° E, 13 lks. dist.
a Cedar 10 in. dia. bears

71

Subs. Tp. 3 S. R. 19. E. of the

N. 10° W., 22 Chs. dist.

Both marked 1/4 S. B. T.

79.90 The Cor. to Secs. 7, 8, 17 + 18.

Land most by mountains

Soil 2nd rate

Timber Cedar on 63.40 Chs.

Augmented on 63.40 Chs.

West on random line

between Secs. 7 + 18

Var. 16° 30' E.

0.00 Mosebys ranch Cabin

bears N. 54¾° W. 30 Chs. dist.

10.00 Wash drains S.

13.00 Spring Branch 5 Chs. wide

6 in deep, runs S. E.

21.50 Leave Valley. Ascend

40.00 Set temp. 1/4 Sec. Cor.

78.84 Intersect W. Boundary

BO

38.92.

78.84

57.3

5.00

18.00

31.00

Salt Lake Meridian

of Tp. 43 Chs. S. of Cor. to Sec.
7 + 18 From which
S. 89° 42' E. on true Line
between Sec. 7 + 18
38.92 Marked Stationary Quartz
26 X 18 X 10 in. above ground
1/4 on N. side with stone
mound for 1/4 Sec. Cor.
78.84 The Cor. to Sec. 7, 8, 17 + 18
Land mod by Broken
Soil 2nd rate
No Timber
57.34 Augmented on 57.34 Chs.

North between Sec. 7 + 8
Var. 16° 30' E.
5.00 Enter Timber Hills bear
N. W. + S. E.
18.00 Ridge bears N. W. + S. E.
31.00 Head of Hollow drains S. E.

73

Subs. Tp. 3 S. R. 19 E. of the

40.00 . Marked stationary flat
Sandstone ledge extending
in a radius of 50 ft., 1/4
facing W. and erected
a stone mound for 1/4 Sec.
Cor. From which
A Pine 25 in. dia. bears S.
50° E., 39 lks dist.
A Pine 5 in. dia. bears S.
20° W. 27 lks dist. 17.00
Both marked 1/4 S. B.T. 23.00
50.00 Ridge bears E & W. Lane Timber 31.75
67.00 Hollow drains S. E.
80.00 Set Quartz 19 x 12 x 6 in. 12 in.
deep, marked 5 notches on 40.00
S. & E. edges with stone mound 58.00
for Cor. to Secs. 5, 6, 7 & 8. 80.25
From which
A red Quartz pyramid 10 ft.
high bears S. 60° E. 62 lks.
dist.

BOOK-A-163

Salt Lake Meridian

Land mostly Mountainous
Soil 2nd rate
Timber Cedar & Pine on 45 Chs.
Augmented on 75 Chs.

East on sandstone line between
Sec. 5 & 8
Var. 16° 30' E.

17.00 Ridge bears N. & S.
23.00 Hollow drains S.
31.75 Spring Branch 5 lks. wide
6 in. deep in rocky Cañon
runs S.
40.00 Sol temp. 1/4 Sec. Cor.
58.00 Ravine drains S.
80.25 Intersect N. & S. line 30 lks.
S. of Cor to Sec. 4, 5, 8 & 9
From which
S. 89° 47' W. on true line
between Sec. 5 & 8

75

Subs. Tp. 3 S. R. 19 E. of the

40.12	Set Sandstone 18 x 12 x 3,	
	12 in. deep. marked 1/4 on N.	16.00
	side with stone mound	34.50
	for 1/4 Sec. Cor.	
	From which	
	A Pine 20 in. dia. bears N. 40°	40.00
	E, 30 lks. dist.	72.50
	A Pine 18 in. dia. bears S.	78.30
	20° E, 32 lks. dist.	
	Both marked 1/4 S. B. T.	
80.25	The Cor. to Secs. 5, 6, 7 & 8.	
	Land very broken &	
	rocky	38.30
	Soil 2nd & 3rd rate	
	Timber scatt. Pine.	
	Augmented on 80.25 Chs.	
		78.30

West on random line
between Secs. 6 & 7

BOOK-A-163

Salt Lake Meridian

Var. 16° 30' E.

16.00 Hollow drains S. W.

34.50 Spring Branch 5 lks. wide 6 in. deep, runs S. Enter Flat.

40.00 Set temp. 1/4 Sec. Cor.

72.50 Wash drains S. Ascend.

78.30 Intersect W. Boundary of Tp. at Cor. to Sec. 6 & 7 From which

East on true line between Sec. 6 & 7

88.30 Marked Stationary Limestone 20 x 10 x 8 in. above ground, 1/4 on N. side, and erected a stone mound for 1/4 Sec. Cor.

78.30 The Cor. to Sec. 5. 6. 7 & 8

Land level & broken

Soil 1st & 2nd rate

Timber none

77

Subs Tp. 3 S. R. 19 E. of the

Augmented on 40.30 Chs.

North on random line between Secs. 5 & 6.

Var. 16° 30' E.

15.00	Hollow drains W.
29.50	" " "
31.00	" " S. W.
40.00	Set temp. 1/4 Sec. Cor.
47.50	Hollow drains W.
53.60	" " "
63.75	" " "
71.75	Gulch " "
80.60	Intersect N. Boundary of Tp. 39 Chs. W. of Cor. to Secs. 5 & 6 From which S. 0° 17' W. on true line between Secs. 5 & 6
40.60	Set Quartz 17 x 11 x 5 in. 11 in.

BOOK-A-163

Salt Lake Meridian

deep, marked 1/4 on W.
side with stone mound
for 1/4 Sec. Cor.

80.60 The Cor. to Secs. 5, 6, 7 & 8
Land very Broken
Soil 2nd rate
No Timber
Augmented on 80.60 Chs.

October 8th 1879

Subs. Tp. 3 S R 10 E of the

General Discription

This Towns hip embraces a fine Basin formed by the Head waters of Deep Creek, a beautiful Mountain Stream which empties into the Uintah River. We have named this Basin Base Valley, having been first settled upon by Mr. Geo. Base in Sec. 11. Another settlement has since been made in Sec. 17. This Basin is the best watered and timbered little Valley to be found in Utah Ter.

The flats and ajacent timbered slopes

BOOK-A-163

can readily be irrigated by means of innumerable Spring branches.
There is a fine mill site situated in the N. E. 1/4 of Sec. 14.

A. D. Ferron
U. S. Dep. Surveyor

BOOK-A-163

8

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 24 1880

The foregoing field notes of the survey of the

Subdivision lines of

Township No 3 S. *Range No* 19 E.

of the Salt Lake Meridian, Utah Territory,

Executed by Perron & Buettner

Under their joint *contract No* 92

of the 13th *day of* June 1879

in the month of Oct. 1879.

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-163 Ex B 163 pied 82
R: 1880

Filed Feb. 17th 1879.

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Exterior Lines

of Township No. 3 South, Range No. 19 East

of the Salt Lake Meridian in Utah Territory.

BY

Ferron and Buettner

U. S. DEPUTY SURVEYOR, S

Under ~~his~~ their joint Contract No. 92

dated June 13th 1879.

Survey commenced October 6th 1879.

Survey completed October 6th 1879.

BOOK-A-163-

North Boundary Tp. 3 S. R. 19 East

Survey commenced Oct. 6th 1879
by A. D. Ferron
Note: The S. W. cor. of this
Tp. falls in the Uintah
Indian Reservation which
precludes the N. W. cor. from
being established in the regular
way. Therefore from the
cor. to Tps 2 and 3 South
R. 19 and 20 E Iron
West on true line, bet
Secs. 1 and 36
Var 16°30' E.

16.00 Ridge brs. N. W. and S. E.
40.00 Marked Stationary Sandstone
28 X 25 X 18 in. above ground
1/4 on N. side, with Stone
mound for 1/4 Sec. cor.
75.00 Hollow drns. South
80.00 Set Sandstone 16X10X9, 10 in

deep, marked 1 notch on E and
5 old Wedges with stone
mound for cor. to Secs. 1.
2. 35. and 36
Land Mountainous
Soil 2nd rate
No Timber
Augmented on 80.00 chns. —

West on true line
bet Secs. 2 and 35
Var 16°30' E. 40.00
15.00 Head of Hollow drns. S.W.
35.00 " " " " S
40.00 Set Sandstone 22 x 10 x 5, 14 in
deep, marked 1/4 on N side 45.00
with stone Mound for 1/4 Sec 53.75
66.50 Hollow drns. South
73.50 Spur Ridge bns. N and S.E. 3.50
80.00 Set Sand stone 18 x 10 x 4, 12 in 75.00
deep marked 2 notches on E

and 4 on W. edges, with
stone mound for cor. to Secs.
2. 3. 34 and 35
Land Mountainous
Soil 1st rate
No Timber
Augmented on 80.00 chns. —

West on true line bet
Secs. 3 and 34
Var 16° 30' E.

40.00 Set Sandstone 16 x 6 x 6, 11 in.
deep, marked 1/4 on N. side
with stone mound for 1/4 Sec
cor.

45.00 Hollow drus. S. W.

53.75 " " South

63.50 " " S. E.

75.00 Foot of steep slope. 2 large
springs bear South 2.50 chns dist

80.00 Set Quartz 18 x 15 x 12; 12 in. deep, marked 3 notches on E and W. edges with stone mound for cor. to Secs. 3. 4. 33 and 34
Land Mountainous.
Soil very poor
No Timber
Augmented on 80.00 chns. —

West on true line
bet Secs. 4 and 33
Var. 16°30' E.

28.50 Hollow drns. S. E.
40.00 Set Quartz 22 x 10 x 9, 16 in deep marked 1/4 on N. side with stone mound for 1/4 Sec. cor.
45.00 Enter Aspen Platau
66.00 Leave Aspen
80.00 Set Quartz - 36 x 14 x 3, 20 in

deep, marked with 4 notches
on E and 2 on W edges, with
stone mound for cor. to Secs.
4, 5, 32 and 33.
Land Mountainous.
Soil poor rate
Timber Aspen on 11.00 chns. —
Augmented on 80.00 chns. —

West on true line bet
Secs. 5 and 32.
Var 16° 30' E.

17.50 Descend
38.20 Small Hollow dirs. South
40.00 Set Quartz 26 x 15 x 5,
18 in. deep, marked 1/4 on
N side with stone mound
for 1/4 Sec. cor.
50.00 Set Quartz 25 x 16 x 10
18 in. deep, marked 5

notches on E and 1 on W.
Edges, with Stone Mound
for. cor. to Secs. 5. 6. 31 & 32.
Land Mountainous
Soil 1st rate
No Timber
Augmented on 80.00 chns.—

West on true line bet
Secs. 6 and 31
Var. 16°30' E

7.50 Canon drns. South a spring
head, brs. South 10.00 chns. distant
30.00 Hollow drns. S.E.
40.00 Set Sandstone 11x10x6, 6 in. deep
marked 1/4 on N side, with
Stone mound for 1/4 Sec. cor.
45.50 Ridge brs. N. W. and S.E.
60.00 Hollow drns. S.E.
78.20 Allowing for convergency of

BOOK-A-163

Meridian set standard
1 X 9 X 5, 6 in. deep, marked
6 notches on N. S. E. and
W. edges for cor. to
Secs. 2 and 3 S. R. 18 and
19 E.

Land Mountainous
Soil 1st rate
No Timber

Augmented on 7 8. 20. chns.—

90

West Boundary Tp. 3 S. R. 19 East

From the cor. to Tps. 2 and 3
S. R. 18 and 19 East
South bet Secs. 1 and 6
Var 16°30' E.

40.00 Set Sandstone 12 x 10 x 9. 8 in.
deep, marked 1/4 on W. side,
with stone mound for 1/4 Sec. cor

65.00 Broad Hollow drus. S. E.

80.00 Set Quartz 17 x 12 x 7. 11 in deep
marked T notch on N. and 5 on
S. edges, with stone mound
for cor. to Secs. 1. 6. 7 and 12
Land Mountainous
Soil 1st rate
No Timber
Augmented on 80.00 chns. —

South bet. Secs. 7 and 12
Var 16°30' E.

6.00 Rock Gulch drus. S. E.

25.00 Enter flat
30.30 Wash drns. S.E.
40.00 Set Quartz 26x14x6, 18 in. deep, marked 1/4 on W side with stone mound for 1/4 Sec. cor.
40.30 Wash drns. East.
65.00 Leave flat. ascend
70.00 Set Quartz 18x10x8, 12 in deep marked 2 notches on N and 4 on S. Edges with stone mound for cor. to Secs. 7, 12, 13 and 18
Land level and Mountainous
Soil 1st rate
No Timber
Augmented on 40.00 chns. —

South bet. Secs. 13 and 18
Var 16° 30' E

0.50 Ridge bns. N. W. and S.E.

30.00 Head of hollow drus. W.
40.00 Set Quartz 16 x 12 x 5, 11 in.
deep marked 1/4 on W. side
with stone mound for 1/4 Sec. cor.
60.00 Enter Cedars.
80.00 Enter Sandstone 23 x 6 x 6,
16 in. deep, marked 3 notches
on N and S. edges, with stone
mound for cor. to Secs. 13, 18
19 and 24 from which
A Cedar 8 in. diam. bro.
N. 20° W. 36 lks. distant
A Cedar 6 in. diam. bro.
N. 10° E. 24 lks. distant
A Cedar 4 in diam. bro
S. 50° E. 41 lks. distant
All marked according
to instructions.
Land Mountainous.
Soil 2nd rate.

Timber Cedar and Pine
on 20.00 chns.
Augmented on 80.00 chns.

South bet Secs. 19 and 24
Var 16° 30' E.

32.50 Enter flat. Leave timber
38.00 Wash drns. S. E.
40.00 Set Quartz 15"X11X9, 10 in.
deep marked 1/4 on W side
with stones around for 1/4
Sec. cor.
49.00 Intersect N. Boundary of
Uintah Indian Reservation
at a point N. 76° W. 33.50 chns.
distant from 36 ch. mile
cor. where I set a
charred Cedar post 4"X4"
4 ft. long 2 ft. deep, marked

94

C.C. with reg. mound
and pits for Closing cor.
to fractional Secs. 19 and 24
Land mostly mountainous
Soil 1st rate
Timber Pine and Cedar
on 32.50 chns.—
Augmented on 32.50 chns—
October 6th 1879 . 31.00
A. D. Ferron 40.00
U. S. Dep. Sur.

BO
South

59.20

BOOK-A-163

South Boundary Tp. 3 S. R. 19 East

Survey commenced Oct. 6th 79
By E. Buettner
From the cor. to Tps. 3 and
4 S. R. 19 and 20 East
Thence
West on true line bet
Secs. 1 and 36
Var 16° 30' E.

31.00 Hollow drms North
4.00 Set Collier stone 13 x 10 x 6,
9 in. dep, marked 14 on
N. side, mit. stone mound
for 1/4 Sec. cor. from which
a Cedar 8 in. diam. bra
South 15 lks. distant
a Cedar 8 in. diam. bra.
N 45° E. 30 lks. distant
Both marked 1/4 S. C. T.
39.20 Wash drms. S. W. Enter
flat.

80.00 Set sandstone 13 x 10 x 7, 10 in. deep, marked 1 notch on E and 5 on W. edges with stone mound for. cor to Secs. 1. 2. 35 and 36. from which
A Cedar 12 in. diam. brs. N 5° E. 4 lks. distant
A Cedar 12 in. diam. brs. S. 60° W. 30 lks. distant
A Cedar 8 in. diam. brs. S. 20° E. 18 lks. distant
All marked according to instructions.
Land mostly mountainous
Soil 2nd rate
Timber Cedar and Pine
Augmented on 80.00 chns.—

17.00
40.00
50.15
80.00

Westerline line bet.
Secs. 2 and 35.
Var 16° 30' E.

17.00 Hollow drwy. S. W.

40.00 Set Sandstone 13 x 8 x 7
9 in. deep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor. from
which
A Cedar 20 in. diam. bears
N. 25° W. 12 lks. distant
A Cedar 18 in. diam. bears
S. 35° E. 21 lks. distant
Both marked 1/4 S. 13. T.

50.15 Gulch drwy. S. W.

80.00 On Ridge bears N. E and S. W.
Set Sandstone 20 x 12 x 8
15 in. deep, marked
2 notches on E and 1 on W.
Edge with stone mound

8 Cor. cor. to Secs. 2. 3. 34 and 35
From which
A Cedar 8 in. diam. brs.
N. 70° W. 14 lks. distant 29.00
A Cedar 15 in. diam. brs. 40.00
N. 65° E. 10 lks. distant
A Cedar 20 in. diam. brs.
S. 60° E. 30 lks. distant
all marked according
to instructions.
Land Mountainous,
Soil 2nd rate
Timber Cedar and Pine
Aggregated on 80.00 chns. —

24.00
3.12

West on true line
bet. Secs. 3 and 34
Var. 16° 30' E.

29.00 Hollow drus. S. W.

40.00 Set Sandstone 20 x 16 x 12
15 in. deep, marked 1/4
on N. side, with stone
mound for 1/4 Sec. cor
from which
a Cedar 10 in. diam. brs
N. 75° W. 25 lks. distant
a Cedar 11 in. diam. brs
South 15° E. 22 lks. distant
Both marked 1/4 S. B. T.

44.00 Ridge brs. N and S.

53.12 Intersect East Boundary
of Uintah Indian
Reservation at a point
N. 10° W. 11.67 chns.
distant from Mile cor.

No. 31. where I set a
charred Cedar Post
4"x4" 4 ft. long 2 ft. deep
marked C. C. with
reg. mound and pits
for closing cor. to
fractional Secs. 33 and
34.

Land Mountainous
Soil 2nd rate
Timber Pine and Cedar
augmented on 53.12 chns.
October 6th 1879

Note: For General Descrip
tion and of Subdivisions of
this Tp.

E. Luellner
U.S. Dep. Surveyor

BOOK-A-163

100

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the

North, South & West Boundaries of

Township No 3 S. *Range No* 19 E,

of the Salt Lake Meridian, Utah Territory,

Executed by Ferron & Buettner

Under joint *contract No* 92

of the 13th *day of* June 1879

in the month of Oct 1879.

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-163
R: 1880

163 (Copied)

Filed May 18th 1880

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

Boundary Lines

of Township No. 3 South, Range No. 20 E

of the Salt Lake Meridian in Utah Territory.

BY

Farrow & Buettner

U. S. DEPUTY SURVEYORS

Under ~~his~~ this joint Contract No. 92

dated June 13th 1879.

Survey commenced October 2nd 1879.

Survey completed October 4th 1879

BOOK-A-163

182

FOR CHAINMAN.

We Daniel W. Beard Thomas Cornwell & Joseph F. Remington

do solemnly swear that we will faithfully execute the duties of chain carriers; that we will level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we asssist in measuring, to the best of our skill and ability, Daniel W. Beard

Thomas Cornwell

Joseph F. Remington

Subscribed and sworn to before me

this 2nd day of October 1879

A. D. Fenn

dep. surveyor

Blank

Page

OK-A-163

FOR FLAGMAN.

I, Rodney B. Remington

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

Rodney B Remington

Subscribed and sworn to before me

this 2nd *day of* October *1879*

A. D. Finn

U.S. dep. Surveyor

Blank

Page

K-A-163

FOR AXEMAN

186

I, Richard Waldschmidt

do solemnly swear that I will well and truly perform the duties of axeman, according to instructions given me, and to the best of my skill and ability.

Richard Waldschmidt

Subscribed and sworn to before me

this 2nd day of October 1879

A. D. Finn

U.S. dep. Surveyor

Blank

Page

OK-A-163

FOR CHAINMAN.

We Charles C. R. Bingham

and William H. Bradshaw

do solemnly swear that we will faithfully execute the duties of chain carriers; that we uill level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we asssist in measuring, to the best of our skill and ability,

Charles C. R. Bingham

William H. Bradshaw

Subscribed and sworn to before me

this 1st day of October 1879

A. D. Fenton

U.S. dep. Surveyor

Blank

Page

OOK-A-163

FOR FLAGMAN.

I, Alfred H. Westover

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

Alfred H. Westover

Subscribed and sworn to before me this 2nd day of October 1879

A. D. Ferron

U. S. Dep. Surveyor

Blank

Page

UK-A-163

FOR AXEMAN

112

I, Thomas Bingham Jr

do solemnly swear that I will well and truly perform the duties of axeman, according to instructions given me, and to the best of my skill and ability.

Thomas Bingham Jr

Subscribed and sworn to before me this 2nd day of October 1879

A. D. Fenn

U.S. dep. Surveyor

Blank

Page

BOOK-A-163

ith Boundary Tp. 3 S. R. 20 E.

October 2nd 1879. Survey commenced by E. Buttner,
from the established cor. to Tps 3 & 4 S. R 20 & 21 E. B
West on true line bet Secs. 1 & 36

Var. 16° 30' E.

.00 Set charred Cedar post 4"x4", 4 ft. long, 2 ft. deep, marked 1/4 S. on N. side, with reg. mound of earth & pits for 1/4 Sec. cor

.00 Hollow drive S.

.00 Set Sandstone 11x10x7 6 in deep marked 1 north on E & S on W. edges with reg. mound of earth and pits for Cor. to Secs. 1. 2. 35 & 36

Land Broken

Soil 2nd rate

115

South Boundary Tp 3 S. R. 20 E.

Timber scattering Cedar.
Augmented on 80 chns.

West on true line bet S
2 & 35

Var 16° 30' E.

19.75 Gulch drns. S. W.

40.00 Set Sandstone 12 x 9 x 7
8 in deep, marked 1/4 on
N. side, with stone mound
for 1/4 Sec. cor.

64.00 Ridge bro N. E. & S. W.

80.00 Set charred Cedar post
4" x 4", 4 ft. long 2 ft. deep
marked 2 notches on E. and
4 on W. edges with reg.
mound of earth and pits
for cor. to Secs. 2. 3. 34 & 35
Land Broken

BOOK-

East Boun

40.00

East Boundary Tp. 3 S. R. 20 E.

Soil 2nd rate
Timber scattering Cedar
Augmented on 80 chns.

Note: On account of unavailable ground, I abandon further survey West.

East Boundary Tp. 3 S.
Range 20 East.
From the cor. to Tp's. 3 & 4
S. R 20. & 21. E.
North bet. secs. 31 & 36.
Var 16° 30' E.

48.00 At head of Hollow drus N. W.
set Cobble stone 18 x 12 x 6.
12 in. deep, marked 14 on W.
side with stone mound

East Boundary Tp. 3 South R. 20 E.

for 1/4 Sec. cor.

47.00 Enter flat hollow

63.00 Leave same

80.00 Set charred cedar post 4"x4"
4 ft. long 2 ft. deep, mark
1 notch on S and 5 on N. edge
with sq. mound of earth
& pile, for cor. to Secs.
25. 30. 31 & 36

Land Broken

Soil 1st & 2nd rate

Timber Cedar.

Augmented on 80 chns.

North bet Secs. 25 & 30

Var 16° 30' E

7.50 Ridge bg N. W. & S. E.

16.00 Top of Sandstone Ledge 250 ft.
high.

BOOK-A-163

of the Salt Lake Meridian

3.00 Enter Cañon flat

.00 Road brs N. W. & S.E.

.00 Set Sandstone 11 X 8 X 8, 6 in deep, marked 1/4 on W. side with stone mound for 1/4 Sec. cor.

42.00 Dry Bed of Creek drns. S.E.

60.00 Leave Bottom

80.00 In rock Cañon drns S.E. set Sand stone 11 X 7 X 7, 6 in deep marked 2 notches on S. and 4 on N. Edges, with stone mound for cor to Secs. 19. 24. 25. & 30.

Land mostly broken

Soil 2nd rate

Timber scattering Cedar heavey undergrowth in Bottom

Augmented on 80. chns.

East Boundary Tp. 3 South R 20 E

North bet Secs. 19 & 24

Var 16° 30' E

40.00 Set charred Cedar post 4" x 4", 4 ft. long 2 ft. de[illegible] marked 1/4 S. on W. side with reg. mound of earth and pits for 1/4 Sec. cor.

45.00 Enter deep rocky Canon drus S.E.

53.00 Leave same

80.00 On S. side of Canon drus S. Set charred Cedar post 4" x 4 4 ft. long 2 ft. deep, mark[illegible] 3 notches on N and S. Edges, with reg. mound of earth and pits for. cor. to Secs. 13. 18. 19 & 24

Land Broken

Soil 3rd rate

Timber scattering Ce[illegible]

BOOK-A-

of the

Nor

.00 Lea

3.00 De

3.00 Ea

0.00 Se

6 i

W.

for

9.00 As

12

72.00 Lo

77.00 L

0.00 On

Se

dee

N

BOOK-A-163

of the Salt Lake Meridian

Augmented on 80 chns

North bet Secs. 13 & 18
Var 16° 30' E

.00 Leave Cañon
3.00 Descend
3.00 Enter Ashley Creek flat
0.00 Set Sandstone 10 x 8 x 7
6 in deep, marked 1/4 on
W. side, with Stone mound
for 1/4 Sec. cor.
9.00 Ashley Creek 40 lks wide
12 in. deep, rns. S. E.
72.00 Low hill
77.00 Lease Same
0.00 On E. side of Beaver pond
Set Sandstone 14 x 10 x 6, 9 in.
deep, marked 2 notches on
N and 4 on S. edges, with

East Boundary Tp. 3 S. R. 20 East

Stone Mound for cor. 6
Secs. 7, 12, 13 & 18.
Land S. 1/2 Broken.?
N. 1/2 level
Soil 1st & 2nd rate
No Timber
Heavy undergrowth in Bottom
Augmented on 80 chns.

North Set Secs. 7 & 12
Var 16° 30' E

7.00 Leave undergrowth
18.00 Bitterwater Lying Branch
2 lks. wide 4 in. deep runs S.W.
37.00 Leave flat
40.00 Set Gray sandstone 12 X 8 X 6
8 in deep, marked 7 & 12 on W.
side with stone mound
for 1/4 Sec. cor.
71.00 Enter flat

BOOK-A-163

of the Salt Lake Meridian

0.00 Set Sandstone 13 x 9 x 7
8 in. deep, marked 1 notch
on N. and 5 on S. Edges
with Stone mound, for
cor. to Secs. 1. 6. 7 & 12.
Land level & broken
Soil 1st & 2nd rate
No Timber.
Augmented on 50. chns.

North bet Secs. 1 & 6
Var 16° 30' E.

40.00 Set sandstone 11 x 8 x 7
6 in. deep, marked 1/4
on W side, with stone
mound, for 1/4 Sec. cor.

50.00 Set Sandstone 15 x 9 x 6,
10 in. deep marked 6
notches on N. S. E. &
W. edges, with stone

North Boundary Tp. 3 S. R 20 E

mound for cor. to Tps.
2 & 3 S. R. 20 & 21. E.
Land heigh Plateau
Soil 2nd rate
Timber Scattering Pin
augmented on 80 chns.

North Boundary Tp. 3 S.
Range 20. E.
Note. — The N. W. cor. of
this Tp. not being establis
I therefore run this Boundary
West on true line.
From the cor. to Tps. 2 & 3
South R. 20 & 21 E.
West on true line bet.
Secs. 1 & 36.
Var 16° 30' E.

13.00 Descend

BOOK-A-
of the
36.00 Eat
0.00 Set
6 in
N.
for
8.00 As
15 m
3.00 As
2.00 Eu
0.00 S
8
on
wi
co
La
H
Bo
a

of the Salt Lake Meridian

36.00 Enter ashley flat

40.00 Set Sandstone 10 x 8 x 8.
6 in. deep, marked 1/4 on
N. side, with stone mound
for 1/4 Sec. cor.

48.00 Ashley breck 50 lks. wide
15 in. deep rns. S.

53.00 Ascend

72.00 Enter Plateau

80.00 Set Sandstone 12 x 8 x 6,
8 in. deep, marked 1 notch
on E and 5 on W. edges
with stone mound for
cor. to Secs. 1. 2. 35 & 36.
Land mostly broken
Soil 2nd rate
Timber scattering Pine
Heavy undergrowth in
Bottom
Augmented on 80 chns.

North Boundary Tp. 3 S. R 20 E

West on true line bet
Secs. 2 & 35
Var 16° 30' E.

40.00 Set Sandstone 16 x 9 x 4, 11 in
deep marked 1/4 on N side
with stone mound for 1/4
Sec. cor.

57.00 Descend

76.50 Hollow drus S.E.

80.00 Set Sandstone 14 x 10 x 8, 9 in
deep, marked 2 notches on E
and 4 on W. edges, with
Stone mound for cor to Secs.
2. 3. 34 & 35

Land Mountainous
Soil 2nd rate
Timber scattering Cedar
augmented on 80 chns.

of the Salt Lake Meridian

West on true line bet
Secs. 3 & 34
Var 16° 30' E

Ascend
23.50 Ridge brs. N. W. & S. E.
40.00 Set Sandstone 12 X 10 X 6,
8 in. deep, marked 1/4 on
N. side with stone mound
for 1/4 Sec. cor
61.00 Hollow drns South
80.00 Set Red Sandstone 20 X 12 X 6.
15 in. deep, marked 3 notches
on E & W. edges, with
stone mound for Cor. to
Secs. 3. 4. 33 & 34
Land Mountainous,
Soil 2nd rate
No Timber
Meg marked on 80 chns.

North Boundary Tp. 38 R 2

West on true line, bet. Secs. 4 & 33

Var 16° 30' E.

40.00 Set Quartzite 24 x 18 x 10, 18 in. deep marked 1/4 on N. side, with Stone mound for 1/4 Sec. cor.

50.90 Timber road bro. N.E. & S.W.

69.50 Hollow drus. S.W.

80.00 Set Sandstone 36 x 24 x 6, 20 in. deep, marked 4 notches on E. and 2 on W edges, with Stone Mound for. cor to Secs. 4. 5. 32. & 33

Land Broken

Soil 1st & 3rd rate

No Timber

Augmented on 80 chns.

of the Salt Lake Meridian

West on true line bet
Secs. 5 & 32

Var 16°30' E.

40.00 Set Quartzite 11 x 7 x 7,
6 in. deep, marked
1/4 on N. side, with
stone mound for 1/4 Sec. cor.

80.00 Set Sandstone 11 x 7 x 6, 6
in deep marked 5 notches
on E and on Wedges,
with stone mound for
cor to Secs. 5. 6. 31 & 32

Land heigh Plateau,
broken and rocky
Soil 3rd rate
No Timber
augmented on 80. chns.

North Boundary Tp. 3 S. R. 20 E.

West on true line
bet Secs. 6 & 31
Var 16° 30' E

31.00 Descend

40.00 Set Quartzite 10 x 8 x 7,
6 in. deep, marked 1/4
on N. side, with stone
mound for 1/4 Sec. cor.

71.00 Dry bed of Dry Fork in
deep Cañon drns. S.E.

78.20 (Allowing for convergency
of Meridian) Set
Quartzite 16 x 7 x 7.
11 in deep marked 6
notches on N. S. E. & W
edges, with stone mound
for cor. to Tps. 2 & 3 S.
R. 19 & 20 E.
Land broken
Soil 2nd rate

BOOK-A-163

of the Salt Lake Meridian

Timber scattering Pine
Aug marked on 78.20 chns.
October 2nd 1879 E. Buettner Dep. Sur

West Boundary Tp. 3 S.
Range 20 E.

October 4th 1879 by A. D. Farrow
From the cor to Tps. 2 & 3 S.
R. 19 & 20 E.
South bet Secs. 1 & 6
Var. 16° 30' E.

12.50 Ridge bns. N. W. & S. E.
40.00 Set Sandstone 26 x 14 x 5
18 in. deep, marked 1/4
on W. side with stone
mound for 1/4 Sec. cor
64.50 Main Road bns. N. W. & S. E.
65.30 Spring Branch bottom of ~~hollow~~

West Boundary Tp. 3 S. R. 20 E.

5 lks. wide, 6 in. deep runs S.E.

80.00 ~~Set~~ Marked a Stationary Sandstone 72 x 24 x 20 in. 5 notches on S. and 1 on N. Edge with stone mound for. cor to Secs. 1. 6. 7 & 12

Land Mountainous

Soil 2nd rate

Timber Cedar and Pines augmented on 80.00 chns.

South bet. Secs. 7 & 12

Var. 16° 30' E.

Ascend

5.00 Top of low divide N. E. & S. W.

Descend

20.00 Hollow drus N. E. ascend

34.00 Top of ridge, Enter Timber

35.38 Pine tree 24" diameter

40.00 Set a Sandstone 24 x 20 x 12

of the Salt Lake Meridian

16 in. deep marked 1/4 on
W side with flour mound
for 1/4 Sec. cor. from which
a Pine tree bns. S 25° W. 10
in. diam. 30 lks. distant.
a Pine tree 6 in. diam. bns
N. 10° E. 35 lks. dist
Both marked 1/4 S. 1/C.

46.50 Descend

58.00 Sand stone Boulder 30' diam.

71.50 Dry Hollow drns. S. W.

80.00 Set Sandstone 24 X 14 X 6,
16 in. deep, marked 4
notches on E. and 2 on
N. edges, with stone mound
for cor. to Secs. 7, 12, 13 & 18
Land Mtns.

Soil 2nd rate
Timber on 46. chns
augmented on 80 chns.

West Boundary Tp. 3 S. R. 20 E

South bet. Secs. 13 & 18

Var. 16° 30' E.

39.00 Leave Timber

40.00 Set Sandstone 18 x 12 x 6, 12 in. deep, marked 1/4 on W side, with stone mound for 1/4 Sec. cor. from which a Cedar 14" diam. brs. S. 65° W. 70. lks. distant.

Marked 1/4 S. B. T.

~~Enter Baser Valley~~

48.00 Indian trail brs. N. E. & S. W.

64.00 Enter Timber

80.00 Set Sandstone 30 x 20 x 10. 20 in. deep marked 3 notches on S and N. edges with stone mound for cor to Secs. 13. 18. 19 & 24

Land Mountainous on 80 chs

Soil 2nd rate

of the Salt Lake Meridian

Timber Pine and Cedar
on 55. chns.
Augmented on 80. chns.

South bet Secs. 19 & 24
Var. 16° 30' E.

Descend into deep Hollow
brs. N. 60° W

4.00 Hollow drains N.W. ascend
22.00 Leave Timber
40.00 Top of ridge, brs. S.W. Set
Gray Sandstone 20 x 12 x 6, 13 in
deep, marked 1/4 on W, side
with Stone mound, for 1/4 Sec. cor.
Descend
44.00 Enter Timber
78.00 Leave "
80.00 Set Gray sandstone 15 x 10 x 10
10 in. deep, marked 2 notches
on S and 4 on N. edges.

West Boundary Tp. 3 S.R. 20 E

with stone Mound for cor
to Secs. 19.2 & 25 & 30.
Land Mountainous.
Soil 3rd rate
Timber Pine & Cedar
Augmented on 80 chns.

41.00
68.00
73.00
80.00

South bet Secs. 25 & 30
Var 16° 30' E.

4.00 Enter Timber descend
27.00 Dry Creek runs S. W.
32.50 Deep Gulch runs Westerly
ascend
40.00 Marked Stationary Sandstone
30 X 18 X 12 in. 20 in. deep
1/4 on W side with stone mound
for 1/4 Sec. cor. from which
a Cedar 20" diam. bears S. 60° W.
20 lks. distant
a Cedar 8" diam. bears S 45° E.

of the Salt Lake Meridian

25 lks. distant.
Both marked 1/4 S. B. T.
41.00 Hollow Arus Westerly
68.00 " " S. W.
73.00 " " West
80.00 Set Red sandstone 15 X 12 X 10
10 in. deep, marked 1 north
on S. and 5 on N. edges, with
stone mound for cor. to Secs.
~~25. 30. 31. & 36.~~ from which
a Cedar 20" diam. brs. S
45° W. 12 lks. distant
a Cedar 14 in. diam. brs. N.
25° W. 22 lks. distant.
Marked according to instruc-
tions
Land Mountainous
Soil 3rd rate
Timber Cedar
augmented on 80 chs. —

West Boundary Tp. 3 S. R 20 E

South betw Secs. 31 & 36

Var 16°30' E.

25.00 Hollow drus. N.

40.00 Set Gray sandstone 10 X 8 X 8. 7 in deep and marked 1/4 on N. side with reg. mound of earth and stones. No trees convenient

65.30 Deep Hollow drus. N.

80.00 Set Gray sandstone 15 X 12 X 12. 10 in. deep, marked 6 notches on N. S. E. & W. edges, with stone mound for cor to Tps. 3 & 4 South Ranges 19 & 20 E. from which a Cedar 24 in. diameter bears S. 18° W. 30 lks. distant a Cedar 12 in. diameter bears N. 67° E. 50 lks. distant a Cedar 12 in. diameter bears

of the Salt Lake Meridian

N. 50° W. 20 lks. distant

all marked according to instructions.

Land Mountainous.

Soil 2nd rate

Timber Cedar.

Augmented on 80 chns.

October 4th 1879 A. D. Perron Dep. Sur.

Note:— For General Description

see end of Subdivision Notes

BOOK-A-163

139

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the

Exterior boundaries of

Township No 3 S. *Range No* 20 E.

of the Salt Lake Meridian, Utah Territory,

Executed by Ferron & Buettner

Under their *contract No* 92

of the 13d *day of* June 1879

in the month of Oct. 1879,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon.

U. S. Surveyor General for Utah.

BOOK-A-163

R: 1880 / 6 Copied / 40

Filed Feb. 10th 1880

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Subdivisions

of Township No. 3 South, Range No. 20 East

of the Salt Lake Meridian in Utah Territory.

BY

Ferron & Buettner

U. S. DEPUTY SURVEYORS

Under ~~his~~ their Joint Contract No. 92

dated June 13th 1879.

Survey commenced Oct. 2nd 1879.

Survey completed " 4th 1879.

Book 163.

BOOK-A-163

Boundary Lines and Subdivisions

Township 3 S. R. 20 E.

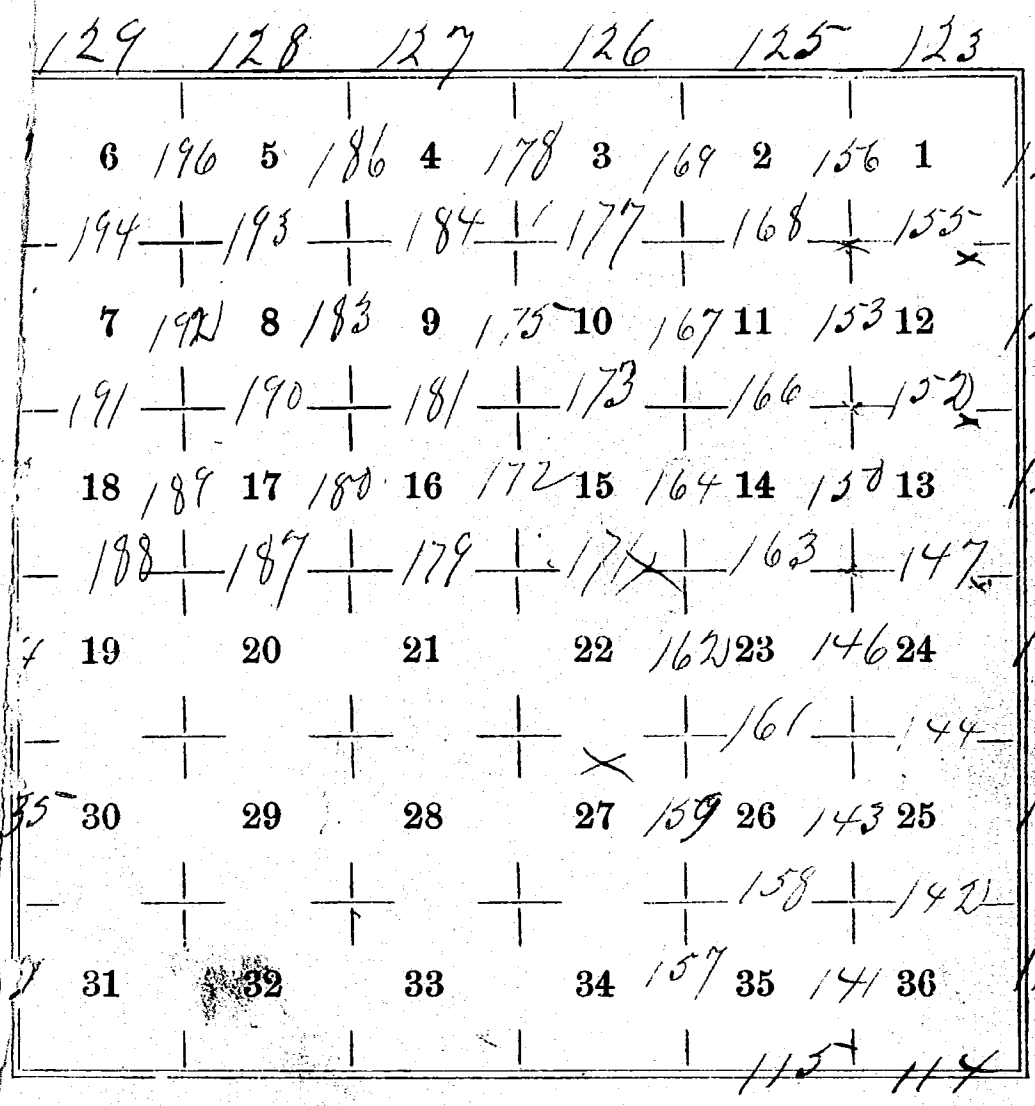

BOOK-A-163

bs. Tp. 7 S. R. 20 E. Salt Lake Meridian

Survey commenced Oct. 2nd 1879
by A. D. Person.
From the Corner to Secs.
35 & 36 on S. Boundary
North between Secs. 35 & 36
Var. 16° 30' E.

00 Gulch drains S. W.

00 On Ridge, bears N. W and
S. E. set Sandstone 12x12x4,
8 in. deep marked 1/4 on W.
side with stone mound
for 1/4 Sec. Cor.

00 Gulch drains N. E.

00 Set charred Cedar Post,
4x4 in. 4 ft long, 2 feet
deep marked 1/4 with on S.
and E. edges with mound
of earth from 4 pits each
24x12x12 in. for Cor. to Secs.
25, 26, 35 & 36.

Subs. Tp. 3 S. R. 20 E of the

Land Broken
Soil 2nd rate
Timber scattering Ced
Augmented on 80 Chs

East on random line bet
Secs. 25 + 36
Var. 16° 30' E.

18.00	Gulch drains N. E.
40.00	Set temp. 1/4 Sec. Cor.
47.00	Large Ravine drains N
70.00	Hollow drains S. E.
76.00	" " S.
80.26	Intersect E. Boundary of 34 lks. S. of Cor. to Secs. 25 + 36
	From which
	S. 89° 45' W. on true line between Secs. 25 + 36
40.13	Set Charred Cedar Po

BOOK-A-

Salt L

4 x 4
marn
with
of
Sec.
0.26 The

Tim

Nor

0.00 On
N. W
Post
deep
side
mo
for

Salt Lake Meridian

4 x 4 in. 4 ft. long, 2 ft. deep
marked 1/4 S. on N. side
with regulation mound
of earth and pits for 1/4
Sec. Cor.

.26 The Cor. to Secs. 25, 26, 35 & 36
Sand Broken
Soil 2nd rate
Timber scattering Pine & Cedar
Augmented on 80.26 Chs.

North between Secs. 25 & 26
Var. 16° 30' E.

.00 On N. side of Hollow drain
N. W. set Charred cedar
Post 4 x 4 in. 4 ft. long, 2 ft.
deep, marked 1/4 S. on W.
side with regulation
mound of earth & pits
for 1/4 Sec. Cor.

Subs. Tp. 3 S. R. 20 E

73.00	Enter flat Hollow.
74.00	Wood road bears N. E.
74.75	Wash drains N. E.
80.00	Set standstone 16×10×7, 1[illegible] deep marked 2 notches o[illegible] S. and 1 on E. edges wo[illegible] reg. mound of earth and pits for Cor. to Secs. 23.24 25 & 26
	Land Broken
	Soil 2nd rate
	Timber scatt. Pine & Ce[illegible]
	Augmented on 80 Chs.
	East on random line between Secs. 24 & 25
	Var. 16°30' E.
10.00	Cañon wash drains [illegible]
11.50	Wood road bears N. E & S.
28.60	Road bears N. W. & S. E.

BOOK-A-16

of the [illegible]

40.00	Se[illegible]
52.00	D[illegible]
	d[illegible]
55.00	F[illegible]
	Off[illegible]
80.00	[illegible]
	[illegible]
	[illegible]
	[illegible]
40.00	[illegible]
	[illegible]
80.00	[illegible]

BOOK-A-163

of the Salt Lake Meridian

40.00 Set temp. 1/4 Sec. Cor.

52.00 Dry Fork creek Bed
Trains S. E.

55.00 S. 00 of perpendicular Bluff.
Offset S. 11.10 Chs., E. 25 Chs.,
N. 11.10 Chs. to

80.00 Intersect E. Boundary of
Tp. at Cor. to Sec. 24 & 25:
From which
Wed on Sec. line
between Secs. 24 & 25.

40.00 Set Sandstone 11 x 10 x 7, 6 in.
deep marked 1/4 on N. side
with stone mound for
1/4 Sec. Cor.

80.00 The Cor. to Secs. 23, 24, 25 & 26.
Land Level and Broken.
Soil 1st & 3rd rate
Timber, Cottonwood along Creek,
thick undergrowth throughout
Bottom.

Subs. Tp. 38 S. R. 20 E

Resumed on 80 Chs.

North between Secs. 25 & 26

Var. 16° 30' E.

1.50 Leave Cañon.

13.00 Ledge breaks 1

17.00 Enter Bottom and Cottonwood undergrowth

19.65 A. Cottonwood 20 in. dia.

20.25 Road leaves N.W. & S.E.

30.00 Dry Bed of Creek trends S.E.

40.00 Set Sandstone 10x10x6, 6 in. deep marked 1/4 on W. side with stone mound for 1/4 Sec. Cor. from which a Spring bears E. 1.75 Chs. distant.

50.00 Leave Cottonwood Branch Enter heavy Sage Brush.

58.50 Foot of perpendicular

80.00

BOOK-A-163

ledge of Sandstone 300 ft. high finding further chaining impracticable I mark said ledge with a cross (#) and W.C. for witness Corner to Secs. 13, 14, 23 & 24.

From which C. Nyes' House bears W. 14.60 Chs.

80.00 Falls in ledge Breaks not set.

Land Bottom & broken Mountains

Soil 1st & 3rd rate

Timber scatt. Cedar.

Augmented on 80 Chs.

East on random line between Secs. 13 & 24

Var. 16°30' E.

The true Cor. Point not being established therefor

148

Subs. Tp. 3 S. R. 20 E. of the

from the witness Cor. 21.50
Chs. S. of Cor. point to Sec.
13, 14, 23 + 24 I offset W.
23 Chs., N. 21.50 Chs. where
I marked Sandstone
ledge with a cross (⧺)
and W. C. and raised a
stone mound for witness
Cor. to Sec. 13, 14, 23 + 24.
Thence continue on offset
N. 10 Chs., E. 23 Chs. to a
Point 10 Chs. N. of Cor. Point
to Sec. 13, 14, 23 + 24 where
I set a Sandstone 11 x 7 x 7. 6 in.
deep marked 3 notches on S.
and 1 on E. edges with
stone mound for witness
Cors Thence continue on
offset E. 10 Chs., S. 10 Chs.
where I set a Sandstone

BOOK-A

Salt

12
W
E
N

33.00
40.00
80.40

40.20

80.

BOOK-A-163

12x8x7, 8 in. deep, marked 3 notches on S. and 3 on E edges and W. E. with stone mound for witness Cor 10 Ch. E. of Cor. point to Secs 13.14, 23+24. Thence E. on line in place.

33.00 Gulch drains S.

40.00 Set temp. 1/4 Sec. Cor.

80.40 On E. side of deep Gulch intersect E. Boundary of Tp. at Cor. to Secs 13+24. From which W. on true line between Secs 13+24

40.20 Set charred Cedar Post 4x4 in. 4 ft. long, 2 ft. deep marked 1/4 S. on N. side with sig. mound of earth & pits for 1/4 Sec. Cor.

80.40 The Cor. point to Secs 13.14, 23+24

Subd. Tp. 3 S. R. 20 E. of the

Land Broken
Soil 3rd rate
Timber scatt. cedar
Augmented on 80.40 Chs.

North between Secs. 13 & 14
Var. 16° 30' E.

10.00 Witness Cor.
40.00 Set sandstone 12x10x8, 8 in. deep marked 1/4 on W. side with stone mound for 1/4 Sec. Cor. From which a cedar 12 in. dia. bears N. 40° E. 25 lks. dist. A cedar 15 in. dia. bears S. 25° E. 18 lks. dist. both marked 1/4 S. B. T.
70.00 Ridge bears E. & W.
79.60 Gulch bears E.
80.00 Set sandstone 24x12x4,

BOOK-A-163

Salt Lake Meridian

18 in. deep marked 4 notches on S. and 10 on E. edges with stone mound. for Cor. to Sec. 11, 12, 13 & 14.

From which

a Cedar 18 in. dia. bears S. 60° E. 50 lks. dist.

A Cedar 14 in. dia. bears S. 30° W. 32 lks. dist.

A Cedar 24 in. dia. bears N. 55° W. 15 lks. distant.

All marked according to instructions.

Land Broken

Soil 3rd rate

Timber scatt. Cedar

augmented on 80 Chs.

152

Subs. Tp. 3 S. R 20 E.

East on random line
between Sec.s 12 + 13.
Var. 16° 30' E.

40.00 Set temp. 1/4 Sec. Cor, descend.
50.00 ~~Descend~~ Bottom - leave Tamarac
63.00 Hollow drains S. E.
72.00 Ashley Creek, 150 lks. wide
12 in. deep runs S. E.
77.50 Slough 40 lks. wide bears
N. & S.
78.00 W. Edge of Beaver Pond
80.00 Intersect E. Boundary of
Tp. at Cor. to Sec.s 12 + 13
From which West on true
line between Sec.s 12 + 13.
40.00 Set Sand stone 18 x 8 x 5, 12 in.
deep, marked 1/4 on N. side
with stone mound for
1/4 Sec. Cor.
From which a Cedar

BOOK
of the

80.00

36.00
40.00

45.0

of the Salt Lake Meridian

14 in. dia bears N. 25° E. 20 lks. dist.

A Cedar 18 in. dia bears S. 55° W. 65 lks. distant both marked 1/4 S.B.T.

80.00 The Cor. to Sec. 11, 12, 13 & 14

Land Plateau

Soil 1st rate

Timber, Cedar on Mountain, Cottonwood in Bottom.

Augmented on 80 Chs.

North between Sec. 11 & 12

Var. 16° 30' E.

30.00 Descend

40.00 Set Sandstone 12 x 8 x 6, 8 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.

45.00 Enter flat - bare Timber

Subs. Tp. 3 S. R 20 E

56.00	Foot of Mountains - enter Timber.
80.00	Set Sandstone 12x10x8, 8 in. deep, marked 5 notches on S. and 1 on E. edges with stone mound for Cor. to Secs 1. 2. 11 & 12.
	From which
	A cedar 20 in. dia. bears N. 15° E. 22 lks. dist.
	A Cedar 18 in. dia. bears N. 34° W. 25 lks. dist.
	A Cedar 12 in. dia. bears S. 45° W. 46 lks. dist. All marked according to instructions.
	Land mostly Broken
	Soil 2nd rate
	Timber - Cedar
	Augmented on 69 lks.

BOOK

of the

E

21.00 E

34.50

40.00

48.00

73.00

80.20

40.10

80.2

of the Salt Lake Meridian

East on random line
between Secs. 1 & 12
Var. 16°30' E.

21.00 Enter Ashley Creek Bottom
and heavy under growth.

34.50 Ashley Creek 75 lks. wide
6½ ft. deep runs S. E.

40.00 Set temp. 1/4 Sec. Cor.

48.00 Ascend.

73.00 Enter Plateau

80.20 Intersect E. Boundary of
Tp. 22 lks. S. of Cor. to Secs.
1 & 12. From which
S 89°51' W. on true line
between Secs. 1 & 12

40.10 Set chamfered Cedar Post
4x4 in. 4 ft. long, 2 ft. deep
marked 1/4 on N. side
with reg. mound of earth
and pits for 1/4 Sec. Cor.

80.20 The Cor. to Secs. 1, 2, 11 & 12.

136

Subs. Tp. 38 R. 20 E of the

Land mostly Broken
Soil 2nd + 1st rate
Timber scatt. Cedar
Augmented on 80.20 Ch.

North on random line
between Secs 1 + 2
Var. 16° 30' E.
Ascend
33.00 Enter Timber
40.00 Set temp. 1/4 Sec. Cor.
43.00 Enter Plateau
80.18 Intersect N. Boundary of
Tp 34 Chs. W. of Cor to
Secs 1 + 2. From which
S. 0° 15' W. on true line
between Secs 1 + 2
40.18 Set Sandstone 12X8X5,
8 in. deep, marked 1/4 on
W. side with stone mound.

BOOK-
Sa

80.18

40.00

80.0

Salt Lake Meridian

for 1/4 Sec. Cor.

80.18 The Cor. to Secs. 1, 2, 11 & 12
Land mostly Broken
Soil 2nd rate
Timber, Cedar on S. port.
Augmented on 80.18 Chs.
Oct. 2nd 1879 A. G. Ferron Dep. Sur.

Oct. 3rd 1879 by E. Buellner
North between Sec. 34 & 35
Var. 16° 30' E.

40.00 In Hollow, drains S. E. set
charred Cedar Post 4x4 in.
4 ft. long 2 ft. deep, marked
1/4 on W. side with seg.
mound of earth and pits
for 1/4 Sec. Cor.

80.00 Set Bottle stone 12x10x8,
8 in. deep marked 1 notch
on S. and 2 on E. edges
with stone mound for

Subs. Tp. 3. S. R. 20 E.

Cor. to Secs. 26, 27, 34 + 35.
Land Broken
Soil 2nd rate
Timber scatt. Cedar.
Augmented on 80 Chs.

East on random line
between Secs. 26 + 35
Var. 16° 30' E.

29.00 Hollow drains N.
40.00 Set temp. 1/4 Sec. Cor.
79.88 Intersect N. + S. line 24 Chs.
N. of Cor. to Secs. 25, 26, 35 + 36.
From which
N. 89° 50' W. on true line
between Secs. 26 + 35
39.94 Set charred Cedar Post
4x4 in, 4 ft. long + 2 ft. deep
with reg. mound of earth
and pits, marked 1/4 S. on

BOOK
of th
79.88
35.50
40.00
66.25
80.00

of the Salt Lake Meridian

N. side for 1/4 Sec. Cor.

79.88 The Cor. to Secs. 26, 27, 34 & 35

Land Broken

Soil 2nd rate

Timber scatt. Cedar

Augmented on 79.88 Ch.

North between Secs. 26 & 27

Var. 16° 30' E.

35.50 Road in Cañon bears N. E.

40.00 Set charred Cedar Post 4x4 in. 4 ft. long, 2 ft. deep, marked 1/4 S. on N. side with sq. mound of earth & stones for 1/4 Sec. Cor.

66.25 Hollow drains N. E.

80.00 Set Sandstone 15x15x3, 10 in. deep marked 2 notches on S. and E. edges

160

Subs. Tp. 38 S. R 20 E

Reg. mound of earth and
pits for Cor. in Secs.
22, 23, 26 & 27

From which

A Cedar 18 in. dia. bears	13.50
N. 80° E. 15 lks. dist.	16.00
A Cedar 20 in. dia. bears	20.50
S. 75° W. 15 lks. dist.	27.60
A Cedar 15 in. dia. bears	40.00
S. 12° E. 28 lks. dist.	48.00
A Cedar 20 in. dia. bears	57.10
N. 78° W. 36 lks. dist.	74.00
	80.18

All marked according
to instructions.

Land Broken
Soil 2nd rate
Timber scatt. Cedar
Augmented on 80 Ch.

BOOK
of Ch

40.0

of the Salt Lake Meridian

East on a random line between Secs. 23 and 26.

Var. 16°30' E.

13.50 Gulch drains S.E.

16.00 " " N.E.

20.50 " " S.E.

27.60 " " "

40.00 Set temp. 1/4 sec. cor.

48.00 Ridge bears N & S.

57.10 Hollow drains S.

74.00 Enter Cañon drains N.E.

80.18 Intersect N & S. line 20 lks. S of Cor to Sec. 23. 24. 25 & 26. from which S. 89.51' W. on true line between Secs. 23 & 26.

40.09 Set sand stone 20×18×3, 15 in deep, marked 1/4 on N. side, with stone mound for 1/4 sec cor from which

A cedar 12 in dia bears N 75° E. 10 lks. dist.

162

Sales. Tp. 3 S. R. 20 E

A Cedar 8 in dia bears S 15° E., 8 lks dist. both marked 1/4 S. B. T.

80.18 The cor to Sec. 22. 23. 26 & 27

Land broken,

Soil Indrate

Timber Cedar.

Augmented on 80.18 chs.

North Cut. Sec. 22 & 23.

Va 16° 30' E.

9.00 Hollow drains S.E.

13.00 " " "

40.00 Set Sandstone 15 × 10 × 4, 10 in deep, marked 1/4 on W. side with reg. mound of earth and pits for 1/4 Sec. cor.

N.W. & S.E.

52.08 Ridge bears N.E. & S.W.

73.00 Enter flat bears N.W. & S.E.

80.00 Set Sand stone 18 × 10 × 8, 12 in

of the Salt Lake Meridian

Deep, marked 3 Notches on S. and 2 on E. edges, with Stone mound for Cor to Sec^o 14.15.22 and 23.

Land mostly broken;

Soil 2nd rate.

Timber Scatt. Cedar

Augmented on 73.00 ds.

Eastern random line between Sec^o 14 & 23

Vars 30' E.

1.00 Road bears N.W. & S.E.

11.50 Bed of Dry Fork Creek drains S.E.

28.00 Main Road bears N.W. & S.E.

29.50 " " N. & S.

40.00 Set temp. pr. Sec. cor.

57.18 Foot of Perp. Bluffs bears N.W. & S.E., and Witness cor. making the connection:—

80.18 Intersect N. & S. line at cor point

164

Subs. Tp. 38. R. 20 E

to Sec. 13. 14. 23 & 24

from which

West, on true line, between

Sec. 14 and 23.

40.09 Set chained Cedar post 4"x4" & 4 ft

long. 2 ft deep, marked 1/4 S. on

N. side, with reg. mound of

earth & pits, for 1/4 Sec. Cor.

80.18 The Cor to Sec. 22. 23. 26 & 27

Land mostly level

Soil Rotate

No Timber

Heavy undergrowth & augmented on 80.18 ch.

North bet. Sec. 14 & 15,

Va 16° 30' E.

0.60 Road bears N.W.

7.50 Creek 12 lks wide 12 in deep

runs runs S.E.

11.50 Dry Creek bed drains S.E.

16.00 " " " " "

BOOK

23.00

24.00

31.00

40.00

45.00

80.00

of the Salt Lake Meridian

23.00 Leave Brush,
24.00 Enter Cultivated Land.
31.00 Leave same a road appears at this point on map
40.00 Set Sandstone 14×8×6, 9 in. dup, marked 1/4 on W. Side with regulation mound of earth & pits for 1/4 sec cor
45.00 Foot of Hills bears N.W. & S.E.
80.00 Set Sandstone 24×20×6, 18 in. deep, marked 4 notches on S. and 2 on E. edges, with reg. mound of earth & pits for Cor. to sec. 10, 11, 14 & 15
Land level & broken hills
Soil 1st & 2nd rate
No Timber
Augmented on 58 chs.

Subg. Tp. 38. R. 20 E

East on random line, between Sec.s 11 and 14

Va. 16° 30' E.

7.50 Enter Plateau & Timber

40.00 Set temp. 1/4 Sec Cor.

80.08 Intersect N & S line 56 lks N. of cor. to Sec.s 11. 12. 13 and 14.

From N. 89°36' W. on true line bet. secs. 11 & 14,

40.04 Set sand stone 14 x 8 x 5 - 9 in deep, marked 1/4 on N. side with stone mound for 1/4 Sec cor from which

A. Cedar 12 in dia bears: N 22° W 22 lks dist.

A Cedar 20 in dia bears: S 55° E. 18 lks dist.

Both marked 1/4 S. B. T.

80.08 The cor to Sec.s 10. 11. 14 & 15.

Land mountainous

Soil Indrate.

Timber Cedar.

Augmented on 80.08 Chs.

BOOK

22.40

40.00

55.00

57.00

59.00

80.00

of the Salt Lake Meridian

North between Sec.s 10 & 11

Va 16° 30' E.

22.40 Enter flat.

40.00 Set Sand stone 12 × 8 × 6, 8 in deep, marked 1/4 on W. side, with mound of earth from 4 pits each 24 × 12 × 12 in for 1/4 sec cor.

55.00 Wash drains S.W.

57.00 Indian Trail bears N.E.

59.00 Enter Timber, ascend.

80.00 Set Sand Stone 20 × 8 × 6, 15 in deep, marked 5 on N at chg on S, and 2 on E. edges with stone mound for cor to sec.s 2. 3. 10 & 11. from which

A Cedar 10 in dia bears N. 25° E 24 lks dist.

A Cedar 10 in dia bears: N. 20° W. 32 lks dist.

Subs. Tp 3 S. R. 20 E

A Cedar 12 in dia bears S. 65° E.
14 lks dist.
A. Cedar 15 in dia bears: S 15° W.
10 lks dist
All marked according
to instructions.
Land, level & broken
Soil 1st rate
Timber pine & Cedar
Augmented on 43.40 chs.

East on random line bet Sec^s
2 and 11.
Va 16° 30' E.

11.00	Hollow drains S.
40.00	Set Temp. 1/4 Sec^l Cor.
79.90	Intersect N. & S. line
	34 lks N. of Cor. to Sec^s 1.2.11 & 12
	from which
	N 89° 45' W. on true line,

BOOK
of the

BOOK-A-163

of the Salt Lake Meridian

bet. Sec. 2 and 11

39.95 Set Sand Stone 10×10×6, 9 in deep, marked 1/4 on N. side with Stone mound for 1/4 Sec Cor.

79.90 The cor to Sec. 2, 3, 10 & 11 — Land mountainous Soil 1st & 2nd rate Timber Scatt Cedar

Augmented on 79.90 chs.

North on random line bet. Sec. 2 and 3. Var. 30° E.

20.50 Leave Timber

40.00 Set Temp. 1/4 Sec cor

72.00 A.E. point of Ridge bear: N.W.

80.10 Intersect N. Boundary of Tp. at cor. to Sec. 2 & 3.

Subs. Tp. 3 S. R. 20 E

from which
South on true line Cor.
Sec.s 2 and 3.

40.00 Marked Stationary & and
Stone ledge 1/4 facing N.
and raised mound of Stone
for 1/4 Sec Cor.

80.10 The cor to Sec.s 2. 3, 10 & 11.
Land broken;
Soil Indrate;
Timber Cedar on S. part
Augmented on 80.10. ck's.
Oct. 3rd 1879 E. Buethen dep. Sur

Oct. 3rd 1879 by A. D. Ferron
Note: The S.W. part of this Tp.
falls in land not Surveyable
according to instructions
Therefor. from the Cor to Sec.s
14. 15. 22 & 23. Drum

BOOK
of the

26.50
38.00
40.00
45.00
62.50
80.00

BOOK-A-163

of the Salt Lake Meridian

West on true line bet-
Sec. 15 and 22.
Va 16° 30' E.

26.50 Enter Mountains

38.00 Small Canon heads S.
10 ch. dist.

40.00 Marked Stationary Sand
Stone 30 x 20 x 20 in. above
ground 1/4 on S. side with
Stone mound for 1/4 Sec. Cor.

45.00 Enter Cedars leave brush

62.50 Leave Same

80.00 Set Sand Stone 16 x 10 x 8,
11 in dep. marked 3 Notches
on S. & E. edges, with
Stone mound for Cor to Sec.
15. 16. 21 & 22.

Land mostly broken
Soil Indifferent
Timber Scatt. Cedar
Augmented on 80.00 chs. —

172

Subs Tp. 3 S. R. 20 E

North bet. Secs 15 & 16.

Va 16° 30' E.

Descend

32.00 Road bears E & W. enter flat. and aspen undergrowth

32.75 Fence bears: E & W.

37.75 Dry Bed of creek drains S.E.

40.00 Set Sand stone 18×12×12, 12 in deep, marked 1/4 on W. side, with Stone mound for 1/4 Sec Cor.

~~52.00 bear aspen undergrowth~~

53.00 Road bears E & W.

53.78 Fence bears E & W enter Field.

61.50 Elijah Allens Cabin bears N 64° W

80.00 Set Sand stone 18×12×10, 12 in deep, marked 4 Notches on S. and 3 on E. edges, with Stone mound for cor to Secs 9. 10. 15 & 16.

BOOK-A

of the

0.00

of the Salt Lake Meridian

from which
Elijah Allen's house bears:—
S. 65° 10' W.
Land level & broken
Soil 1st & Indrate
No Timber
Augmented ord 3.2.25 chs.

East on random line
bet. sec.s 10 & 15.
N 16° 30' E.

0.00 Took bearings to the following
houses in Hallville Settlement:—
Hammond's house bears:— S 22° 20' E.
C. Hall's house " S 27° 15' E.
Thos Bingham's " " "
" " Granary " S 28° 40' E.
" " " " S 31° E.
M. Hall's house " S 32° 40' E.
Geo. Allred's " S. 33° 15' E.

Subs. Tp. 3 S. R. 20 E

Orson Hallihouse bears: S. 38° E.
" " Granary " S 40° 15' E.
8.00 Fence bears N & S.
40.00 Set temporary 1/4 sec. cor. from which
M. Hallihouse bears: S. 65° W.
Geo. Alhedi " " S. 59° 40' W
T. Bingham Granary " S. 60° 10' W.
" " " " S. 57° W.
" " House " S. 55° 30' W.
Orson Halli " " S. 54° W.
" " Granary - S. 50° 28' W.
F. Hammonds house - S. 48° W.
C. Halli " " S. 47° 15' W.
60.50 Wash drains S.
68.50 Enter Hills
79.10 Intersect N & S. line 24 lks
S. of cor to sec. 10. 11. 14 & 15
from which
S. 89° 50' W. on fence line

of the Salt Lake Meridian

bet. Sec. 10 & 15

39.59 Set. Sandstone 14×10×6, 9 in dep., marked 1/4 on N. side, with stone mound for 1/4 sec. cor.

79.10 The cor to Sec. 9, 10, 15 & 16.
Land mostly level;
Soil Strata;
No Timber
Augmented on ~~10.60~~ 10.60 chs.

North bet. Sec. 9 & 10
Var 16° 30' E

2.00 Leave Valley enter Timber
Ditch rns. Exp.

40.00 marked Stationary Sand stone 3×2×1 ft above ground 1/4 on W. side, with mound of Stone for 1/4 sec cor from which
A. Cedar 15 in dia bears
S. 52° E. 16 lks dist.

Subs. Tp. 3 S. R. 20 E.

A cedar 12 in dia bears:—
N. 83° W. 27 lks dist
both marked 1/4 S. B. T.
71.00 Gulch drains S.E.
80.00 Set. Limestone 20×10×6, 15
in dep. marked 5 Notches
on S. and 3 on E. edges,
with stone mound from
Cor to Sec.s 3. 4. 9 & 10.
from which
A cedar 12 in dia bears:—
N. 65° E. 10 lks dist.
A cedar 15 in dia bears:—
N. 45° W. 18 lks dist.
A cedar 14 in. dia. bears:—
S. 50° W. 16 lks dist
A cedar 10 in dia bears:—
S. 15° E. 20 lks dist.
All marked according to
instructions.—

BOOK

Of th

7.00
32.00
40.00
56.50
68.00
79.80

39.90

BOOK-A-163

Of the Salt Lake Meridian

Land, broken;
Soil, 2nd rate.
Timber Cedar.
Augmented on 78. chs.

East on random line
bet. Sec.s 3 and 10
Va 16° 30' E.

7.00 Gulch drains S.
32.00 " " "
40.00 Set Temp 1/4 Sec cor.
56.50 Gulch drains S.
68.00 " " "
79.80 Intersect N & S. line 42 lks S.
of cor to Sec.s 2. 3. 10 & 11
from which
S. 89° 42' W on true line
bet. Sec.s 3 & 10
39.90 Set. Sand stone 11 x 7 x 7
6 in deep, marked 1/4 on N.

Subs. Tp. 3 S. R. 20 E

Side with Stone mound
for 1/4 sec cor
from which
A Cedar 14 in dia bears: S 12° E.
44 lks dist.
A Cedar 15 in dia bears: N 53°
W. 27 lks dist.
both marked 1/4 S. B. T.
79.80 The cor to secs. 3. 4. 9 & 10
Land, broken;
Soil Indrate
Timber Cedar
Augmented on 79.80 chs.

North on random line
bet secs. 3 & 4.
Va 16° 30' E.
21.00 Spring branch 2 lks wide
3 in disp. in Gulch runs S.W.
40.00 Set temp 1/4 sec cor

of the Salt Lake Meridian

79.86 Intersect N. Boundary of Tp. 29 Sk. E. of cor. to Sec 3 and 4 from which S. 0° 12' E. on true line bet. Sec.s 3 & 4

39.86 Marked Stationary Sand Stone 24 x 10 x 10 in above ground 1/4 on W. side and raised mound of stone for 1/4 sec. cor.

79.86 The cor to Sec.s 3. 4. 9 & 10

Land broken;

Soil, Indicate;

Timber, Cedar;

Augmented on 79.86 chs.

From the cor to Sec.s 15. 16. 21 & 22 I run

West on true line between Sec.s 16 & 21.

Va 16° 30' E.

Subs. Tp. 3 S. R. 20 E

40.00	Set sandstone 24×24×24 in, 18 in deep marked 1/4 on N. Side, with stone mound for 1/4 Sec. Cor.	40.00
41.40	A pine 10 in dia.	63.00
44.50	Hollow drains N.	79.50
60.00	" " "	80.00
80.00	Set. quartzite 18×18×10, 12 in deep, marked 11 Notches on S. and 3 on E. edges, with stone mound for cor to Secs. 16. 17. 20 & 21. Land, broken; Soil, 2nd rate; Timber Scatt. pine Augmented on 80 chs. —	

North between Secs. 16 & 17

Var. 16° 30' E.

0.10	Head of Ravine drains N.W.	9.00
		12.50

of the Salt Lake Meridian

40.00	Marked stationary Sandstone 24x20x12 in. above ground, 1/4 on W. side with stone mound for 1/4 Sec. Cor.
63.00	Enter flat
79.50	Road bears N.W. & S.E.
80.00	Set Sandstone 26x14x12, 8 in. deep, marked 4 notches on S. & E. edges with stone mound for Cor. to Secs. 8, 9, 16 & 17.
	Land most by Broken
	Soil 2nd rate
	No Timber
	Augmented on 63 Chs.
	East on random line between Secs. 9 & 16
	Var. 16°30'E.
9.00	Dry Bed of Creek drains S.E.
12.50	" " " " " "

Subs. Tp. 3 S. R. 20 E

18.00	Leave Brush
23.00	Fence bears N. + S. Enter field
37.60	Leave plowed land
38.50	Timber road bears N. W. + S. E.
40.00	Set temp. 1/4 Sec. Cor.
52.10	Ditch runs S. E.
64.60	" " N. E
67.00	Fence bears S. W.
80.00	Intersect N. + S. line at Cor. to Secs. 9, 10, 15 + 16 From which West on true line between Secs. 15 + 16
40.00	Set Cobble stone 16 x 10 x 10, 11 in. deep, marked 1/4 on N. side with stone mound for 1/4 Sec. Cor.
80.00	The Cor. to Secs. 8, 9, 16 + 17
	Land mostly level
	Soil 1st rate

BOOK

of the

6.75	
11.80	
14.00	
40.00	
68.50	
70.00	

of the Salt Lake Meridian

No Timber

Augmented on 18 Chs.

North between Secs. 8 & 9

Var. 16° 30' E.

6.75 Dry Bed of Creek drains S.E.

11.80 Irrigation Ditch runs E.

14.00 Ascend - Enter Timber

40.00 Set Limestone 24x8x4, 18 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.

From which

A Cedar 10 in dia. bears N. 25° E. 20 lks. dist.

A Cedar 12 in. dia. bears S. 11° E, 25 lks. dist.

Both marked 1/4 S. B. T.

68.50 Leave Cedars

70.00 Ridge bears N. E. & S. W.

184

Subs. Tp. 3 S. R. 20 E

80.00 Set Limestone 24 x 20 x 10, 8 in. deep, marked 5 notches on S. & 4 on E. edges with stone mound for Cor to Sec's 4, 6, 8 & 9.

Land mostly Broken

Soil 2nd rate

Timber, Cedars on part

Augmented on 80 Chs.

East on random line between Sec's 4 & 9

Var. 16° 30' E.

10.00 Ridge bears N. E. & S. W.

20.00 Timber Road bears N. & S.

40.00 Set temp 1/4 Sec. Cor.

48.00 Hollow trending S.

65.00 " " "

80.27 Intersect N. & S. line at Cor to Sec. 3, 4, 9 & 10

From which

BOOK

of the

40.13

80.27

BOOK-A-163

of the Salt Lake Meridian

West on true line between
Sec. 4 & 9

40.13 Set Sandstone 12x10x6, 8 in.
deep, marked 1/4 on N. side
with stone mound for 1/4
Sec. Cor.
From which
A Cedar 14 in. dia. bears
N. 10° E. 15 lks. dist.
A Cedar 20 in. dia. bears
S 65° W. 18 lks. dist.
Both marked 1/4 S. B. T.

80.27 The Cor. to Sec. 4, 5, 8 & 9
Sand Broken
Soil 2nd rate
Fine Cedar
Augmented on 80.27 Chs.

186

Subs. Tp. 3. S.R. 20 E

North on random line
between Secs. 4 & 5
Var. 16° 30' E.

12.00 Hollow drains S. W.

20.00 Leave Cedars

40.00 Hollow drains S. E. set
temp. 1/4 Sec. Cor.

62.00 Hollow bears S. W.

80.00 Intersect N. Boundary of Tp.
at Cor. to Secs. 4 & 5
From which
South on true line
between Secs. 4 & 5

40.00 Marked stalloway
Sandstone, 36 x 30 x 10 in.
above ground, 1/4 on W.
side with stone mound
for 1/4 Sec. Cor.

80.00 The Cor. to Secs. 4, 5, 8 & 9
Land Broken
Soil 2nd & 3rd rate

BOOK-

Of the

29.00

40.00

80.00

BOOK-A-163

of the Salt Lake Meridian

Timber, Cedar on S. part

Augmented on 80 Chs.

~~October 3rd~~ '79. A. D. Farrow Dep. Sur

& October 4th 79. by E. Sullivan

From Cor. to Sec. 16, 17, 20 & 21

West on true line

between Sec. 17 & 20

Var. 16° 30' E.

29.00 Gulch drains N. E.

40.00 Set Quartzite 24x18x10, 18 in.

deep, marked 1/4 on N. side

with stone mound for 1/4

Sec. Cor.

80.00 Set Quartzite 10x10x7, 6 in.

deep, marked 3 notches on S.

and 5 on E. edges with

stone mound for Cor.

to Secs. 17, 18, 19 & 20.

Land Broken

Soil 2nd rate

Timber scall. Pine

Subs. Tp. 3 S. R. 20 E

Augmented on 80 Chs.

West on random line
between Secs. 18 & 19
~~40.00~~ Var. 16° 30' E.
40.00 Set temp. 1/4 Sec. Cor.
42.00 Ridge bears N. & S.
79.00 Intersect W. Boundary of
Tp. 62 Chs. S. of Cor. to Secs.
18 & 19
From which S. 89° 33' E
on true line between Secs.
18 & 19
39.00 Set Quartzite 14x7x6, 9 in.
deep, marked 1/4 on N. side
with stone mound
for 1/4 Sec. Cor.
79.00 The Cor. to Secs. 17, 18, 19 & 20
Land Broken
Soil 2nd rate

BOOK
of the

20.00
40.00
57.00
80.00

BOOK-A-163

of the Pals Lake Meridian

Timber scatt. Pine

Augmented on 79 Chs.

North between Sec. 17 & 18

Var. 16° 30' E.

20.00 Gulch drains N. E.

40.00 Set Quartz 18 x 7 x 5; 12 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.

57.00 Spring Hollow leads W.

80.00 Set Sandstone 20 x 14 x 6, 15 in. deep, marked 4 notches on S. and 5 on E. edges with stone mound for Cor. to Secs. 7, 8, 17 & 18.

Land mountainous

Soil 2nd rate

Timber scatt. Pine

Augmented on 80 Chs.

Subs. Tp. 3 S. R. 20 E.

	East on random line between Secs. 8 & 17
	Var. 16° 30' E.
10.00	Enter flat.
19.70	Road bears N. W. & S. E.
27.00	" " N. E. & S. W.
29.50	" " N. W. & S. E.
40.00	Set temp. 1/4 Sec. Cor.
47.50	Road bears N. E. & S. W.
72.75	" " N. W. & S. E.
80.20	Intersect N. & S. line 20 Chs. S. of Cor. to Secs. 8, 9, 16 & 17
	From which
	S. 89° 51' W. on true line between Secs. 8 & 17
40.10	Set Lime stone 16 x 14 x 5, 11 in. deep, marked 1/4 on N. side with stone mound for 1/4 Sec. Cor.

BOOK

of the

80.20 T

38.00

40.00

78.80

38.80

BOOK-A-163

of the Salt Lake Meridian

80.20	The Cor. to Secs. 7, 8, 17 & 18
	Land mostly level
	Soil 2nd rate
	No Timber
	Augmented on 10 Chs.
	West on random line
	between Secs. 7 & 18
	Var. 16° 30' E.
38.00	Ridge bears N. & S.
40.00	Set temp. 1/4 Sec. Cor.
78.80	Intersect W. Boundary of
	Tp. 42 Ws. N. of Cor. to
	Secs. 7 & 18
	From which
	North 89° 42' E. on true
	line between Secs. 7 & 18
38.80	Set Limestone 16 x 14 x 7,
	11 in. deep, marked 1/4
	on N. side with stone

1 Sub. Tp. 3. S. R. 20 E.

mound for 1/4 Sec. Cor.

78.80 The Cor. to Secs. 7, 8, 17 & 18

Land Broken

Soil 2nd rate

Timber scatt. Pine & Ceda

Augmented on 78.80 ch

North between Secs. 7 & 8

Var. 16° 30' E.

10.00 Hollow drains S. E.

13.00 Road bears N. W. & S. E.

25.75 Hollow drains S. E.

35.00 Ridge bears N. W. & S. E.

40.00 Set Sandstone 16 x 10 x 9, 11 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.

48.00 Spring Branch 3 lks wide 3 in deep in deep cañon runs S. E.

74.50 Ridge bears N. W. & S. E.

BOOK-

of the

80.00 Se

20

no

wi

C

La

So

I

C

se

23.00 chs. 6

a

S

40.00 S

51.00

58.00

72.00

of the Salt Lake Meridian

80.00 Set lime stone 30×30×30 in
30 in deep marked 5
notches on E & S edges
with stone mound for
Cor. to sec. 5. 6. 7. 8
Land broken
Soil 2nd rate
Timber scattering Cedar
Augmented on 80 chs.

East on random line bet
sec. 5 & 8.
Var 16° 30' E
83.00 Dried bed in bottom of
dry fork cañon drains
S. E.
40.00 Set temp. 1/4 sec. cor.
51.00 Enter plateau
58.00 Leave same
72.00 Gulch drains S. W.

Subs. Tp. 3. S. R. 20 E.

80.18 Int. North & South line 3 8
lks. N. of cor. to Secs. 4. 5. 8 & 9
from which N. 89° 44' W on
true line bet. Secs. 5 & 8

40.09 Set charred Cedar post. 4"x4"
4 ft. long. 2 ft. deep, marked
1/4 S. on N. side, with reg.
mound of earth and pits
for 1/4 Sec. cor.

80.18 The cor. to Secs. 5. 6. 7 & 8.
Land very broken
Soil 2nd & 3rd rate
Timber scattering Cedar
and Pine
Augmented on 80.18 [illegible]

West on a random line
bet. Secs. 6 & 7.
Var 16° 30' E

E. of the Salt Lake Meridian

7.50 Ridge bro. N. W. & S. E.

33.00 Enter burnt Aspen Timber

40.00 Set Temp. 1/4 Sec. cor.

42.80 Spring brook, 3 lks. wide 6 in. deep in hollow run. S. E.

45.60 Road bro. N. W. & S. E.

73.00 Leave burnt Timber

75.00 Hollow trns. N.

78.38 Ins. W. Boundary of Tp. at cor to Secs. 6 & 7. from which East on true line bet Secs. 6 & 7

38.30 Set Sandstone 13 x 10 x 8, 8 in. deep marked 1/4 on N side, with stone mound for 1/4 Sec. cor.

78.30 The cor. to Secs. 5. 6. 7 & 8

Land Broken

Soil 2nd rate

Timber Pinon W. end

Subs. Tp. 3 S. R. 20 E.

and scattering burnt aspen along line

Augmented on 78.30 chns.

North on random line bet Secs. 5 & 6

Var 16° 30' E

Descend

21.50 Dry Bed of Dry Fork in Cañon drns. S. E.

40.00 Set Temp. 1/4 Sec. cor

53.75 Enter Plateau

80.00 Int. N. Boundary of Tp. 42. lks. E. of cor. to Secs. 5 & 6 from which S. 0° 18' E. on true line bet Secs. 5 & 6.

40.00 Set Sandstone 10 x 10 x 7/6 in deep. marked 1/4 on W side with stone mound for

BOOK-A-163

of the Salt Lake Meridian

1/4 Sec. cor

90.00 The cor. to Secs. 5. 6. 7 & 8

Land Broken and rocky

Soil 3rd rate

Timber scattering Pine

Augmented on 80 chains

October 4th 1879 E. Buellner Dep. Sur.

BOOK-A-163

General Description

The surveyed portion of this Township, embraces the greater part of Dry Fork Valley, and a part of the Ashley Canon flats. At ordinary seasons, there is sufficient water, to Irrigate all the bottoms and adjacent benches of Dry Fork. A settlement has been made in Sec. 23 and a village of 60 souls extends over portions of Sec. 15 + 16.

The unsurveyed part consists of Unavailable high Mountains.

E. Buettner Dep. Sur.

October 4th 1879

BOOK-A-163

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the

Subdivision lines of fractional

Township No 3 S. *Range No* 20 E

of the Salt Lake Meridian, Utah Territory,

Executed by Ferron & Buettner

Under their joint *contract No* 92

of the 13th *day of* June 1879

in the month of Oct. 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-163
R: 1880, 163 200

Filed Feb. 1880

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Exterior Boundaries

of Township No. 4 South, Range No. 21 East,

of the Salt Lake Meridian in Utah Territory.

BY

Augustus D. Perron

U. S. DEPUTY SURVEYOR,

Under his Joint Contract No. 92

dated June 13. 1879.

Survey commenced Sept. 22nd 1879.

Survey completed " 23rd 1879.

BOOK-A-163

FOR CHAINMAN.

We George F. Britt

and Richard Waldschmidt

do solemnly swear that we will faithfully execute the duties of chain carriers; that we uill level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we asssist in measuring, to the best of our skill and ability,

G. F. Britt

Richard Waldschmidt

Subscribed and sworn to before me

this 22nd day of Sept. 1879

A. D. Fenor

U.S. dep. Sur.

BOOK-A-163

FOR FLAGMAN.

I, Joseph S Burton

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability. his mark
Joseph Burton

Witness:
John C. Mitchell

Subscribed and sworn to before me this 22nd day of Sept. 1879

A D Pinn
U.S. Dep. Mar.

BOOK-A-163 FOR AXEMAN

I, Richard Veltman

do solemnly swear that I will well and truly perform the duties of axeman, according to instructions given me, and to the best of my skill and ability.

Richard Veltman

Subscribed and sworn to before me this 22 day of Sept. 1879

A. D. Fenn
U.S. Dep. Sur.

South Boundary Tp 4 S. R 21 East
Salt Lake Meridian 201

BOOK-A-163

Survey commenced Sept 22d 1879
by A. H. Ferron

Notes The Cor to Secs. 4.5.32 & 33. on the
S. boundary of this Tp having been
established in running the N. Bounds
of Tp. 5 S. R 21 E. Therefor from said
Cor. I run:

West on true line bet. Sec 5 & 32.
Var 16° 30' E.

27.00 Wash drains N. E.

40.00 Set Sand Stone 10×10×6, 6 in. deep,
marked 1/4 on N. Side, with Stone
mound, for 1/4 Sec Cor.

45.50 Wash drains N. E.

51.00 Enter Coal & asphaltum Stills

80.00 Set Lime Stone 12×8×6. 8 in deep
marked 5 Notches on E. and 1 on
W. edges, with stone mound
for Cor to Secs. 5. 6. 31 and 32
Land mostly level

2092

South Boundary Tp 4 S. R 31 E.

Set [illegible]

[illegible]

Augmented on 29 chs.

West on true line bet. Sec. 6 & 31

Var. 16° 30' E.

2,00	Hollow drains S. W.
10,00	Ridge bears N & S.
18,00	Large Hollow drains S.
29,00	" " "
37,00	" " "
40,00	Set Sand Stone 12×12×4, 8 in. deep, marked 1/4 on N. side, with Stone mound for 1/4 sec cor.
53,00	Ridge bears N. W. & S. E.
77,00	Wash in hollow drains S.
79,40	(Allowing for Conv. of Mer.) Set Sand Stone 14×10×10, 9 in. deep, marked 6 Notches on N. S.

BOOK

Sa

40,00

46,00

62,00

80,00

BOOK-A-163
Salt Lake Meridian 203

E & W. edges, with stone mound for cor. to Tps. 4 & 5 S. R. 20 & 21 E.
Land broken coal & asphaltum hills.

Soil 2nd rate.

No Timber

Augmented on 79.40 chs.

West. Boundary Tp 4 S. R. 21 E.

From cor to Tp. 4 & 5 S. R. 20 & 21 E.
North bet. Secs. 31 & 36.
Va 16° 30' E.

40.00 Set Lime Stone 14×10×8, 9 in. dup, marked 1/4 on W. side with stone mound for 1/4 Sec. cor.

46.00 Hollow drains S.W.

62.00 " " "

80.00 Set Lime Stone 20×12×8, 15 in.

Wes Boundary Tp 4 S. R 21 E

	deep, marked Notches S., and 5 on ch. edges, with mound of earth for 4 pits, each 24 x 12 x 12 in. for Cor to Sec. 25. 30. 31 & 36.	80.0
	Land broken	
	Soil 2nd rate	
	Timber Scatt. Cedar	
	Augmented on 80 ch's.	
	North bet. Sec. 25 & 30	
	Va 16° 30' E.	
24.50	Hollow drains S.W.	32,00
40,00	W. sand stone 12 x 10 x 10 8 in. deep, marked 1/4 on W. side, with stone mound for 1/4 sec. cor.	40,00
45,00	Ridge bears N.W. & S.E.	60.00
51,00	Hollow drains W.	
72,50	Hollow drains W.	60.5

BOOK-A-163

80.00	Set Lime stone 18×12×8, 12 in. deep, marked 2 notches on S. and 4 on W. edges, with stone mound for cor. to Sec. 19, 24, 25 & 30.
	Land broken;
	Soil 2nd rate;
	Timber Scatt. Cedar
	Augmented on 80 ch's. —
	North bet. Sect. 19 & 24.
	Va 16° 30' E.
32.00	Hollow drains N.E.
40.00	Set quartzite 12×10×8, 8 in. deep, marked 1/4 on W. side with stone mound for 1/4 Sec. cor.
60.00	Road at foot of hills bears N.E. and S.W.
60.50	Wash drains N.E.

Last Boundary Tp 4 S., R. 21 E.

BOOK

80.00	Set Cobble stone 24×14×6, 18 in deep marked 3 notches on N. and S. edges, with mound of earth from 4 pits, each 24×12×12 in for [illegible] 13, 18, 19 [illegible]	58.00
	Land, mostly broken;	80,00
	Soil, 2nd rate;	
	Timber, Scall, Cedar.	
	Augmented on 60 chs. Sept. 22nd 1879	

North bet. sec. 13 & 18
Ca 16° 30' E.

5.00	Ascend	
1[illegible].00	Top of round hill	
32,50	Deep Ravine drains S.E.	40,00
40.00	Set Sand Stone 13×11×4, 8 in deep, marked 1/4 on W. side with stone mound for 1/4 sec cor.	80,00
51.00	Enter flat top of hill bears N.E.	

BOOK-A-163

58.00 Descend

80,00 At foot of hill, and head of hollow drains S.E. set found stone 20×10×10, 15in deep, marked 4 notches on S. and 2 on N. edges, with mound of earth from 4 pits each 24×12×12 in for corn to sec. 7.12.13 & 18.

Land, broken;

Soil, 2nd rate;

No Timber.

Augmented on 75 chs.

North bet. secs. 7 & 12

Va 16° 30' E.

40,00 Set quartzite 20×16×4, 15in. deep, marked 1/4 on W. side with stone mound for 1/4 sec. cor.

80,00 Set Cobble stone 12×9×6, 8in. deep, marked 5 notches on S. &

Vol. 8 Boundary Tp 4 S., R. 21 E.

Tal

1 on N. edges, with stone mound for cor. to sec. 1, 6, 7 & 12.
Land, broken bench;
Soil, 2nd rate;
No timber

North bet. sec. 1 and 6.
Va 16°30' E.

15.00 Enter Cedar Hills
31.00 Hollow drains S.W.
40.00 Set Cobble stone 10×9×7 – 6 in. dup, marked 1/4 on W. side, with stone mound for 1/4 sec. cor. (No trees at hand)
48.00 Enter plateau bears N.E. & S.W.
80.00 Set Cobble stone 16×12×10 – 10 in. dup, marked 6 Notches on N. S. E. & W. edges with mound of earth from 4 pits each 24×12×12 in for corto Tp. 3 & 4 S., R. 20 & 21 E.

BOOK-A-163

Salt Lake Meridian

Land, mostly broken;
Soil, 2nd rate;
Timber Scatt. Cedar.
Augmented on 65 chs.
Sept 23d. 1879

North Boundary Tp 4 S., R 21 E.

From the cor to Tps 3 & 4 S., R 20 & 21 E.
I run East on a random line bet said
Tps. setting temp cor's every 40 & 80 chs.
at 5 Miles 78.82 Chas I fall 30 lks.
S. of the Tp. Cor. the Correction for the
temporary Cor's will therefor be
1.18 West, and 5 lks S. per mile.

From the cor to Tps 3 & 4 S., R 21 &
22 E., I run:
S. 89° 58' W. on this line bet Secs. 1 & 36.

North Boundary Tp. 1 S.

BOOK-

	Vat 16° 30' E.	
4.50	Hollow drains S.	
13.00	Ridge bears N.E. & S.W.	
21.50	Wash drains S.	4.00
30.00	" " "	8.00
40.00	Set quartzite 12×10×8, 8 in. deep,	18.00
	marked 1 on N. side, with mound	21.00
	of earth from 4 pits each 24×12×12	36.50
	in. for 1/4 sec. cor.	40.00
57.00	Ridge bears N. & S.	
67.50	Gulch drains S.	
73.50	Ridge bears N.W. & S.E.	41.50
76.75	Hollow drains S.W.	44.75
80.00	Set quartzite 15×12×8, 10 in. deep,	65.00
	marked 1 Notch on E. & 5 on W. edges	72.00
	with Stone mound for Cor to Sec.	77.00
	1. 2. 35 & 36.	80.00
	Land, broken;	
	Soil, 2nd rate; No Timber	
	Segmented on 80 ch's.	

BOOK-A-163

N 21 E. [illegible] Shield 244

S 89° 58' W. on true line bet.
Sec. 2 & 35.
Lat 16° 30' E.

4.00 Ridge bears N.E. & S.W.
8.00 Enter hollow flat drains S.
18.00 Road bears N & S. ascend
21.00 Ridge bears N & S.
36.50 Sand stone ledge bears N.E. & S.W.
40.00 Set sand stone 24×12×6, 18in. deep, marked 1/4 on N. side, with stone mound for 1/4 sec cor.
41.50 Wash drains S.W.
44.75 Road bears N.E. & S.W.
65.00 Steep ascend bears N.E. & S.W.
72.00 Ridge bears N.E. & S.W.
77.00 Hollow drains N.
80.00 Set sand stone 24×10×10, 18in. deep, marked 2 notches on E & 4 on W. edges, with stone mound, for cor to Sec. 2. 3. 34 & 35.

112 Sunday, Sp 4 S. R. 2 E.

Land, broken;
Soil, 2nd rate;
Timber Scatt. Cedar
Augmented on 80 ch's.

R 89° 58' W. on true line bet. Sec. 3 & 34
Latt. 30' E.

7.50 Hollow drains N.
28.00 Enter flat hollow drains S.W.
40.00 Set Sand stone 14×8×8, 9 in deep, marked 1/4 on N. side, with mound of earth from 4 pits each 24×12×12 in., for 1/4 Sec. Cor.
50.00 Leave Hollow, around
80.00 Set Sand stone 24×14×4, 18 in. deep, marked 3 Notches on E & W. edges, with stone mound, for Cor. to Sec. 3. 4. 33 & 34.
Land, broken;

Salt Lake Meridian 213

BOOK-A-163

Soil, Indrate;

Timber, Scatt. Cedar

Augmented on 80 chs.

S. 89° 5' W. on Sec. line bet. sec. 4 & 33.
Sat. 30' E.

40,00 In Hollow drains N.W. Set stand stone 14 x 12 x 4, 9 in dup, marked 1/4 on N. side, with mound of earth from 4 pits each 2x x 12 x 12 in for 1/4 sec. cor.

80,00 Set charred Cedar post 4 x 4", 4 ft long, 2 ft dup, marked 4 Notches on E & 2 on W. edges with mound of earth from 4 pits each 2x x 12 x 12 in for Cor. to Sec. 4. 5. 32 & 33.

Land, Broken;

Soil, Indrate;

Timber, Scatt Cedar

Augmented on 80 chs. —

	Lot Boundary Sp 4 R 1 E	Gal
	S. 89° 38' W. on same line bet.	80.00
	Sec. 5 & 32.	
	10 16' 30" E.	
10.00	Set charred Cedar post 4 x 4", 4 ft long, 2 ft deep, marked 1/4 S. on N. side, with mound of earth from 4 pits each 24 x 12, 12 in from 1/4 sec cor. from which	
	A Cedar 18 in dia, bears North 75 lks dist.	
	" " 11 " " " S 30 W. 40 " "	
	Both marked 1/4 S.B.T.	
57.50	Enter Ashley Creek bottom, cotton woods & thick undergrowth	
62.00	Ashley Creek (branch) 20 lks wide, 10 in deep, runs S.W.	20.00
64.00	Another branch 20 lks wide 10 in deep, runs S.W.	40.00
66.00	Main Branch 60 lks wide 10 in deep, runs S.	51.00
71.00	Road bears N & S. around	78.82

Salt Lake Meridian 2 [illegible]

BOOK-A-163

80.00 Set sand stone 14 x 10 x 6, 9 in. deep marked 5 notches on E. and 1 on W. edges, with stone mound for Cor. to sec. 5.6.31. and 32.

Land, mostly broken;
Soil, 2nd rate
[illegible] scott Cedar.

Augmented on 80 chs.

S. 89° 58' W. on true line bet. sec. 6 & 31.

Va 16° 30' E.

20.00 Hollow drains S.E.

40.00 Set quartzite 12 x 12 x 8, 8 in. deep, marked 1/4 on N. side, with stone mound, for 1/4 sec cor.

51.00 Enter Plateau bears N.E. & S.W.

78.82 The cor to Tps 3 & 4 S. R. 20

North Boundary Tp 4 S. R. 24 E.

BOOK-A-163

and 21 E.

Land, broken;

Soil, Sandy;

Timber, Earth Colors.

Augmented on 78.82 chs.

Sept. 23rd 1879.

Note: For Gen. Description

the subdivision of this Tp.

A. L. Freeman

BOOK-A-163

217

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 24 1880

The foregoing field notes of the survey of the

Exterior Boundaries of

Township No 4 S. *Range No* 21 E

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Ferron

Under joint *contract No* 92

of the 13th *day of* June 1879

in the month of Sept. 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

Copied (3) Ex-B-218

BOOK-A-163

163

Filed: Feb 1st 1879

Examined by: T. C. Bailey

Compared by: T. C. Bailey

Field Notes

of

The Survey of the

Subdivisions

of Tp. No. 4 South, Range No. 21 E.

of the Salt Lake Meridian in Utah Ty.

by

Ferron & Buettner

U.S. deputy Surveyors

Under their Joint Contract No. 92

dated June 12th 1879

Survey Commenced: Sept 23rd 1879

" Completed: " 25 " "

Book 163

BOOK-A-163

Exterior Boundaries and Subdivisions

Township 48 **R.** 21 E.

215 214 213 212 211 209

208 6 296 5 278 4 264 3 249 2 233 1

297 295 277 263 247 232

207 7 294 8 275 9 261 10 245 11 230 12

293 292 274 259 244 228

206 18 291 17 273 16 258 15 242 14 227 13

290 289 271 257 241 225

205 19 287 20 270 21 255 22 239 23 224 24

286 285 269 254 238 223

204 30 284 29 268 28 253 27 237 26 222 25

282 281 267 252 236 220

203 31 280 32 266 33 251 34 235 35 219 36

202 201

BOOK-A-163

Survey commenced Sept. 23-79
By
E Buellner
U S Dep Surveyor

N bet secs 35 & 36
Va 16°30' E

40.00 Set Sand stone 10+8+7, 6 in deep marked 1/4 on S side with mound of earth from 4 pits 24+12+12, for 1/4 sec cor

57.50 Wash drains N E
Graveyard bears W, 5 Chs dist

68.25 Wash drains E

80.00 Set Limestone 12+8+7, 8 in deep, marked 1 Notch on S & E edges, with mound of earth from 4 pits 24+12+12 for corner to sections 25, 26, 35 & 36

2 Sec fn Tp 4 S R 21 E

Land Gently Rolling Bench
Soil: 1st Rate
No Timber

E, on Random line bet
Sec 16 30 E
Secs 25 & 36

40.00	Set temp 1/4 Sec cor	22.00
79.86	Intersect E Bdy of Tp	25.00
	20 lks N of Cor to Secs 25 & 36	26.25
	Thence	40.00
	N 89° 51' W on true line bet	
	Secs 25 & 36	
39.93	Set Sand Stone 14 x 10 x 4 g	
	in deep marked 1/4 on N	
	side with mound of earth	
	from 4 pits 24 x 12 x 12 for	
	1/4 Sec cor	
79.86	Cor to Secs 25 26 35 & 36	

BOOK-A-163

Land; Level
Soil; 1° rate
No Timber

N. bet Secs 25 + 26
Va 16° 30' E

22.00 Ditch runs S.E.
25.00 " " E
26.25 Wash drains N.E.
40.00 Set Sandstone 16 + 12 + 4
10 in deep, marked 1/4 on
W side, with mound of
earth from 4 pits 24 + 12
+ 12 for 1/4 sec cor
From which (30 chs
J.J. Clarks House bears N 21.27 W
B Birds " " S 22° E 12 chs
A field 5 Chains E of House

	A. G. Hadlock's Cabin brs S 77.10 17 chs.	
	A. Hulch's House S 38.55 33 chs.	
55.00	Irrigation ditch Chains E	
57.40	Road bears N W & S E	19.70
64.22	Fence bears E & W enter	19.85
	Cultivated field	40.00
74.00	Leave Cultivated land	
80.00	Set Boulder 15+12+8.10 in	
	deep marked 2 notches on	
	Land 1 notch on E edge	80.12
	with mound of earth	
	from 4 pits 24+12+12 ft	
	Cor to Secs 23.24.25+	
	From which	
	J. Clark's House bears S 77° 11' E	40.00
	5 Chains distant	
	Land; Level	
	Soil; Vale	
	No Timber	
		80.12

BOOK-A-163

E on random line bet
Secs 24 + 25
Va 16° 30' E

19.70 Fence bears N & S
19.85 Irrigation ditch runs S.E.
40.00 Set temp 1/4 Sec Cor
T Morrisons House brs S 65° E 2 chs
J Smith " " S 70° W 30 Chs dist
H " " " N 70° W " "
80.12 Intersect E Bdy of Tp 20
Chs S of Cor to Secs 24 + 25
Thence
S 89° 51' W on true line
bet Secs 24 + 25
40.00 Set Boulder 14 + 14 + 8
10 in deep marked 1/4 on
N side with mound of
earth from 4 pits 24
+ 12 + 12 for 1/4 Sec Cor
80.12 Cor to Secs 23. 24. 25 + 26

124 [illegible] Tp 4 S R 21 E

Land; Level
Soil 1st rate
No Timber

N. bet Secs 23 + 24
Va 16° 30' E

8.20	Ditch runs S.E.
22.80	Enter cultivated land
25.50	Road bears N. forks S.W. & S.E.
36.50	Irrigation ditch runs E
40.00	Set land stone 10 + 8 + 7, 6 in deep marked 1/4 on W side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec Cor.
40.40	* Road bears N.W. & S.E.

* From which

BOO

J.

47.77
71.15
77.60
80.00

Borrey bears N 80° 43' W 39 chs
J. Hatch House brs N 60° 38' W 13 chs
A Hatch " " S 21° 56' E 7 chs

47.77 Fence bears E & W
71.15 Wash drains E
77.60 Road bears N W & S E
80.00 Set Sandstone 15 + 12 + 6
10 in deep marked 3
Notches on S and 1 notch
on E edges with mound
of earth from 4 pits
24 + 12 + 12 for cor. to
Secs 13, 14, 23 & 24.
Land; level
Soil; 1st rate
No Timber.

E on random line bet.
Secs 13 & 24

Va 16° 30' E

.20	Road bears N & S W	
40.00	Set lamp 1/4 Sec cor	8.50
55.80	Irrigation Canal runs S E	
73.00	Road bears N W & S E	4.35
80.20	Intersect E Bdy of Tp	18.00
	Cor to Secs 13 & 24	
	Thence	19.10
	N on true line bet	32.00
	Secs 13 & 24	
40.10	Set Sandstone 12 & 8 & 6	
	o in Deep marked 1/4 on	37.20
	W side with mound of	40.00
	earth from 4 pits 24 & m	
	for 1/4 Sec cor	
80.20	Cor to Secs 13, 14, 23 & 24	
	Land; level	43.00
	Soil; 1st rate	
	No Timber	
		80.00

BOOK-A-163

N; bet Secs 13 & 14
Va 16° 30' E

8.50	S.W. Cor of fenced field 3 Chains E.
14.35	Irrigation Canal Runs E
18.00	N.W. Cor. of fenced field 3 Chains E.
19.10	Road bears W. & S.E.
32.00	Branch of S. fork of Ashley Creek 25 lks wide 12 in deep Runs E.
37.20	Road bears N.W. & S.E.
40.00	Set Sandstone 12 & 8 & 7 8 in deep marked ¼ on W. side with stone mound (pits imp) for ¼ Sec. cor.
43.00	Branch of S. fork of Ashley Creek 18 lks wide 10 in deep Runs E.
80.00	Set Cobble stone 14 & 10 & 10

9 in deep, marked 4
notches on S, and 1 notch
on E, edges for cor, to secs
11. 12 13 & 14. (with stone
mound, pits imp).
From which
Beatty's House bears N 51° 45' E
A Taylor's " " N 50° 40' W
Land, level
Soil, 1st rate
No Timber

E, on random line
bet secs 12 & 13
Va 16° 30' E
16.00 Road brs N W, & S E.
22.00 " " N, & S,
From this point

22.15
30.50
38.00
40.00
58.00
80.00
40.00

BOOK-A-163

Beatty's house bis N 51° 45' E
Jones " " N 27° W 24.50 Chs dist
A Taylors " " N 71° W
32.15 Fence bears N & S
30.50 Slough bears N & S.
38.00 Fence bears N & S
40.00 Set temp 1/4 Sec Cor
58.00 Branch of N, Fork of Ashley
Creek 30 lks wide 12 in
deep runs S. E.
Enter thick underbrush
80.00 Intersect E, Bdy, of Tp,
at Cor, to Secs, 12 & 13
Thence
W, on true line bet
Secs, 12 & 13,
40.00 Set Cobble Stone 12 & 10 & 7
8 in deep marked 1/4 on
N, side with Stone mound
(pits imp) for 1/4 Sec, Cor,

80.00	Cor, to Secs, 11.12.13 & 14	40.50
	Land level,	
	Soil, 1st Rate,	
	No Timber,	72.00
Undergrowth	Augmented on 22 Chains	73.25
		76.00
		80.00

	N, bet, Secs, 11 & 12 —
3.50	Road bears N.E. & S.W.
8.25	" " N.W. & S.E.,
	Enter thick undergrowth
31.00	Branch of N, fork of Ashley
	Creek 40 lks, wide 10 in, deep
	Run E,
40.00	Set Sand stone 12 x 8 x 5
	8 in, deep. marked 1/4 on
	W, side with stone mound
	(Pits imp.) for 1/4 Sec, cor,

40.50	Branch of N. fork of Ashley Creek 30 lks wide, 12 in deep Runs E.
72.00	Leave thick undergrowth
73.25	Fence bears N.W. & S.E.
76.00	Road bis, N.W. & S.E.
80.00	Set Charred Cottonwood post 4"x4", 4 ft long, 2 feet deep marked 5 notches on Sand 1 notch on E edges with mound of earth from 4 pits 24x12x12 for cor to secs 1.2 11 & 12

Land; level
Soil; 1st rate
No Timber
Augmented on 63.75 Chs.

232 Tp 4 S R 21 E

BOOK

E, on random line
bet, secs, 1 & 12
Va 16° 30' E,

19.50	Hollow drains S.E.	
40.00	Set temp 1/4 sec cor	
62.50	Leave flat & ascend	
80.10	Intersect E, Bdy, of Tp, at Cor, to secs, 1 & 12,	13.00
	Thence	40.00
	W, on true line bet, secs, 1 & 12	65.00
		93.00
40.05	Set Cobble stone 10 & 10 & 6 6 in deep, marked 1/4 on N, side, with mound of stones and earth from 4 pits 24 & 12 & 12 for 1/4 sec, cor,	80.10
		40.00
80.10	Cor, to secs, 1. 2. 11 & 12	
	Land, mostly level,	
	Soil 1st rate,	
	No Timber,	

Mill Lake Meridian

Augmented on 17.60 Chain

N, on random line
bet Secs 1 & 2
Va 16° 30' E

13.00 Road bears N W, & S. E,
40.00 Temp 1/4 Sec, cor,
65.00 Enter Hills,
93.00 Hollow drains S W,
80.10 Intersect N, B'dy, of Tp,
19 lks, E of cor, to Secs,
1 & 12 — Thence
S, 00° 08' E, on true line
bet, Secs, 1 & 2,
40.00 Set charred Cottonwood
post 4" + 4" 4 ft long
2 feet deep, marked 1/4
on W, side with mound

of earth from + pits
24+12+13 for 1/4 sec, cor
80.10 Corner to secs, 12 11 + 13
Land, Mostly level,
Soil; 1st rate,
No Timber,
Augmented on 15.10 Chs,

E. Buettner
U.S. Dep Surveyor
Sept 23rd 1879

BOOK

11.00
26.00
40.00

54.70
80.00

BOOK-A-163

Sept 24th 1879

By

A D Ferron

U S Dep Surveyor

W, bet, Secs, 34 & 35,
Va, 16° 30' E,

11.00 Wash drains N E,

26.00 " " E

40.00 Set Sandstone 11 & 9 & 6
7 in, deep marked 1/4
on W, side with mound
of earth from 4 pits
24 & 12 & 12 for 1/4 Sec, cor,

54.70 Wash drains E

80.00 Set limestone 14 & 6 & 6
9 in, deep marked 1
notch on S, and 2 notches
on E, edges, with mound
of earth from 4 pits

24+12+12 for cor, to Secs
26.27.34+35
Land, Level
Soil, 1st rate
No Timber

E, on random line
bet Secs 26+35
Va 16°30'E
40.00 Set temp 1/4 Sec cor
80.00 Intersect N & S line
at cor to Secs 25.26.35+36
Thence
W, on true line bet, Secs, 26+35
40.00 Set limestone 15+12+4
10 in deep marked 1/4 on
N side with mound of
earth from 4 pits 24+12+12
for 1/4 Sec cor,

BOOK-A-163

80.00	Cor, to Secs, 26, 27, 34-35
	Land, level,
	Soil, Wale,
	No Timber
	N, bet Secs, 26 + 27
	Va, 16° 30' E,
23.90	Wash drains E,
40.00	Set Sandstone 10 + 10 + 5
	7 in deep marked 1/4 on
	W, side with mound of
	earth from 4 pits 24
	+ 12 + 12 for 1/4 Sec, cor,
75.00	Wash drains E,
80.00	Set Sandstone 12 + 10 + 8
	8 in deep marked 2 notches
	on South & East edges with
	Mound of earth from 4

BOOK-A

Bis 24+12+12 for cor
to Secs 22.23.26-27
From which
A J Johnson's House brs N 41 W 27 Chs
D " " " N 25 W 26.50
A Shed bears N 20.45 W 22 Chs
Land: level
Soil: 1 Vale
No Timber

E, on Sandom line
bet, Secs, 23 & 26,
Va, 16° 30' E,

20-30	Irr ditch pass S W,
37.00	Road brs N W & S E,
40.00	Set temp 1/4 Sec cor
60.70	Fence brs N & S
68.15	Road brs, N & S,

70.85
80.16
40.08
80.16
12.85

BOOK-A-163

70.85	Road bears N. N. & S. E.
80.16	Intersect N. & S. line 22 Chs. S. of Cor. to Secs. 23.24.25 & 26
	Thence
	S 89° 51' W. on true line bet. Secs. 23 & 26,
40.08	Set Sandstone 20 + 13 + 6 15 in deep marked 1/4 on N. side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec. Cor.
80.16	Cor. to Secs. 22.23.26 & 27
	Land: level,
	Soil: Water,
	No Timber,
	N. bet. Secs. 22 & 23,
	Va. 16° 30' E.
12.85	Road bears N. N. & S. E.

240 [illegible] 21 E

14.00	Ditch runs E,
18.40	Fence bis, E & W, enter cultivated land,
30.90	Fence bis, E & W, leave cultivated land
31.00	Road bears E & W,
34.20	Canal runs E,
40.00	Set charred pine post 4"+10" 4 ft long 2 feet deep marked 1/4 on W, side with mound of earth from 4 pits for 1/4 Dec, cor,
56.00	Road bears E & W,
74.00	Fence runs E & W,
80.00	Set Cobble stone 14 + 8 + 6 9 inches in ground marked 3 notches on S, and 3 notches on E, edges, with mound

BOOK

6.0
10.9
17.3
30.5
36.0

BOOK-A-163

of earth from 4 pits
24 + 12 + 12 for cr, to
Secs, 14. 15. 22 + 23
From which
Keestone's House brs, S, 48° W,
15 Chs, distant,
Land; Level,
Soil; 1st rate,
No Timber,

E, on random line
bet, Secs 14 + 23
Va, 16° 30' E

6.00	Fence brs, N, + S, leave field
10.90	Dry bed drains S. E
17.30	" " " N. E
30.50	" " " S. E
36.00	Road bears N. N, + S. E

Tab^n Tp 4 S R 21 E

BOOK-A

40.00	Set lamp, 1/4 Sec cor,	21.00
79.82	Intersect N & S line at	24.15
	Cor, to Secs, 13.14.23 & 24	26.20
	From which	
	Id, on true line bet, secs, 14 & 2	40.00
39.91	Set Cobble stone 14 & 10 & 6	
	9 in deep, marked 1/4	
	on N, side with mounds	
	of earth from 4 pin	
	24 & 2 & 2 for 1/4 Sec, cor,	53.00
79.82	Corner to secs 14.15.22 & 23	73.00
	Land, level,	
	Soil, 1st Sale,	
	No Timber,	80.00

N, bet, Secs, 14 & 15,
Dec, 16° 30' E,

9.00	Fence bs, E & W, leave field	

BOOK-A-163

21.00	Canal runs E,
24.15	Road brs E & W.
26.20	Branch of Creek 20 lks, wide 18 in deep runs E,
40.00	Set Sandstone 16 + 8 + 6 10 in deep, marked 1/4 on W side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 sec, cor,
53.00	Road brs, E & W.
73.00	S fork Ashley Creek 35 lks, wide 12 in deep runs E, enter thick undergrowth,
80.00	Set Cobble stone 12 + 8 + 7 with marked 4 notches on S + 2 notches on E edges with stone mound for cor to secs, 10. 11. 14 + 15

From which

J. Taylor's House brs N 48° 45' E 38 Chs dis

BOOK-

A Cedar bis, N, 23° E 22.50 Chs, dist
J. Kelly's House bis N 45 W 41.50 " "
Land level
Soil 1st rate
No timber
Augmented on 7 Chain

E, on random line
bet, secs, 11 & 14
Dec, 16 30 E,

19.50	Road bears N, & S,	
	Leave thick undergrowth,	
21.50	Main road bears N W & S E,	
25.25	Fence bears N, & S,	
40.00	Set temp 1/4 sec cor	
66.85	Fence bears N & S	
78.00	Road bears N E & S W,	9.60
80.08	Intersect N, & S, line at	9.60

40.04

80.08

cor, to Secs, 11. 12. 13 & 14

Thence

W, on line bet, Secs, 11 & 14,

40.04 Set Cobble stone 12 x 10 x 8

8 in deep marked 1/4 on

W, side with mound of

earth from 4 pits 24 x

12 x 12 for 1/4 Sec, cor,

80.08 Corner to Secs, 10. 11. 14 & 15

Land; level,

Soil; 1st rate,

No timber,

Augmented on 19.50 Chains

N, bet, Secs, 10 & 11,

Va, 16° 30' E,

9.10 Lease thick, underground,

9.60 Road bears N W, & S E,

BOOK-A

9.70	Fence bs, E & W.
23.65	Ditch runs E,
26.50	Enter thick undergrowth
33.85	Branch of N, fork of Ashley Creek, 16 lks wide 10 in deep runs E,
34.00	Fence bears E, & W.
40.00	Set sandstone 10 + 10 + 7 6 in deep marked 1/4 on W, side with stone mound for 1/4 sec, cor,
42.00	Branch of Ashley Creek 10 lks, wide 10 in deep runs E,
64.00	Branch of Ashley Creek 30 lks wide 12 in deep runs E,
80.00	Set sandstone 14 + 10 + 8 9 in deep marked 5 notches on S, and 2 notches on E.

20.70
35.60
37.50
40.00
41.50
43.50
60.50

edges with mound of earth
from 4 pits 24+12+12 for
cor to secs 2. 3. 10 & 11
Land; level
Soil; 1st rate
No timber
Augmented on 63.10 Chs

E, on random line
bet, secs, 2 & 11
Va 16° 30' E.

20.70	Leave thick undergrowth,
35.60	Road bears N & S,
37.50	J Thos' House bs S 15° 45' E 5 Chs dist
40.00	Set temp 1/4 sec cor
41.50	Fence bears N E & S W
43.50	" " N W & S E
60.50	Road " N E & S W

BOOK-A-

65.00	Fence bs N E & S W,	
70.00	" " N W & S E,	
75.50	Road " N W & S E,	
80.30	Intersect N & S line	9.50
	40 Ps, S, of Cor, to Secs,	10.65
	1.2.11 & 12.	25.00
	Thence	35.00
	S, 89° 43' W, on true line	37.75
	bet, Secs, 2 & 11	40.00
40.15	Set Sandstone 14 & 10 & 6	60.50
	qu deep marked	72.00
	1/4 on N, side with	74.00
	mound of earth from	80.50
	4 pits 24 & 12 & 12 for	
	1/4 Sec, cor,	
80.30	Cor, to Secs. 1.2.11 & 12	
	Land, Level,	40.50
	Soil 1st Rate,	
	No Timber,	
	Augmented on 20.70 Chs.	

BOOK-A-163

N, on random line
bet, secs, 2 & 3
Dec, 16° 30' E,

9.50	Cave thick undergrowth,
10.65	Ditch runs E,
25.00	Enter swamp,
35.00	Cave "
37.75	Road bears N E, & S W,
40.00	Set temp ¼ sec cor
60.50	Enter Hills N E & S W.
72.00	Ridge bears N E, & S W,
74.00	Hollow drains N. E.
80.50	Intersect N, Bdy, of Tp, at cor, to secs, 2 & 3,

Thence

S, on true line bet, secs, 2 & 3

40.50	Set limestone 14 & 12 & 5 9 in deep marked ¼ on W, side with mound of earth from 4 pits 24 &

2.50 [illegible]

81.50	12 + 12 for Mr Lee, cor, Dr, [illegible] 2, 3, 10 + 11, Land; mostly level, Soil Plate, No Timber, Augmented on 29 so Chains
	A. D. Fenon U S Dep Surveyor Sept 24th 1879

BOOK-A

28.00

40.00

57.70

62.00

80.00

BOOK-A-163

Sept 24th 1879

By

E Buellner

U S Dep Surveyor

N, bet. secs, 33 & 34

Va 16° 30' E,

28.00 Wash drains N. E

40.00 Set limestone 10 & 8 & 6. 7 in deep marked 1/4 on N, side with mound of earth from 4 pits 24 & 12 & 12 for 1/4 sec, cor,

57.70 Wash drains N. E,

62.00 " " E,

80.00 Set sandstone 14 & 8 & 6. 9 in deep marked 1 notch on S & 3 notches on E, edges with mound of earth from 4 pits 24 & 12 & 12 for cor, to secs. 27. 28. 33 & 34

252 [illegible] Sp 4 R 21 E

Land: Level
Soil: 1st rate
No Timber

E, on random line
bet, secs, 27 & 34
Va, 16° 30' E,

20.00 Wash drains N. E,
40.00 Set Temp, 1/4 sec cor,
79.94 Intersect N. S, line 16
lks, N, of cor, to secs 26. 27
34 & 35,

Thence
N, 89° 53' W, on true line
bet, secs, 27 & 34,
39.97 Set limestone 10 & 8 & 8
6 in deep marked 1/4 on
N, side, with mound of

BOOK-

79.94

40.00

52.00

80.00

BOOK-A-163

earth from 4 pits 24+12+12
for 1/4 Sec, cor,

79.94 Cor to Secs 27.28.33+34
Land; level,
Soil; 1st rate,
No Timber,

N, bet, Secs, 27+28
Va, 16 30 E,

40.00 Set limestone 20+10+3
15 in deep marked 1/4 on
W, side with mound of
earth from 4 pits 24+
12+12 for 1/4 Sec, cor,

52.00 Dark drains N. E.

80.00 Set Sandstone 10+8+7. 6
in deep marked 2 notches
on S, + 3 notches on E, edges

	with mound of earth	40.00
	from 4 pits 24+12+12	
	for cor, to secs, 21.22.27.28	
	Land; level,	
	Soil 1st rate,	
	No Timber,	80.00
	E, on random line	
	bet, secs, 22+27	
	Va, 16° 30' E,	
13.30	Wash drains S.E,	
40.00	Set Temp, 1/4 sec, cor,	3.70
47.00	Wash drains S.E.	13.00
63.00	Road bears N.E & S.W,	18.50
80.00	Intersect N & S line at	40.00
	cor, to secs, 22.23.26+27	
	Thence	
	W, on true line bet, secs, 22+27	

BOOK-A-163

40.00 Set Sand stone 12+12+8
8 in deep marked 1/4 on
W side with mound of
earth from 4 pits [illegible]
+12 for 1/4 sec cor

80.00 Cor to secs 21.22 27 28
Land; level,
Soil; 1st Rate,
No Timber,

N; bet secs 21+22
Va 16° 30' E,

3.70 Wash drains S.E,
13.00 Road bears E+W,
18.50 Wash drains E,
40.00 Set Charred pine post
4"+4" 4 ft long 2 ft deep
marked 1/4 on W side with
mound of earth from 4

Set 24+12+12 for 1/4 sec cor

68.50 Road bis N W, + S E.

73.00 Road " E + W,

80.00 Set Limestone 15+7+6

10 in deep, marked 3

notches on S + E, edges

with mound of earth

from 4 pits 24+12+12

for cor, to secs 15.16 21+22

From which

A Cabin bis S 49° E 7 20 Chs dist

" " " N 49.58 W 68 " "

" " " N 43 11 W 61.50 " "

Land: Level

Soil 1st rate

No Timber

E on random line

BOOK-

15 10

15 25

26 90

40.00

50.00

66 10

66 50

79 92

39.96

79.92

bet, secs, 15 + 22.

Va, 16° 30' E,

15.10 Canal runs S,

15.25 Road bis N W, & S E,

26.90 " " N, & S,

40.00 Set Comp. 1/4 Sec, cor,

50.00 Road N & S W

66.10 Road bis N E, & S W,

66.50 Fence " N & S,

79.92 Intersect N, & S, line at cor, to secs, 14-15-22 & 23

Thence

N, on line line bet, secs, 15 - 22

39.96 Set Boulder 12 + 7 + 6, 8 in deep marked 1/4 on N side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec, cor,

79.92 Cor, to secs, 15.16.21 + 22

Land; level,

Soil; 1 rate,

No Timber,

BOOK

N. bet. Secs 15 & 16
Vu, 16° 30' E,

10.40	Road brs, N.W. & S.E.	
20.70	Dr. Canal runs S.E.	
22.80	Road brs, N.W. & S.E.	
29.30	Wash drain E,	
40.00	Set Charred Cedar post 4"+4" 4 ft long 2 ft deep marked 1/4 on W side with mound of earth from 4 pits 24+12+12 for 1/4 sec. cor.	
40.20	Road brs, E. & W.	
41.85	Fence " " " enter field	00.80
48.65	" " " " leave "	
48.75	Branch of Ashley Creek 10 lks wide 10 in deep runs S.E.	7.50
76.00	Branch of Ashley Creek 40 lks wide 10 in deep runs S.E.	13.00
80.00	Set Cobble stone 13+8+7	16.50

BOOK-A-163

9 in deep marked 4 notches on S, and 3 notches on E, edges, with stone mound, for cor, to secs, 9. 10. 15 & 16,

Land; level,
Soil 1st rate,
No Timber;

E, on random line
bet, secs, 10 & 15,
Va, 16° 30' E,

00.80 Branch of Ashley Creek 20 lks, wide 10 in deep runs S E,

7.50 Branch of Ashley Creek 20 lks, wide 10 in deep runs S. E,

13.00 Branch of Ashley Creek, 20 lks, wide 10 in, deep runs S. E,

16.50 Branch of Ashley Creek 20 lks,

	wide 10 in deep runs S E,
19.75	Branch of Ashley creek 20 lks
	wide 10 in deep runs N E,
20.00	Enter thick undergrowth
33.25	Bend of Creek 75 Chs wide
37.75	S, fork of Ashley Creek 75
	lks, wide 15 in, deep runs S E
40.00	Set temp 1/4 sec, cor,
80.10	Intersect N, & S, line at
	Cor, to secs, 10. 11. 14 & 15
	Thence
40.05	Set Cobble stone 18 & 10 & 6
	12 in deep marked 1/4 on
	N, side with stone mound
	for 1/4 sec, cor,
80.10	Cor to secs 9. 10. 15 & 16
	Land, level,
	Soil: 1st rate,
	No Timber,
	Augmented on 60.10 Chs,

BOOK-A

BOOK-A-163

S.E.
20 Ch
N.E.
worth
wide
k 75
ms S.E.
at
15
+10+6
/10 on
norm
+16
Chs.

N. bet. Secs. 9 & 10.
Va. 16° 30' E.
10.95 Branch of Ashley Creek
20 Chs wide, 10 in deep runs
S.E.
12.00 Branch of Ashley Creek 20
Chs, wide 10 in deep runs S.
24.75 Branch of Ashley Creek 10
Chs, wide 6 in deep runs E.
30.00 C. Bentley's house bears
N. 67.34 E. 1.60 Chains distant.
C. Bentley's Blacksmith shop
bears N. 28°35' E. 6.83 Chs. dist.
Gibson's Stone bears N. 49°42' E
9.21 Chains distant
Britt's Stone N. 63°40' E.
13.63 Chains distant,
W. Hufaker's house bears
N. 43°15' E. 11.73 Chs dist.
A. Rubin bro. N. 36° E. 11.50 Chs. dist.

36.85	Salt Lake & Uintah road bears E & W.
40.00	Set Sandstone 12 + 10 + 6 8 in deep marked 1/4 on W, side, with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec, cor.
50.00	Dry bed drains E.
58.00	Ashley Creek 30 lks wide 10 in deep runs E.
62.00	Fence bears E & W
67.00	" " N 5° E,
70.00	Dry bed drains E enter thick undergrowth,
80.00	Set Sandstone 20 + 15 + 8 15 in deep marked 5 notches on S and 3 notches on edges with mound of earth from 4 pits 24 + 12 + 12 for cor, to secs, 3 4 9 & 10

BOOK

11.85
17.00
31.50
40.00
42.00
54.50
59.50
65.00

BOOK-A-163

Land; Level
Soil; 1st Rate
No Timber
Augmented on 10 Chains

E on random line
bet 3 & 10
Va 16°30' E,

11.85	Road bears N E & S W
17.00	Enter Swamp,
31.50	Branch of Ashley Creek, 100 lks wide, 3 ft deep runs N E
40.00	On edge of Swamp,
	Set temp 1/4 sec cor,
42.00	Fence bears N E & S W.
54.50	Cease thick undergrowth,
59.50	Fence bears N E & S W
65.00	Enter thick undergrowth

BOOK-A

80.00	Intersect N. & S. line at	4.28
	Cor. to Secs. 2.3.10 + 11	11.50
	Thence	
	W. on true line bet. secs. 3 + 10	17.00
40.00	Set Chained Cedar post	40.00
	4" + 4" 4 ft long 2 ft deep	44.00
	Marked 1/4 on W. side	70.00
	with mound of earth	80.42
	from 4 pits 24 + 12 + 12	
	for 1/4 sec. cor.	
80.00	Cor. to Secs. 2.3.10 + 11	
	Land; level,	
	Soil Peat;	40.42
	No Timber,	
	Augmented on 69.50 chain	
		80.42
	W. on random line	
	Bet. Secs. 3 & 4	
	Va 16° 30' E	

BOOK-A-163

4.28	A Collinwood 24 in. dia,
11.50	leave thick underground
	enter Hills.
7.00	Ridge bears N.W. & S.E.
40.00	Set temp ¼ Sec, cor,
44.00	Enter wide hollow,
90.00	Enter Cedars Ascend.
80.42	Intersect N, Bdy, of Tp, 18
	lks, E, of cor, to Secs, 3 & 4
	Thence
	S. 00°.08' E. on Ave line
	Bet, Secs, 3 & 4
40.42	Set Sandstone 20+12+12, 15
	in deep, marked ¼ on W
	side with stone mound
	for ¼ Sec, cor,
80.42	Cor, to Secs, 3, 4, 9 & 10
	Land; mostly Mt,
	Soil. 1st Rate,
	Timber; Scattering Cedar,
	Augmented on 80.42 Chains

E. Buttner
U.S. Dep. Surveyor
Sept 24th 1879

by A. D. Ferron
Sept 25th 1879

N, bet Secs, 32 & 33
Sa, 16°30' E,

10.00	Low Ridge bears E & W,
14.50	Dash drs N.E. enter Cedar
35.00	Cedars,
40.00	Ridge bears E & W,
	Marked Stationery Sand
	Stone 3 ft, & 2 ft, & 2 ft, 1/4 on
	W, side with stone mound
	for 1/4 sec, cor,

BOOK-A-163

7.50	Cash drains N E outer flat,
2.50	Cease cedars
0.00	Set Sandstone 16+10+6, 10 in deep marked 1 notch on S, and 4 notches on E, edges with mound of earth from 4 pits 24+12+12 for Cor, to Secs, 28.29.32+33, Land: Broken, Soil: 1+3 rate, Timber, Scattering Cedar, Augmented on 48 Chains
	E, on random line Bet Secs 28+33 Va 16° 30' E
0.00	Set temp for Sec cor. in Cash drains N E.

Tw^n Sp 4 S R 21 E

80.50	Intersect N, & S, line at Cor, to Secs, 27.28.33 & 34
	Thence
	W, on true bet, Secs, 28 &
40.25	Set Sandstone 10 + 10 + 6 6 in deep marked 1/4 on N, side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec, Cor
80.50	Cor to 28.29.32 & 33, Land; level, Soil; 1st rate, No Timber.
	N, bet, Secs, 28 & 29 Va, 16° 30' E,
26.50	Wash drains N. E.
40.00	Set Sandstone 12 + 8 + 7 8 in, deep marked 1/4

BOOK-A-

on
of
+ 1
80.00 Set
in
on
ed
ed
for
40.00
80.00

on W, side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 sec, cor,

80.00 Set limestone 12 + 10 + 8. 8 in deep, marked 2 notches on S and 4 notches on E edges with mound of earth from 4 pits 24 + 12 + 12 for cor, to secs, 20. 21. 28 + 29

Land level,
Soil 1st rate,
No timber,

E, on random line bet, secs, 21 + 28
Va, 16° 30' E,

40.00 Set lamp, 1/4 sec, cor,

60.00 Intersect N, + S, line 17 lks, N, of cor, to secs, 21 + 28

Thence

N, 89° 53' W, on line

Bet, Secs, 21 + 28

40.05 Set Sand stone 15 + 12 +

10 in deep marked 1/4

on N, side with mound

of earth from 4 pits

24 + 12 + 12 for 1/4 Sec,

80.10 Cor, to Secs, 20 21 28 + 2

Land; level,

Soil; 1st Rate,

No Timber)

N, bet Secs, 20 + 21

Va, 16 30' E,

34.15 Wash drains S.E.

40.00 Set limestone 20 + 14 + 4

15 in deep marked 1/4

W, side with mound

BOOK-A-163

Lake Meridian

earth from 4 pits 24
+12+12 for 1/4 sec, cor,
45.35 Wash drains E,
70.50 Road bears N.W. & S.E.
75.30 " " E & W
80.00 Set Sandstone 14+8+5
9 in deep marked 3 notches
on S and 4 notches on E
edges with mound of
earth from 4 pits 24+12+12
for cor, to secs, 16.17.20-21
Land level
Soil 1st rate,
No Timber.

E on random line
bet, secs, 16 & 21
Va, 16°30' E,

BOOK-A-16

40.00	Set temp, 1/4 Sec, cor	20.20	
80.24	Intersect N & S, line 21	4.00	
	S of cor, to secs 15.16.21	10.00	
	Thence		
	S 89° 31' N, on line		
	bet, secs, 16 & 21		
40.12	Set Sandstone 10 & 10 &		
	6 in deep marked 1/4	6.50	
	N side with mound	17.50	
	Earth from 4 pits 24 & 12	18.10	
	for 1/4 Sec, cor,	8.00	
80.24	Cor, to secs, 16.17.20 & 21		
	Land, level,		
	Soil 1st Sale,		
	No Timber,		
	N, bet, secs, 16 & 17		
	Va, 16° 30' E,		

20.20	Wash drains E.
4.00	Wash drains S.E.
10.00	Set Sand Stone 12+10+6 8 in deep marked 1/4 on W. side with mound of earth from 4 pits - 24+12+12 for 1/4 sec. cor.
6.70	Road brs. N. W. & S. E.
7.30	Wash drains S.E.
8.10	Road bears N.E. & S.W.
8.00	Set Cobble Stone 13+9+8 9 in deep marked 4 notches on S. & E. edges with mound of earth from 4 pits - 24+12+12 for cor. to secs. 8. 9. 16 & 17

From which

A. Cabin brs S 61.10 W. 22.50 Chs dist

" " " S 71.35 W 47.25 " "

Land; Level
Soil; 1st Rate
No Timber

E, on random line
bet Secs 9 & 16
Va, 16° 30' E,

2.50	Road bears N.E. & S.W.
8.00	Canal runs S.E.
21.00	Road bears N.W. & S.E.
35.00	" " " " " "
38.00	" " " N. & S.
40.00	Set temp ¼ Sec cor.
44.55	S. fork of Ashley Creek 20 lks wide 10 in deep runs S.E.
78.00	S. fork of Ashley Creek main branch 40 lks wide 10 in deep runs S.E.

BOOK-A-16

0.18 Intersect N.S. line at cor, to secs, 9. 10. 15 + 16
Thence
W, on true line bet
Secs, 9 + 16,
0.09 Set Cobble stone 18 + 10 + 8
13 in deep marked 1/4 on
N. side with mound of
earth from 4 pits 24 + 12
+ 12 for 1/4 Sec, cor,
0.18 Cor, to secs, 8. 9. 16 + 17
Land; level,
Soil; 1st rate,
No timber,

N. bet, Secs, 8 + 9
Va 16° 30' E.
.60 Canal Gems S.E.

BOOK-A-16

13.00	Canal runs S.E.
18.00	Road bears N.W. S.E.
35.80	S. fork Ashley Creek 25 lks w 12 in deep runs S.E.
40.00	Set Sandstone 15+12+8. 10 in deep marked 1/4 on W. sec with stone [illegible] 1/4 sec. cor.
	From which
	House & field br. S. 75° W. 24 lks d
40.35	S. fork Ashley Creek, main bra 25 lks, wide 12 in deep runs S
45.80	Road bears N. 80° E.
52.00	Fence E & W enter field
57.00	Fence bears E & W. leave [illegible] N. fork Ashley Creek 15 lks wide 12 in deep runs E. enter thick undergrowth
68.00	Enter hills, E. W.

0.00	Set Cobble stone 16 x 12 x 3 10 in deep marked 5 notches on S, and 4 notches on E, edges for with stone mound for cor, to secs 4 5 8 9
	Land level
	Soil 1st Rate
	No Timber
	Augmented on 23 Chains
	E, on random line bet secs 4 & 9
	Va 16° 30' E,
7.00	Enter flat,
0.00	Set temp ¼ sec, cor,
2.00	Enter thick undergrowth,
0.20	Intersect N & S line at cor,

BOOK-A-163

to Sees 3.4 9 & 10

Thence

W. on true line bet Sees 4 & 5

40.10 Set Cedar post 4"x4" 4 ft long 2 ft deep marked 1/4 on N. Side, with mound of earth from 4 pits 24 x 12 x 12 for 1/4 Sec. Cor.

80.20 Cor. to Sees, 4.5 8 & 9

Land; Level & Dry

Soil 1st & 3rd rate

Timber; Scattering Cedar

Augmented on 55.20 Ch

N. on random line bet Sees, 4 & 5

Var. 16° 30' E.

2.00	Enter Hollow drains S W
1.00	Cease "
0.00	Bridge lrs, N E & S W,
	Set temp 1/4 Sec cor
0.50	Hollow drs S W
0.10	Intersect E, Bldg of Ps,
	21 lks, W of Cor to Secs, 4 & 5
	Thence
	S 88 09 W, on true line
	bet, Secs 4 & 5
0.10	Set limestone 16 + 12 + 5
	10 in deep marked 1/4 on
	W, side, with stone mound
	for 1/4 Sec, cor,
0.10	Cor, to Secs, 4.5.8 & 9,
	Land; Mt,
	Soil 3rd rate,
	Timber Scattering Cedar
	Augmented on 80.10 Chains

Sept 25th 1879
A. D. Ferron
U S Dep Surveyor

Sept 25th 1879
By E. Buettner
U S Dep Surveyor

N bet secs 31 & 32
Va 16° 30' E

5.00 Hollow drains S.W.
40.00 Set sandstone 10 & 8 & 6 6 in deep marked 1/4 on W. side with stone mound for 1/4 sec, cor.

BOOK-A-16

60.50 Va
8.50 Dia
0.00 Set
8 in
m
E, c
Cart
for

Sink
Au

E

9.00 Va
40.00 Se

Salt Lake Meridian

60.50 Varine drains S.E.
68.50 Ridge bears N.W. & S.E.
80.00 Set Sandstone 12+12+8
8 in deep marked 1 notch
on S, and 5 Notches on
E, edges with mound of
earth from 4 pits 24+12+12
for cor, to Secs, 29 30 31 & 32
Land Mt,
Soil 3rd rate.
Timber Scattering Cedar,
Augmented on 80 Chains.

E, on random line
Bet, Secs, 29 & 32
Va, 16° 30' E,
9.00 Wash drains S.E, bare hills,
40.00 Set temp 1/4 Sec, cor,

52.00	Wash drains N. E.
79.92	Intersect N, & S, line at cor to secs, 28. 29. 32 & 33
	Thence
	W, on true line bet, secs, 29 & 32
39.96	Set sandstone 12 & 8 & 7. 8 in deep marked 1/4 on N, side with mound of earth from 4 pits 24 & 12 & 12 ft 1/4 sec, cor,
79.92	Cor, to secs, 29. 30. 31 & 32
	Land, Mostly level,
	Soil, 1st Sale,
	No Timber,
	Augmented on 9 chains
	W, on random line
	Bet, secs, 30 & 31
	Va, 16° 30' E,

Salt Lake Meridian

20.00	Ridge bears N. & S.,
40.00	Set temp, 1/4 sec, cor,
55.00	Hollow drains S. E.,
70.00	Ridge bears N. & S.,
79.32	Intersect N. Bdy of Tp, at cor, to secs, 30 & 31,
	Thence
	E. on true line bet, secs, 30 & 31,
39.32	Set Limestone 12 & 10 & 8. 8 in deep marked 1/4 on N. side with mound of earth from 4 pits for 1/4 sec, cor. —
79.32	Corner to secs, 29 30. 31 & 32,
	Land: Mt,
	Soil 3rd Rate,
	No Timber,
	Augmented on 79.32 Chains,

BOOK-A-163

N. bet. Secs. 29 & 30
Da. 16° 30' E.

5.00 Hollow drains S.E.
22.00 " " " E.
36.00 " " " "
40.00 Set Sandstone 20 x 12 x 4
13 in deep marked 1/4 on
W. side, with mound of
earth from 4 pits for
Sec. cor.
54.00 Hollow drains E.
80.00 Set Sandstone 12 x 12 x 8
in deep marked 2 notches
on South & 5 notches on East
edges with mound of earth
from 4 pits 24 x 12 x 12 for
cor. to Secs. 19. 20. 29 & 30
Land: Broken.
Soil: 3rd rate.

Avg

E

18.00 E
40.00 Se
19.85 Su
N.
N.
39.92 Se
d
Se
f
19.85

No Limiter
Augmented on 80 Chains

E, on random line
bet secs 20 & 29
Dec 16° 30' E

18.00 Enter flat,
40.00 Set temp 1/4 sec, cor,
19.85 Intersect N. S. line 27 lks,
N, of cor, to secs, 20. 21. 28 & 29,
Thence
N, 89° 48' W, on true line
bet, secs, 20 & 29,
39.92 Set sandstone 12 & 8 & 8 8 in,
deep marked 1/4 on W,
side with stone mound
for 1/4 sec, cor,
19.85 Corner to secs, 19. 20. 29 & 30,

Land, mostly level
Soil 2 rate
Timber Scattering Cedar on W, pa
Augmented on 18 Chain

W, on random line
bet, secs, 19 & 30 -
Va, 16° 30' E,

14.00	Hollow drains S E,
27.50	" " "
36.00	Coal & Asphaltum rein
	10 ft thick bears N, & S,
40.00	Let temp 1/4 sec, cor,
50.00	Rock hollow drains N, E,
60.00	Ridge bears N, & S,
66.00	Hollow drains N W,
19.60	Intersect W, Bdry, of Tp,

BOOK-A-163

Salt Lake Meridian

at Cor, to Secs, 19 & 30,
Thence
E, on true line bet, Secs, 19 & 30,
79.60 Set Sandstone 30 & 12 & 8, 22 in deep marked 1/4 on N, Side with Stone mound for 1/4 Sec, cor,
79.60 Cor, to Secs, 19. 20. 29 & 30
Land Broken & Wet,
Inl. 3rd Date,
Timber Scattering Cedar,
Augmented on 79.60 Chs,

N, bet, Secs, 19 & 20
Va, 16° 30' E,
2.50 Hollow drains S. E,
18.00 Enter flat,
40.00 Set Sandstone 14 & 12 & 10

BOOK-A-163

in, deep, marked ~~[illegible]~~
~~on Land 5 notches on [illegible]~~
~~[illegible]~~ 1/4 on W, side
with stone mound for 1/4
Sec, cor,
42.00 Wash drains E,
66.00 " " ",
80.00 Set Quartzite 15+10+6.10
in deep marked 3 notches
S, and 5 notches on E, edge
with mound of earth from
4 pits 24+12+12 for cor,
to Secs, 17. 18. 19 + 20
Land mostly level,
Soil 1st rate,
No Timber,
Augmented on 18 Chains

BOOK-A-163

E, on random line
bet, secs, 17 & 20
Va, 16° 30' E,

.00 Set temp, 1/4 sec, cor,
5.00 Road bears N N, & S E,
.12 Intersect N, & S, line 15 lks,
N, of cor, to secs, 16.17.20 & 21
Thence
N, 89° 54' W, on true line
bet secs, 17 & 20,
.06 Set sandstone 12 & 8 & 7 8 in
deep marked 1/4 on N, side
with mound of earth from
4 pits 24 & 12 & 12 for 1/4
sec, cor,
.12 Cor, to secs, 17.18.19 & 20
Land; level,
Soil 1st rate,
No timber,

BOOK-A-16

	N, on random line bet, Secs, 18 + 19,
40.00	Set temp, 1/4 Sec, cor,
47.50	Salt Lake & Uintah road bears N. E. & S. W,
65.00	Wash drains N. E.
79.40	Intersect N, B'dy, of Tp, at Cor, to Secs, 18 + 19
	Thence
	E, on line line bet Secs 18 + 19
39.40	Set Quartzite 12 + 10 + 8 . 8 in deep marked 1/4 on N, side with mound of earth from 4 pits 24 + 12 + 12 for 1/4 Sec, cor,
79.40	Cor, to Secs, 17. 18. 19 + 20,
	Land; level,
	Soil 1 Sale,
	No Timber,

N. Cor Secs 17+18
Sa 16° 30' E

24.00 Road bears N.W. & S.E.,
24.00 Salt Lake & Mintah Road,
bears N.E. & S.W.
33.00 Wash drains S.E.
40.00 Set Quartzite 18+8+5. 13
in deep marked 1/4 on W.
side with mound of
earth from 4 pits 24+12+12
for 1/4 Sec, cor,
50.00 Set Sand stone 15+9+7. 10
in deep marked 4 notches
on S, and 5 notches on E,
edges with mound of
earth from 4 pits 24+12+12
for Cor to Secs, 7 8 17+18
Land level,
Soil 1st Rate,
No Timber,

E, on random line
bet, secs, 8 & 17
Ca 16 30 E

40.00 Set temp ¼ sec cor
38.00 Road bears N.W. & S.E.
80.08 Intersect N. & S. line at cor,
to secs, 8. 9. 16 & 17,
Thence
E, on true line bet, secs, 8 & 17,
40.04 Set Cobble stone 10 & 10 & 7. 6
in deep marked ¼ on N.
side with mound of
earth from 4 pits 24 & 12 & 12
for ¼ sec, cor,
80.08 Cor to secs 7. 8. 17 & 18
Land: level,
Soil 1st rate,
No timber,

[illegible]

		N, on Sandown line
		bet, secs, 7 & 18
		Va 16° 30' E
	36.00	Follow drains S,
S. E,	40.00	Set Comp 1/4 Sec, cor
1 cor,	99.00	Intersect W, Bdy, of Tp,
		at Cor, to Secs, 7 & 18
		Thence
8 & 19		E, on line bet, secs, 7 & 18,
[illegible] 7. 6	39.00	Set Sandstone 12 × 10 × 8 × 8 in
[illegible]		deep marked 1/4 on N, side
[illegible] of		with mound of earth from
[illegible] 12 & 12		4 pits 24 × 12 × 12 for 1/4 Sec, cor,
	79.00	Cor, to Secs, 7. 8. 17 & 18,
[illegible] 18		Land, level,
		Soil 1st sale,
		No Timber

N. bet. Secs. 7 & 8
Sec. 16, 30 E.

40.00 Set Cobble stone 20 + 16 + 10
15 in deep marked 1/4 on
SO. side with mound
earth from 4 pits 24 + 12
+ 12 for 1/4 Sec. cor.

48.00 Irr. ditch runs S. E.

80.00 Set Sandstone 14 + 10 + 6
9 in deep marked 5
notches on S. & E. edges
with stone mound for
cor. to Secs. 5. 6. 7 & 8.

Land level.
Soil 1st Sale
No Timber.

E. on random line
Bet. Secs. 5 & 8
Va 16° 30' E

.50 Irr. canal runs S.E.
.50 Road to Dry fork bis. N. & S.
.75 Fence bis. N. & S.
3.00 Enter thick undergrowth
7.00 Fence bears N. & S.
7.25 Ashley Creek 40 lks. wide
10 in. deep runs S.E.
.00 Set temp. 1/4 Sec. cor.
2.00 Leave thick undergrowth
enter Hills.
.10 Intersect N. & S. line at cor.
to Secs. 4, 5, 8 & 9.
Thence
0.05 Set Cobble stone 15 + 10 + 8. 10 in
deep marked 1/4 on N. side
with mound of earth from
4 pits 24 + 12 + 12 for 1/4 Sec. cor.

BOOK-A-16

80.10	Cor, to sees, 5.6.7 & 8
	Land; Mostly level
	Soil 1st rate,
	No Timber,
	Augmented on 47.10 chai
	W, on random line
	bet, sees, 6 & 7,
	Va, 16° 30' E,
21.00	Canal runs S.E,
28.00	Enter Cedars
30.00	Spring branch 10 lks wide
	2 in deep runs S,
34.50	Mineral Spring branch
	4 lks, wide 3 in deep runs
	South,
40.00	Set temp, 1/4 sec, cor,

BOOK-A-163

6.00 Bank drains S.E.

5.00 Acres Cedars,

8.90 [illegible] W, Bdy, of Tp,

at cor, to secs, 6 & 7

Thence East on true

line bet. secs. 6 & 7

8.90 Set Cobble Stone 20 + 14 + 12

15 in deep marked 1/4 on

N side with stone mound

for 1/4 sec, cor,

From which

A Cedar Bin, dia, bro, S, 15 E, 10 lks, dist,

" " " " " S, 50 W, 28 " "

Both marked 1/4 S, B, T,

8.90 Cor, to secs, 5. 6. 7 & 8

Land level,

Soil Rate,

Timber; Cedars,

Augmented on 47.00 Chain,

BOOK-A-16

N, on random line
Bet, secs, 5 & 6
Va, 16° 30' E,

10.00 Enter Cedars,
30.00 Ascend,
40.00 Set temp 1/4 sec cor,
47.50 Hollow drains S. E.
76.50 — — E,
79.50 Intersect N, Bdy, of Tp, 42 lks, E, of cor, to secs 5 & 6.

Thence
S 00° 18' E, on true line
bet, secs, 5 & 6,

39.50 Set sandstone 16 + 12 + 10 10 in deep marked 1/4 on W, side with stone mound for 1/4 sec, cor.
79.50 Cor, to secs, 5. 6. 7 & 8.

Land; mostly broken,
Soil 2 rate,
Timber, Cedars,
Augmented on 69.50 Chains

Sept 25th 1879

29 | 4 | R 21 E

BOOK-A-16

General Description

This Township embraces the Upper part of Ashley Valley the greater part being claim and settled upon. It is well watered by Ashley Creek and its various branches.

The following contain Coal & Asphaltum and are retd as coal lands.

S 1/2 of S E 1/4; S E 1/4 & lot 2 of N W 1/4; & the E 1/2 & lots 3 and 4 of the S W 1/4 Sec. 19

All of section 30 & 31

The W 1/2 of W 1/2 of Sec 29.

The W 1/2 & S E 1/4 of N W 1/4, S 1/2 of N E 1/4 & S W 1/4 of Sec 3

Lots 1. 2. 3. & 4 S. W. 1/4 of N. W. 1/4 S. 1/2 N. W. 1/4, N. W. 1/4 S. W. 1/4 of

Sec. 3

exce

Lots

N. E

BOOK-A-163

Sec. 3 — All of sec. 4
excepting S. 1/2 S. E. 1/4 — and
Lots 1. 2 & 3, S. 1/2 N. E. 1/4 and
N. E 1/4 S. E. 1/4 Sec. 5.

E. Buettner
U. S. Dep. Sur.

BOOK-A-163

294

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the ...

Subdivision lines of

Township No 4 S. ..... *Range No* 21 E.

Executed by Ferron & Buettner

Under joint ..... *contract* No 92 *of the* 13th

day of June ..... 1879, *in the month of*

Sept ..... 1879, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

BOOK-A-163

R: 1880 (163) Pied 295

Filed Feb. 17th 1880

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

West Boundary

of Township No. 4 S., Range No. 22 E

of the Salt Lake Meridian in Utah Territory.

BY

E. Buettner

U. S. DEPUTY SURVEYOR,

Under his joint Contract No. 92

dated June 13th 1879

Survey commenced Sept 22nd 1879

Survey completed " " 1879

BOOK-A-163

FOR CHAINMAN.

We James M. Barker

and Samuel Littlefield

do solemnly swear that we will faithfully execute the duties of chain carriers; that we will level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we asssist in measuring, to the best of our skill and ability,

James M Barker
Samuel Littlefield

Subscribed and sworn to before me

this 22nd day of September 1879

A. D. Fenn
U.S. dep. Sur.

BOOK-A-163

FOR FLAGMAN.

I, Ira Burton

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

Ira Burton
his + mark

Witness. Rich. Veltman

Subscribed and sworn to before me this 22nd day of September 1879

A. D. Penn
N.S. Dep. Inv.

BOOK-A-163

FOR AXEMAN 5 88

I, Joseph Jones.

do solemnly swear that I will well and truly perform the duties of axeman, according to instructions given me, and to the best of my skill and ability.

Joseph Jones

Subscribed and sworn to before me this 22nd *day of* September *187*9

A. D. Gunn
U.S. Dep. Inv.

Blank

Page

BOOK-A-163

Boundary Tp. 4 S. R. 22 E.

Survey commenced Sept. 22nd 1879.
by E. Buettner from the
witness Cor. to Sec. 7, 12, 13
& 18 on W. Boundary of Tp.
4 S. R. 22 E. established by
A. D. Ferson Lering a
I run North
bet. Sec. 13 and 18.
Var. 16° 30' E.

.00 The wit ness Cor. descend
into dry bed of swamp
and enter thick
undergrowth.

7.00 Ashby Creek 50 lks.
wide 12 in. deep runs
S. E.

14.00 Branch of same 35 lks.
wide 10 in. deep runs
S. E.

0.00 Set cobble stone 16 X 12 X 8

W. Boundary Tp. 4 S. R. 22 E.

11 in. deep marked 2 notches on N. and 4 on S. edges, with stone mound for Cor. to Sec.^s 7, 12, 13 + 18.

Land level - generally inundated dry at time of Survey.

Soil 1st rate

No Timber

Heavy undergrowth and augmented on 17 Chs.

North bet. Sec.^s 7 + 12

Var. 16° 30' E.

1.00. Ashley Creek main Fork 100 lks. wide 15 in. deep runs S. E.

15.00 leave swamp bed and undergrowth.

20.00 John Girard's house bears N. 64° 40' W.

BOOK-A-163

J. L. N

10.00 Set
4 X 4
ma
with
4 p
1/4 S
0.80 Jo
bea
0.00 En
0.00 On
set
dep
N.
with
Cor.
L
dep

J. L. Meridan

0.00	Set charred Elder Post 4 X 4, 4 ft. long, 2 ft. deep marked 1/4 S. on W. side with mound of earth from 4 pits each 24 X 12 X 12 for 1/4 Sec. Cor.
0.80	John Girard's house bears S. 49° 20' W.
0.00	Enter hills
0.00	On top of Sand hill set quartz 14 X 11 X 8, 9 in. deep marked 1 notch on N. and 5 on S. edges with stone mound for Cor. to Secs 1, 6, 7 & 12
	Land mostly level
	Soil 1st rate
	No Timber
	Augmented on 35 Chs.

BOOK-A-163

W. Boundary Tp. 4 S. R 2

North bet. Sec: 1+6

Var. 16° 30' E.

12.00 Hollow drains W.

20.00 Ridge bears E+W.

25.00 Hollow drains W.

40.00 Set quartzite 14x12x6, 9 in deep, marked 1/4 on W. side with stone mound for 1/4 Sec. Cor.

80.00 Set Quartzite 18x12x8, 12 in. deep, marked 6 Notes on N.S. E+W. edges with stone mound for Cor. to Tp 3 and 4 S. R. 21 and 22

Land Mountainous

Soil 2nd rate

No Timber

Augmented on 80 Chs.

S. L. N

ote 1st The

Tp. f

grov

te 2nd For

see

Tp.

BOOK-A-163

R 2 . S. L. Meridian

ote 1st	The N. Boundary of this Tp. falls in unsurveyable ground.
ote 2nd	For General Discreption see Subdivisions of this Tp.

Sept 22nd 1879

E. Buettner U. S. Dep. Sur.

Blank

Page

BOOK-A-163

308

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the

West boundary of

Township No 4 S. *Range No* 22 E.

of the Salt Lake Meridian, Utah Territory,

Executed by E. Buettner

Under joint *contract No* 92

of the 13th *day of* June 1879

in the month of Sept. 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Frd Salomon.

U. S. Surveyor General for Utah.

BOOK-A-163
R: 1880 (Copies) 309

Filed Feb. 16th 1880.

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Subdivisions

of Township No. 4 S. , Range No. 22 E.

of the Salt Lake Meridian in Utah Territory.

BY

Turrow y Buettner

U. S. DEPUTY SURVEYOR,

Under ~~his~~ their joint Contract No. 92

dated June 13th 1879.

Survey commenced Sept 26. 1879.

Survey completed " 29 1879.

Book 163

West Boundary and Subdivisions

Township 4 S. **R.** 22 E.

305	6		5		4		3		2		1
303	7	348	8	349	9	334	10	326	11		12
302	18	348	17	334	16	325	15	317	14		13
	346		345		332		323				
	19	344	20	332	21	322	22	316	23		24
	343		341		331		321				
	30	339	29	330	28	320	27	315	26		25
	338		337		328		319		314		311
	31	336	32	327	33	318	34	312	35	310	36

BOOK-A-163

Subn Tp 4 S R 22 E

Survey Commenced Sept. 26. 1879

By

Wm D. Fenton

U S Dep Surveyor

From cor, to secs, 35 + 36

on S, Bdy, of Is, [illegible]

N, bet, secs, 35 + 36

Va, 16° 30' E,

40 00 Set quartzite 14 + 10 + 8, 10

in deep, with stone mound

(pits imp) marked 1/4 on

W, side for 1/4 sec, cor,

80 00 Set Quartzite 12 + 10 + 4

8 in, deep, marked 1 notch

on S, + E, edges, with mound

of stones and earth from

4 pits 24 + 12 + 12, for cor,

to secs, 25. 26. 35 + 36,

	rand, [illegible] bench
	[illegible] 1st [illegible]
	No [illegible]
	E, on random line bet secs 25 [illegible]
	Va, 16°30' E.
1.50	Dash drains S, E.
13.00	" " " "
32.00	Enter Brush Creek bottom
	bears S. E, & S W,
40.00	Set [illegible] 1/4 [illegible]
58.00	Enter thick undergrowth
59.50	Brush Creek 25 lks. wide
	12 in. deep, runs S. E.
65.00	Leave thick undergrowth
80.00	Intersect E. Bdy of [illegible]
	10 lks. S, of cor, to secs, 25 [illegible]
	Thence S 89°56' W, on [illegible]

BOOK-A-163 S R 22 E 312

line bet, Secs, 35 + 36,
40 00 Set Sandstone 12+10+5, 8
in, deep marked 1/4 on N,
Side with stone mound
(pits imp) for 1/4 Sec, cor
80 00 Corner to Secs 25.26.35+36.
Land hilly on 32 Chains
broken on 48 Chains
Soil 1st + 3rd rates
No Timber,
N Augmented on 7 Chains

Note I abandon further Survey
N, the land being unsurveyable

N, bet Secs, 34 + 35.
Va, 16° 30' E,
00 Deep wash drains S. E,

Subdivisions

40.00	Set limestone 12+10+6 in deep marked 4 in. [illegible] side with mound of earth from 4 pits 24+12+12 for sec. cor.	38.00
49.00	Hollow drains S.E.	40.00
58.00	" " " "	45.00
72.00	" " " "	80.00
80.00	Set limestone 20+12+6. 15 deep marked 2 notches on E, and 1 notch on S, edge with mound of earth from 4 pits 24+12+12 for cor. Secs 26 27 34+35.	40.00

Land: Level Bench
Soil: 1st rate.
No Timber,

BOOK-A-163

E, on random line
bet, secs, 26 + 35
Va 16° 30' E.

38.00 Ascend higher bench
runs N.W. + S.E.

40.00 On top of Bench
Set temp 1/4 Sec, cor,

45.00 Dash drains S.W,

80.00 Intersect N, + S, line at
Cor, to Secs, 25. 26. 35 + 36.

Thence

Con true line bet, Secs 26 35

40.00 Set Quartzite 12 + 10 + 4. 8
in deep marked 1/4 on
N, side, with mound of
Stones + earth from 4 pits
24 + 12 + 12 for 1/4 Sec, cor,

[illegible].00 Corner to Secs, 26. 27. 34 + 35,

Land, Mostly bench
Soil 1 Rate

3.15 Subdivisions

		Note
	[illegible]	
	Up bet, Secs, 16 + 27	
	Ca, 16.30 E	
40.00	Set Quartzite 10+10+5. 6	40.00
	deep marked 1/4 on W	
	with mound of earth fr	
	4 pits 24+12+12 for 1/4	
	Sec corner.	
80.00	Set Sandstone 12+10+4	60.00
	8 in, deep marked 2 No	78.00
	on S + E, edges with mo	80.00
	of earth from 4 pits 24+1	
	for Cor, to Secs, 22.23.26+2	
	Land; Rolling bend	
	Soil; 1st rate,	
	No Timber,	

Tp 4 S. R. 22 E. 316

BOOK-A-163

Note	The land East is unsurveyable,
	N, bet, Secs 22 + 23
	Va, 16° 30' E,
40.00	Set Limestone 12 + 12 + 9
	8 in deep, marked 1/4 on
	W, side with mound of
	earth from 4 pits 24 +
	12 + 12 for 1/4 Sec, Cor,
60.00	Foot of Ridge
78.00	Top of Ridge bears N + S
80.00	Set Quartzite 12 + 12 + 9. 8
	in, deep, marked 3 notches
	on S, and 2 notches on E,
	edges with mound of
	earth from 4 pits 24 + 12 + 12
	for Cor, to Secs, 14 15. 22 + 23,

31 Subdivisions

Land; 1st bench
2nd Broken & hilly
Soil; 1st rate
No Timber

Note The land East is unsurveyed

N, bet, Secs 14 & 15
Va 16. 20 E
40.00 Set Sandstone 16 & 14 &
10 in deep, marked 1/4
W, side with stone mo
(Pits imp) for 1/4 Sec Co
43.50 Hollow drains & E
80.00 Set limestone 14 & 10 & 5
in deep marked 4 notch
on S and 2 notches on
edges with mound of
Earth from 4 pits 24

Tp 4 S R 22 E

BOOK-A-163

for cor, to secs, 10. 11. 14 & 15
Land; Bench,
Soil; 1st rate,
No Timber.
Sept. 26th 1879. A. D. Ferum dep. Sur.

Note The line N, being unsurveyable I abandon line here.

Sept 26th 1879
by J. E. Buttner
N, bet, secs, 33 & 34
Va 16°, 30' E
40.00 Set pine post 4" 14". 4 feet long. 2 feet in ground marked 1/4 on N, side for 1/4 sec, cor with regmound & pits.
[illegible].00 Trail bears S, 65° E.
[illegible].45 Wash drains " " "
[illegible].00 Mound of earth from 4 pits 24 x 12 x 12, with

319 Subdivisions

	deposit of small stones and a stake stuck in North pit, and stake wing marked 1 Notch on S, and 3 notches on E, edges, for Cor, to Secs, 27, 2 33 + 34
	Land; Level
	Soil; 1st Rate
	No Timber
	East on random line bet Secs, 27 + 34 Va, 16° 30' E,
15.00	Wash drains S. E,
40.00	Set lemp 1/4 Sec, Cor,
40.50	Wash in deep hollow drains

Tp 4 S R 22 E. 320

BOOK-A-163

64.50	Dash in deep hollow drains S.E.
80.15	Intersect N, & S, line at cor, to secs, 26. 27. 34 & 35.
	Thence
	N, on true line bet, secs, 27 & 34
40.07	Mound of earth from 4 pits 24 & 12 & 12 with a small cobble stone, marked with a cross (+) deposited thereon
80.15	Cor, to secs, 27. 28, 33 & 34
	Land; level Bench,
	Soil; 1st Rate,
	No Timber,
	N, bet, secs, 27 & 28
	Va, 16° 30' E,
40.00	Mound of earth from 4 pits 24 & 12 & 12 with two small

329 Subdivisions

	[illegible], marked with a cro[illegible]	40.00
	[illegible] relapsed thereon for	53.60
	1/4 sec, cor.	80.00
80.00	Mound of earth from 4	
	pits 24+12+12, with sta[illegible]	
	stuck in N. pit, said sta[illegible]	
	being marked 3 notches on	40.00
	E, and 2 notches on S. edg[illegible]	
	for cor, to Secs, 21.22.27+28	
	Land; level bench	
	Soil; 1st rate	80.00
	No Timber	
	East on random lin[illegible]	
	bet, Secs, 22+27	
	Va, 16°.35' E.	
22.00	Wash drains S.W.	
32.00	" " "	

BOOK-A-163

Cp 4 S. R 22. E 322

40.00	Set temp. 1/4 sec, cor,
53.60	Washdrains & W.
80.00	Intersect N & S, line at cor
	to sections 22. 23. 26 + 27
	Thence
	W, on true line bet, secs, 22 + 27
40.00	Set sandstone 16 + 12 + 8. 10 in
	deep marked 1/4 on N, side
	with mound of earth from
	4 pits 24 + 12 + 12 to 1/4 sec, cor,
80.00	Corner to secs, 21. 22. 27 + 28,
	Land; level Bench,
	Soil 1st rate,
	No Timber,
	N, bet secs, 21 + 22
	Va, 16° 30' E.
00	Mound of earth from 4

	pit 24+12+12, with stake	40.00
	marked 1/4 on W side	40.50
	Stuck in N pit	70.00
80.00	Set quarter 18+14+9, 12	75.00
	in deep marked 3 notches	80.08
	on S & E edges with mound	
	of earth from 4 pits 24+12	
	for Cor, to Secs, 15.16.21+2	
	Land, Gollina level	40.04
	Soil, 1st Rate	
	No Timber	
		80.08
	East or random line	
	bet, Secs 15+22	
	Va, 16°30' E.	
24.00	Large hollow drains S	
28.00	" " " S	
32.50	" " " S	

Tp 4 S. R 22 E 324

BOOK-A-163

40.00 Set temp 1/4 sec, cor,
40.50 Ascend
70.00 Top of hill bears N & S,
75.00 Hollow drains S,
80.08 Intersect cor to secs 14.15
22 + 23

Thence

N, on true line bet, secs, 15 + 22
40.04 Set Sandstone 16 + 12 + 6, 10
in deep marked 1/4 on N.
side with mound of
earth from 4 pits 24 +
12 + 12 for 1/4 sec cor.
80.08 The cor. to secs, 15.16.21 & 22,
Land, 1st 1/2 Bench
2nd " Broken & Hilly
Soil 1st rate
No Timber
Augmented on 39.58 Chains

Subdivision

	N. bet. Secs 13+16	
	Vee, 16° 30' E.	
26.25	Wash drains S.E.	
40.00	Set limestone 25+12+4	6.50
	18 in deep marked 1/4 on	10.00
	D, side with stone mou	40.00
	(pits imp) for 1/4 Sec, co	45.00
60.00	Deep wash drains S	51.50
80.00	Set limestone 14+12+12. 9	
	deep marked 4 notches	54.00
	S, and 3 notches on E	77.00
	with stone mound (pits	80.00
	for cor, to Secs, 9. 10. 15+16	
	Land; Broken	
	Soil: 1st rate	
	No Timber	40.00

Tp 4 S. R. 92 E. 326

BOOK-A-163

Cast on random line
bet, secs, 10 + 15
Va, 16° 30' E,

6.50 Deep wash drains S E,
10.00 " " " S,
40.00 Set temp 1/4 sec, cor,
45.00 Foot of hill
51.50 Top of lone sand hill
bears S 10° W + N, 20° E,
54.00 Wash in hollow drains S,
77.00 " " " " S,
80.00 Intersect N, + S, line at cor,
to secs, 10. 11. 14 + 15.

Thence

N, on true line bet, secs, 10 + 15
[illegible].00 Set Quartzite 14 + 10 + 8 Gin
deep marked 1/4 on N side
with stone mound (pits imp)
for 1/4 sec, cor,

[illegible]	Comes to Secs 9, 10, 15 & [illegible]	48.22
	Land Broken	
	Soil Rate	
	No Timber	53.00
		80.00
Note	Abandon further survey [illegible]	
	Sept 26th 1879. E. Cruttenden Dep	
	Sept 27-1879 by A. D. Timm	
	N, bet, Secs, 32 + 33	
	Va, 16° 30' E,	
7.80	Enter Creek bottom	
21.50	Road bears S 60° E	
28.50	Irrigation ditch bears S 6[illegible]	
30.00	Enter thick undergrowth	
40.00	Set Sandstone 12+8+6, [illegible]	
	deep marked 1/4 on W Sec	
	with mound of earth [illegible]	
	4 pits 24+12+12 for 1/4 Sec [illegible]	

BOOK-A-163

Cp 4 S R 22 E 328

48.22	Ashley Fork Creek, 58 lks wide 3 feet deep, bears E 4 chains thence S E.
53.00	Leave Creek under growth
80.00	Set Sandstone 14+8+6 9 in deep marked 1 Notch on S & 4 notches on E, edge with mound of earth from 4 pits 24+12+12 for ~~4~~ cor, to secs, 28.29.32.33.
	Land; level bench & bottom
	Soil; 1st Rate
	Timber; a few Cottonwoods along Creek,
	Augmented on 23 Chains

East on Sundown line bet, secs 28 & 33
Va 16°30' E

329	Subdivisions	Tp 4 BOO
16.50	Enter beach bears N W & S E	
40.00	Set lamp 1/4 sec cor	
[illegible]	Ashes [illegible] & whole [illegible]	17.50
	Wall bears S E	24.60
72.45	Park drains S E.	40.00
80.00	Intersect N & S line at c[illegible]	
	to secs 27.28.33 & 34.	
	Thence	
	N on line line bet secs 28 & 3[illegible]	61.00
40.00	Set sandstone 10+8+6. 6 [illegible]	80.00
	deep marked 1/4 on N, [illegible]	
	with mound of earth [illegible]	
	4 pits 24+12+12 for 1/4 sec [illegible]	
80.00	Corner to secs 28.29.32 & 33	
	Land; level,	
	Soil; 1st rate,	
	No Timber,	

Sp 4 S R 22 E 330

BOOK-A-163

N, Set, Secs, 28 & 29
Va, 16° 30' E,

17.50 Enter Bench;
24.60 Trail bears E, & W,
40.00 Set Sandstone 12 x 8 x 6, 8 in
deep marked 1/4 on W, side
with mound of earth from
4 pits 24 x 12 x 12 for 1/4 sec, cor,
61.00 Gulch drains S, 40° W,
80.00 Set Quartzite 24 x 16 x 16, 18 in
deep marked 2 notches on
S, and 4 notches on E, edges
with mound of earth
from 4 pits 24 x 12 x 12 for
cor, to Secs, 20. 21. 28 & 29
Land; Gently rolling;
Soil; 1st rate,
No Timber,

	East on random line	
	bet, secs, 21 & 28	
	Va, 16° 30' E,	40.00
15.00	Main hollow drains S.[illegible]	
40.00	set lamp 1/4 sec, cor,	
50.50	Hollow drains N. S,	
58.00	" " " "	80.00
80.20	Intersect N, S, line at c[illegible]	
	to secs 21, 22, 27, 28	
	Thence	
	W, on true line bet, secs, 21 & [illegible]	
40.10	Mound of earth from 4 [illegible]	
	[illegible] 12 & 12, with [illegible]	
	Red 1/4 on N, side - [illegible]	
	in N, pit for 1/4 sec, cor,	
80.20	Cor, to secs, 20. 21. 28 & [illegible]	
	Land; Bench	
	Soil, 1st rate	
	No Timber.	

Tp 4 S. R. 93 E 332

BOOK A-163

N, bet Secs, 20 & 21
Va, 16°30' E.

40.00 Set limestone 12×8×4. 8 in
deep marked 1/4 on W, side
with mound of earth from
4 pits 24×12×12 for 1/4 sec, cor,

80.00 Set Sandstone 14×12×6, 9 in
deep marked 3 notches on
S edges and 4 notches on
E edges with mound of
earth from 4 pits 24×12×12
for cor to secs 16. 17. 20 & 21
Land; Gently rolling
Soil; 1st rate
No Timber.

East on random line
bet, secs 16 & 21

Va 16° 30' E.

40.00 Set temp 1/4 Sec, cor,

[illegible] Follow drains S, W, 40.00

80.08 Intersect N, S, line at co[illegible]

to Secs, 15. 16. 21 + 22

Thence

W on true line bet Secs 16 + [illegible]

40.04 Set Sandstone 18 + 12 + 9. [illegible] 56.00

in deep marked 1/4 on [illegible] 80.00

Side with mound of ea[illegible]

from 4 pits 24 + 12 + 12 f[illegible]

1/4 sec cor,

80.08 Cor, to Secs, 16 17. 20 + 2[illegible]

Land; Rolling bene[illegible]

Soil: 1st rate,

No Timber,

Tp 4 S. R 22 E 334

BOOK-A-163

N, bet, Secs, 16 & 17
Va 16° 30' E

40.00 Set Sandstone 15 x 10 x 8, 10 in deep marked 1/4 on W side, with mound of earth from 4 pits 24 x 12 x 12 for 1/4 Sec, cor,

56.00 Wash drains S.W.,

80.00 Set limestone 14 x 8 x 6, 9 in deep marked 4 notches on S & E edges with mound of earth from 4 pits 24 x 12 x 12 for cor, to Secs 8. 9. 16 & 17

Land; Bench,
Soil. 1st rate,
No Timber)

East on random line bet, Secs, 9 & 10

335 Subdivisions

16.00	Mark drains [illegible]	
40.00	set lamp 1/4 sec, cor	
80.00	Inlet set cor, to secs, 9 [illegible]	40.00
	15 + 16	
	Thence	
	Wn on true line bet, secs, 9 [illegible]	
40.00	set Quartzite 14 + 8 + 6 [illegible]	
	deep marked 1/4 on N sec	58.35
	with mound of earth fr	75.80
	4 pits 24 + 12 + 12 for 1/4 sec	80.00
80.00	Corner to secs 8. 9. 16. + 1[illegible]	
	Land; Broken	
	Soil; 1st Rate	
	No Timber	
Note	Abandon further survey [illegible]	
	Sept 27th 1879 [illegible]	
	Sept 29th 1879 by E. [illegible]	

BOOK-A-163

Sp. 4 S. R. 22 E. 3.36

N, Set, Secs, 31 + 32
Va, 16° 30' E,

40.00 Set Quartzite 12+8+12. In deep marked 1/4 on W side with mound of earth from 4 pits 24+12+12 for 1/4 Sec, cor,

58.35 Wash in hollow drains N.E.

75.80 — — — — S, 80° E,

80.00 Set Sandstone 20+8+6, 13 in, deep marked 1 Notch on S, + 5 Notches on E, edges. with mound of earth from 4 pits 24+12+12 for cor to secs 29 30 31 + 32

Land; level Bench
Soil, Plate
No Timber.

	East on random line	
	bet Secs, 29 + 32	80.20
	Vac, 16° 30' E,	
38.00	Enter Ashley Fork bottom	
	enter thick undergrowth	
40.00	Set Camp 1/4 Sec, cor	
44.90	Road bears S.E.	
53.00	Slough bears S.W. 2 chns thence	
56.50	Enter Creek bed bears S 10°	
	Willis Frank's house, bears	
	S 4 chs dist	
57.30	Leave Creek bed,	
80.20	Intersect N & S line at cor	9.65
	Secs 28.29, 32 + 33	1.00
	Thence	2.55
	N on true line bet Secs 29	.65
40.10	Set Sandstone 12 + 8 + 3 8	
	deep marked 1/4 on N	
	with mound of earth	
	from 4 pits 24 + 12 + 12	

Tp 4 S. R. 20. E. 338

BOOK A 163

for 1/4 sec cor

80.20 Cor to secs 29. 30. 31 & 32

Land; level

soil; 1st rate

No Timber

N Augmented on 42.20 Chains

West on random line

bet, secs, 30 & 31

Var, 16° 30' E.

9.65 Irrigation ditch runs S.E.

[illegible].00 Set temp 1/4 sec corner

[illegible].55 Hollow drains S.E.

[illegible].65 Intersect W, Bdy, of Tp,

90 lks, S, of cor to secs,

30 & 31

Thence

S, 89° 21' E, on true line

	[illegible], secs, 30 + [illegible]	48.00
39.65	Set Sandstone 14+8+5. 10 [illegible]	48.75
	deep marked 1/4 on N side	51.00
	with mound of earth fro[illegible]	56.80
	4 pits 24+12+12 for 1/4 [illegible]	71.50
39.65	Cor, to secs, 29. 30. 31 + 32	72.60
	Land: level,	
	Soil: 1st rate,	
	No Timber,	[illegible]5.00
		[illegible]8.00
		[illegible]0.00
	N, bet, secs, 29 + 30	
	Va, 16°30' E,	
19.50	Ravine drains E	
40.00	Top of Bench, when I	
	Set Sandstone 14+10+4	
	in deep marked 1/4 on W [illegible]	
	with mound of earth fro[illegible]	
	4 pits 24+12+12 for 1/4 sec[illegible]	

BOOK-A-163

Sp. 4 N. 32 E 340

48.00	Enter bottom & thick undergrowth
48.75	Irrigation ditch drains E,
51.00	Main road bears S-E,
56.80	Ditch drains E,
71.50	Road bears E,
72.60	Brush Fence
	W. Haydn's House bears
	W, 8 chains
75.00	Slough brs N-E & S.W. 103 lks. W.
8.00	Enter Creek bed bears E.
0.00	Falling in Creek, therefore
	25 lks E, of true corner point
	Set a sandstone 15+10+8
	10 in deep marked 2 notches
	on S, and 5 notches on E, edges
	and W.C. with mound of
	earth from 4 pits 24+12+12
	for Witness Cor, to Secs,
	19. 20. 29 & 30.
	Land: level & Broken

34½ Subdivisions

Soil 1st Rate
No Timber

40.06

× N Augmented on 32 chains

80.12

East on random line
bet, Secs, 20 & 29
Dec 16° 30' E,

8.12 Creek 40 lks wide 1 ft
deep runs S, 40° E,
12.12 Cave thick underbush
18.00 Enter Bench,
10.00 Set temp ¼ Sec, cor,
8.37 W Haydn's House bis S 84°
80.12 Intersect N & S, line 37 l
N, of cor, to secs, 20 21.28
Thence
N, 89° 44' W, on true line

BOOK-A-163

Set Secs 20 & 29

40.06 Set Sandstone 10+8+6, 6 in deep, marked 1/4 on N side with mound of earth from 4 pits - 24+12+12 for ~~Cor to~~ 1/4 Secs Corner

80.12 Corner to Secs 19. 20. 29 & 30

Land: Gently rolling

Soil 1st rate

No Timber

N Augmented on 12.12 Chains

34 (3) Subdivision

Vert on [illegible] line
bet. Sec.s 19 and 30
Va. 16° 30' E.

0.40 Leave Creek bed.
39.70 Ditch [illegible] S.
40.00 Set Temp. 1/4 sec cor
60.32 Road bears N.E. & S.W.
79.80 Intersect W. Boundary of
Tp. at cor to Sec.s 19 & 30. from
which East on line line bet Sec.s 19 & 30
39.80 Set charred Cottonwood post.
4 x 4 in 4 ft long, 2 ft deep, mark
4 on N. side with mound of ea
from 4 pits each 12 x 12 x 12 in for
sec cor.
79.80 Tp. Cor to Sec.s 19. 30. 29 &
Land level
Soil Strata
No Timber

BOOK-A-163

N, bet. Secs, 19 & 20
Vac, 16° 30' E,

2.50 Leave Creek bed 85 lks wide
Creek 15 lks wide 3 in deep
15.00 Dry bed of Creek drains S.W.
27.25 Ashley Fork Creek 75 lks wide
1 foot deep runs S.E. [illegible]
30.00 Creek 30 lks wide 2 feet deep
runs S.E.
32.90 Creek 85 lks wide 3 in deep
runs S.W.
37.90 Creek 25 lks wide 1½ ft. deep
runs S.E.
[illegible].00 Set sandstone 18+12+10, 12
in deep, marked 1/4 on W.
side, with mound of earth
from 4 pits 24+12+12 for
1/4 sec. cor.
[illegible].00 Leave thick undergrowth
[illegible].00 Set sandstone 14+5+5

B00

Pin deep marked 3 notches
on land 5 notches on East
edges with mound of
earth from 4 pits 24+12+12
for cor, to secs, 17 18. 19+20
Land, level
Soil 1st rate
No Timber
Augmented on 70. chain

40.07

0.15

East on random line
bet, secs 17+20
Va, 16° 30' E,
Leave bottom
Set temp, 1/4 sec cor
Intersect N, + S, line
cor, to secs, 16. 17. 20 +

40.10
0.15

Tp 4 S R 22 E 346

BOOK-A-163

Thence

N on true line bet, secs, 17 & 20

40.07 Set a flint 10 & 8 & 6, 6 in deep, marked 1/4 on E side, with mound of earth from 4 pits 24 & 12 & 12 for 1/4 sec, cor.

0.15 Corner to Sections 17 18 19 & 20

Land; level

Soil; 1st rate

No Timber

West on random line bet, secs 18 & 19

Va, 16° 30' E.

0 Enter thick underbrush

30 Road bears Ne 25° E

0 Enter creek bed

24.50	Leave Duck bed drains S 55° E
	leave thick undergrowth
29.00	Fence bears N 30° W
38.80	— — S 60° E
40.00	Set temp 1/4 Sec, cor,
49.30	Trail to Green River bis S, 60° E
70.00	Waste ditch runs S
72.00	— — —
79.80	Intersect N, Bdy, of Tp, at
	Cor, to Secs, 18 & 19
	Thence
	E on true line bet, secs, 18
39.80	Set Sandstone 18+12+10
	in deep marked 1/4 on
	side with mound of le
	from 4 pits 24+12+12
	1/4 Sec, cor,
79.80	Corner to Secs 17.18.19
	Land; mostly le
	Soil; 1st rate

BOOK-A-163

[illegible] E 348

No Timber

N. Augmented on 22 chains

N, bet, Secs, 17 + 18
Va, 16° 30', E,

00 Wash drains S.W.

00 Leave Creek bottom

00 Set quartzite 10+10+8. 7 in deep marked 1/4 on W side with mound of earth from 4 pits 24+12+12 for 1/4 sec, cor,

00 Hollow drains S.W,

00 Set Quartzite 16+12+5. 10 in deep, marked 4 notches on S and 5 notches on E edges with mound of earth

from 4 pits 24+12+12 for
Cor. to Sec. 7.8.17 & 18
Land; Broken bench
Soil; 1st rate
No Timber

East on Random line
bet. Secs. 8 & 17
Va. 16° 30' E.

16.00 Wash drains S.W.
40.00 Set temp 1/4 Sec. cor.
46.00 Wash drains S.
80.00 Intersect N. & S. line at
to Secs. 8.9.16 & 17.
Thence
N. on true line bet. Secs 8
40.00 Set Quartzite 14+10+6

Tp 4 S R 22 E 357

Deep marked 1/4 on N side
with stone mound (pits imp)
for 1/4 sec, cor,
0.00 Corner, to secs 7.8.17 & 18
Land: Broken
Soil: Pale
No Timber

West on random line
bet secs 7 & 18
Va 16° 30' E
.00 Road from Ashley to Brown's
Hole bears N.E & S.W.
.50 Hollow drains S.
.50 Ridge bears N & S
.00 Foot of ridge
.00 Set temp 1/4 sec. cor.
.00 Enter thick undergrowth

78 00	Ashley Creek (dry)
78 80	Intersect W. Bdy. of Sp. 10 chs, N. of cor to Secs 7.12.13+18
	Thence
	N. 89° 56' E. on true line bet Secs 7+18
38 80	Set Sandstone 16+12+4 10 in deep, marked 1/4 on N. side with mound of earth from 4 pits 24+12+12 for 1/4 Sec. cor.
78 80	Corner to Sections 7.8.17+18. Land 1 1/2 Mountainous
	2 — level Rench
	Soil 1st & 3rd Dates
	No Timber
	Augmented on 41.80 Ch
Note	I here abandon further survey of this Township

Ypsi S. R. 22 E. 352

BOOK-A-163

General Description

The surveyed portion of this Township embraces part of the bottoms of Ashley Fork Creek, which is a fine Mountain Stream (this year this stream is unusually small owing to the extreme season of drouth) also adjacent bench lands which can be irrigated from said creek

The unsurveyed portions of this Township consist of broken bad lands.

Sept 29. 1877. E. Buttner
Dep. Surveyor.

BOOK-A-163 **LIST OF NAMES.** 355

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the foregoing Field Notes of the

Exterior and Subdivisions of Tps No. 4 South, Range No. 21 and 22 East of the Salt Lake Meridian Territory of Utah

showing the respective capacities in which they acted.

Lyman M. Barker	*Chainman.*
Samuel Littlefield	*Chainman.*
Ira Benton	*Flagman.*
Joseph Jones	*Axeman.*

We hereby certify that we have assisted

E. L. Beethoven

U. S. Deputy Surveyor in surveying

Excisions and Subdivisions of Tps No. 4 S., Range No. 7 and 22 E. of the Salt Lake Meridian in the Ty of Utah

356

and that said Dr

have been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the boundary monuments planted according to the instructions furnished by the Surveyor General.

James M Barker Chainman.

Samuel Littlefield Chainman.

Witness:— John A Mitchell

Ira Barton (his mark) Flagman.

Joseph Jones Axeman.

Subscribed and sworn to by the above named persons, before me, a Deputy Surveyor, for the ~~County~~ ~~of~~ , ~~in~~ the Territory of Utah, this 29 day of Sept. 1879

A. D. Tuson

Dep. Surveyor.

I, E. Buellner

U. S. Deputy Surveyor, do solemnly swear that in pursuance of a contract with Dick Salomon

Surveyor General of the public lands of the United States in the Territory of Utah, bearing date the 13th day of June 1879, and in strict conformity to the laws of the United States, the Manual of Surveying Instructions, and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Exteriors and Subdivisions of Tp. No. 4 S., R. 21 and 22 E. of the Salt Lake Meridian

BOOK-

plo

ma

for

In the Territory aforesaid, and do furt

solemnly swear that the foregoing are the t

and original Field Notes of such survey.

E. Buettner
U. S. Deputy Surveyor.

Subscribed by the said E. Buettner

U. S. Deputy Surve

and sworn to before me, a Notary

Public *for*

county of Salt Lake *in the Territ*

of Utah, this 10th *day of* January *18*

Edward Michaelis
Notary Public
Salt Lake County

BOOK-A-163 **LIST OF NAMES.** 357

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the foregoing Field Notes of the Exterior and Subdivisions of Tps No. 4 S. R. No 21 and 22 E. of the Salt Lake Meridian in the Trip of Utah.

do furt

are the t

urvey.

ner

Surveyor.

ty Surve

for

he Territ

18

acli

lic

County

showing the respective capacities in whi
they acted.

Otto C. Salomon Compassman
George F. Britt **Chainman.**
Richard Waldschmidt **Chainman.**
Joseph Burton **Flagman.**
Richard Veltman **Axeman.**

BOOK-A-

We

U. S. D

We hereby certify that we have assisted

R. D. Ferron

U. S. Deputy Surveyor in surveying

Exterior and Subdivi-
sions of Tps No. 4 South
Ranges No. 21 and 22 E.
of the Salt Lake Meridian
in the Ty of Utah.

BOOK-A-

and that said Tps

have been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the boundary monuments planted according to the instructions furnished by the Surveyor General. Otto E. Salomon Compassman

Geo. F. Britt Chainman.

Richard Waldschmidt Chainman.

John A. Mitchell Witness

Joseph Burton his mark (+) Flagman.

Richard Veltman Axeman.

Subscribed and sworn to by the above named persons, before me, a Deputy Surveyor, for the ~~County~~ of ——— ~~in the~~ Territory of Utah, this 27th day of Sept. 1879

A. D. Fenn

Dep. Surveyor

BOOK-A-163

I, Augustus S. Ferron

U. S. Deputy Surveyor, do solemnly swear that in pursuance of a contract with Frank Salomon

Surveyor General of the public lands of the United States in the Territory of Utah, bearing date the 13 day of June 1879, and in strict conformity to the laws of the United States, the Manual of Surveying Instructions, and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Extension and Subdivisions of Tps No. 4 S., Range No. 2 and 77 E. of the Salt Lake Meridian

364

BOOK

U.

In the Territory aforesaid, and do furth

solemnly swear that the foregoing are the tr

and original Field Notes of such survey.

Augustus S. Gunn

U. S. Deputy Surveyor.

Subscribed by the said Augustus S. Gunn *U. S. Deputy Survey*

and sworn to before me, a Notary Public *for th*

county of Salt Lake *in the Territor*

of Utah, this 15 *day of* January *18*

Edward Michael

Notary Public

Salt Lake County

To

of

Ex

Un

of

in

ha

co

fie

he

BOOK-A-163

365

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 18 80

The foregoing field notes of the survey of the

Subdivision lines of fractional

Township No 4 S. *Range No* 22 E.,

of the Salt Lake Meridian, Utah Territory,

Executed by Herron & Buettner

Under joint *contract No* 92

of the 13th *day of* June 1879

in the month of Sept. 1879,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Frdc. Salomon.

U. S. Surveyor General for Utah.

BOOK-A-163

R: 1880. 96 Fed 566

Filed Jany. 29th 1880

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

Exteriors

of Township No. 6 South, Range No. 20 East

of the Salt Lake Meridian in Utah Territory.

BY

Augustus D Fanon

U. S. DEPUTY SURVEYOR,

Under ~~his~~ joint Contract No. 92

dated June 13 1879

Survey commenced Oct 28 1879.

Survey completed " " 1879

West Boundary Tp. 6 S. R 20 East

Survey commenced
Aug. 28th 1879 by A. S. Fenn
From the cor. to Tps. 6 S.
R. 19 and 20 E. from
North bet. Secs. 31 and 36
Var 16° 30' E.

40.00 Set Sandstone 24 x 18 x 10
18 in. deep, marked 1/4
on W side with stone
mound for 1/4 Sec. cor.
ascend
48.50 Top of Ledge
65.00 Descend
71.50 Washdrus West
73.00 ascend.
80.00 Set Sandstone 36 x 24 x
4.25 in. deep marked
1 notch on S and 5 on N
Edges, with stone mound
for cor. to Secs. 25. 30

West Boundary Tp. 6 S. R 20 E

31 and 36.
Land Broken and rocky
Soil 3rd rate
No Timber.
Augmented on 80 chs

North bet. Secs. 25 and 36
Var 16°30' E.

40.00 Set sandstone 20 X 12 X 7. 15 in. deep, marked 1/4 on W side with stone mound for 1/4 Sec. cor.

80.00 Set sandstone 16 X 10 X 8. 11 in. deep, marked 2 notches on S and 4 on N edges, with stone mound for cor. to Secs 19. 24. 25 and 30.
Land very broken

BOOK-A-1

BOOK-A-163

of the Salt Lake Meridian

Bad lands.

Soil 3rd rate

No Timber

Augmented on 80 chs

Note: On account of unsurveyable land I abandon further survey North.

Note: For General Description see end of Subdivisions of this Tp.

Oct 28th 1879

A. P. Fenon dep. mr

BOOK-A-163

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 24 1880

The foregoing field notes of the survey of the

West boundary of

Township No 6 S. *Range No* 20 E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Ferron

Under priyt *contract No* 92

of the 13th *day of* June 1879

in the month of Oct 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Geo. Salisbury

U. S. Surveyor General for Utah.

BOOK-A-163

R: 1880 (163) 371

Filed Jany 29th 1880

J.H.C.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

Subdivision Lines

of Township No. 6 South Range No. 20 East

of the Salt Lake Meridian in Utah Territory.

BY

Augustus D Fenon

U. S. DEPUTY SURVEYOR,

Under his Joint Contract No. 92

dated June 13 1879.

Survey commenced Oct 28 1879.

Survey completed " 29 1879

Book 163

Exterior and Subdivision Lines

Township 6 S. **R.** 20 E.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
391	389	387			
368 30 388	29 383	28 380	27	26	25
387	386	382	378	376	373
367 31 385	32 381	33 377	34 375	35 372	36

BOOK-A-163

Subs. Tp. 6 S. R. 20 E.

Survey commenced Oct. 28, 1879 by A. D. Fenon

From the cor to Secs. 35 and 36 on the South Boundary of the Tp. True North Bet Secs. 35 and 36

Var 16° 30' E.

2.50 Road brs. N.W. and S.E.

5.00 Leave Bad lands & enter Bench.

27.25 Bad land Wash drus. S.E. enter bad lands

39.00 " " " " " "

40.00 Set Sandstone 20 x 10 x 6, 15 in. deep, marked 1/4 on W side, with stone mound for 1/4 Sec. cor.

43.00 Wash drus S.E.

56.50 Enter higher Bench

80.00 Set Sandstone 24 x 12 x 8 in. 18 in deep marked 1 notch on Sand 1 on E

Subs. Tp. 6 S. R 20 E of

Edges with stone mound
for cor. to Secs 25, 26
35 and 36.
Land Bench and Bad land
Soil 1st and 3rd rate
No Timber.
Augmented on 80 ch's

East on a random line
let Secs. 25 and 36
Var 16° 30' E

5.50 Bed of steep rocky wash drain
8.50 " " " " " " "
18.80 Sandstone ledge 15 ft heigh
bro. N.E. and S.W.
20.00 Hollow drns. N.E.
40.00 Set Sandstone 16 x 12 x 7,
11 in. deep, marked 1/4 on
N side, with stone mound
for 1/4 Sec. cor

Salt Lake Meridian

50.00 Flat Hollow drus. N. E.

59.00 Low broken rocky ridge bus. N. E. and S. W.

65.00 Leave broken Bench enter flat.

80.00 Int. E. Boundary of Tp. at cor to Secs. 30. 31. 25 and 36. from which West on true line bet. Secs. 25 and 36.

40.00 Set sand stone 16 x 12 x 7, 11 in deep, marked 1/4 on N. side with stone mound for 1/4 Sec. cor.

80.00 The cor. to Secs. 25. 26 35 and 36.

Land broken Gypsum hills

Soil 3rd rate.

No Timber

Augmented on 65 chs.

Subs. Tp. 6 S R 20 E of the

Note. Land further
North not Surveyable
according to instructions
Therefore from the cor
to Secs. 34 and 35 I
run
North let Secs. 34 and 35
39.00 Enter higher bench Var 16° 30 E.
40.00 Set Sandstone 20 x 14 x 4,
15 in. deep, marked 1/4
on W side, with stone
mound for 1/4 Sec. cor.
80.00 Set Sandstone 24 x 10 x 8,
18 in deep, marked with
2 notches on E and W Edge
with stone mound for
cor. to Secs. 26. 27. 34
and 35.
Land level Bench
Soil 1st rate

Salt Lake Meridian

No Timber.

East on a random line
bet Secs. 26 and 35
Var 16° 30 E.

40.00 Set temp 1/4 Sec. cor.
45.00 Leave Bench, enter
Broken Bad lands
53.00 Main Wash drns. S. E.
56.00 Rocky point, Crs. S. 3 chns.
73.50 Rocky Wash drns N. E.
80.00 Int. N. and S. line at
cor. to Secs. 25. 26. 35 & 36
from which
West on true line bet.
Secs. 26 and 35,
40.05 Set Sand stone 26 x 12 x 6
20 in. deep, marked 1/4
on N side, with stone

Subs. Tp. 6 S. R. 20 E. of the

mound for 1/4 Sec. cor.

80.10 The cor to Secs. 26. 27. 34 and 35.

Land E 1/2 Broken.

West 1/2 level Bench

Soil 1st rate

No Timber.

Note: Land further North not surveyable.

Therefore from the cor. to Secs. 33 and 34 on South Boundary of Tp. 6 run North bet. Secs. 33 and 34

Var 16° 30' E.

6.00 Wash drus. S. W.

20.00 Same wash drus. S. E.

22.00 Wash drus S. W.

40.00 Set Sand stone 16 x 10 x 4

Salt Lake Meridian

10 in. deep marked 1/4
on W side for 1/4 Sec.
cor. with stone mound.

47.50 Enter Level Bench.
88.00 Set Sandstone 25 X 13 X
11. 19 in. deep, marked
3 notches on E and 1 on
S. edges. with stone mound
for cor to Secs. 27. 28
33 and 34.

Land Bench
Soil 1st rate
No Timber

East on random line
bet Secs. 27 and 34
Var 16° 30' E.

25.00 Enter Cove in bench
37.00 Leave same enter higher Bench

377

Subs. Tp. 6 S. R 20 E of the

40.00 Set temp. 1/4 Sec. cor.

55.00 Hollow drus. S.W.

61.75 Enter lower Bench

80.12 Int N. and S. line 15 lks.
N. of cor. to Secs. 26.27.
35 and 34 from which
N 89°54' W on true line
bet Secs. 27 and 34

40.06 Set Sandstone 16 x 10 x 5,
11 in. deep, marked 1/4 on
M. side, with stone mound
for 1/4 Sec. cor.

80.12 The cor to Secs. 27.28
33 and 34.
Land mostly ~~level~~ broken
Soil 2nd rate
No Timber.

Augmented on 61.75 Ch.

Salt Lake Meridian

North Cor. Secs. 27 and 28

Var 16°30' E

40.00 Set Sand stone 2 6 x 17 x 3, 20 in. deep, marked 1/4 on W side, for 1/4 Sec. cor. with stone mound

75.00 Washdown S. W. ascend on S. slope of Bench

80.00 Sand stone 20 x 12 x 6, 15 in. deep, marked 2 notches on Sand 3 on E. edges with stone mound for cor. to Secs 21, 22, 27 and 28

Land Bench brake

Soil 3rd rate

No timber

Measured on 60 chs

Oct 28th 1879

Note: Land further East

30

Subs. Tp. 6 S. R 20 E of the

and North not surveyable
according to instructions
therefore from the cor to
Secs. 32 and 33 on the South
Boundary of the Tp I run
North let Secs. 32 & 33
Var 16° 30' E

40.00 Set Sandstone 18 X 12 X
6. 13 in. deep, marked
1/4 on W side, with stone
mound for 1/4 Sec. cor.

79.00 Wash drains S.E.

80.00 Set Sandstone 30 X 20 X 6.
24 in. deep, marked with
1 notch on Sand 4 on E.
Edges, with stone mound
for cor. to Secs. 28. 29. 32
and 33.

Land level
Soil 1st rate
No Timber

BOOK

30.00
40.00
46.00
79.50
80.00
40.00
80.00

Salt Lake Meridian

East on a random line
Set Secs 28 and 33

Var 16°30' E

30.00 Badland Wash. drus. S.W.
40.00 Set Temp. 1/4 Sec. cor.
46.00 Badland Wash drus. S.E.
Ascend
79.50 Enter Bench.
80.00 Int. N and S. line at cor
to Secs. 27, 28, 33 and 34
from which
West on true line Set
Secs 28 and 33

~~Var 16°30'~~ E.

40.00 Sandstone 18 x 12 x 4.
13 in deep, marked
1/4 on N. side with
Stone mound for 1/4 Sec.
cor.
80.00 The cor. to Secs. 28. 29.

Subs. Tp. 6 S. R 20 E of the

32 and 33.

Land mostly Bench

Soil 1st and 3rd rate

No Timber.

North Lat Secs. 28 and 29

36.75 Wash drains S.W. Var 16° 30' E.

40.00 Set Sandstone 18 x 10 x 7

13 in. deep, marked 1/4

on W. side with stone

mound for 1/4 Sec. cor.

80.00 Sandstone 24 x 12 x 6,

18 in. deep, marked

2 notches on S and 4 on

E. edges with stone mound

for cor. to Secs. 20. 21. 28 & 29

Land Broken

Soil 2nd rate

No Timber

BOOK-

Sal

22.50

35.00

40.00

50.00

70.50

80.20

40.10

80.20

Salt Lake Meridian

East on random line
bet. Secs. 21 and 28
Var 16°30' E.

22.50 Wash dows. S. W.
35.00 Rocky Wash dows. S.
ascend
40.00 Set temp 1/4 Sec. cor
50.00 Top of Sandstone Ledge
70.50 Leave same
80.20 Int. N and S. line at cor
to Secs. 21. 22. 27 and 28
from which
West on true line
bet Secs. 21 and 28
40.10 Set Sandstone 14 x 14 x 4
9 in. deep, marked 1/4 on N
side, with stone mound
for 1/4 sec. cor.
80.20 The cor to Secs 20. 21. 28
and 29

Subs. Tp. 6 S. R 20 E of

Land Broken
Soil 3rd rate
No Timber
Augmented on 25.20 ch.

Note: Line further North impracticable. Therefore from the cor. to Secs 31 and 32 on South Boundary of Tp. Trun North bet Secs 31 & 32
Var 16° 30' E

40.00 Set Sandstone 15 x 10 x 6, 10 in. deep, marked 1/4 on W side, with stone mound for 1/4 Sec. cor.

80.00 Set Sandstone 20 x 12 x 6, 15 in. deep, marked 5 Notches on E and 1 on S. edges, with stone mound for cor. to Secs. 29. 30.

BOOK A

the Sa

31

E

40.00

79.75

80.00

40.00

E of the Salt Lake Meridian

31 and 32.
Land level
Soil 1st rate
No Timber

East on random line
bet secs. 29 and 32
Var 16° 30' E.

40.00 Set temp. 1/4 Sec. cor.
descend

79.75 Wash drus S. E.

80.00 Part. N. and S. line 35 lks.
S. of cor. to Secs. 28. 29. 32
and 33. from which
S. 79° 45 W on true line
bet Secs. 29 and 32.

40.00 Set Sandstone 20 x 10 x 6
15 in. deep, marked 1/4 on
N side with Stone Mound

for 1/4 Sec. cor.

80.00 The cor. to Secs. 29. 30
31 and 32.
Land Bench
Soil 1st rate
No Timber

West on random line
bet. Secs. 30 and 31
Var 16°30' E.

5.00 Descend
30.00 Wash drains S.
40.00 Set temp. 1/4 Sec. cor.
45.50 Top of Plateau
47.00 Descend
56.50 Wash drns. S.W.
57.50 Ascend
60.00 Top of spurr ridge
64.00 Descend
77.60 Int West Boundary of

Salt

37.60

77.60

23.00
40.00

Salt Lake Meridian

to Secs. 25, 30, 31 & 36

Dp. 20 lks. N of cor.
from which S. 79°57' E
on true line bet Secs
30 and 31

37.60 Set Sandstone
20 x 12 x 3. 15 in. deep
marked 1/4 on N side
with stone mound for
1/4 Sec. cor.

77.60 The cor. to Secs. 29, 30
31 and 32.
Land Broken Bad land
hills and ridges
Soil 3rd rate
No Timber

Augmented n. 32.60 ch.

North bet. Secs. 29 and 30
Var. 16°30' E.

23.00 Wash in hollow drains S.E. gave bench ascending
40.00 Deposyt 1/2 Gal Bois du

Subs. Tp. 6 S. R. 20 E

vac. in reg mound of
earth and pits for 1/4 Sec. cor.
47.00 Wash drains S.W.
69.50 Ascend
73.00 Enter Bench
80.00 Set Sandstone 40 x 25 x 8,
30 in. deep marked
2 notches on Sand 5 on E
Edges with stone mound
for cor. to Secs 19, 20
29 and 30.
Land Bench Breaks.
Soil 3rd rate
No Timber.
Augmented on 57. chs.

East on random line
Let. Secs. 20 and 29
Var 16° 30' E.

12.00 Descend
18.50 Wash drns. S.W. ascend

of the Salt Lake Meridian

20.00 Top of Ledge Enter Bench
40.00 Set temp. 1/4 Sec. cor.
56.50 Wash drns. S.W.
72.00 Descend
80.20 Int. N and S. line at cor. to Secs. 20. 21. 28 and 29, from which West on true line bet Secs. 20 and 29.
40.10 Set Sandstone 14 X 10 X 4 9 in. deep, marked 1/4 on N side, with reg. mound and pits for 1/4 Sec. cor.
80.20 The cor. to Secs. 19. 20. 29 and 30.
Land rolling and broken Bench Hills
Soil 1st rate
No Timber
Augmented on 77 Chs.

Subs Tp. 6 S. R. 20 E. of the

West on random line
bet. Secs 19 and 30
Var 16° 30' E.

40.00 Set temp 1/4 Sec. cor.

77.40 Int. W. Boundary of Tp.
25 lks. N of cor. to Secs.
19, 24, 25 and 30 from
which
N. 89° 50' E on
true line bet Secs. 19 and 30

37.40 Set Sandstone 15 X 10 X 6
10 in. deep marked 1/4 on
N side with stone mound
for 1/4 Sec. cor.

77.40 The cor. to Secs. 19. 20.
29 and 30.
Land very broken, Hilly.
Soil 3rd rate
No Timber.
Augmented on 77.40 chs

Salt Lake Meridian

Note: on account of mountainous ground I abandon further survey of this Tp.
Oct. 29th 1879.

General Description
The surveyed portion of this Township embraces some good flats and surrounding benches, which latter are, for the most part, broken and rocky
The unsurveyed part consists of unavailable bad lands

A D Fenon
Dep. Sur.

* The gypsum hills mentioned in the notes do not contain sufficient gypsum to warrant the in estimating same as mineral land.

BOOK-A-163

393

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah Febry 24 18 80

The foregoing field notes of the survey of the

Fractional Subdivisions of

Township No 6 S. *Range No* 20 E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Ferm

Under joint *contract No* 92

of the 13th *day of* June 1879,

in the month of Oct. 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-163

R: 1880 (163) 394

Filed Jany 21st 1880

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

Exteriors

of Township No. 6 South, Range No. 21 East

of the Salt Lake Meridian in Utah Territory.

BY

E. Buettner

U. S. DEPUTY SURVEYOR,

Under his joint Contract No. 92

dated June 13th 1879.

Survey commenced October 31st 1879.

Survey completed " " 1879.

BOOK-A-163

East Boundary Tp. 6 S. R 21 East

Survey commenced Oct. 31st 79
By E. Buttner.
From the cor. to Tps. 6 and
7 South R. 21 and 22 E.
North bet Secs. 31 and 36.
Var 16° 30' E.

7.00 Hollow drus. N. W.
40.00 In Hollow drus. N. W.
Set Sandstone 11 x 10 x 7
6 in. deep, marked 1/4 on
West side, with stone mound
for 1/4 Sec. cor.
70.50 Hollow drus. N. W.
80.00 Set Sand stone 12 x 9 x 8
8 in. deep, marked 5
notches on Sandstone d.
Edges with stone mound
for cor. to Secs. 25. 30.
31 and 36.
Land broken upland

East Boundary Tp. 6 S. R 21 E.

Soil 2nd rate
No Timber.
Augmented on 80.00 chns

North bet. Secs. 25 and 30
Var 16° 30' E.

25.40 Left bank of Green River 4 ft. deep rus. S. W. Set charred Cottonwood post 4" x 4" 4 ft. long 2 ft. deep, marked M. C. with reg mound and pits for Meander Cor. to fractional Secs 25 and 30

Note: I offset 10 chns. East 61.84 chns North and 12 chns West where I set

of the Salt Lake Meridian

charred Cotton-wood post
4" x 4" 4 ft. long 2 ft. deep
marked M. C. with reg
mound and pits for Meander
Cor to fractional Secs.
19 and 24 and to
Witness

80.00 The cor. point to Secs.
19. 24. 25 and 30 falls
in Green River, said
Meander Cor. being
7.24. chns N. of same, on
Right Bank of River.
Land broken Mountains
Soil 3rd rate
No Timber
Ang. rented on 80.00 chns

North bet Secs 19 & 24

East Boundary Tp. 6 S. R 21 E.

Var. 16° 30' E.

7.24 Meander Cor.

34.00 Hollow drus. S.W.

40.00 Set Sandstone 12 x 8 x 7
8 in. deep, marked 1/4 on
W. side with stone mound
for 1/4 Sec. cor.

60.50 Hollow drus. S.W.

80.00 Set Sandstone 12 x 10 x 7
8 in. deep, marked 3
notches on N and S. Edges
with stone mound for
cor to Secs. 13. 18. 19 & 2[illegible]

Land Broken Soil 3rd [illegible]
No Timber

augmented on 80.00 chus.

Note: abandon line being impracticable

Note. For General Description
see end of Subs. of this Tp.

October 31st 1879 E. Buettner
Dep. Sur.

BOOK-A-163

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Febry 24 1880

The foregoing field notes of the survey of the

East boundary of

Township No 6 S. *Range No* 21 E.

of the Salt Lake Meridian, Utah Territory,

Executed by E. Buttner

Under joint *contract No* 92

of the 13 *day of* June *1879*

in the month of Oct. *1879*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-163
R: (163) 400

Filed Jany 21st 1880

Examined by T. C. Bailey

Compared by C.E.S. and F.L.A.S.

FIELD NOTES

OF

THE SURVEY OF THE

Subdivision Lines

of Township No. 6 South Range No. 21 East

of the Salt Lake Meridian in Utah Territory.

BY

E. Buettner

U. S. DEPUTY SURVEYOR,

Under ~~his~~ joint Contract No. 92

dated June 13th 1879.

Survey commenced October 31st 1879.

Survey completed November 7th 1879.

Meanders pp. 450-463

Book 163

Exteriors and Subdivision Lines

Township 6 S. **R.** 21 E.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
448	446	433	424	415	408
19 445	20 432	21 423	22 414	23 406	24 397
444	441	430	421	412	404
30 440	29 429	28 420	27 412	26 403	25 396
438	436	428	418	411	402
31 435	32 426	33 417	34 409	35 401	36 395

Meanders - Pg 451-463

BOOK A-163

Subs. Tp. 6 S. R. 2 E. 401

Survey commenced Oct. 31st 79
By E. Buettner
From the established cor.
to Secs. 35 and 36 on
South Boundary
North bet. Secs. 35 and 36
Var. 16° 30' E.

40.00 Set Boulder 10 X 8 X 7, 6 in
deep marked 1/4 on W side
with reg. mound and pits
for 1/4 Sec. cor.

60.00 Leave Bottom Enter Bench

80.00 Set Boulder 12 X 8 X 6,
8 in deep marked 1 notch
on S and E edges with
reg. mound and pits
for cor. to Secs. 25. 26.
35 and 36.
Land level
Soil 1st rate

No Traverse

East on random line
bet. Secs. 25 and 36
Var. 16°30' E

40.00 Set temp. 1/4 Sec. cor.
52.10 Right Bank of Green River
4 ft. deep rds. S. W.
66.00 Left Bank of Green River
80.00 Int. E. Boundary of Tp.
at cor. to Secs. 25 and 36,
from which
West on true line
bet. Secs. 25 and 36.
14.00 Set Sandstone 12 x 7 x 7
8 in. deep marked M. C.
with stone mound for
Meander cor to Fractional Secs. 25 and 36

27.90
40.00
80.00
40.00

COOK-A-

COOK-A-163

E. of the Salt Lake Meridian

27.90 Set Sandstone 14 X 10 X 3
7 in deep, marked M. C.
with stone mound for
Meander cor to fractional
Secs. 25 and 36.

40.00 Set Sandstone 11 X 10 X 5
7 in deep marked 1/4
on N. side with stone
mound for 1/4 Sec. cor.

80.00 The cor. to Secs. 25, 26
35 and 36.

Land mostly level
Soil 1st rate
No timber.

North bet. Secs. 25 & 26
Var 16° 30' E.

4.00 Set Sandstone 18 X 8 X 8
12 in. deep marked

1/4 on W side with
reg. mound and pits
for 1/4 Sec. cor.

66.50 Descend

80.00 Enter Green River Bottom
Set Sandstone 20 x 14 x 5
15 in. deep, marked 2
notches on Sand 1 on E
edges, with reg. mound
and pits for cor to Secs.
23. 24. 25 and 26.
Land mostly level
Soil 1st rate
No Timber

East on random line
bet Secs. 24 and 25
Var 16° 30' E.

40.00 Set temp 1/4 Sec. cor.

BOOK-A-1

Salt

63.71 L
4

80.00

16.19

Salt Lake Meridian

63.71 Left Bank of Green River
4 ft. deep. run. S. E.,
I thence triangulate to a
point on East side of
Green River which
I find to be 21.19 chns.
distant thence offset
North 7.24 chns.
West 5.00 " to
Witness 7.24 chns. North
of
80.00 Int. E Boundary of Tp.
at cor. point to Secs. 24 & 25
from which
West on true line
bet Secs. 24 and 25
16.19 Set charred Cottonwood
post 4" x 4" 4 ft. long 2 ft.
deep marked M.C. with
stone mound and pits

for Meander Cor. to fractional Secs. 24 and 25.

40.00 Set Sandstone 9×8×8, 6 in. deep, marked 1/4 on N. side with stone mound for 1/4 Sec. cor

80.00 The cor. to Secs. 23. 24 25 and 26

Land level

Soil 1st rate

No Timber

North bet Secs. 23 & 24

Var. 16° 30' E.

14.51 Left Bank of Green River 4 ft. deep rus. West

Set Sandstone 30×10×4 6 in deep. marked M.C. with stone mound for Meander Cor

16.50 E

18.50

33.72

40.00

61.00

80.00

to fractional Secs. 23 and 24
16.50 Euler small Island
18.50 Lease Island
33.72 Right Bank of Green River. Set Sandstone 12 x 7 x 6, 8 in. deep, Marked M. C. with stone mound for Meander Cor to ~~Frac.~~ Ascend Sec. 23 and 24
40.00 Set Sandstone 13 x 7 x 6. 8 in. deep marked 7 on W side, with stone mound for 14 Sec. cor.
61.00 Hollow drus. West
80.00 Set Sandstone 16 x 14 x 5 11 in deep marked 3 notches on Sand 1 on E edges, with stone mound for cor to Secs. 13. 14. 23 and 24.

Subdivisions Tp. 6 S. R. 21 E of the

Land level and broken
Soil 3rd and 1st rate
No Timber
augmented on 46.28 chns.

East on random line
bet. Secs. 13 and 24
Var 16°30' E.

40.00 Set temp 1/4 Sec. cor.
58.00 Hollow drus South
80.18 Int. E. Boundary of Tp.
at cor to Secs. 13 and 24
from which
West on true line
bet. Secs. 13 and 24
40.09 Set Sandstone 10 x 10 x 7
6 in. deep, marked 1/4
on N side, with stone
mound for 1/4 Sec. cor.

Salt

80.18 T
a

No

28.7

Salt Lake Meridian

80.18 The cor. to Secs. 13. 14. 23 and 24

Land very broken.
Soil 3rd rate
No timber

augmented on 80.18 chns.

Note: abandon survey North.

North bet Secs. 34 & 35
Var 16° 30' E

From a point 14.92 chns East of cor. to Secs. 34 and 35 I offset
North 28.72 chns.
West 14.92 to

28.72 on line in place on Left Bank of Green River 4 ft. dep. rns. N. W.
Set charred cottonwood post 4" x 4" 4 ft. long 2 ft. dep

Subdivision Tp. 6 S. R 21 E

BOOK of the

marked M. C. with
reg. mound and pits for
for Meander cor. to Secs.
34 and 35.

40.00 Set charred bottomwood post
4" x 4" 4 ft. long 2 ft. deep
marked 1/4 S on W side
with reg. mound and
pits for 1/4 Sec. cor.

80.20

51.25 Enter Bench

40.10

80.00 Set Sandstone 15 x 12 x 4
10 in deep marked 1 notch
on S and 2 on E edges
with reg. mound and pits
for cor. to Secs. 26. 27.
34 and 35

80.20

Land mostly level
Soil 1st rate
No timber

of the Salt Lake Meridian

East on random line
bet. Secs. 26 and 35
Var 16°30' E.

40.00 Set temp 1/4 Sec. cor.
80.20 Int. N and S. line 35 lks.
N of cor. to Secs. 25. 26.
35 and 36 from which
N 89°45' W. on true
line bet Secs. 26 and 35
40.10 Set Sandstone 12X10X4
8 in. deep, marked 1/4 on
N side, with reg. mound
and pits for 1/4 Sec. cor.
80.20 The cor. to Secs. 26. 27.
34 and 35

Land gently rolling
Soil 1st Class
No Timber.

Subdivisions Tp. 6 S. R 21 E.

North bet. Secs. 26 & 27
Var 16° 30' E.

40.00 Set Sandstone 22 x 12 x 3
16 in. deep marked 1/4
on W side with stone
mound for 1/4 Sec. cor.

74.50 Hollow drns. West.

80.00 Set Sandstone 20 x 10 x 8
15 in deep marked 2
notches on Sand 2 on E edges
with stone mound for
cor. to Secs. 22. 23.
26 and 27
Land level
Soil 1st rate
No Timber.
October 31st 1879

East on random line
bet. Secs. 23 & 26

BOOK-A-
of the Sh

16.50 E
40.00
63.00
80.00
40.00
80.00

of the Salt Lake Meridian

Var 16°30' E.

16.50 Enter level Bruch

40.00 Set temp. 1/4 Sec. cor.

63.00 Descend

80.00 Int. N. and S. line 21 lks. S. of cor. to Secs. 23. 24. 25 and 26. from which S. 89°51' W. Cet. Secs. 23 & 26

40.00 Set Boulder 15 X 12 X 7 18 in. deep, marked 1/4 on N side, with reg. mound and pits for 1/4 Sec. cor.

80.00 The cor. to Secs. 22. 23. 26 and 27

Land level and bottom

Soil 1st rate

No timber

augmented on 33.50 chns. →

Subdivisions Tp. 6 S. R. 2 E.

North Cor. Secs. 22 & 23
Var 16° 30' E.

9.00 Ridge bears N. W. and S. E.

22.09 Right Bank of Green River
4 ft. deep runs East set
charred bottomwood post
4" x 4" 4 ft. long 2 ft. deep
marked M. C. with reg.
mound and pits for
Meander cor. to fractional
Secs. 22 and 23.

34.72 Right Bank of Green River
Set charred bottomwood post
4" x 4" 4 ft. long 2 ft. deep
marked M. C. with reg.
mound and pits for
Meander Cor. to fractional
Secs. 22 and 23

40.00 Set Sandstone 12 x 12 x 10
8 in. deep, marked "C"

BOOK
of the

80.00

20.00
40.00

of the Salt Lake Meridian

on W side with. reg.
mound and pits for
1/4 Sec. cor.

80.00 Set Sandstone 16X10X10 —
11 in deep marked 3
notches on S and E on
E edges, with stone
mound for cor. to Secs.
14. 15. 22. and 23.
Land level and broken
Soil 1st and 3rd rate
No Timber
any marked on 22. of Secs.

East on random line
Set Secs. 14 and 23
Var 16° 30' E.

20.00 Enter Grass. Bottom
40.00 Set temp. 1/4 Sec. cor

Subdivision Tp. 6, S. R. 2 E

44.00	Right Bank of Green River 4 ft. deep run S. W.	44.00
55.25	Left Bank of Green River	
80.00	Set N and S. line at cor. to Secs. 13, 14 23 and 24 from which West on true line bet. Secs. 14 & 23.	80.00
24.75	Set charred cottonwood post 4"x4" 4 ft. long 2 ft. deep, marked M. C. with reg. mound and pits for Meander Cor to fractional Secs. 14 & 23	
36.00	Set charred Cottonwood post 4"x4" 4 ft. long 2 ft. deep, marked M. C. with reg. mound and pits for Meander Cor.	37.00 40.00

BOOK-A-163

of the Salt Lake Meridian

to fractional Secs. 14 & 23

40.00 Set Cobble stone 9x9x6
5 in deep marked 1/4 on
N side with reg. mound
and pits for 1/4 Sec. cor.

80.00 The cor. to Secs. 14. 15
22 and 23

Land mostly level
Soil 1st rate
No Timber
augmented on 24.75 chns

Note: abandon survey north
on account of Mountains.

North bet Secs 33 & 34
Var 16° 30' E

37.00 ascend

40.00 Marked Stationary sandstone

Subdivisions Tp. 6 S. R 21 E.

BOOK-
of the

	3 x 3 x 2 ft. above ground, on W side with stone mound for 1/4 Sec. cor.	29.00 40.00 40.20
56.00	Enter Plateau	
70.50	Descend	45.60
80.00	Set Sandstone 12 x 12 x 8, 8 in. deep, marked / notch on S and 3 on E edges. with stone mound for cor. to Secs. 27. 28. 33 and 34.	39.60 40.00 80.00
	Land Mountainous and level	20.40
	Soil 2nd and 1st rate	
	No Trees	
	augmented on 43.00 chains	
	East on random line bet. Secs. 27 and 34	37.80

of the Salt Lake Meridian

Var 16° 30' E.

27.00 Euler River Bottom
40.00 Set temp. 1/4 Sec. cor.
40.20 Left Bank of Green River 4 ft. deep mns. S. E.
45.60 South End of Island bns. N 10 chns.
57.60 Right Bank of Green River
70.00 Euler Branch
80.00 Int. N and S line at cor. to Secs. 26. 27. 34 & 35 from which
West on true line bet. Secs. 27 and 34
20.40 Set charred Cottonwood post 4"x4" 4 ft. long, 2 ft. deep marked M. C. with sec. numbers and pits for Meander cor. to fractional Secs. 27 and 34
37.80 Set charred Cottonwood post 4"x4" 4 ft. long

Subdivisions Tp. 6. S. R 21 E of the

BOOK-

Salt

	2 ft. deep, marked M. C. with reg. mound and pits for Meander Cor. to fractional Secs 27 and 34.	4.00
40.00	Set charred Cottonwood 4" x 4" 4 ft. long 2 ft. deep marked 1/4 S on N side with reg. mound and pits for 1/4 Sec. cor	40.00
80.00	The cor. to Secs. 27. 28 33 and 34	80.00
	Land Bottom and Slope Soil 1st and 3rd rate No Timber	
	Augmented on 27.00 chns.	
	North bet. Secs. 27 and 28 Var 16° 30' E.	24.30

of the Salt Lake Meridian

4.00 Enter flat

40.00 Sandstone 10 x 8 x 8, 6 in deep marked 1/4 on W side with stone mound for 1/4 Sec. cor.

80.00 Set bolder stone 10 x 7 x 6 6 in. deep, marked 2 notches on sand 3 on E edges, with reg. mound and pits, for cor. to Secs. 21, 22, 27 and 28. Land mostly level Soil 1st rate No Timber.

East on random line bet. Secs. 22 and 27 Var 16° 30' E.

24.80 Left bank of Green River

Subdivisions Tp. 6 S. R. 21 E

BOOK of the

	4 ft. deep ens. North	
40.00	falls in River	80.00
43.10	Right Bank of Green River	
75.00 agency		
80.00	Int. N and S. line 22 lks. S. of cor. to Secs. 22. 23. 26 and 27 from which S. 89° 51' W on true line bet Secs. 22 and 27	
36.90	Set Sandstone 20x10x8 15 in deep, marked M. C. with stone mound for Meander Cor. to fractional Secs. 22 and 27.	2.00 35.00
40.00	In River not set.	
55.20	Set charred Cottonwood post 4"x4" 4 ft. long 2 ft. deep marked M. C. with reg. mound and pits for Meander Cor. to fractional	4.00 55.16

of the Salt Lake Meridian

Secs. 22 and 27

80.00 The cor. to Secs. 21. 22. 27 & 28

Land level

Soil 1st rate

No Timber.

North bet Secs. 21 and 22

Var 16° 30' E.

2.00 Enter Bottom

35.00 Set Sandstone 20 x 13 x 3

15 in deep marked M. C.

with stone mound for

Meander Cor. to fraction-

al Secs. 21 and 22. on

Left Bank of Green

River 4 ft. deep rus. S. W

40.00 falls in River not set

55.16 Right Bank of Green

River. Set Sandstone

Subdivisions Tp. 6 S. R. 21 E

	20 X 10 X 8, 15 in. deep, marked M. C. with stone mound for Meander cor. to fractional Secs. 21 and 22. Accepted.	35.00 40.00 64.50 80.40
65.00 80.00	Set Sandstone 24 X 16 X 12 18 in. deep, marked 3 notches on Sand E. Edges with stone mound for cor. to Secs. 15. 16. 21 and 22. Land level and broken Soil 1st and 3rd rate No Timber Augmented on 24.84 chns.	40.20 80.40

East on random line bet. Secs. 15 and 22 Var. 16°30' E.

BOOK-A-163

of the Salt Lake Meridian

55.00 Ridge brs. N.W. and S.E.

40.00 Set temp. 1/4 Sec. cor.

64.50 Enter Main hollow, drns S.E.

80.40 Int. N and S. line at cor. to Secs. 14, 15, 22 and 23.

Going which West on true line bet. Secs. 15 and 22

40.20 Marked Stationary Sandstone 2 x 2 x 12 ft. above ground 1/4 on N side with stone mound for 1/4 Sec. cor.

80.40 The cor to Secs. 15, 16, 21 and 22.

Land mostly broken Mountains

Soil 2nd rate

No Timber

Subdivisions Tp. 6 S. R. 2 E of the | BOOK | Salt

augmented on 64.50 chas.—
Note: abandon survey north | 27.00
40.00

North bet Secs. 32 & 33
Var 16° 30' E

1.04 Right Bank of Green River 4 ft. deep runs S. E. Set charred | 52.00
63.00

~~9.00~~ Cottonwood stake 4" x 4" 4 ft. long 2 ft. deep, marked M. C. with reg. mound and pits for Meander Cor. to fractional Secs. 32 & 33 | 80.00

9.00 Left Bank of Green River Set charred cottonwood stake 4" x 4" 4 ft long 2 ft. deep marked M. C. with reg. mound and pits for Meander Cor

Salt Lake Meridian

to fractional Secs. 32 & 33.

27.00 Gulch drus. S. W.

40.00 Set Sandstone 12 x 8 x 6, 8 in. deep, marked 1/4 on W. side, with stone mound for 1/4 Sec. cor.

52.00 Gulch drus. West

63.00 " " "

80.00 Sandstone 15 x 8 x 5, 10 in. deep, marked 1 notch on S. and 4 on East edges with stone mound for cor. to Secs. 28. 29. 32 and 33.

Land Broken

Soil 3rd rate

No Timber

augmented on 71.00 chns.—

Subdivisions Tp. 6 S. R 21 E

East on random line
bet Secs. 28. and 33
Var 16° 30' E.

27.00 Head of Gulch drns. S.W.
36.00 Enter small plateau
40.00 Set temp. 1/4 Sec. cor
43.00 Descend
79.80 Int. N and S. line at cor.
to Secs. 27. 28. 33 and 34
from which
West on true line
bet. Secs. 28 and 33
39.90 Set Cobble stone 12 x 12 x 4
6 in. deep, marked 1/4 on
N side with stone mound
for 1/4 Sec. cor.
79.80 The cor to Secs. 28. 29
32 and 33.
Land Broken
Soil 2nd rate

BOOK-A
of the

14.00
40.00
60.00
70.25
80.00

of the Salt Lake Meridian

No Timber

augmented on 79.80 chns.

North bet. Secs. 28 & 29

Var 16° 30' E.

14.00 Enter Bench

40.00 Set Sandstone 12 x 9 x 6, 8 in. deep, marked 1/4 on W side with stone mound for 1/4 Sec. cor.

60.00 Enter Green River Bottom

70.25 Left Bank of Green River 4 ft. deep, rns. S.W.

Set Sandstone 12 x 12 x 4, 8 in. deep, marked M.C. with reg. mound and pits for Meander Cor. to fractional Secs. 28 & 29

80.00 Falls in River not set

Subdivisions Tp. 6 S. R. 21 E. of the

Land mostly level
Soil 1st rate
No Timber.

Augmented on 14.00 chns. —
November 1st 1879 40.00

East on random line
bet. Secs. 21 and 28
Var 16° 30' E.
From the Meander cor 52.40
9.75 chns. S. of cor. point
to Secs. 20. 21. 28 and 29
I offset East 27.60 chns,
North 9.75 chs to
27.60 on line Left Bank of 80.00
Green River 4 ft. deep,
runs S. W.
40.00 Set temp 1/4 Sec. cor.
52.00 Enter Brush
80.00 Int. Land S. line at cor.

of the Salt Lake Meridian

to Secs. 21. 22. 27 and 28
from which
West on true line
bet Secs. 21 and 28

40.00 Set Sandstone 18 x 6 x 6,
12 in deep, marked 1/4
on N side with reg.
mound and pits for
1/4 Sec. cor.

52.40 Set Cobble stone 10 x 10 x 5
6 in deep marked M. C.
with reg. mound and pits
for Meander Cor to
fractional Secs. 21 & 28

80.00 The cor. point to Secs. 20. 21. 28
and 29.
Land level
Soil 1st rate
No Timber

	North bet. Secs. 20 and 21	68.50
	Var 16° 30' E.	80.00
	From the Meander cor.	
	9.75 chns. S. of cor point	
	to Secs. 20. 21. 28 and 29	
	I triangulate to Right	
	Bank of Green River,	
	find distance to be 17.85 chns.	
8.11	Right Bank of Green River	
	Set charred Cottonwood post	
	4" x 4" 4 ft. long. 18 in. deep	
	marked M1a with stone	
	mound and pits for	
	Meander cor to fractional	
	Secs. 20 & 21.	
20.00	Leave Bottom Enter hills	
40.00	Set Sandstone 24 x 12 x 8	12.00
	16 in deep marked 1/4	24.00
	on W side with stone	30.00
	mound for 1/4 Sec. cor	40.00

of the Salt Lake Meridian

...nd 21	68.50	Hollow drus. S. East
...0° E.	80.00	Set Sand stone 18 x 12 x 6. 12 in. deep marked 3 notches Sand 4 on E edges with stone mound for cor. to Secs. 16. 17. 20 & 21 Land mostly broken Soil 3rd and 1st rate No Timber. Alleg mented on 60.00 chns.
...ht		
...85 chns.		
...ver		
...gon		
...deep		
...eg		
...inal		East on random line bet Secs. 16 and 21 Var 16° 30' E.
...ills		
...x 8	12.00	Gulch drus South
...94	24.00	" " "
...ous	30.00	" " "
...or	40.00	Set temp. 1/4 Sec. cor

Subdivisions Tp. 6 S. R 21 E.

52.50	Large Gulch drns. S.W.	
80.42	Int. N and S. line at cor. to Secs. 15. 16. 21 and 22	2.00
	from which	21.00
	West on true line bet Secs. 16 and 21	
48.30	Set Sandstone 18 x 7 x 5 12 in deep marked 1/4 on N side with reg. mound and pits for 1/4 Sec. cor.	
74.00	Gulch drains South	
80.40	The cor. to Secs. 16. 17. 20 and 21	28.00
	Land broken	
	Soil 2nd rate	
	No Timber	
	Augmented on 80.40 chn	
	Note. abandon Survey North.	40.00

of the Salt Lake Meridian

North bet. Secs. 31 & 32

Var. 16° 30' E.

2.00 Enter bottom

21.00 Right bank of Green River 4 ft. deep, run E. Marked a cottonwood 12" diameter M. C. for Meander Cor. to fractional Secs. 31 and 32. ascertained by triangulation distance across River to be 7.00 chs.

28.00 Left bank of Green River, 2 ft. shallow 10 x 8 x 7 in. deep, marked M. C. with stone mound for Meander cor. to fractional Secs. 31 & 32

40.00 Set sandstone 12 x 10 x 8 in. deep, marked

Subdivisions Tp. 6 S. R 21 E.

	1/4 on W side, with reg. mound and pits for 1/4 Sec. cor.	76.00
80.00	Set Cobble stone 12 x 10 x 6, 8 in. deep marked 1 notch on S and 5 on E edges. with reg. mound and pits for cor. to Secs. 29. 30. 31 and 32.	80.30
	Land mostly level	40.15
	Soil 1st rate	
	No Timber	
		80.30
	East on random line	
	Sec. Secs. 29 & 32	
	Var 16° 30' E	
40.00	Set temp. 1/4 Sec. cor.	
44.25	Hollow drus. N. W.	

Of the Salt Lake Meridian

ascend

76.00 Gulch drns N. W.

80.30 Int. N and S. line 23

lks. N of cor to Secs.

28. 29. 32 and 33.

from which

N. 89° 30' W on

true line, bet. Secs.

29 and 32.

40.15 Set Sandstone 14 x 7 x 6,

9 in. deep, marked 1/4 on

W side with stone mound

for 1/4 Sec. cor.

80.30 The cor. to Secs. 29. 30

31 and 32.

Land level and broken

Soil 1st and 2nd rate

No Timber

Augmented on 35.75 hrs.

Subdivisions Tp. 6. S. R21 E.

West on random line
bet. Secs. 30 and 31
Var 16°30' E.

27.23 Left Bank of Green
River 4 ft. deep. run S.E.
ascertained by Triangu-
lation distance across
River to be 9.62 chns.—

36.95 Right Bank of Green River

40.00 Set temp. 1/4 Sec. cor.

57.30 Road bns. North and South

77.92 Int. W. Boundary of Tp.
at cor. to Secs. 30 and 31
from which
East on true line
bet. Secs. 30 and 31

37.92 Set Cobble stone 10 x 9 x 6
6 in. deep, marked 1/4 on
N side with stone mound
for 1/4 Sec. cor.

of the Salt Lake Meridian

41.00 Set cobble stone 12 x 7 x 6
8 in. deep marked
M. C. with stone mound
for Meander Cor. to
fractional Secs. 30 & 31

50.62 Set charred Cottonwood
post 4" x 4" 4 ft. long
2 ft. deep marked
M. C. with reg. mound
and pits for Meander
Cor to fractional
Secs. 30 and 31.

77.92 The cor to Secs. 29. 30
31 and 32.
Land level
Soil 1st rate
No Timber

Subdivisions Tp. 6 S. R. 21 E.

North bet. Secs. 29 & 30.

Var 16° 30' E.

32.50 Left Bank of Green River 3 ft. deep run N.W. set cobble stone 13 x 8 x 6. 9 in. deep marked M. C. with stone mound for Meander Cor. to fractional Secs. 29 and 30.

Find by triangulation distance across River to be 14.30 chs.

40.00 Falls in River not set

47.30 Right Bank of Green River at mouth of washes set charred cottonwood post 4" x 4" 4 ft. long 2 ft. deep, marked M. C. with reg. mound and pits

BOOK-

of the

63.00

73.50

80.00

6.00

BOOK-A-163

of the Salt Lake Meridian

for Meander Cor. 6
fractional Secs. 29 & 30
63.00 Mark drus. S. E.
73.50 ascend
80.00 Set cobble stone 13x10x8
9 in. deep marked 2 notches
on S. and 5 on E. edges,
with stone mound for
cor to Secs. 19, 20, 29 & 30.
Land mostly level
Soil Strata
No Timber
augmented on 6.50 chns.—

East on random line
bet. Secs. 20 and 29
Var 16° 30' E.
6.00 Hollow drus. S. E.

Subdivisions Tp. 6 S. R 21 E

10.00 Hollow Arus. S. E.
15.00 " " " "
25.00 Enter Green River flat.
40.00 Set temp. 1/4 Sec. cor.
54.10 Right Bank of Green River, 3 ft. deep mus.
S. W. 1 offset
North 11.61 chus.
East 25.90 "
South 00.58 " to
Meander cor. 8.11 chus
North of cor point making the connection:
80.00 Int. N. and S. line at cor. to Secs. 20. 21. 28 & 29 from which
Western true line bet. Secs. 20 & 29
25.90 Set Boulder 18 x 8 x 5, 6 in. deep, marked

BOOK

of the
40.00
80.00

BOOK-A-163

of the Salt Lake Meridian

M. C. with reg. mound
and pits for Meander
Cor. to Fractional Secs.
20 and 29
from which
an Indian grave bears
N. 42° W 50 lks. distant
40.00 Set Sandstone 14 x 12 x 11
9 in. deep, marked 19 on
N. side, with reg. mound
and pits for 1/4 Sec. cor.
80.00 Re cor. to Secs. 19. 20. 29
and 30
Land level and Broken
Soil 2nd rate
No Timber
Aug marked on 25.00 chains

Subdivisions Tp. 6 S. R 21 E

West on random line
bet. Secs. 19 and 30
Var. 16° 30' E.

10.00 Enter flat
19.00 Wash drns S. E.
29.25 Road brs. N. W. and S. E.
40.00 Set comp. ¼ Sec. cor.
accord.
77.80 Int. W. boundary of Tp.
at cor. to Secs. 19 and 30
from which
East on true line
bet Secs. 19 and 30
3.78 Set sandstone 18 x 9 x 5
12 in. deep, marked ¼ on
N side with stone
mound for ¼ Sec. cor.
77.80 The cor. to Secs. 19. 20
29 and 30.

of the S

5.00
9.00
18.50
40.00
48.00
60.50
80.00

BOOK-A-163

of the Salt Lake Meridian

Land broken hills
and flat.
Soil 3rd and 2nd rate
No Timber
Augmented on 47.80. chns.

North lat. Secs. 19 and 20
Var 16° 30' E.

5.00 Hollow drns. S. E.
9.00 " " " "
18.50 " " " "
40.00 Set sandstone 19 X 8 X 5
18 in. deep, marked 1/4
on W side, with stone
mound for 1/4 Sec. cor.
48.00 Hollow drns. S. W.
60.50 Ridge trs. N. E. and S. W.
80.00 Set bolder stone 10 X 8 X 6

Subdivisions Tp. 6 S. R 21 E.

10 in. deep, marked 3 notches on S and 5 on E. edges, with stone mound for cor to Secs 17, 18, 19, and 20.

Land Mountainous

Soil 3rd rate

No Timber

augmented on 80.00 chns.—

East on random line bet. Secs. 17 and 20

Var 16°30' E.

18.00 Ridge brs. N.E. and S.W.

35.00 " " N.W. and S.E.

40.00 Set temp. 1/4 Sec. cor

64.00 Hollow drns. S.E.

80.42 Int. N and S. line

BOOK-A-163

of the Salt Lake Meridian

34 lks. S. of cor. to Secs.
16, 17, 20, and 21.
From which
S. 89° 45' W. on true
line bet. Secs. 17 & 20
40.21 Set Sandstone 13 X 10 X 6,
9 in. deep, marked 1/4 on
N. side, with stone mound
for 1/4 Sec. cor.
80.42 The cor to Secs. 17, 18
19 and 20.
Land Mountainous
Soil 3rd rate
No Timber
Augmented on 80.42 chns.—

West on random line
bet. Secs. 18 and 19
Var 16° 30' E

8.50 Hollow drain S. W
29.00 " " " "
40.00 Set temp. 1/4 Sec. cor.
49.50 Enter flat
60.25 Road bears N. W. and S. E.
78.16 Int. W. Boundary of
Tp. 27 lks. S. of Cor. to
Secs. 18 and 19.
From which
S. 89° 48' E on true
line bet Secs. 18 & 19
38.16 Set Sandstone 13 x 9 x 6.
9 in. deep marked 1/4 on
N side with stone mound
for 1/4 Sec. cor.
78.16 The cor to Secs. 17. 18
19 and 20

BOOK-
of the

BOOK-A-163

of the Salt Lake Meridian

Land mostly broken
Soil 3rd rate
No Timber
augmented on 7816 Acs
November 3rd 1879

Note: On account of unavailable Mountains I abandon further Survey of this Tp.

Meanders of Green River
in Tp 6. S. R. 21 E.

Right Bank.
Beginning at the Meander
Cor. 4400 chs. E. of cor. to
Secs. 14. 15. 22. and 23 on
right Bank of Green River
I meander down stream
as follows:

In Sec. 23.
Var 16°30' E.

S. 18° W.	32.00 chs
S. 71 W.	25.00 "
S. 16°30' W	3.60. " 6
	70-60

Meander cor bet. Secs.
22 and 23.
Thence
In Sec. 22.

Salt Lake Meridian

S 16° 30' W. 9.40 chns.
S 36° 30' E. 4.50 " to
Meander cor. bet. Secs. 33-34
22 and 23.

Thence

In Sec. 23.

S 36° 45' E. 9.00 chns.
S 63° 15' E. 12.50 "
N. 88° 30' E. 18.00 "
N 84° E. 45.70 " to
Meander cor. bet. Secs. 1-05-22
23 and 24

Thence

In Sec. 24

N 84° E. 4.70 chns.
N 60° 15' E. 27.10 "
East 3.20 "
S. 54° 15' E 32.75 "
S. 30° 15' E. 11.06 " to
Meander cor bet. Secs. 78-81

43

Meanders Tp. 6 S. R 2 E. of the S

24 and 25

Thence

Inx Sec. 25

S 30° 15' E. 17.24 chns.
South 21.60 "
S 25° W 48.00 " to
1-96-84
Meander cor. bet. Secs.
25 and 36.

Thence

Inx Secs. 36.

S. 25° W. 30.00 chns.
S. 11° W 19.27 "
S. 20° 15' W 4.00 "
S. 40° W 34.00 "
S. 44° W 5.70 " to
1-12-97
Meander Cor. 8.55 chns.
E. of co. to Secs. 35 & 36
on South Boundary of Tp.
November 4th 1879
From the Meander cor.

BOOK A-163

of the Salt Lake Meridian

14.92 chns. E of cor. point to Secs. 34 and 35 on S. Boundary Trun Ins Sec. 35

N 53°15' W. 3.00 chns.
N. 26°30' W. 30.12 " to
33 - 12
Meander cor. bet. Secs. 34 & 35

Thence in Secs. 34

N. 26°30' W. 16.88 chns
North 10.00 "
N 27° W 14.00 "
N 25°15' W. 15.14 " to
56 - 12
Meander cor. bet. Secs. 27 and 34

Thence in Sec. 27.

N. 25°15' W. 9.86 chns.
N. 6° W. 16.00 "
N 20° W. 5.83 "
N. 32°45' W 1.00 "
N 34°45' W 9.00 "
N 19°30' W. 24.00 "
43.69

Meanders Tp. 6 S. R 21 E. of the Sa

N 15° 15' E 19.53 chns 6

Meander cor. bet. Secs.

22 and 27

Thence in Sec. 22

N. 15° 15' E 10.87 chns.

N 8° 30' E 34.00 "

N 17° 30' W 12.00 "

N 49° 30' W 6.00 "

N 74° 30' W 15.00 "

S. 73° 45' W 29.70 " 6

Meander cor bet. Secs. 21 & 22

Thence in Sec. 21

S. 73° 45' W. 14.00 chns

S. 57° W. 17.00 "

S 8° 15' W. 8.50 "

S 48° 15' W. 14.50 "

S 24° 30' W. 2.00 "

S 72° W 14.50 "

S 79° 45' W 20.50 6

Meander cor. bet. Secs. 21 & 28

BOOK-A-163

the Salt Lake Meridian

Thence in Sec. 20.

S. 79°15' W. 33.70 chns 6

Meander cor. bet. Secs. 20 & 29

Thence in Sec. 29

S 44°30' W. 12.00 chns

S 58°30' W. 17.00 "

S 62°30' W. 28.30 " 6

Meander cor. bet. Secs. 29 & 30

Thence in Sec. 30.

S. 61°30' W. 14.50 chns

N. 45°15' W. 2.00 "

S. 75° W. 27.00 "

S. 26°45' W. 19.50 "

S 25°45' E. 20.00 " 6

Meander cor bet. Secs. 30 and 31

Thence in Sec. 31.

S 22°30' E. 25.00 chns

S 14°30' E. 23.00 "

S 40° E. 11.00 "

59.00

Meanders Tp. 6 S. R 21 E. of the

S 11° 15' E. 15.50 chns. to

31 & 32 Meander cor. bet. Secs. 31 & 32

Thence in Sec. 32

S. 70° E. 19.00 chns.

S. 50° E. 22.50 " to

41.50

Meander cor. 35.08 chns.

E of the cor. to Secs. 31 & 32.

on S. Boundary of Tp.

From Meander cor. 68.40

chns. E. of cor. to Secs.

31 and 32 on S. Boundary

I meander in Sec. 32.

N 75° E 4.00 chns

East 8.00 " to

12.00

Meander cor. bet Secs.

32 and 33

Thence in Sec. 33.

S 63° 30' E. 2.22. chns. to

Meander cor. 2.00 chns E. of cor to

Secs. 32 & 33 on S. Boundary of Tp.

November 5th 1879

BOOK-A-163

Salt Lake Meridian

Left Bank.

From the Meander cor. 8.00 chns. E of the cor. to Secs 32 and 33 I meander up stream as follows:

In Sec. 32.

Var 16°30' E.

N. 24°45' W. 3.50 chns.
N 55°30' W. 7.00 " to
Meander cor. bet. Secs. 32 & 33. 21.50

Thence in Sec. 32.

N. 85° 15' W. 9.50 chns.
S. 75° W. 12.00 "
N 81° 45' W. 21.50 "
N 50° W. 19.00 "
N 75°30' W. 24.00 " to
Meander cor. bet. Secs. 32 & 33 86.00

Thence in Sec. 31.

N. 50° W. 15.70 chns.
N 10° W. 13.00 "
28.70

Meanders Tp. 6 S. R 21 E. of the

N. 18° W. 18.00 chns.
N. 31° W. 14.00 " to
32.00
Meander cor. bet. Secs.
30 and 31

Thence in Sec. 30.

N. 19° W. 18.00 chns.
N 31° W. 10.00 "
N 77° 15' E. 27.00 "
East 2.00 " to
57.00
Meander cor. bet. Secs. 29 & 30

Thence in Sec. 29.

N. 60° E. 22.00 chns.
N. 66° E. 28.50 "
N 56° 30' E. 19.00 "
N 76° E. 20.00 " to
1 = 89.50
Meander cor. bet Secs. 28
and 29.

Thence in Sec. 28

N 70° 30' E. 29.50 chns. to
Meander cor. bet. Secs.

BOOK-A-163

21 and 28.

Fence in Sec. 21

N. 75° E.	19.00 chns.
N. 36°30' E.	9.00 "
N. 16° E.	11.00 "
N. 55° E.	21.00 "
N. 88°30' E.	8.00 " 40
	68.90

Meander cor. bet. Secs. 21 & 22

Fence in Sec. 22.

N. 66° E.	24.00 chns.
N. 86°15' E.	8.50 "
S. 33°30' E.	8.00 "
S. 11° W.	26.00 "
S. 21° W.	14.00 " 40
	81.30

Meander cor. bet. Secs. 22 and 27.

Fence in Sec. 27

S. 16°30' W.	10.00 chns.
S. 5°45' E.	29.00 "
S. 20° E.	44.50 " 40
	103.50

Meanders Tp. 6 S. R 21 E of the

Meander cor. bet. Secs.
27. & 34

Thence in Sec 34

S 11° E. 22.30 chus.
S 21° E. 57.60 "
South 4.50 " to
Meander cor. 64.57 chus.
E. of cor. to Secs. 33 & 34
on S. Boundary of Tp.
November 6th 1879.

From the Meander cor.
25.25 chus. E. of the cor.
to Secs. 35 and 36 on
S. Boundary of Tp.

In Sec. 36.

N 40° 30' E. 38.01 chus
North 8.50 "
N 20° 45' E. 45.50 " to
Meander cor. bet. Secs. 25 &
36.

Salt Lake Meridian

Thence in Sec. 25

N 30° 30' E. 24.00 chns

N 26° E. 5.00 " to

29.00

Meander cor. 25.40 chns. N.

of cor to Secs. 25 and 36 on

E. Boundary of Tp.

From the Meander Cor. 7.24

chns. N. of cor point to Secs

24 and 25. on E. Boundary

of Tp.

In Sec. 24

N. 33° W. 23.00 chns.

N 52° W. 30.00 "

N 80° W. 13.00 "

S 60° W. 18.00 "

S 71° 30' W 16.00 " to

1 = 20.00

Meander cor. bet. Secs.

23 and 24

Thence in Sec. 23

Meanders Tp. 6 S. R 21 E. of the Salt

S. 67° 15' W.	28.00 chus.
N 85° 45' W.	11.50 "
West	23.00 "
N. 65° 45' W	9.00 "
N 23° W	4.50 "
N 76° E.	25.00 "
N 58° 30' E.	13.00 "
N 16° E.	37.00 " to
	1 57.00
Meander cor.	24.75 chus.

151
80
71

West of the cor. to Secs. 13. 14. 23 and 24

The land on both sides of River is mostly good Bottom

Soil 1st rate

Small scattering groves of Quaken asp Timber, and heavy undergrowth of Willows Briers Hawthorns and Bullberries.

BOOK-A-163

E. of the Salt Lake Meridian

Augmented on 26 Mile 14.07 chs.
November 7th 1879

General Description

The surveyed portion of this Tp. consists of the Bottoms along Green River and adjacent benches, for the greater part irrigatable from Green River. The land is of good quality excepting in the Northern part which is broken and mountainous. The unsurveyed portion falls in unavailable mountains.

E. Buettner
U. S. Deputy Surveyor

BOOK-A-163

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, 18

The foregoing field notes of the survey of the

Subdivisions of fractional

Township No 6 S. *Range No* 21 E.

of the Salt Lake Meridian, Utah Territory,

Executed by E. Buettner

Under joint *contract No* 92

of the 13 *day of* June 1879

in the month of Oct & Nov. 1879

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.